



US 20070146304A1

(19) **United States**(12) **Patent Application Publication****Lowles et al.**(10) **Pub. No.: US 2007/0146304 A1**(43) **Pub. Date: Jun. 28, 2007**(54) **SYSTEM AND METHOD FOR ACHIEVING
OPTIMAL DISPLAY CONTRAST IN A
MOBILE COMMUNICATION DEVICE****Related U.S. Application Data**


(62) Division of application No. 10/007,831, filed on Nov. 5, 2001, now Pat. No. 7,209,150.

(60) Provisional application No. 60/246,126, filed on Nov. 6, 2000.

(76) Inventors: **Robert J. Lowles**, Waterloo (CA);
Marek Reksnis, Kitchener (CA); **Phat
H. Tran**, Waterloo (CA)**Publication Classification**(51) **Int. Cl.**
G09G 3/36 (2006.01)(52) **U.S. Cl.** **345/102**(57) **ABSTRACT**

A method is for calibrating a contrast offset value for an LCD contrast control system in a mobile device. The method includes the steps of adjusting a user contrast setting on the mobile device to a desired optimal values initializing the contrast offset value, determining a contrast ratio of the LCD, and incrementing the contrast offset value until the contrast ratio reaches a peak value.

Correspondence Address:

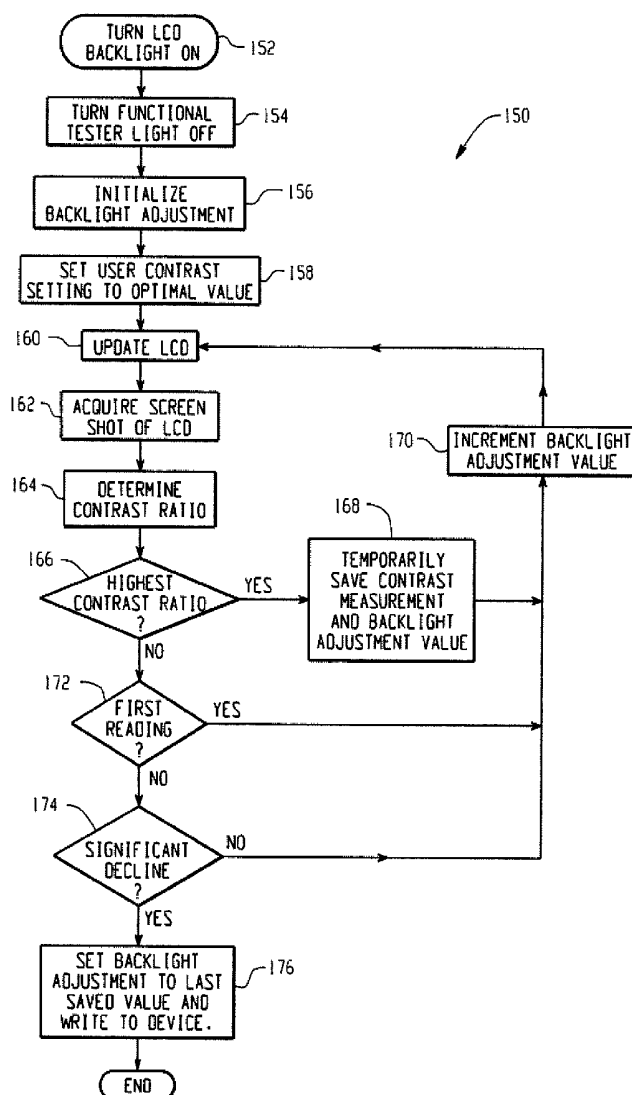David B. Cochran, Esq.**Jones, Day, Reavis & Pogue****North Point****901 Lakeside Avenue****Cleveland, OH 44114-1190 (US)**(21) Appl. No.: **11/683,762**(22) Filed: **Mar. 8, 2007**

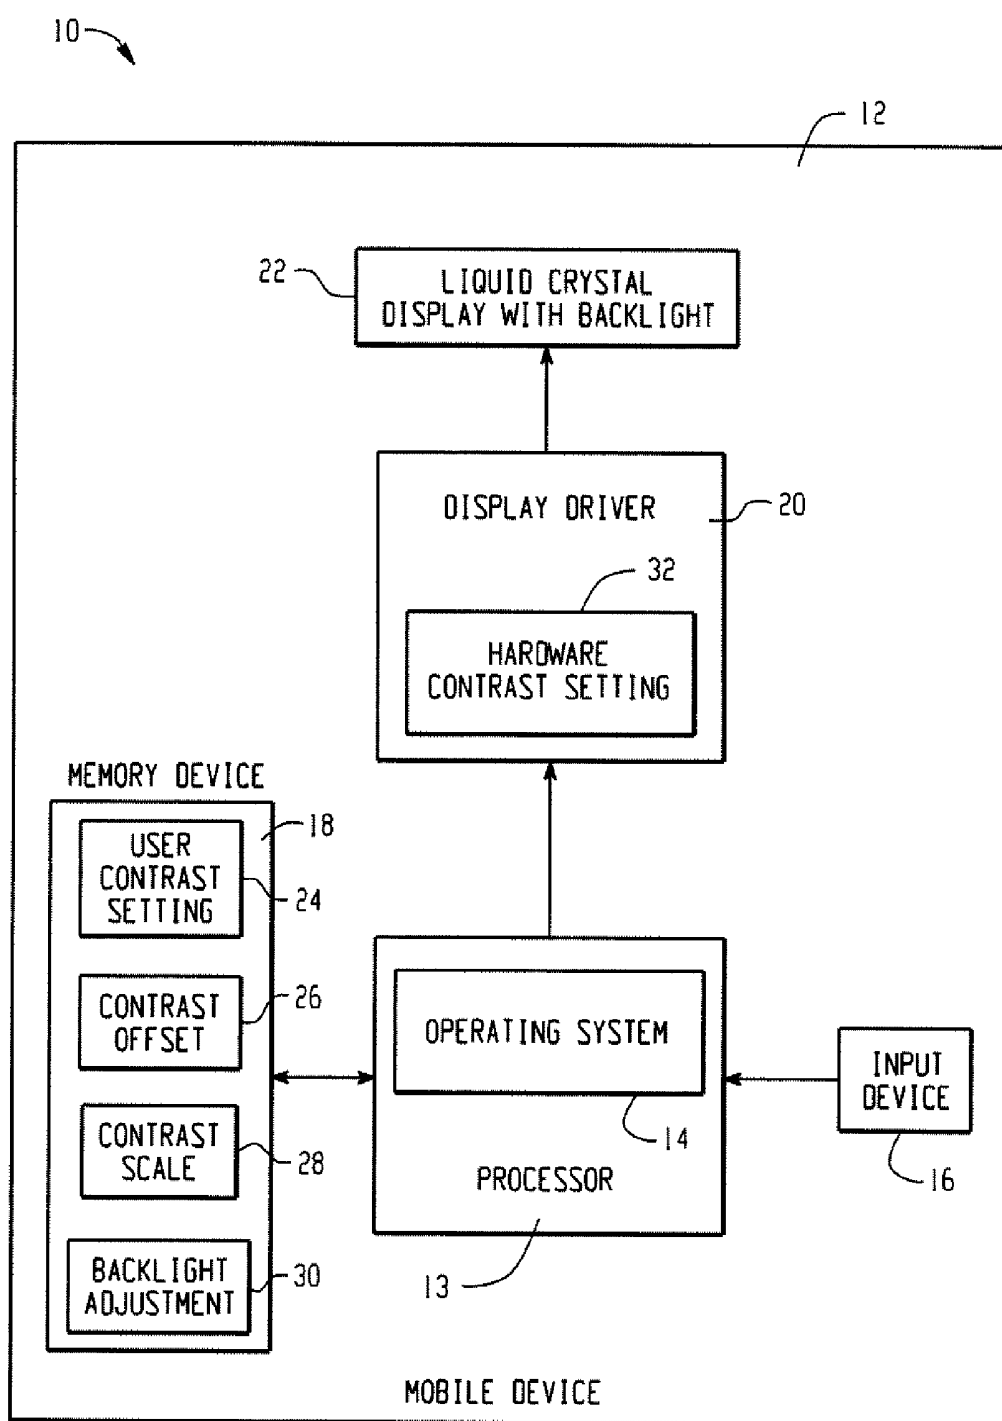


Fig. 1

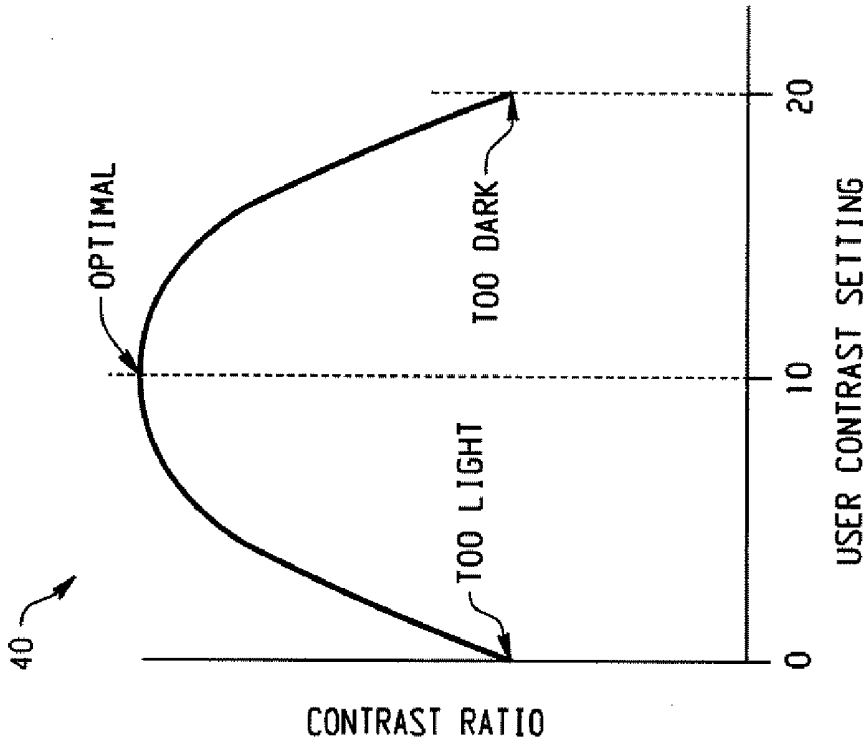


Fig. 2b

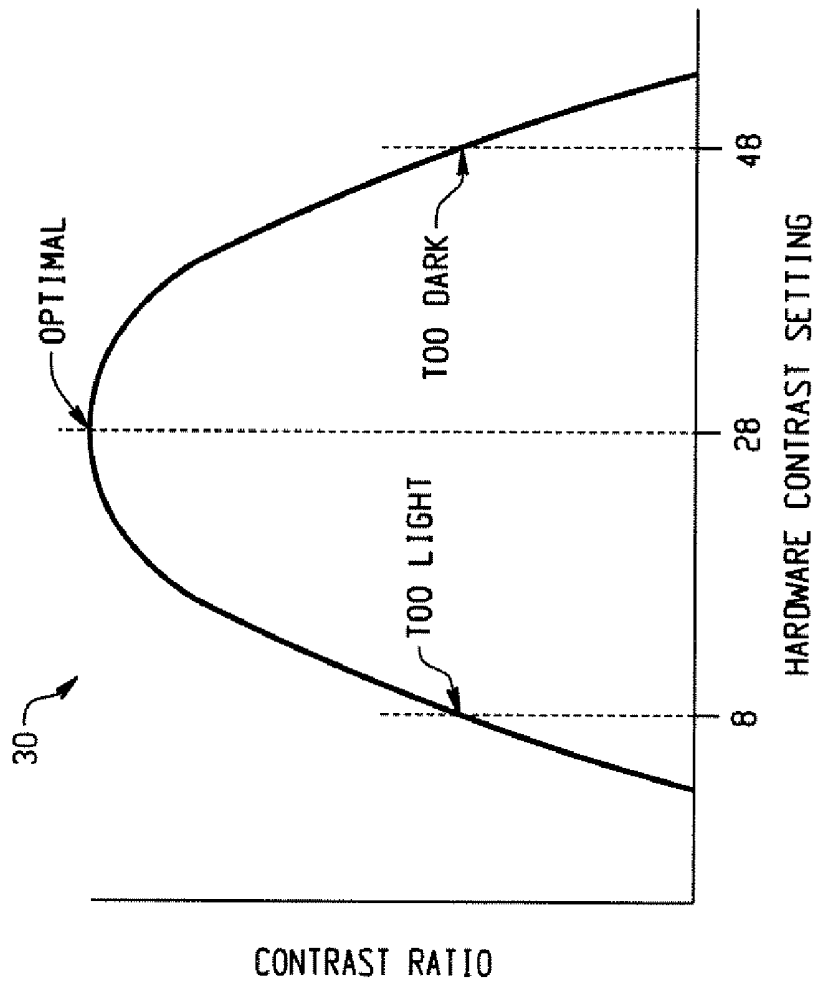


Fig. 2a

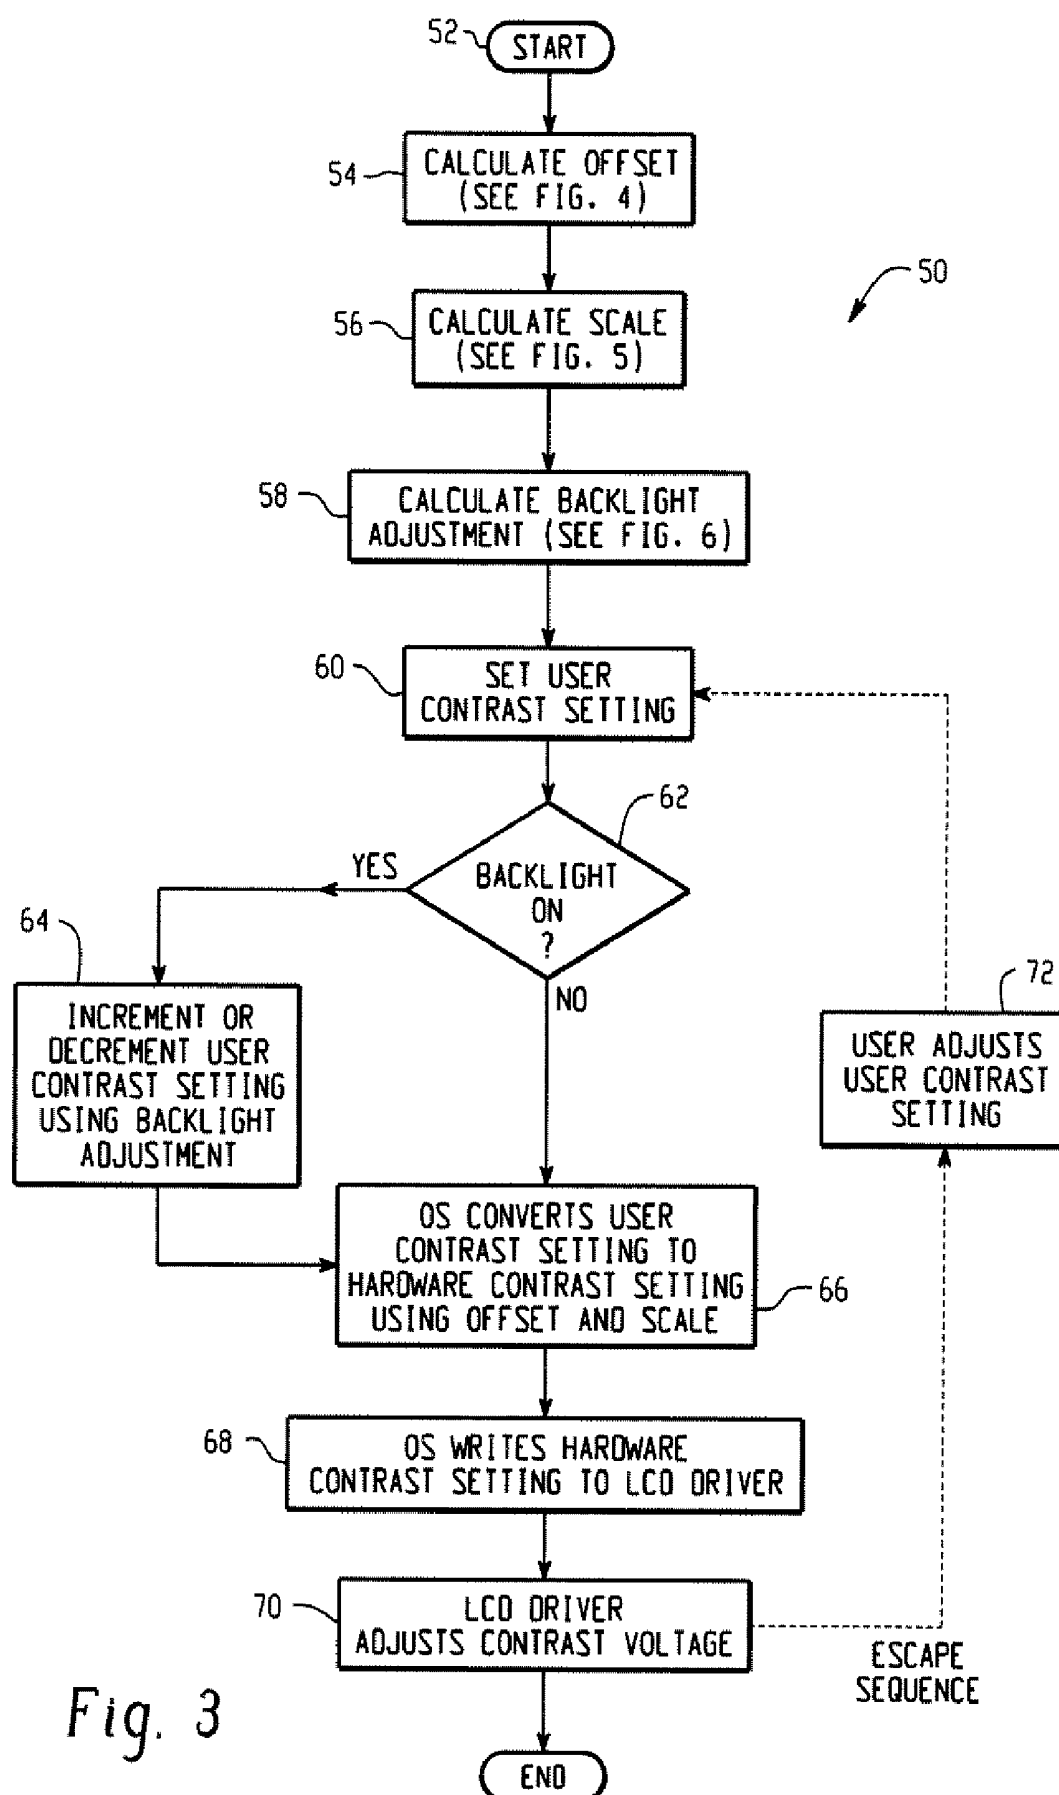


Fig. 3

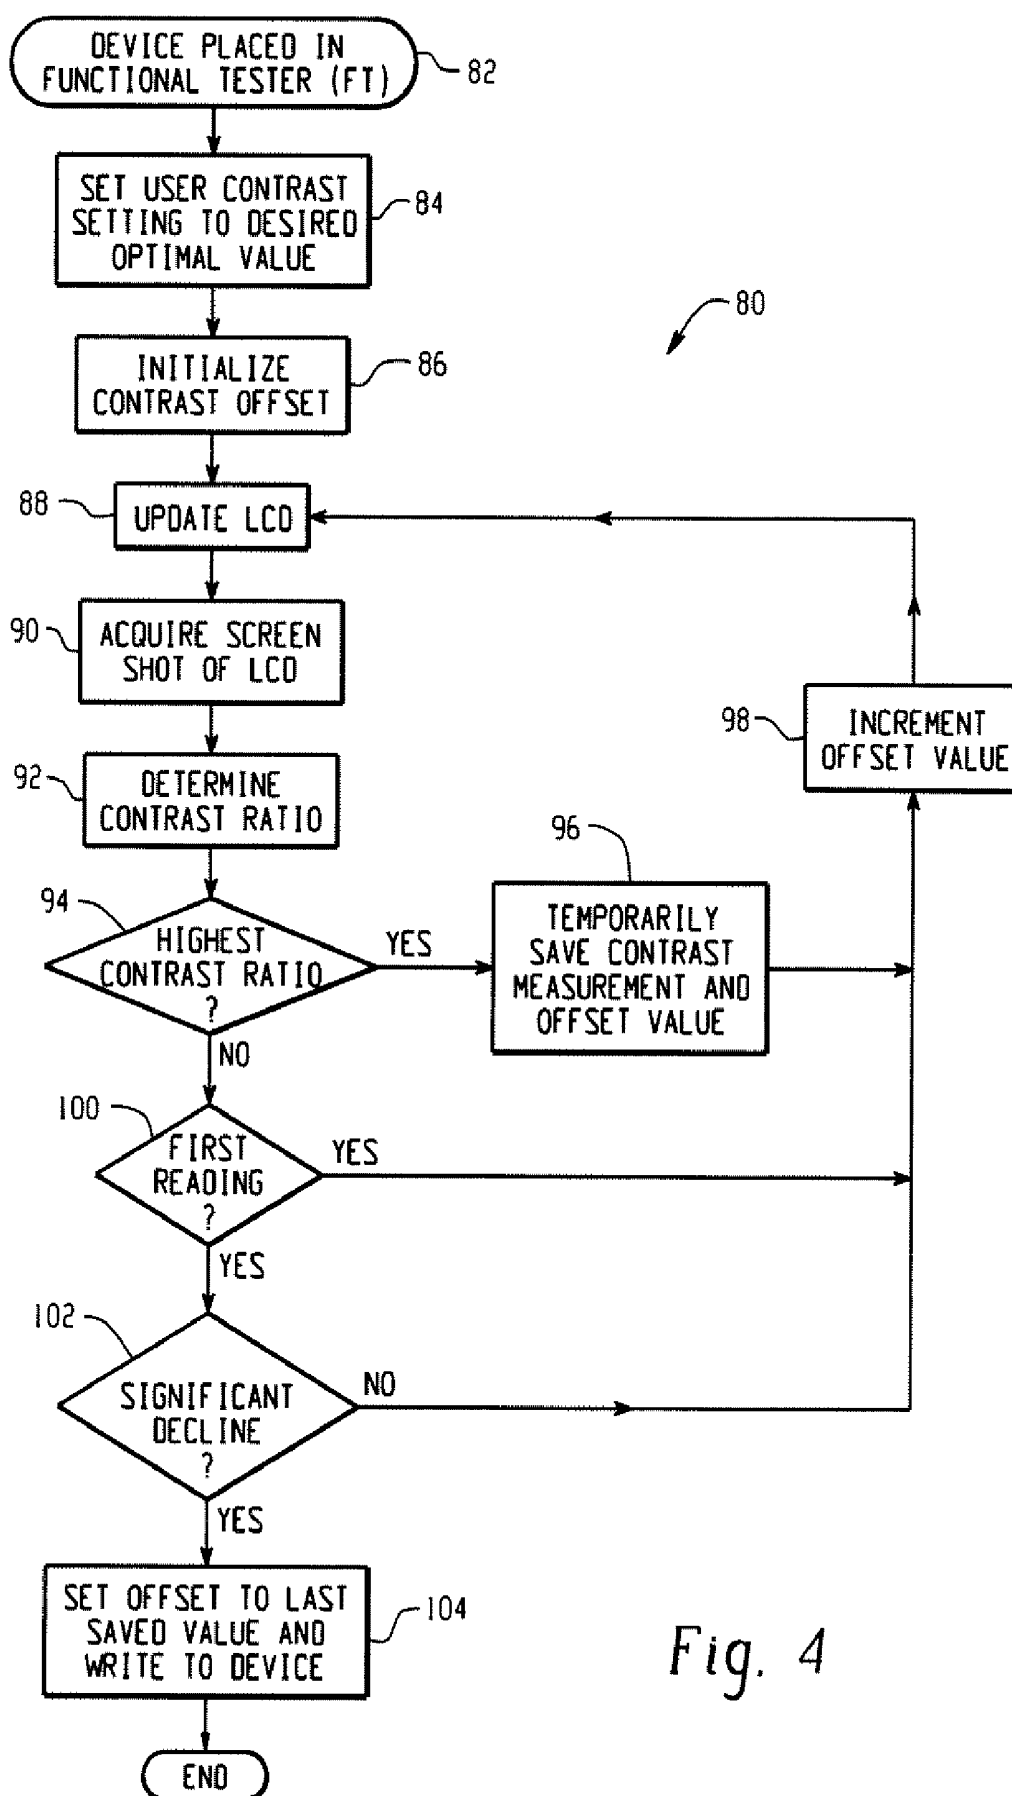
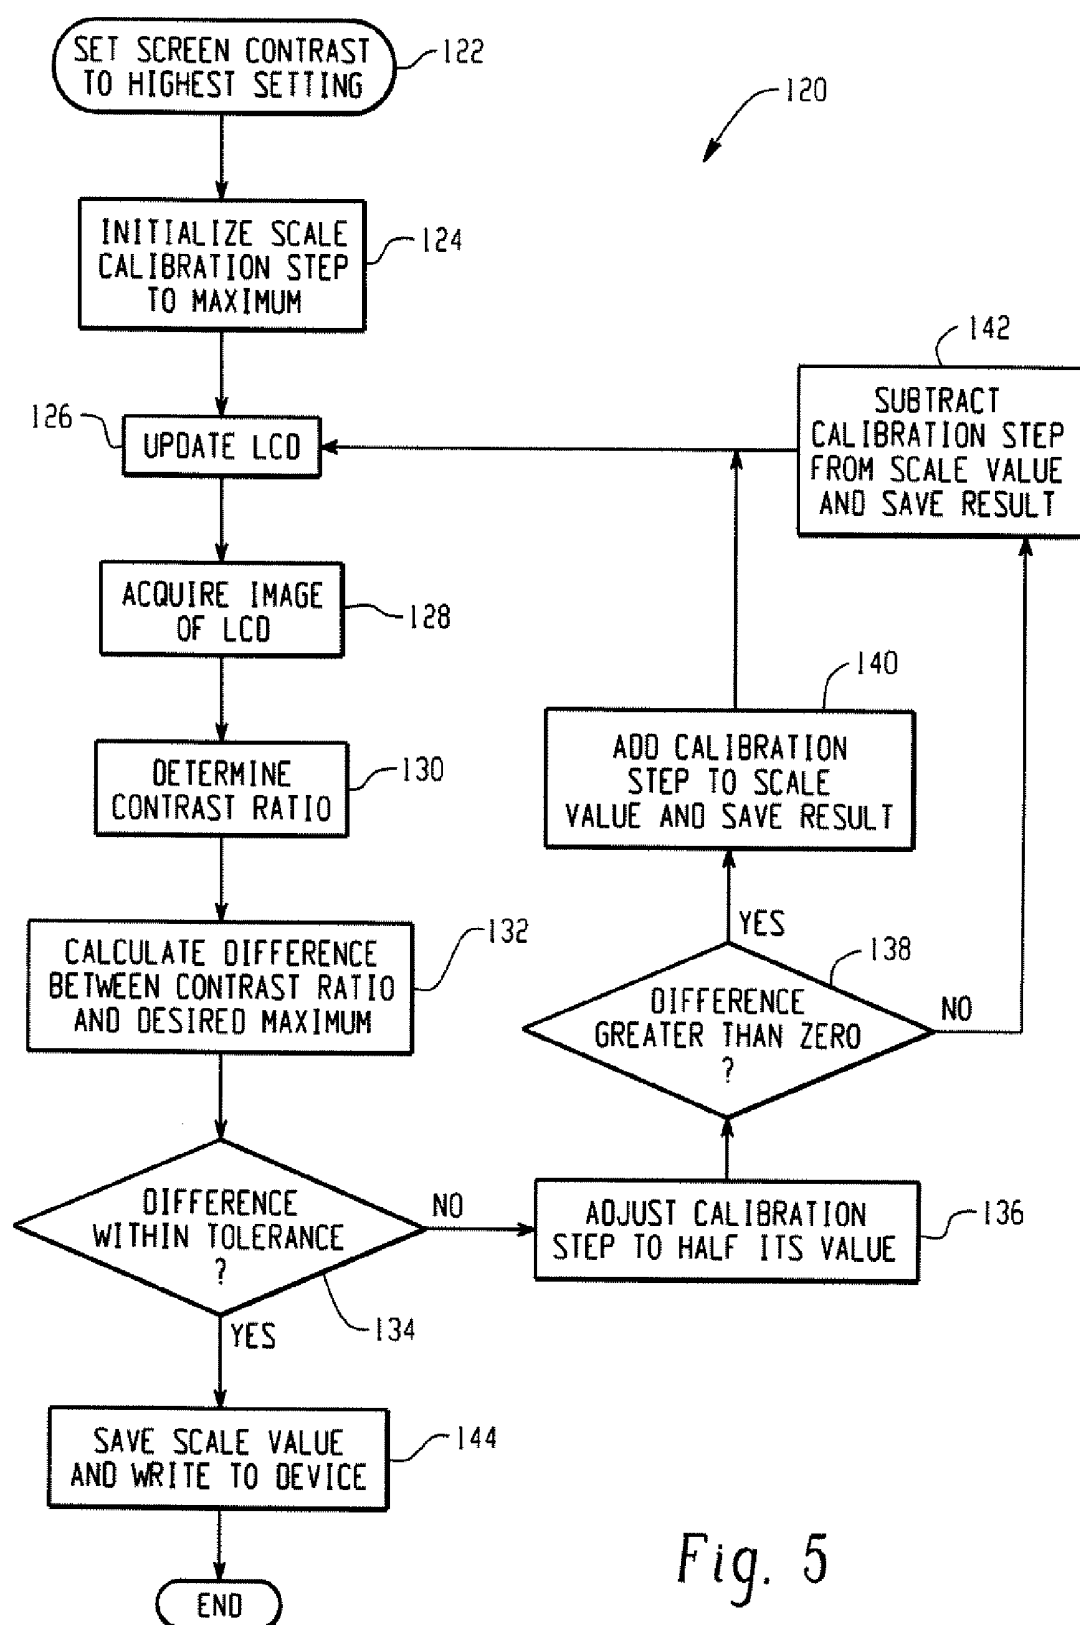


Fig. 4



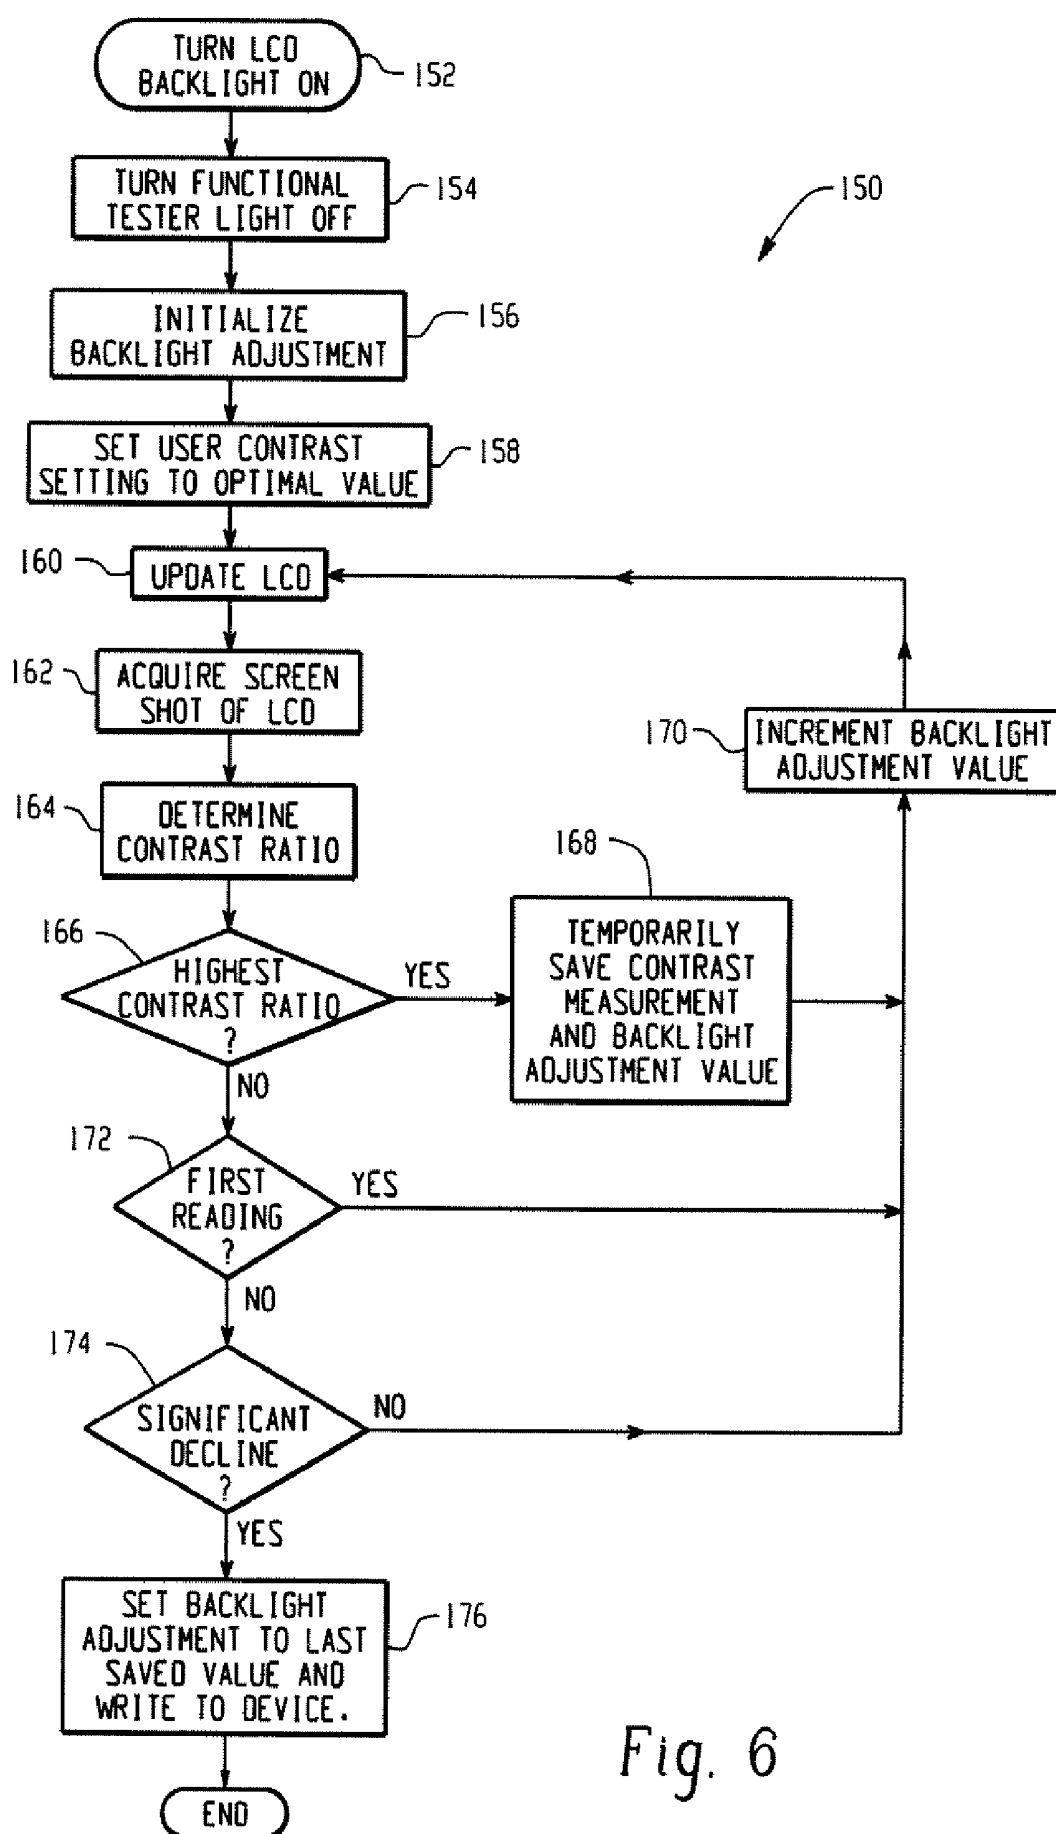


Fig. 6

SYSTEM AND METHOD FOR ACHIEVING OPTIMAL DISPLAY CONTRAST IN A MOBILE COMMUNICATION DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is a division of U.S. patent application Ser. No. 10/007,831, filed Nov. 5, 2001, hereby incorporated herein by reference, which claims the benefit of U.S. Provisional Application No. 60/246,126, filed Nov. 6, 2000, hereby incorporated herein by reference.

TECHNICAL FIELD

[0002] This application relates generally to a liquid crystal display (LCD) in a mobile communication device. More particularly, the invention provides a system and method for achieving optimal display contrast in mobile communication devices, such as Personal Digital Assistants, cellular telephones, and wireless two-way e-mail communication devices (collectively referred to herein as "mobile devices").

BACKGROUND

[0003] Mobile devices typically include a liquid crystal display (LCD) to display information to the mobile device user. Known mobile devices enable the mobile device user to control the contrast of the LCD with an external user interface, such as a thumb wheel. Contrast is the difference in luminance between an on and an off pixel on the LCD. The contrast range on a typical LCD is generally unduly broad, leaving only a small range over which a mobile device user will typically set the preferred contrast. For instance, if the user of a typical mobile device can control the contrast of the mobile device's LCD using a thumb wheel, then the extremely high position of the thumb wheel will generally result in all of the pixels being dark and the extremely low position of the thumb wheel will generally result in all of the pixels being light. At either the high or low contrast setting, the user will typically not be able to ascertain the difference between on and off pixels. It is typically only within a range of settings between the extremely low and high positions of the thumb wheel that a desired contrast setting may be achieved.

[0004] In addition, the contrast in an LCD often varies significantly from one LCD manufacturer to another, and may even vary between two LCDs from the same manufacturer. This deviation in LCD contrast makes it difficult for a mobile device manufacturer to calibrate the LCD in each mobile device to an optimal contrast setting before delivery to the user. For instance, the optimal LCD contrast setting on one mobile device may be at a point below the center of its contrast range, while the optimal contrast setting on another mobile device may be at a point above the center of its contrast range. As a result, mobile device manufacturers must often special order LCDs to match particular operating voltage specifications, increasing the cost of the display and thus the mobile device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIG. 1 is a block diagram of a liquid crystal display (LCD) contrast control system in a mobile device;

[0006] FIGS. 2(a) and 2(b) are graphs illustrating, respectively, the relationship between the contrast ratio of the LCD and the hardware and user contrast settings;

[0007] FIG. 3 is a flow diagram illustrating an exemplary method of achieving optimal contrast in an LCD;

[0008] FIG. 4 is a flow diagram illustrating an exemplary method of calibrating a contrast offset value for an LCD contrast control system on a mobile device;

[0009] FIG. 5 is a flow diagram illustrating an exemplary method of calibrating a contrast scale value for an LCD contrast control system on a mobile device; and

[0010] FIG. 6 is a flow diagram illustrating an exemplary method of calibrating a backlight adjustment value for an LCD contrast control system on a mobile device.

DESCRIPTION

[0011] Referring now to the drawing figures, FIG. 1 is a block diagram of a liquid crystal display (LCD) contrast control system 10 in a mobile device 12. The system 10 includes a processor 13, an input device 16, a memory device 18, a display driver 20 and an LCD 22. The processor 13 executes an operating system 14. The memory device 18 stores a user contrast setting 24, a contrast offset 26, a contrast scale 28 and a backlight adjustment 30. In addition, the display driver 20 preferably stores a hardware contrast setting 32. Operationally, the system 10 converts the user contrast setting 24 into the hardware contrast setting 32 in order to set the contrast ratio of the LCD 22, wherein the optimal user contrast setting 24 is preferably at the center of a usable contrast range.

[0012] The contrast of the LCD 22 is controlled by a contrast voltage from the display driver 20. As the voltage supplied to the LCD 22 is increased, the pixels on the LCD 22 become darker, thus affecting the contrast ratio of the LCD 22. The contrast ratio of an LCD is the ratio of the brightest pixels on the LCD over the darkest pixels on the LCD. As the contrast voltage supplied by the display driver 22 is increased from its minimum value, the luminance of the on (dark) pixels increases until the contrast ratio of the LCD 22 reaches its maximum or optimal value. At the maximum contrast ratio, the difference between the on (dark) and off (light) pixels is at its greatest possible value, and the contrast of the LCD 22 is optimal. As the contrast voltage from the display driver 22 is further increased above the optimal level, the off (light) pixels become darker, reducing the contrast ratio until the screen appears black.

[0013] The voltage supplied to the LCD 22 from the display driver 20 is controlled by the hardware contrast setting 32, which is preferably an integer. The hardware contrast setting 32 is preferably stored in a memory location on the display driver 22, but may alternatively be stored in any memory location on the mobile device 12 that is accessible by the display driver 22. The hardware contrast setting 32 preferably corresponds to a voltage level supplied by the display driver 20, and thus determines the contrast ratio of the LCD 22. Because the contrast may vary from one LCD to another, however, the hardware contrast setting 32 corresponding to the optimal contrast of the LCD 22 may not be at the center of the hardware contrast setting range. For instance, as illustrated in FIG. 2(a), if the range of possible hardware contrast settings 32 is from zero (0) to sixty (60), the optimal setting for the LCD 22 might be at a value above or below the midpoint (30), such as twenty-eight (28).

[0014] The user contrast setting 24 is preferably an integer stored in the memory device 18 that corresponds to a

hardware contrast setting 32. The range of available user contrast settings 24 for the mobile device 12 is preferably a usable range, such that substantially the entire range consists of contrast ratio settings that may be desirable to a mobile device user. The lowest available user contrast setting 24 preferably corresponds to a hardware contrast setting 32 at which the on (dark) pixels of the LCD 22 have a very low luminance, but may still be distinguished from the off (light) pixels. Similarly, the highest available user contrast setting 24 preferably corresponds to hardware contrast setting 32 at which the off (light) pixels have a very high luminance, but are still distinguishable from the on (dark) pixels. In addition, the user contrast setting 24 at the center of the available range preferably corresponds to the hardware contrast setting 32 resulting in the maximum (or optimal) contrast ratio for the LCD 22. For instance, as illustrated in FIG. 2(b), if the range of possible user contrast settings 24 is from zero (0) to twenty (20), then a user contrast setting of ten (10) will preferably result in an optimal LCD contrast ratio.

[0015] The contrast offset 26, contrast scale 28 and backlight adjustment 30 are preferably integers, which are calibrated and stored in the memory device 18 by the mobile device manufacturer, and which are used by the operating system 14 to convert the user contrast setting 24 into the hardware contrast setting 32. The contrast scale 28 is preferably calibrated by the mobile device manufacturer to map the range of user contrast settings to a preferred range of hardware contrast settings. For instance, with reference to FIGS. 2(a) and 2(b), the contrast scale 28 is preferably calibrated such that the maximum user contrast setting of twenty (20) corresponds to the hardware contrast setting of forty-eight (48) at which the LCD 22 becomes almost entirely dark, and the minimum user contrast setting of zero (0) corresponds to the hardware contrast setting of eight (8) at which the LCD 22 becomes almost entirely light. Similarly, the contrast offset 26 is preferably calibrated by the mobile device manufacturer to map the middle of the user contrast setting range to the hardware contrast setting that corresponds to the optimal contrast ratio for the LCD 22. For instance, and with reference again to FIGS. 2(a) and 2(b), the contrast offset 26 is preferably calibrated such that the user contrast setting of ten (10) corresponds to the optimal hardware contrast setting of twenty-eight (28). The backlight adjustment 30 is also preferably calibrated by the mobile device manufacturer, and adjusts the value of the user contrast setting 24 to compensate for the luminance provided by a backlight coupled to the LCD 22. Exemplary methods for calibrating the contrast offset 26, contrast scale 28 and backlight adjustment 30 are described below with reference to FIGS. 4, 5 and 6.

[0016] The operating system 14 executed by the processor 13 preferably converts the user contrast setting 24 into a hardware contrast setting 32 by applying the contrast offset 26 and the contrast scale 28 in the following linear equation:

$$HCS=S*UCS+O$$

where HCS is the hardware contrast setting 32, S is the contrast scale 28, UCS is the user contrast setting 24, and O is the contrast offset 26. For instance, FIG. 2(a) shows an exemplary range of hardware contrast settings 30 plotted as a function of the contrast ratio of the LCD 22, and FIG. 2(b) shows an exemplary range of user contrast settings 40 corresponding to the hardware contrast settings plotted in FIG. 2(a). The usable range of hardware contrast settings

plotted in FIG. 2(a) is from eight (8) to forty-eight (48), with twenty-eight (28) being the setting that corresponds to the optimal contrast ratio. The full range of user contrast settings plotted in FIG. 2(b) is from zero (0) to twenty (20), with ten (10) corresponding to the optimal contrast ratio. Thus, in order to transform a user contrast setting 24 into a value within the usable range of hardware contrast settings, the operating system would preferably apply the linear equation set forth above with a contrast offset of eight (8) and a contrast scale of two (2).

[0017] Referring again to FIG. 1, the user contrast setting 24 is preferably set at its optimal value by the mobile device manufacturer, but in a preferred embodiment may also be adjusted by a user with the input device 16. The input device 16 may be any known device capable of being used to enter text or commands into a mobile device, such as a keypad, thumbwheel, or touchscreen. In addition, the LCD 22 preferably includes a backlight that may be activated by the user in order to view the display in low lighting conditions. When the backlight is activated, the operating system 14 preferably automatically adjusts the user contrast setting 24 with the backlight adjustment 30 in order to compensate for the additional luminance provided by the backlight.

[0018] FIG. 3 is a flow diagram illustrating an exemplary method 50 of achieving optimal contrast in an LCD. The method begins at step 52. Steps 54-58 are calibration functions that are preferably performed by the mobile device manufacturer. In step 54, the contrast offset value of the mobile device is calibrated such that the center of the range of user contrast settings corresponds to a hardware contrast setting at which the contrast ratio of the LCD is optimal. Similarly, at step 56, the contrast scale is calibrated such that the range of user contrast settings corresponds to a range of hardware contrast settings within which a difference between the on (light) and off (dark) pixels on the LCD may be perceived by a typical mobile device user. Then, in step 58, the backlight adjustment value is calibrated such that a typical mobile device user will not perceive a difference in the contrast ratio of the LCD when the backlight is on or off. Exemplary methods for calibrating the contrast offset, contrast scale, and backlight adjustment are described below with reference to FIGS. 4, 5 and 6, respectively. Once the calibration functions have been performed, the mobile device manufacturer preferably saves an optimal user contrast setting to the mobile device in step 60, which is preferably at the center of the user contrast setting range.

[0019] In steps 60-72, the contrast of the LCD 22 is set and then adjusted during the normal operation of the mobile device. In step 62, the mobile device detects whether the LCD backlight is on or off. If the backlight is on, then the operating system 14 preferably applies the backlight adjustment 30 in step 64 to increment or decrement the user contrast setting 24 to compensate for the additional luminance of the backlight. Then, in steps 66 and 68, the operating system 14 converts the user contrast setting 24 to a hardware contrast setting 32 using the contrast offset 26 and scale 28 values, and preferably writes the hardware contrast setting 32 to a memory location on the LCD driver 20. The LCD driver 20 uses the hardware contrast setting 32 to generate a contrast voltage that controls the contrast ratio of the LCD 22 (step 70). If the contrast ratio set by the LCD driver 20 is undesirable, then the mobile device user may enter an escape sequence and adjust the user contrast setting

24 in step 72. The new user contrast setting 24 entered by the user then prompts the mobile device to repeat steps 60-70 in order to save the new user contrast setting 24, convert the new setting into a hardware contrast setting 32 and adjust the contrast of the LCD 22 accordingly.

[0020] FIG. 4 is a flow diagram illustrating an exemplary method 80 of calibrating the contrast offset value 26 for an LCD contrast control system 10 on a mobile device 12. In step 82, the mobile device 12 is placed in a functional tester. Preferably, the functional tester includes a digital camera mounted perpendicularly to the mobile device and a light source that preferably shines a light on the mobile device's LCD at twenty-two degrees (22°) from vertical in order to achieve optimum resolution from the camera without adding luminance to the LCD. In addition, the functional tester preferably includes a processing device, such as a micro-processor, which is capable of acquiring a digital image of the mobile device's LCD from the digital camera and calculating the contrast ratio of the LCD.

[0021] Once the mobile device 12 has been properly positioned in the functional tester, the user contrast setting 24 for the device is set to the desired optimal value in step 84. The desired optimal value is the user contrast setting 24 that is to correspond to the optimal contrast ratio for the LCD, and is preferably the mid-point of the range of user contrast settings. For example, with reference to FIG. 2(b), the desired optimal value for the user contrast setting 24 is ten (10). In step 86, the contrast offset value 26 is initialized, preferably by setting the offset to a value that the mobile device manufacturer has determined through experience to be most likely to map the desired optimal user contrast setting 24 to the hardware contrast resulting in the optimal contrast ratio for the LCD. Alternatively, however, the contrast offset 26 may be initialized to a more arbitrary value in step 86, such as zero. Then, in step 88, the initial contrast offset is used to update the contrast of the LCD.

[0022] In step 90, the digital camera on the functional tester takes an image of the LCD, which is analyzed by the functional tester in step 92 to determine the contrast ratio. The functional tester then determines in step 94 whether the contrast ratio calculated from the newly acquired image is the highest contrast ratio that has been recorded for the mobile device during the contrast offset calibration. If the contrast ratio is determined in step 94 to be at its higher recorded value, then the functional tester preferably saves the contrast ratio and contrast offset 26 to a temporary memory location (step 96), increments the contrast offset 26 by some predetermined step value (step 98), and repeats steps 88-94. The predetermined step value is preferably chosen as a sufficiently small increment, such as one (1), in order to prevent the contrast offset 26 from overshooting its desired value by a significant amount. If the contrast ratio is not at its highest recorded value in step 94, then the functional tester preferably determines in step 100 whether the contrast ratio has been calculated from the first image taken of the mobile device during the offset calibration. If the contrast ratio is the first reading for the mobile device, then the functional tester preferably increments the contrast offset 26 by the predetermined value (step 98), and repeats steps 88-94.

[0023] If the contrast ratio is not at its highest recorded value (step 94), and it is not the first reading of the device

(step 100), then in step 102 the functional tester compares the current contrast ratio reading with the previously saved contrast ratio reading (saved in step 96) to determine whether the contrast ratio of the LCD has declined significantly. A significant contrast ratio decline is preferably determined by the mobile device manufacturer to be a sufficiently large decline to indicate that the contrast ratio has past its optimal value and that the decline is not merely the result of a random fluctuation in the contrast ratio measurement. If the decline is not significant, then the functional tester preferably increments the contrast offset 26 by the predetermined value in step 98, and repeats steps 88-94. If the contrast ratio does show a significant decline, however, then the previously saved contrast offset value 26 (saved in step 96) is set as the calibrated contrast offset and is written to the mobile device in step 104.

[0024] FIG. 5 is a flow diagram illustrating an exemplary method 120 of calibrating the contrast scale value 28 for an LCD contrast control system 10 on a mobile device 12. The method 120 is preferably performed within the same functional tester as described above with reference to FIG. 4. In step 122, the user contrast setting 24 on the mobile device 12 is adjusted to its highest setting. In step 124, the scale calibration step is set to its maximum value. The scale calibration step is the amount by which the functional tester will adjust the contrast scale 28 in order to tune the maximum user contrast setting 24 to its desired LCD contrast ratio. As described above with reference to FIG. 2(a), the maximum desired LCD contrast ratio preferably corresponds to the hardware contrast setting 32 at which the LCD becomes almost entirely dark, such as the hardware contrast setting of forty-eight (48) shown in FIG. 2(a). Then, in step 126, the scale calibration step is applied to the contrast scale, and the contrast ratio of the LCD is updated.

[0025] Once the LCD has been updated using the initial scale calibration step, an image of the LCD is acquired by the digital camera on the functional tester in step 128, and the contrast ratio of the LCD is calculated in step 130. Then, in step 132, the functional tester determines the difference between the current contrast ratio and the preferred maximum contrast ratio described above. If the calculated difference between the current contrast ratio and the preferred maximum is within a predetermined tolerance (step 134), then the contrast scale value 28 is saved and written to the mobile device 12 in step 144. If the difference is not within the predetermined tolerance, however, then the calibration step is decremented, preferably to half its value, in step 136. Then, the new calibration step is either added (step 140) or subtracted (step 142) from the contrast scale value 28, depending upon whether the current contrast ratio was calculated to be smaller or larger than the preferred maximum contrast ratio (step 138). Once the contrast scale has been adjusted by the new calibration step, steps 126-142 are repeated until the difference between the current and desired maximum contrast ratios falls within the predetermined tolerance.

[0026] In a preferred embodiment, the functional tester also calculates the amount by which the contrast scale 28 was adjusted during calibration to determine whether the calibrated contrast offset value 26 needs to be compensated. If the contrast scale 28 has been adjusted far enough to move the optimal contrast ratio from the optimal user contrast setting 24 (preferably the middle setting), then the contrast

offset **26** is preferably adjusted by a compensation value and resaved to the mobile device. The contrast offset **26** may, for example, be compensated using the following equation:

$$\text{Comp} = \text{OUCS} * (\text{OScale} - \text{DScale}) / 256$$

where Comp is the compensation value, OUSC is the optimal user contrast setting, OScale is the calibrated (optimal) contrast scale value, and DScale is the initial (default) offset scale value. Using this equation, the compensation value (Comp) is added to the contrast offset provided that Comp is greater than zero (0).

[0027] FIG. 6 is a flow diagram illustrating an exemplary method **150** of calibrating the backlight adjustment value **30** for an LCD contrast control system **10** on a mobile device **12**. The method **150** is preferably performed by the same functional tester as described above with reference to FIG. 4. To begin calibration, the backlight of the LCD is turned on in step **152**, and the functional tester light is turned off in step **154**. The backlight adjustment value **30** is initialized, preferably to zero (0), in step **156**, and the user contrast setting **24** is set to its optimal value in step **158**. Then, in step **160** the initialized backlight setting **30** and user contrast setting **24** are used to update the contrast of the LCD in step **160**.

[0028] In step **162**, the digital camera on the functional tester takes an image of the LCD, which is analyzed by the functional tester in step **164** to calculate the contrast ratio. Then, in step **166**, the functional tester determines whether the contrast ratio calculated from the newly acquired image is the highest contrast ratio recorded from the mobile device under test. If the contrast ratio is determined in step **166** to be at its highest recorded value, then the functional tester preferably saves the contrast ratio and backlight adjustment value to a temporary memory location (step **168**), increments the backlight adjustment by a predetermined step value (step **170**), and repeats steps **160-166**. The predetermined step value is preferably set as one (1) in order to prevent the backlight adjustment from overshooting its optimal value.

[0029] If the contrast ratio is not at its highest recorded value in step **166**, then the functional tester preferably determines, in step **172**, whether the contrast ratio has been calculated from the first image taken during the backlight calibration of the device. If the contrast ratio is the first reading, then the functional tester preferably increments the backlight adjustment by the predetermined value (step **170**), and then repeats steps **160-166**.

[0030] If the contrast ratio is not at its highest recorded value (step **166**), and it is not the first reading during the backlight calibration (step **172**), then, in step **174**, the functional tester compares the current contrast ratio with the previously saved contrast ratio (saved in step **168**) to determine if the contrast ratio has significantly declined. As explained above, a significant contrast ratio decline is preferably a decline that is large enough to indicate that the contrast ratio has past its optimal value and that the decline is not resultant from measurement fluctuations. If the decline is not significant, then the functional tester preferably increments the backlight adjustment by the predetermined value in step **170**, and then repeats steps **160-166**. If the contrast ratio has shown a significant decline, however, then the previously saved backlight adjustment value (saved in step

168) is set as the calibrated backlight adjustment, and is written to the mobile device in step **176**.

[0031] The embodiments described herein are examples of structures, systems or methods having elements corresponding to the elements of the invention recited in the claims. This written description may enable those skilled in the art to make and use embodiments having alternative elements that likewise correspond to the elements of the invention recited in the claims. The intended scope of the invention thus includes other structures, systems or methods that do not differ from the literal language of the claims, and further includes other structures, systems or methods with insubstantial differences from the literal language of the claims.

1. A method for calibrating a contrast offset value for an LCD contrast control system in a mobile device, comprising:

adjusting a user contrast setting on the mobile device to a desired optimal value;

initializing the contrast offset value;

determining a contrast ratio of the LCD; and

incrementing the contrast offset value until the contrast ratio reaches a peak value.

2. The method of claim 1 wherein the contrast offset value is initialized to zero.

3. The method of claim 1 wherein the contrast offset value is initialized to a predetermined value.

4. The method of claim 1 further comprising:

taking an image of the LCD; and

determining the contrast ratio of the LCD from the image.

5. The method of claim 1 wherein the incrementing step includes:

determining whether the contrast ratio is higher than any previously measured values;

if the contrast ratio is higher than any previously measured values, then saving the contrast offset value and contrast ratio to a memory location, incrementing the contrast offset value, and determining an updated contrast ratio;

if the contrast ratio is not higher than any previously measured values, then determining whether the contrast ratio is a first measured value;

if the contrast ratio is the first measured value, then incrementing the contrast offset value and determining an updated contrast ratio; and

if the contrast ratio is not the first measured value, then setting the contrast offset on the mobile device to the saved contrast offset value.

6. The method of claim 1 wherein the incrementing step includes:

determining whether the contrast ratio is higher than any previously measured values;

if the contrast ratio is higher than any previously measured values, then saving the contrast offset value and contrast ratio to a memory location, incrementing the contrast offset value, and determining an updated contrast ratio;

if the contrast ratio is not higher than any previously measured values, then determining whether the contrast ratio is a first measured value;

if the contrast ratio is the first measured value, then incrementing the contrast offset value and determining an updated contrast ratio;

if the contrast ratio is not the first measured value, then determining whether the contrast ratio is substantially less than the saved contrast ratio;

if the contrast ratio is not substantially less than the saved contrast ratio, then incrementing the contrast offset value and determining an updated contrast ratio; and

if the contrast ratio is substantially less than the saved contrast ratio, then setting the contrast offset value on the mobile device to the saved contrast offset value.

7. A method for calibrating a contrast scale value for an LCD contrast control system in a mobile device, comprising:

adjusting a user contrast setting on the mobile device to a highest setting;

initializing the contrast scale value;

determining a contrast ratio of the LCD; and

incrementing or decrementing the contrast scale value until the contrast ratio reaches a desired maximum value.

8. The method of claim 7 wherein the contrast scale value is incremented or decremented by a scale calibration step value.

9. The method of claim 8 further comprising:

initializing the calibration step value to a pre-selected maximum step value.

10. The method of claim 8 wherein the scale calibration step value is reduced each time the contrast scale value is incremented or decremented.

11. The method of claim 10 wherein the scale calibration step is reduced by one half each time the contrast value is incremented or decremented.

12. The method of claim 7 wherein the step of incrementing or decrementing includes:

determining whether the contrast ratio of the LCD is substantially equivalent to a desired maximum value;

if the contrast ratio is substantially equivalent to the desired maximum value, then saving the contrast scale value to the mobile device;

if the contrast ratio is not substantially equivalent to the desired maximum, then determining whether the contrast ratio of the LCD is above or below the desired maximum value;

if the contrast ratio is not substantially equivalent to the desired maximum, and if the contrast ratio of the LCD is above the desired maximum value, then decrementing the contrast scale value until the contrast ratio reached the desired maximum value; and

if the contrast ratio is not substantially equivalent to the desired maximum, and if the contrast ratio of the LCD is below the desired maximum value, then increment-

ing the contrast scale value until the contrast ratio reaches the desired maximum value.

13. The method of claim 7 wherein the step of incrementing or decrementing includes:

determining whether the contrast ratio of the LCD is within a pre-selected tolerance range of a desired maximum value;

If the contrast ratio is within the pre-selected tolerance range of the desired maximum value, then saving the contrast scale value to the mobile device;

if the contrast ratio is not within the pre-selected tolerance range of the desired maximum value, then determining whether the contrast ratio of the LCD is above or below the desired maximum value;

if the contrast ratio is not within the pre-selected tolerance range of the desired maximum value, and if the contrast ratio of the LCD is above the desired maximum value, then decrementing the contrast scale value until the contrast ratio reached the desired maximum value; and

if the contrast ratio is not within the pre-selected tolerance range of the desired maximum value, and if the contrast ratio of the LCD is below the desired maximum value, then incrementing the contrast scale value until the contrast ratio reaches the desired maximum value.

14. The method of claim 7 wherein the contrast scale value is initialized to zero.

15. The method of claim 7 further comprising:

taking an image of the LCD; and

determining the contrast ratio of the LCD from the image.

16. A method for calibrating a backlight adjustment value for an LCD contrast control system in a mobile device, comprising:

turning on a LCD backlight;

initialize the backlight adjustment value;

adjusting a user contrast setting on the mobile device to a pre-calibrated optimal value;

determining a contrast ratio of the LCD; and

incrementing the backlight adjustment value until the contrast ratio reaches a peak value.

17. The method of claim 16 wherein the backlight adjustment value is initialized to zero.

18. The method of claim 16 further comprising:

taking an image of the LCD; and

determining the contrast ratio of the LCD from the image.

19. The method of claim 16 wherein the incrementing step includes:

determining whether the contrast ratio is higher than any previously measured values;

if the contrast ratio is higher than any previously measured values, then saving the backlight adjustment value and contrast ratio to a memory location, incrementing the backlight adjustment value, and determining an updated contrast ratio;

if the contrast ratio is not higher than any previously measured values, then determining whether the contrast ratio is a first measured value;

if the contrast ratio is the first measured value, then incrementing the backlight adjustment value and determining an updated contrast ratio; and

if the contrast ratio is not the first measured value, then setting the backlight adjustment value on the mobile device to the saved backlight adjustment value.

20. The method of claim 16, wherein the step of incrementing the backlight adjustment value until the contrast ratio reaches a peak value is performed by a method comprising the steps of:

determining whether the contrast ratio is higher than any previously measured values;

if the contrast ratio is higher than any previously measured values, then saving the backlight adjustment value and contrast ratio to a memory location, incrementing the backlight adjustment value, and determining an updated contrast ratio;

if the contrast ratio is not higher than any previously measured values, then determining whether the contrast ratio is a first measured value;

if the contrast ratio is the first measured value, then incrementing the backlight adjustment value and determining an updated contrast ratio;

if the contrast ratio is not the first measured value, then determining whether contrast ratio is substantially less than the saved contrast ratio;

if the contrast ratio is not substantially less than the saved contrast ratio, then incrementing the backlight adjustment value and determining an updated contrast ratio; and

if the contrast ratio is substantially less than the saved contrast ratio, then setting the backlight adjustment value on the mobile device to the saved backlight adjustment.

* * * * *

专利名称(译)	用于在移动通信设备中实现最佳显示对比度的系统和方法		
公开(公告)号	US20070146304A1	公开(公告)日	2007-06-28
申请号	US11/683762	申请日	2007-03-08
[标]申请(专利权)人(译)	LOWLES 罗伯特·J· REKSNIS MAREK TRAN PHAT ^ h		
申请(专利权)人(译)	LOWLES 罗伯特·J· REKSNIS MAREK TRAN PHAT ^ h		
当前申请(专利权)人(译)	黑莓公司		
[标]发明人	LOWLES ROBERT J REKSNIS MAREK TRAN PHAT H		
发明人	LOWLES, ROBERT J. REKSNIS, MAREK TRAN, PHAT H.		
IPC分类号	G09G3/36 G06F3/023 G06F3/048 G09G3/34 H04M1/22 H04M1/725 H04W88/02		
CPC分类号	G06F3/04897 G09G3/3406 G09G3/36 G09G2320/0606 G09G2320/066 H04M1/22 H04M1/72563		
优先权	60/246126 2000-11-06 US		
其他公开文献	US7843413		
外部链接	Espacenet USPTO		

摘要(译)

一种方法用于校准移动设备中的LCD对比度控制系统的对比度偏移值。该方法包括以下步骤：将移动设备上的用户对对比度设置调整为初始化对比度偏移值的期望最佳值，确定LCD的对比度，以及增加对比度偏移值直到对比度达到峰值。

