



US 20030122758A1

(19) **United States**(12) **Patent Application Publication**

Lee et al.

(10) **Pub. No.: US 2003/0122758 A1**(43) **Pub. Date:****Jul. 3, 2003**(54) **METHOD OF DRIVING CHOLESTERIC LIQUID CRYSTAL DISPLAY PANEL FOR ACCURATE GRAY-SCALE DISPLAY**(52) **U.S. Cl. 345/89**(76) **Inventors:** Nam-Seok Lee, Suwon-City (KR);
Woon-Seop Choi, Seoul (KR);
Hee-Jung Lee, Seongnam-City (KR);
Min-Kyu Kim, Pohang-City (KR);
Hyun-Soo Shin, Seoul (KR)(57) **ABSTRACT**

There is provided a method of driving a cholesteric liquid crystal display (LCD) panel by sequentially applying a selection line voltage to individual scan electrode lines and simultaneously applying data signals to all data electrode lines in order to selecting a state of each cholesteric liquid crystal cell according to a given gray scale level. Each selection time, during which the selection line voltage is applied to a certain scan electrode line and simultaneously the data signals are applied to all of the data electrode lines, is constant. Each selection time is divided into a first part time and a second part time. A low selection line voltage is applied to a relevant scan electrode line during the first part time. A high selection line voltage having a different level from the low selection line voltage is applied to the relevant scan electrode line during the second part time. A data pulse having a width corresponding to either the first part time or the second part time is applied to all of the data electrode lines at different time points according to the gray scale level of a relevant cholesteric liquid crystal cell during the selection time.

Correspondence Address:

Robert E. Bushnell**Suite 300****1522 K Street, N.W.****Washington, DC 20005 (US)**(21) **Appl. No.: 10/247,551**(22) **Filed: Sep. 20, 2002**(30) **Foreign Application Priority Data**

Dec. 27, 2001 (KR) 85908/2001

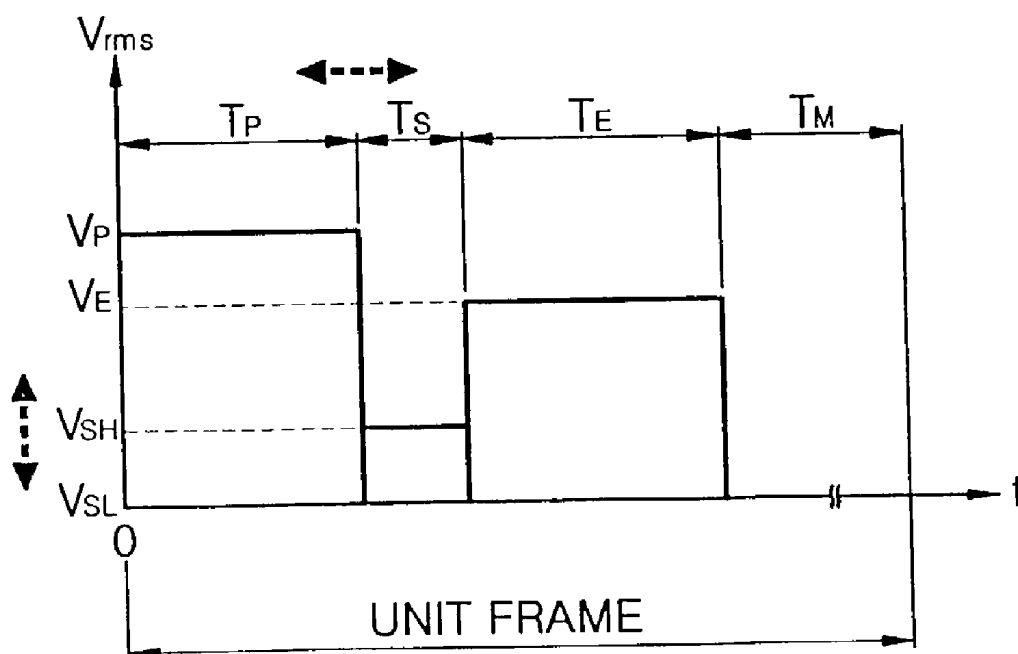
Publication Classification(51) **Int. Cl.⁷ G09G 3/36**

FIG. 1

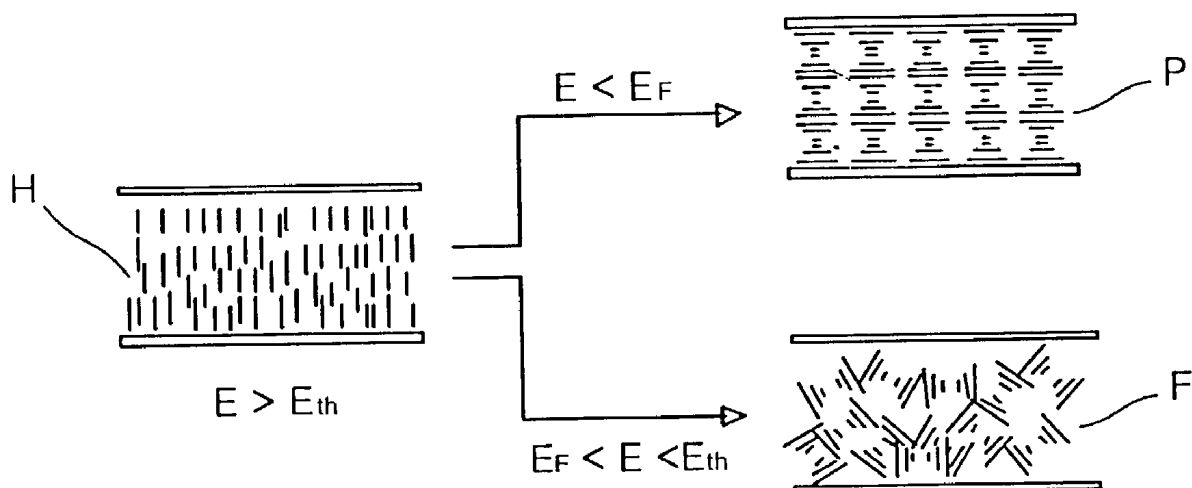


FIG. 2

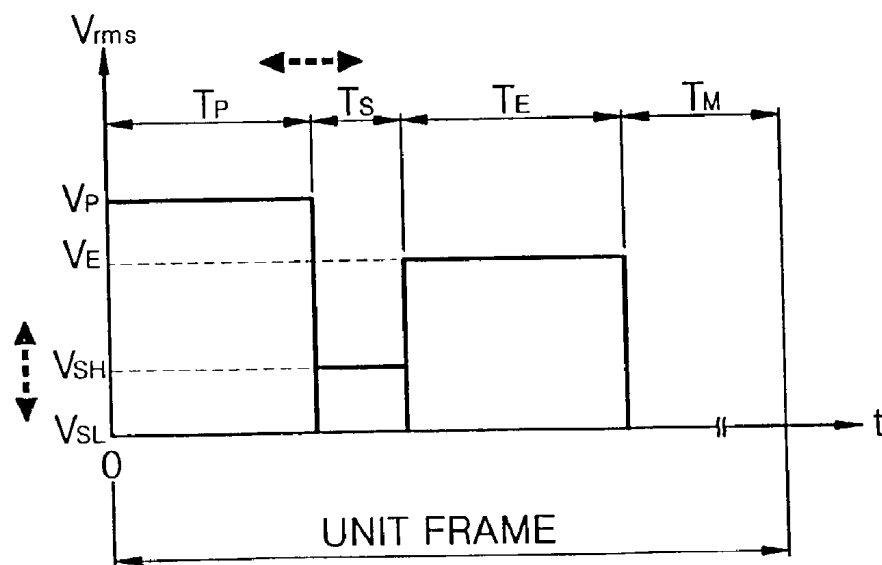


FIG. 3

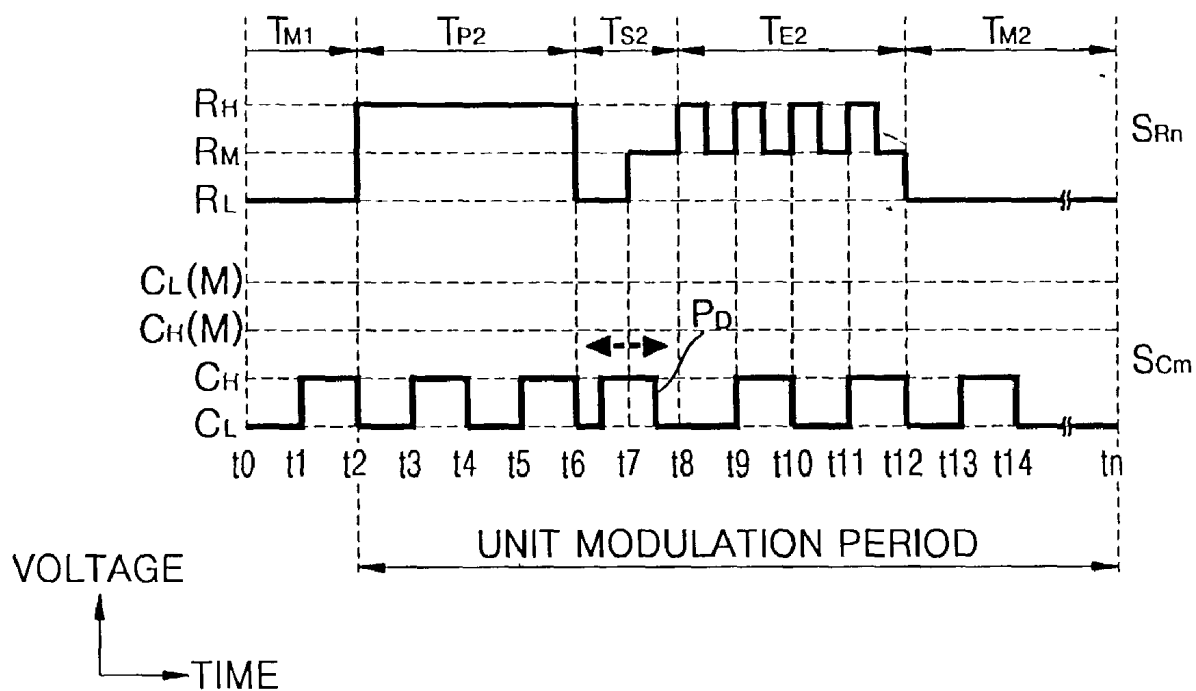


FIG. 4

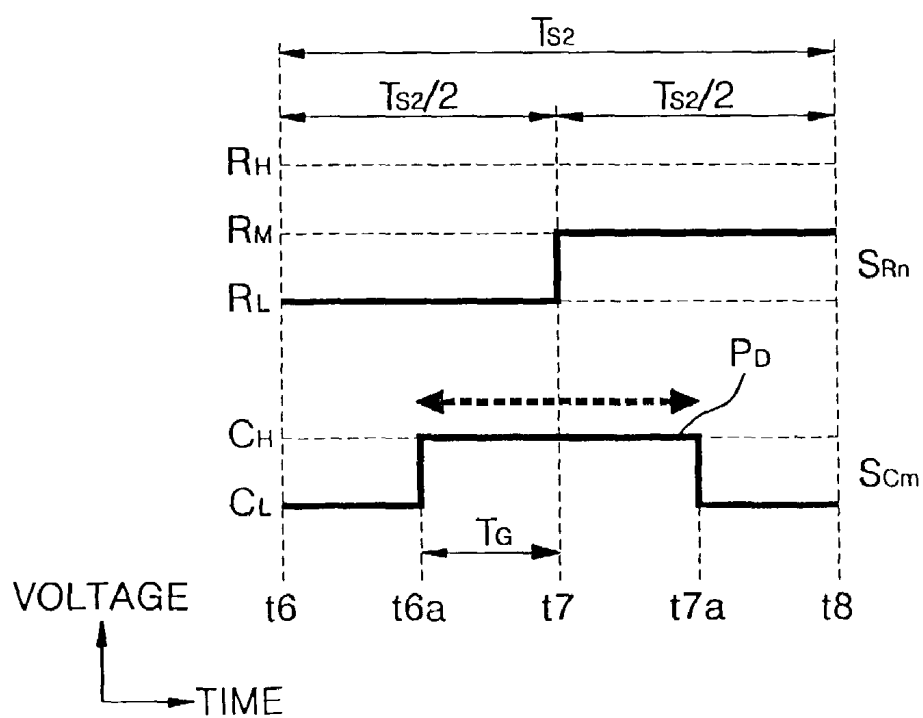


FIG. 5

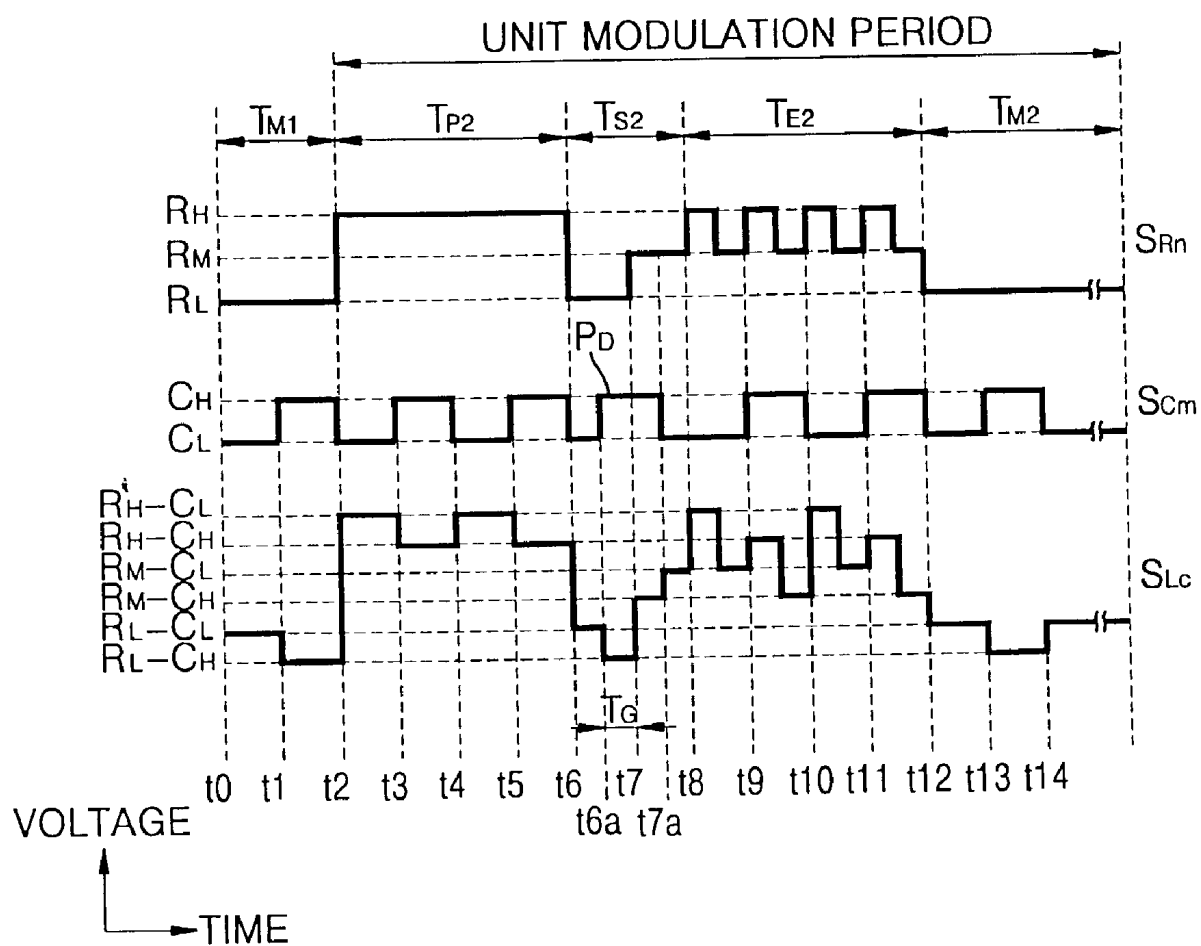


FIG. 6


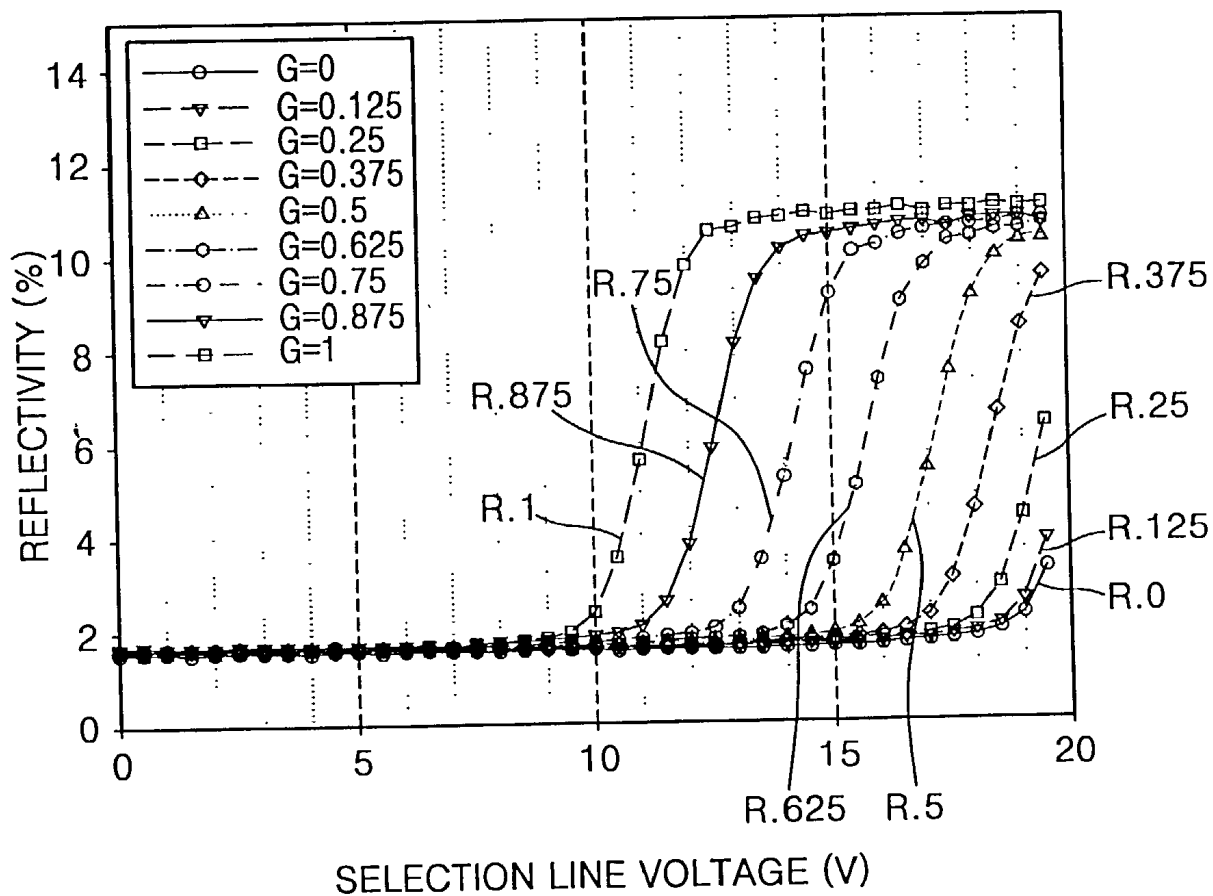


FIG. 7

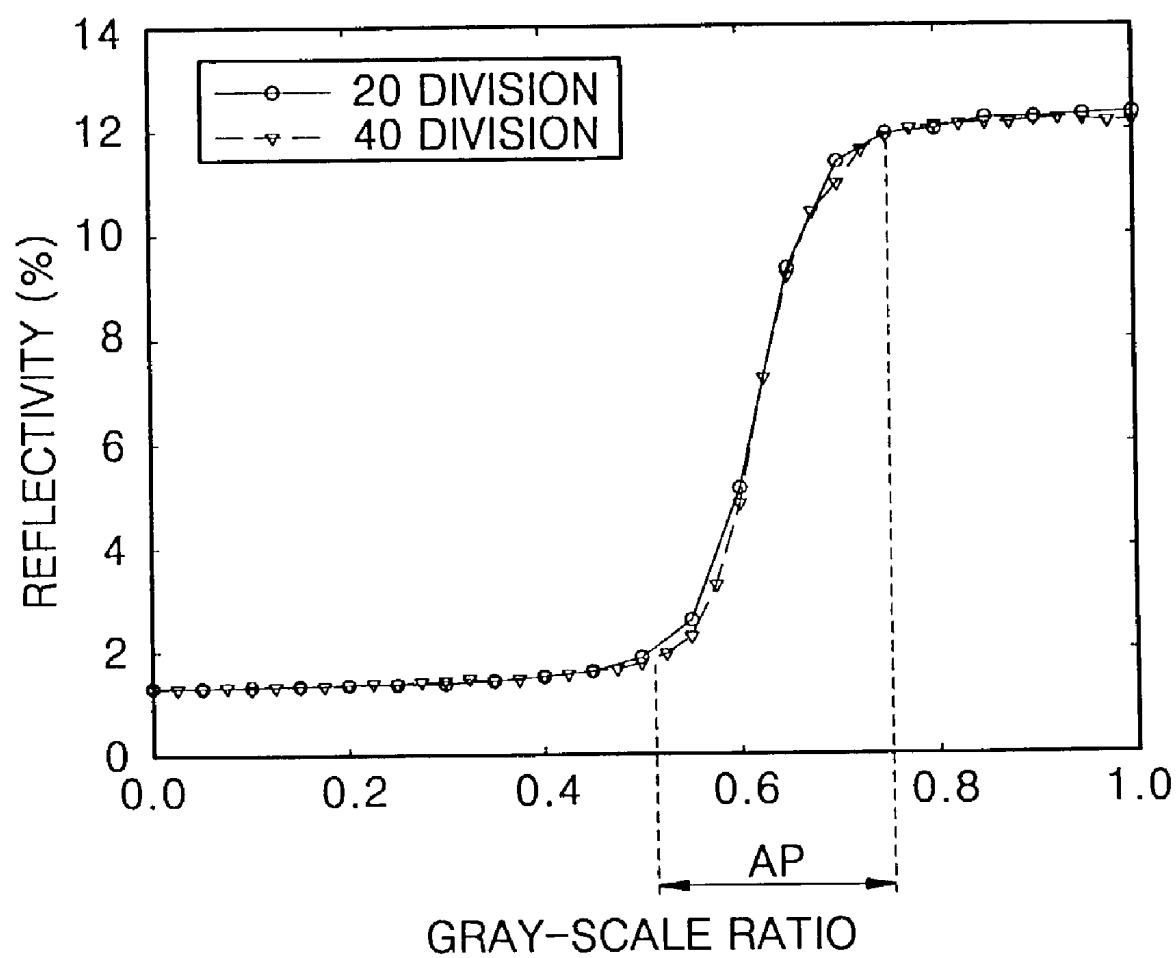

METHOD OF DRIVING CHOLESTERIC LIQUID CRYSTAL DISPLAY PANEL FOR ACCURATE GRAY-SCALE DISPLAY

CLAIM OF PRIORITY

[0001] This application makes reference to, incorporates the same herein, and claims all benefits accruing under 35 U.S.C. §119 from my application METHOD OF DRIVING CHOLESTERIC LIQUID CRYSTAL DISPLAY PANEL FOR ACCURATE GRAY-SCALE DISPLAY filed with the Korean Industrial Property Office on Dec. 27, 2001 and there duly assigned Serial No. 2001-0085908.

BACKGROUND OF THE INVENTION

[0002] 1. Technical Field

[0003] The present invention relates to a method of driving a cholesteric liquid crystal display panel, and more particularly, to a method of driving a cholesteric liquid crystal display panel causing the state of each cholesteric liquid crystal cell to be selected according to a given gray scale level.

[0004] 2. Related Art

[0005] Cholesteric liquid crystal display (LCD) panels are reflective liquid crystal display panels having a structure in which cholesteric liquid crystal is filled among transparent electrode lines formed of, for example, indium-tin-oxide (ITO), which are arranged on two transparent substrates, for example, glass substrates, facing each other.

[0006] Liquid crystal displays can be vulnerable to crosstalk which can occur while driving a matrix liquid crystal display panel. In addition, the gray scale may not be accurately displayed.

[0007] I have found that crosstalk and inaccurate display of gray scale is particularly undesirable due to a lack of image display quality. Efforts have been made to improve liquid crystal display panels.

[0008] Exemplars of recent efforts in the art include U.S. Pat. No. 5,748,277 for DYNAMIC DRIVE METHOD AND APPARATUS FOR A BISTABLE LIQUID CRYSTAL DISPLAY issued on May 5, 1998 to Huang et al. and U.S. Pat. No. 6,154,190 for DYNAMIC DRIVE METHODS AND APPARATUS FOR A BISTABLE LIQUID CRYSTAL DISPLAY issued on Nov. 28, 2000 to Yang et al.

[0009] While these recent efforts provide advantages, I note that they fail to adequately provide an improved method of driving a cholesteric liquid crystal display panel for accurate gray scale display.

SUMMARY OF THE INVENTION

[0010] To solve the above-described problems, it is an object of the present invention to provide an improved method of driving a cholesteric liquid crystal display (LCD) panel, and it is an object of the present invention to provide an improved method of driving a cholesteric liquid crystal display panel through which gray scale can be accurately displayed by removing the influence of crosstalk.

[0011] To achieve the above objects and others, the present invention provides a method of driving an liquid crystal display panel by sequentially applying a selection line

voltage to individual scan electrode lines and simultaneously applying data signals to all data electrode lines in order to selecting a state of each cholesteric liquid crystal cell according to a given or predetermined gray scale level. Each selection time, during which the selection line voltage is applied to a certain scan electrode line and simultaneously the data signals are applied to all of the data electrode lines, is constant. Each selection time is divided into a first part time and a second part time. A low selection line voltage is applied to a relevant scan electrode line during the first part time. A high selection line voltage having a different level from the low selection line voltage is applied to the relevant scan electrode line during the second part time. A data pulse having a width corresponding to either the first part time or the second part time is applied to all of the data electrode lines at different time points according to the gray scale level of a relevant cholesteric liquid crystal cell during the selection time.

[0012] In a method of driving a cholesteric liquid crystal display panel according to the present invention, since only the application time point of the data pulse having the width corresponding to half of the selection time varies with gray scale, a root-mean-square (RMS) voltage, which is applied to all data electrode lines during a unit selection time, is constant regardless of the gray scale. Consequently, a voltage which is applied to cholesteric liquid crystal cells of scan electrode lines which are not scanned is constant, thereby removing crosstalk. Therefore, accurate gray-scale display can be accomplished.

[0013] To achieve these and other objects in accordance with the principles of the present invention, as embodied and broadly described, the present invention provides a method of driving a cholesteric liquid crystal display panel having cholesteric liquid crystal cells, the method comprising: during a selection time, applying at least one selection line voltage to a particular scan electrode line of the panel and substantially simultaneously applying data signals to all data electrode lines in order to select a state of the cholesteric liquid crystal cells in dependence upon a predetermined gray scale level, the selection time being a constant, the selection time being divided into a first part of the selection time and a second part of the selection time; said applying of the at least one selection line voltage further comprising: applying a low selection line voltage during the first part; and applying a high selection line voltage during the second part, the high selection line voltage having a different level than the low selection line voltage; said applying of the data signals further comprising applying a data pulse to all the data electrode lines at different time points, the different time points being selected in dependence upon gray scale levels of respective ones of the cholesteric liquid crystal cells, the data pulse having a width corresponding to one selected from among the first part and the second part.

[0014] To achieve these and other objects in accordance with the principles of the present invention, as embodied and broadly described, the present invention provides a method of driving a liquid crystal display panel, the method comprising: during a selection time, applying at least one selection line voltage to a particular scan electrode line of the panel and substantially simultaneously applying data signals to all data electrode lines in order to select a state of cholesteric liquid crystal cells of the panel in dependence upon a predetermined gray scale level, the selection time

being a constant, the selection time being divided into a first part of the selection time and a second part of the selection time; said applying of the data signals further comprising applying a data pulse to all the data electrode lines at different time points, the different time points being selected in dependence upon gray scale levels of respective ones of the cholesteric liquid crystal cells, the data pulse having a width corresponding to one selected from among the first part and the second part.

[0015] To achieve these and other objects in accordance with the principles of the present invention, as embodied and broadly described, the present invention provides a method of driving a cholesteric liquid crystal display panel, the method comprising: during a selection time, applying at least one selection line voltage to a particular scan electrode line of the panel and substantially simultaneously applying data signals to all data electrode lines in order to select a state of cholesteric liquid crystal cells of the panel in dependence upon a predetermined gray scale level, the selection time being a constant, the selection time being divided into a first part of the selection time and a second part of the selection time; said applying of the at least one selection line voltage further comprising: applying a low selection line voltage during the first part; and applying a high selection line voltage during the second part, the high selection line voltage having a different level than the low selection line voltage.

[0016] The present invention is more specifically described in the following paragraphs by reference to the drawings attached only by way of example. Other advantages and features will become apparent from the following description and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] In the accompanying drawings, which are incorporated in and constitute a part of this specification, embodiments of the invention are illustrated, which, together with a general description of the invention given above, and the detailed description given below, serve to exemplify the principles of this invention.

[0018] **FIG. 1** shows the fundamental characteristics of a cholesteric liquid crystal cell;

[0019] **FIG. 2** is a conceptual timing diagram for explaining a dynamic driving method for a cholesteric liquid crystal display (LCD) panel;

[0020] **FIG. 3** is a timing diagram for explaining a method of dynamically driving a cholesteric liquid crystal display panel, in accordance with the principles of the present invention;

[0021] **FIG. 4** is a timing diagram showing operations during a selection time shown in **FIG. 3** in detail;

[0022] **FIG. 5** is a timing diagram showing the waveform of a signal which is applied to a certain cholesteric liquid crystal cell according to the driving method shown in **FIG. 3**;

[0023] **FIG. 6** is a graph of the reflectivity of cholesteric liquid crystal cells versus a selection line voltage, which is applied to a scan electrode line during a second part time shown in **FIG. 3**, when a time point, at which a data pulse shown in **FIGS. 3 and 4** is applied, varies; and

[0024] **FIG. 7** is a graph of the reflectivity of cholesteric liquid crystal cells with respect to an application time point of a data pulse shown in **FIGS. 3 and 4**.

DETAILED DESCRIPTION OF THE INVENTION

[0025] While the present invention will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the present invention are shown, it is to be understood at the outset of the description which follows that persons of skill in the appropriate arts may modify the invention here described while still achieving the favorable results of this invention. Accordingly, the description which follows is to be understood as being a broad, teaching disclosure directed to persons of skill in the appropriate arts, and not as limiting upon the present invention.

[0026] Illustrative embodiments of the invention are described below. In the interest of clarity, not all features of an actual implementation are described. In the following description, well-known functions, constructions, and configurations are not described in detail since they could obscure the invention with unnecessary detail. It will be appreciated that in the development of any actual embodiment numerous implementation-specific decisions must be made to achieve the developers' specific goals, such as compliance with system-related and business-related constraints, which will vary from one implementation to another. Moreover, it will be appreciated that such a development effort might be complex and time-consuming, but would nevertheless be a routine undertaking for those of ordinary skill having the benefit of this disclosure.

[0027] **FIG. 1** shows the fundamental characteristics of a cholesteric liquid crystal cell. Referring to **FIG. 1**, when a voltage E higher than a first threshold voltage E_{th} is applied to a cholesteric liquid crystal cell, the cholesteric liquid crystal changes into a homeotropic state H . In the homeotropic state H , molecules of the cell are vertically arranged with respect to the surface of the cell.

[0028] When the voltage E , which is lower than the first threshold voltage E_{th} and is higher than a second threshold voltage E_F , is applied to the cholesteric liquid crystal cell in the homeotropic state H , specifically, when the voltage E that is applied to the cell in the homeotropic state H is gradually lowered, the cell changes from the homeotropic state H into a focal conic state F . In the focal conic state F , the molecules of the cell are arranged in a helical structure, and a helical axis is nearly parallel to the surface of the cell. Accordingly, light is mostly transmitted without being reflected so that the cell is almost transparent.

[0029] When the voltage E lower than the second threshold voltage E_F is applied to the cholesteric liquid crystal cell in the homeotropic state H , specifically, when the voltage E that is applied to the cell in the homeotropic state H is rapidly lowered, the cell changes from the homeotropic state H via a transient planar state and incomplete-planar state into a planar state P . In the planar state P , the molecules of the cell have a periodic helical structure, and a helical axis is perpendicular to the surface of the cell. Accordingly, only light having a wavelength corresponding to the product nP of an average refractive index " n " of the cholesteric liquid crystal cell and a helical pitch P can be reflected. Meanwhile,

the transient-planar state has a similar structure to the planar state P and has an about twice longer helical pitch than the planar state P. The incomplete-planar state is a variable state appearing in the middle of relaxation from the transient-planar state into the planar state P.

[0030] The focal conic state F and the planar state P have a memory effect through which the states are maintained for a long period of time even if supply of voltage is stopped. Due to such memory effect produced by bistability, the planar state P and the focal conic state F are employed depending on selection of a certain cholesteric liquid crystal cell in cholesteric liquid crystal display panels, thereby decreasing power consumption. In addition, since cholesteric liquid crystal display panels use a selective reflection driving scheme due to their characteristics, they have a high luminance characteristic.

[0031] FIG. 2 is a conceptual timing diagram for explaining a dynamic driving method for a cholesteric liquid crystal display panel. A dynamic driving method is described in detail in U.S. Pat. Nos. 5,748,277 and 6,154,190. The dynamic driving method described in U.S. Pat. Nos. 5,748,277 and 6,154,190 could be useful to refer to, for information generally relating to the dynamic driving method information shown in FIG. 2. However, the dynamic driving method described in U.S. Pat. Nos. 5,748,277 and 6,154,190 is not identical in every respect to the dynamic driving method information shown in FIG. 2.

[0032] Referring to FIG. 2, a unit frame, which is applied to each row electrode line, i.e., each scan electrode line, includes a preparation time T_P , a selection time T_S , an evolution time T_E , and a maintenance time T_M .

[0033] During the preparation time T_P , a preparation cell voltage V_P , i.e., a first voltage, is applied to all cholesteric liquid crystal cells of a certain scan electrode line in a cholesteric liquid crystal display panel, thereby changing all of the cholesteric liquid crystal cells into the homeotropic state H shown in FIG. 1.

[0034] During the selection time T_S , a second voltage V_{SH} lower than the first voltage V_P is applied to all cholesteric liquid crystal cells of the scan electrode line, and the second voltage V_{SH} or the pulse width T_S of the second voltage V_{SH} are changed according to the gray scale of each cholesteric liquid crystal cell in a voltage modulation mode or time modulation mode. For example, to cholesteric liquid crystal cells having the highest gray scale level is applied the highest second voltage V_{SH} during the selection time T_S or the constant second voltage V_{SH} during the longest selection time T_S .

[0035] Accordingly, the cholesteric liquid crystal cells having the highest gray scale level maintain the homeotropic state H shown in FIG. 1, and the cholesteric liquid crystal cells having the lowest gray scale level relax into the transient-planar state. Cholesteric liquid crystal cells having other gray scale levels change into a similar state to the homeotropic state H as the gray scale level increases and change into a similar state to the transient-planar state as the gray scale level decreases. The gray-scale display method shown in FIG. 2 has a problem in that the voltages V_P , V_E , and V_{SL} , which are applied during the preparation time T_P , the evolution time T_E , and the maintenance time T_M , respectively, vary according to data signals which are applied to all

data electrode lines during a selection time for each scan line. In other words, the method shown in FIG. 2 is vulnerable to crosstalk which inevitably occurs while driving a matrix liquid crystal display panel. In addition, since the evolution cell voltage V_E changes during the evolution time T_E , the gray scale is not accurately displayed.

[0036] During the evolution time T_E , the evolution cell voltage V_E , i.e., a fourth voltage, which is lower than the first voltage V_P and is higher than the second voltage V_{SH} , is applied to all of the cholesteric liquid crystal cells. Accordingly, the cholesteric liquid crystal cells having the highest gray scale level continuously maintain the homeotropic state H, and the cholesteric liquid crystal cells having the lowest gray scale level change into the focal conic state F shown in FIG. 1. The cholesteric liquid crystal cells having other gray scale levels change into a similar state to the homeotropic state H as the gray scale level increases and change into a similar state to the focal conic state F as the gray scale level decreases.

[0037] During the maintenance time T_M , a maintenance cell voltage equal to a third voltage V_{SL} is applied to all of the cholesteric liquid crystal cells so that the cholesteric liquid crystal cells having the highest gray scale level relax into the planar state P shown in FIG. 1, and the cholesteric liquid crystal cells having the lowest gray scale level maintain the focal conic state F. The cholesteric liquid crystal cells having other gray scale levels change into a similar state to the planar state P as the gray scale level increases and change into a similar state to the focal conic state F as the gray scale level decreases. Accordingly, the cholesteric liquid crystal cells having the highest gray scale level reflect a largest quantity of light having a wavelength corresponding to the product nP of an average refractive index "n" and a helical pitch P. However, the cholesteric liquid crystal cells having the lowest gray scale level transmit most of light in an almost transparent state. The cholesteric liquid crystal cells having other gray scale levels have higher reflectivity as the gray scale level increases and have lower reflectivity as the gray scale level decreases.

[0038] According to the above-described method of driving a cholesteric liquid crystal display panel as shown in FIG. 2, the voltages V_P , V_E , and V_{SL} , which are applied during the preparation time T_P , the evolution time T_E , and the maintenance time T_M , respectively, vary according to data signals which are applied to all data electrode lines during a selection time for each scan line. In other words, the method of FIG. 2 is vulnerable to crosstalk which inevitably occurs while driving a matrix liquid crystal display panel. In addition, since the evolution cell voltage V_E changes during the evolution time T_E , the gray scale is not accurately displayed.

[0039] FIG. 3 shows a method of dynamically driving a cholesteric liquid crystal display (LCD) panel according to the principles of the present invention. In FIG. 3, a reference character S_{Rn} denotes a driving signal applied to an n-th scan electrode line, a reference character S_{Cm} denotes a data signal applied to a m-th data electrode line, and a reference character T_{M1} denotes a maintenance time in the previous modulation period. FIG. 4 illustrates a timing diagram showing detailed operations during the selection time T_{S2} of FIG. 3. In FIGS. 3 and 4, the same reference characters denote the element having the same function. FIG. 5 is a

timing diagram showing the waveform of a signal which is applied to a certain cholesteric liquid crystal cell according to the driving method shown in FIG. 3. In FIG. 5, a reference character S_{LC} denotes a signal which is applied to a cholesteric liquid crystal cell at the intersection between the n-th scan electrode line and the m-th data electrode line.

[0040] Referring to FIGS. 3 through 5, in a method of dynamically driving a cholesteric liquid crystal display panel according to the present invention, a unit modulation period, which is applied to each row electrode line, that is, each scan electrode line, includes a preparation time T_{P2} , a selection time T_{S2} , an evolution time T_{E2} , and a maintenance time T_{M2} .

[0041] During the preparation time T_{P2} , a preparation line voltage R_H is applied to the n-th scan electrode line of the cholesteric liquid crystal display panel so that all cholesteric liquid crystal cells of the n-th scan electrode line changes into the homeotropic state H shown in FIG. 1. A preparation cell voltage, i.e., a first voltage, which is applied to all of the cholesteric liquid crystal cells of the n-th scan electrode line during the preparation time T_{P2} , is determined by data signals $C_H \leftrightarrow C_L$ (see FIG. 5), which are applied to data electrode lines during selection times for other scan electrode lines. This phenomenon is referred to as crosstalk, which inevitably occurs while driving a matrix liquid crystal display panel.

[0042] However, in the present invention, for a selection time, for example, the selection time T_{S2} , only a time point, at which a data pulse having a width corresponding to time $t6a-t7a$ which is half of the unit selection time T_{S2} is applied, changes according to gray scale. Accordingly, a root-mean-square (RMS) voltage applied to all data electrode lines is constant regardless of the gray scale. Consequently, a voltage which is applied to cholesteric liquid crystal cells of scan electrode lines which are not scanned is constant, thereby removing crosstalk. For example, a preparation cell voltage, i.e., a first voltage, which is applied to all of the cholesteric liquid crystal cells of the n-th scan electrode line during the preparation time T_{P2} , is not changed by the data signals $C_H \leftrightarrow C_L$, which are applied to data electrode lines during selection times for other scan electrode lines.

[0043] Each selection time, for example, the selection time T_{S2} , during which selection line voltages R_L and R_M are applied to a certain or particular scan electrode line, and simultaneously, data signals are applied to all data electrode lines, is always constant. The selection time T_{S2} is divided into a first part and a second part. The first part of the selection time T_{S2} is also known as 'first part time $t6-t7$ ' corresponding to the time $t6-t7$. The second part of the selection time T_{S2} is also known as 'second part time $t7-t8$ ' corresponding to the time $t7-t8$.

[0044] During the first part time $t6-t7$, the low selection line voltage R_L is applied to the n-th scan electrode line. During the second part time $t7-t8$, the high selection line voltage R_M higher than the low selection line voltage R_L is applied to the n-th scan electrode line. In addition, during the selection time T_{S2} , a data pulse P_D having a width corresponding to the first or second part time $t6-t7$ or $t7-t8$ is applied to all data electrode lines, and an application time point $t6a$ of the data pulse P_D varies with the gray scale level of a relevant or respective cholesteric liquid crystal cell.

[0045] More specifically, during the selection time T_{S2} , the data pulse P_D is applied to cholesteric liquid crystal cells

having the highest gray scale level at the earliest time $t6a$. Here, the time T_G between the application time point $t6a$ and the middle point $t7$ of the selection time T_{S2} occupies the entire first part time $t6-t7$. In this case, a ratio of the data pulse P_D to the first part time $t6-t7$, i.e., a gray-scale ratio $2T_G/T_{S2}$, is 1. Accordingly, a negative voltage having a level corresponding to the difference ($R_L - C_H$) between the low selection line voltage R_L and a high data voltage C_H is continuously applied to cholesteric liquid crystal cells having the highest gray scale level during the first part time $t6-t7$. In addition, a high positive voltage, which has a level corresponding to the difference ($R_M - C_L$) between the high selection line voltage R_M and a low data voltage C_L , is continuously applied to the cholesteric liquid crystal cells having the highest gray scale level during the second part time $t7-t8$. Accordingly, the cholesteric liquid crystal cells having the highest gray scale level maintain the homeotropic state H during the selection time T_{S2} . Here, since the negative voltage having the level corresponding to the difference ($R_L - C_H$) is continuously applied during the first part time $t6-t7$, the cholesteric liquid crystal cells are prevented from relaxing into the transient-planar state.

[0046] In contrast, during the selection time T_{S2} , the data pulse P_D is applied to cholesteric liquid crystal cells having the lowest gray scale level at a latest time point $t7$. Here, the time T_G between the application time point $t6a$ and the middle point $t7$ of the selection time T_{S2} is zero. In this case, a gray-scale ratio $2T_G/T_{S2}$ is 0. Accordingly, a differential voltage ($R_L - C_L$) between the low selection line voltage R_L and the low data voltage C_L is continuously applied to the cholesteric liquid crystal cells having the lowest gray scale level during the first part time $t6-t7$. Actually, since the low selection line voltage R_L has the same level as the low data voltage C_L , no voltage is applied to the cholesteric liquid crystal cells having the lowest gray scale level during the first part time $t6-t7$. In addition, a low positive voltage, which has a level corresponding to the difference ($R_M - C_H$) between the high selection line voltage R_M and the high data voltage C_H , is continuously applied to the cholesteric liquid crystal cells having the lowest gray scale level during the second part time $t7-t8$. Accordingly, the cholesteric liquid crystal cells having the lowest gray scale level relax into the transient-planar state. Here, since no voltage is applied during the first part time $t6-t7$, the cholesteric liquid crystal cells freely relax into the transient-planar state without any constraint.

[0047] To put it briefly, the cholesteric liquid crystal cells having the highest gray scale level maintain the homeotropic state H while the cholesteric liquid crystal cells having the lowest gray scale level relax into the transient-planar state. In addition, cholesteric liquid crystal cells having other gray scale levels maintain the similar state to the homeotropic state H as the gray scale level increases and change into a similar state to the transient-planar state as the gray scale level decreases. Since only an application time point ($t6a$ in the case of the selection time T_{S2}) of a data pulse having the width ($t6a-t7a$ in the case of the selection time T_{S2}) corresponding to half of a unit selection time (e.g., T_{S2}) during the unit selection time varies with gray scale, a root-mean-square voltage applied to all data electrode lines is constant regardless of the gray scale. Consequently, a voltage which is applied to cholesteric liquid crystal cells of scan electrode lines which are not scanned is constant, thereby removing crosstalk.

[0048] During the evolution time T_{E2} , the preparation line voltage R_H and the high selection line voltage R_M are alternately applied to the n-th scan electrode line. That is, the root-mean-square voltage of the two voltages R_H and R_M , i.e., a fourth voltage $\sqrt{R_H^2 + R_M^2}$, is applied to the n-th scan electrode line. Accordingly, while the cholesteric liquid crystal cells having the highest gray scale level maintain the homeotropic state H, the cholesteric liquid crystal cells having the lowest gray scale level change into the focal conic state F shown in FIG. 1. The cholesteric liquid crystal cells having other gray scale levels maintain the similar state to the homeotropic state as the gray scale level increases and change into a similar state to the focal conic state as the gray scale level decreases.

[0049] In the meantime, during the evolution time T_{E2} , the fourth voltage $\sqrt{R_H^2 + R_M^2}$ is applied to the n-th scan electrode line so that the number of output voltage levels of a scan-electrode driving device can be reduced to 3, thereby simplifying the internal circuit of the device and decreasing the manufacturing costs. In addition, as described above, an evolution cell voltage, which is applied to all cholesteric liquid crystal cells of the n-th scan electrode line during the evolution time T_{E2} , is not changed by the data signals $C_H \leftrightarrow C_L$, which are applied to the data electrode lines during selection times for other scan electrode lines.

[0050] During the maintenance time T_{M2} , a voltage equal to the low selection line voltage R_L is applied to the n-th scan electrode line so that the cholesteric liquid crystal cells having the highest gray scale level relax into the planar state P shown in FIG. 1 while the cholesteric liquid crystal cells having the lowest gray scale level maintain the focal state F. In addition, the cholesteric liquid crystal cells having other gray scale levels change into a similar state to the planar state P as the gray scale level increases and maintain the similar state to the focal conic state F as the gray scale level decreases. Accordingly, the cholesteric liquid crystal cells having the highest gray scale level reflect light, which has a wavelength corresponding to the product nP of an average refractive index "n" and a helical pitch P, most. However, the cholesteric liquid crystal cells having the lowest gray scale level transmit light in an almost transparent state. The reflectivity of the cholesteric liquid crystal cells having other gray scale levels increases as the gray scale level increases and decreases as the gray scale level decreases. In addition, as described above, a maintenance cell voltage, which is applied to all cholesteric liquid crystal cells of the n-th scan electrode line during the maintenance time T_{M2} , is not changed by the data signals $C_H \leftrightarrow C_L$, which are applied to the data electrode lines during selection times for other scan electrode lines.

[0051] Meanwhile, when the polarity of a driving voltage applied to all cholesteric liquid crystal cells is inverted with a unit modulation period, a mean direct current (DC) voltage can be removed, thereby preventing the physical properties of cholesteric liquid crystal from changing. In another embodiment of the present invention, the polarity of a driving voltage applied to all cholesteric liquid crystal cells can be inverted with a unit modulation period without using an extra negative voltage. More specifically, for the data signal S_{cm} , a voltage $C_L(M)$ having a level equal to the preparation line voltage R_H , e.g., 32 V, is used instead of the low data voltage C_L , e.g., 0 V, and a voltage $C_H(M)$ having a level of $C_L(M) - C_H$, e.g., 27 V, is used instead of the high

data voltage C_H , e.g., 5 V. In addition, for the scan signal S_{Rn} , while the high selection line voltage R_M is maintained, the preparation line voltage R_H and the low selection line voltage R_L are in opposition to each other in two consecutive unit modulation periods. For example, in a case where inversion driving is performed with a unit modulation period, during the maintenance time T_{M1} in previous unit modulation period, a high maintenance line voltage R_H is applied to the n-th scan electrode line, while the voltages $C_L(M)$ and $C_H(M)$ resulting from crosstalk are applied to the m-th data electrode line. During such inversion driving, only the polarity of a driving voltage applied to all cholesteric liquid crystal cells changes, and the operations are the same as those described above.

[0052] FIG. 6 shows the reflectivity of cholesteric liquid crystal cells versus the high selection line voltage R_M , which is applied to a scan electrode line during the second part time $t7-t8$ shown in FIG. 3, when the application time point $t6a$ of the data pulse P_D shown in FIGS. 3 and 4 changes. In FIG. 6, a reference character R.1 denotes a characteristic curve when the gray-scale ratio $2T_G/T_{S2}$ is 1, a reference character R.875 denotes a characteristic curve when the gray-scale ratio $2T_G/T_{S2}$ is 0.875, a reference character R.75 denotes a characteristic curve when the grayscale ratio $2T_G/T_{S2}$ is 0.75, a reference character R.625 denotes a characteristic curve when the gray-scale ratio $2T_G/T_{S2}$ is 0.625, a reference character R.5 denotes a characteristic curve when the gray-scale ratio $2T_G/T_{S2}$ is 0.5, a reference character R.375 denotes a characteristic curve when the gray-scale ratio $2T_G/T_{S2}$ is 0.375, a reference character R.25 denotes a characteristic curve when the gray-scale ratio $2T_G/T_{S2}$ is 0.25, a reference character R.125 denotes a characteristic curve when the gray-scale ratio $2T_G/T_{S2}$ is 0.125, and a reference character R.0 denotes a characteristic curve when the gray-scale ratio $2T_G/T_{S2}$ is 0.

[0053] Referring to FIG. 6, as the gray-scale ratio $2T_G/T_{S2}$ increases, a voltage, which is required to change cholesteric liquid crystal cells into a planar state having high reflectivity, decreases. In addition, it can be seen from FIG. 6 that difference in reflectivity with respect to all of the gray-scale ratios $2T_G/T_{S2}$ is appropriate when the high selection line voltage R_M is about 16 V. In other words, when the high selection line voltage R_M is about 16 V, best gray-scale display can be accomplished.

[0054] FIG. 7 shows the reflectivity of cholesteric liquid crystal cells with respect to the application time point $t6a$ of the data pulse P_D shown in FIGS. 3 and 4. More particularly, FIG. 7 shows the reflectivity of cholesteric liquid crystal cells versus the gray-scale ratio $2T_G/T_{S2}$ regarding the data pulse P_D . The graph shown in FIG. 7 is based on the result obtained when the gray-scale ratio $2T_G/T_{S2}$ is divided into 20 divisions and the result obtained when the gray-scale ratio $2T_G/T_{S2}$ is divided into 40 divisions. Referring to FIG. 7, difference in reflectivity is appropriate in the AP range of the gray-scale ratio $2T_G/T_{S2}$. That is, application of the AP range of the gray-scale ratio $2T_G/T_{S2}$ is most appropriate for gray-scale display.

[0055] As described above, in a method of driving a cholesteric liquid crystal display panel according to the present invention, since only an application time point of a data pulse having the width corresponding to half of a selection time varies with gray scale, a root-mean-square

voltage, which is applied to all data electrode lines during a unit selection time, is constant regardless of the gray scale. Consequently, a voltage which is applied to cholesteric liquid crystal cells of scan electrode lines which are not scanned is constant, thereby removing crosstalk. Therefore, accurate gray-scale display can be accomplished.

[0056] The foregoing paragraphs describe the details of a method of driving a cholesteric liquid crystal display (LCD) panel, and more particularly, of a method of driving a cholesteric liquid crystal display panel by sequentially applying a selection line voltage to scan electrode lines of the cholesteric liquid crystal display panel and simultaneously applying data signals to all data electrode lines so that the state of each cholesteric liquid crystal cell is selected according to a given gray scale level.

[0057] While the present invention has been illustrated by the description of embodiments thereof, and while the embodiments have been described in considerable detail, it is not the intention of the applicant to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details, representative apparatus and method, and illustrative examples shown and described. Accordingly, departures may be made from such details without departing from the spirit or scope of the applicant's general inventive concept.

What is claimed is:

1. A method of driving a cholesteric liquid crystal display panel having cholesteric liquid crystal cells, the method comprising:

during a selection time, applying at least one selection line voltage to a particular scan electrode line of the panel and substantially simultaneously applying data signals to all data electrode lines in order to select a state of the cholesteric liquid crystal cells in dependence upon a predetermined gray scale level, the selection time being a constant, the selection time being divided into a first part of the selection time and a second part of the selection time;

said applying of the at least one selection line voltage further comprising:

applying a low selection line voltage during the first part; and

applying a high selection line voltage during the second part, the high selection line voltage having a different level than the low selection line voltage;

said applying of the data signals further comprising applying a data pulse to all the data electrode lines at different time points, the different time points being selected in dependence upon gray scale levels of respective ones of the cholesteric liquid crystal cells, the data pulse having a width corresponding to one selected from among the first part and the second part.

2. The method of claim 1, further comprising:

the selection time corresponding to a sequence of selection times; and

sequentially performing said applying of the at least one selection line voltage and said applying of the data signals during the sequence of selection times.

3. The method of claim 1, further comprising:

before the selection time, applying a first predetermined voltage to all cholesteric liquid crystal cells of the panel to change all cholesteric liquid crystal cells of the relevant scan electrode line into a homeotropic state.

4. The method of claim 3, said applying of the first predetermined voltage being performed during a preparation step immediately prior to the selection time.

5. The method of claim 3, further comprising:

during the selection time, maintaining the homeotropic state in the cholesteric liquid crystal cells having a highest gray scale level;

during the selection time, relaxing the state of the cholesteric liquid crystal cells having a lowest gray scale level into a transient-planar state; and

during the selection time, in the cholesteric liquid crystal cells not having the highest gray scale level and not having the lowest gray scale level, changing the state of the cholesteric liquid crystal cells into a state similar to the homeotropic state when the gray scale level increases, and changing the state of the cholesteric liquid crystal cells into a state similar to the transient-planar state when the gray scale level decreases.

6. The method of claim 5, further comprising:

after the selection time, applying a second predetermined voltage to all of the cholesteric liquid crystal cells of the panel to maintain the homeotropic state in the cholesteric liquid crystal cells having the highest gray scale level and to change the state of the cholesteric liquid crystal cells having the lowest gray scale level into a focal conic state; and

said applying of the second predetermined voltage changing the cholesteric liquid crystal cells not having the highest gray scale level and not having the lowest gray scale level into a state similar to the homeotropic state when the gray scale level increases and into a state similar to the focal conic state when the gray scale level decreases.

7. The method of claim 6, said applying of the second predetermined voltage being performed during an evolution step immediately after the selection time.

8. The method of claim 7, further comprising:

after the evolution step, applying a third predetermined voltage to all of the cholesteric liquid crystal cells of the panel to relax the state of the cholesteric liquid crystal cells having the highest gray scale level into a planar state and to maintain the focal conic state of the cholesteric liquid crystal cells having the lowest gray scale level; and

said applying of the third predetermined voltage changing the cholesteric liquid crystal cells not having the highest gray scale level and not having the lowest gray scale level into a state similar to the planar state when the gray scale level increases and into a state similar to the focal conic state when the gray scale level decreases.

9. The method of claim 1, further comprising:

during the selection time, maintaining a homeotropic state in the cholesteric liquid crystal cells having a highest gray scale level;

during the selection time, relaxing the state of the cholesteric liquid crystal cells having a lowest gray scale level into a transient-planer state; and

during the selection time, in the cholesteric liquid crystal cells not having the highest gray scale level and not having the lowest gray scale level, changing the state of the cholesteric liquid crystal cells into a state similar to the homeotropic state when the gray scale level increases, and changing the state of the cholesteric liquid crystal cells into a state similar to the transient-planar state when the gray scale level decreases.

10. The method of claim 1, further comprising:

after the selection time, applying a predetermined voltage to all of the cholesteric liquid crystal cells of the panel to maintain a homeotropic state in the cholesteric liquid crystal cells having the highest gray scale level and to change the state of the cholesteric liquid crystal cells having the lowest gray scale level into a focal conic state; and

said applying of the predetermined voltage changing the cholesteric liquid crystal cells not having the highest gray scale level and not having the lowest gray scale level into a state similar to the homeotropic state when the gray scale level increases and into a state similar to the focal conic state when the gray scale level decreases.

11. A method of driving a liquid crystal display panel, the method comprising:

during a selection time, applying at least one selection line voltage to a particular scan electrode line of the panel and substantially simultaneously applying data signals to all data electrode lines in order to select a state of cholesteric liquid crystal cells of the panel in dependence upon a predetermined gray scale level, the selection time being a constant, the selection time being divided into a first part of the selection time and a second part of the selection time;

said applying of the data signals further comprising applying a data pulse to all the data electrode lines at different time points, the different time points being selected in dependence upon gray scale levels of respective ones of the cholesteric liquid crystal cells, the data pulse having a width corresponding to one selected from among the first part and the second part.

12. The method of claim 11, further comprising:

before the selection time, applying a predetermined voltage to all cholesteric liquid crystal cells of the panel to change all cholesteric liquid crystal cells of the relevant scan electrode line into a homeotropic state.

13. The method of claim 11, further comprising:

during the selection time, maintaining a homeotropic state in the cholesteric liquid crystal cells having a highest gray scale level;

during the selection time, relaxing the state of the cholesteric liquid crystal cells having a lowest gray scale level into a transient-planer state; and

during the selection time, in the cholesteric liquid crystal cells not having the highest gray scale level and not having the lowest gray scale level, changing the state of the cholesteric liquid crystal cells into a state similar to the homeotropic state when the gray scale level increases, and changing the state of the cholesteric liquid crystal cells into a state similar to the transient-planar state when the gray scale level decreases.

14. The method of claim 11, further comprising:

after the selection time, applying a predetermined voltage to all of the cholesteric liquid crystal cells of the panel to maintain a homeotropic state in the cholesteric liquid crystal cells having the highest gray scale level and to change the state of the cholesteric liquid crystal cells having the lowest gray scale level into a focal conic state; and

said applying of the predetermined voltage changing the cholesteric liquid crystal cells not having the highest gray scale level and not having the lowest gray scale level into a state similar to the homeotropic state when the gray scale level increases and into a state similar to the focal conic state when the gray scale level decreases.

15. The method of claim 11, further comprising:

after the selection time, applying a predetermined voltage to all of the cholesteric liquid crystal cells of the panel to relax the state of the cholesteric liquid crystal cells having the highest gray scale level into a planar state and to maintain a focal conic state of the cholesteric liquid crystal cells having the lowest gray scale level; and

said applying of the predetermined voltage changing the cholesteric liquid crystal cells not having the highest gray scale level and not having the lowest gray scale level into a state similar to the planar state when the gray scale level increases and into a state similar to the focal conic state when the gray scale level decreases.

16. A method of driving a cholesteric liquid crystal display panel, the method comprising:

during a selection time, applying at least one selection line voltage to a particular scan electrode line of the panel and substantially simultaneously applying data signals to all data electrode lines in order to select a state of cholesteric liquid crystal cells of the panel in dependence upon a predetermined gray scale level, the selection time being a constant, the selection time being divided into a first part of the selection time and a second part of the selection time;

said applying of the at least one selection line voltage further comprising:

applying a low selection line voltage during the first part; and

applying a high selection line voltage during the second part, the high selection line voltage having a different level than the low selection line voltage.

17. The method of claim 16, further comprising:

before the selection time, applying a predetermined voltage to all cholesteric liquid crystal cells of the panel to change all cholesteric liquid crystal cells of the relevant scan electrode line into a homeotropic state.

18. The method of claim 16, further comprising:

during the selection time, maintaining a homeotropic state in the cholesteric liquid crystal cells having a highest gray scale level;

during the selection time, relaxing the state of the cholesteric liquid crystal cells having a lowest gray scale level into a transient-planer state; and

during the selection time, in the cholesteric liquid crystal cells not having the highest gray scale level and not having the lowest gray scale level, changing the state of the cholesteric liquid crystal cells into a state similar to the homeotropic state when the gray scale level increases, and changing the state of the cholesteric liquid crystal cells into a state similar to the transient-planar state when the gray scale level decreases.

19. The method of claim 16, further comprising:

after the selection time, applying a predetermined voltage to all of the cholesteric liquid crystal cells of the panel to maintain a homeotropic state in the cholesteric liquid crystal cells having the highest gray scale level and to change the state of the cholesteric liquid crystal cells having the lowest gray scale level into a focal conic state; and

said applying of the predetermined voltage changing the cholesteric liquid crystal cells not having the highest gray scale level and not having the lowest gray scale level into a state similar to the homeotropic state when the gray scale level increases and into a state similar to the focal conic state when the gray scale level decreases.

20. The method of claim 16, further comprising:

after the selection time, applying a predetermined voltage to all of the cholesteric liquid crystal cells of the panel to relax the state of the cholesteric liquid crystal cells having the highest gray scale level into a planar state and to maintain a focal conic state of the cholesteric liquid crystal cells having the lowest gray scale level; and

said applying of the predetermined voltage changing the cholesteric liquid crystal cells not having the highest gray scale level and not having the lowest gray scale level into a state similar to the planar state when the gray scale level increases and into a state similar to the focal conic state when the gray scale level decreases.

* * * * *

专利名称(译)	驱动胆甾型液晶显示板的方法，用于精确的灰度显示		
公开(公告)号	US20030122758A1	公开(公告)日	2003-07-03
申请号	US10/247551	申请日	2002-09-20
[标]申请(专利权)人(译)	利南SEOK CHOI WOON燮 李姬JUNG KIM MIN KYU 申铉SOO		
申请(专利权)人(译)	利南硕 蔡焕燮 LEE HEE-JUNG KIM MIN-KYU 申铉洙		
当前申请(专利权)人(译)	利南硕 蔡焕燮 LEE HEE-JUNG KIM MIN-KYU 申铉洙		
[标]发明人	LEE NAM SEOK CHOI WOON SEOP LEE HEE JUNG KIM MIN KYU SHIN HYUN SOO		
发明人	LEE, NAM-SEOK CHOI, WOON-SEOP LEE, HEE-JUNG KIM, MIN-KYU SHIN, HYUN-SOO		
IPC分类号	G02F1/133 G09G3/20 G09G3/36		
CPC分类号	G09G3/2011 G09G3/3629 G09G2320/0209 G09G2310/06 G09G2300/0486		
优先权	1020010085908 2001-12-27 KR		
其他公开文献	US6982691		
外部链接	Espacenet USPTO		

摘要(译)

提供一种通过顺序地将选择线电压施加到各个扫描电极线并同时数据信号施加到所有数据电极线以便选择每个胆甾型液晶单元的状态来驱动胆甾型液晶显示 (LCD) 面板的方法。根据给定的灰度级别。将选择线电压施加到某个扫描电极线并同时数据信号施加到所有数据电极线的每个选择时间是恒定的。每个选择时间分为第一部分时间和第二部分时间。在第一部分时间期间，将低选择线电压施加到相关扫描电极线。在第二部分时间期间，将与低选择线电压具有不同电平的高选择线电压施加到相关扫描电极线。在选择时间期间，根据相关胆甾型液晶单元的灰度级，将具有与第一部分时间或第二部分时间相对应的宽度的数据脉冲施加到不同时间点的所有数据电极线。

