



US 20040046918A1

(19) **United States**(12) **Patent Application Publication**
Song(10) **Pub. No.: US 2004/0046918 A1**(43) **Pub. Date: Mar. 11, 2004**(54) **IN-PLANE SWITCHING MODE LIQUID
CRYSTAL DISPLAY DEVICE AND
FABRICATION METHOD THEREOF****Publication Classification**(51) **Int. Cl.⁷** **G02F 1/1343**(52) **U.S. Cl.** **349/141**(75) **Inventor: In-Duk Song, Gyeongsangbuk-Do (KR)**

Correspondence Address:

MORGAN LEWIS & BOCKIUS LLP
1111 PENNSYLVANIA AVENUE NW
WASHINGTON, DC 20004 (US)(57) **ABSTRACT**(73) **Assignee: LG Philips LCD Co., Ltd.**(21) **Appl. No.: 10/644,034**(22) **Filed: Aug. 20, 2003**(30) **Foreign Application Priority Data**

Aug. 21, 2002 (KR) 2002/49532

An in-plane switching mode liquid crystal display device including first and second substrates having an array region and a sealant region along a periphery of the array region, a sealant in the sealant region attaching the first and second substrates, a metallic black matrix formed in the sealant region and in the array region of the first substrate, a color filter on the metallic black matrix, an organic layer on the color filter and a liquid crystal layer between the first and second substrates.

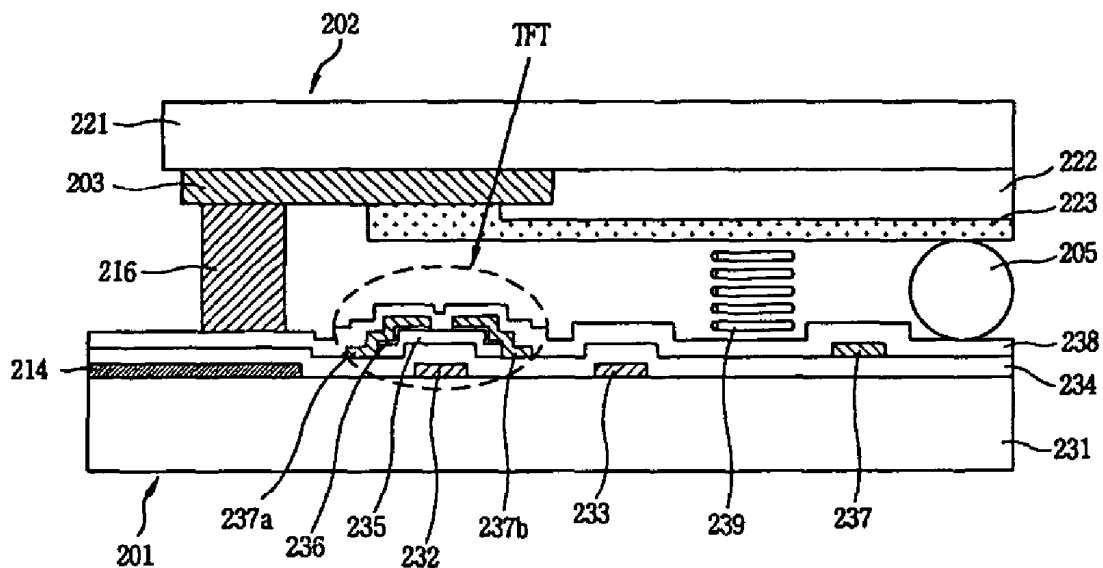


FIG. 1
RELATED ART

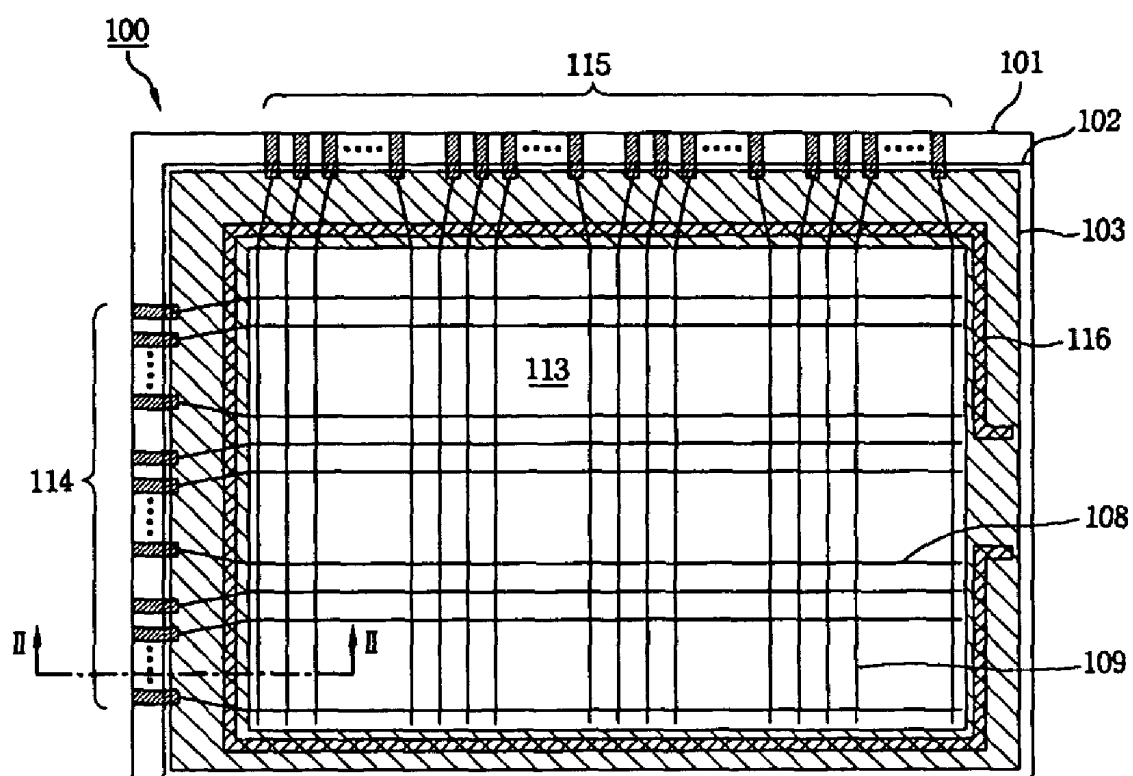


FIG. 2
RELATED ART

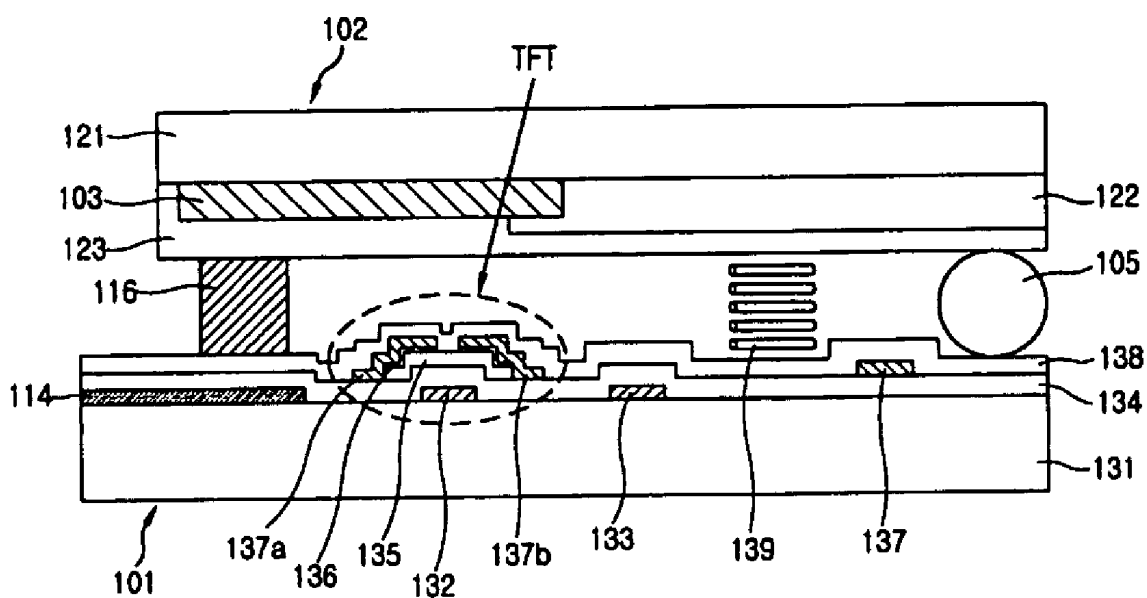


FIG. 3
RELATED ART

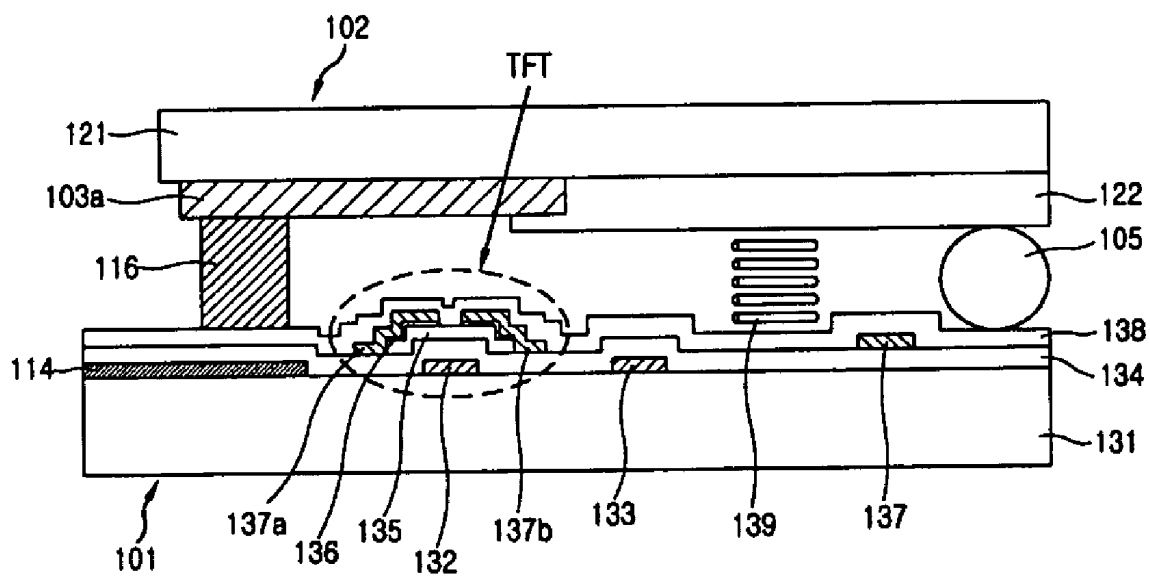


FIG. 4

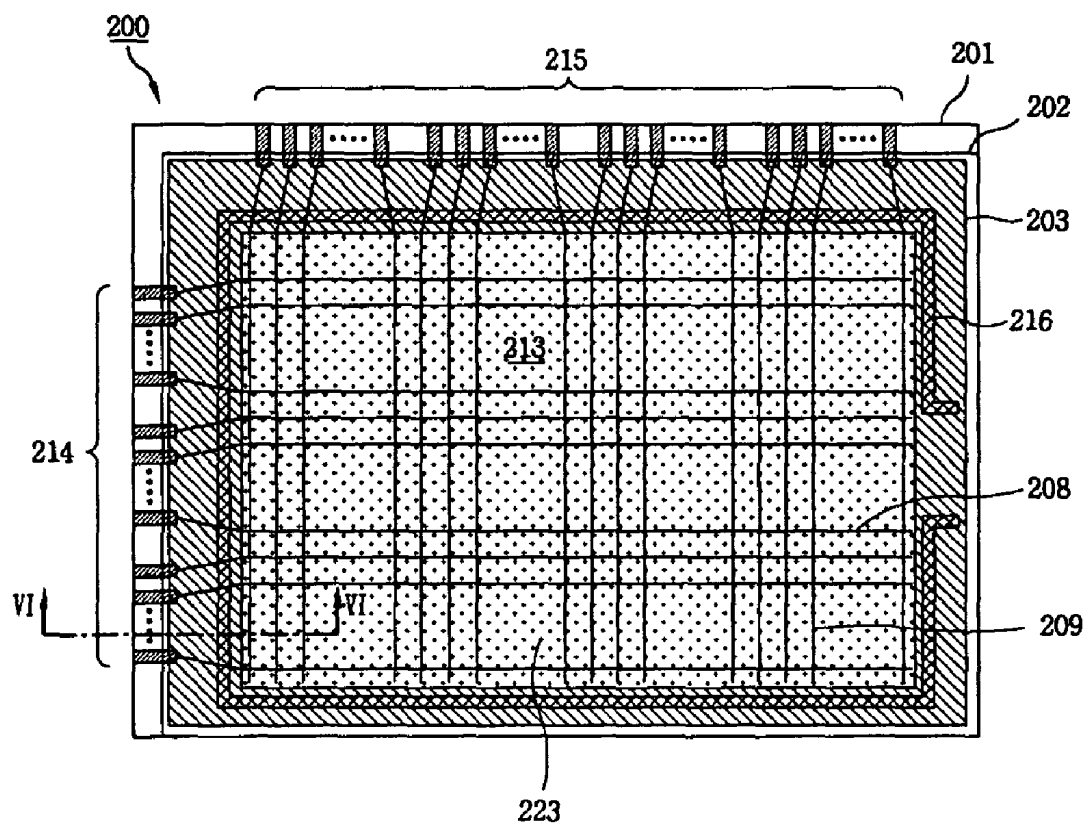


FIG. 5

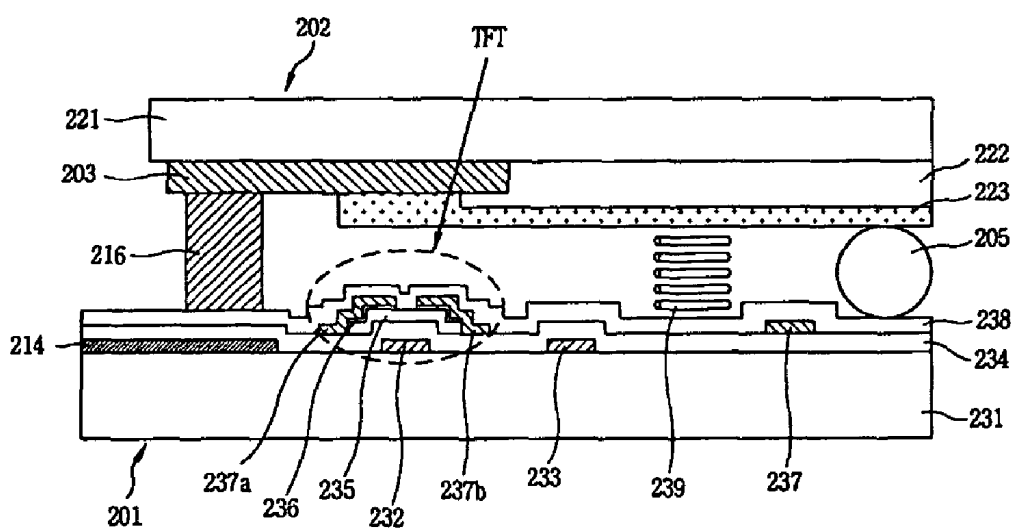


FIG. 7A

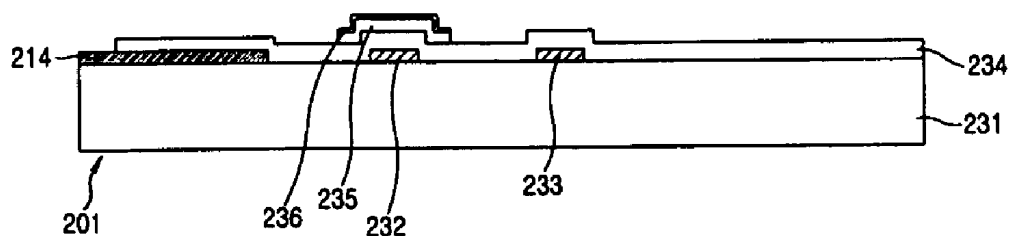


FIG. 7B


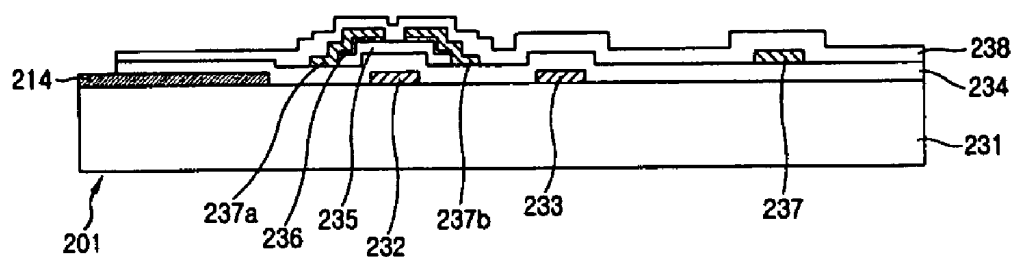


FIG. 7C

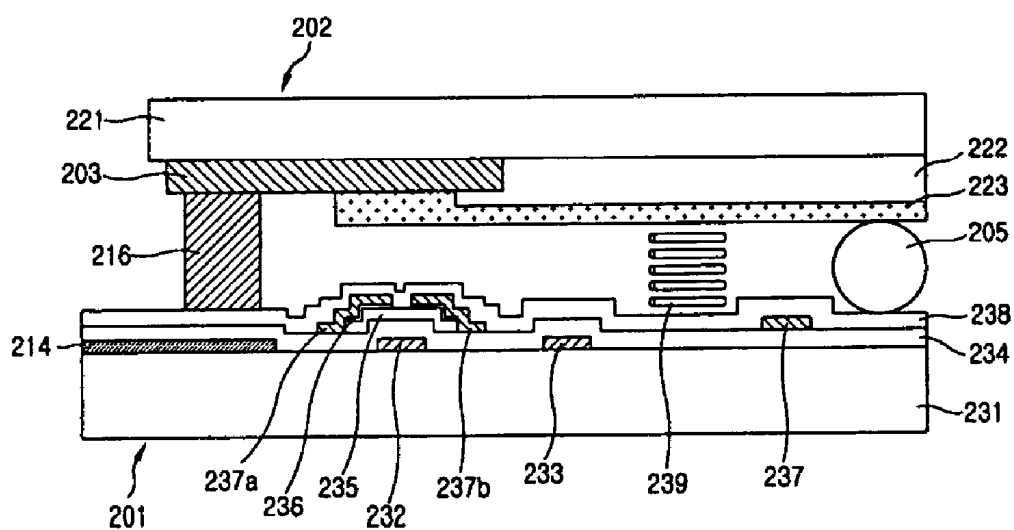

IN-PLANE SWITCHING MODE LIQUID CRYSTAL DISPLAY DEVICE AND FABRICATION METHOD THEREOF

[0001] The present invention claims the benefit of Korean Patent Application No. 2002-49532 filed in Korea on Aug. 21, 2002, which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display (LCD) device and, more particularly, to an in-plane switching mode liquid crystal display device and a fabrication method thereof capable of preventing sealant leakage.

[0004] 2. Description of the Related Art

[0005] Generally, an LCD device is a display device in which data signals according to image information are individually supplied to liquid crystal cells arranged in a matrix form. Light transmittance of the liquid crystal cells is controlled to display a desired image. The LCD device includes a liquid crystal display panel with pixel-unit liquid crystal cells arranged in a matrix form and a driver integrated circuit (IC) for driving the liquid crystal cells. The liquid crystal display panel includes a color filter substrate and a thin film transistor array substrate, which face each other, and a liquid crystal layer filled in between the color filter substrate and the thin film transistor array substrate.

[0006] On the thin film transistor array substrate, data lines for transmitting data signals supplied from a data driver IC to the liquid crystal cells and gate lines for transmitting scan signals supplied from a gate driver IC to the liquid crystal cells cross one another. Liquid crystal cells are defined adjacent to the crossings of the data and gate lines. A data pad and a gate pad are provided at one end portion of each data line and gate line, respectively. A data signal is applied to a liquid crystal cell through a data line from the data driver IC. A scan signal is applied to a liquid crystal cell through a gate line from the gate driver IC. The gate driver IC sequentially supplies scan signals to the gate lines to sequentially select liquid crystal cells arranged in a matrix line by line. Data signals are supplied from the data driver IC to the liquid crystal cells of the selected line.

[0007] A common electrode and a pixel electrode having a finger structure are formed in each pixel, to apply a lateral electric field. By controlling a voltage applied to the common electrode and the pixel electrode, the light transmission ratio of each of the liquid crystal cells can be individually controlled. A thin film transistor is formed in each liquid crystal cell and used as a switching device. When a scan signal is supplied to the gate electrode of the thin film transistor through the gate line, a conductive channel is formed between the source electrode and the drain electrode. At this time, a data signal is supplied to the source electrode of the thin film transistor through the data line such that the data signal is supplied to the pixel electrode by way of the drain electrode. Accordingly, an electric field is applied to the liquid crystal layer of the corresponding liquid crystal cell.

[0008] FIG. 1 is a plan view showing a liquid crystal display panel having a thin film transistor array substrate and a color filter substrate attached in a facing manner in a

general in-plane switching mode LCD device. As shown in FIG. 1, the liquid crystal display panel 100 includes an array region 113 in which liquid crystal cells are arranged in a matrix form; gate pads 114 formed at the end of the gate lines 108; and data pads 115 formed at the end of the data lines 109. The gate pads 114 and the data pads 115 are formed at a peripheral region of a lower substrate 101, which is not overlapped with the upper substrate 102. Each of the gate pads 114 supplies a gate signal from the gate driver IC to the gate lines 108 of the array region 113. Each of the data pads 115 supplies a data signal from the data driver IC to the data lines 109 of the array region 113.

[0009] As shown in FIG. 1, data lines 109, to which image information is applied, and gate lines 108, to which a gate signal is applied, are arranged to cross each other on the lower substrate 101 of the array region 113. Adjacent to each of the crossings, there is a thin film transistor for switching a liquid crystal cell, a common electrode and a pixel electrode connected to the thin film transistor to drive a liquid crystal cell. Liquid crystal (not shown) is filled into a cell gap between the upper substrate 102 and the lower substrate 101. The liquid crystal is held in place by a sealant 116 formed along an outer edge of the array region 113.

[0010] In the upper substrate 102 of the array region 113, color filters are formed, which are separated into cell regions by a black matrix 103 to prevent light leakage. The thin film transistors (not shown), the gate lines 108, the data lines 109, a part of each of the gate pads 114 and a part of each of the data pads 115 of the lower substrate are also covered by the black matrix 103. In FIG. 1, only a black matrix 103 formed at an outer edge of the array region 113 is shown. A metal material, such as Cr, can be used as the black matrix 103. However, because a metal material can affect the lateral electric field between the pixel electrode and the common electrode, a resin black matrix is preferably used.

[0011] FIG. 2 is a sectional view along line II-II in the liquid crystal display panel of in FIG. 1. As shown in FIG. 2, liquid crystal 139 is filled in between the upper substrate 102 and the lower substrate 101. The liquid crystal 139 is held in place by sealant 116 along the periphery of the upper substrate 102 and the lower substrate 101. A specified cell gap is maintained by a spacer 105 disposed within the liquid crystal 139. The lower substrate 101 includes a transparent substrate 131, a gate pad 114 to which a scan signal is applied from the gate driver IC, a thin film transistor (TFT), a common electrode 133 and a pixel electrode 137.

[0012] The TFT includes a gate electrode 132, source electrode 137a, a drain electrode 137b and a semiconductor layer 135. A gate insulating layer 134 is formed between the gate electrode 132 and the semiconductor layer 135. An ohmic contact layer 136 is formed between the semiconductor layer 135 and the source and drain electrodes 137a and 137b.

[0013] Also, in the array region, the common electrode 133, which is formed when the gate electrode 132 is formed, and the pixel electrode 137, which is formed when the source/drain electrodes 137a and 137b are formed, are spaced apart at a predetermined interval across the lower substrate 101. A passivation layer 138 is formed over the entire surface of the thin film transistor (TFT) and the array region.

[0014] Referring to the upper substrate 102, the black matrix 103 and the color filter 122 are formed on a trans-

parent substrate **121**. An overcoat layer **123** for planarization is formed on the black matrix **103** and the color filter **122**. In the case of a small-sized panel such as in a notebook computer, the black matrix **103** is formed at an outer edge of the upper substrate **102** and overlaps the sealant **116**. However, because the black matrix **103** is made of the resin, its adhesion to the substrate **121** is weak such that the black matrix **103** will come off the substrate **121** after frequent shaking of the substrate. Thus, liquid crystal may leak because of a crack that may subsequently occur in the overcoat layer **123** or the sealant **116**.

[0015] **FIG. 3** is a sectional view of another related art LCD device. As shown in **FIG. 3**, in the case of forming the black matrix of Cr, the adhesive strength between the sealant **116** and the black matrix **103a** is improved. However, the Cr black matrix affects the electric field between the pixel electrode **137** and the common electrode **133** such that cross-talk can occur, which degrades the picture rendering capability of the liquid crystal display panel.

SUMMARY OF THE INVENTION

[0016] Accordingly, the present invention is directed to an in-plane switching mode liquid crystal display device and a fabrication method thereof that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

[0017] An object of the present invention is to provide an in-plane switching mode LCD device and a method for fabricating thereof that prevents leakage of liquid crystal.

[0018] Another object of the present invention is to provide an in-plane switching mode LCD device and a method for fabricating thereof that prevents cross-talk.

[0019] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0020] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, the in-plane switching mode liquid crystal display device includes first and second substrates having an array region and a sealant region along a periphery of the array region, a sealant in the sealant region attaching the first and second substrates, a metallic black matrix formed in the sealant region and in the array region of the first substrate, a color filter on the metallic black matrix, an organic layer on the color filter and a liquid crystal layer between the first and second substrates.

[0021] In another aspect of the present invention, a method for fabricating an in-plane switching mode liquid crystal display device is providing first and second substrates having a sealant region and an array region, forming a metallic black matrix in the sealant region and in the array region of the first substrate, forming a color filter on the metallic black matrix, forming an organic layer on the color filter, forming a sealant in the sealant region and attaching the first and second substrates by the sealant.

[0022] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0024] **FIG. 1** is a plan view showing a liquid crystal display panel having a thin film transistor array substrate and a color filter substrate attached in a facing manner in a general in-plane switching mode LCD device.

[0025] **FIG. 2** is a sectional view along line II-II in the liquid crystal display panel of **FIG. 1**.

[0026] **FIG. 3** is a sectional view of another related art LCD device.

[0027] **FIG. 4** is a schematic plan view showing an in-plane switching mode LCD device in accordance with an embodiment of the present invention.

[0028] **FIG. 5** is a sectional view along line VI-VI in the liquid crystal display panel shown in **FIG. 4**.

[0029] **FIG. 6** is a cross-sectional view showing another embodiment of the present invention.

[0030] **FIGS. 7A to 7C** are processing views of the LCD device in accordance an embodiment of the present invention.

DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0031] Reference will now be made in detail to the illustrated embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

[0032] **FIG. 4** is a schematic plan view showing an in-plane switching mode LCD device in accordance with an embodiment of the present invention. As shown in **FIG. 4**, an upper substrate **202** and a lower substrate **201** are attached by a sealant **216**. The lower substrate **201** includes an array region **213** with liquid crystal cells are arranged in a matrix, gate pads **214** connected to gate lines **208** of the array region **213** and a data pads **215** connected to the data lines **209**. The gate pads **214** and the data pads **215** are formed along a peripheral region of the lower substrate **201**, which does not overlap the upper substrate **202**. Each of the gate pads **214** supplies a gate signal from a gate driver IC to one of the gate lines **208** in the array region **213**. Each of the data pads **215** supplies a data signal from a data driver IC to one of the data lines **209** in the array region **213**.

[0033] As for the upper substrate **202**, although not shown in detail in **FIG. 4**, a metallic black matrix **203** is positioned along an outer edge of the array region **213** and overlaps the sealant **216**. The black matrix **203** is made of Cr or CrO_x. An organic layer **223** is formed on the array region **213** overlapped by the black matrix **203**. The organic layer **223** is formed so that the metallic black matrix **203** does not affect the lateral electric field between the common electrode and

the pixel electrode. That is, in the in-plane switching mode LCD device, because the pixel electrode and the common electrode are formed together on the lower substrate, when a voltage is applied to the two electrodes, a lateral electric field is generated. Thus, if the organic layer were not formed to shield the common electrode and the pixel electrode, the black matrix **203** would affect the lateral electric field and cause cross-talk.

[0034] FIG. 5 is a sectional view along line VI-VI in the liquid crystal display panel shown in FIG. 4. As shown in FIG. 5, in the in-plane switching mode LCD device, a liquid crystal layer **239** is filled between the upper substrate **202** and the lower substrate **201**. The sealant **216** along the outer edges of the upper substrate **202** and the lower substrate **201** holds the liquid crystal in place. A specified cell gap is maintained by a spacer **205** disposed within the liquid crystal **239**. The lower substrate **201** includes a transparent substrate **231**, a gate pad **214**, to which a scan signal is applied from the gate driver IC, a thin film transistor TFT, a common electrode **233** and a pixel electrode **237**.

[0035] The TFT includes a gate electrode **232**, a source electrode **237a**, a drain electrode **237b** and a semiconductor layer **235**. A gate insulating layer **234** is formed between the gate electrode **232** and the semiconductor layer **235**. An ohmic contact layer **236** is formed between the semiconductor layer **235** and the source and drain electrodes **237a** and **237b**. Besides a ball spacer **205**, the spacer may be a column spacer formed on the upper substrate **202**. Also, in the array region, the common electrode **233**, which is formed when the gate electrode **232** is formed, and the pixel electrode **237**, which is formed when the source and drain electrodes **237a** and **237b** are formed, are spaced apart at a specified interval across the lower substrate **201**.

[0036] Referring to the upper substrate **202**, the black matrix **203** is formed of Cr or CrO_x and formed on a transparent substrate **221**. Color filters **222** of R (red), G (green) and B (blue) are formed alternately in the array region within the black matrix **203**. In FIG. 5, only one unit pixel is shown. However, throughout the entire array region, R, G and B color filters **222** are formed and the black matrix **203** is formed at portions corresponding to the borders of the color filter **222**.

[0037] The black matrix **203** is also formed at the outer edge of the array region **213** to overlap and contact the sealant **216**. The organic layer **223** is formed on the black matrix **203** and the color filter **222**. Since the black matrix **203** is formed of a metal material, such as Cr or CrO_x, that directly contacts the sealant **216**, the adhesive strength between the black matrix **203** and the sealant **216** is improved compared to the case of using a resin black matrix. Accordingly, sealant breakage and liquid crystal leakage can be prevented. In addition, because the organic film is formed on the metallic black matrix, distortion of the lateral electric field between the common electrode and the pixel electrode due to the black matrix can be prevented. In the alternative, as shown in FIG. 6, the organic layer **223a** can be formed over the entire upper substrate **202** including the sealant **216**.

[0038] The fabrication method of the in-plane switching mode LCD device in accordance with the present invention will now be described with reference to FIGS. 7A to 7C. First, as shown in FIG. 7A, after depositing a metal material, such as Al, Mo, Ta, Ti, Cr, Cu or Al alloy, on the transparent

substrate **231**, the gate pad **214**, the gate line (not shown), the gate electrode **232** of the thin film transistor and the common electrode **233** are formed. At this time, the gate pad **214** is formed at an end of the gate line for supplying a scan signal from the gate driver IC to the gate line.

[0039] Next, a gate insulating layer **234** is formed by depositing SiN_x or SiO_x and the like on the structure by a plasma chemical vapor deposition method. A part of the gate pad **214** is then exposed to be connected to the gate driver IC (not shown). Subsequently, amorphous silicon and n⁺ amorphous silicon are deposited on the gate insulating layer **234** and patterned to form the semiconductor layer **235** and the ohmic contact layer **236**.

[0040] Subsequently, as shown in FIG. 7B, a metal layer, such as Al, Cr, Ti, Ta, Cu, Mo or Al alloy, is deposited on the structure by a sputtering method and then patterned to form the data pad (not shown), the source and drain electrode **237a** and **237b** of the thin film transistor and the pixel electrode **237**. Thereafter, the ohmic contact layer **236** is etched by using the source and drain electrodes **237a** and **237b** as a mask. When the source and drain electrodes **237a** and **237b** are formed, the data lines (not shown) are also simultaneously formed.

[0041] A passivation layer **238** is then formed over the entire surface of the substrate containing the thin film transistor. At this time, the passivation layer **238** is partially etched so as to expose the data pad for connection to the data driver IC. The common electrode **233** and the pixel electrode **237** may be formed at the same time that the source and drain electrodes **237a** and **237b** are formed on the passivation layer **238**. The common electrode **233** and the pixel electrode **237** may be transparent electrodes, such as ITO or IZO. Or, at least one of the common electrode **233** and the pixel electrode **237** may be formed as a transparent electrode.

[0042] Then, as shown in FIG. 7C, Cr or CrO_x is deposited by a sputtering method and patterned to form the black matrix **203** at regions corresponding to the outer edge of the array region, the thin film transistor and the gate/data lines of the lower substrate **201**. And then, color filters **222** are formed within the black matrix **203** in the array region. The organic layer **223** is then formed on the black matrix **203** and the color filters **222** by spin coating to fabricate the color filter substrate **202**. The organic layer **223** may be formed only in the array region or over the entire surface of the substrate including the black matrix **203** formed at the outer edge of the array region. Thereafter, the color filter substrate **202** and the thin film transistor substrate **201** are positioned to face each other. Then, an edge portion of the two substrates are attached by using the sealant **216**, such as an epoxy resin.

[0043] The in-plane switching mode liquid crystal display device and its fabrication method of the present invention have particular advantages over related art arrangements and methodologies. For example, the metallic black matrix is used instead of the resin black matrix to prevent a liquid crystal leakage. Further, the organic film is formed on the metallic black matrix to remove the influence of the metallic black matrix on the lateral electric field between the pixel electrode and the common electrode to thereby prevent cross-talk.

[0044] It will be apparent to those skilled in the art that various modifications and variations can be made in the

in-plane switching mode liquid crystal display device and fabrication method thereof in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. An in-plane switching mode liquid crystal display device comprising:

first and second substrates having an array region and a sealant region along a periphery of the array region;

a sealant in the sealant region attaching the first and second substrates;

a metallic black matrix formed in the sealant region and in the array region of first substrate;

a color filter on the metallic black matrix;

an organic layer on the color filter; and

a liquid crystal layer between the first and second substrates.

2. The device of claim 1, wherein the metallic black matrix is one of Cr and CrO_x .

3. The device of claim 1, wherein the organic layer is formed in the array region.

4. The device of claim 3, wherein the organic layer is in direct contact with the metallic black matrix.

5. The device of claim 1, wherein the organic layer is formed in the array region and in the sealant region.

6. The device of claim 5, wherein the organic layer is in direct contact with the sealant.

7. The device of claim 1, wherein the second substrate comprises:

gate lines and data lines arranged vertically and horizontally to define a pixel region;

a thin film transistor adjacent each crossing of the gate and data lines;

a gate pad and a data pad at an end of the gate and data lines; and

a common electrode and a pixel electrode in the pixel region.

8. A method for fabricating an in-plane switching mode liquid crystal display device, comprising:

providing first and second substrates having a sealant region and an array region;

forming a metallic black matrix in the sealant region and in the array region of the first substrate;

forming a color filter on the metallic black matrix;

forming an organic layer on the color filter;

forming a sealant in the sealant region; and

attaching the first and second substrates by the sealant.

9. The method of claim 8, wherein the metallic black matrix is one of Cr and CrO_x .

10. The method of claim 8, wherein the organic layer is formed in the array region.

11. The method of claim 8, wherein the organic layer is formed in the sealant region and the array region.

12. The method of claim 8, further comprising:

forming a thin film transistor, a pixel electrode and a common electrode on the second substrate.

13. The method of claim 8, further comprising:

forming a liquid crystal layer between the first and second substrates.

* * * * *

专利名称(译)	面内切换模式液晶显示装置及其制造方法		
公开(公告)号	US20040046918A1	公开(公告)日	2004-03-11
申请号	US10/644034	申请日	2003-08-20
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG 飞利浦LCD CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	SONG IN DUK		
发明人	SONG, IN-DUK		
IPC分类号	G02F1/1335 G02F1/1339 G02F1/1343		
CPC分类号	G02F1/133512 G02F1/134363 G02F1/1339		
优先权	1020020049532 2002-08-21 KR		
其他公开文献	US7336333		
外部链接	Espacenet USPTO		

摘要(译)

一种面内切换模式液晶显示装置，包括：第一基板和第二基板，沿阵列区域的周边具有阵列区域和密封剂区域；密封剂区域中的密封剂，附着第一和第二基板；金属黑矩阵密封剂区域和第一基板的阵列区域中，金属黑色矩阵上的滤色器，滤色器上的有机层和第一和第二基板之间的液晶层。

