



US 20040085498A1

(19) **United States**

(12) **Patent Application Publication**
Chang

(10) **Pub. No.: US 2004/0085498 A1**

(43) **Pub. Date: May 6, 2004**

(54) **TRANSFLECTIVE LIQUID CRYSTAL DISPLAY**

(52) **U.S. Cl. 349/114**

(76) **Inventor: Wei-Chih Chang, Hsinchu (TW)**

(57) **ABSTRACT**

Correspondence Address:
MADSON & METCALF
GATEWAY TOWER WEST
SUITE 900
15 WEST SOUTH TEMPLE
SALT LAKE CITY, UT 84101

A liquid crystal display is provided. The liquid crystal display includes a common electrode, a liquid crystal layer, a data line, a transmissive electrode, a reflective electrode, an auxiliary electrode and a dielectric layer. The transmissive electrode is electrically connected to the data line and defines a first capacitor device along with the liquid crystal layer and the common electrode. The reflective electrode defines a second capacitor device along with the liquid crystal layer and the common electrode. The auxiliary electrode is electrically connected to the transmissive electrode. The dielectric layer is disposed between the auxiliary electrode and the reflective electrode and defines a third capacitor device along with the auxiliary electrode and the reflective electrode. The third capacitor device is electrically connected to the second capacitor device in series.

(21) **Appl. No.: 10/462,496**


(22) **Filed: Jun. 16, 2003**

(30) **Foreign Application Priority Data**

Nov. 5, 2002 (TW)..... 091132623

Publication Classification

(51) **Int. Cl.⁷ G02F 1/1335**

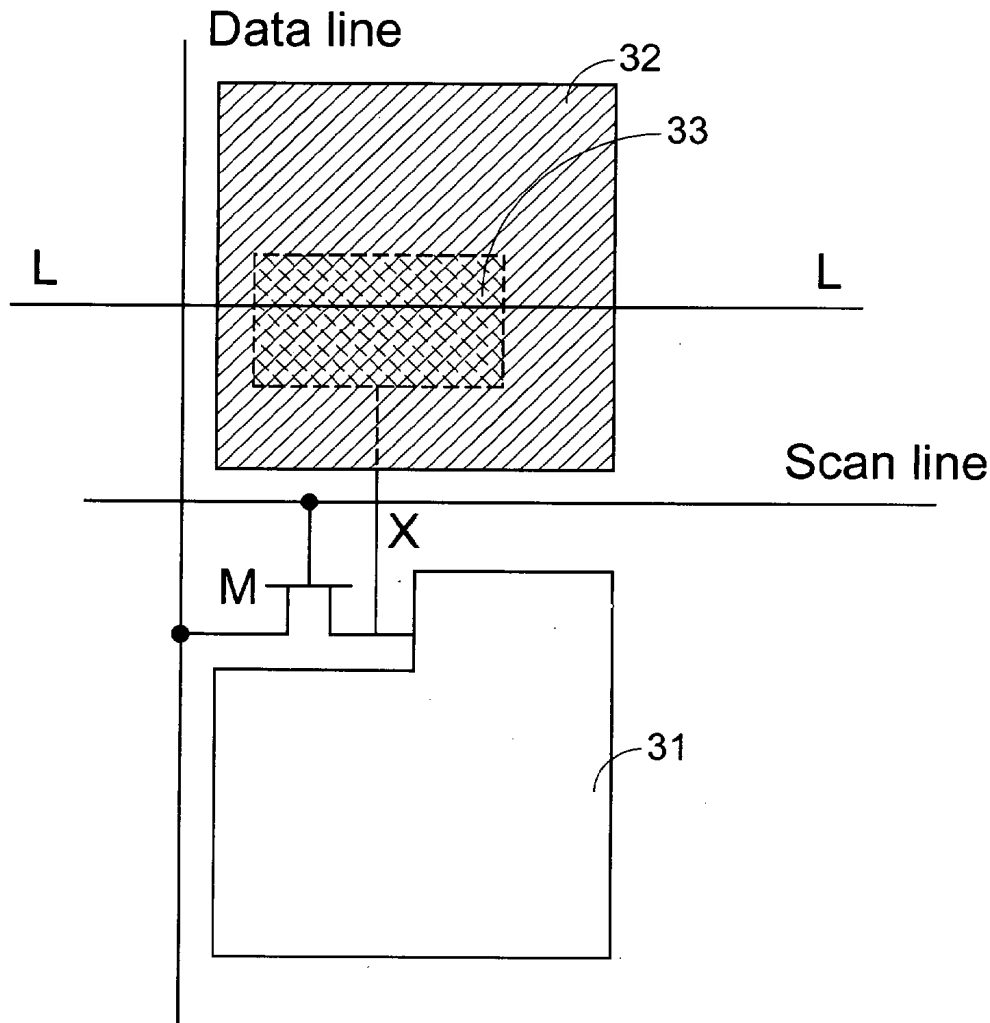

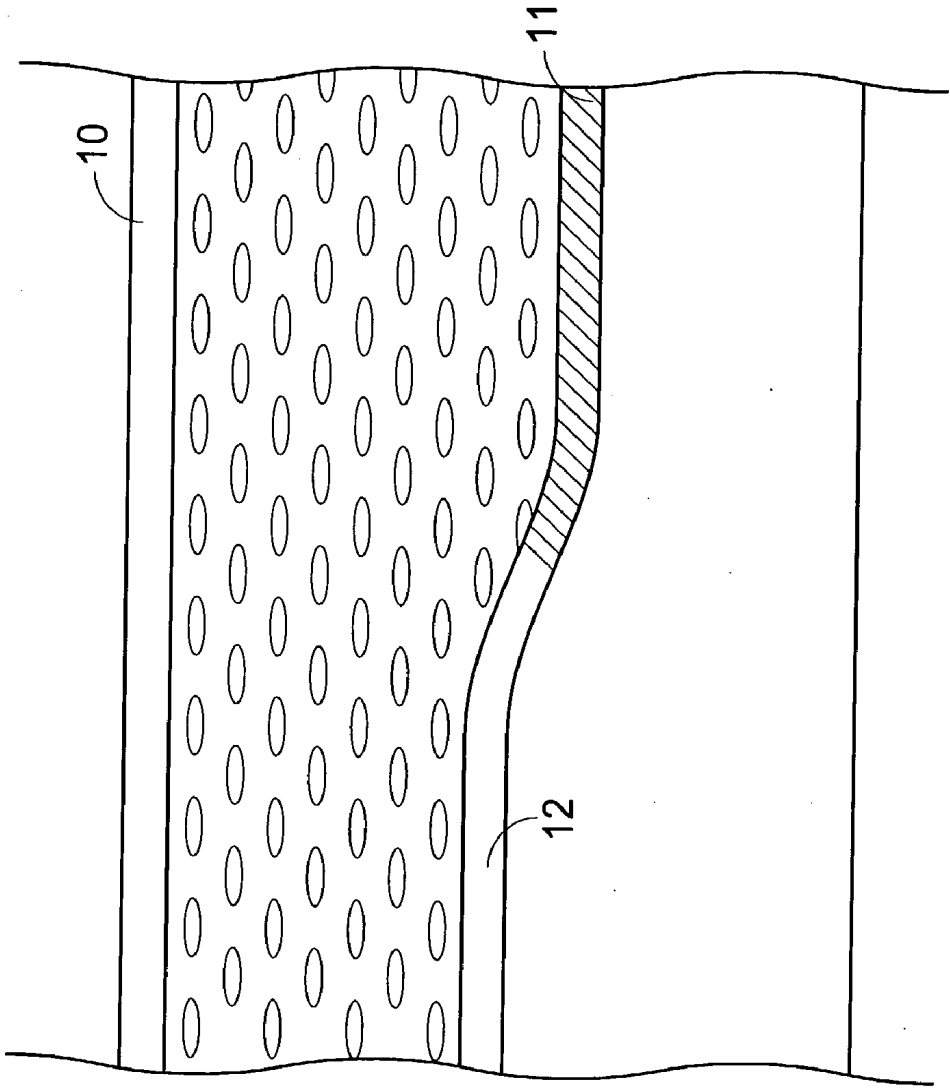


Fig.1(a)
PRIOR ART

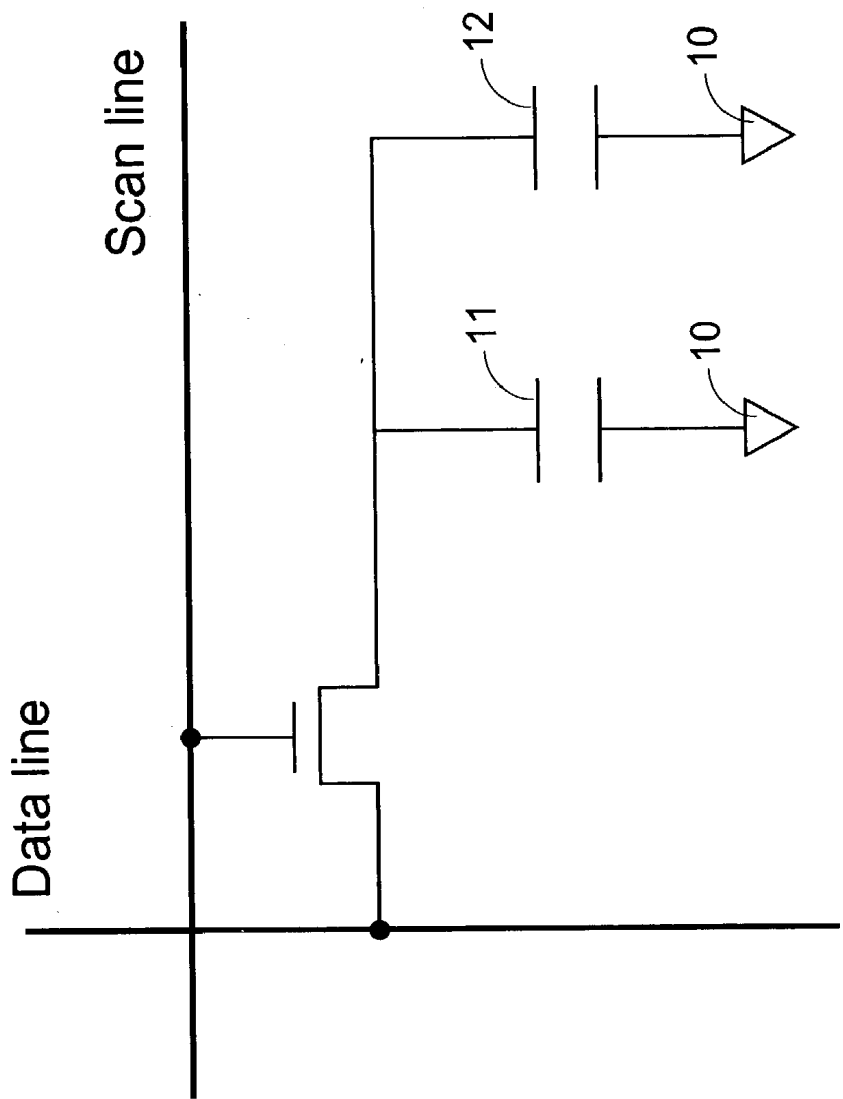


Fig.1(b)
PRIOR ART

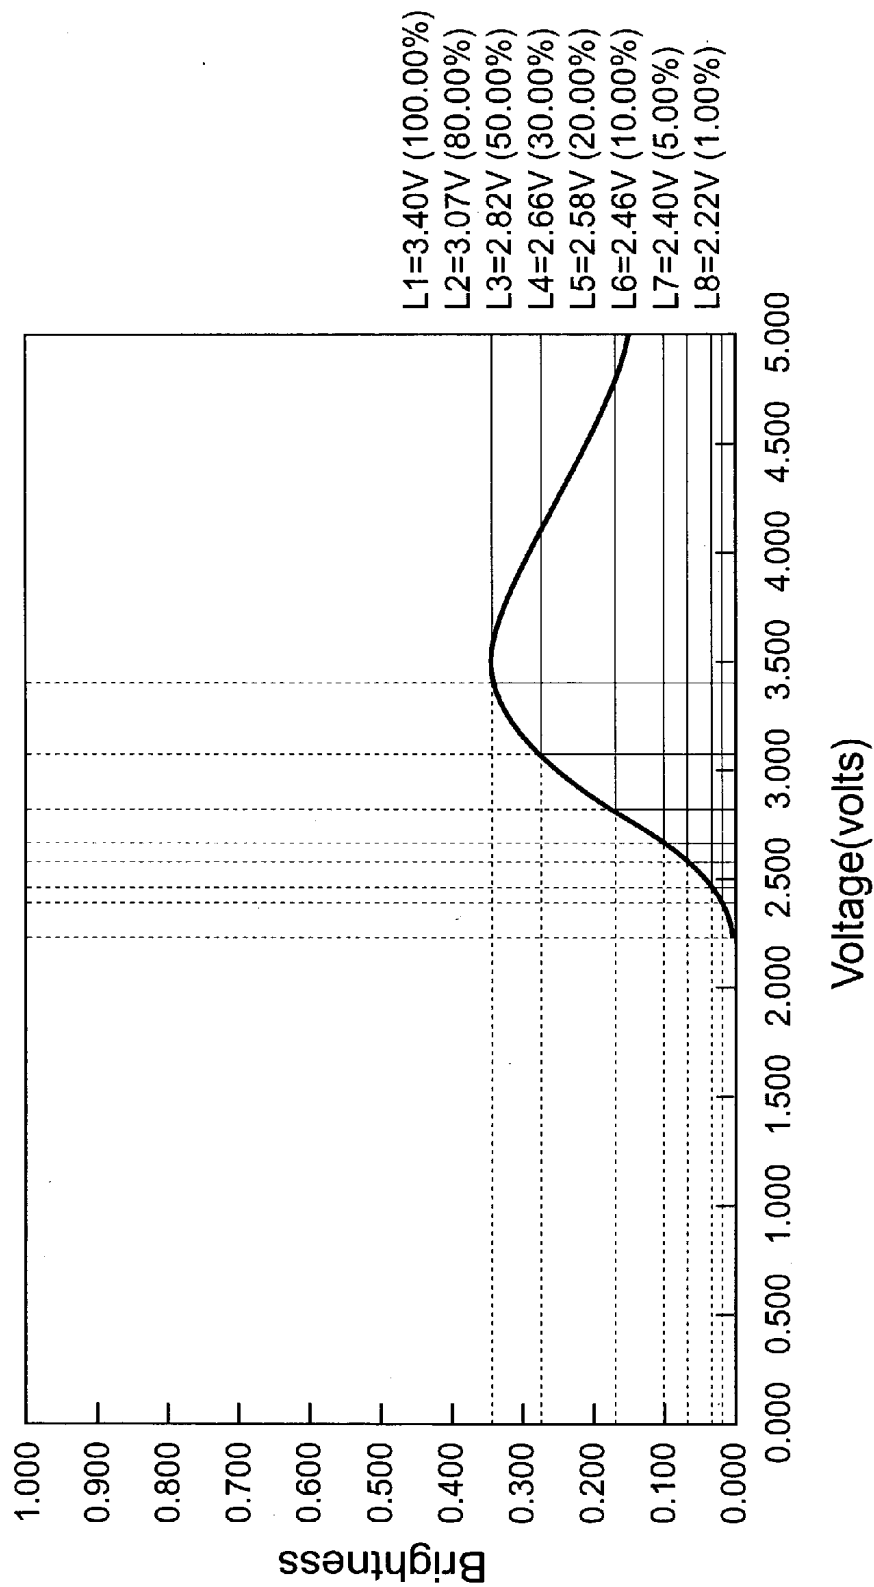


Fig.2(a)
PRIOR ART

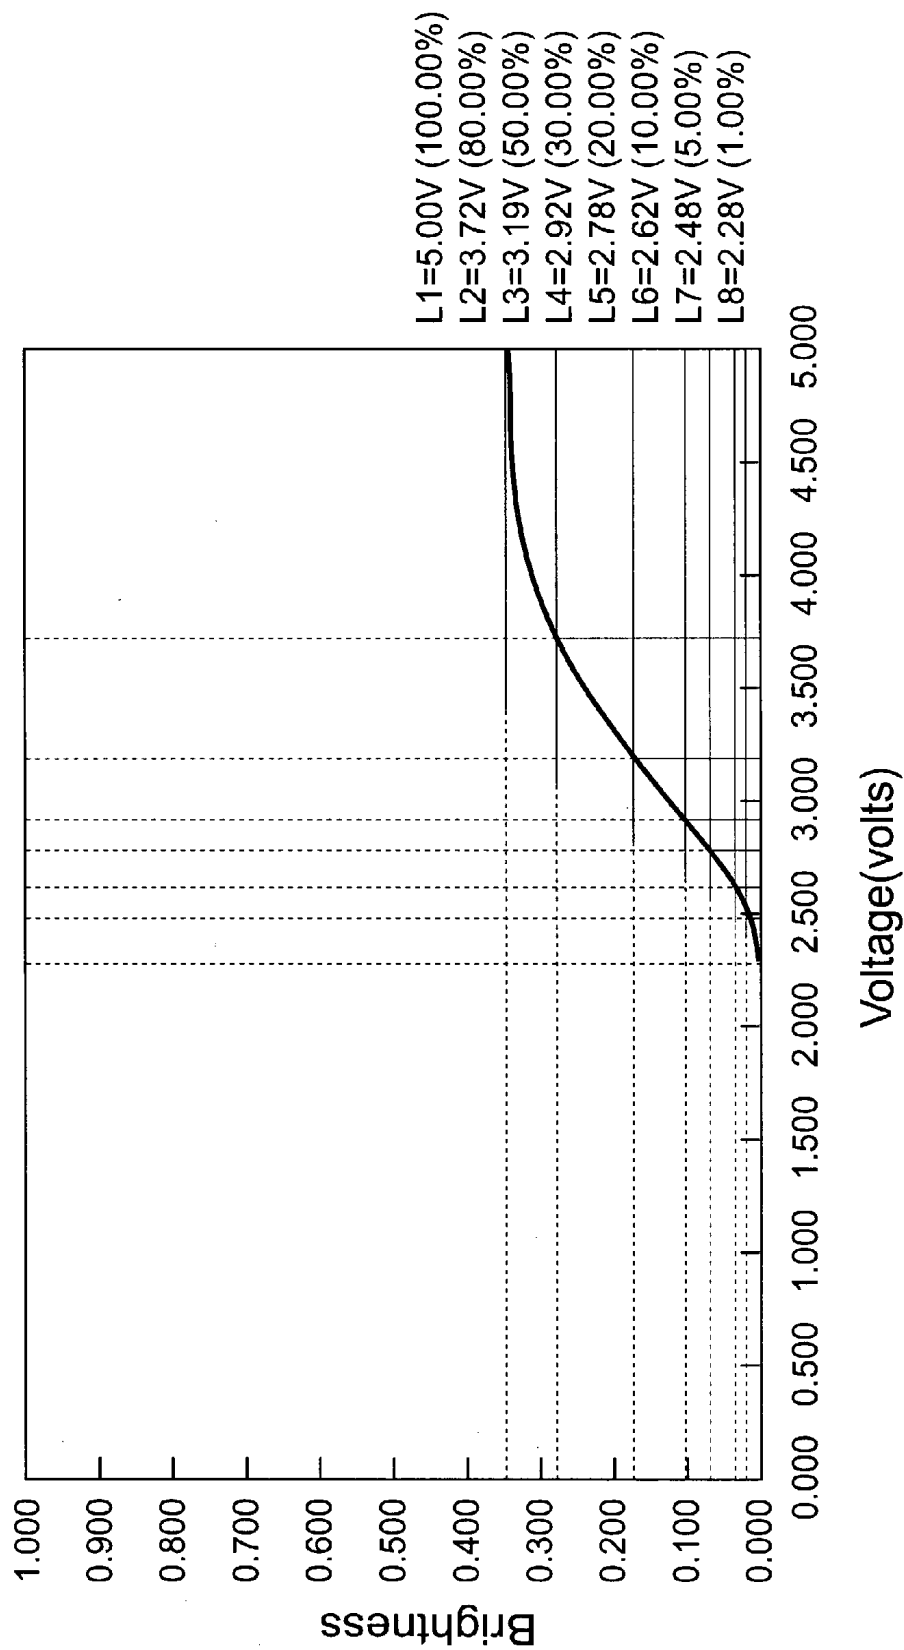


Fig.2(b)
PRIOR ART

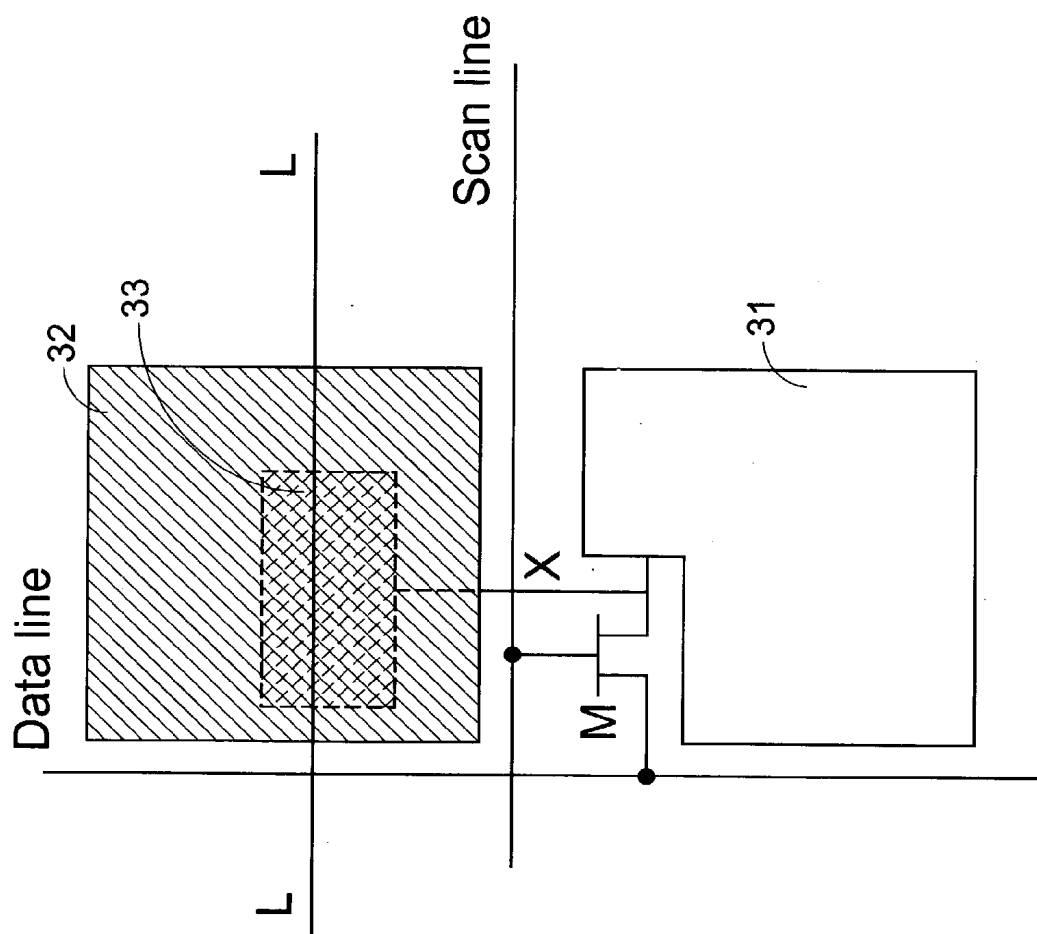


Fig.3(a)

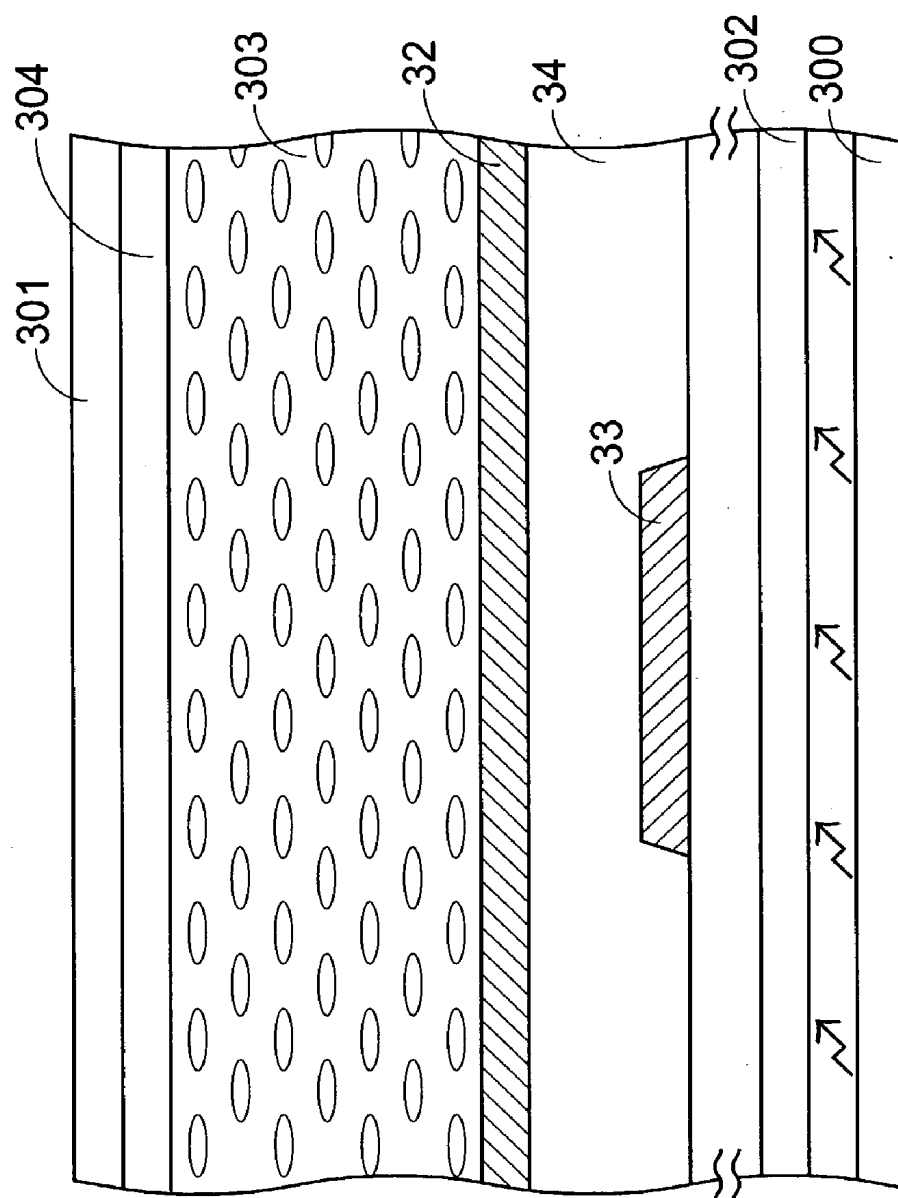


Fig.3(b)

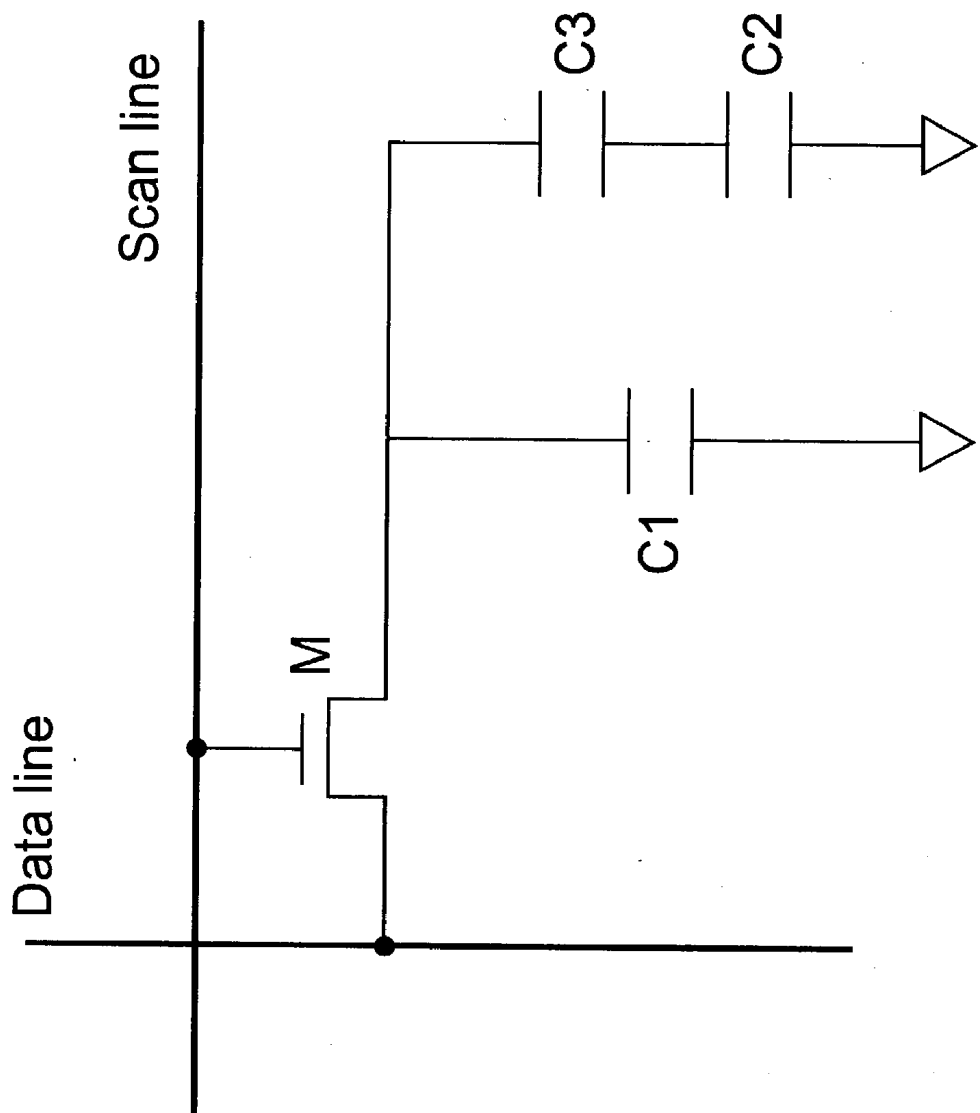


Fig.3(c)

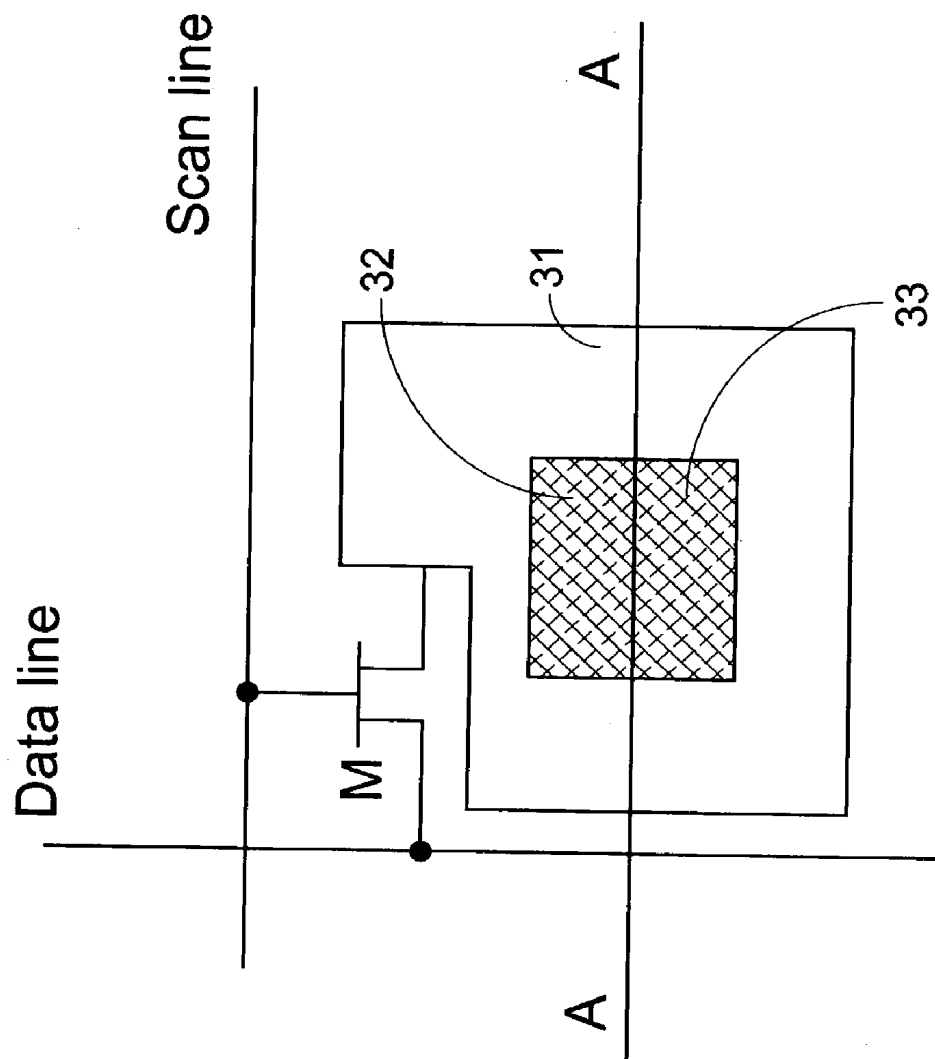


Fig. 4(a)

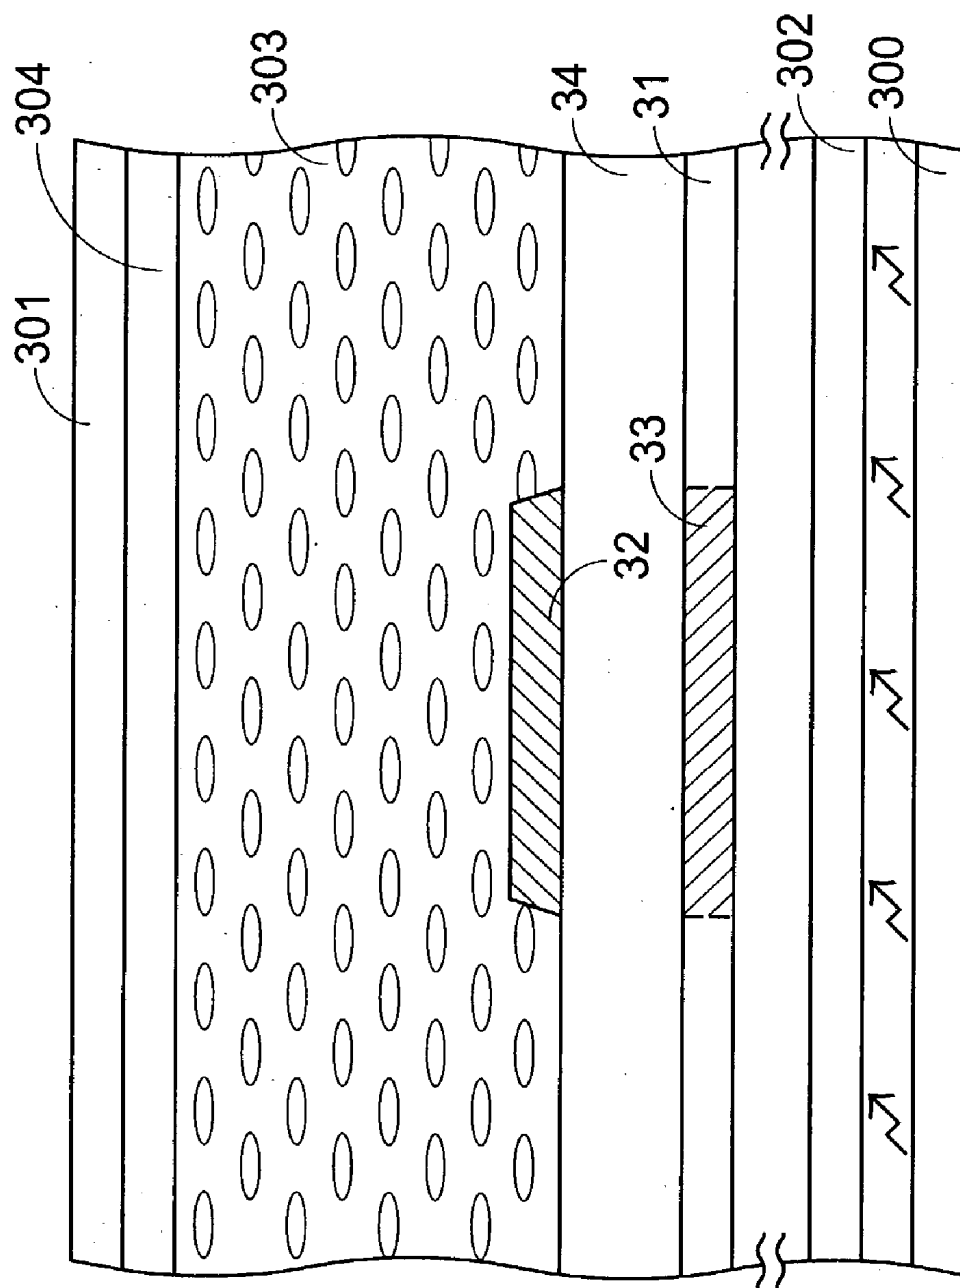


Fig. 4(b)

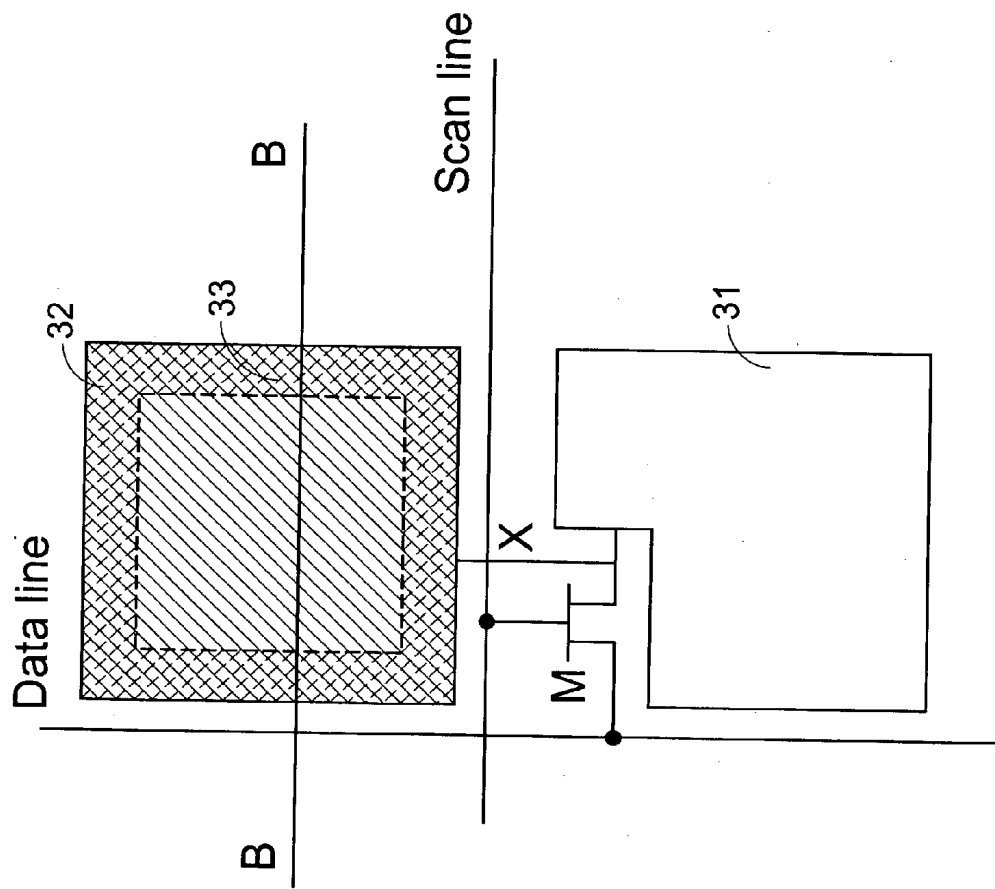


Fig.5(a)

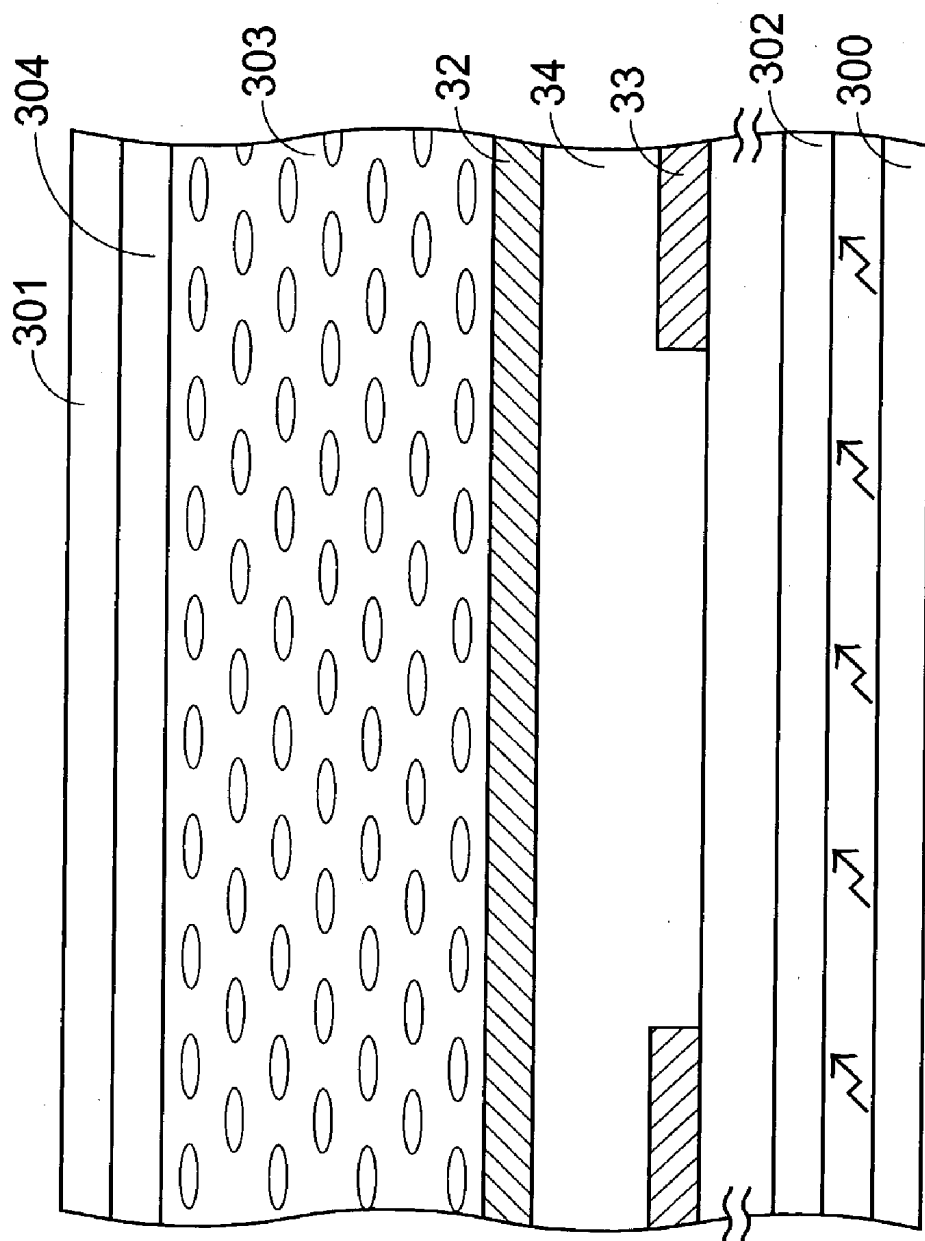


Fig. 5(b)

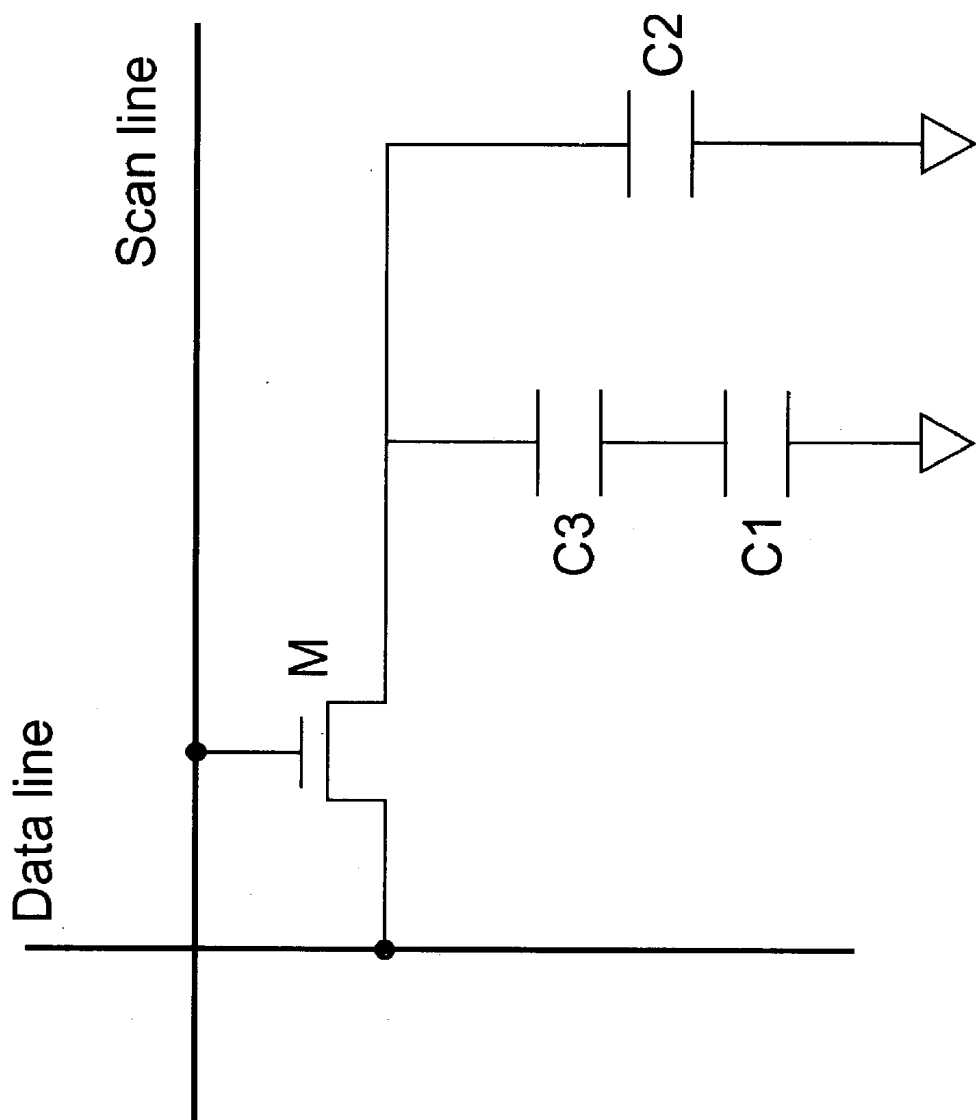


Fig.6(a)

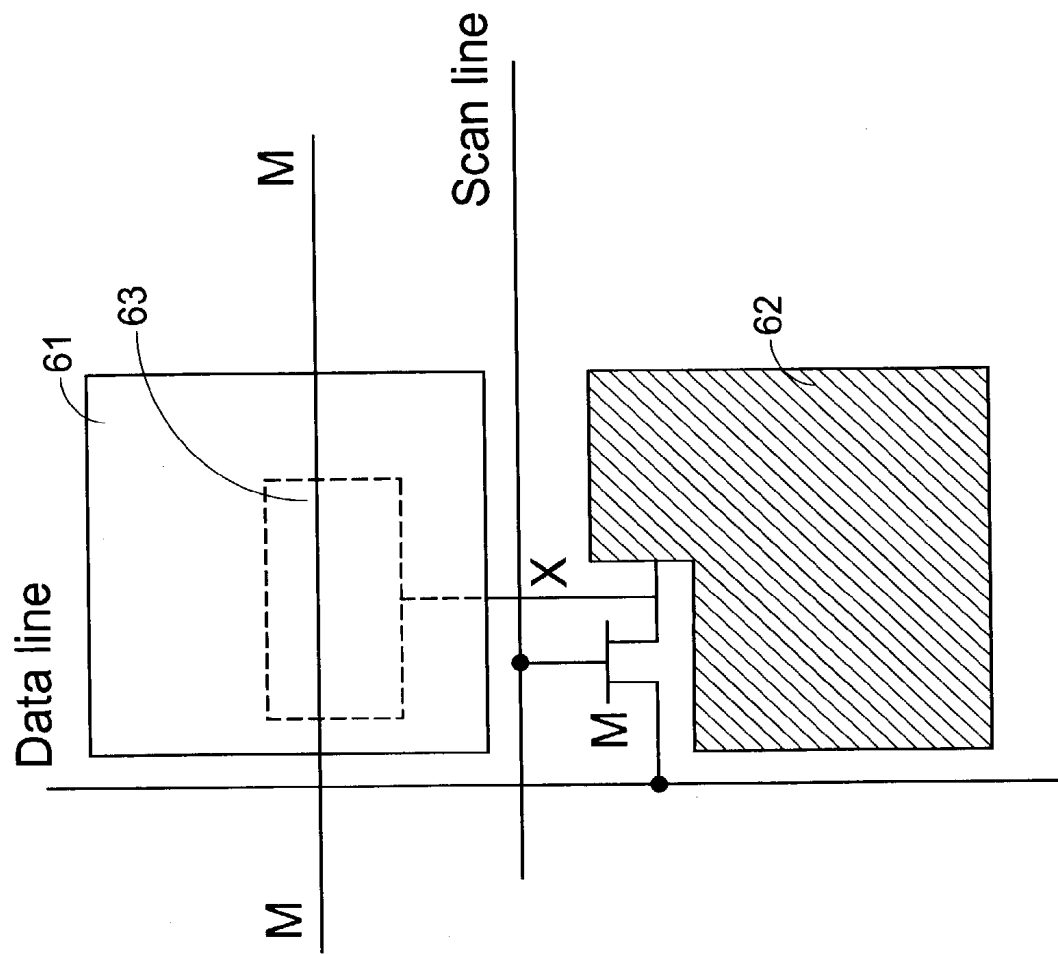


Fig. 6(b)

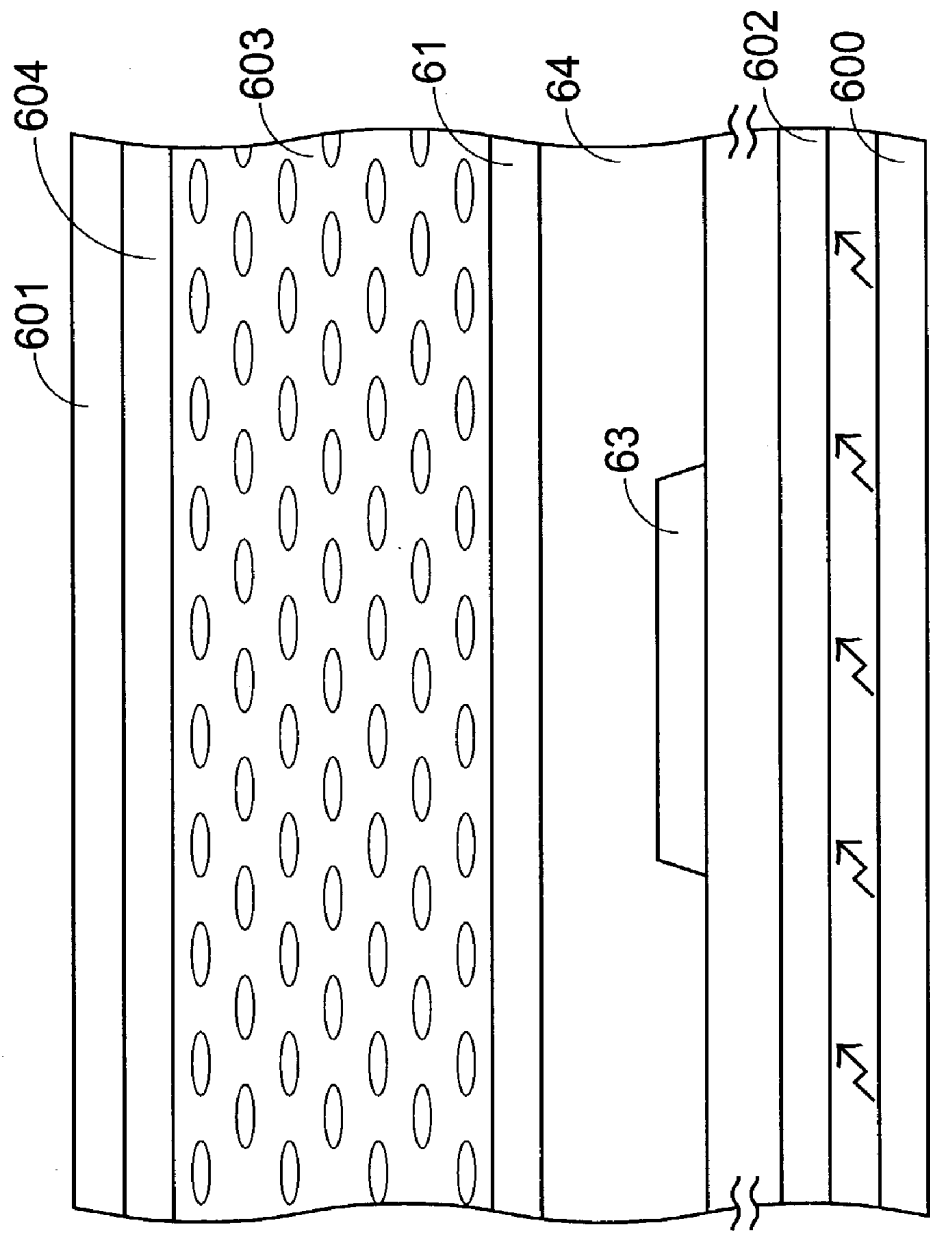


Fig.6(c)

TRANSFLECTIVE LIQUID CRYSTAL DISPLAY

FIELD OF THE INVENTION

[0001] The present invention relates to a liquid crystal display, and more particularly to a structure of a transfective liquid crystal display.

BACKGROUND OF THE INVENTION

[0002] Liquid crystal displays (LCDs) are widely used in portable televisions, laptop personal computers, notebooks, electronic watches, calculators, mobile phones and office automation devices due to their advantages of small size, light weight, low driving voltage, low power consumption and good portability.

[0003] LCDs are generally classified as two major types: transmissive LCDs and reflective LCDs. A transmissive LCD requires backlight, while a reflective LCD reflects environmental light. So far, reflective LCDs are relatively popular. Since the reflective LCDs require high levels of ambient light to be readable, they work very well in bright sunlight but do not perform well indoors. In order to perform well in low light environments, a so-called "transfective" LCD has been developed in recent years.

[0004] The transfective LCD is designed as a combination of the transmissive and the reflective designs. Please refer to the cross-sectional structure of **FIG. 1(a)**. A pixel cell of a conventional transfective LCD comprises a common electrode **10**, a transmissive electrode **11**, a reflective electrode **12** and a liquid crystal layer **13**. The liquid crystal layer **13** contains a plurality of liquid crystal molecules and is sandwiched between the common electrode **10**, the transmissive electrode **11** and the reflective electrode **12**. With such structure, each pixel cell of the transfective LCD can be referred to comprise two portions. One is a transmissive portion consisting of the common electrode **10**, the liquid crystal layer **13** and the transmissive electrode **11**, whereas the other one is a reflective portion consisting of the common electrode **10**, the liquid crystal layer **13** and the reflective electrode **12**. The liquid crystal molecules are aligned according to driving voltages applied between the electrodes. The light passing through the liquid crystal layer **13** is controlled accordingly. **FIG. 1(b)** is a schematic circuit diagram illustrating a cell of the transfective LCD shown in **FIG. 1(a)**.

[0005] **FIGS. 2(a)** and **2(b)** are brightness vs. voltage plots of the reflective portion and the transmissive portion, respectively. As shown in **FIG. 2(a)**, for the reflective portion, a maximum brightness is achieved at just about 3.5 volts of the applied voltage. Whereas, as shown in **FIG. 2(b)**, the maximum brightness for the transmissive portion can be obtained when the applied voltage is approximately 5 volts. The symbols **L1** in **FIGS. 2(a)** and **2(b)** indicate a specific driving voltage giving a brightness index of 100%, while the symbols **L2**, **L3**, . . . indicate other driving voltages resulting in various brightness. It is understood from the figures while the driving voltages applied for the transmissive portion and the reflective portion are the same, the required operation voltages by the transmissive portion and the reflective portion, however, are different due to the difference in operation principles. Since the brightness varies with the driving voltages, different criteria for determining brightness

levels and thus uneven brightness effects for the reflective portion and the transmissive portion are rendered.

SUMMARY OF THE INVENTION

[0006] It is an object of the present invention to provide a transfective liquid crystal display having a uniform brightness effect so as to enhance image quality of the liquid crystal display.

[0007] In accordance with an aspect of the present invention, there is provided a liquid crystal display. The liquid crystal display comprises a common electrode, a liquid crystal layer, a data line, a transmissive electrode, a reflective electrode, an auxiliary electrode and a dielectric layer. The liquid crystal layer comprises a plurality of liquid crystal molecules. The data line is used for transmitting a data voltage signal. The transmissive electrode is electrically connected to the data line and defines a first capacitor device along with the liquid crystal layer and the common electrode. The reflective electrode defines a second capacitor device along with the liquid crystal layer and the common electrode. The auxiliary electrode is electrically connected to the transmissive electrode. The dielectric layer is disposed between the auxiliary electrode and the reflective electrode and defines a third capacitor device along with the auxiliary electrode and the reflective electrode. The third capacitor device is electrically connected to the second capacitor device in series.

[0008] In an embodiment, the reflective electrode is made of a material selected from a group consisting of aluminum (Al), silver (Ag) and aluminum-neodymium (Al—Nd) alloy, and the transmissive electrode is made of a material selected from a group consisting of indium tin oxide (ITO) and indium zinc oxide (IZO).

[0009] In an embodiment, the auxiliary electrode is made of a material selected from a group consisting of indium tin oxide (ITO) and indium zinc oxide (IZO).

[0010] In an embodiment, the data line is electrically connected to the drain electrode of a thin film transistor and further to the transmissive electrode.

[0011] In an embodiment, the auxiliary electrode is integrally defined with the transmissive electrode.

[0012] In an embodiment, the auxiliary electrode is electrically connected to the transmissive electrode via a conducting line, and disposed at a side of the reflective electrode opposite to the common electrode.

[0013] In an embodiment, the auxiliary electrode is of a shape selected from one of a solid rectangle and a hollow ring.

[0014] In an embodiment, the reflective electrode is disposed over the transmissive electrode, and the auxiliary electrode is imbedded in the transmissive electrode and aligned with the reflective electrode.

[0015] In an embodiment, the liquid crystal display of the present invention further comprises a backlight disposed at a side of the transmissive electrode opposite to the liquid crystal layer.

[0016] In an embodiment, the liquid crystal display of the present invention further comprises a first transparent substrate disposed above the common electrode.

[0017] In an embodiment, the liquid crystal display of the present invention further comprises a second transparent substrate disposed under the transmissive electrode. A second aspect of the liquid crystal display according to the present invention relates to a common electrode; a liquid crystal layer comprising a plurality of liquid crystal molecules; a data line for transmitting a data voltage signal; a transmissive electrode defining a first capacitor device along with the liquid crystal layer and the common electrode; a reflective electrode electrically connected to the data line and defining a second capacitor device along with the liquid crystal layer and the common electrode; an auxiliary electrode electrically connected to the reflective electrode; and a dielectric layer disposed between the auxiliary electrode and the transmissive electrode and defining a third capacitor device along with the auxiliary electrode and the transmissive electrode. The third capacitor device is electrically connected to the first capacitor device in series.

[0018] In an embodiment, the auxiliary electrode is integrally defined with the reflective electrode.

[0019] In an embodiment, the auxiliary electrode is electrically connected to the reflective electrode via a conducting line, and disposed at a side of the transmissive electrode opposite to the common electrode.

[0020] In an embodiment, the auxiliary electrode is of a shape selected from one of a solid rectangle and a hollow ring.

[0021] Preferably, the auxiliary electrode is light transmissive.

[0022] In accordance with another aspect of the present invention, there is provided a liquid crystal display. The liquid crystal display comprises a TFT display unit, a scan line and a data line. The TFT display unit includes a transmissive capacitor zone working under a first operation voltage and a reflective capacitor zone working under a second operation voltage. The scan line is used for selectively driving the TFT display unit. The data line is used for transmitting a data voltage signal to the driven TFT display unit, wherein the data voltage signal is provided for both of the transmissive and reflective capacitor zones. Specifically, the TFT display unit further includes an auxiliary capacitor zone electrically connected to one of the transmissive and reflective capacitor zones, which works under a smaller operation voltage, in series. Preferably, the auxiliary capacitor zone and the one of the transmissive and reflective capacitor zones serially connected to each other are further electrically connected to the other of the transmissive and reflective capacitor zones in parallel.

[0023] In an embodiment, the transmissive capacitor zone is defined by a common electrode, a transmissive electrode and liquid crystal molecules sandwiched therebetween.

[0024] In an embodiment, the reflective capacitor zone is defined by the common electrode, a reflective electrode and liquid crystal molecules sandwiched therebetween.

[0025] In an embodiment, the first operation voltage is higher than the second operation voltage, and the auxiliary capacitor zone is defined by an auxiliary electrode, the reflective electrode and a dielectric layer sandwiched therebetween.

[0026] In an embodiment, the auxiliary electrode is integrally defined with the transmissive electrode.

[0027] In an embodiment, the auxiliary electrode is electrically connected to the transmissive electrode via a conducting line, and disposed at a side of the reflective electrode opposite to the common electrode.

[0028] In an embodiment, the reflective electrode is disposed over the transmissive electrode, and the auxiliary electrode is imbedded in the transmissive electrode and aligned with the reflective electrode.

[0029] In an embodiment, the liquid crystal display is a transreflective liquid crystal display, and the transmissive and the reflective capacitor zones are a transmissive and a reflective zones, respectively.

[0030] The above objects and advantages of the present invention will become more readily apparent to those ordinarily skilled in the art after reviewing the following detailed description and accompanying drawings, in which:

BRIEF DESCRIPTION OF THE DRAWINGS

[0031] FIG. 1(a) schematically shows a partial cross-sectional structure of a conventional transreflective liquid crystal display;

[0032] FIG. 1(b) is a schematic circuit diagram illustrating a cell of the transreflective LCD in FIG. 1(a);

[0033] FIG. 2(a) is a brightness vs. voltage plot of the reflective portion of a conventional transreflective LCD;

[0034] FIG. 2(b) is a brightness vs. voltage plot of the transmissive portion of a conventional transreflective LCD;

[0035] FIG. 3(a) is a schematic diagram showing a top plane view of a pixel cell of a transreflective LCD according to a preferred embodiment of the present invention;

[0036] FIG. 3(b) is a cross-sectional view of the reflective portion in FIG. 3(a) taken along the line L-L;

[0037] FIG. 3(c) is a schematic circuit diagram illustrating the configuration of the pixel cell implemented by the structures of FIGS. 3(a) and 3(b);

[0038] FIG. 4(a) is a schematic diagram showing a top plane view of a pixel cell of a transreflective LCD according to another preferred embodiment of the present invention;

[0039] FIG. 4(b) is a cross-sectional view of the transreflective LCD in FIG. 4(a) taken along the line A-A;

[0040] FIG. 5(a) is a schematic diagram showing a top plane view of a pixel cell of a transreflective LCD according to another preferred embodiment of the present invention;

[0041] FIG. 5(b) is a cross-sectional view of the transreflective LCD in FIG. 5(a) taken along the line B-B;

[0042] FIG. 6(a) is a schematic circuit diagram illustrating the configuration of the pixel cell according to a further preferred embodiment of the present invention;

[0043] FIG. 6(b) is a schematic diagram showing a top plane view of a pixel cell of a transreflective LCD corresponding to the circuit of FIG. 6(a); and

[0044] FIG. 6(c) is a cross-sectional view of the transmissive portion in FIG. 6(b) taken along the line M-M.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0045] Please refer to **FIG. 3(a)–3(c)**, which illustrate a pixel cell of a transfective LCD according to a preferred embodiment of the present invention. **FIG. 3(b)** is a cross-sectional view taken along the L-L line of **FIG. 3(a)**, and **FIG. 3(c)** is a schematic circuit diagram of the pixel cell of **FIG. 3(a)**.

[0046] The pixel cell of the transfective LCD comprises a data line, a scan line, a transmissive capacitor portion C1 and a reflective capacitor portion C2 disposed between an upper transparent substrate 301 and a lower transparent substrate 302. In addition, a backlight source 300 is disposed under the lower transparent substrate 302 for providing source light for the transmission-related zone. The data line is employed for transmitting a data voltage signal. Via the scan line, the thin film transistor (TFT) M is controlled in either a switching-on or switching-off state. The transmissive capacitor portion C1 comprises of a transmissive electrode 31 electrically connected to the data line, a common electrode 304 above the transmissive electrode 31, and liquid crystal molecules 303 sandwiched between the electrodes. The reflective capacitor portion C2 comprises the common electrode 304, the liquid crystal layer 303 and a reflective electrode 32. For the purpose of achieving a uniform brightness effect for the transfective LCD, an auxiliary capacitor device C3 is additional provided to be electrically connected to one of the transmissive capacitor device C1 and the reflective capacitor device C2, which works under a lower operation voltage, in series, and the serially connected combination is further electrically connected to the other, which works under a higher operation voltage, in parallel. In this embodiment, it is assumed that the operation voltage of the reflective capacitor device C2 is smaller than that of the transmissive capacitor device C1. Therefore, the auxiliary capacitor device C3 is electrically connected to the reflective capacitor device C2 in series and the combination of the capacitor devices C2 and C3 are further electrically connected to the transmissive capacitor device C1, as shown in **FIG. 3(c)**.

[0047] In this embodiment, referring to **FIG. 3(b)**, the auxiliary capacitor device C3 is defined by the reflective electrode 32, an auxiliary electrode 33, and a dielectric layer 34 between the electrodes. The auxiliary electrode 33 is formed on the lower transparent substrate 302 and connected to the transmissive electrode 31 via a conducting line X (**FIG. 3(c)**) so as to have a potential equal to the transmissive electrode 31.

[0048] Provided that the applied voltage is V_d , and these capacitor devices C1, C2 and C3 have capacitance values of Q_1 , Q_2 and Q_3 , respectively, the voltage applied onto the transmissive capacitor device C1 is V_d , and the reflective capacitor device C2 has a divided voltage $V_{c2} = V_d * Q_2 / (Q_2 + Q_3)$. In other words, the voltage applied onto the reflective capacitor device C2 is adjusted to a lower level by means of the serial connection of the auxiliary capacitor device C3. Therefore, the voltages for driving the transmissive portion and the reflective portion are differently provided according to their operation voltages. For example, the applied voltages for the transmissive portion and the reflective portion can be adjusted to 5 volts and 3.5 volts, respectively, so as to obtain even brightness.

[0049] Please refer to **FIG. 4(a)** and **4(b)**, which illustrate a pixel cell of a transfective LCD according to another preferred embodiment of the present invention. In this embodiment, the reflective electrode 32 is disposed over the transmissive electrode 31, and the reflective electrode 32 is ungrounded and situated in a floating state. The auxiliary electrode 33 in a shape of a solid rectangle is imbedded in the transmissive electrode 31 and aligned with the reflective electrode 32, thereby preventing from a coupling effect generated around the data line or the scan line. The auxiliary electrode 33 is in contact with the transmissive electrode 31 so as to get into electric connection with each other.

[0050] Likewise, the transmissive electrode 31 defines a transmissive capacitor device C1 along with the liquid crystal layer 303 and the common electrode 304. The reflective electrode 32 defines a reflective capacitor device C2 along with the liquid crystal layer 303 and the common electrode 304. Moreover, the dielectric layer 34 defines an auxiliary capacitor device C3 along with the auxiliary electrode 33 and the reflective electrode 32. The similar circuitry as shown in **FIG. 3(c)** can be achieved.

[0051] Please refer to **FIG. 5(a)** and **5(b)**, which illustrate a pixel cell of a transfective LCD according to another preferred embodiment of the present invention. The structure of the pixel cell shown in **FIG. 5** is similar to that of **FIG. 3**, except that the auxiliary electrode 33 is in a shape of a hollow ring. Likewise, the transmissive capacitor device C1, the reflective capacitor device C2 and the auxiliary capacitor device C3 are defined by means of the above-described arrangement. Therefore, even brightness for the transmissive portion and the reflective portion can be obtained by achieving the similar circuitry as shown in **FIG. 3(c)**.

[0052] The reflective electrode 32 mentioned above, for example, can be made of aluminum (Al), silver (Ag) or aluminum-neodymium (Al—Nd) alloy. The transmissive electrode 31 and the auxiliary electrode 33 can be made of indium tin oxide (ITO) or indium zinc oxide (IZO). Each of the upper transparent substrate 301 and the lower transparent substrate 302 is made of glass substrate. The dielectric layer 34 is generally made of an insulating material such as silicon nitride, silicon oxide or a combination thereof.

[0053] In an alternative case that the operation voltage of the transmissive capacitor device C1 is lower than that of the reflective capacitor device C2, the auxiliary capacitor device C3 is electrically connected to the transmissive capacitor device C1 in series, and further to the reflective capacitor device C2, as can be seen in **FIG. 6(a)**.

[0054] The pixel cell of the transfective LCD comprises a data line, a scan line, a transmissive capacitor portion C1 and a reflective capacitor portion C2 disposed between an upper transparent substrate 601 and a lower transparent substrate 602. In addition, a backlight source 600 is disposed under the lower transparent substrate 602 for providing source light for the transmission-related zone. The data line is employed for transmitting a data voltage signal. Via the scan line, the thin film transistor (TFT) M is controlled in either a switching-on or switching-off state. The transmissive capacitor portion C1 comprises of a transmissive electrode 61 electrically connected to the data line, a common electrode 604 above the transmissive electrode 61, and liquid crystal molecules 603 sandwiched between the electrodes.

The reflective capacitor portion C2 comprises the common electrode 604, the liquid crystal layer 603 and a reflective electrode 62. For the purpose of achieving a uniform brightness effect for the transmissive LCD, an auxiliary capacitor device C3 is additionally provided to be electrically connected to the transmissive capacitor device C1 in series, and the serially connected combination is further electrically connected to the reflective capacitor device C2 in parallel.

[0055] In this embodiment, referring to FIG. 6(c), the auxiliary capacitor device C3 is defined by the transmissive electrode 61, an auxiliary electrode 63, and a dielectric layer 64 between the electrodes. The auxiliary electrode 63 is formed on the lower transparent substrate 602 and connected to the reflective electrode 62 via a conducting line X (FIG. 6(a)) so as to have a potential equal to the reflective electrode 62. It is to be noted that the auxiliary electrode 63 is preferably light transmissive so as not to block the transmissive electrode 61 thereabove from the light from the backlight source 600.

[0056] While the invention has been described in terms of what is presently considered to be the most practical and preferred embodiments, it is to be understood that the invention needs not be limited to the disclosed embodiment. On the contrary, it is intended to cover various modifications and similar arrangements included within the spirit and scope of the appended claims which are to be accorded with the broadest interpretation so as to encompass all such modifications and similar structures.

What is claimed is:

1. A liquid crystal display comprising:

- a common electrode;
- a liquid crystal layer comprising a plurality of liquid crystal molecules;
- a data line for transmitting a data voltage signal;
- a transmissive electrode electrically connected to said data line and defining a first capacitor device along with said liquid crystal layer and said common electrode;
- a reflective electrode defining a second capacitor device along with said liquid crystal layer and said common electrode;
- an auxiliary electrode electrically connected to said transmissive electrode; and
- a dielectric layer disposed between said auxiliary electrode and said reflective electrode and defining a third capacitor device along with said auxiliary electrode and said reflective electrode,

wherein said third capacitor device is electrically connected to said second capacitor device in series.

2. The liquid crystal display according to claim 1 wherein said reflective electrode is made of a material selected from a group consisting of aluminum (Al), silver (Ag) and aluminum-neodymium (Al—Nd) alloy, and said transmissive electrode is made of a material selected from a group consisting of indium tin oxide (ITO) and indium zinc oxide (IZO).

3. The liquid crystal display according to claim 2 wherein said auxiliary electrode is made of a material selected from a group consisting of indium tin oxide (ITO) and indium zinc oxide (IZO).

4. The liquid crystal display according to claim 1 wherein said data line is electrically connected to the drain electrode of a thin film transistor and further to said transmissive electrode.

5. The liquid crystal display according to claim 1 wherein said auxiliary electrode is integrally defined with said transmissive electrode.

6. The liquid crystal display according to claim 1 wherein said auxiliary electrode is electrically connected to said transmissive electrode via a conducting line, and disposed at a side of said reflective electrode opposite to said common electrode.

7. The liquid crystal display according to claim 1 wherein said auxiliary electrode is of a shape selected from one of a solid rectangle and a hollow ring.

8. The liquid crystal display according to claim 1 wherein said reflective electrode is disposed over said transmissive electrode, and said auxiliary electrode is imbedded in said transmissive electrode and aligned with said reflective electrode.

9. The liquid crystal display according to claim 1 further comprising a backlight disposed at a side of said transmissive electrode opposite to said liquid crystal layer.

10. The liquid crystal display according to claim 1 further comprising a first transparent substrate disposed above said common electrode.

11. The liquid crystal display according to claim 10 further comprising a second transparent substrate disposed under said transmissive electrode.

12. A liquid crystal display comprising:

- a common electrode;
- a liquid crystal layer comprising a plurality of liquid crystal molecules;
- a data line for transmitting a data voltage signal;
- a transmissive electrode defining a first capacitor device along with said liquid crystal layer and said common electrode;
- a reflective electrode electrically connected to said data line and defining a second capacitor device along with said liquid crystal layer and said common electrode;
- an auxiliary electrode electrically connected to said reflective electrode; and
- a dielectric layer disposed between said auxiliary electrode and said transmissive electrode and defining a third capacitor device along with said auxiliary electrode and said transmissive electrode,

wherein said third capacitor device is electrically connected to said first capacitor device in series.

13. The liquid crystal display according to claim 12 wherein said auxiliary electrode is integrally defined with said reflective electrode.

14. The liquid crystal display according to claim 12 wherein said auxiliary electrode is electrically connected to said reflective electrode via a conducting line, and disposed at a side of said transmissive electrode opposite to said common electrode.

15. The liquid crystal display according to claim 12 wherein said auxiliary electrode is of a shape selected from one of a solid rectangle and a hollow ring.

16. The liquid crystal display according to claim 12 wherein said auxiliary electrode is light transmissive.

17. A liquid crystal display comprising:

a TFT display unit including a transmissive capacitor zone working under a first operation voltage and a reflective capacitor zone working under a second operation voltage;

a scan line for selectively driving said TFT display unit; and

a data line for transmitting a data voltage signal to said driven TFT display unit, said data voltage signal being provided for both of said transmissive and reflective capacitor zones,

wherein said TFT display unit further includes an auxiliary capacitor zone electrically connected to one of said transmissive and reflective capacitor zones, which works under a smaller operation voltage, in series.

18. The liquid crystal display according to claim 17 wherein said transmissive capacitor zone is defined by a common electrode, a transmissive electrode and liquid crystal molecules sandwiched therebetween.

19. The liquid crystal display according to claim 18 wherein said reflective capacitor zone is defined by said common electrode, a reflective electrode and liquid crystal molecules sandwiched therebetween.

20. The liquid crystal display according to claim 19 wherein said first operation voltage is higher than said second operation voltage, and said auxiliary capacitor zone is defined by an auxiliary electrode, said reflective electrode and a dielectric layer sandwiched therebetween.

21. The liquid crystal display according to claim 20 wherein said auxiliary electrode is integrally defined with said transmissive electrode.

22. The liquid crystal display according to claim 20 wherein said auxiliary electrode is electrically connected to said transmissive electrode via a conducting line, and disposed at a side of said reflective electrode opposite to said common electrode.

23. The liquid crystal display according to claim 20 wherein said reflective electrode is disposed over said transmissive electrode, and said auxiliary electrode is imbedded in said transmissive electrode and aligned with said reflective electrode.

24. The liquid crystal display according to claim 17 wherein said auxiliary capacitor zone and said one of said transmissive and reflective capacitor zones serially connected to each other are further electrically connected to the other of said transmissive and reflective capacitor zones in parallel.

* * * * *

专利名称(译)	透反液晶显示器		
公开(公告)号	US20040085498A1	公开(公告)日	2004-05-06
申请号	US10/462496	申请日	2003-06-16
[标]申请(专利权)人(译)	常伟智		
申请(专利权)人(译)	伟昌志		
当前申请(专利权)人(译)	伟昌志		
[标]发明人	CHANG WEI CHIH		
发明人	CHANG, WEI-CHIH		
IPC分类号	G02F1/1335 G02F1/1343 G02F1/1362		
CPC分类号	G02F1/136213 G02F1/133555		
优先权	091132623 2002-11-05 TW		
其他公开文献	US7209191		
外部链接	Espacenet USPTO		

摘要(译)

提供一种液晶显示器。液晶显示器包括公共电极，液晶层，数据线，透射电极，反射电极，辅助电极和介电层。透射电极电连接到数据线，并且与液晶层和公共电极一起限定第一电容器装置。反射电极与液晶层和公共电极一起限定第二电容器装置。辅助电极与透射电极电连接。介电层设置在辅助电极和反射电极之间，并且与辅助电极和反射电极一起限定第三电容器装置。第三电容器装置串联电连接到第二电容器装置。

