



US 20110248978A1

(19) **United States**(12) **Patent Application Publication**
KOYAMA et al.(10) **Pub. No.: US 2011/0248978 A1**(43) **Pub. Date: Oct. 13, 2011**(54) **LIQUID CRYSTAL DISPLAY DEVICE AND
METHOD FOR DRIVING THE SAME****Publication Classification**(75) Inventors: **Jun KOYAMA**, Sagamihara (JP);
Hiroyuki MIYAKE, Atsugi (JP);
Shunpei YAMAZAKI, Setagaya
(JP)(51) **Int. Cl.**
G09G 3/36 (2006.01)
G06F 3/038 (2006.01)(73) Assignee: **SEMICONDUCTOR ENERGY
LABORATORY CO., LTD.**,
Atsugi (JP)(52) **U.S. Cl. 345/211; 345/94**(21) Appl. No.: **13/078,206**(22) Filed: **Apr. 1, 2011**(30) **Foreign Application Priority Data**Apr. 9, 2010 (JP) 2010-090935
May 18, 2010 (JP) 2010-114435(57) **ABSTRACT**

To increase the frequency of input of image signals in terms of design in a field-sequential liquid crystal display device. Image signals are concurrently supplied to pixels provided in a plurality of rows among pixels arranged in matrix in a pixel portion of the liquid crystal display device. Thus, the frequency of input of an image signal to each pixel can be increased without change in response speed of a transistor or the like included in the liquid crystal display device.

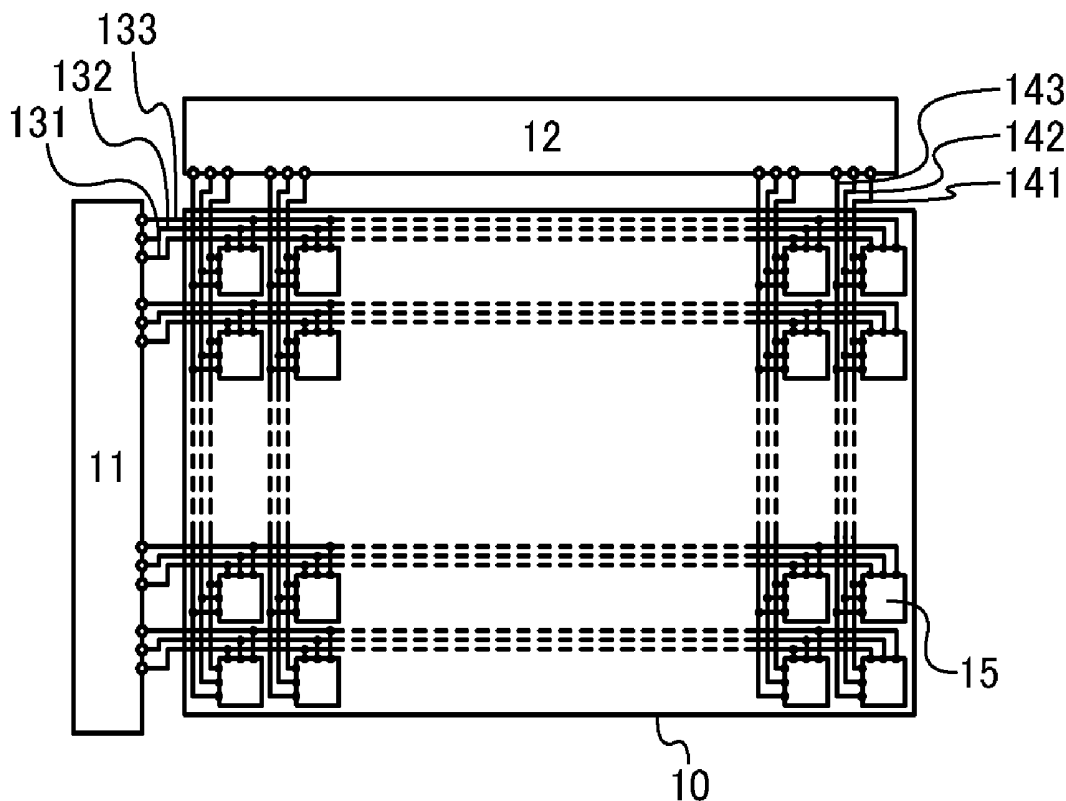


FIG. 1A

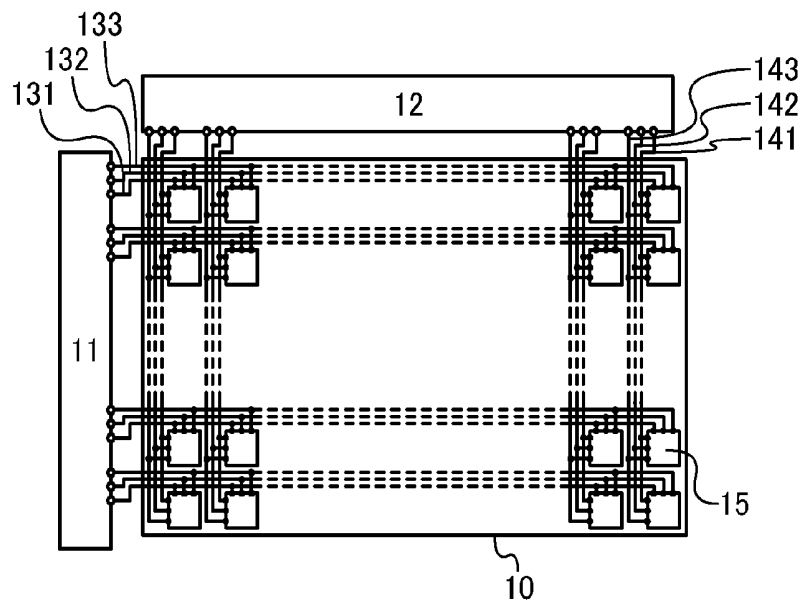


FIG. 1B

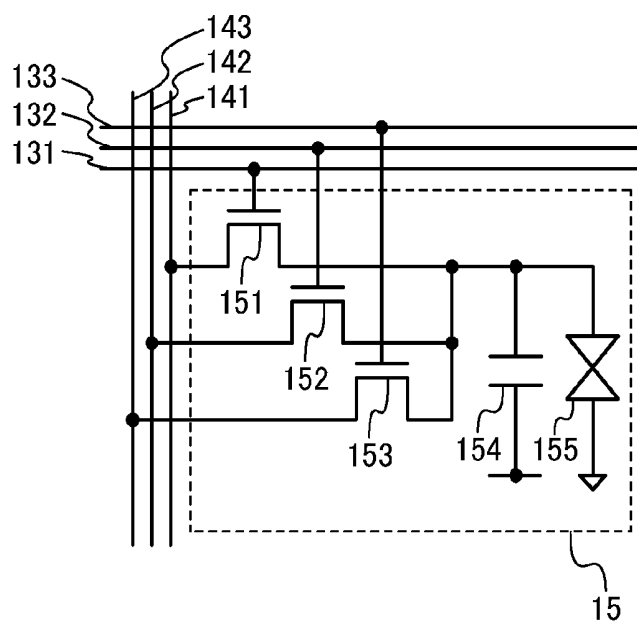


FIG. 2

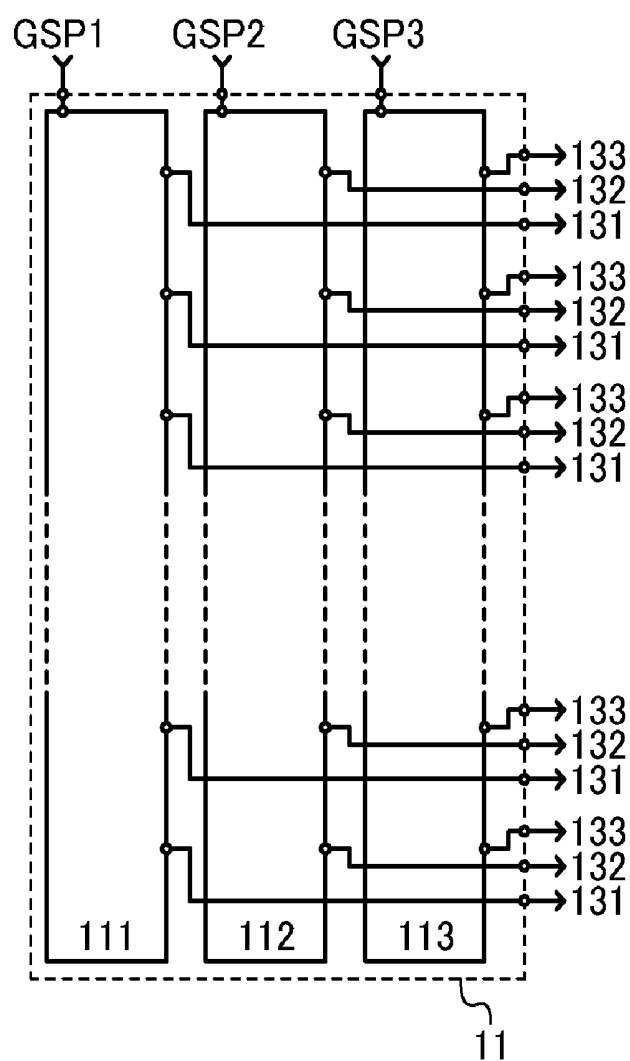


FIG. 3

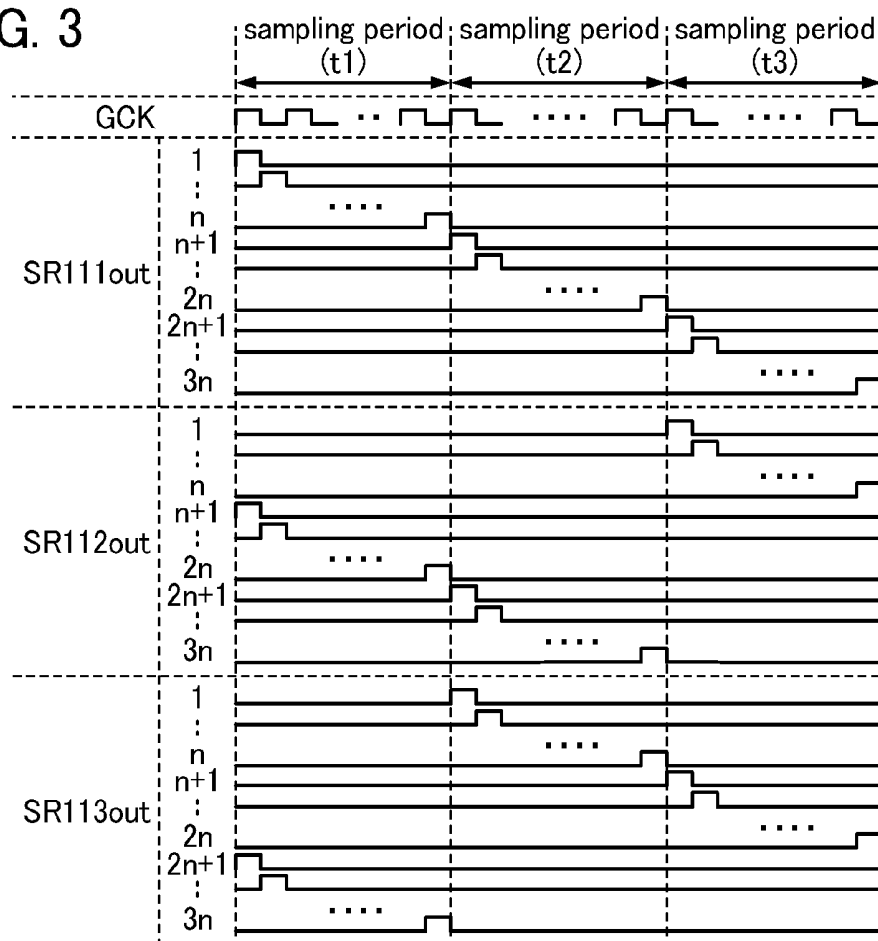


FIG. 4A

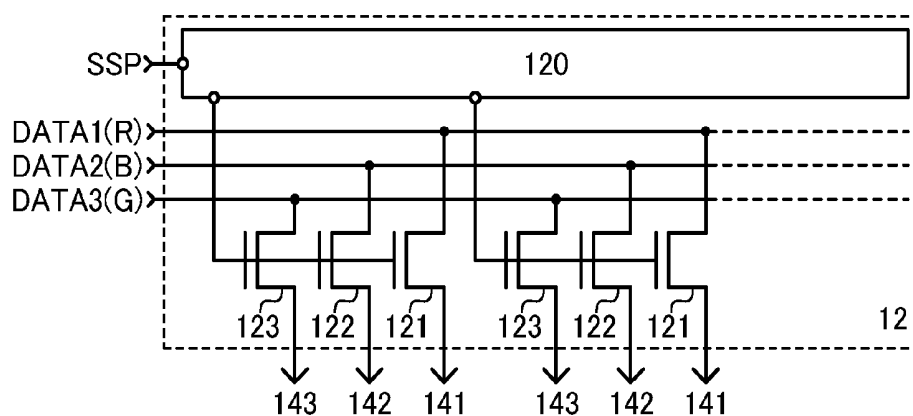


FIG. 4B

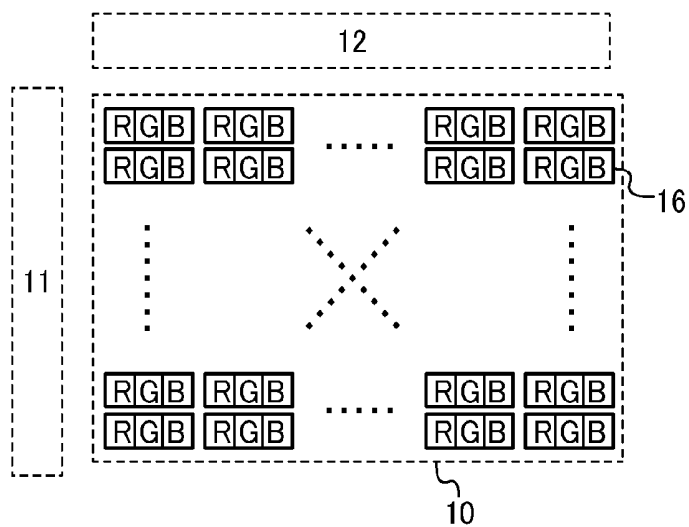


FIG. 6A

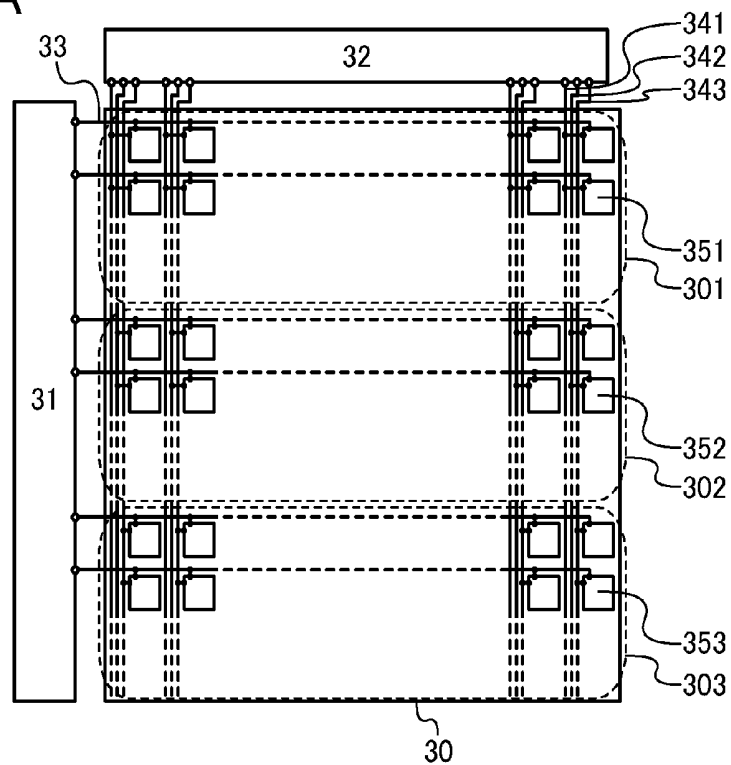


FIG. 6B

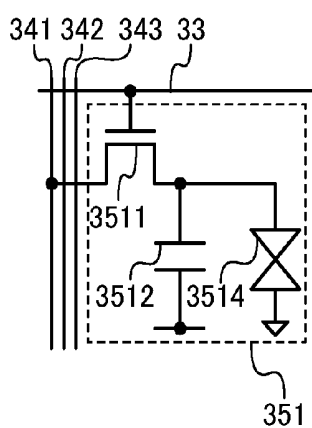


FIG. 6C

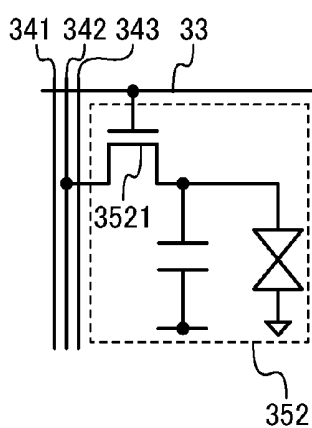


FIG. 6D

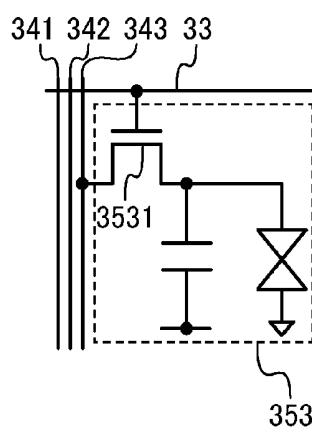


FIG. 7A

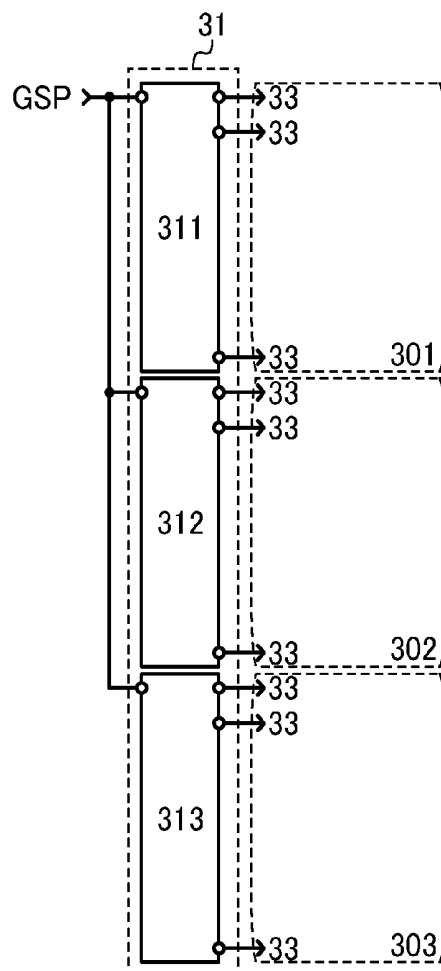


FIG. 7B

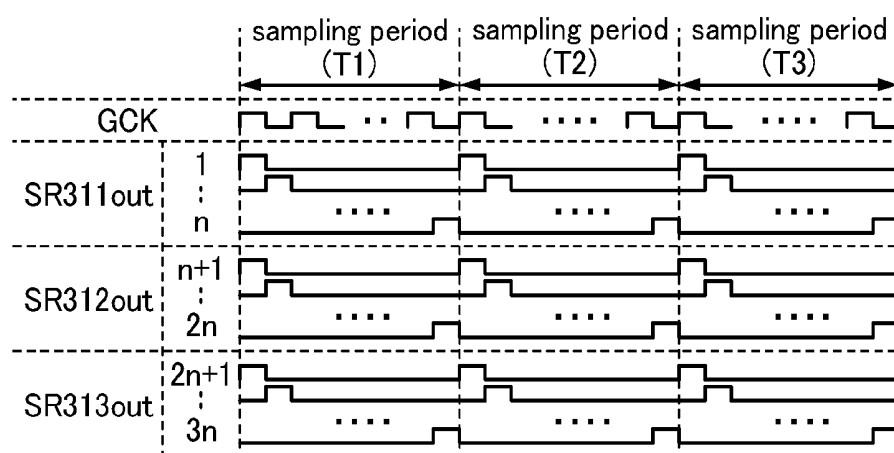


FIG. 8

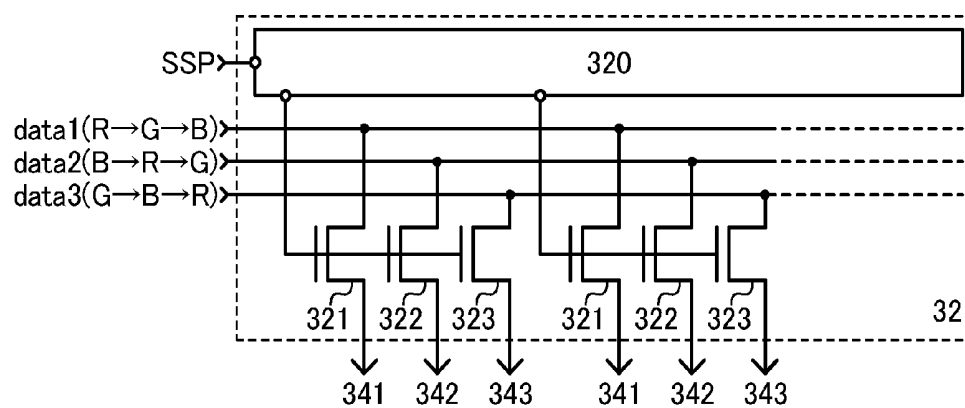


FIG. 9

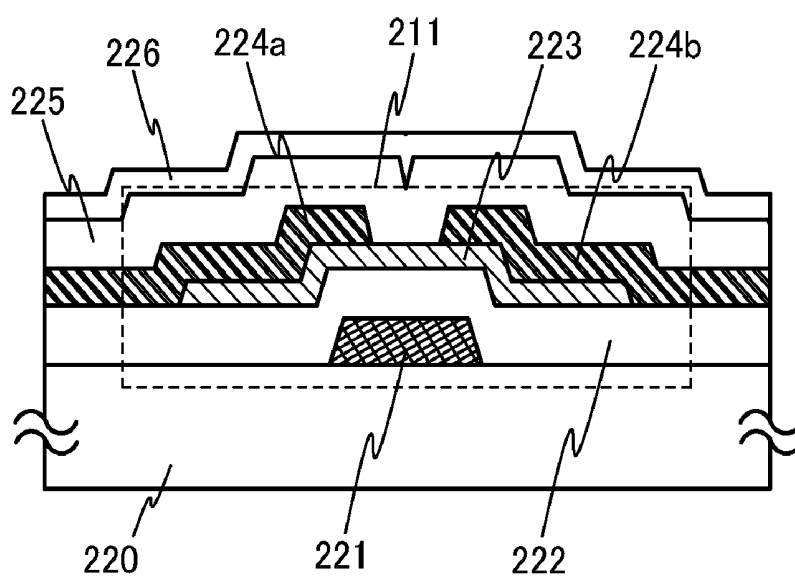


FIG. 10

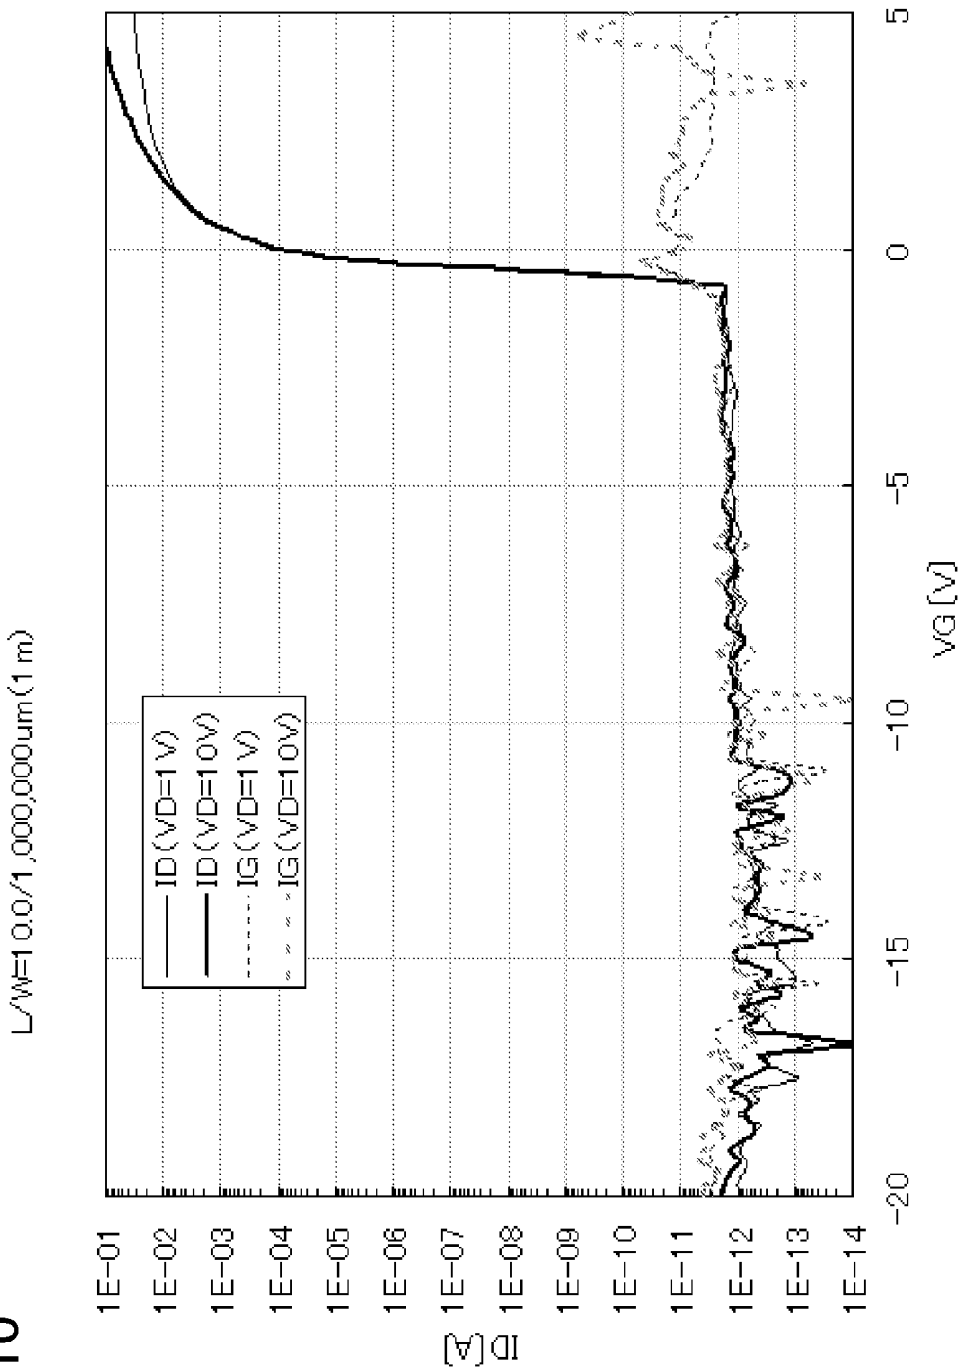


FIG. 11

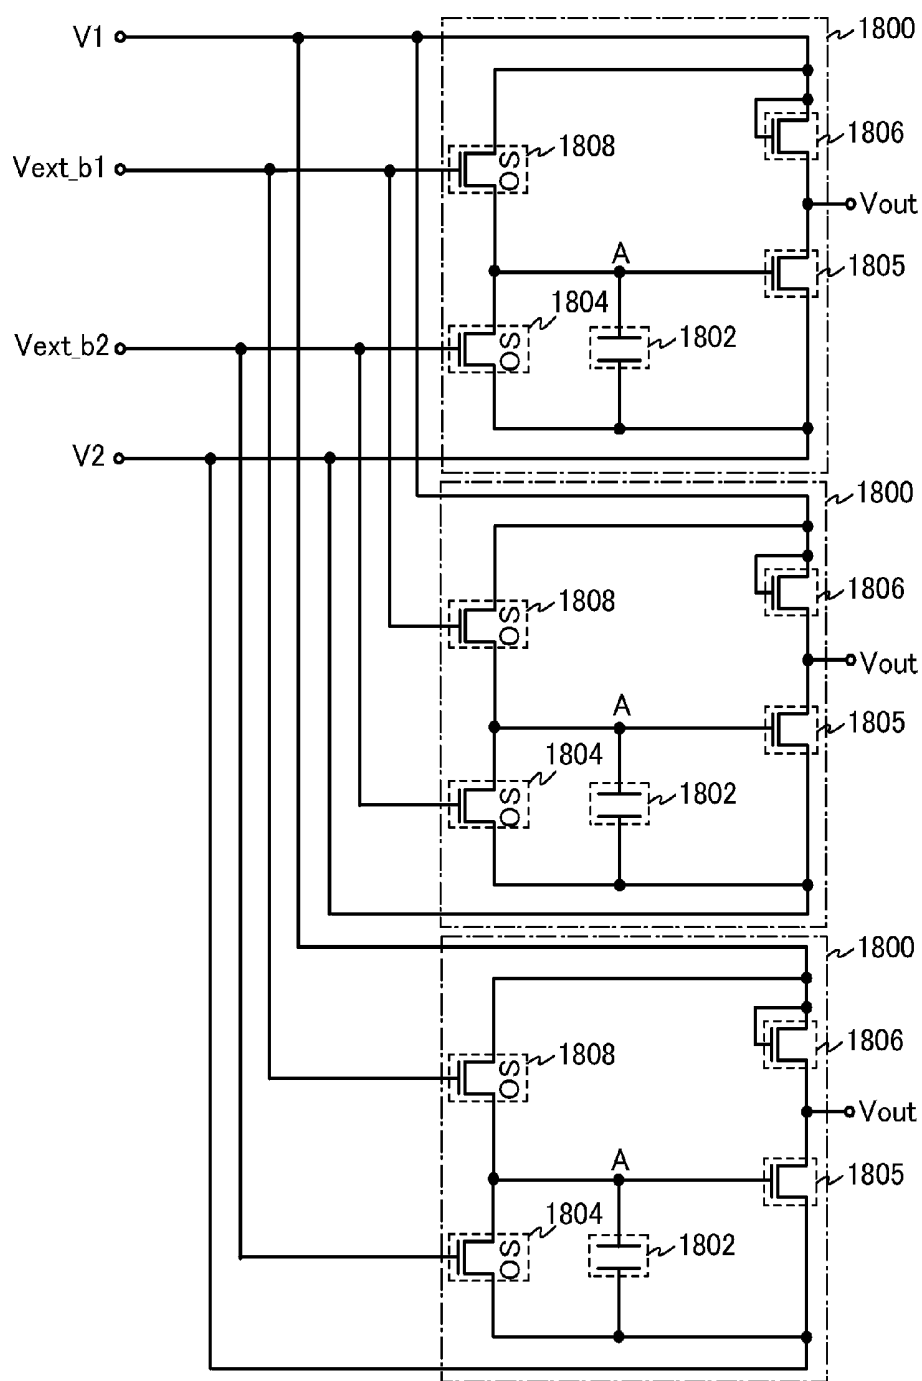
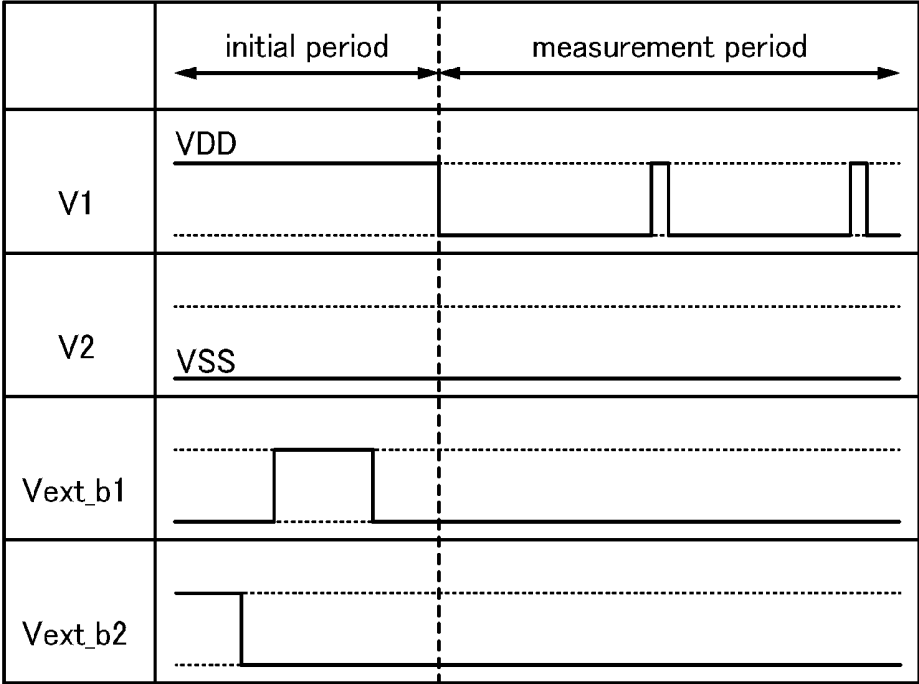
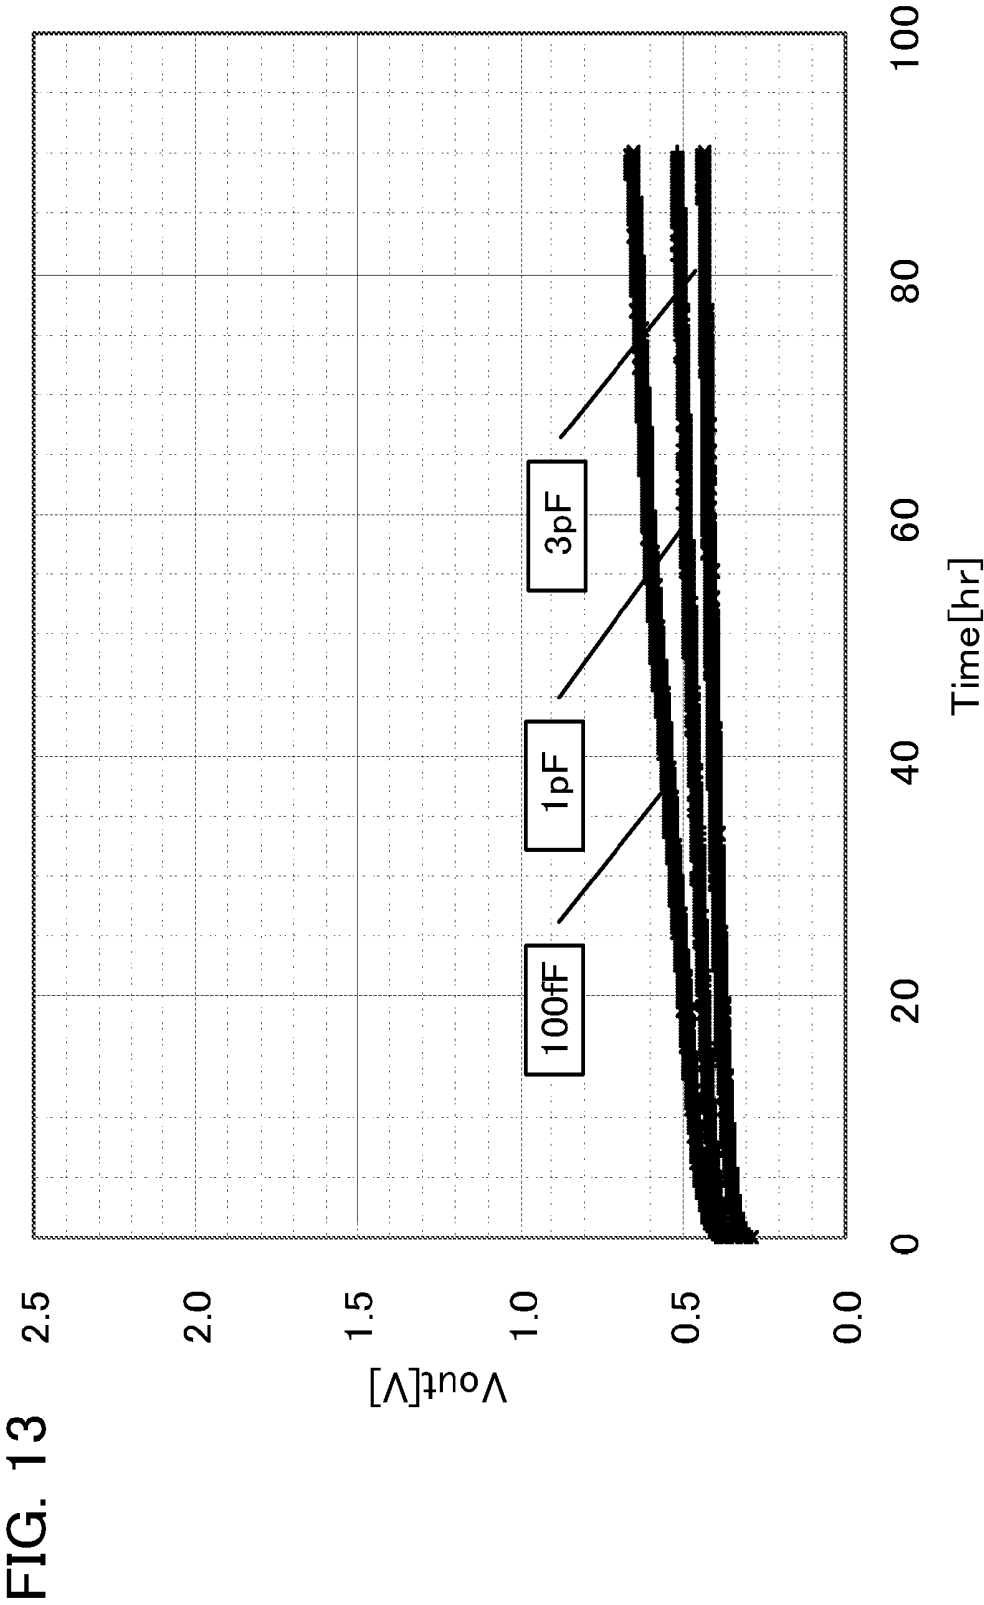


FIG. 12





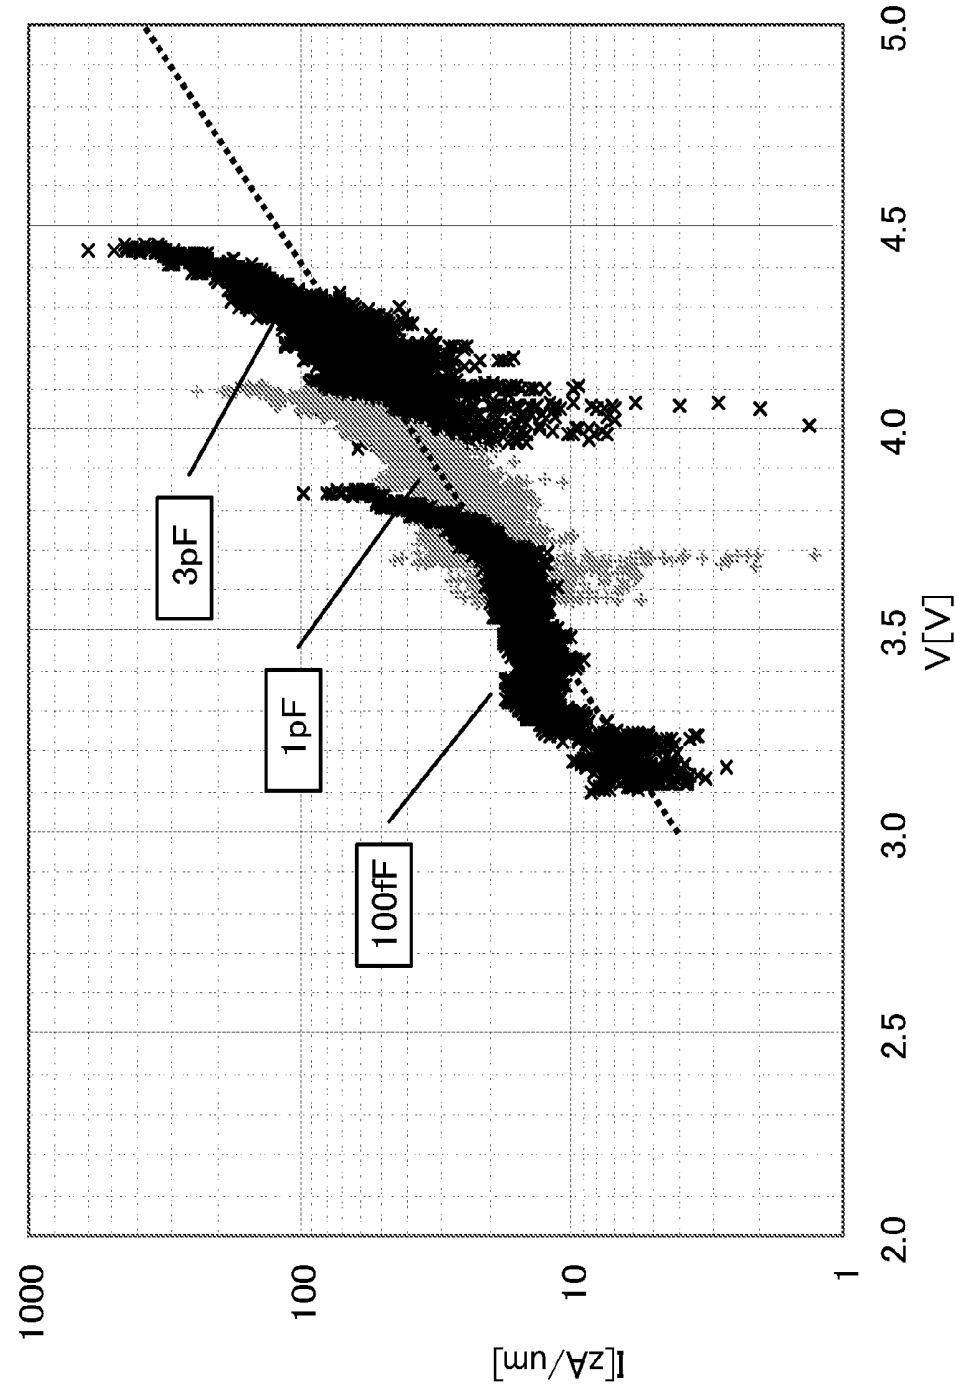


FIG. 14

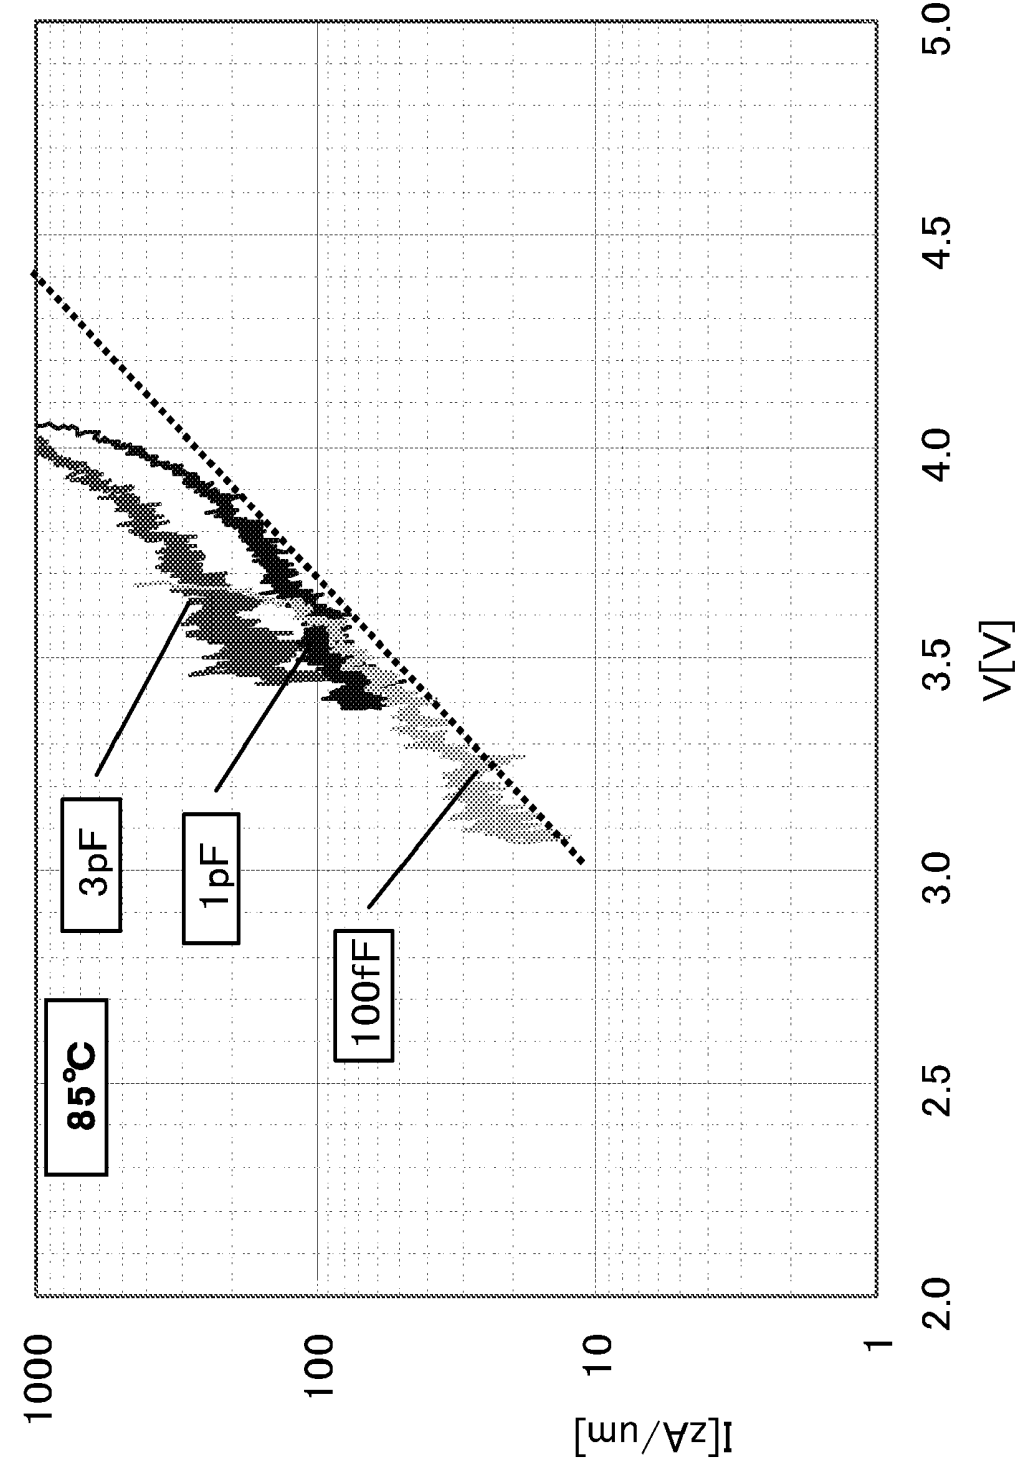


FIG. 15

FIG. 16A

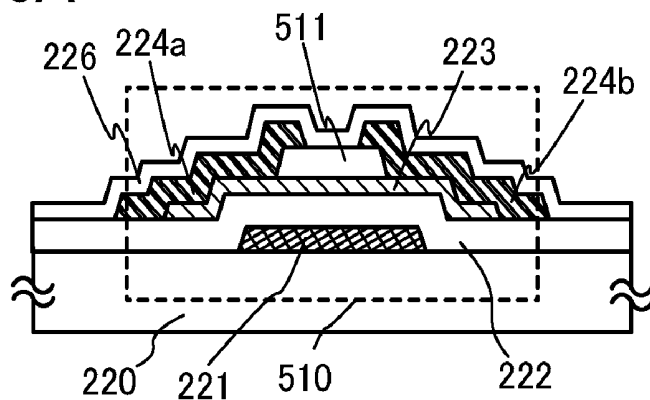


FIG. 16B

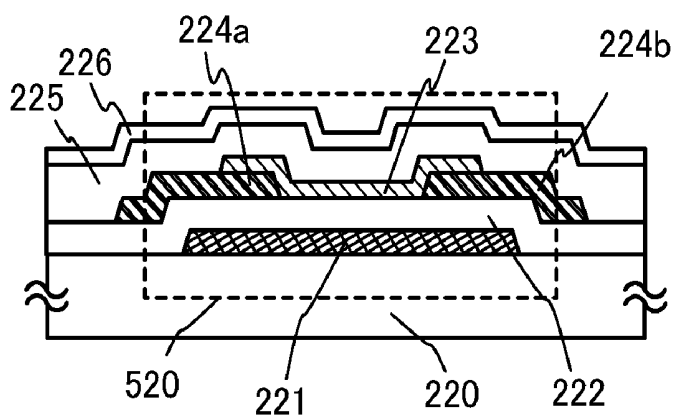


FIG. 16C

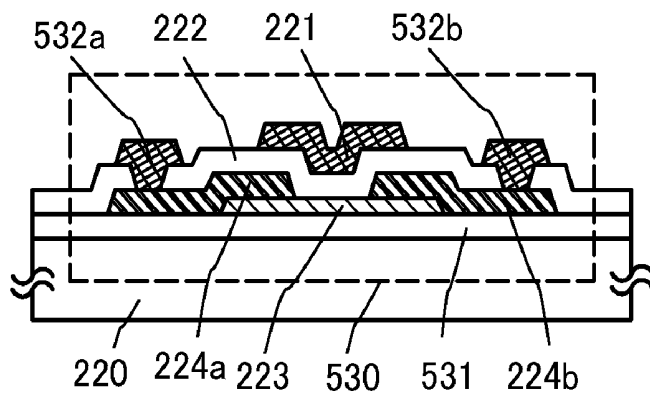


FIG. 17

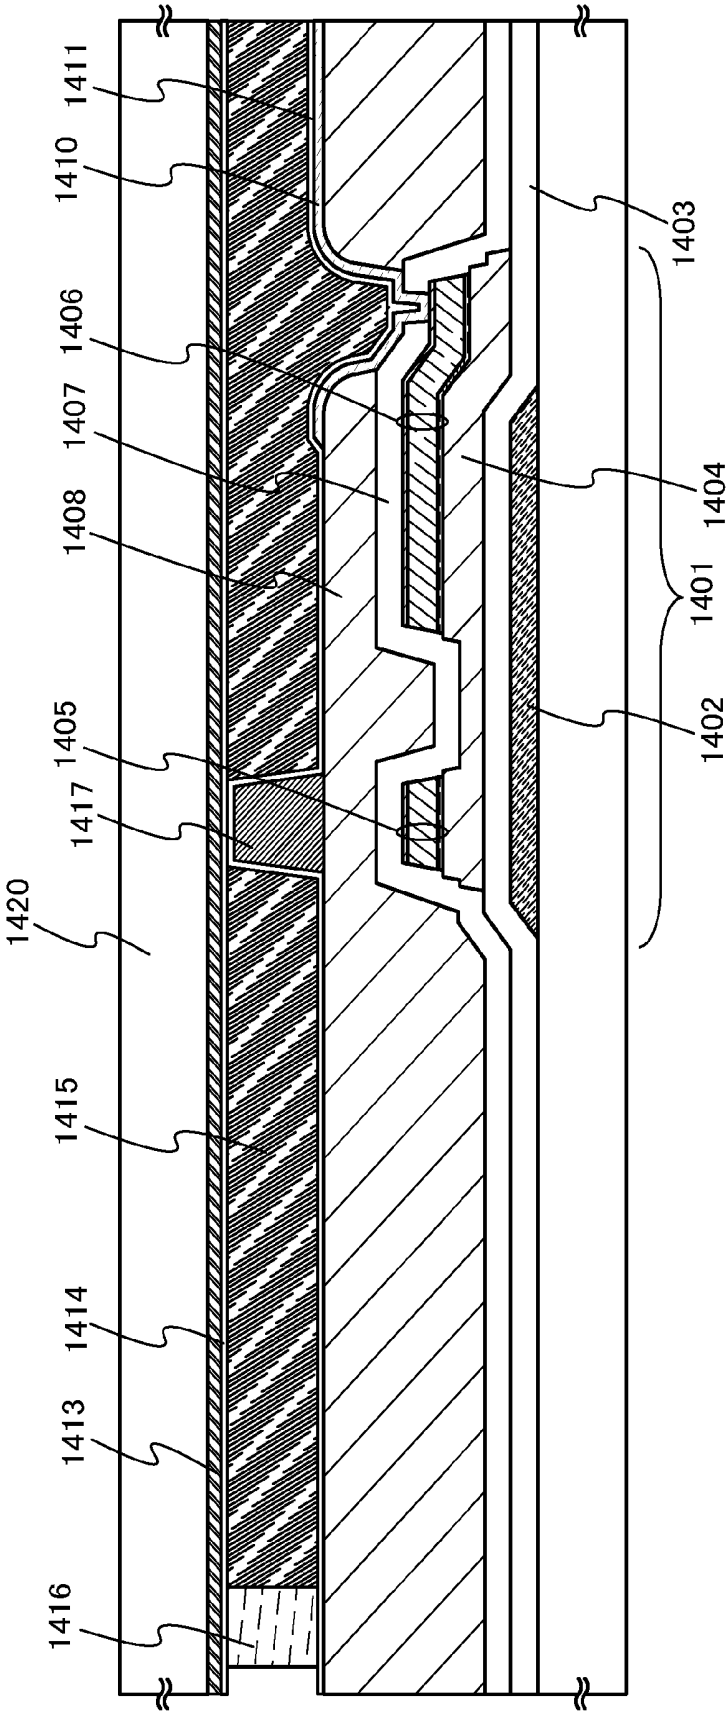


FIG. 18A

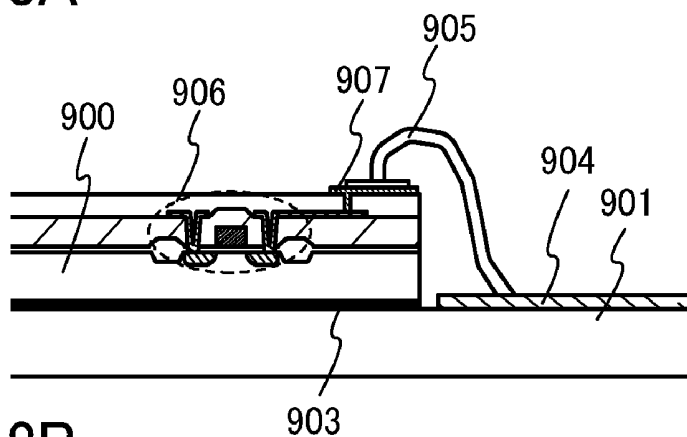


FIG. 18B

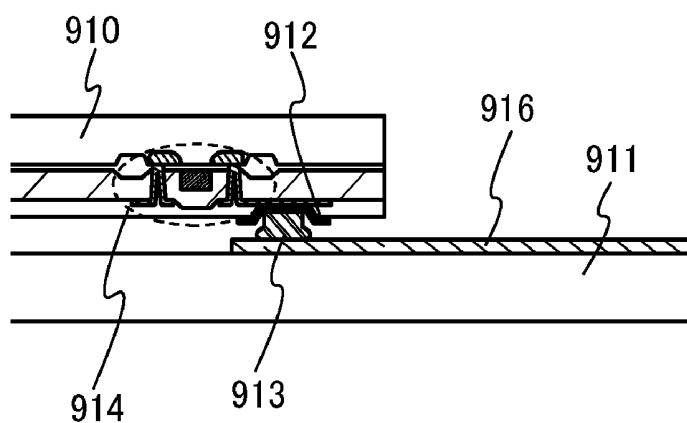


FIG. 18C

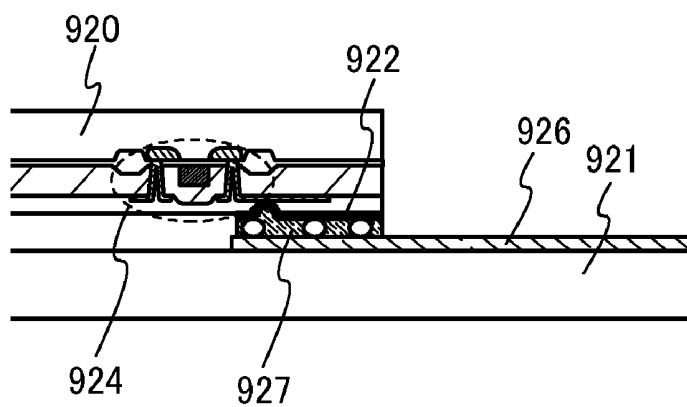


FIG. 19A

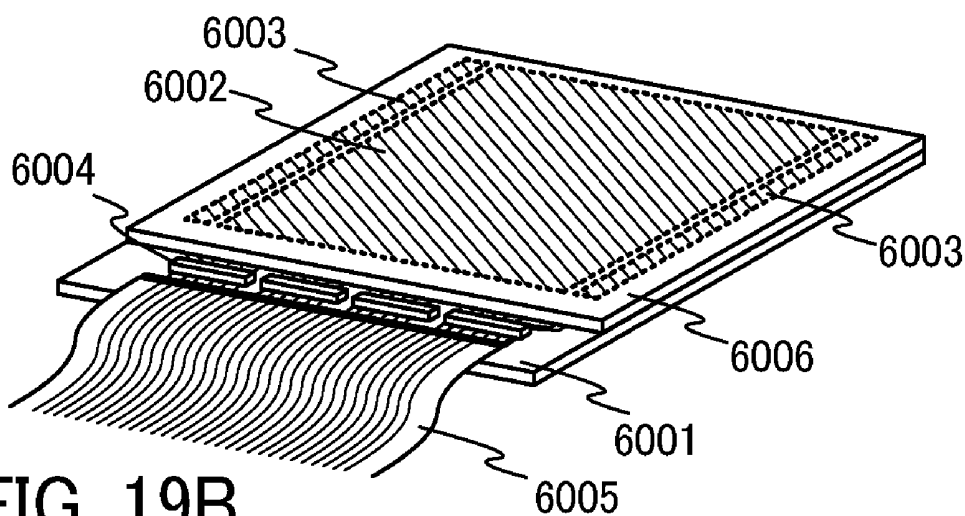


FIG. 19B

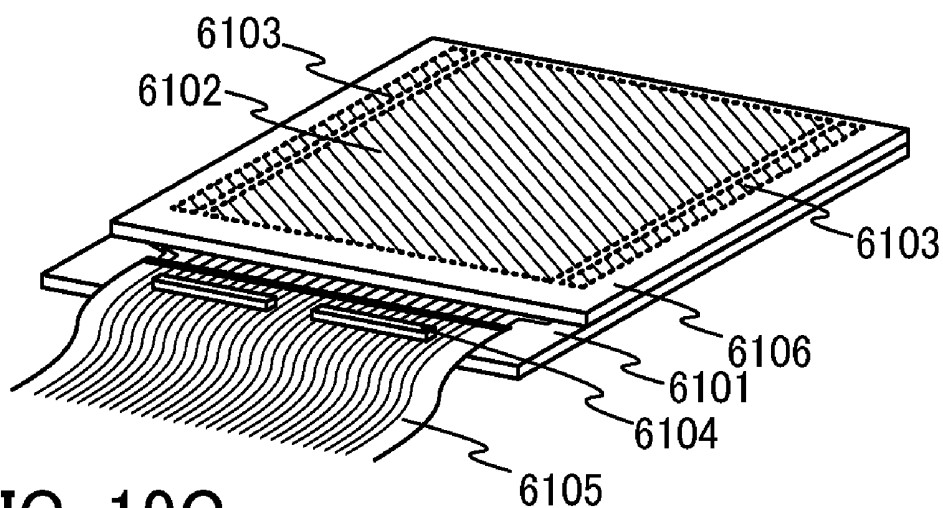


FIG. 19C

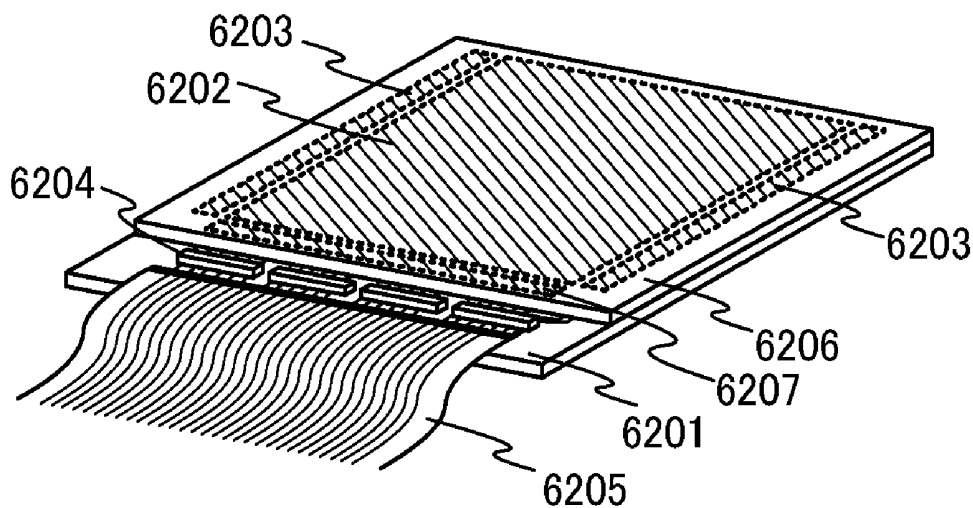


FIG. 20A

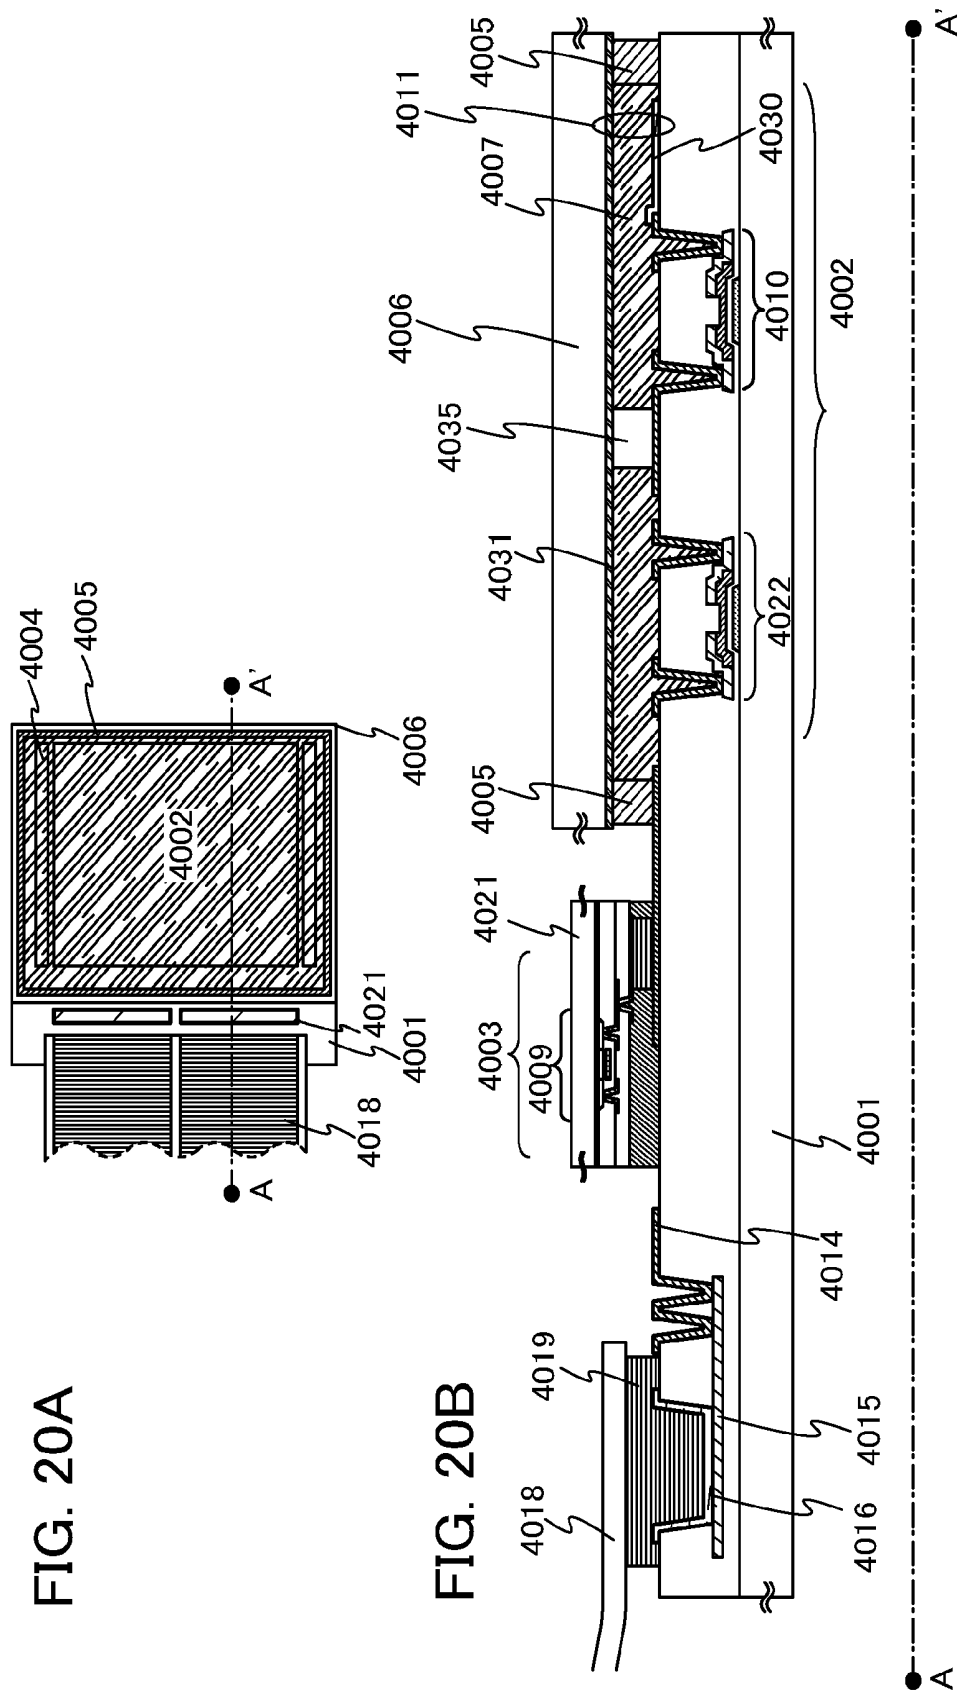
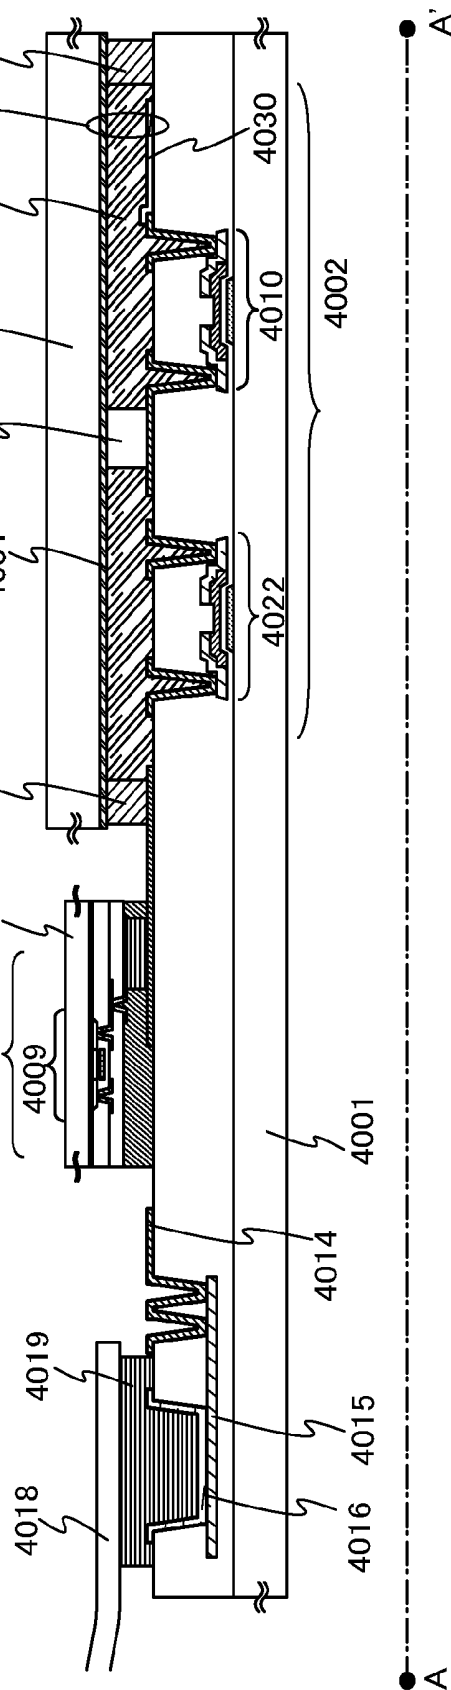


FIG. 20B



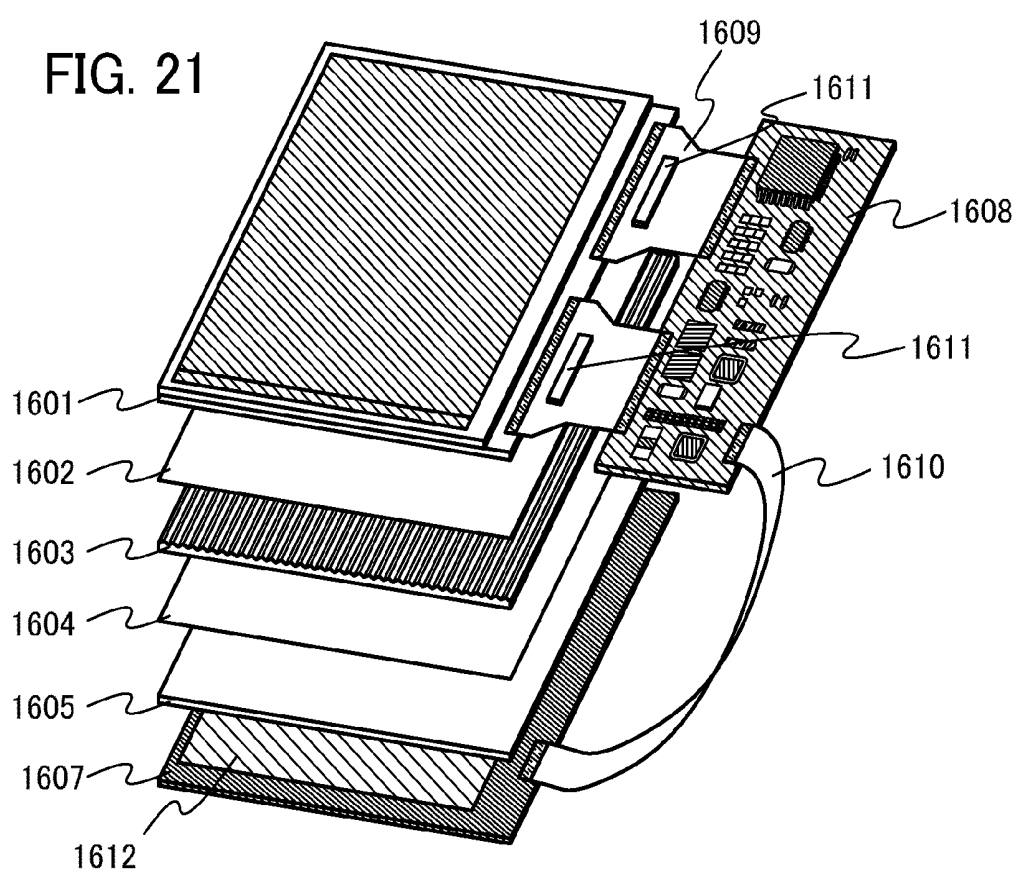


FIG. 22A

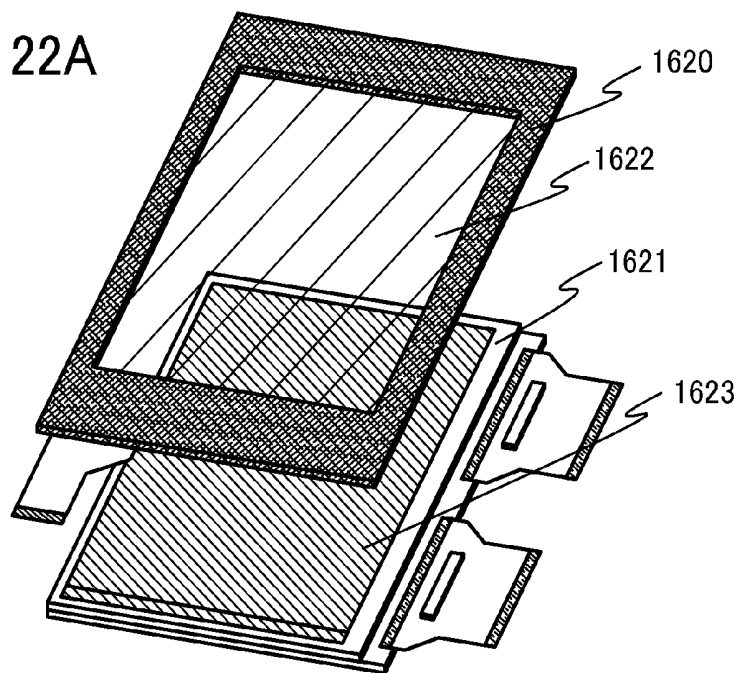


FIG. 22B

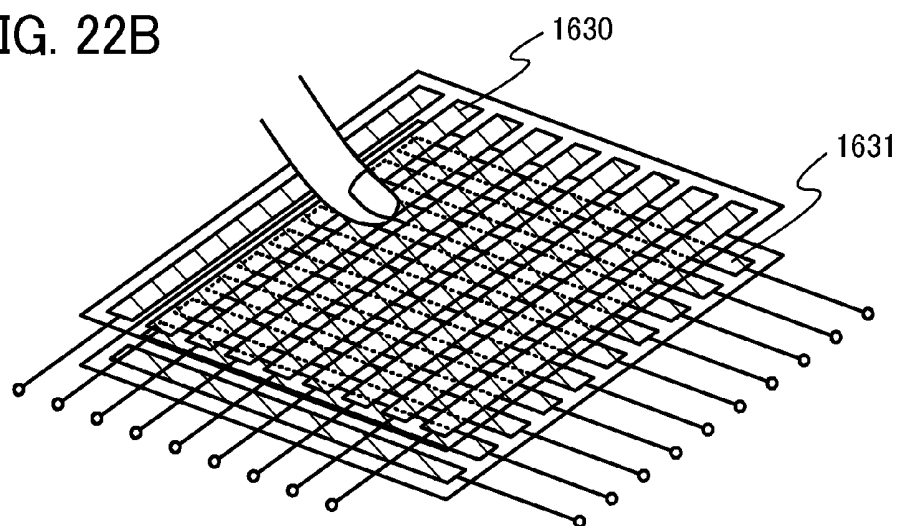


FIG. 23A

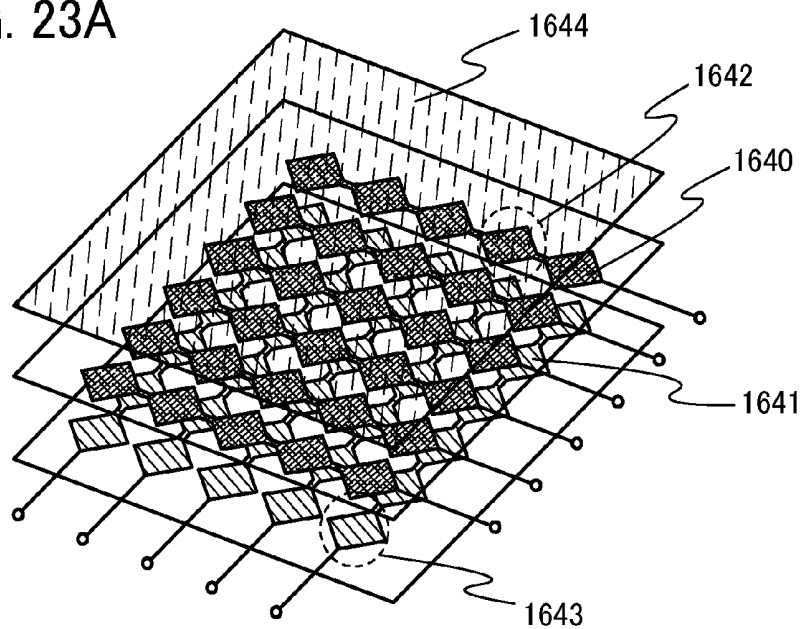
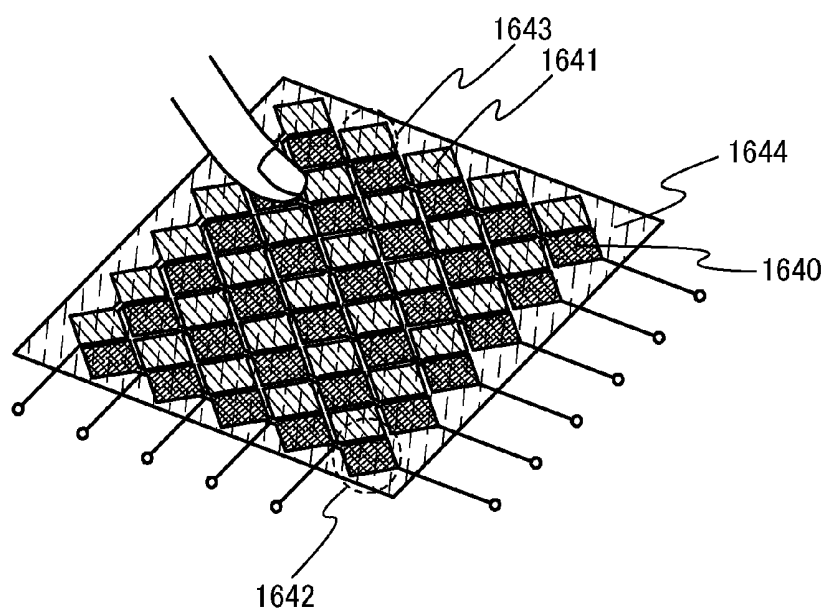


FIG. 23B



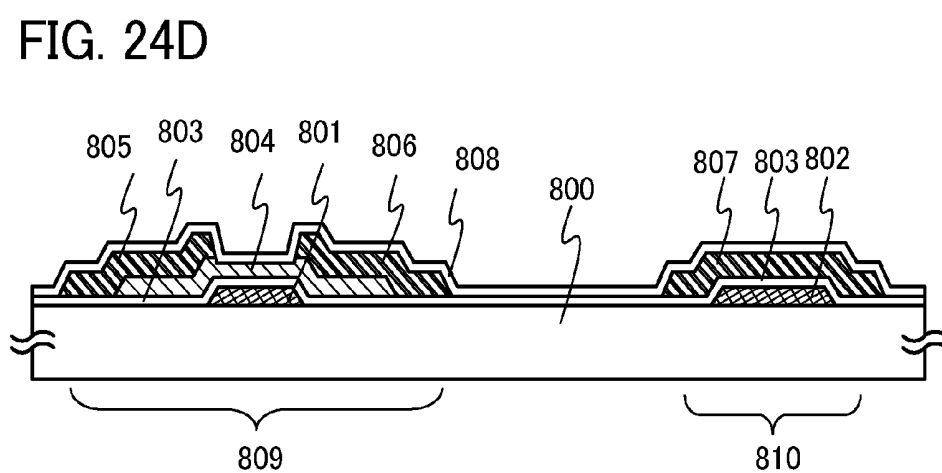
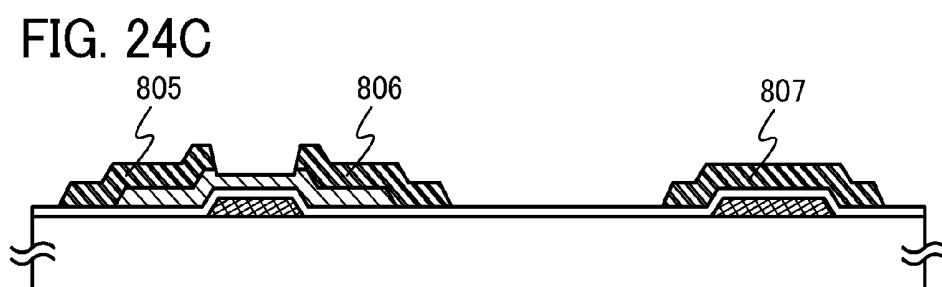
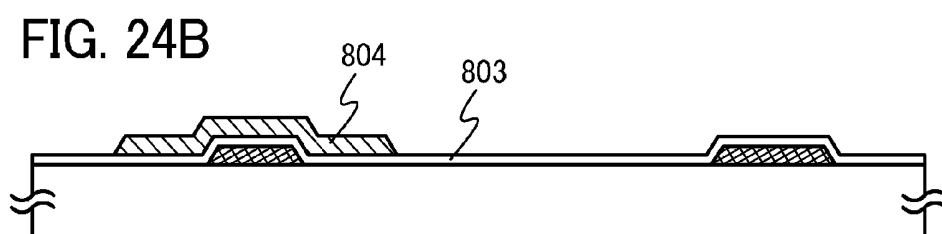
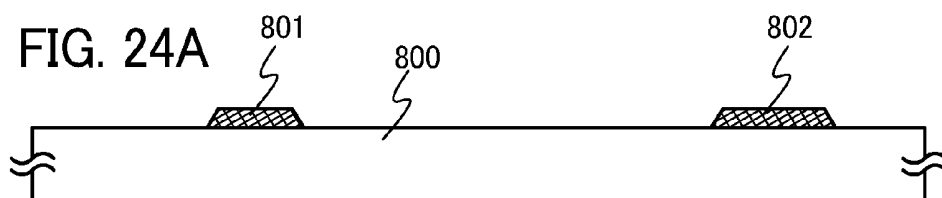


FIG. 25A

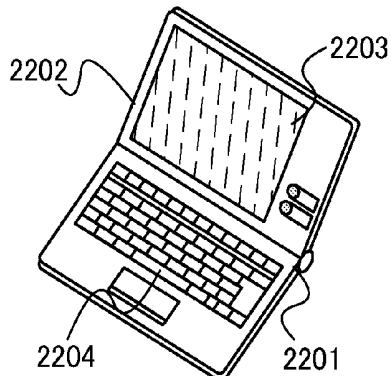


FIG. 25B

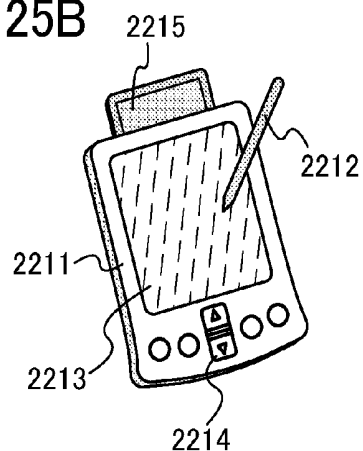


FIG. 25C

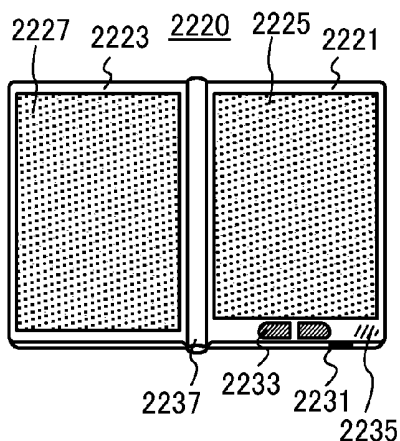


FIG. 25D

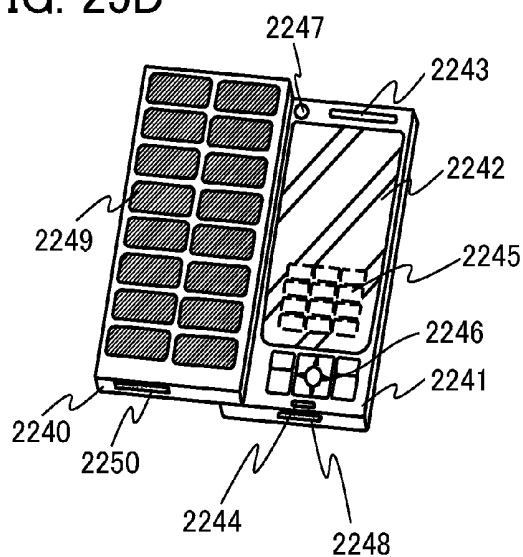


FIG. 25E


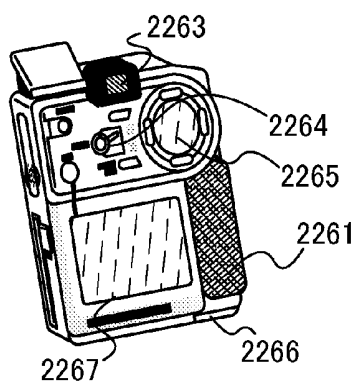


FIG. 25F

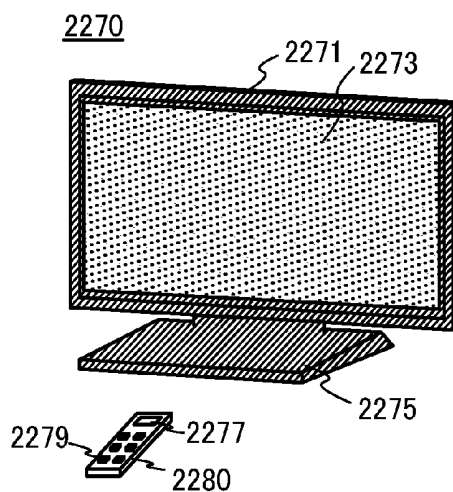

LIQUID CRYSTAL DISPLAY DEVICE AND METHOD FOR DRIVING THE SAME

TECHNICAL FIELD

[0001] The present invention relates to a liquid crystal display device and a method for driving the liquid crystal display device. In particular, the present invention relates to a liquid crystal display device in which images are displayed by a field sequential method, and a method for driving the liquid crystal display device.

BACKGROUND ART

[0002] A color filter method and a field sequential method are known as display methods for liquid crystal display devices. In a liquid crystal display device in which images are displayed by a color filter method, a plurality of subpixels each having a color filter that transmits only light with a wavelength of a given color (e.g., red (R), green (G), or blue (B)) are provided in each pixel. A desired color is produced in such a manner that transmission of white light is controlled in each subpixel and a plurality of colors are mixed in each pixel. On the other hand, in a liquid crystal display device in which images are displayed by a field sequential method, a plurality of light sources that emit lights of different colors (e.g., red (R), green (G), and blue (B)) are provided. A desired color is produced in such a manner that the plurality of light sources sequentially emit light and transmission of light of each color is controlled in each pixel. In other words, a desired color is produced by dividing the area of one pixel between lights of given colors in a color filter method, whereas a desired color is produced by dividing a display period between lights of given colors in a field sequential method.

[0003] The field-sequential liquid crystal display device has the following advantages over the color-filter liquid crystal display device. First, in the field-sequential liquid crystal display device, it is not necessary to provide subpixels in a pixel. Thus, the aperture ratio or the number of pixels can be increased. In addition, in the field-sequential liquid crystal display device, it is not necessary to provide a color filter. That is, loss of light due to light absorption in the color filter does not occur. For that reason, the transmittance can be increased and power consumption can be reduced.

[0004] Patent Document 1 discloses a field-sequential liquid crystal display device. Specifically, Patent Document 1 discloses a liquid crystal display device that includes pixels each including a transistor for controlling input of an image signal, a signal storage capacitor for holding the image signal, and a transistor for controlling transfer of electric charge from the signal storage capacitor to a display pixel capacitor. In the liquid crystal display device having this structure, writing of an image signal to the signal storage capacitor and display corresponding to electric charge held at the display pixel capacitor can be performed concurrently.

REFERENCE

[0005] Patent Document 1: Japanese Published Patent Application No. 2009-042405

DISCLOSURE OF INVENTION

[0006] In a field-sequential liquid crystal display device, the frequency of input of an image signal to each pixel needs to be increased. For example, in the case where images are displayed by a field sequential method in a liquid crystal

display device including three kinds of light sources each emitting one of red (R) light, green (G) light, and blue (B) light, the frequency of input of an image signal to each pixel needs to be at least three times that of a color-filter liquid crystal display device. Specifically, in the case where the frame frequency is 60 Hz, an image signal needs to be input to each pixel 60 times per second in the color-filter liquid crystal display device; whereas an image signal needs to be input to each pixel 180 times per second in the case where images are displayed by a field sequential method in the liquid crystal display device including the three kinds of light sources.

[0007] Note that high-speed response of an element included in each pixel is required, accompanied by the increase in the input frequency of image signals. Specifically, the increase in mobility of a transistor provided in each pixel is required, for example. However, it is not easy to improve characteristics of the transistor or the like.

[0008] In view of the above, an object of one embodiment of the present invention is to increase the frequency of input of image signals.

[0009] The object can be achieved in such a manner that image signals are concurrently supplied to pixels provided in a plurality of rows among pixels arranged in matrix in a pixel portion of a liquid crystal display device.

[0010] In other words, one embodiment of the present invention is a liquid crystal display device which includes a first signal line, a second signal line, a third signal line, a first pixel, a second pixel, and a third pixel. The first pixel comprises a first transistor, a second transistor, a third transistor, and a first liquid crystal element. A gate of the first transistor is electrically connected to a first scan line, and one of a source and a drain of the first transistor is electrically connected to the first signal line. A gate of the second transistor is electrically connected to a second scan line, and one of a source and a drain of the second transistor is electrically connected to the second signal line. A gate of the third transistor is electrically connected to a third scan line, and one of a source and a drain of the third transistor is electrically connected to the third signal line. One of electrodes of the first liquid crystal element is electrically connected to the other of the source and the drain of the first transistor, the other of the source and the drain of the second transistor, and the other of the source and the drain of the third transistor. The second pixel comprises a fourth transistor, a fifth transistor, a sixth transistor, and a second liquid crystal element. A gate of the fourth transistor is electrically connected to a fourth scan line, and one of a source and a drain of the fourth transistor is electrically connected to the first signal line. A gate of the fifth transistor is electrically connected to a fifth scan line, and one of a source and a drain of the fifth transistor is electrically connected to the second signal line. A gate of the sixth transistor is electrically connected to a sixth scan line, and one of a source and a drain of the sixth transistor is electrically connected to the third signal line. One of electrodes of the second liquid crystal element is electrically connected to the other of the source and the drain of the fourth transistor, the other of the source and the drain of the fifth transistor, and the other of the source and the drain of the sixth transistor. The third pixel comprises a seventh transistor, an eighth transistor, a ninth transistor, and a third liquid crystal element. A gate of the seventh transistor is electrically connected to a seventh scan line, and one of a source and a drain of the seventh transistor is electrically connected to the first signal line. A gate of the eighth transistor is electrically connected to an

eighth scan line, and one of a source and a drain of the eighth transistor is electrically connected to the second signal line. A gate of the ninth transistor is electrically connected to a ninth scan line, and one of a source and a drain of the ninth transistor is electrically connected to the third signal line. One of electrodes of the third liquid crystal element is electrically connected to the other of the source and the drain of the seventh transistor, the other of the source and the drain of the eighth transistor, and the other of the source and the drain of the ninth transistor. Further, from the first signal line, a first image signal is supplied in a first horizontal scan period included in a first sampling period, a second image signal is supplied in a first horizontal scan period included in a second sampling period, and a third image signal is supplied in a first horizontal scan period included in a third sampling period. From the second signal line, a fourth image signal is supplied in the first horizontal scan period included in the first sampling period, a fifth image signal is supplied in the first horizontal scan period included in the second sampling period, and a sixth image signal is supplied in the first horizontal scan period included in the third sampling period. From the third signal line, a seventh image signal is supplied in the first horizontal scan period included in the first sampling period, an eighth image signal is supplied in the first horizontal scan period included in the second sampling period, and a ninth image signal is supplied in the first horizontal scan period included in the third sampling period. Additionally, in the first horizontal scan period included in the first sampling period, a selection signal is supplied to the first scan line, the fifth scan line, and the ninth scan line, and a non-selection signal is supplied to the second scan line, the third scan line, the fourth scan line, the sixth scan line, the seventh scan line, and the eighth scan line. In the first horizontal scan period included in the second sampling period, a selection signal is supplied to the third scan line, the fourth scan line, and the eighth scan line, and a non-selection signal is supplied to the first scan line, the second scan line, the fifth scan line, the sixth scan line, the seventh scan line, and the ninth scan line. In the first horizontal scan period included in the third sampling period, a selection signal is supplied to the second scan line, the sixth scan line, and the seventh scan line, and a non-selection signal is supplied to the first scan line, the third scan line, the fourth scan line, the fifth scan line, the eighth scan line, and the ninth scan line. Note that the first scan line, the fourth scan line, and the seventh scan line are electrically connected to a first shift register, and the selection signal and the non-selection signal are supplied from the first shift register. The second scan line, the fifth scan line, and the eighth scan line are electrically connected to a second shift register, and the selection signal and the non-selection signal are supplied from the second shift register. The third scan line, the sixth scan line, and the ninth scan line are electrically connected to a third shift register, and the selection signal and the non-selection signal are supplied from the third shift register.

[0011] According to one embodiment of the present invention, a liquid crystal display device includes a first signal line supplied with a first image signal in a first horizontal scan period in a first sampling period, and supplied with a second image signal in a second horizontal scan period in a second sampling period; a second signal line supplied with a third image signal in the first horizontal scan period, and supplied with a fourth image signal in the second horizontal scan period; a first scan line and a second scan line supplied with a selection signal in the first horizontal scan period, and sup-

plied with a non-selection signal in the second horizontal scan period; a third scan line and a fourth scan line supplied with a non-selection signal in the first horizontal scan period, and supplied with a selection signal in the second horizontal scan period; a first pixel electrically connected to the first signal line, the second signal line, the first scan line, and the third scan line, supplied with the first image signal in the first horizontal scan period, and supplied with the fourth image signal in the second horizontal scan period; a second pixel electrically connected to the first signal line, the second signal line, the second scan line, and the fourth scan line, supplied with the third image signal in the first horizontal scan period, and supplied with the second image signal in the second horizontal scan period; a first shift register configured to supply the selection signal to the first scan line in the first horizontal scan period and supply the selection signal to the fourth scan line in the second horizontal scan period; and a second shift register configured to supply the selection signal to the second scan line in the first horizontal scan period and supply the selection signal to the third scan line in the second horizontal scan period.

[0012] According to another embodiment of the present invention, a liquid crystal display device includes a first signal line supplied with a first image signal in a first horizontal scan period in a first sampling period, and supplied with a second image signal in a second horizontal scan period in a second sampling period; a second signal line supplied with a third image signal in the first horizontal scan period, and supplied with a fourth image signal in the second horizontal scan period; a first scan line and a second scan line supplied with a selection signal in the first horizontal scan period and the second horizontal scan period; a first pixel electrically connected to the first signal line and the first scan line, supplied with the first image signal in the first horizontal scan period, and supplied with the second image signal in the second horizontal scan period; a second pixel electrically connected to the second signal line and the second scan line, supplied with the third image signal in the first horizontal scan period, and supplied with the fourth image signal in the second horizontal scan period; a first shift register configured to supply the selection signal to the first scan line in the first horizontal scan period and the second horizontal scan period; and a second shift register configured to supply the selection signal to the second scan line in the first horizontal scan period and the second horizontal scan period.

[0013] Note that in a liquid crystal display device, AC voltage is applied to a liquid crystal element provided in a pixel in order to prevent deterioration of liquid crystal (called burn-in). For that reason, a transistor used in a pixel portion preferably has a withstand voltage higher than or equal to about ten and several volts. Moreover, the off-state current of the transistor needs to be low in order to maintain a voltage held at the liquid crystal element. In contrast, for a transistor used in a signal line driver circuit, high-speed operation is more important than high withstand voltage in order to keep high quality of images displayed in the liquid crystal display device.

[0014] In view of the above, a transistor including a channel formation region formed using an oxide semiconductor is used in a pixel portion in a liquid crystal display device according to one embodiment of the present invention. The bandgap of the oxide semiconductor is 3.0 eV to 3.5 eV, which is about three times that of silicon. The wide band gap of the oxide semiconductor is advantageous in increasing the

withstand voltage of the transistor. In addition, an oxide semiconductor that is purified by reduction in concentration of impurities such as moisture or hydrogen, which serves as electron donors (donors), that is, a purified OS is an intrinsic semiconductor (an i-type semiconductor) or a substantially intrinsic semiconductor. Therefore, a transistor including the purified oxide semiconductor has very low off-state current in addition to high withstand voltage.

[0015] Furthermore, in the liquid crystal display device according to one embodiment of the present invention, a transistor including a crystalline semiconductor such as polycrystalline or single crystal silicon or polycrystalline or single crystal germanium is used in a driver circuit that needs to operate at higher speed than the pixel portion, such as a signal line driver circuit. The crystalline semiconductor has higher mobility than the oxide semiconductor. Accordingly, a signal line driver circuit can operate at high speed by using the crystalline semiconductor for a transistor.

[0016] By employing different semiconductors and different processes for a circuit that needs to operate at high speed and a circuit that needs to have high withstand voltage as described above, semiconductor elements with optimum structures can be separately formed in accordance with features required for the circuits, without complication of the processes.

[0017] In a scan line driver circuit, a transistor including a crystalline semiconductor such as a polycrystalline semiconductor or a single crystal semiconductor may be used as in the signal line driver circuit, or a transistor in which a channel formation region is formed using an oxide semiconductor may be used as in the pixel portion.

[0018] A transistor including a crystalline semiconductor such as polycrystalline or single crystal silicon or polycrystalline or single crystal germanium can be formed using a silicon wafer, an SOI (silicon on insulator) substrate, a polycrystalline semiconductor film formed on an insulating surface, or the like.

[0019] An SOI substrate can be manufactured by, for example, an attachment method such as UNIBOND (registered trademark) typified by Smart Cut (registered trademark), epitaxial layer transfer (ELTRAN, registered trademark), a dielectric separation method, or plasma assisted chemical etching (PACE); or separation by implanted oxygen (SIMOX).

[0020] A semiconductor film of silicon deposited over a substrate having an insulating surface may be crystallized by a known technique. Examples of a known technique of crystallization are a laser crystallization method using a laser beam and a crystallization method using a catalytic element. Alternatively, a crystallization method using a catalytic element and a laser crystallization method may be used in combination. In the case where a substrate with high heat resistance, such as a quartz substrate, is used, it is possible to combine any of the following crystallization methods: a thermal crystallization method with an electrically heated oven, a lamp anneal crystallization method with infrared light, a crystallization method with a catalytic element, and high temperature annealing method at about 950° C.

[0021] In the liquid crystal display device according to one embodiment of the present invention, image signals can be concurrently supplied to pixels placed in a plurality of rows among pixels arranged in matrix. Thus, the frequency of input of an image signal to each pixel can be increased without

change in response speed of a transistor or the like included in the liquid crystal display device.

BRIEF DESCRIPTION OF DRAWINGS

[0022] In the accompanying drawings:

[0023] FIG. 1A illustrates a structural example of a liquid crystal display device, and FIG. 1B illustrates a configuration example of a pixel;

[0024] FIG. 2 illustrates a structural example of a scan line driver circuit;

[0025] FIG. 3 illustrates output signals of shift registers;

[0026] FIG. 4A illustrates a structural example of a signal line driver circuit, and FIG. 4B illustrates a structural example of a backlight;

[0027] FIG. 5 illustrates an operation example of a liquid crystal display device;

[0028] FIG. 6A illustrates a structural example of a liquid crystal display device, and FIGS. 6B to 6D each illustrate a configuration example of a pixel;

[0029] FIG. 7A illustrates a structural example of a scan line driver circuit, and FIG. 7B illustrates output signals of shift registers;

[0030] FIG. 8 illustrates a structural example of a signal line driver circuit;

[0031] FIG. 9 is a cross-sectional view illustrating an example of a transistor;

[0032] FIG. 10 shows characteristics of a transistor;

[0033] FIG. 11 is a circuit diagram for evaluating characteristics of a transistor;

[0034] FIG. 12 is a timing chart for evaluating characteristics of a transistor;

[0035] FIG. 13 shows characteristics of a transistor;

[0036] FIG. 14 shows characteristics of a transistor;

[0037] FIG. 15 shows characteristics of a transistor;

[0038] FIGS. 16A to 16C are cross-sectional views each illustrating an example of a transistor;

[0039] FIG. 17 illustrates a specific example of a cross section of a pixel;

[0040] FIGS. 18A to 18C each illustrate a specific example of connection between terminals;

[0041] FIGS. 19A to 19C are perspective views each illustrating a specific example of a liquid crystal display device;

[0042] FIGS. 20A and 20B are a top view and a cross-sectional view illustrating a specific example of a liquid crystal display device;

[0043] FIG. 21 is a perspective view illustrating a specific example of a liquid crystal display device;

[0044] FIGS. 22A and 22B each illustrate a specific example of a touch panel;

[0045] FIGS. 23A and 23B illustrate a specific example of a touch panel;

[0046] FIGS. 24A to 24D are cross-sectional views illustrating a specific example of a process for manufacturing a transistor; and

[0047] FIGS. 25A to 25F each illustrate an example of an electronic device.

BEST MODE FOR CARRYING OUT THE INVENTION

[0048] Embodiments of the present invention will be described below in detail with reference to the accompanying drawings. Note that the present invention is not limited to the description below, and it is easily understood by those skilled

in the art that a variety of changes and modifications can be made without departing from the spirit and scope of the present invention. Therefore, the present invention should not be construed as being limited to the description of the embodiments.

Embodiment 1

[0049] In this embodiment, an example of a liquid crystal display device in which images are displayed by a field sequential method will be described with reference to FIGS. 1A and 1B, FIG. 2, FIG. 3, FIGS. 4A and 4B, and FIG. 5.

(Structural Example of Liquid Crystal Display Device)

[0050] FIG. 1A illustrates a structural example of a liquid crystal display device. The liquid crystal display device in FIG. 1A includes a pixel portion 10; a scan line driver circuit 11; a signal line driver circuit 12; 3n scan lines 131, 3n scan lines 132, and 3n scan lines 133 (n is a natural number of 2 or more) arranged parallel or approximately parallel to each other; and m signal lines 141, m signal lines 142, and m signal lines 143 (m is a natural number of 2 or more) arranged parallel or approximately parallel to each other. The potentials of the scan lines 131, 132, and 133 are controlled by the scan line driver circuit 11. The potentials of the signal lines 141, 142, and 143 are controlled by the signal line driver circuit 12.

[0051] The pixel portion 10 includes a plurality of pixels 15 arranged in matrix (3n rows and m columns). Each of the scan lines 131, 132, and 133 is electrically connected to m pixels 15 arranged in a given row among the plurality of pixels 15 arranged in matrix (3n rows and m columns). Each of the signal lines 141, 142, and 143 is electrically connected to 3n pixels 15 arranged in a given column among the plurality of pixels 15 arranged in matrix (3n rows and m columns).

[0052] To the scan line driver circuit 11, start signals (GSP1 to GSP3) for the scan line driver circuit, a clock signal (GCK) for the scan line driver circuit, and drive power supplies such as a high power supply potential (VDD) and a low power supply potential (VSS) are input from the outside. To the signal line driver circuit 12, signals such as a start signal (SSP) for the signal line driver circuit, a clock signal (SCK) for the signal line driver circuit, and image signals (DATA1 to DATA3) and drive power supplies such as a high power supply potential and a low power supply potential are input from the outside.

[0053] FIG. 1B illustrates an example of a circuit configuration of the pixel 15. The pixel 15 in FIG. 1B includes a transistor 151, a transistor 152, a transistor 153, a capacitor 154, and a liquid crystal element 155. A gate of the transistor 151 is electrically connected to the scan line 131. One of a source and a drain of the transistor 151 is electrically connected to the signal line 141. A gate of the transistor 152 is electrically connected to the scan line 132. One of a source and a drain of the transistor 152 is electrically connected to the signal line 142. A gate of the transistor 153 is electrically connected to the scan line 133. One of a source and a drain of the transistor 153 is electrically connected to the signal line 143. One electrode of the capacitor 154 is electrically connected to the other of the source and the drain of each of the transistors 151 to 153. The other electrode of the capacitor 154 is electrically connected to a wiring that supplies a capacitor potential. One electrode of the liquid crystal element 155 is electrically connected to the other of the source

and the drain of each of the transistors 151 to 153 and one electrode of the capacitor 154. The other electrode of the liquid crystal element 155 is electrically connected to a wiring that supplies a counter potential.

(Structural Example of Scan Line Driver Circuit 11)

[0054] FIG. 2 illustrates a structural example of the scan line driver circuit 11 included in the liquid crystal display device in FIG. 1A. The scan line driver circuit 11 illustrated in FIG. 2 includes three shift registers 111 to 113 each having 3n output terminals. Each output terminal of the shift register 111 is electrically connected to one of the 3n scan lines 131 placed in the pixel portion 10. Each output terminal of the shift register 112 is electrically connected to one of the 3n scan lines 132 placed in the pixel portion 10. Each output terminal of the shift register 113 is electrically connected to one of the 3n scan lines 133 placed in the pixel portion 10. In other words, the shift register 111 drives the scan lines 131; the shift register 112 drives the scan lines 132; and the shift register 113 drives the scan lines 133. Specifically, the shift register 111 has a function of sequentially shifting selection signals from the scan line 131 in a first row (i.e., a function of sequentially selecting the scan lines 131 every $\frac{1}{2}$ cycle of the clock signal (GCK)) by using the first start signal (GSP1) input from the outside, as a trigger. The shift register 112 has a function of sequentially shifting selection signals from the scan line 132 in the first row, by using the second start signal (GSP2) input from the outside, as a trigger. The shift register 113 has a function of sequentially shifting selection signals from the scan line 133 in the first row, by using the third start signal (GSP3) input from the outside, as a trigger.

(Operation Example of Scan Line Driver Circuit 11)

[0055] An operation example of the scan line driver circuit 11 will be described with reference to FIG. 3. FIG. 3 shows the clock signal (GCK), signals (SR111out) output from the 3n output terminals of the shift register 111, signals (SR112out) output from the 3n output terminals of the shift register 112, and signals (SR113out) output from the 3n output terminals of the shift register 113. Here, a sampling period means a period required to input any image signals to all pixels arranged in all the rows (from the first row to the 3n-th row).

[0056] In a sampling period (t1), in the shift register 111, high-level potentials are sequentially shifted every $\frac{1}{2}$ clock cycle (every horizontal scan period) from the scan line 131 in the first row to the scan line 131 in an n-th row. In the shift register 112, high-level potentials are sequentially shifted every $\frac{1}{2}$ clock cycle (every horizontal scan period) from the scan line 132 in an (n+1)th row to the scan line 132 in a 2n-th row. In the shift register 113, high-level potentials are sequentially shifted every $\frac{1}{2}$ clock cycle (every horizontal scan period) from the scan line 133 in a (2n+1)th row to the scan line 133 in a 3n-th row. Accordingly, the scan line driver circuit 11 sequentially selects m pixels 15 in the first row to m pixels 15 in the n-th row through the scan lines 131, sequentially selects m pixels 15 in the (n+1)th row to m pixels 15 in the 2n-th row through the scan lines 132, and sequentially selects m pixels 15 in the (2n+1)th row to m pixels 15 in the 3n-th row through the scan lines 133. That is, the scan line driver circuit 11 can supply selection signals to 3m pixels 15 provided in three different rows every horizontal scan period.

[0057] In a sampling period (t_2), although output signals of the shift registers 111 to 113 are different from those in the sampling period (t_1), the following operations are the same as those in the sampling period (W). That is, one of the shift registers 111 to 113 (the shift register 113 in the sampling period (t_2)) sequentially selects m pixels 15 in the first row to m pixels 15 in the n -th row; another one of the shift registers 111 to 113 (the shift register 111 in the sampling period (t_2)) sequentially selects m pixels 15 in the $(n+1)$ th row to m pixels 15 in the $2n$ -th row; and the other of the shift registers 111 to 113 (the shift register 112 in the sampling period (t_2)) sequentially selects m pixels 15 in the $(2n+1)$ th row to m pixels 15 in the $3n$ -th row. In other words, as in the sampling period (t_1), the scan line driver circuit 11 can supply selection signals to $3m$ pixels 15 in given three rows every horizontal scan period.

(Structural Example of Signal Line Driver Circuit 12)

[0058] FIG. 4A illustrates a structural example of the signal line driver circuit 12 included in the liquid crystal display device in FIG. 1A. The signal line driver circuit 12 in FIG. 4A includes a shift register 120 having m output terminals, m transistors 121, m transistors 122, and m transistors 123. A gate of the transistor 121 is electrically connected to the j -th output terminal (j is a natural number of 1 or more and m or less) of the shift register 120. One of a source and a drain of the transistor 121 is electrically connected to a wiring that supplies the first image signal (DATA1). The other of the source and the drain of the transistor 121 is electrically connected to the signal line 141 in the j -th column in the pixel portion 10. A gate of the transistor 122 is electrically connected to the j -th output terminal of the shift register 120. One of a source and a drain of the transistor 122 is electrically connected to a wiring that supplies the second image signal (DATA2). The other of the source and the drain of the transistor 122 is electrically connected to the signal line 142 in the j -th column in the pixel portion 10. A gate of the transistor 123 is electrically connected to the j -th output terminal of the shift register 120. One of a source and a drain of the transistor 123 is electrically connected to a wiring that supplies the third image signal (DATA3). The other of the source and the drain of the transistor 123 is electrically connected to the signal line 143 in the j -th column in the pixel portion 10.

[0059] Note that here, as the first image signal (DATA1), a red (R) image signal (an image signal for controlling transmission of red (R) light) is supplied to the signal line 141. As the second image signal (DATA2), a blue (B) image signal (an image signal for controlling transmission of blue (B) light) is supplied to the signal line 142. As the third image signal (DATA3), a green (G) image signal (an image signal for controlling transmission of green (G) light) is supplied to the signal line 143.

(Structural Example of Backlight)

[0060] FIG. 4B illustrates a structural example of a backlight provided behind the pixel portion 10 in the liquid crystal display device illustrated in FIG. 1A. The backlight in FIG. 4B includes a plurality of backlight units 16 each including light sources that emit lights of three colors of red (R), green (G), and blue (B). The plurality of backlight units 16 are arranged in matrix, and lighting of the backlight units can be controlled in each given region. Here, as the backlight for the plurality of pixels 15 of $3n$ rows and m columns, a backlight unit group is provided at least every k rows and m columns

(here, k is $n/4$), and it is possible to control lighting of these backlight unit groups independently. That is, the backlight includes at least a backlight unit group for first to k -th rows to a backlight unit group for $(3n-k+1)$ th to $3n$ -th rows, and it is possible to control lighting of each backlight unit group independently.

(Operation Example of Liquid Crystal Display Device)

[0061] FIG. 5 illustrates timings of lighting of the backlight unit group for the first to k -th rows to the backlight unit group for the $(3n-k+1)$ th to $3n$ -th rows that are included in the backlight, and timings of supply of image signals to from m pixels in the first row to m pixels in the $3n$ -th row in the pixel portion 10 in the above liquid crystal display device. Specifically, in FIG. 5, "1" to "3n" indicate the number of rows and solid lines indicate timing of input of image signals to rows. In the liquid crystal display device, image signals can be input to each pixel in the sampling period (t_1) in the following manner: m pixels 15 in the first row to m pixels 15 in the n -th row are sequentially selected; m pixels 15 in the $(n+1)$ th row to m pixels 15 in the $2n$ -th row are sequentially selected; and m pixels 15 in the $(2n+1)$ th row to m pixels 15 in the $3n$ -th row are sequentially selected. Specifically, in the liquid crystal display device, in the sampling period (t_1), transistors 151 included in the m pixels 15 in the first row to transistors 151 included in the m pixels 15 in the n -th row are sequentially turned on through the scan lines 131 so that red (R) image signals can be sequentially input to the pixels through the signal line 141; transistors 152 included in the m pixels 15 in the $(n+1)$ th row to transistors 152 included in the m pixels 15 in the $2n$ -th row are sequentially turned on through the scan lines 132 so that blue (B) image signals can be sequentially input to the pixels through the signal line 142; and transistors 153 included in the m pixels 15 in the $(2n+1)$ th row to transistors 153 included in the m pixels 15 in the $3n$ -th row are sequentially turned on through the scan lines 133 so that green (G) image signals can be sequentially input to the pixels through the signal line 143.

[0062] Further, in the liquid crystal display device, in the sampling period (t_1), red (R) light can be emitted from the backlight unit group for the first to k -th rows after input of red (R) image signals to the m pixels 15 in the first row to the m pixels 15 in the n -th row is finished; blue (B) light can be emitted from the backlight unit group for the $(n+1)$ th to $(n+k)$ th rows after input of blue (B) image signals to the m pixels 15 in the $(n+1)$ th row to the m pixels 15 in the $(n+k)$ th row is finished; and green (G) light can be emitted from the backlight unit group for the $(2n+1)$ th to $(2n+k)$ th rows after input of green (G) image signals to the m pixels 15 in the $(2n+1)$ th row to the m pixels 15 in the $2(n+k)$ th row is finished. That is, in the liquid crystal display device, supply of selection signals and supply of light of a given color can be concurrently performed in each region (in the first to n -th rows, the $(n+1)$ th to $2n$ -th rows, and the $(2n+1)$ th to $3n$ -th rows).

(Liquid Crystal Display Device Disclosed in this Specification)

[0063] In the liquid crystal display device disclosed in this specification, image signals can be concurrently supplied to pixels placed in a plurality of rows among the pixels arranged in matrix. Thus, the frequency of input of an image signal to each pixel can be increased without change in response speed of a transistor or the like included in the liquid crystal display device. Specifically, in the liquid crystal display device, the frequency of input of an image signal to each pixel can be

tripled without change in clock frequency or the like of the scan line driver circuit. In other words, the liquid crystal display device is preferably applied to a field-sequential liquid crystal display device or a liquid crystal display device driven by high frame rate driving.

[0064] The liquid crystal display device disclosed in this specification is preferably applied to a field-sequential liquid crystal display device because of the following reasons. As described above, in a field-sequential liquid crystal display device, a display period is divided between lights of given colors. For that reason, display perceived by a user is sometimes changed (degraded) from display based on original display data (such a phenomenon is also referred to as color breaks) because of a lack of a given piece of display data due to temporary interruption of display, such as a blink of the user. An increase in frame frequency is effective in reducing color breaks. Further, in order to display images by a field sequential method, the frequency of input of an image signal to each pixel needs to be higher than the frame frequency. For that reason, in the case where images are displayed with a field sequential method and high frame frequency driving in a conventional liquid crystal display device, requirements for performance (high-speed response) of elements in the liquid crystal display device are extremely strict. In contrast, in the liquid crystal display device disclosed in this specification, the frequency of input of an image signal to each pixel can be increased regardless of characteristics of elements. Therefore, color breaks in the field-sequential liquid crystal display device can be easily suppressed.

[0065] In addition, in the case where images are displayed by a field sequential method, it is preferable that backlight unit groups concurrently emit lights of different colors in regions as illustrated in FIG. 5 because of the following reasons. In the case where light of one color is supplied for the entire screen, the pixel portion only has data on a specific color at a given moment. Therefore, a lack of display data in a given period due to a blink of the user or the like corresponds to a lack of data on a specific color. In contrast, in the case where backlight units emit lights of different colors in regions, the pixel portion has data on the colors at a given moment. Therefore, a lack of display data in a given period due to a blink of the user or the like does not correspond to a lack of data on a specific color. In other words, color breaks can be reduced when backlight units emit lights of different colors in regions. Furthermore, in the case where the backlight unit groups are lit as illustrated in FIG. 5, adjacent backlight unit groups do not emit light of a different color. Specifically, in the sampling period (t_1), when the backlight unit group for the $(n+1)$ th to $(n+k)$ th rows emits blue (B) light after input of blue (B) image signals to the m pixels **15** in the $(n+1)$ th row to the m pixels **15** in the $(n+k)$ th row is finished, the backlight unit group for the $(3k+1)$ th to n -th rows and the backlight unit group for the $(n+k+1)$ th to $(n+2k)$ th rows emit blue (B) light or do not emit light at all (i.e., do not emit either red (R) light or green (G) light). Thus, it is possible to decrease the probability that light with a color other than a specific color is transmitted through a pixel to which image data of the specific color is input.

(Variations)

[0066] The liquid crystal display device having the above-described structure is one embodiment of the present invention; the present invention further includes a liquid crystal

display device that is different from the liquid crystal display device having the above-described structure.

[0067] For example, the above liquid crystal display device has the structure in which image signals are concurrently supplied to $3m$ pixels in given three rows in the pixel portion **10**; however, the liquid crystal display device of the present invention is not limited to having this structure. That is, in the liquid crystal display device of the present invention, image signals can be concurrently supplied to a plurality of pixels in given plural rows in the pixel portion **10**. Note that it is obvious that in the case where the number of rows is changed, the number of shift registers and the number of rows need to be the same.

[0068] The liquid crystal display device has the structure in which image signals are concurrently supplied to pixels in given three rows provided at regular intervals (the interval between the rows supplied with image signals corresponds to n rows of pixels); however, the liquid crystal display device of the present invention is not limited to having this structure. That is, the liquid crystal display device of the present invention can have a structure in which image signals are concurrently supplied to pixels in given three rows provided at irregular intervals. Specifically, the liquid crystal display device can have a structure in which image signals are concurrently supplied to m pixels in the first row, m pixels in an $(a+1)$ th row (a is a natural number), and m pixels in an $(a+b+1)$ th row (b is a natural number other than a).

[0069] Moreover, in the liquid crystal display device, the scan line driver circuit is constituted by a shift register; the shift register can be replaced with a circuit having an equivalent function. For example, the shift register can be replaced with a decoder.

[0070] In the liquid crystal display device, light sources each emitting one of red (R) light, green (G) light, and blue (B) light are used for the backlight; however, the liquid crystal display device of the present invention is not limited to having this structure. That is, in the liquid crystal display device of the present invention, light sources that emit lights of given colors can be used in combination. For example, it is possible to use a combination of four kinds of light sources of red (R), green (G), blue (B), and white (W); or a combination of three kinds of light sources of cyan, magenta, and yellow. Moreover, it is possible to use a combination of six kinds of light sources of pale red (R), pale green (G), pale blue (B), dark red (R), dark green (G), and dark blue (B); or a combination of six kinds of light sources of red (R), green (G), blue (B), cyan, magenta, and yellow. In such a manner, with a combination of lights of a wider variety of colors, the color gamut of the liquid crystal display device can be enlarged, and the image quality can be improved.

[0071] The liquid crystal display device includes the capacitor for holding a voltage applied to the liquid crystal element (see FIG. 1B); alternatively, it is possible to employ a structure in which the capacitor is not provided.

[0072] In the liquid crystal display device, light sources that emit lights of three colors of red (R), green (G), and blue (B) are aligned linearly and horizontally as the backlight unit (see FIG. 4B); however, the structure of the backlight unit is not limited to this. For example, light sources that emit lights of three colors may be arranged in triangle or aligned linearly and vertically, or a red (R) light source, a green (G) light source, and a blue (B) light source may be separately provided. Further, the liquid crystal display device includes a

direct-type backlight as the backlight (see FIG. 4B); alternatively, an edge-lit backlight can be used as the backlight.

Embodiment 2

[0073] In this embodiment, an example of a field-sequential liquid crystal display device having a structure different from that in Embodiment 1 will be described with reference to FIGS. 6A to 6D, FIGS. 7A and 7B, and FIG. 8.

(Structural Example of Liquid Crystal Display Device)

[0074] FIG. 6A illustrates a structural example of a liquid crystal display device. The liquid crystal display device in FIG. 6A includes a pixel portion 30; a scan line driver circuit 31; a signal line driver circuit 32; 3n scan lines 33 (n is a natural number of 2 or more) arranged parallel or approximately parallel to each other; and m signal lines 341, m signal lines 342, and m signal lines 343 (m is a natural number of 2 or more) arranged parallel or approximately parallel to each other. The potentials of the scan lines 33 are controlled by the scan line driver circuit 31. The potentials of the signal lines 341, 342, and 343 are controlled by the signal line driver circuit 32.

[0075] The pixel portion 30 is divided into three regions (regions 301 to 303), and each region includes a plurality of pixels arranged in matrix (n rows and m columns). Each of the scan lines 33 is electrically connected to m pixels arranged in a given row among the plurality of pixels arranged in matrix (3n rows and m columns) in the pixel portion 30. Each of the signal lines 341 is electrically connected to n pixels arranged in a given column among the plurality of pixels arranged in matrix (n rows and m columns) in the region 301. Each of the signal lines 342 is electrically connected to n pixels arranged in a given column among the plurality of pixels arranged in matrix (n rows and m columns) in the region 302. Each of the signal lines 343 is electrically connected to n pixels arranged in a given column among the plurality of pixels arranged in matrix (n rows and m columns) in the region 303.

[0076] To the scan line driver circuit 31, a start signal (GSP) for the scan line driver circuit, a clock signal (GCK) for the scan line driver circuit, and drive power supplies such as a high power supply potential and a low power supply potential are input from the outside. To the signal line driver circuit 32, signals such as a start signal (SSP) for the signal line driver circuit, a clock signal (SCK) for the signal line driver circuit, and image signals (data1 to data3) and drive power supplies such as a high power supply potential and a low power supply potential are input from the outside.

[0077] FIGS. 6B to 6D each illustrate an example of a circuit configuration of the pixel. Specifically, FIG. 6B illustrates an example of a circuit configuration of a pixel 351 placed in the region 301; FIG. 6C illustrates an example of a circuit configuration of a pixel 352 placed in the region 302; and FIG. 6D illustrates an example of a circuit configuration of a pixel 353 placed in the region 303. The pixel 351 in FIG. 6B includes a transistor 3511, a capacitor 3512, and a liquid crystal element 3514. A gate of the transistor 3511 is electrically connected to the scan line 33. One of a source and a drain of the transistor 3511 is electrically connected to the signal line 341. One electrode of the capacitor 3512 is electrically connected to the other of the source and the drain of the transistor 3511. The other electrode of the capacitor 3512 is electrically connected to a wiring that supplies a capacitor potential. One electrode of the liquid crystal element 3514 is

electrically connected to the other of the source and the drain of the transistor 3511 and one electrode of the capacitor 3512. The other electrode of the liquid crystal element 3514 is electrically connected to a wiring that supplies a counter potential.

[0078] The pixel 352 in FIG. 6C and the pixel 353 in FIG. 6D have the same circuit configuration as the pixel 351 in FIG. 6B. Note that the pixel 352 in FIG. 6C is different from the pixel 351 in FIG. 6B in that one of a source and a drain of a transistor 3521 is electrically connected to the signal line 342 instead of the signal line 341. The pixel 353 in FIG. 6D is different from the pixel 351 in FIG. 6B in that one of a source and a drain of the transistor 3531 is electrically connected to the signal line 343 instead of the signal line 341.

(Structural Example of Scan Line Driver Circuit 31)

[0079] FIG. 7A illustrates a structural example of the scan line driver circuit 31 included in the liquid crystal display device in FIG. 6A. The scan line driver circuit 31 illustrated in FIG. 7A includes three shift registers 311 to 313 each having n output terminals. Each output terminal of the shift register 311 is electrically connected to one of n scan lines 33 placed in the region 301. Each output terminal of the shift register 312 is electrically connected to one of n scan lines 33 placed in the region 302. Each output terminal of the shift register 313 is electrically connected to one of n scan lines 33 placed in the region 303. In other words, the shift register 311 supplies selection signals in the region 301; the shift register 312 supplies selection signals in the region 302; and the shift register 313 supplies selection signals in the region 303. Specifically, the shift register 311 has a function of sequentially shifting selection signals from the scan line 33 in a first row (i.e., a function of sequentially selecting the scan lines 33 every $\frac{1}{2}$ cycle of the clock signal (GCK)) by using the start signal (GSP) input from the outside, as a trigger. The shift register 312 has a function of sequentially shifting selection signals from the scan line 33 in an (n+1)-th row, by using the start signal (GSP) input from the outside, as a trigger. The shift register 313 has a function of sequentially shifting selection signals from the scan line 33 in a (2n+1)-th row, by using the start signal (GSP) input from the outside, as a trigger.

(Operation Example of Scan Line Driver Circuit 31)

[0080] An operation example of the scan line driver circuit 31 will be described with reference to FIG. 7B. FIG. 7B shows the clock signal (GCK), signals (SR311out) output from the n output terminals of the shift register 311, signals (SR312out) output from the n output terminals of the shift register 312, and signals (SR313out) output from the n output terminals of the shift register 313.

[0081] In a sampling period (T1), in the shift register 311, high-level potentials are sequentially shifted every $\frac{1}{2}$ clock cycle (every horizontal scan period) from the scan line 33 in the first row to the scan line 33 in an n-th row. In the shift register 312, high-level potentials are sequentially shifted every $\frac{1}{2}$ clock cycle (every horizontal scan period) from the scan line 33 in an (n+1)th row to the scan line 33 in a 2n-th row. In the shift register 313, high-level potentials are sequentially shifted every $\frac{1}{2}$ clock cycle (every horizontal scan period) from the scan line 33 in a (2n+1)th row to the scan line 33 in a 3n-th row. Accordingly, the scan line driver circuit 31 sequentially selects m pixels 351 in the first row to m pixels 351 in the n-th row, sequentially selects m pixels 352 in the

(n+1)th row to m pixels **352** in the 2n-th row, and sequentially selects m pixels **353** in the (2n+1)th row to m pixels **353** in the 3n-th row through the scan lines **33**. That is, the scan line driver circuit **31** can supply selection signals to 3m pixels provided in three different rows every horizontal scan period.

[0082] In a sampling period (T2) and a sampling period (T3), the operations of the shift registers **311** to **313** are the same as the operations in the sampling period (T1). That is, as in the sampling period (T1), the scan line driver circuit **31** can supply selection signals to 3m pixels provided in given three rows every horizontal scan period.

(Structural Example of Signal Line Driver Circuit 32)

[0083] FIG. 8 illustrates a structural example of the signal line driver circuit **32** included in the liquid crystal display device in FIG. 6A. The signal line driver circuit **32** in FIG. 8 includes a shift register **320** having m output terminals, m transistors **321**, m transistors **322**, and m transistors **323**. A gate of the transistor **321** is electrically connected to the j-th output terminal (j is a natural number of 1 to m) of the shift register **320**. One of a source and a drain of the transistor **321** is electrically connected to a wiring that supplies the first image signal (data1). The other of the source and the drain of the transistor **321** is electrically connected to the signal line **341** in the j-th column in the pixel portion **30**. A gate of the transistor **322** is electrically connected to the j-th output terminal of the shift register **320**. One of a source and a drain of the transistor **322** is electrically connected to a wiring that supplies the second image signal (data2). The other of the source and the drain of the transistor **322** is electrically connected to the signal line **342** in the j-th column in the pixel portion **30**. A gate of the transistor **323** is electrically connected to the j-th output terminal of the shift register **320**. One of a source and a drain of the transistor **323** is electrically connected to a wiring that supplies the third image signal (data3). The other of the source and the drain of the transistor **323** is electrically connected to the signal line **343** in the j-th column in the pixel portion **30**.

[0084] Note that here, as the first image signal (data1), a red (R) image signal (an image signal for controlling transmission of red (R) light), a green (G) image signal (an image signal for controlling transmission of green (G) light), and a blue (B) image signal (an image signal for controlling transmission of blue (B) light) are supplied to the signal line **341** in the sampling period (T1), the sampling period (T2), and the sampling period (T3), respectively. As the second image signal (data2), a blue (B) image signal, a red (R) image signal, and a green (G) image signal are supplied to the signal line **342** in the sampling period (T1), the sampling period (T2), and the sampling period (T3), respectively. As the third image signal (data3), a green (G) image signal, a blue (B) image signal, and a red (R) image signal are supplied to the signal line **343** in the sampling period (T1), the sampling period (T2), and the sampling period (T3), respectively.

(Structural Example of Backlight)

[0085] As a backlight of the liquid crystal display device in this embodiment, the backlight shown in Embodiment 1 can be used; therefore, the above description is to be referred to here.

(Operation Example of Liquid Crystal Display Device)

[0086] The liquid crystal display device in this embodiment can perform operations similar to those of the liquid crystal

display device in Embodiment 1 (see FIG. 5). That is, in the liquid crystal display device in this embodiment, image signals can be input to each pixel in the sampling period (T1) in the following manner: m pixels **351** in the first row to m pixels **351** in the n-th row are sequentially selected, m pixels **352** in the (n+1)th row to m pixels **352** in the 2n-th row are sequentially selected, and m pixels **353** in the (2n+1)th row to m pixels **353** in the 3n-th row are sequentially selected.

[0087] As in the liquid crystal display device shown in Embodiment 1, in the liquid crystal display device of this embodiment, supply of selection signals and supply of light of a given color can be concurrently performed in each region (in the first to n-th rows, the (n+1)th to 2n-th rows, and the (2n+1)th to 3n-th rows).

(Liquid Crystal Display Device in this Embodiment)

[0088] The liquid crystal display device in this embodiment has functions similar to those of the liquid crystal display device described in Embodiment 1. Further, the aperture ratio of the liquid crystal display device in this embodiment can be increased by the reduction in the number of scan lines provided in the pixel portion and the reduction in the number of transistors provided in each pixel, as compared to the liquid crystal display device in Embodiment 1. Moreover, the reduction in the number of scan lines provided in the pixel portion can reduce parasitic capacitance generated when a signal line and a scan line overlap with each other; thus, the signal line can be driven at high speed. In addition, the area of the scan line driver circuit can be reduced, and the number of signals necessary for operating the scan line driver circuit can be reduced (i.e., it is not necessary to supply different start signals for the scan line driver circuit to a plurality of shift registers).

(Variations)

[0089] The liquid crystal display device in this embodiment is one embodiment of the present invention; the present invention further includes a liquid crystal display device that is different from the liquid crystal display device. For example, the liquid crystal display device in this embodiment can have any of the structures shown as the variations in Embodiment 1. Specifically, the shift register included in the liquid crystal display device in this embodiment can be replaced with a circuit having an equivalent function (e.g., a decoder), for example.

[0090] In addition, the liquid crystal display device in this embodiment has the structure in which the pixel portion **30** is divided into three regions; however, the liquid crystal display device in this embodiment is not limited to having this structure. That is, in the liquid crystal display device in this embodiment, the pixel portion **30** can be divided into given plural regions. Note that it is obvious that in the case where the number of regions is changed, the number of shift registers and the number of rows need to be the same.

[0091] In the liquid crystal display device in this embodiment, the number of pixels is the same in three regions (i.e., each of the regions includes pixels of n rows and m columns); alternatively, the number of pixels can vary between regions. Specifically, a first region can include pixels of c rows and m columns (c is a natural number) and a second region can include pixels of d rows and m columns (d is a natural number other than c).

Embodiment 3

[0092] In this embodiment, a specific structure of the liquid crystal display device described in Embodiment 1 or 2 will be described.

(Example of Transistor Provided in Pixel)

[0093] In the liquid crystal display device in Embodiment 1, a plurality of transistors are provided in each pixel. Input of an image signal to the pixel is controlled by sequentially using the plurality of transistors. Thus, image signals can be concurrently supplied to pixels placed in a plurality of rows. Note that in the liquid crystal display device, the leakage of an image signal held at a pixel is accordingly increased in accordance with the increase in the number of transistors provided in the pixel. For that reason, in the liquid crystal display device, a transistor with excellent off-state characteristics (with low off-state current) is preferably used as the transistor provided in each pixel. An example of a transistor that is suitable for the transistor will be described below with reference to FIG. 9. Specifically, a transistor including a channel formation region formed using an oxide semiconductor will be described. The off-state current of the transistor can be extremely reduced when the oxide semiconductor is purified (which is described below in detail). The transistor can also be used for forming the scan line driver circuit. In that case, reduction in cost and increase in yield due to reduction in the number of manufacturing steps can be achieved.

[0094] Note that the band gap of the oxide semiconductor is 3.0 eV to 3.5 eV. The band gap of silicon carbide and the band gap of gallium nitride are 3.26 eV and 3.39 eV, respectively, which are about three times that of silicon. Therefore, compound semiconductors such as silicon carbide and gallium nitride are similar to the oxide semiconductor in that they are both wide band gap semiconductors. The wider band gap is advantageous in increasing the withstand voltage of a signal processing circuit, reducing loss of power, and the like.

[0095] Compound semiconductors such as silicon carbide and gallium nitride are required to be single crystal, and it is difficult to meet the manufacturing conditions for obtaining a single crystal material; for example, crystal needs to grow at a temperature that is much higher than the process temperature of the oxide semiconductor, and epitaxial growth over a special substrate is necessary. Such conditions do not allow film formation of any of these compound semiconductors over a silicon wafer that can be obtained easily or a glass substrate whose allowable temperature limit is low. Therefore, an inexpensive substrate cannot be used, and further, the substrate cannot be increased in size, so that the productivity of signal processing circuits using the compound semiconductor such as silicon carbide or gallium nitride is low. In contrast, the oxide semiconductor can be deposited with heat treatment at 300° C. to 850° C., that is, can be deposited over a glass substrate. Moreover, a semiconductor element formed using the oxide semiconductor can be stacked over an integrated circuit.

[0096] A transistor 211 illustrated in FIG. 9 includes a gate layer 221 provided over a substrate 220 having an insulating surface, a gate insulating layer 222 provided over the gate layer 221, an oxide semiconductor layer 223 provided over the gate insulating layer 222, and a source layer 224a and a drain layer 224b provided over the oxide semiconductor layer 223. Moreover, FIG. 9 illustrates an insulating layer 225 that covers the transistor 211 and is in contact with the oxide

semiconductor layer 223, and a protective insulating layer 226 provided over the insulating layer 225.

[0097] As described above, the transistor 211 in FIG. 9 includes the oxide semiconductor layer 223 as a semiconductor layer. Examples of an oxide semiconductor used for the oxide semiconductor layer 223 are an In—Sn—Ga—Zn—O-based oxide semiconductor which is an oxide of four metal elements; an In—Ga—Zn—O-based oxide semiconductor, an In—Sn—Zn—O-based oxide semiconductor, an In—Al—Zn—O-based oxide semiconductor, a Sn—Ga—Zn—O-based oxide semiconductor, an Al—Ga—Zn—O-based oxide semiconductor, and a Sn—Al—Zn—O-based oxide semiconductor which are oxides of three metal elements; an In—Ga—O-based oxide semiconductor, an In—Zn—O-based oxide semiconductor, a Sn—Zn—O-based oxide semiconductor, an Al—Zn—O-based oxide semiconductor, a Zn—Mg—O-based oxide semiconductor, a Sn—Mg—O-based oxide semiconductor, and an In—Mg—O-based oxide semiconductor which are oxides of two metal elements; and an In—O-based oxide semiconductor, a Sn—O-based oxide semiconductor, and a Zn—O-based oxide semiconductor which are oxides of one metal element. Further, SiO₂ may be contained in the above oxide semiconductor. Here, for example, an In—Ga—Zn—O-based oxide semiconductor is an oxide containing at least In, Ga, and Zn, and there is no particular limitation on the composition ratio of the elements. An In—Ga—Zn—O-based oxide semiconductor may contain an element other than In, Ga, and Zn.

[0098] As the oxide semiconductor layer 223, a thin film expressed by a chemical formula of InMO₃(ZnO)_m (m>0) can be used. Here, M represents one or more metal elements selected from Ga, Al, Mn, and Co. For example, M can be Ga, Ga and Al, Ga and Mn, or Ga and Co.

[0099] In the case where an In—Zn—O-based material is used as an oxide semiconductor, a target to be used has a composition ratio of In:Zn=50:1 to 1:2 in an atomic ratio (In₂O₃:ZnO=25:1 to 1:4 in a molar ratio), preferably In:Zn=20:1 to 1:1 in an atomic ratio (In₂O₃:ZnO=10:1 to 1:2 in a molar ratio), further preferably In:Zn=15:1 to 1.5:1 in an atomic ratio (In₂O₃:ZnO=15:2 to 3:4 in a molar ratio). For example, when a target used for forming an In—Zn—O-based oxide semiconductor has an atomic ratio of In:Zn:O=X:Y:Z, the relation of Z>(1.5X+Y) is satisfied.

[0100] The above-described oxide semiconductor is an oxide semiconductor that is purified and made to be electrically i-type (intrinsic) as follows: an impurity such as hydrogen, moisture, a hydroxyl group, or hydride (also referred to as a hydrogen compound), which is a factor of variation in electric characteristics, is intentionally eliminated in order to prevent variation in electric characteristics.

[0101] Therefore, it is preferable that the oxide semiconductor contain as little hydrogen as possible. Moreover, the number of carriers derived from hydrogen, oxygen vacancy, and the like is extremely small (close to zero) in the purified oxide semiconductor layer, and the carrier density is less than 1×10¹²/cm³, preferably less than 1×10¹¹/cm³. In other words, the density of carriers derived from hydrogen, oxygen vacancy, and the like in the oxide semiconductor layer is made as close to zero as possible. Since the oxide semiconductor layer has very few carriers derived from hydrogen, oxygen vacancy, and the like, the amount of leakage current at the time when the transistor is off (i.e., off-state current) can be small. Furthermore, since the number of impurity levels derived from hydrogen, oxygen vacancy, and the like is small,

variation and deterioration of electric characteristics due to light irradiation, temperature change, application of bias, or the like can be reduced. Note that the smaller the amount of off-state current is, the better. The transistor including the oxide semiconductor for a semiconductor layer has an off-state current value (per channel width (W) of $1\ \mu\text{m}$) of $100\ \text{zA}$ (zeptoamperes) or less, preferably $10\ \text{zA}$ or less, more preferably $1\ \text{zA}$ or less. Further, the transistor does not have PN junction and hot carrier degradation does not occur, so that electrical characteristics of the transistor are not adversely affected thereby.

[0102] The off-state current can be extremely low in a transistor in which an oxide semiconductor layer that is purified by drastically removing hydrogen contained therein as described above is used for a channel formation region. In other words, in circuit design, the oxide semiconductor layer can be considered as an insulator when the transistor is off. On the other hand, when the transistor is on, the current supply capability of the oxide semiconductor layer is expected to be higher than that of a semiconductor layer formed of amorphous silicon.

[0103] As the substrate **220** having an insulating surface, a glass substrate of barium borosilicate glass, aluminoborosilicate glass, or the like can be used, for example.

[0104] In the transistor **211**, an insulating film serving as a base film may be provided between the substrate **220** and the gate layer **221**. The base film has a function of preventing diffusion of an impurity element from the substrate, and can be formed with a single-layer structure or a stacked structure using one or more of a silicon nitride film, a silicon oxide film, a silicon nitride oxide film, and a silicon oxynitride film.

[0105] The gate layer **221** can be formed with a single-layer structure or a stacked structure using a metal material such as molybdenum, titanium, chromium, tantalum, tungsten, aluminum, copper, neodymium, or scandium or an alloy material containing any of these materials as its main component.

[0106] The gate insulating layer **222** can be formed with a single-layer structure or a stacked structure including a silicon oxide layer, a silicon nitride layer, a silicon oxynitride layer, a silicon nitride oxide layer, an aluminum oxide layer, an aluminum nitride layer, an aluminum oxynitride layer, an aluminum nitride oxide layer, or a hafnium oxide layer by plasma CVD, sputtering, or the like. For example, a silicon nitride layer (SiNy ($y>0$)) with a thickness of $50\ \text{nm}$ to $200\ \text{nm}$ can be formed as a first gate insulating layer by plasma CVD, and a silicon oxide layer (SiOx ($x>0$)) with a thickness of $5\ \text{nm}$ to $300\ \text{nm}$ as a second gate insulating layer can be stacked over the first gate insulating layer.

[0107] A conductive film used for the source layer **224a** and the drain layer **224b** can be formed using an element selected from Al, Cr, Cu, Ta, Ti, Mo, and W, an alloy including any of these elements as a component, or an alloy film including a combination of any of these elements, for example. A structure may be employed in which a refractory metal layer of Ti, Mo, W, or the like is stacked on one or both of a top surface and a bottom surface of a metal layer of Al, Cu, or the like. By using an aluminum material to which an element preventing generation of hillocks and whiskers in an aluminum film (e.g., Si, Nd, or Sc) is added, heat resistance can be increased.

[0108] The conductive film to be the source layer **224a** and the drain layer **224b** (including a wiring layer formed using the same layer as the source and drain layers) may be formed using a conductive metal oxide. As the conductive metal oxide, indium oxide (In_2O_3), tin oxide (SnO_2), zinc oxide

(ZnO), an alloy of indium oxide and tin oxide ($\text{In}_2\text{O}_3\text{—SnO}_2$, referred to as ITO), an alloy of indium oxide and zinc oxide ($\text{In}_2\text{O}_3\text{—ZnO}$), or any of the metal oxide materials containing silicon or silicon oxide can be used.

[0109] As the insulating layer **225**, an inorganic insulating film typified by a silicon oxide film, a silicon oxynitride film, an aluminum oxide film, or an aluminum oxynitride film can be used.

[0110] As the protective insulating layer **226**, an inorganic insulating film such as a silicon nitride film, an aluminum nitride film, a silicon nitride oxide film, or an aluminum nitride oxide film can be used.

[0111] A planarization insulating film may be formed over the protective insulating layer **226** in order to reduce surface roughness due to the transistor. The planarization insulating film can be formed using an organic material such as polyimide, acrylic, or benzocyclobutene. Other than such organic materials, it is possible to use a low-dielectric constant material (low- k material) or the like. Note that the planarization insulating film may be formed by stacking a plurality of insulating films formed from these materials.

(Off-State Current of Transistor)

[0112] Next, results of measuring the off-state current of a transistor including a purified oxide semiconductor layer will be described.

[0113] First, a transistor with a sufficiently large channel width W of $1\ \text{m}$ was prepared in consideration of the fact that the transistor including a purified oxide semiconductor layer has an adequately low off-state current, and the off-state current was measured. FIG. 10 shows the results of measuring the off-state current of a transistor with a channel width W of $1\ \text{m}$. In FIG. 10, the horizontal axis represents a gate voltage V_G , and the vertical axis represents a drain current I_D . In the case where the drain voltage V_D is $+1\ \text{V}$ or $+10\ \text{V}$ and the gate voltage V_G is within the range of $-20\ \text{V}$ to $-5\ \text{V}$, the off-state current of the transistor was found to be less than or equal to $1 \times 10^{-12}\ \text{A}$ which is the detection limit. Moreover, it was found that the off-state current (here, per channel width of $1\ \mu\text{m}$) of the transistor was $1\ \text{aA}/\mu\text{m}$ ($1 \times 10^{-18}\ \text{A}/\mu\text{m}$) or less.

[0114] Next, the results of more accurately measuring the off-state current of the transistor including a purified oxide semiconductor layer will be described. As described above, the off-state current of the transistor including a purified oxide semiconductor layer was found to be less than or equal to $1 \times 10^{-12}\ \text{A}$, which is the detection limit of measurement equipment. Here, the results of measuring more accurate off-state current (the value smaller than or equal to the detection limit of measurement equipment in the above measurement) with the use of an element for evaluating characteristics will be described.

[0115] First, an element for evaluating characteristics which was used for measuring current will be described with reference to FIG. 11.

[0116] In the element for evaluating characteristics illustrated in FIG. 11, three measurement systems **1800** are connected in parallel. The measurement system **1800** includes a capacitor **1802**, a transistor **1804**, a transistor **1805**, a transistor **1806**, and a transistor **1808**. The transistor including a purified oxide semiconductor layer was used as the transistors **1804** and **1808**.

[0117] In the measurement system **1800**, one of a source and a drain of the transistor **1804**, one terminal of the capacitor **1802**, and one of a source and a drain of the transistor **1805**

are connected to a power source (for supplying V2). The other of the source and the drain of the transistor **1804**, one of a source and a drain of the transistor **1808**, the other terminal of the capacitor **1802**, and a gate of the transistor **1805** are electrically connected to each other. The other of the source and the drain of the transistor **1808**, one of a source and a drain of the transistor **1806**, and a gate of the transistor **1806** are electrically connected to a power source (for supplying V1). The other of the source and the drain of the transistor **1805** and the other of the source and the drain of the transistor **1806** are electrically connected to an output terminal.

[0118] A potential Vext_b2 for controlling the on/off state of the transistor **1804** is supplied to a gate of the transistor **1804**. A potential Vext_b1 for controlling the on/off state of the transistor **1808** is supplied to a gate of the transistor **1808**. A potential Vout is output from the output terminal.

[0119] Next, a method for measuring current with the use of the element for evaluating characteristics will be described with reference to FIG. 12. The measurement is performed in an initial period and a measurement period.

[0120] First, in the initial period, a node A (a node electrically connected to one of the source and the drain of the transistor **1808**, the other terminal of the capacitor **1802**, and the gate of the transistor **1805**) is made to have a high potential. In order to realize this, the potential of V1 is set to a high potential (VDD) and the potential of V2 is set to a low potential (VSS).

[0121] Next, Vext_b2 is set to a potential with which the transistor **1804** is turned on (a high potential). Thus, the potential of the node A becomes V2, that is, the low potential (VSS). Note that it is not always necessary to supply the low potential (VSS) to the node A. After that, Vext_b2 is set to a potential with which the transistor **1804** is turned off (a low potential), so that the transistor **1804** is turned off. Then, Vext_b1 is set to a potential with which the transistor **1808** is turned on (a high potential). Thus, the potential of the node A becomes V1, that is, the high potential (VDD). After that, Vext_b1 is set to a potential with which the transistor **1808** is turned off. Accordingly, the node A is brought into a floating state while having the high potential, and the initial period is completed.

[0122] In the following measurement period, the potential V1 and the potential V2 are set to a potential with which electric charge flows to the node A or a potential with which electric charge flows from the node A. Here, each of the potential V1 and the potential V2 is set to the low potential. Note that at the timing of measuring the output potential Vout, V1 is temporarily set to the high potential because an output circuit needs to be operated. The period in which V1 is the high potential is made short so as not to adversely affect the measurement.

[0123] In the measurement period, electric charge is transferred from the node A to a wiring supplied with V1 or a wiring supplied with V2 because of the off-state current of the transistors **1804** and **1808**. That is, the amount of electric charge held at the node A is changed over time, and the potential of the node A is changed accordingly. This means that the potential of the gate of the transistor **1805** varies.

[0124] Electric charge is measured by measuring Vout while the potential of Vext_b1 is temporarily set to the high potential at regular intervals. A circuit constituted by the transistor **1805** and the transistor **1806** is an inverter. When the node A has the high potential, Vout becomes the low potential; whereas when the node A has the low potential,

Vout becomes the high potential. The potential of the node A, which has been the high potential at the beginning, is gradually decreased because of a decrease in the amount of electric charge. Thus, the potential of Vout is also changed. The potential of the node A is amplified with the amplification function of the inverter and output as Vout, so that a small amount of change in the potential of the node A can be measured by measurement of Vout.

[0125] A method for calculating the off-state current from the obtained output potential Vout will be described below.

[0126] The relation between the potential V_A of the node A and the output potential Vout is obtained in advance before calculation of the off-state current. With this relation, the potential V_A of the node A can be obtained using the output potential Vout. In accordance with the above relation, the potential V_A of the node A can be expressed as a function of the output potential Vout by the following equation.

$$V_A = F(V_{out}) \quad [\text{Formula 1}]$$

[0127] Electric charge Q_A of the node A can be expressed by the following equation with the use of the potential V_A of the node A, a capacitance C_A connected to the node A, and a constant (const). Here, the capacitance C_A connected to the node A is the sum of the capacitance of the capacitor **1802** and other capacitance.

$$Q_A = C_A V_A + \text{const} \quad [\text{Formula 2}]$$

[0128] Since a current I_A at the node A is obtained by time derivative of electric charge flowing to a capacitor connected to the node A (or electric charge flowing from the capacitor connected to the node A), the current I_A at the node A is expressed by the following equation.

$$I_A = \frac{\Delta Q_A}{\Delta t} = \frac{C_A \cdot \Delta F(V_{out})}{\Delta t} \quad [\text{Formula 3}]$$

[0129] In this manner, the current I_A of the node A can be obtained from the capacitance C_A connected to the node A and the output potential Vout of the output terminal.

[0130] By the above method, it is possible to measure a leakage current which flows between a source and a drain of a transistor in an off state (an off-state current).

[0131] Here, the transistor **1804** and the transistor **1808** each of which included a purified oxide semiconductor layer and had a channel length L of 10 μm and a channel width W of 50 μm were manufactured. In the measurement systems **1800** arranged in parallel, capacitance values of the capacitors **1802** were 100 fF, 1 pF, and 3 pF.

[0132] Note that in the above-described measurement, VDD was 5 V and VSS was 0 V. In the measurement period, Vout was measured while the potential V1 was basically VSS and set to VDD only in a period of 100 milliseconds every 10 to 300 seconds. Moreover, Δt used in calculation of a current I which flows through the element was about 30000 seconds.

[0133] FIG. 13 shows the relation between elapsed time Time in the current measurement and the output potential Vout. It can be seen from FIG. 13 that the potential is changed over time.

[0134] FIG. 14 shows the off-state current at room temperature (25° C.) calculated in the above current measurement. FIG. 14 shows the relation between a source-drain voltage V of the transistor **1804** or the transistor **1808** and an off-state current I. It is found from FIG. 14 that the off-state current is

about 40 zA/ μ m when the source-drain voltage is 4 V. In addition, the off-state current was 10 zA/ μ m or less when the source-drain voltage was 3.1 V. Note that 1 zA represents 10^{-21} A.

[0135] FIG. 15 shows the off-state current at 85° C. calculated in the above current measurement. FIG. 15 shows the relation between a source-drain voltage V of the transistor 1804 or the transistor 1808 and an off-state current I at 85° C. It is found from FIG. 15 that the off-state current was 100 zA/ μ m or less when the source-drain voltage was 3.1 V.

[0136] As has been described above, it was confirmed that the off-state current was sufficiently low in a transistor including a purified oxide semiconductor layer.

(Variations of Transistor)

[0137] In the above description, the transistor 211 with a bottom-gate structure called a channel-etch structure (see FIG. 9) is used as the transistor provided in the pixel; however, the transistor is not limited to having this structure. Transistors illustrated in FIGS. 16A to 16C can be used, for example.

[0138] A transistor 510 illustrated in FIG. 16A has a kind of bottom-gate structure called a channel-protective type (also referred to as a channel-stop type).

[0139] The transistor 510 includes, over a substrate 220 having an insulating surface, a gate layer 221, a gate insulating layer 222, an oxide semiconductor layer 223, an insulating layer 511 functioning as a channel protective layer that covers a channel formation region of the oxide semiconductor layer 223, a source layer 224a, and a drain layer 224b. Moreover, a protective insulating layer 226 that covers the source layer 224a, the drain layer 224b, and the insulating layer 511 is formed.

[0140] As the insulating layer 511, an insulator such as silicon oxide, silicon nitride, silicon oxynitride, silicon nitride oxide, aluminum oxide, or tantalum oxide can be used. A stacked structure of any of these materials can also be used.

[0141] A transistor 520 illustrated in FIG. 16B is a bottom-gate transistor. The transistor 520 includes, over a substrate 220 having an insulating surface, a gate layer 221, a gate insulating layer 222, a source layer 224a, a drain layer 224b, and an oxide semiconductor layer 223. Furthermore, an insulating layer 225 that covers the source layer 224a and the drain layer 224b and is in contact with the oxide semiconductor layer 223 is provided. A protective insulating layer 226 is provided over the insulating layer 225.

[0142] In the transistor 520, the gate insulating layer 222 is provided on and in contact with the substrate 220 and the gate layer 221, and the source layer 224a and the drain layer 224b are provided on and in contact with the gate insulating layer 222. Further, the oxide semiconductor layer 223 is provided over the gate insulating layer 222, the source layer 224a, and the drain layer 224b.

[0143] A transistor 530 illustrated in FIG. 16C is a kind of top-gate transistor. The transistor 530 includes, over a substrate 220 having an insulating surface, an insulating layer 531, an oxide semiconductor layer 223, a source layer 224a and a drain layer 224b, a gate insulating layer 222, and a gate layer 221. A wiring layer 532a and a wiring layer 532b are provided in contact with the source layer 224a and the drain layer 224b, to be electrically connected to the source layer 224a and the drain layer 224b, respectively.

[0144] As the insulating layer 531, an insulator such as silicon oxide, silicon nitride, silicon oxynitride, silicon

nitride oxide, aluminum oxide, or tantalum oxide can be used. A stacked structure of any of these materials can also be used.

[0145] As the wiring layers 532a and 532b, an element selected from aluminum (Al), copper (Cu), titanium (Ti), tantalum (Ta), tungsten (W), molybdenum (Mo), chromium (Cr), neodymium (Nd), and scandium (Sc); an alloy containing any of these elements; or a nitride containing any of these elements can be used. A stacked structure of any of these materials can also be used.

(Specific Example of Cross Section of Pixel)

[0146] A liquid crystal display device according to one embodiment of the present invention can have high visibility and high reliability because a highly reliable transistor with low off-state current is used in a pixel portion.

[0147] FIG. 17 illustrates an example of a cross-sectional view of a pixel in the liquid crystal display device according to one embodiment of the present invention. A transistor 1401 illustrated in FIG. 17 includes a gate layer 1402 formed over an insulating surface, a gate insulating layer 1403 over the gate layer 1402, an oxide semiconductor layer 1404 that overlaps with the gate layer 1402 with the gate insulating layer 1403 placed therebetween, and a conductive film 1405 and a conductive film 1406 that are formed to be stacked over the oxide semiconductor layer 1404 and function as a source layer and a drain layer. The transistor 1401 may further include an insulating layer 1407 formed over the oxide semiconductor layer 1404. The insulating layer 1407 is formed so as to cover the gate layer 1402, the gate insulating layer 1403, the oxide semiconductor layer 1404, the conductive film 1405, and the conductive film 1406.

[0148] An insulating layer 1408 is formed over the insulating layer 1407. An opening is provided in part of the insulating layers 1407 and 1408, and a pixel electrode 1410 is formed so as to be in contact with the conductive film 1406 in the opening.

[0149] Further, a spacer 1417 for controlling the cell gap of a liquid crystal element is formed over the insulating layer 1408. The spacer 1417 can be formed by etching of an insulating film into a desired shape. Alternatively, the cell gap may be controlled by dispersing spherical spacers over the insulating layer 1408.

[0150] An alignment film 1411 is formed over the pixel electrode 1410. A counter electrode 1413 facing the pixel electrode 1410 is formed on a counter substrate 1420. An alignment film 1414 is formed on a surface of the counter electrode 1413, which faces the pixel electrode 1410. The alignment films 1411 and 1414 can be formed using an organic resin such as polyimide or polyvinyl alcohol. Alignment treatment such as rubbing is performed on their surfaces in order to align liquid crystal molecules in a certain direction. Rubbing can be performed in such a manner that a roller wrapped with cloth of nylon or the like is rotated while being in contact with the alignment film, and rubs the surface of the alignment film in a certain direction. Note that by using an inorganic material such as silicon oxide, the alignment films 1411 and 1414 with alignment characteristics can be directly formed by an evaporation method without performing alignment process.

[0151] Furthermore, a liquid crystal 1415 is provided in a region that is surrounded by a sealant 1416 between the pixel electrode 1410 and the counter electrode 1413. The liquid crystal 1415 may be injected with a dispenser method (a

dripping method) or a dipping method (a pumping method). Note that a filler may be mixed in the sealant **1416**.

[0152] A light-blocking film that can block light may be formed between pixels so that disclination due to alignment disorder of the liquid crystal **1415** between the pixels is prevented from being perceived. The light-blocking film can be formed using an organic resin containing a black pigment such as a carbon black or low-order titanium oxide, or a film containing chromium.

[0153] The pixel electrode **1410** and the counter electrode **1413** can be formed using a transparent conductive material such as indium tin oxide containing silicon oxide (ITSO), indium tin oxide (ITO), zinc oxide (ZnO), indium zinc oxide (IZO), or gallium-doped zinc oxide (GZO), for example.

[0154] Note that a TN (twisted nematic) liquid crystal display device is shown here; alternatively, the liquid crystal display device may be a VA (vertical alignment) liquid crystal display device, an OCB (optically compensated birefringence) liquid crystal display device, an IPS (in-plane switching) liquid crystal display device, or an MVA (multi-domain vertical alignment) liquid crystal display device, for example.

[0155] Alternatively, liquid crystal exhibiting a blue phase for which an alignment film is unnecessary may be used. A blue phase is one of liquid crystal phases, which is generated just before a cholesteric phase changes into an isotropic phase while the temperature of cholesteric liquid crystal is increased. Since the blue phase is only generated within a narrow range of temperature, a chiral agent or an ultraviolet curable resin is added so that the temperature range is increased. Specifically, a liquid crystal composition containing a chiral agent at 5 wt % or more is used as the liquid crystal **1415**. The liquid crystal composition that includes liquid crystal exhibiting a blue phase and a chiral agent has such characteristics that the response time is as short as 10 μ s to 100 μ s, the alignment process is unnecessary because the liquid crystal composition has optical isotropy, and viewing angle dependency is small. The liquid crystal having such features is preferably used particularly as liquid crystal in the above liquid crystal display device (the liquid crystal display device in which image signals need to be input to each pixel plural times in order to produce an image).

[0156] Note that although the liquid crystal element in which the liquid crystal **1415** is sandwiched between the pixel electrode **1410** and the counter electrode **1413** is shown in FIG. 17 as an example, the liquid crystal display device according to one embodiment of the present invention is not limited to having this structure. A pair of electrodes may be formed over one substrate as in an IPS liquid crystal element or a liquid crystal element using a blue phase.

(Specific Example of Connection Between Pixel Portion and Driver Circuit)

[0157] Next, a terminal connection method for directly mounting a substrate provided with a driver circuit on a substrate provided with a pixel portion will be described.

[0158] FIG. 18A is a cross-sectional view of a portion where a substrate **900** provided with a driver circuit and a substrate **901** provided with a pixel portion are connected to each other by a wire bonding method. The substrate **900** is attached onto the substrate **901** with an adhesive **903**. A transistor **906** included in the driver circuit is provided on the substrate **900**. The transistor **906** is electrically connected to a pad **907** that is formed to be exposed on a surface of the substrate **900** and functions as a terminal. A terminal **904** is

formed over the substrate **901** in FIG. 18A, and the pad **907** and the terminal **904** are connected to each other with a wire **905**.

[0159] FIG. 18B is a cross-sectional view of a portion where a substrate **911** provided with a pixel portion and a substrate **910** provided with a driver circuit are connected to each other by a flip-chip method. In FIG. 18B, a solder ball **913** is connected to a pad **912** that is formed to be exposed on a surface of the substrate **910**. Thus, a transistor **914** included in the driver circuit formed on the substrate **910** is electrically connected to the solder ball **913** through the pad **912**. The solder ball **913** is electrically connected to a terminal **916** formed over the substrate **911**.

[0160] The solder ball **913** and the terminal **916** can be connected to each other by a variety of methods such as thermocompression bonding and thermocompression bonding with ultrasonic vibration. Note that in order to increase the mechanical strength of the connection portion or the diffusion efficiency of heat generated at the substrate **911**, an underfill may be provided between the substrate **910** and the substrate **911** to fill the gap between the solder balls after bonding. Although not necessarily provided, an underfill can prevent occurrence of a connection failure due to stress generated by a mismatch in coefficient of thermal expansion between the substrate **910** and the substrate **911**. In the case where the solder ball **913** and the terminal **916** are bonded to each other with ultrasonic waves, connection failures can be reduced as compared to the case where they are bonded to each other only by thermocompression bonding.

[0161] A flip-chip method is suitable to realize connection with a large number of terminals because even if the number of pads to be connected is increased, the distance between the pads can be relatively large as compared to the case of employing a wire bonding method.

[0162] Note that the solder ball may be formed by a droplet discharge method by which a dispersion liquid in which metal nanoparticles are dispersed is discharged.

[0163] FIG. 18C is a cross-sectional view of a portion where a substrate **921** provided with a pixel portion and a substrate **920** provided with a driver circuit are connected to each other with an anisotropic conductive resin. In FIG. 18C, a pad **922** that is formed to be exposed on a surface of the substrate **920** is electrically connected to a transistor **924** included in the driver circuit formed on the substrate **920**. The pad **922** is connected to a terminal **926** formed over the substrate **921** with an anisotropic conductive resin **927**.

[0164] Note that the connection method is not limited to the methods shown in FIGS. 18A to 18C. The substrates may be connected to each other with a combination of a wire bonding method and a flip-chip method.

(Specific Example of Driver Circuit Mounted on Substrate Including Pixel Portion)

[0165] Next, a mounting method of a substrate including a driver circuit (also referred to as an IC chip) will be described. In the liquid crystal display device according to one embodiment of the present invention, a transistor including a channel formation region formed using an oxide semiconductor is used, so that a pixel portion and part of driver circuit can be formed over one substrate.

[0166] In a liquid crystal display device illustrated in FIG. 19A, a pixel portion **6002** and scan line driver circuits **6003** are formed over a substrate **6001**. A counter substrate **6006** overlaps the substrate **6001** so as to cover the pixel portion

6002 and the scan line driver circuits **6003**. Moreover, a substrate **6004** provided with a signal line driver circuit is directly mounted on the substrate **6001**. Specifically, the signal line driver circuit formed on the substrate **6004** is attached to the substrate **6001** and electrically connected to the pixel portion **6002**. Power supply potentials, various signals, and the like are supplied through an FPC **6005** to the pixel portion **6002**, the scan line driver circuits **6003**, and the signal line driver circuit formed on the substrate **6004**.

[0167] In a liquid crystal display panel illustrated in FIG. 19B, a pixel portion **6102** and scan line driver circuits **6103** are formed over a substrate **6101**. A counter substrate **6106** overlaps the substrate **6101** so as to cover the pixel portion **6102** and the scan line driver circuits **6103**. Moreover, a substrate **6104** provided with a signal line driver circuit is mounted on a FPC **6105** connected to the substrate **6101**. Power supply potentials, various signals, and the like are supplied through the FPC **6105** to the pixel portion **6102**, the scan line driver circuits **6103**, and the signal line driver circuit formed on the substrate **6104**.

[0168] In a liquid crystal display device illustrated in FIG. 19C, a pixel portion **6202**, scan line driver circuits **6203**, and a portion **6207** of a signal line driver circuit are formed over a substrate **6201**. A counter substrate **6206** overlaps the substrate **6201** so as to cover the pixel portion **6202**, the scan line driver circuits **6203**, and the portion **6207** of the signal line driver circuit. A substrate **6204** provided with another portion of the signal line driver circuit are directly mounted on the substrate **6201**. Specifically, another portion of the signal line driver circuit formed on the substrate **6204** is attached to the substrate **6201** and electrically connected to the portion **6207** of the signal line driver circuit. Power supply potentials, various signals, and the like are supplied through an FPC **6205** to the pixel portion **6202**, the scan line driver circuits **6203**, the portion **6207** of the signal line driver circuit, and another portion of the signal line driver circuit formed on the substrate **6204**.

[0169] There is no particular limitation on the mounting method of the substrate, and a known COG method, wire bonding method, TAB method, or the like can be used. The position where an IC chip is mounted is not limited to the positions shown in FIGS. 19A to 19C as long as electrical connection is achieved. Furthermore, a controller, a CPU, a memory, or the like may be formed using an IC chip and may be mounted on a substrate provided with a pixel portion.

(Specific Example of Liquid Crystal Display Device)

[0170] Next, the appearance of a panel in the liquid crystal display device according to one embodiment of the present invention will be described with reference to FIGS. 20A and 20B. FIG. 20A is a top view of the panel in which a substrate **4001** and a counter substrate **4006** are bonded to each other with a sealant **4005**. FIG. 20B is a cross-sectional view along the dashed line A-A' in FIG. 20A.

[0171] The sealant **4005** is provided so as to surround a pixel portion **4002** and a scan line driver circuit **4004** provided over the substrate **4001**. The counter substrate **4006** is placed over the pixel portion **4002** and the scan line driver circuit **4004**. Thus, the pixel portion **4002** and the scan line driver circuit **4004** are sealed together with a liquid crystal **4007** by the substrate **4001**, the sealant **4005**, and the counter substrate **4006**.

[0172] In addition, a substrate **4021** where a signal line driver circuit **4003** is formed is mounted on the substrate **4001**

in a region other than the region surrounded by the sealant **4005**. FIG. 20B illustrates a transistor **4009** included in the signal line driver circuit **4003**, as an example.

[0173] A plurality of transistors are included in the pixel portion **4002** and the scan line driver circuit **4004** provided over the substrate **4001**. FIG. 20B illustrates a transistor **4010** and a transistor **4022** that are included in the pixel portion **4002**. In each of the transistors **4010** and **4022**, a channel formation region is formed using an oxide semiconductor.

[0174] A pixel electrode **4030** included in a liquid crystal element **4011** is electrically connected to the transistor **4010**. A counter electrode **4031** of the liquid crystal element **4011** is formed on the counter substrate **4006**. The liquid crystal element **4011** corresponds to a region where the pixel electrode **4030**, the counter electrode **4031**, and the liquid crystal **4007** overlap with each other.

[0175] A spacer **4035** is provided in order to control a distance (a cell gap) between the pixel electrode **4030** and the counter electrode **4031**. FIG. 20B shows the case where the spacer **4035** is formed by patterning of an insulating film; alternatively, a spherical spacer may be used.

[0176] A variety of signals and potentials that are applied to the signal line driver circuit **4003**, the scan line driver circuit **4004**, and the pixel portion **4002** are supplied from a connection terminal **4016** through leading wirings **4014** and **4015**. The connection terminal **4016** is electrically connected to a FPC **4018** through an anisotropic conductive film **4019**.

[0177] For the substrate **4001**, the counter substrate **4006**, and the substrate **4021**, glass, ceramics, or plastics can be used. Examples of plastics are a fiberglass-reinforced plastic (FRP) plate, a polyvinyl fluoride (PVF) film, a polyester film, and an acrylic resin film.

[0178] Note that for a substrate to be placed in the direction from which light transmitted through the liquid crystal element **4011** is extracted, a light-transmitting material such as a glass plate, plastics, a polyester film, or an acrylic film is used.

[0179] FIG. 21 shows an example of a perspective view illustrating the structure of the liquid crystal display device according to one embodiment of the present invention. The liquid crystal display device in FIG. 21 includes a panel **1601** including a pixel portion, a first diffusion plate **1602**, a prism sheet **1603**, a second diffusion plate **1604**, a light guide plate **1605**, a backlight panel **1607**, a circuit board **1608**, and a substrate **1611** provided with a signal line driver circuit.

[0180] The panel **1601**, the first diffusion plate **1602**, the prism sheet **1603**, the second diffusion plate **1604**, the light guide plate **1605**, and the backlight panel **1607** are stacked in this order. The backlight panel **1607** has a backlight **1612** including a plurality of backlight units. Light that is emitted from the backlight **1612** and diffused in the light guide plate **1605** is delivered to the panel **1601** through the first diffusion plate **1602**, the prism sheet **1603**, and the second diffusion plate **1604**.

[0181] Although the first diffusion plate **1602** and the second diffusion plate **1604** are used here, the number of diffusion plates is not limited to two but may be one, or may be three or more. The diffusion plate should be provided between the light guide plate **1605** and the panel **1601**. Therefore, the diffusion plate may be provided only on the side closer to the panel **1601** than the prism sheet **1603**, or may be provided only on the side closer to the light guide plate **1605** than the prism sheet **1603**.

[0182] The prism sheet **1603** is not limited to having a sawtooth shape in section as illustrated in FIG. 21 and can

have a shape with which light from the light guide plate **1605** can be concentrated on the panel **1601** side.

[0183] The circuit board **1608** is provided with a circuit that generates various kinds of signals input to the panel **1601**, a circuit that processes these signals, and the like. In FIG. **21**, the circuit board **1608** and the panel **1601** are connected to each other via a COF (chip on film) tape **1609**. Moreover, the substrate **1611** provided with the signal line driver circuit is connected to the COF tape **1609** by a COF method.

[0184] FIG. **21** illustrates the example in which the circuit board **1608** is provided with a controller circuit that controls driving of the backlight **1612** and the controller circuit and the backlight panel **1607** are connected to each other via an FPC **1610**. Note that the controller circuit may be formed in the panel **1601**; in that case, the panel **1601** and the backlight panel **1607** are to be connected to each other via an FPC or the like.

(Specific Example of Liquid Crystal Display Device Including Touch Panel)

[0185] The liquid crystal display device according to one embodiment of the present invention may include a pointing device called a touch panel. FIG. **22A** illustrates a state where a touch panel **1620** overlaps with a panel **1621**.

[0186] In the touch panel **1620**, a position touched by a finger, a stylus, or the like is detected in a light-transmitting position detection portion **1622** and a signal including information on the position can be generated. Thus, by providing the touch panel **1620** so that the position detection portion **1622** overlaps with a pixel portion **1623** of the panel **1621**, information on a position in the pixel portion **1623** the user of the liquid crystal display device touches can be obtained.

[0187] The position can be detected in the position detection portion **1622** by a variety of methods such as a resistive touchscreen technology and a capacitive touchscreen technology. FIG. **22B** is a perspective view of the position detection portion **1622** with a resistive touchscreen technology. In the position detection portion **1622** with a resistive touchscreen technology, a plurality of first electrodes **1630** and a plurality of second electrodes **1631** are provided so as to face each other with a space therebetween. When one of the plurality of first electrodes **1630** is pressed by the finger or the like, the first electrode **1630** is in contact with one of the plurality of second electrodes **1631**. Then, by monitoring the level of voltage at opposite ends of each of the first electrodes **1630** and the level of voltage at opposite ends of each of the second electrodes **1631**, it is possible to specify which of the first electrodes **1630** is in contact with the second electrode **1631**; thus, the position touched by the finger can be detected.

[0188] The first electrodes **1630** and the second electrodes **1631** can be formed using a light-transmitting conductive material, for example, indium tin oxide containing silicon oxide (ITSO), indium tin oxide (ITO), zinc oxide (ZnO), indium zinc oxide (IZO), or gallium-doped zinc oxide (GZO).

[0189] FIG. **23A** is a perspective view of the position detection portion **1622** with a projected capacitive touchscreen technology among capacitive touchscreen technologies. In the position detection portion **1622** with a projected capacitive touchscreen technology, a plurality of first electrodes **1640** and a plurality of second electrodes **1641** are provided so as to overlap with each other. The first electrodes **1640** each have a structure in which a plurality of rectangular conductive films **1642** are connected to each other. The second electrodes

1641 each have a structure in which a plurality of rectangular conductive films **1643** are connected to each other. Note that the shapes of the first electrodes **1640** and the second electrodes **1641** are not limited thereto.

[0190] In FIG. **23A**, an insulating layer **1644** functioning as a dielectric overlaps the plurality of first electrodes **1640** and the plurality of second electrodes **1641**. FIG. **23B** illustrates a state where the plurality of first electrodes **1640**, the plurality of second electrodes **1641**, and the insulating layer **1644** illustrated in FIG. **23A** overlap with each other. As illustrated in FIG. **23B**, the plurality of first electrodes **1640** and the plurality of second electrodes **1641** overlap with each other so that the position of the rectangular conductive films **1642** does not correspond to that of the rectangular conductive films **1643**.

[0191] When the finger or the like touches the insulating layer **1644**, capacitance is generated between one of the plurality of first electrodes **1640** and the finger. Moreover, capacitance is also generated between one of the plurality of second electrodes **1641** and the finger. Accordingly, monitoring of the change in capacitance can specify which first electrode **1640** and which second electrode **1641** are closest to the finger; thus, the position touched by the finger can be detected.

(Example of Method for Manufacturing Transistor)

[0192] Next, an example of a method for manufacturing a transistor will be described.

[0193] First, as illustrated in FIG. **24A**, a gate layer **801** and an electrode layer **802** are formed over a substrate **800** having an insulating surface.

[0194] The gate layer **801** and the electrode layer **802** can be formed with a single-layer structure or a stacked structure using one or more of conductive films using a metal material such as molybdenum, titanium, chromium, tantalum, tungsten, neodymium, or scandium or an alloy material containing any of these metal materials as a main component, or nitride of these metals. Note that aluminum or copper can also be used as the metal material if it can withstand the temperature of heat treatment to be performed in a later step. Aluminum or copper is preferably combined with a refractory metal material so as to prevent problems of low heat resistance and corrosion. As the refractory metal material, molybdenum, titanium, chromium, tantalum, tungsten, neodymium, scandium, or the like can be used.

[0195] For example, as a two-layer structure of the gate layer **801** and the electrode layer **802**, the following structures are preferable: a two-layer structure in which a molybdenum film is stacked over an aluminum film, a two-layer structure in which a molybdenum film is stacked over a copper film, a two-layer structure in which a titanium nitride film or a tantalum nitride film is stacked over a copper film, and a two-layer structure in which a titanium nitride film and a molybdenum film are stacked. As a three-layer structure of the gate layer **801** and the electrode layer **802**, it is preferable to employ a stacked structure in which an aluminum film, an alloy film of aluminum and silicon, an alloy film of aluminum and titanium, or an alloy film of aluminum and neodymium is used as a middle layer and sandwiched between a top layer and a bottom layer of tungsten, tungsten nitride, titanium nitride, or titanium.

[0196] Further, a light-transmitting oxide conductive film of indium oxide, an alloy of indium oxide and tin oxide, an alloy of indium oxide and zinc oxide, zinc oxide, zinc alumi-

num oxide, zinc aluminum oxynitride, zinc gallium oxide, or the like can be used as the gate layer **801** and the electrode layer **802**.

[0197] The thickness of each of the gate layer **801** and the electrode layer **802** is 10 nm to 400 nm, preferably 100 nm to 200 nm. Here, after a 150-nm-thick conductive film for the gate electrode is formed by sputtering using a tungsten target, the conductive film is processed (patterned) into a desired shape by etching, so that the gate layer **801** and the electrode layer **802** are formed. The gate layer preferably has tapered edge because coverage of the gate layer with a gate insulating layer to be stacked thereover can be improved. Note that a resist mask may be formed by an inkjet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing costs can be reduced.

[0198] Next, as illustrated in FIG. 24B, a gate insulating layer **803** is formed over the gate layer **801** and the electrode layer **802**. The gate insulating layer **803** can be formed with a single-layer structure or a stacked structure of a silicon oxide film, a silicon nitride film, a silicon oxynitride film, a silicon nitride oxide film, an aluminum oxide film, an aluminum nitride film, an aluminum oxynitride film, an aluminum nitride oxide film, a hafnium oxide film, and/or a tantalum oxide film by plasma CVD, sputtering, or the like. It is preferable that the gate insulating layer **803** include impurities such as moisture, hydrogen, or oxygen as little as possible. In the case where a silicon oxide film is formed by sputtering, a silicon target or a quartz target is used as a target, and oxygen or a mixed gas of oxygen and argon is used as a sputtering gas.

[0199] An oxide semiconductor that becomes intrinsic (i-type) or substantially intrinsic by removal of impurities (a purified oxide semiconductor) is quite susceptible to the interface state density or interface charge; therefore, the interface between the purified oxide semiconductor and the gate insulating layer **803** is important. For that reason, the gate insulating layer (GI) that is in contact with the purified oxide semiconductor needs to have higher quality.

[0200] For example, high-density plasma CVD using microwaves (e.g., a frequency of 2.45 GHz) is preferably used because an insulating layer can be dense and have high withstand voltage and high quality. The purified oxide semiconductor and the high-quality gate insulating layer are in close contact with each other, so that the interface state density can be reduced to obtain favorable interface characteristics.

[0201] Needless to say, another film formation method such as sputtering or plasma CVD can be employed as long as the method enables formation of a good-quality insulating layer as a gate insulating layer. Moreover, it is possible to form an insulating layer whose quality as a gate insulating layer and characteristics of an interface with the oxide semiconductor are improved through heat treatment performed after the formation of the insulating layer. In any case, any insulating layer can be used as long as it can reduce the interface state density between the gate insulating layer and the oxide semiconductor and form a favorable interface as well as having good film quality as the gate insulating layer.

[0202] The gate insulating layer **803** may have a structure in which an insulating layer formed using a material with high barrier properties and an insulating layer with a low nitrogen content, such as a silicon oxide film or a silicon oxynitride film, are stacked. In that case, the insulating layer such as a silicon oxide film or a silicon oxynitride film is formed between the insulating layer having high barrier properties and an oxide semiconductor layer. Examples of the insulating

layer having high barrier properties are a silicon nitride film, a silicon nitride oxide film, an aluminum nitride film, and an aluminum nitride oxide film. With an insulating layer having high barrier properties, impurities in an atmosphere, such as moisture or hydrogen, or impurities included in the substrate, such as an alkali metal or a heavy metal, can be prevented from entering the oxide semiconductor layer, the gate insulating layer **803**, or the interface between the oxide semiconductor layer and another insulating layer and the vicinity thereof. In addition, by forming the insulating layer with a low nitrogen content, such as a silicon oxide film or a silicon oxynitride film, so as to be in contact with the oxide semiconductor layer, the insulating layer having high barrier properties can be prevented from being in direct contact with the oxide semiconductor layer.

[0203] For example, a 100-nm-thick gate insulating layer **803** may be formed as follows: a silicon nitride film (SiN_y , ($y>0$)) with a thickness of 50 nm to 200 nm is formed by sputtering as a first gate insulating layer, and a silicon oxide film (SiO_x , ($x>0$)) with a thickness 5 nm to 300 nm is stacked over the first gate insulating layer as a second gate insulating layer. The thickness of the gate insulating layer **803** may be set as appropriate depending on characteristics needed for a transistor and may be approximately 350 nm to 400 nm.

[0204] Here, the gate insulating layer **803** in which a 100-nm-thick silicon oxide film formed by sputtering is stacked over a 50-nm-thick silicon nitride film formed by sputtering is formed.

[0205] In order for the gate insulating layer **803** to contain hydrogen, a hydroxyl group, and moisture as little as possible, it is preferable that an impurity adsorbed on the substrate **800**, such as moisture or hydrogen, be eliminated and removed by preheating the substrate **800**, over which the gate layer **801** and the electrode layer **802** are formed, in a preheating chamber of a sputtering apparatus, as a pretreatment for film formation. The temperature for the preheating is 100° C. to 400° C., preferably, 150° C. to 300° C. As an exhaustion unit provided in the preheating chamber, a cryopump is preferably used. Note that this preheating treatment can be omitted.

[0206] Next, an oxide semiconductor layer having a thickness of 2 nm to 200 nm, preferably 3 nm to 50 nm, further preferably 3 nm to 20 nm is formed over the gate insulating layer **803**. The oxide semiconductor layer is formed by sputtering using an oxide semiconductor target. Moreover, the oxide semiconductor layer can be formed by sputtering in a rare gas (e.g., argon) atmosphere, an oxygen atmosphere, or a mixed atmosphere including a rare gas (e.g., argon) and oxygen.

[0207] Note that before the oxide semiconductor layer is formed by sputtering, dust attached to a surface of the gate insulating layer **803** is preferably removed by reverse sputtering in which an argon gas is introduced and plasma is generated. The reverse sputtering is a method by which without application of voltage to a target side, voltage is applied to a substrate side with an RF power source in an argon atmosphere so that plasma is generated in the vicinity of the substrate to modify a surface. Note that instead of an argon atmosphere, a nitrogen atmosphere, a helium atmosphere, or the like may be used. Alternatively, an argon atmosphere to which oxygen, nitrous oxide, or the like is added; or an argon atmosphere to which chlorine, carbon tetrafluoride, or the like is added may be used.

[0208] As described above, the oxide semiconductor layer can be formed using any of the following oxide semiconduc-

tors: an In—Sn—Ga—Zn—O-based oxide semiconductor which is an oxide of four metal elements; an In—Ga—Zn—O-based oxide semiconductor, an In—Sn—Zn—O-based oxide semiconductor, an In—Al—Zn—O-based oxide semiconductor, a Sn—Ga—Zn—O-based oxide semiconductor, an Al—Ga—Zn—O-based oxide semiconductor, and a Sn—Al—Zn—O-based oxide semiconductor which are oxides of three metal elements; an In—Ga—O-based oxide semiconductor, an In—Zn—O-based oxide semiconductor, a Sn—Zn—O-based oxide semiconductor, an Al—Zn—O-based oxide semiconductor, a Zn—Mg—O-based oxide semiconductor, a Sn—Mg—O-based oxide semiconductor, and an In—Mg—O-based oxide semiconductor which are oxides of two metal elements; and an In—O-based oxide semiconductor, a Sn—O-based oxide semiconductor, and a Zn—O-based oxide semiconductor which are oxides of one metal element. The above oxide semiconductors may include silicon oxide.

[0209] As the oxide semiconductor layer, a thin film represented by $\text{InMO}_3(\text{ZnO})_m$ ($m > 0$) can be used. Here, M represents one or more metal elements selected from Ga, Al, Mn, and Co. For example, M can be Ga, Ga and Al, Ga and Mn, or Ga and Co.

[0210] Here, as the oxide semiconductor layer, a 30-nm-thick In—Ga—Zn—O-based non-single-crystal film obtained by sputtering using a metal oxide target containing indium (In), gallium (Ga), and zinc (Zn) is used. As the target, a metal oxide target having a composition ratio of In:Ga:Zn=1:1:0.5, In:Ga:Zn=1:1:1, or In:Ga:Zn=1:1:2 can be used, for example. The target may contain SiO_2 at 2 wt % to 10 wt %. The filling rate of the metal oxide target containing In, Ga, and Zn is 90% to 100%, preferably 95% to 100%. By using the metal oxide target with a high filling rate, a dense oxide semiconductor layer is formed.

[0211] Here, the oxide semiconductor layer is formed over the substrate **800** in such a manner that the substrate is held in the treatment chamber kept at reduced pressure, a sputtering gas from which hydrogen and moisture have been removed is introduced into the treatment chamber while moisture remaining therein is removed, and the above-described target is used. The substrate temperature may be 100° C. to 600° C., preferably 200° C. to 400° C. in film formation. By heating the substrate during film formation, the impurity concentration in the oxide semiconductor layer formed can be reduced. In addition, damage by sputtering can be reduced. In order to remove remaining moisture in the treatment chamber, an entrapment vacuum pump is preferably used. For example, a cryopump, an ion pump, or a titanium sublimation pump is preferably used. The evacuation unit may be a turbo pump provided with a cold trap. In the treatment chamber which is evacuated with the cryopump, for example, a hydrogen atom, a compound containing a hydrogen atom, such as water (H_2O) (more preferably, also a compound containing a carbon atom), and the like are removed, whereby the impurity concentration in the oxide semiconductor layer formed in the treatment chamber can be reduced.

[0212] As one example of the deposition conditions, the distance between the substrate and the target is 100 mm, the pressure is 0.6 Pa, the direct-current (DC) power source is 0.5 kW, and the atmosphere is an oxygen atmosphere (the proportion of the oxygen flow rate is 100%). Note that a pulsed direct-current (DC) power source is preferable because pow-

der substances (referred to as particles) generated in film deposition can be reduced and the film thickness can be uniform.

[0213] In order that the oxide semiconductor layer does not to contain impurities such as hydrogen, a hydroxyl group, or moisture as little as possible, it is preferable to preheat the substrate **800** provided with the gate insulating layer **803** in a preheating chamber of the sputtering apparatus before the film formation so that impurities such as moisture or hydrogen adsorbed on the substrate **800** is eliminated and removed. The temperature for the preheating is 100° C. to 400° C., preferably 150° C. to 300° C. As an exhaustion unit provided in the preheating chamber, a cryopump is preferably used. Note that this preheating treatment can be omitted. In addition, before an insulating layer **808** is formed, the preheating may similarly be performed on the substrate **800** over which layers up to and including a source layer **805**, a drain layer **806**, and an electrode layer **807** are formed.

[0214] Next, as illustrated in FIG. 24B, the oxide semiconductor layer is processed (patterned) into a desired shape by etching or the like, so that an island-shaped oxide semiconductor layer **804** is formed over the gate insulating layer **803** to overlap with the gate layer **801**.

[0215] A resist mask for forming the island-shaped semiconductor layer **804** may be formed by an inkjet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing costs can be reduced.

[0216] Note that etching for forming the island-shaped oxide semiconductor layer **804** may be wet etching, dry etching, or both dry etching and wet etching. As an etching gas used for dry etching, a gas containing chlorine (a chlorine-based gas such as chlorine (Cl_2), boron trichloride (BCl_3), silicon tetrachloride (SiCl_4), or carbon tetrachloride (CCl_4)) is preferably used. Alternatively, a gas containing fluorine (a fluorine-based gas such as carbon tetrafluoride (CF_4), sulfur hexafluoride (SF_6), nitrogen trifluoride (NF_3), or trifluoromethane (CHF_3)), hydrogen bromide (HBr), oxygen (O_2), any of these gases to which a rare gas such as helium (He) or argon (Ar) is added, or the like can be used.

[0217] For dry etching, a parallel plate RIE (reactive ion etching) method or an ICP (inductively coupled plasma) etching method can be used. In order to etch the films into desired shapes, the etching conditions (the amount of power applied to a coil-shaped electrode, the amount of power applied to an electrode on the substrate side, and the temperature of the electrode on the substrate side) are adjusted as appropriate.

[0218] As an etchant used for wet etching, ITO-07N (produced by Kanto Chemical Co., Inc.) is used. After the wet etching, the etchant is removed together with the etched materials by cleaning. The waste liquid including the etchant and the material etched off may be purified and the material may be reused. When a material such as indium contained in the oxide semiconductor layer is collected from the waste liquid after the etching and reused, the resources can be efficiently used and the costs can be reduced.

[0219] Note that it is preferable that reverse sputtering be performed before a conductive film is formed in a subsequent step, in order to remove a resist residue or the like attached to surfaces of the island-shaped oxide semiconductor layer **804** and the gate insulating layer **803**.

[0220] Then, heat treatment is performed on the oxide semiconductor layer **804** in a nitrogen atmosphere, an oxygen atmosphere, an atmosphere of ultra-dry air (air in which the water content is 20 ppm or less, preferably 1 ppm or less,

further preferably 10 ppb or less), or a rare gas (e.g., argon or helium) atmosphere. Heat treatment performed on the oxide semiconductor layer **804** can eliminate moisture or hydrogen in the oxide semiconductor layer **804**. Specifically, heat treatment may be performed at 350° C. to 850° C. (or the strain point of a glass substrate), preferably 550° C. to 750° C. For example, heat treatment can be performed at 600° C. for about 3 to 6 minutes. Since dehydration or dehydrogenation can be performed in a short time with an RTA method, heat treatment can be performed even at a temperature over the strain point of a glass substrate. Alternatively, heat treatment may be performed for about one hour in a state where the substrate temperature reaches 450° C.

[0221] Here, the oxide semiconductor layer **804** is subjected to the heat treatment in a nitrogen atmosphere with the use of an electric furnace which is one example of a heat treatment apparatus.

[0222] Note that a heat treatment apparatus is not limited to an electrical furnace, and may include a device for heating an object to be processed by heat conduction or heat radiation from a heating element such as a resistance heating element. For example, an RTA (rapid thermal anneal) apparatus such as a GRTA (gas rapid thermal anneal) apparatus or an LRTA (lamp rapid thermal anneal) apparatus can be used. An LRTA apparatus is an apparatus for heating an object by radiation of light (an electromagnetic wave) emitted from a lamp such as a halogen lamp, a metal halide lamp, a xenon arc lamp, a carbon arc lamp, a high pressure sodium lamp, or a high pressure mercury lamp. A GRTA apparatus is an apparatus for heat treatment using a high-temperature gas. As the gas, an inert gas which does not react with an object by heat treatment, such as nitrogen or a rare gas (e.g., argon) is used.

[0223] For example, as the heat treatment, GRTA in which the substrate is moved into an inert gas heated at a high temperature of 650° C. to 700° C., heated for several minutes, and moved out of the inert gas heated to the high temperature may be performed. With GRTA, high-temperature heat treatment in a short period of time can be achieved.

[0224] Note that it is preferable that in the heat treatment, moisture, hydrogen, or the like be not contained in nitrogen or a rare gas such as helium, neon, or argon. It is preferable that the purity of nitrogen or the rare gas such as helium, neon, or argon which is introduced into a heat treatment apparatus be set to be 6N (99.9999%) or higher, preferably 7N (99.99999%) or higher (i.e., the impurity concentration is 1 ppm or lower, preferably 0.1 ppm or lower).

[0225] When impurities such as moisture or hydrogen is added to an oxide semiconductor, in a gate bias-temperature stress test (BT test, the test condition is, for example, at 85° C. with 2×10^6 V/cm for 12 hours), a bond between the impurities and a main component of the oxide semiconductor is broken by a high electric field (B: bias) and high temperature (T: temperature), and a dangling bond generated causes shift of the threshold voltage (V_{th}). However, in the above manner, characteristics of the interface between the gate insulating layer and the oxide semiconductor layer are improved and impurities in the oxide semiconductor layer, particularly moisture and hydrogen, are removed as much as possible; thus, a transistor that can be stable even in a BT test can be obtained.

[0226] Through the above process, the concentration of hydrogen in the oxide semiconductor layer **804** can be reduced and the oxide semiconductor layer can be purified. Accordingly, the oxide semiconductor layer can be stable. In

addition, heat treatment at a temperature which is lower than or equal to the glass transition temperature makes it possible to form an oxide semiconductor layer with extremely low carrier density and a wide band gap. Therefore, a transistor can be manufactured using a large substrate, so that the productivity can be increased. Moreover, by using the purified oxide semiconductor layer with a reduced hydrogen concentration, it is possible to form a transistor with high withstand voltage, reduced short-channel effect, and a high on/off ratio.

[0227] Note that in the case where the oxide semiconductor layer is heated, depending on a material or heating conditions of the oxide semiconductor layer, plate-shaped crystals are sometimes formed on the top surface of the oxide semiconductor layer. The plate-shaped crystals are preferably single crystals that are oriented in the c-axis (the direction generally perpendicular to the surface of the oxide semiconductor layer). If the plate-shaped crystals are not single crystals, they are preferably polycrystals where a-b planes of the crystals are aligned or the a-axes or the b-axes are aligned in the channel formation region and the crystals are oriented in the c-axis (the direction substantially perpendicular to the surface of the oxide semiconductor layer). Note that in the case where a surface of the layer placed below the oxide semiconductor layer is uneven, the plate-shaped crystals are polycrystals; therefore, the surface of the layer placed below the oxide semiconductor layer is preferably as even as possible.

[0228] Next, a conductive film used for the source layer and the drain layer (including a wiring formed using the same layer as the source and drain layers) is formed over the oxide semiconductor layer **804** by sputtering or vacuum evaporation. Then, the conductive film is patterned by etching or the like, thereby forming the source layer **805** and the drain layer **806** over the oxide semiconductor layer **804**, and the wiring layer **807** that overlaps with the electrode layer **802** with the gate insulating layer **803** placed therebetween, as illustrated in FIG. 24C.

[0229] Examples of the material for the conductive film which serves as the source layer **805**, the drain layer **806**, and the electrode layer **807** (including the wiring formed using the same layer as those layers) are an element selected from Al, Cr, Cu, Ta, Ti, Mo, and W; an alloy including any of the above elements as a component; and an alloy including any of these elements in combination. The conductive film may have a structure in which a refractory metal film of Cr, Ta, Ti, Mo, W, or the like is stacked on one or both of a top surface and a bottom surface of a metal layer of Al, Cu, or the like. Furthermore, the heat resistance can be increased by using an aluminum material to which an element that prevents generation of hillocks and whiskers in an aluminum film, such as Si, Ti, Ta, W, Mo, Cr, Nd, Sc, or Y, is added.

[0230] Further, the conductive film may have a single-layer structure or a stacked structure of two or more layers. For example, the conductive film can have a single-layer structure of an aluminum film containing silicon; a two-layer structure in which a titanium film is stacked over an aluminum film; or a three-layer structure in which a titanium film, an aluminum film, and a titanium film are stacked in this order.

[0231] The conductive film which serves as the source layer **805**, the drain layer **806**, and the electrode layer **807** (including the wiring layer formed using the same layer as these layers) may be formed using a conductive metal oxide. As the conductive metal oxide, indium oxide (In_2O_3), tin oxide (SnO_2), zinc oxide (ZnO), an alloy of indium oxide and tin oxide ($\text{In}_2\text{O}_3\text{—SnO}_2$, referred to as ITO), an alloy of indium

oxide and zinc oxide ($\text{In}_2\text{O}_3\text{—ZnO}$), or any of the metal oxide materials containing silicon or silicon oxide can be used.

[0232] In the case where heat treatment is performed after formation of the conductive film, the conductive film preferably has heat resistance enough to withstand the heat treatment.

[0233] Note that materials and etching conditions are adjusted as appropriate so that the oxide semiconductor layer 804 is not removed in etching of the conductive film as much as possible. Depending on the etching conditions, a groove (a recessed portion) is sometimes formed by etching of part of an exposed portion of the island-shaped oxide semiconductor layer 804.

[0234] In order to reduce the number of photomasks and steps in a photolithography step, etching may be performed with the use of a resist mask formed using a multi-tone mask which is a light-exposure mask through which light is transmitted to have a plurality of intensities. A resist mask formed using a multi-tone mask has a plurality of thicknesses and further can be changed in shape by etching; therefore, the resist mask can be used in a plurality of etching steps for processing into different patterns. Therefore, a resist mask corresponding to at least two kinds of different patterns can be formed by one multi-tone mask. Thus, the number of light-exposure masks can be reduced and the number of corresponding photolithography steps can be also reduced, so that the process can be simplified.

[0235] Next, plasma treatment is performed using a gas such as N_2O , N_2 , or Ar. By this plasma treatment, absorbed water and the like attached to an exposed surface of the oxide semiconductor layer are removed. Alternatively, plasma treatment may be performed using a mixture gas of oxygen and argon.

[0236] After the plasma treatment, as illustrated in FIG. 24D, an insulating layer 808 is formed so as to cover the source layer 805, the drain layer 806, the electrode layer 807, and the oxide semiconductor layer 804. The insulating layer 808 preferably contains impurities such as moisture, hydrogen, and oxygen as little as possible, and may be formed using a single insulating layer or a stack of a plurality of insulating layers. If hydrogen is contained in the insulating layer 808, hydrogen might enter the oxide semiconductor layer or extract oxygen from the oxide semiconductor layer, thereby causing reduction in resistance of a back channel portion of the oxide semiconductor layer (making the back channel portion have n-type conductivity), which might result in formation of parasitic channel. Therefore, it is important that the insulating layer 808 be formed by a method that does not use hydrogen so that the insulating layer 808 contains as little hydrogen as possible. The insulating layer 808 is preferably formed using a material with high barrier properties. For example, as an insulating film with high barrier properties, the insulating film having a high barrier property, a silicon nitride film, a silicon nitride oxide film, an aluminum nitride film, an aluminum nitride oxide film, or the like can be used. When a plurality of insulating films stacked is used, an insulating layer with a low content nitrogen, such as a silicon oxide film or a silicon oxynitride film, is formed on the side closer to the oxide semiconductor layer 804 than the insulating layer with high barrier properties. Then, the insulating layer with high barrier properties is formed so as to overlap with the source layer 805, the drain layer 806, and the oxide semiconductor layer 804 with the insulating layer with a low content of nitrogen placed therebetween. By using the insulating layer

with high barrier properties, impurities such as moisture or hydrogen can be prevented from entering the oxide semiconductor layer 804, the gate insulating layer 803, or the interface between the oxide semiconductor layer 804 and another insulating layer and the vicinity thereof. In addition, when the insulating layer with a low content of nitrogen, such as a silicon oxide film or a silicon oxynitride film, is formed in contact with the oxide semiconductor layer 804, the insulating layer formed using a material with high barrier properties can be prevented from being directly in contact with the oxide semiconductor layer 804.

[0237] Here, the gate insulating layer 808 in which a 100-nm-thick silicon nitride film formed by sputtering is stacked over a 200-nm-thick silicon oxide film formed by sputtering is formed. The substrate temperature at the time of deposition can be from room temperature to 300° C. or lower and is 100° C. in this embodiment.

[0238] Note that heat treatment may be performed after the insulating layer 808 is formed. The heat treatment is performed at preferably 200° C. to 400° C. (e.g., 250° C. to 350° C.) in a nitrogen atmosphere, an oxygen atmosphere, an atmosphere of ultra-dry air (air in which the water content is 20 ppm or less, preferably 1 ppm or less, further preferably 10 ppb or less), or a rare gas (e.g., argon or helium) atmosphere. Here, for example, heat treatment is performed at 250° C. for 1 hour in a nitrogen atmosphere. Alternatively, before the source layer 805, the drain layer 806, and the electrode layer 807 are formed, RTA treatment at high temperatures for a short time may be performed in a manner similar to the previous heat treatment performed on the oxide semiconductor layer. Even if oxygen vacancy is created in the oxide semiconductor layer 804 because of the heat treatment performed on the oxide semiconductor layer, oxygen is supplied to the oxide semiconductor layer 804 when heat treatment is performed after the insulating layer 808 containing oxygen is provided in contact with an exposed region of the oxide semiconductor layer 804 placed between the source layer 805 and the drain layer 806. Accordingly, by supplying oxygen to the region of the oxide semiconductor layer 804 which is in contact with the insulating layer 808, oxygen vacancies serving as donors can be reduced and the stoichiometric composition ratio can be satisfied. As a result, the oxide semiconductor layer 804 can be made to be an intrinsic semiconductor layer or a substantially intrinsic semiconductor layer. As a result, an oxide semiconductor film can be made to be an intrinsic semiconductor film or a substantially intrinsic semiconductor film. Accordingly, electric characteristics of the transistor can be improved and variation in the electric characteristics thereof can be reduced. The timing of this heat treatment is not particularly limited as long as it is after the formation of the insulating layer 808. When this heat treatment also serves as heat treatment in another step (e.g., heat treatment at the time of formation of a resin film or heat treatment for reducing the resistance of a transparent conductive film), the oxide semiconductor layer 804 can be intrinsic or substantially intrinsic without an increase in the number of steps.

[0239] Next, a conductive film may be formed over the insulating layer 808 and patterned so that a back gate layer may be formed so as to overlap with the oxide semiconductor layer 804. In the case where the back gate layer is formed, an insulating layer is formed so as to cover the back gate layer. The back gate layer can be formed using a material and a structure which are similar to those of the gate layer 801 and

the electrode layer **802** or those of the source layer **805**, the drain layer **806**, and the electrode layer **807**.

[0240] The thickness of the back gate layer is 10 nm to 400 nm, preferably 100 nm to 200 nm. Here, the back gate layer is formed in the following manner: a conductive film in which a titanium film, an aluminum film, and a titanium film are stacked is formed, a resist mask is formed by photolithography or the like, and unnecessary portions are removed by etching so that the conductive film is processed (patterned) to a desired shape.

[0241] The insulating layer is preferably formed using a material with high barrier properties that can prevent moisture, hydrogen, oxygen, and the like in an atmosphere from adversely affecting the characteristics of the transistor. For example, the insulating layer with high barrier properties can be formed with a single-layer structure or a stacked structure of a silicon nitride film, a silicon nitride oxide film, an aluminum nitride film, an aluminum nitride oxide film, and/or the like by plasma CVD, sputtering, or the like. In order to obtain an effect of barrier properties, the insulating layer is preferably formed to a thickness of 15 nm to 400 nm, for example.

[0242] Here, a 300-nm-thick insulating layer is formed by plasma CVD. The deposition conditions for the insulating layer are as follows: the flow rate of a silane gas is 4 sccm; the flow rate of dinitrogen monoxide (N_2O) is 800 sccm; and the substrate temperature is 400° C.

[0243] Through the above steps, a transistor **809** and a capacitor **810** are formed. Note that the capacitor **810** is formed in a region where the electrode layer **807** overlaps with the electrode layer **802** with the gate insulating layer **803** placed therebetween.

[0244] The transistor **809** includes the gate layer **801**, the gate insulating layer **803** over the gate layer **801**, the oxide semiconductor layer **804** that overlaps with the gate layer **801** with the gate insulating layer **803** placed therebetween, and the source layer **805** and the drain layer **806** that are formed over the oxide semiconductor layer **804**. The transistor **809** may further include the insulating layer **808** provided over the oxide semiconductor layer **804** as its component. The transistor **809** illustrated in FIG. 24D has a channel-etched structure in which part of the oxide semiconductor layer **804** between the source layer **805** and the drain layer **806** is etched.

[0245] Note that the transistor **809** is described as a single-gate transistor; alternatively, a multi-gate transistor including a plurality of channel formation regions by including a plurality of the gate layers **801** that are electrically connected to each other can be manufactured if needed.

(Various Electronic Devices Including Liquid Crystal Display Device)

[0246] Examples of electronic devices including any of the liquid crystal display devices disclosed in this specification will be described below with reference to FIGS. 25A to 25F.

[0247] FIG. 25A illustrates a notebook personal computer including a main body **2201**, a housing **2202**, a display portion **2203**, a keyboard **2204**, and the like.

[0248] FIG. 25B illustrates a personal digital assistant (PDA). A main body **2211** is provided with a display portion **2213**, an external interface **2215**, operation buttons **2214**, and the like. A stylus **2212** is provided as an accessory for operating the PDA.

[0249] FIG. 25C illustrates an e-book reader **2220** as an example of electronic paper. The e-book reader **2220** includes

two housings of a housing **2221** and a housing **2223**. The housings **2221** and **2223** are united with an axis portion **2237**, along which the e-book reader **2220** can be opened and closed. With such a structure, the e-book reader **2220** can be used like a paper book.

[0250] A display portion **2225** is incorporated in the housing **2221**, and a display portion **2227** is incorporated in the housing **2223**. The display portion **2225** and the display portion **2227** may display one image or different images. In the case where the display portions **2225** and **2227** display different images, for example, the right display portion (the display portion **2225** in FIG. 25C) can display text and the left display portion (the display portion **2227** in FIG. 25C) can display pictures.

[0251] Further, in FIG. 25C, the housing **2221** is provided with an operation portion and the like. For example, the housing **2221** is provided with a power switch **2231**, an operation key **2233**, and a speaker **2235**. Pages can be turned with the operation key **2233**. Note that a keyboard, a pointing device, or the like may also be provided on the surface of the housing, on which the display portion is provided. An external connection terminal (e.g., an earphone terminal, a USB terminal, or a terminal that can be connected to an AC adapter or various cables such as a USB cable), a recording medium insertion portion, and the like may be provided on the back surface or the side surface of the housing. Further, the e-book reader **2220** may have a function of an electronic dictionary.

[0252] The e-book reader **2220** may be configured to transmit and receive data wirelessly. Through wireless communication, desired book data or the like can be purchased and downloaded from an e-book server.

[0253] Note that electronic paper can be applied to devices in a variety of fields as long as they display data. For example, electronic paper can be used for posters, advertisement in vehicles such as trains, and display in a variety of cards such as credit cards in addition to e-book readers.

[0254] FIG. 25D illustrates a mobile phone. The mobile phone includes two housings of a housing **2240** and a housing **2241**. The housing **2241** is provided with a display panel **2242**, a speaker **2243**, a microphone **2244**, a pointing device **2246**, a camera lens **2247**, an external connection terminal **2248**, and the like. The housing **2240** is provided with a solar cell **2249** for charging the mobile phone, an external memory slot **2250**, and the like. An antenna is incorporated in the housing **2241**.

[0255] The display panel **2242** has a touch panel function. In FIG. 25D, a plurality of operation keys **2245** displayed as images are shown by dashed lines. Note that the mobile phone includes a booster circuit for increasing a voltage output from the solar cell **2249** to a voltage needed for each circuit. Moreover, the mobile phone can include a contactless IC chip, a small recording device, or the like in addition to the above components.

[0256] The display orientation of the display panel **2242** changes as appropriate in accordance with the application mode. Further, the camera lens **2247** is provided on the same surface as the display panel **2242**, so that the mobile phone can be used as a video phone. The speaker **2243** and the microphone **2244** can be used for videophone calls, recording, playing sound, and the like as well as voice calls. The housings **2240** and **2241** which are unfolded as illustrated in FIG. 25D can slide so that one overlaps the other. Thus, the size of the mobile phone can be reduced, which makes the mobile phone suitable for being carried.

[0257] The external connection terminal **2248** can be connected to an AC adapter or a variety of cables such as a USB cable, which enables charging of the mobile phone and data communication. Moreover, a larger amount of data can be saved and moved by inserting a recording medium to the external memory slot **2250**. Further, the mobile phone may have an infrared communication function, a television reception function, or the like in addition to the above functions.

[0258] FIG. 25E illustrates a digital camera. The digital camera includes a main body **2261**, a display portion (A) **2267**, an eyepiece **2263**, an operation switch **2264**, a display portion (B) **2265**, a battery **2266**, and the like.

[0259] FIG. 25F illustrates a television set. In a television set **2270**, a display portion **2273** is incorporated in a housing **2271**. The display portion **2273** can display images. Here, the housing **2271** is supported by a stand **2275**.

[0260] The television set **2270** can be operated by an operation switch of the housing **2271** or a separate remote controller **2280**. With operation keys **2279** of the remote controller **2280**, channels and volume can be controlled and an image displayed on the display portion **2273** can be controlled. Moreover, the remote controller **2280** may have a display portion **2277** that displays data output from the remote controller **2280**.

[0261] Note that the television set **2270** is preferably provided with a receiver, a modem, and the like. A general television broadcast can be received with the receiver. Moreover, when the television set is connected to a communication network with or without wires via the modem, one-way (from a sender to a receiver) or two-way (between a sender and a receiver or between receivers) data communication can be performed.

[0262] This application is based on Japanese Patent Application serial No. 2010-090935 and 2010-114435 filed with Japan Patent Office on Apr. 9, 2010 and May 18, 2010, respectively, the entire contents of which are hereby incorporated by reference.

1. A display device comprising:

- a first signal line provided so as to be supplied with a first image signal in a first horizontal scan period which is included in a first sampling period, and supplied with a second image signal in a second horizontal scan period which is included in a second sampling period;
- a second signal line provided so as to be supplied with a third image signal in the first horizontal scan period, and supplied with a fourth image signal in the second horizontal scan period;
- a first scan line and a second scan line which are provided so as to be supplied with a selection signal in the first horizontal scan period, and supplied with a non-selection signal in the second horizontal scan period;
- a third scan line and a fourth scan line which are provided so as to be supplied with a non-selection signal in the first horizontal scan period, and supplied with a selection signal in the second horizontal scan period;
- a first pixel electrically connected to the first signal line, the second signal line, the first scan line, and the third scan line, wherein the first pixel is provided so as to be supplied with the first image signal in the first horizontal scan period, and supplied with the fourth image signal in the second horizontal scan period;
- a second pixel electrically connected to the first signal line, the second signal line, the second scan line, and the fourth scan line, wherein the second pixel is provided so

as to be supplied with the third image signal in the first horizontal scan period, and supplied with the second image signal in the second horizontal scan period;

a first shift register configured to supply a selection signal to the first scan line in the first horizontal scan period and supply a selection signal to the fourth scan line in the second horizontal scan period; and

a second shift register configured to supply a selection signal to the second scan line in the first horizontal scan period and supply a selection signal to the third scan line in the second horizontal scan period.

2. The display device according to claim 1,

wherein the first pixel includes:

a first transistor, wherein a gate of the first transistor is electrically connected to the first scan line, and one of a source and a drain of the first transistor is electrically connected to the first signal line;

a second transistor, wherein a gate of the second transistor is electrically connected to the third scan line, and one of a source and a drain of the second transistor is electrically connected to the second signal line; and

a first liquid crystal element, wherein one electrode of the first liquid crystal element is electrically connected to the other of the source and the drain of the first transistor and the other of the source and the drain of the second transistor,

wherein the second pixel includes:

a third transistor, wherein a gate of the third transistor is electrically connected to the fourth scan line, and one of a source and a drain of the third transistor is electrically connected to the first signal line;

a fourth transistor, wherein a gate of the fourth transistor is electrically connected to the second scan line, and one of a source and a drain of the fourth transistor is electrically connected to the second signal line; and

a second liquid crystal element, wherein one electrode of the second liquid crystal element is electrically connected to the other of the source and the drain of the third transistor and the other of the source and the drain of the fourth transistor, and

wherein each of the first to fourth transistors includes a channel formation region including an oxide semiconductor.

3. The display device according to claim 1, wherein each of the first shift register and the second shift register includes a transistor which includes a channel formation region including an oxide semiconductor.

4. A display device comprising:

a first signal line provided so as to be supplied with a first image signal in a first horizontal scan period which is included in a first sampling period, supplied with a second image signal in a second horizontal scan period which is included in a second sampling period, and supplied with a third image signal in a third horizontal scan period which is included in a third sampling period;

a second signal line provided so as to be supplied with a fourth image signal in the first horizontal scan period, supplied with a fifth image signal in the second horizontal scan period, and supplied with a sixth image signal in the third horizontal scan period;

a third signal line provided so as to be supplied with a seventh image signal in the first horizontal scan period, supplied with an eighth image signal in the second hori-

zontal scan period, and supplied with a ninth image signal in the third horizontal scan period;
 a first scan line, a fifth scan line, and a ninth scan line which are provided so as to be supplied with a selection signal in the first horizontal scan period;
 a third scan line, a fourth scan line, and an eighth scan line which are provided so as to be supplied with a selection signal in the second horizontal scan period;
 a second scan line, a sixth scan line, and a seventh scan line which are provided so as to be supplied with a selection signal in the third horizontal scan period;
 a first pixel electrically connected to the first signal line, the second signal line, the third signal line, the first scan line, the second scan line, and the third scan line,
 a second pixel electrically connected to the first signal line, the second signal line, the third signal line, the fourth scan line, the fifth scan line, and the sixth scan line,
 a third pixel electrically connected to the first signal line, the second signal line, the third signal line, the seventh scan line, the eighth scan line, and the ninth scan line,
 a first shift register electrically connected to the first scan line, the fourth scan line, and the seventh scan line;
 a second shift register electrically connected to the second scan line, the fifth scan line, and the eighth scan line; and
 a third shift register electrically connected to the third scan line, the sixth scan line, and the ninth scan line.

5. The display device according to claim 4,

wherein the first pixel comprises:

- a first transistor, wherein a gate of the first transistor is electrically connected to the first scan line, and one of a source and a drain of the first transistor is electrically connected to the first signal line;
- a second transistor, wherein a gate of the second transistor is electrically connected to the second scan line, and one of a source and a drain of the second transistor is electrically connected to the second signal line;
- a third transistor, wherein a gate of the third transistor is electrically connected to the third scan line, and one of a source and a drain of the third transistor is electrically connected to the third signal line; and
- a first liquid crystal element, wherein one of electrodes of the first liquid crystal element is electrically connected to the other of the source and the drain of the first transistor, the other of the source and the drain of the second transistor, and the other of the source and the drain of the third transistor,

wherein the second pixel comprises:

- a fourth transistor, wherein a gate of the fourth transistor is electrically connected to the fourth scan line, and one of a source and a drain of the fourth transistor is electrically connected to the first signal line;
- a fifth transistor, wherein a gate of the fifth transistor is electrically connected to the fifth scan line, and one of a source and a drain of the fifth transistor is electrically connected to the second signal line;
- a sixth transistor, wherein a gate of the sixth transistor is electrically connected to the sixth scan line, and one of a source and a drain of the sixth transistor is electrically connected to the third signal line; and
- a second liquid crystal element, wherein one of electrodes of the second liquid crystal element is electrically connected to the other of the source and the drain of the fourth transistor, the other of the source and the

drain of the fifth transistor, and the other of the source and the drain of the sixth transistor, and

wherein the third pixel comprises:

- a seventh transistor, wherein a gate of the seventh transistor is electrically connected to the seventh scan line, and one of a source and a drain of the seventh transistor is electrically connected to the first signal line;
 - an eighth transistor, wherein a gate of the eighth transistor is electrically connected to the eighth scan line, and one of a source and a drain of the eighth transistor is electrically connected to the second signal line;
 - a ninth transistor, wherein a gate of the ninth transistor is electrically connected to the ninth scan line, and one of a source and a drain of the ninth transistor is electrically connected to the third signal line; and
 - a third liquid crystal element, wherein one of electrodes of the third liquid crystal element is electrically connected to the other of the source and the drain of the seventh transistor, the other of the source and the drain of the eighth transistor, and the other of the source and the drain of the ninth transistor,
- wherein each of the first to ninth transistors includes a channel formation region including an oxide semiconductor.

6. The display device according to claim 4, wherein each of the first shift register and the second shift register includes a transistor which includes a channel formation region including an oxide semiconductor.

7. A display device comprising:

- a first signal line provided so as to be supplied with a first image signal in a first horizontal scan period which is included in a first sampling period, and supplied with a second image signal in a second horizontal scan period which is included in a second sampling period;
- a second signal line provided so as to be supplied with a third image signal in the first horizontal scan period, and supplied with a fourth image signal in the second horizontal scan period;
- a first scan line and a second scan line which are provided so as to be supplied with a selection signal in the first horizontal scan period and the second horizontal scan period;
- a first pixel electrically connected to the first signal line and the first scan line, wherein the first pixel is provided so as to be supplied with the first image signal in the first horizontal scan period, and supplied with the second image signal in the second horizontal scan period;
- a second pixel electrically connected to the second signal line and the second scan line, wherein the second pixel is provided so as to be supplied with the third image signal in the first horizontal scan period, and supplied with the fourth image signal in the second horizontal scan period;
- a first shift register configured to supply a selection signal to the first scan line in the first horizontal scan period and the second horizontal scan period; and
- a second shift register configured to supply a selection signal to the second scan line in the first horizontal scan period and the second horizontal scan period.

8. The display device according to claim 7,

wherein the first pixel includes:

- a first transistor, wherein a gate of the first transistor is electrically connected to the first scan line, and one of a source and a drain of the first transistor is electrically connected to the first signal line; and

a first liquid crystal element, wherein one electrode of the first liquid crystal element is electrically connected to the other of the source and the drain of the first transistor, wherein the second pixel includes:

a second transistor, wherein a gate of the second transistor is electrically connected to the second scan line, and one of a source and a drain of the second transistor is electrically connected to the second signal line; and

a second liquid crystal element, wherein one electrode of the second liquid crystal element is electrically connected to the other of the source and the drain of the second transistor, and

wherein each of the first transistor and the second transistor includes a channel formation region including an oxide semiconductor.

9. The display device according to claim 7, wherein each of the first shift register and the second shift register includes a transistor which includes a channel formation region including an oxide semiconductor.

10. A method for driving a display device comprising the steps of:

in a sampling period in which an image signal is input to a plurality of pixels in a first to n -th rows (n is a natural number of 3 or more) by sequentially shifting a selection signal from a first scan line to an n -th scan line and an image signal is input to a plurality of pixels in an $(n+1)$ th to $2n$ -th rows by sequentially shifting a selection signal from an $(n+1)$ th scan line to a $2n$ -th scan line,

after finishing shifting the selection signal from the first scan line to the k -th scan line (k is a natural number of 2 or more and less than n) and from the $(n+1)$ th scan line to the $(n+k)$ th scan line, making a light source for the first to k -th rows and a light source for the $(n+1)$ th to $(n+k)$ th rows emit light and;

controlling transmission of the light emitted from the light source for the first to k -th rows in each of the plurality of pixels in the first to k -th rows, and controlling transmission of the light emitted from the light source for the $(n+1)$ th to $(n+k)$ th rows in each of the plurality of pixels in the $(n+1)$ th to $(n+k)$ th rows,

wherein one of the plurality of light sources emits light whose color is different from that of another one of the plurality of light sources.

11. The method for driving a display device, according to claim 10, wherein a color of the light emitted from the light source for the first to k -th rows and a color of the light emitted from the light source for the $(n+1)$ th to $(n+k)$ th rows are different from each other.

12. A method for driving a display device comprising the steps of:

in a sampling period in which an image signal is input to a plurality of pixels in a first to n -th rows (n is a natural number of 3 or more) through first transistors included in the pixels in the first to n -th rows by sequentially shifting a selection signal from a first scan line to an n -th scan line, and an image signal is input to a plurality of pixels in an $(n+1)$ th to $2n$ -th rows through second transistors included in the pixels in the $(n+1)$ th to $2n$ -th rows by sequentially shifting a selection signal from an $(n+1)$ th scan line to a $2n$ -th scan line,

after finishing shifting the selection signal from the first scan line to the k -th scan line (k is a natural number of 2 or more and less than n) and from the $(n+1)$ th scan line to the $(n+k)$ th scan line, making a light source for the first to k -th rows and a light source for the $(n+1)$ th to $(n+k)$ th rows emit light, and

controlling transmission of the light emitted from the light source for the first to k -th rows in each of the plurality of pixels in the first to k -th rows, and controlling transmission of the light emitted from the light source for the $(n+1)$ th to $(n+k)$ th rows in each of the plurality of pixels in the $(n+1)$ th to $(n+k)$ th rows,

wherein one of the plurality of light sources emits light whose color is different from that of another one of the plurality of light sources.

13. The method for driving a display device, according to claim 12, wherein a color of the light emitted from the light source for the first to k -th rows and a color of the light emitted from the light source for the $(n+1)$ th to $(n+k)$ th rows are different from each other.

* * * * *

专利名称(译)	液晶显示装置及其驱动方法		
公开(公告)号	US20110248978A1	公开(公告)日	2011-10-13
申请号	US13/078206	申请日	2011-04-01
[标]申请(专利权)人(译)	株式会社半导体能源研究所		
申请(专利权)人(译)	半导体能源研究所有限公司.		
当前申请(专利权)人(译)	半导体能源研究所有限公司.		
[标]发明人	KOYAMA JUN MIYAKE HIROYUKI YAMAZAKI SHUNPEI		
发明人	KOYAMA, JUN MIYAKE, HIROYUKI YAMAZAKI, SHUNPEI		
IPC分类号	G09G3/36 G06F3/038		
CPC分类号	G06F3/0412 G09G2310/0286 G06F3/045 G09G3/006 G09G3/3413 G09G3/3426 G09G3/3648 G09G2300/0408 G09G2300/0426 G09G2310/0235 G02F1/13624 G02F1/136286 G09G3/3674 G09G2300/08 G06F3/044 G09G3/36 G09G3/3655 G09G3/3696 G09G2320/041 G09G2320/103 G09G2330/021 G09G2340/0435 G11C19/28 G09G5/18		
优先权	2010090935 2010-04-09 JP 2010114435 2010-05-18 JP		
其他公开文献	US8823754		
外部链接	Espacenet USPTO		

摘要(译)

在场序液晶显示装置中，在设计方面增加图像信号的输入频率。图像信号被同时提供给在液晶显示装置的像素部分中以矩阵排列的像素中的多行中提供的像素。因此，可以增加图像信号输入到每个像素的频率，而不改变包括在液晶显示装置中的晶体管等的响应速度。

