


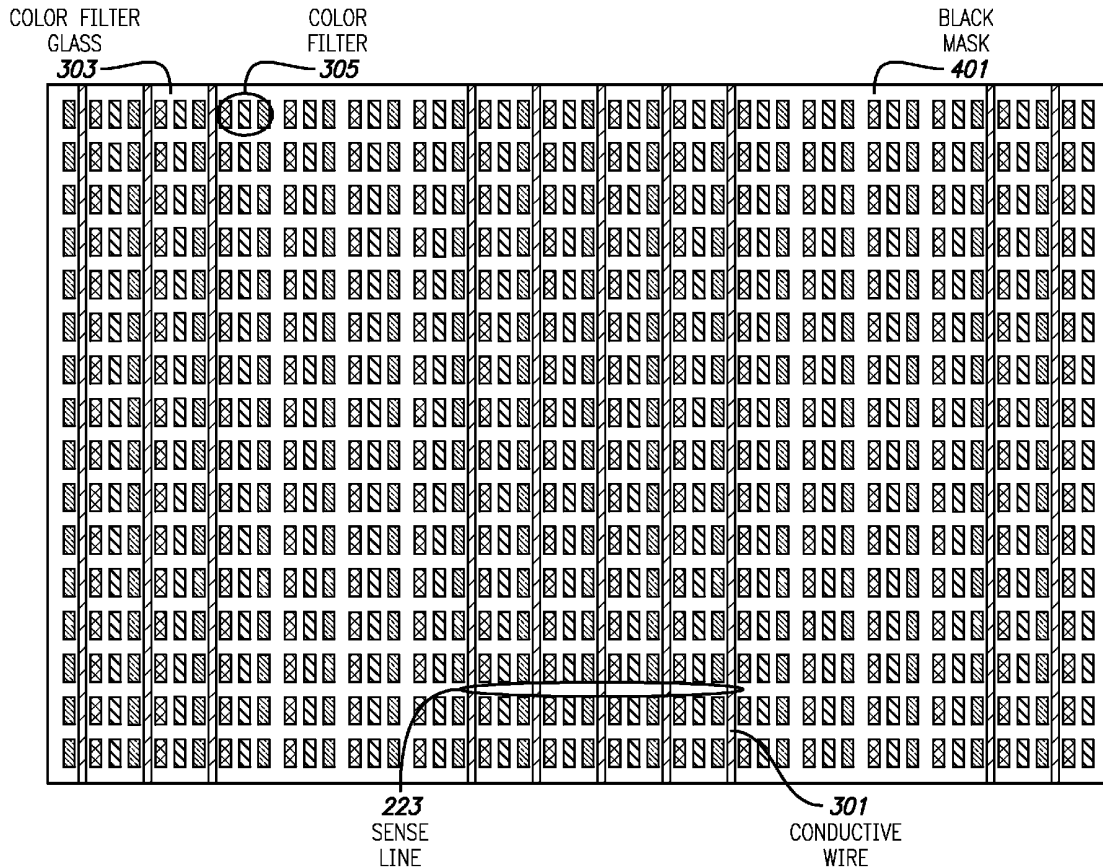

US 20120162104A1

(19) **United States**(12) **Patent Application Publication**
CHANG et al.(10) **Pub. No.: US 2012/0162104 A1**(43) **Pub. Date: Jun. 28, 2012**(54) **INTEGRATED TOUCH SCREENS**(52) **U.S. Cl. 345/173; 349/106; 349/12**(76) Inventors: **Shih Chang CHANG**, Cupertino,
CA (US); **John Z. Zhong**,
Cupertino, CA (US)(21) Appl. No.: **13/251,099**(22) Filed: **Sep. 30, 2011****Related U.S. Application Data**(63) Continuation of application No. 12/976,997, filed on
Dec. 22, 2010.**Publication Classification**(51) **Int. Cl.**
G02F 1/1335 (2006.01)
G06F 3/041 (2006.01)(57) **ABSTRACT**

Integrated touch screens are provided including drive lines formed of grouped-together circuit elements of a thin film transistor layer and sense lines formed between a color filter layer and a material layer that modifies or generates light. The common electrodes (Vcom) in the TFT layer can be grouped together during a touch sensing operation to form drive lines. Sense lines can be formed on an underside of a color filter glass, and a liquid crystal region can be disposed between the color filter glass and the TFT layer. Placing the sense lines on the underside of the color filter glass, i.e., within the display pixel cell, can provide a benefit of allowing the color filter glass to be thinned after the pixel cells have been assembled, for example.



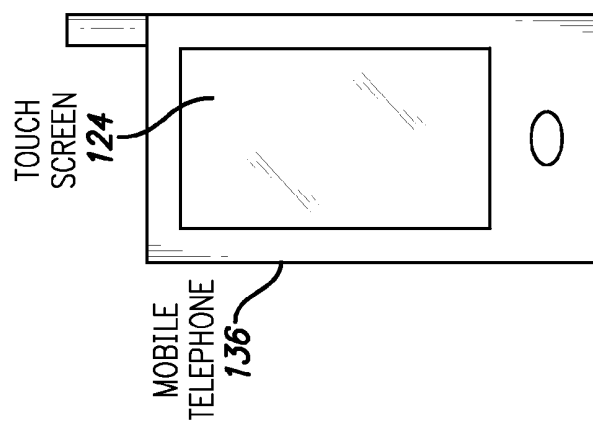


FIG. 1A

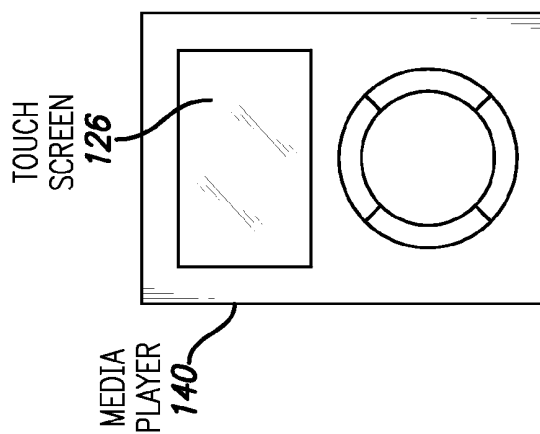


FIG. 1B

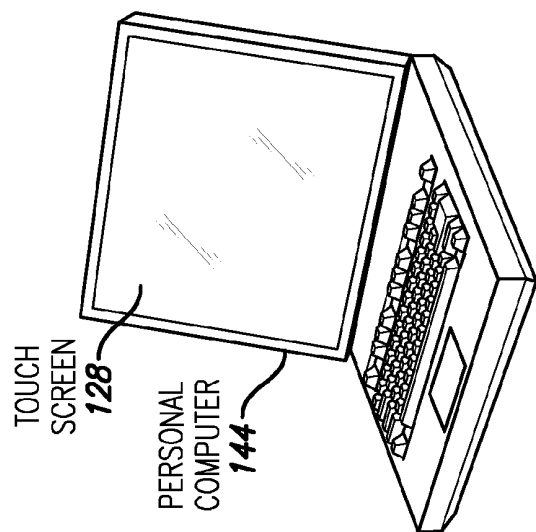


FIG. 1C

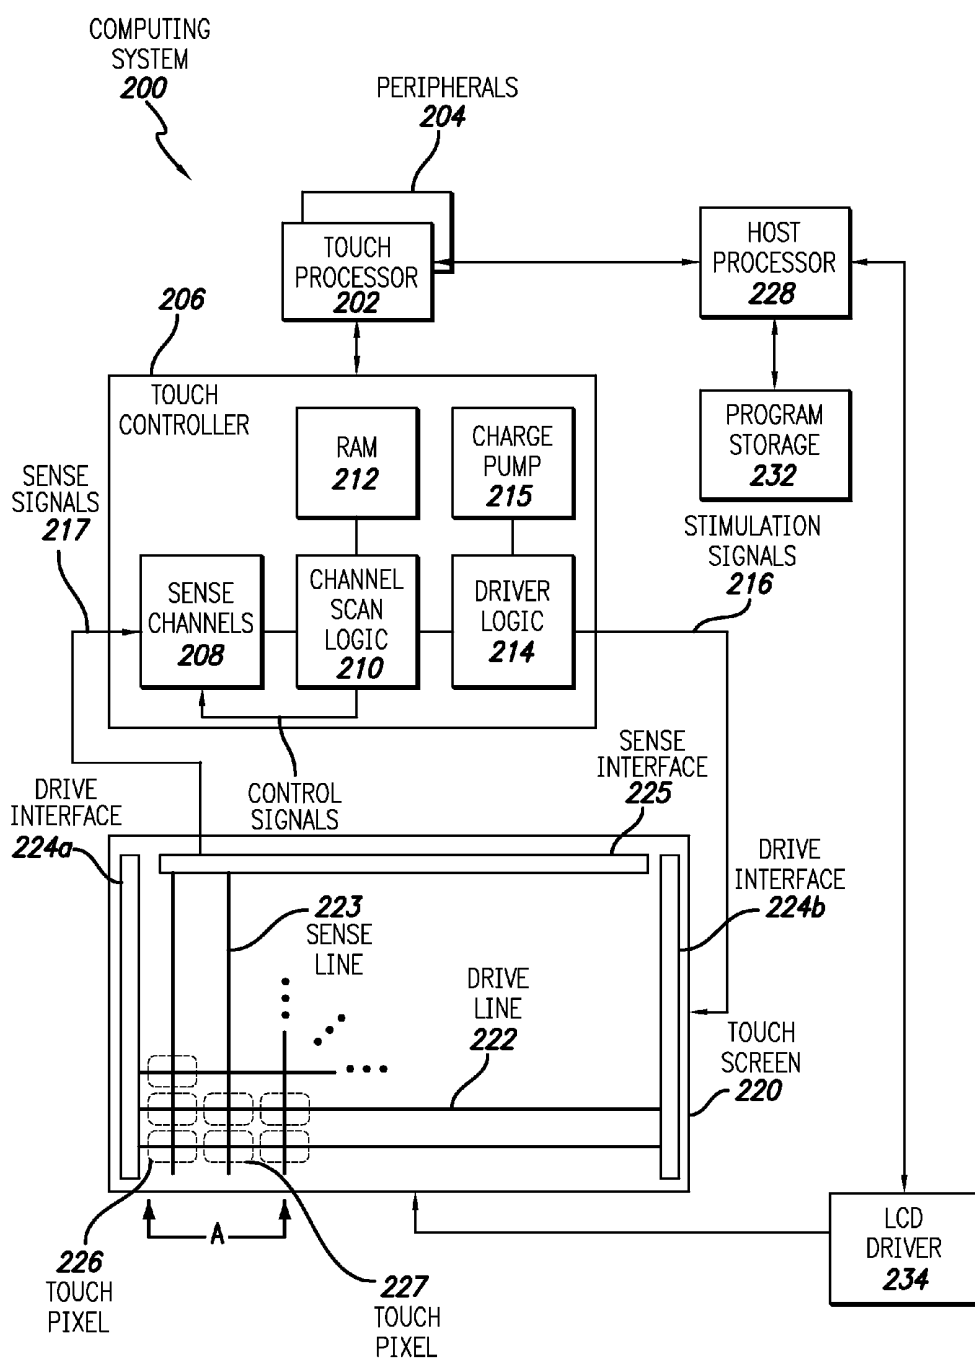


FIG. 2

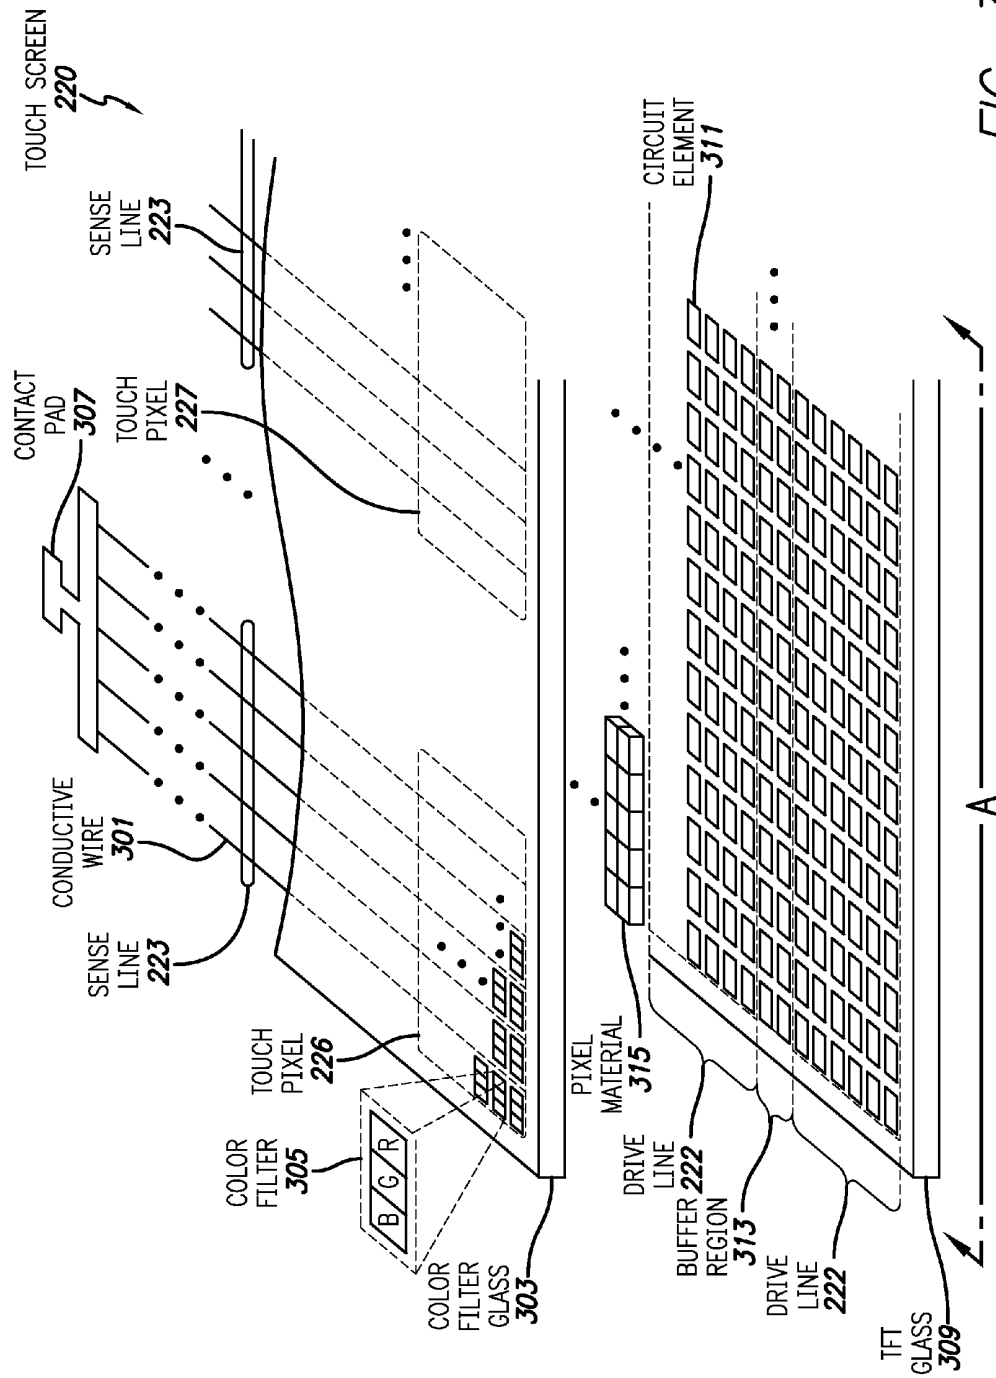


FIG. 3

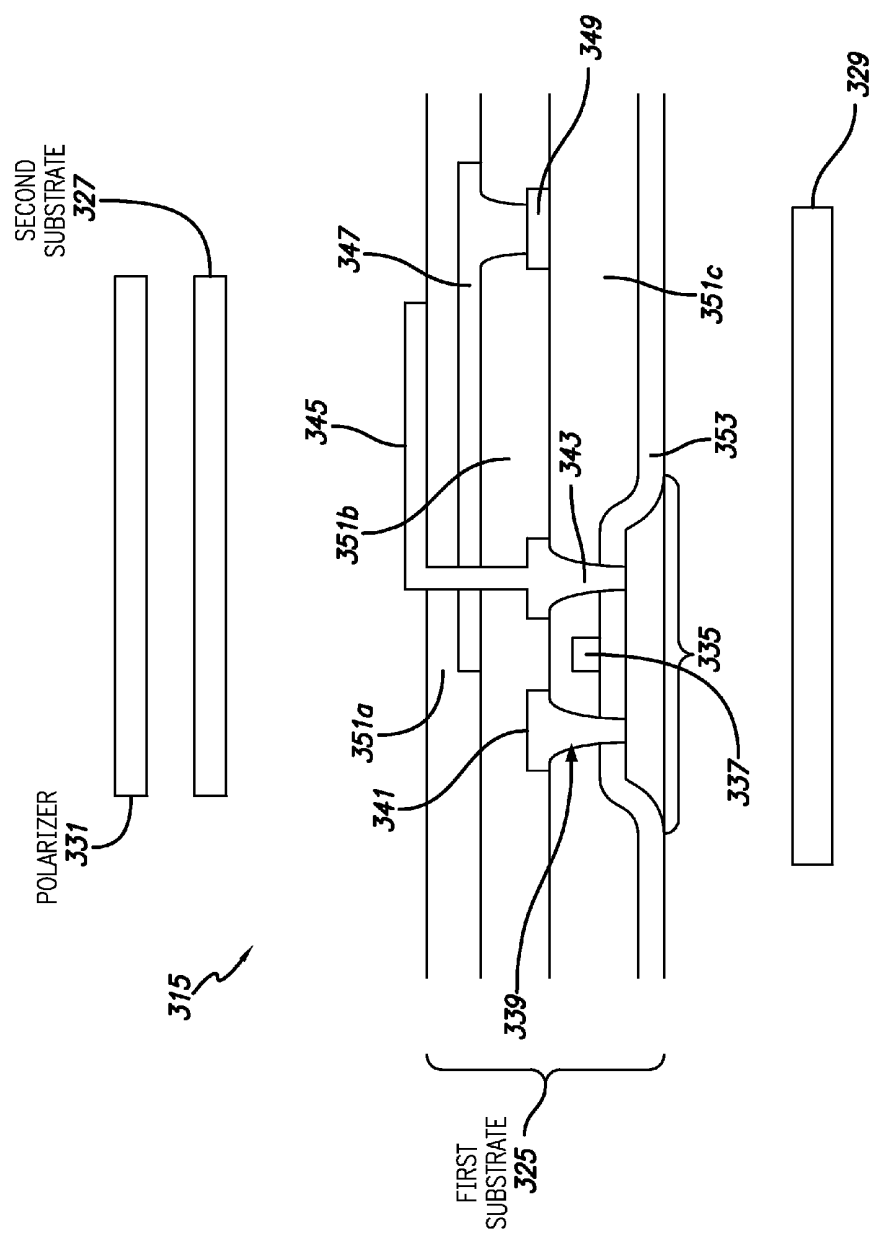


FIG. 3A

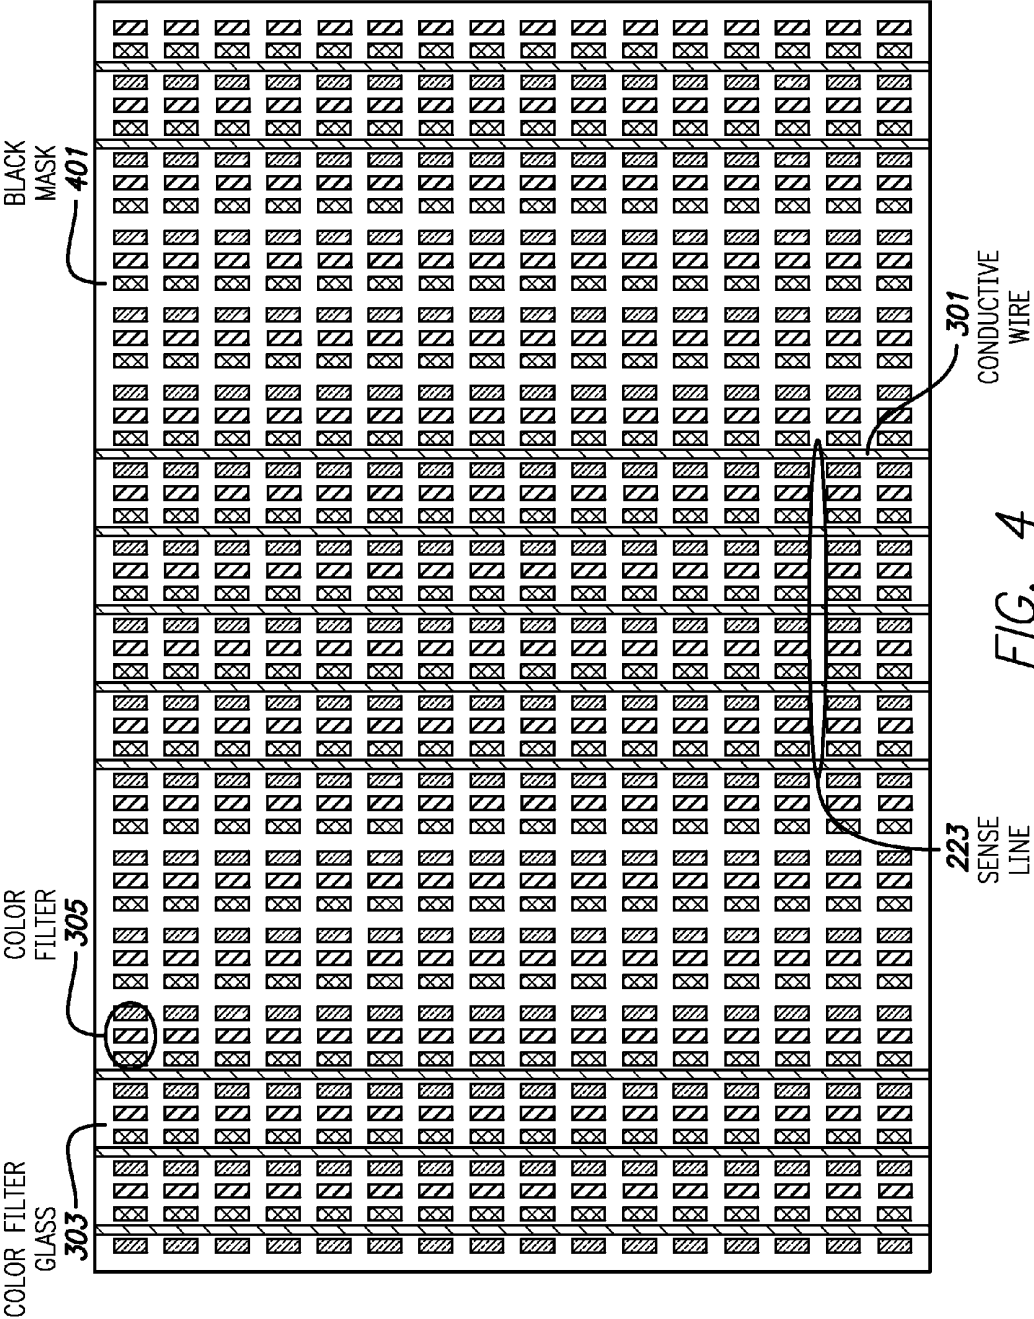
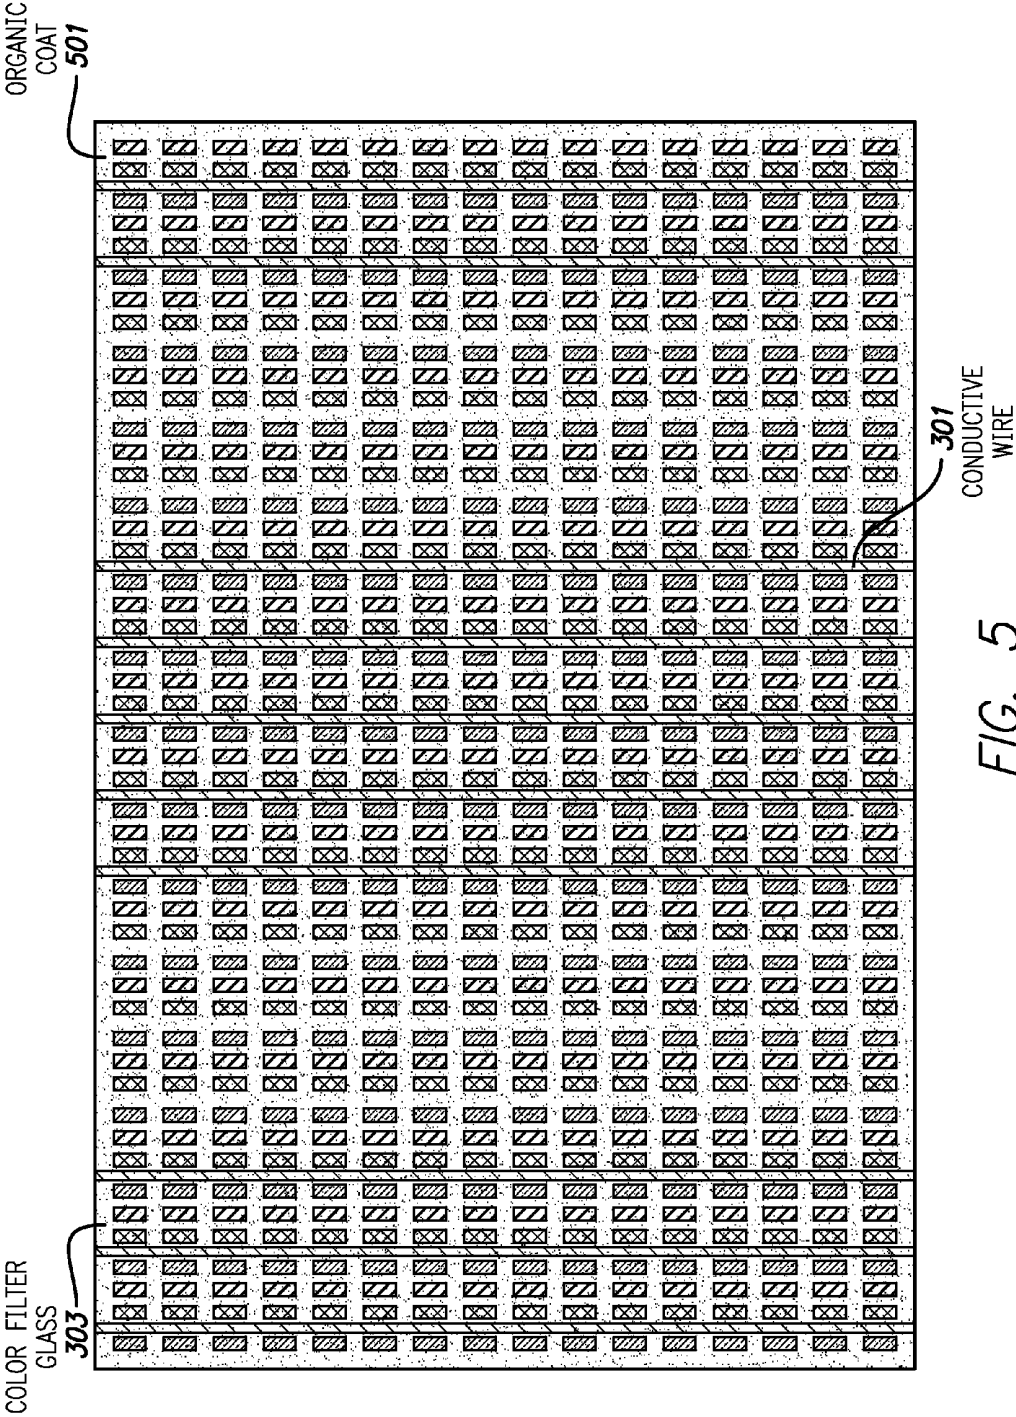


FIG. 4



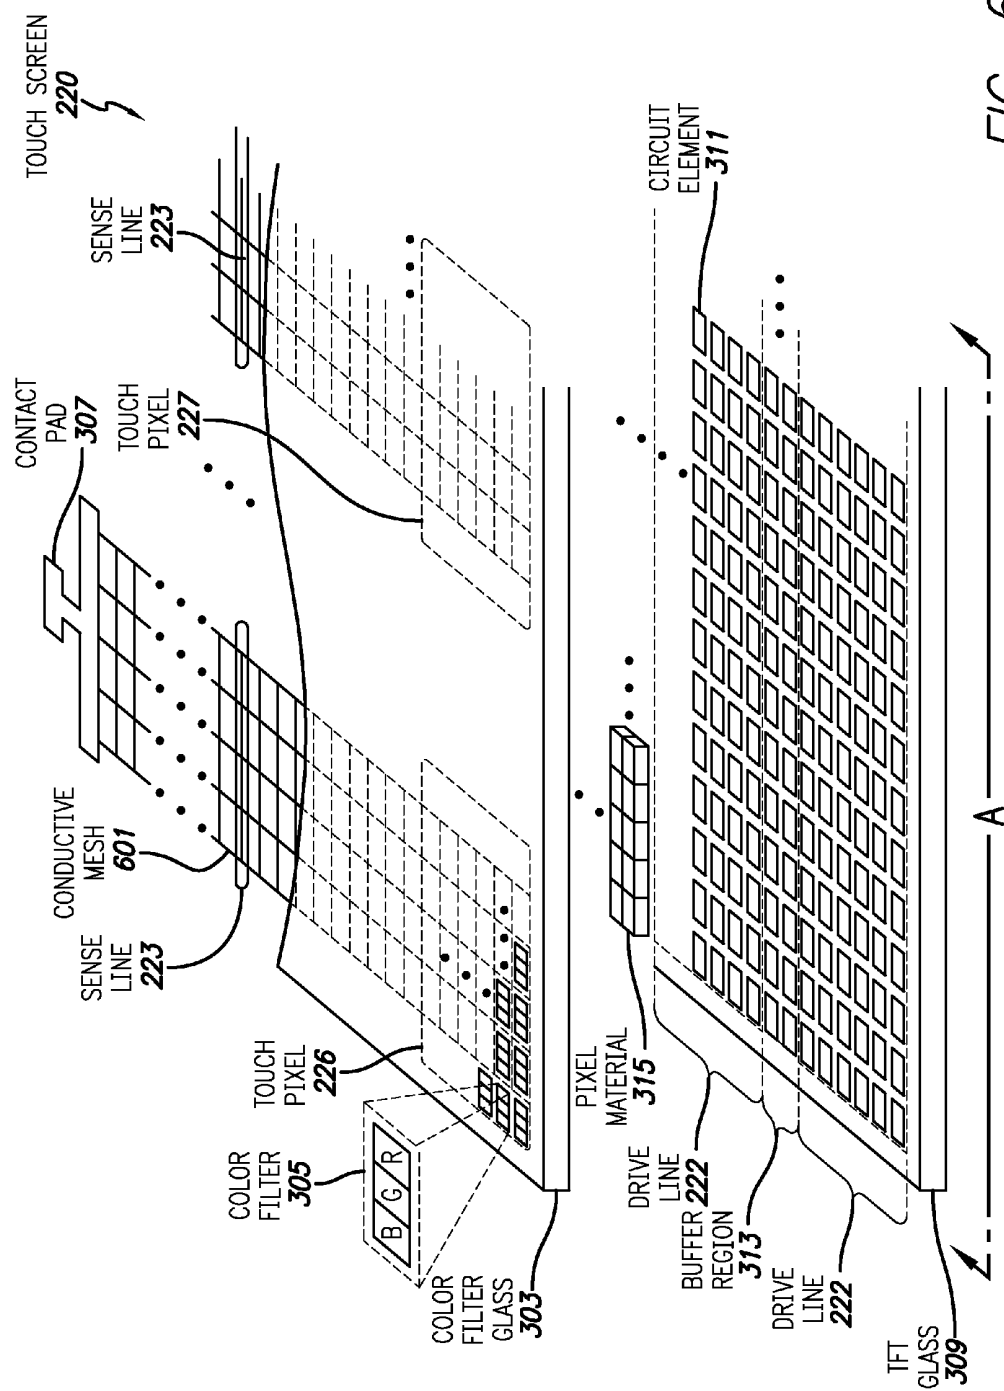
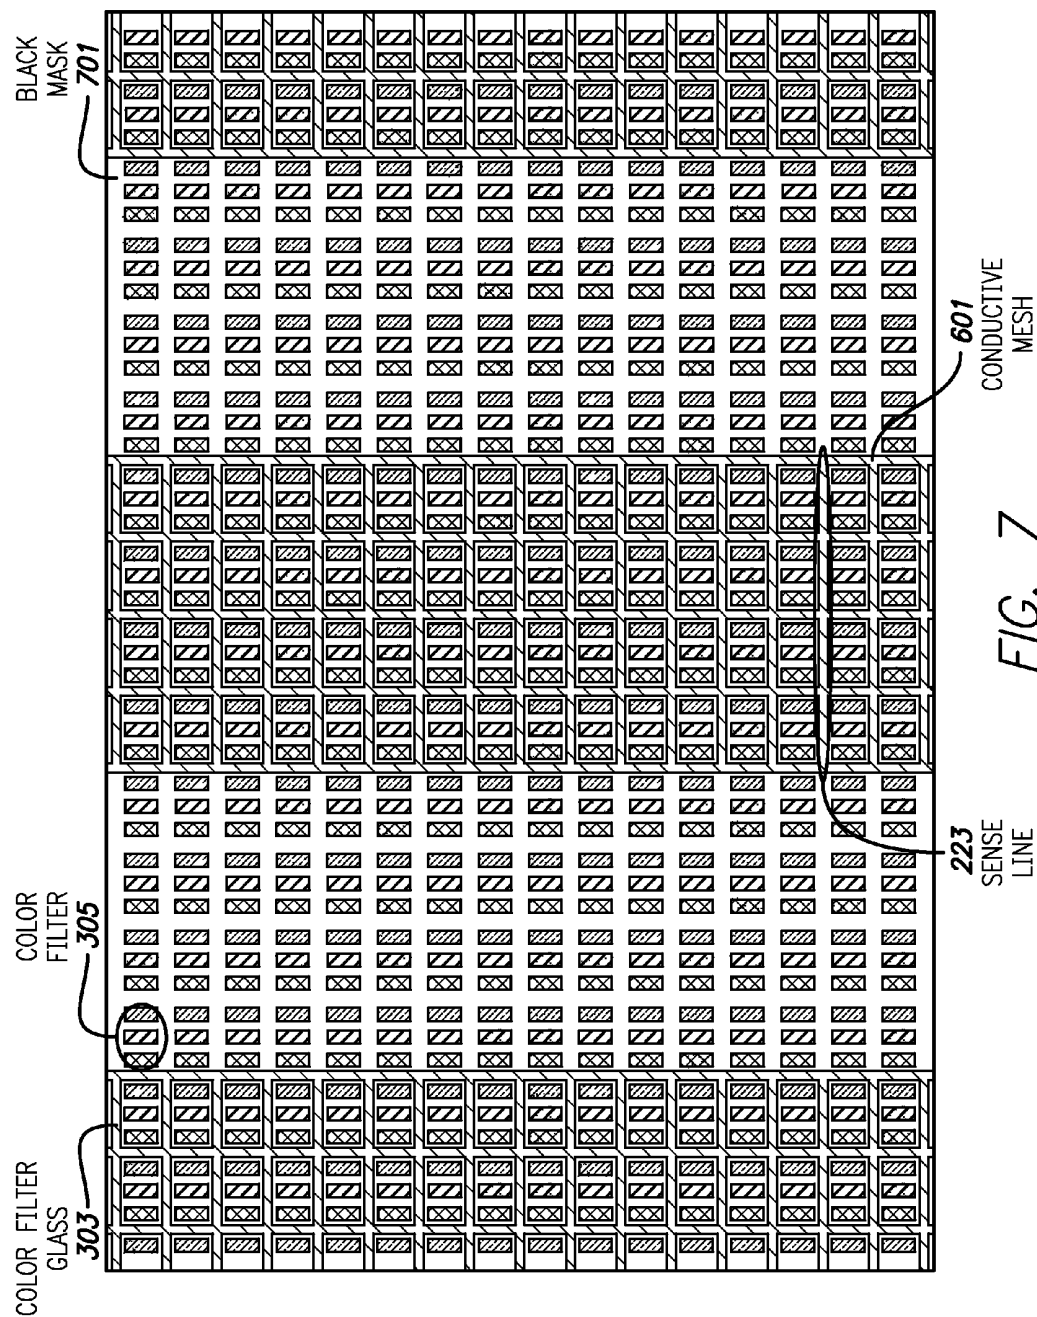


FIG. 6



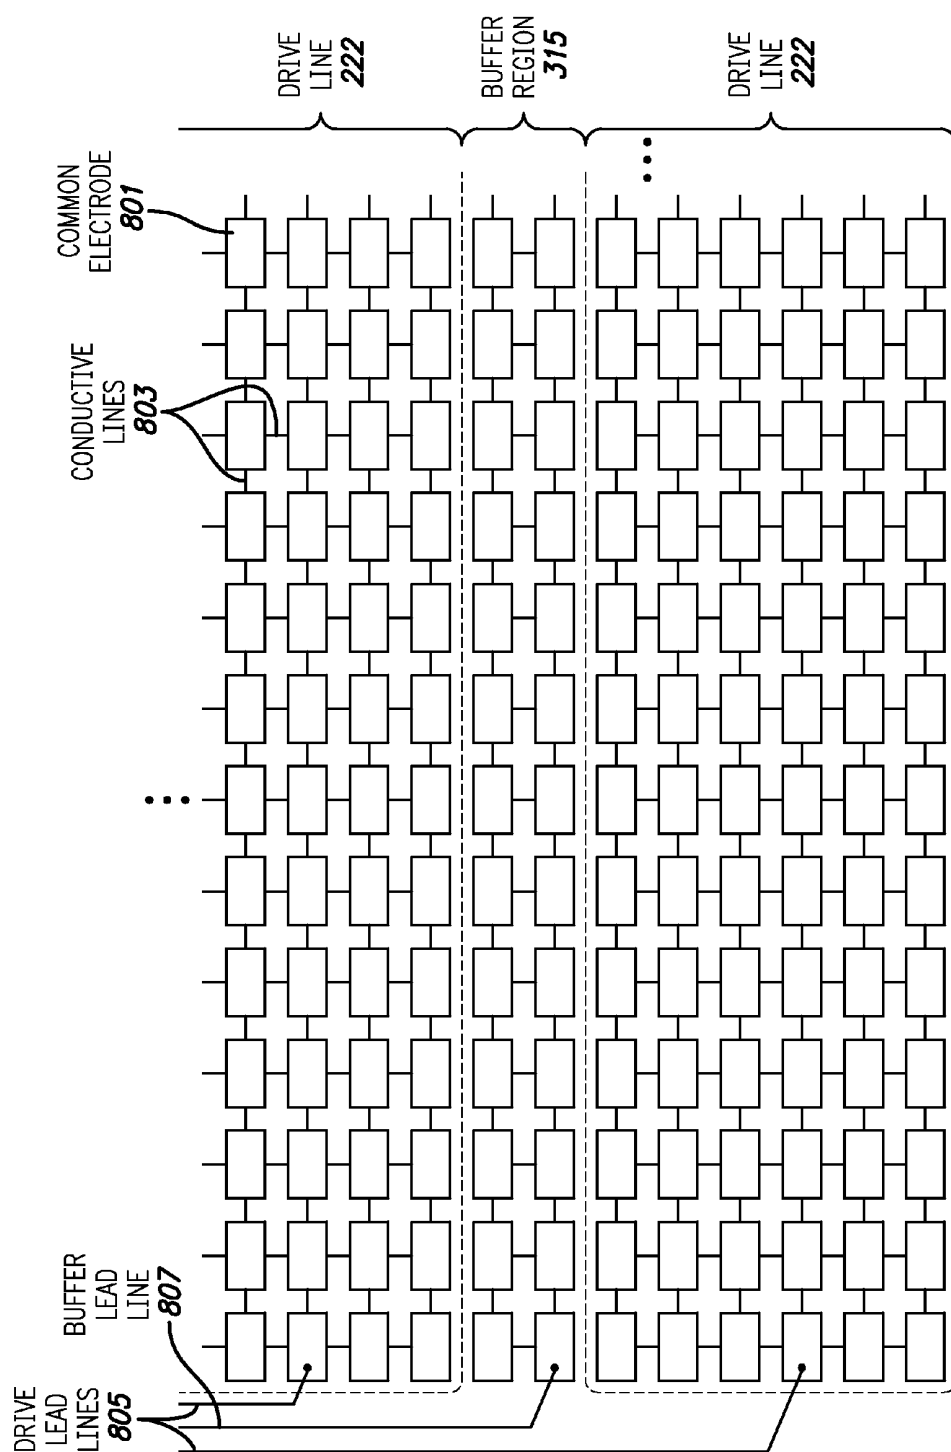


FIG. 8

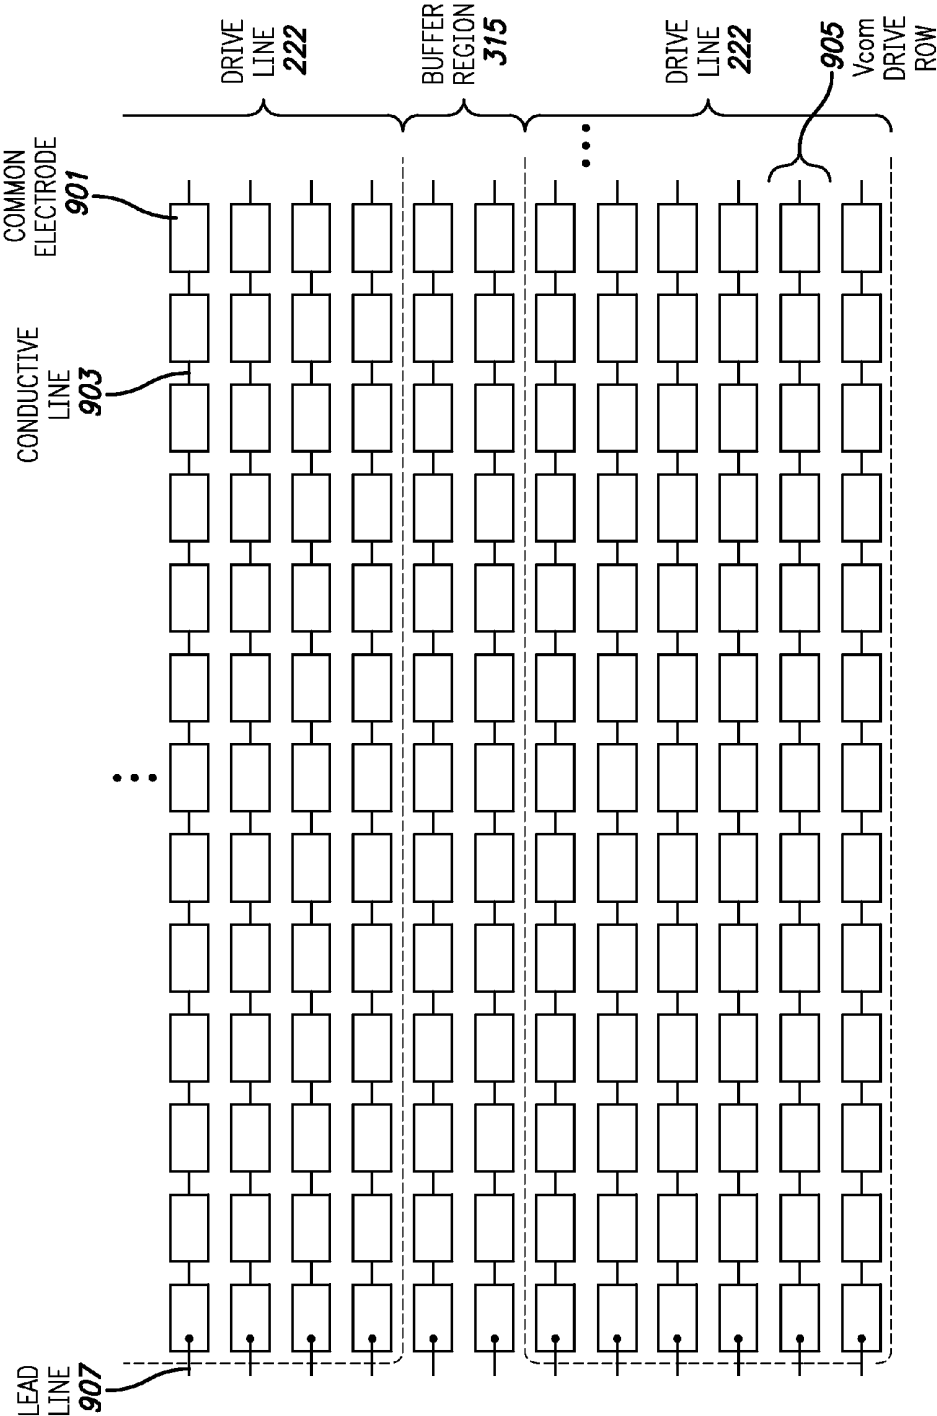


FIG. 9

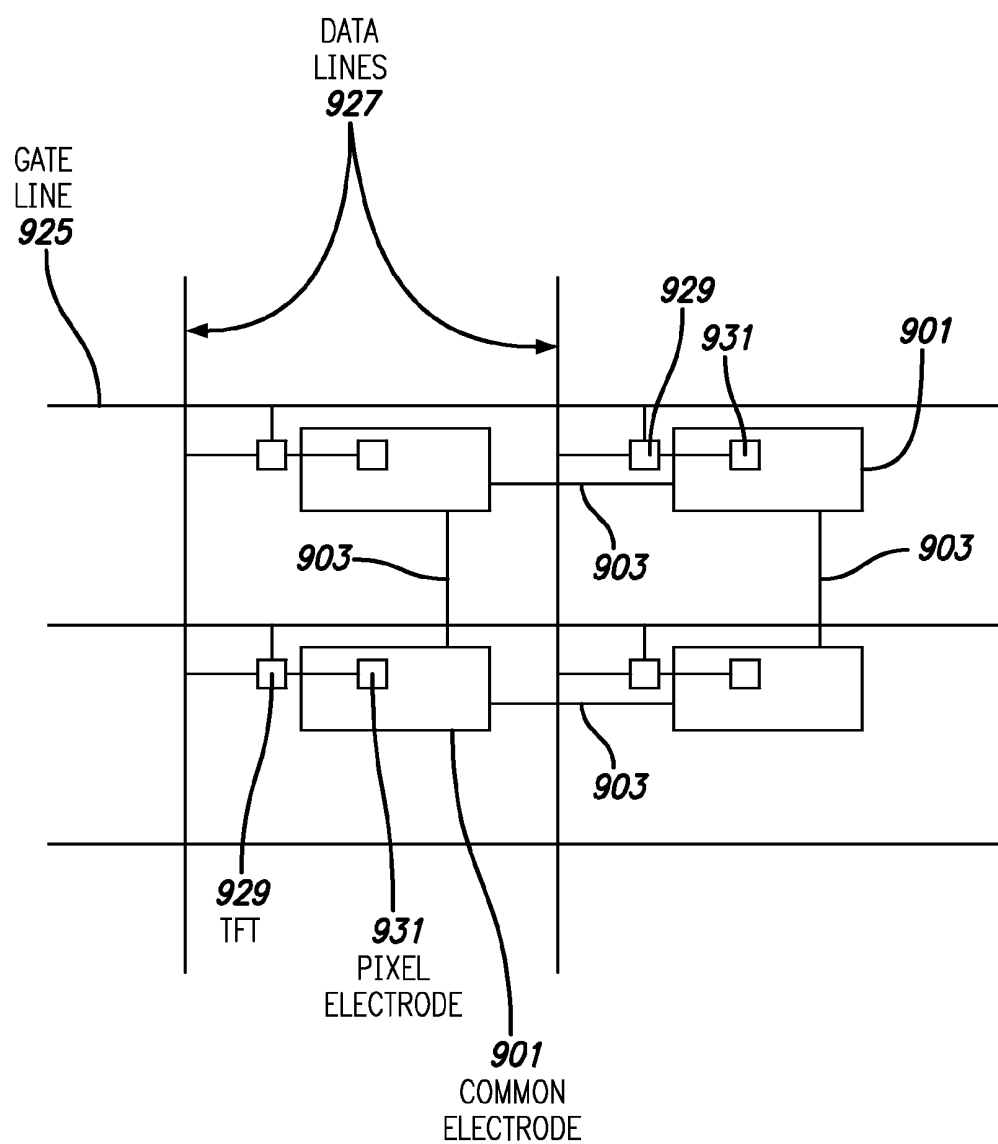
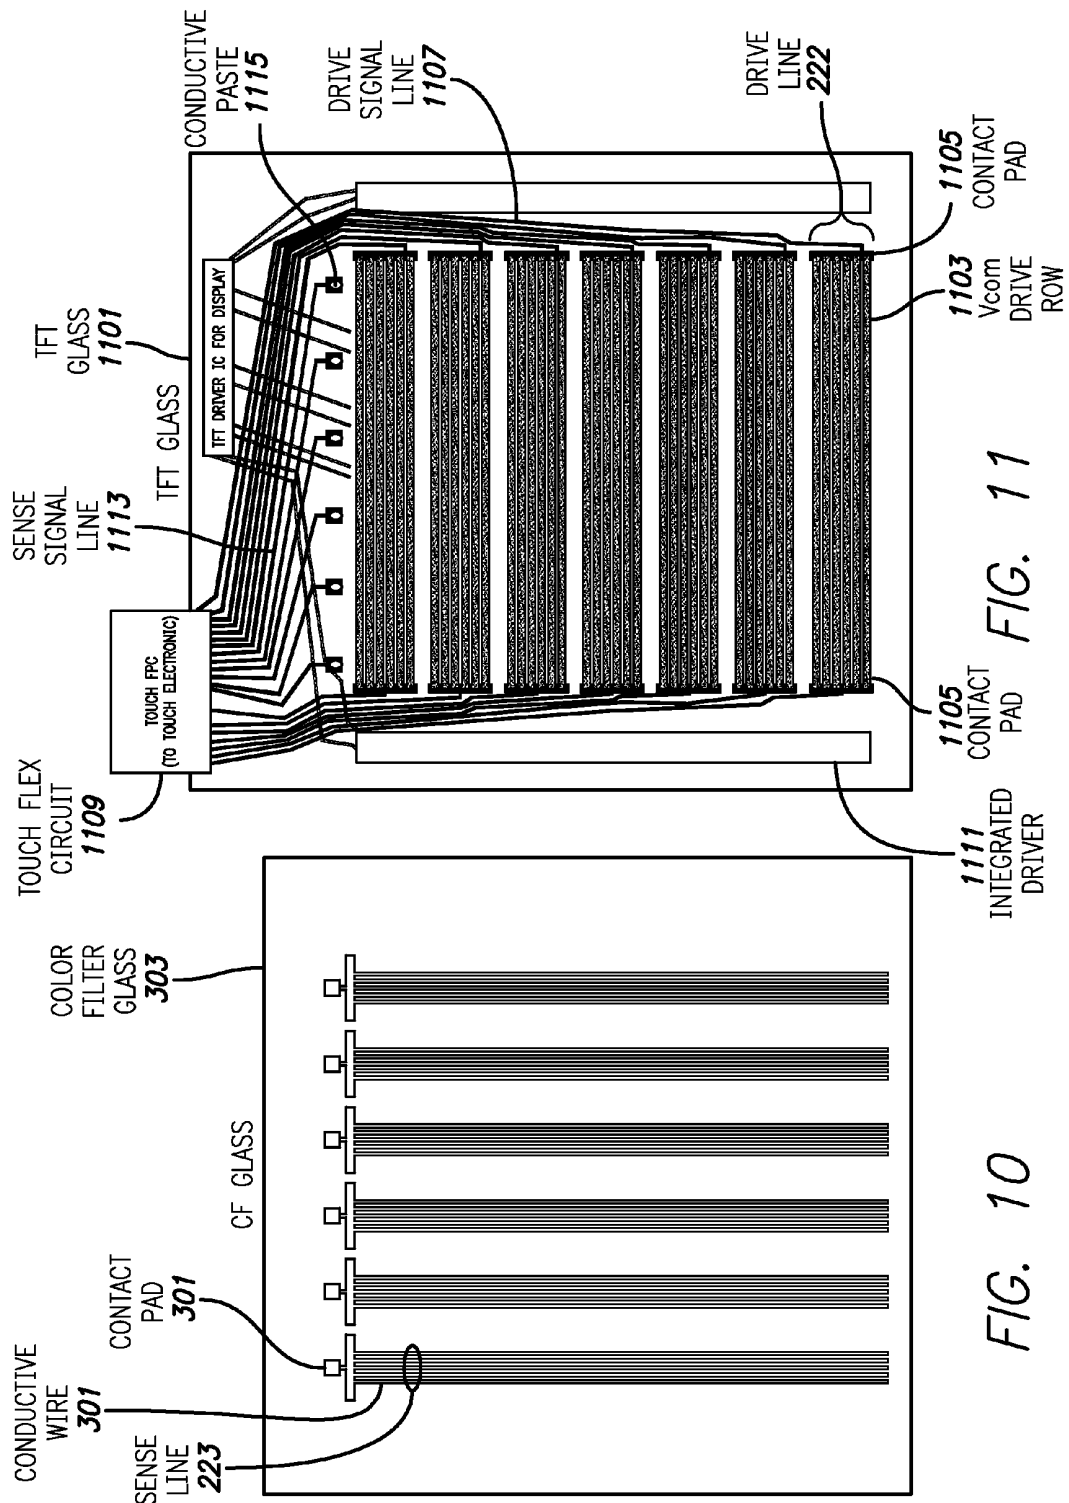


FIG. 9A



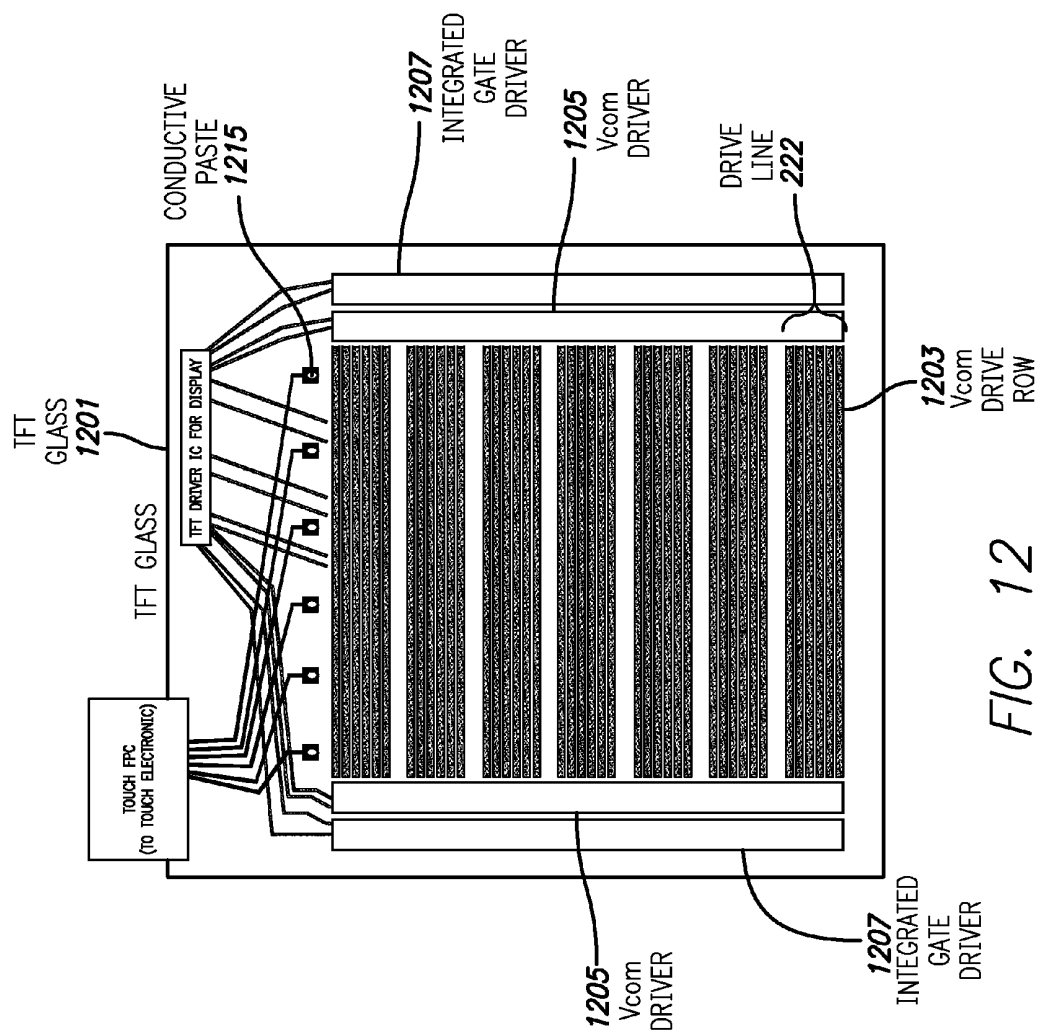


FIG. 12

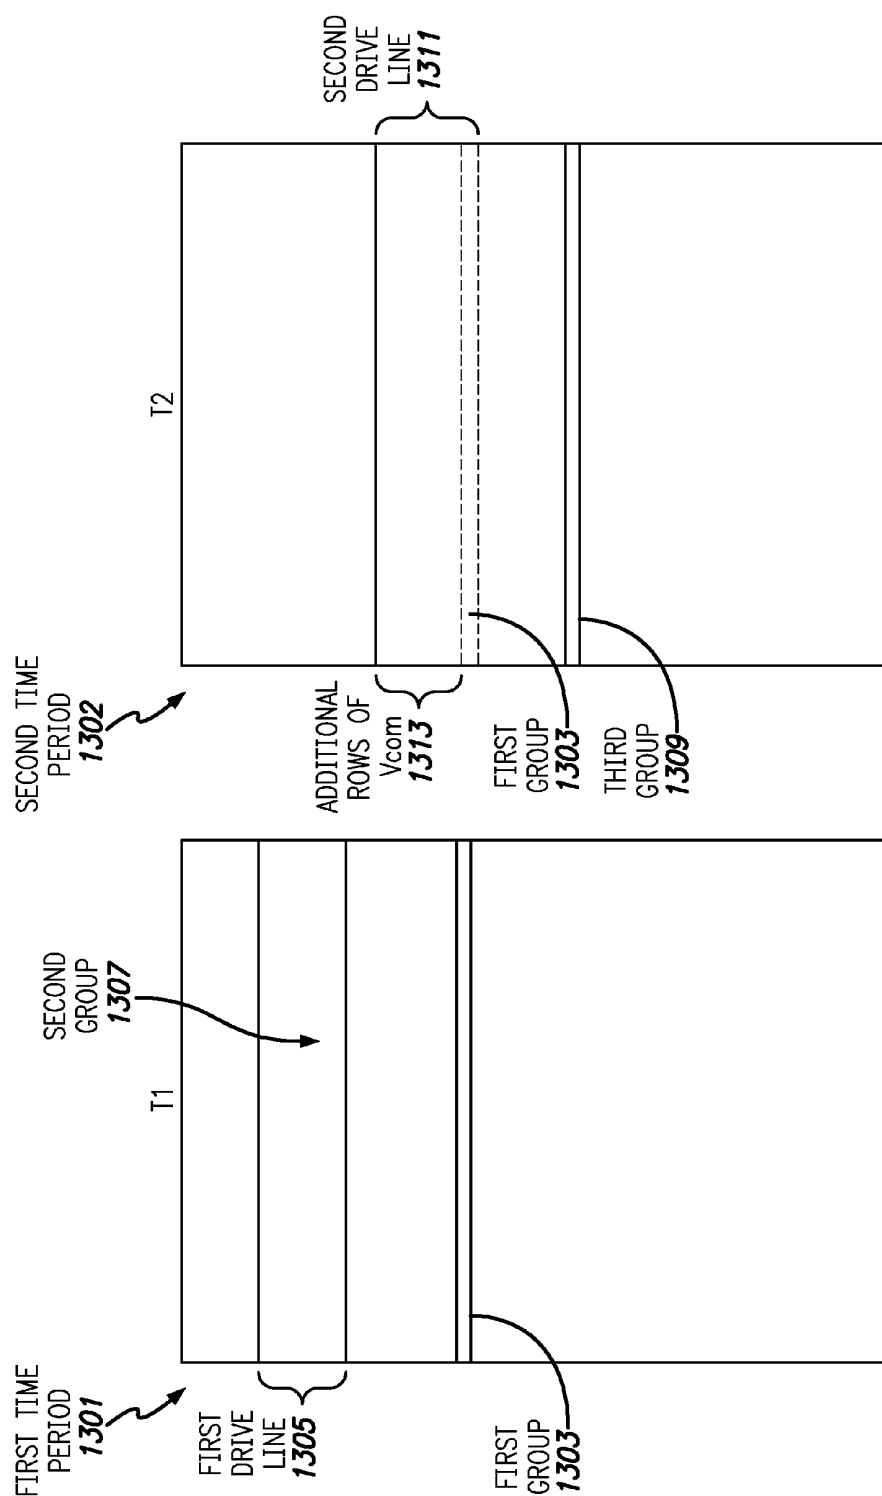
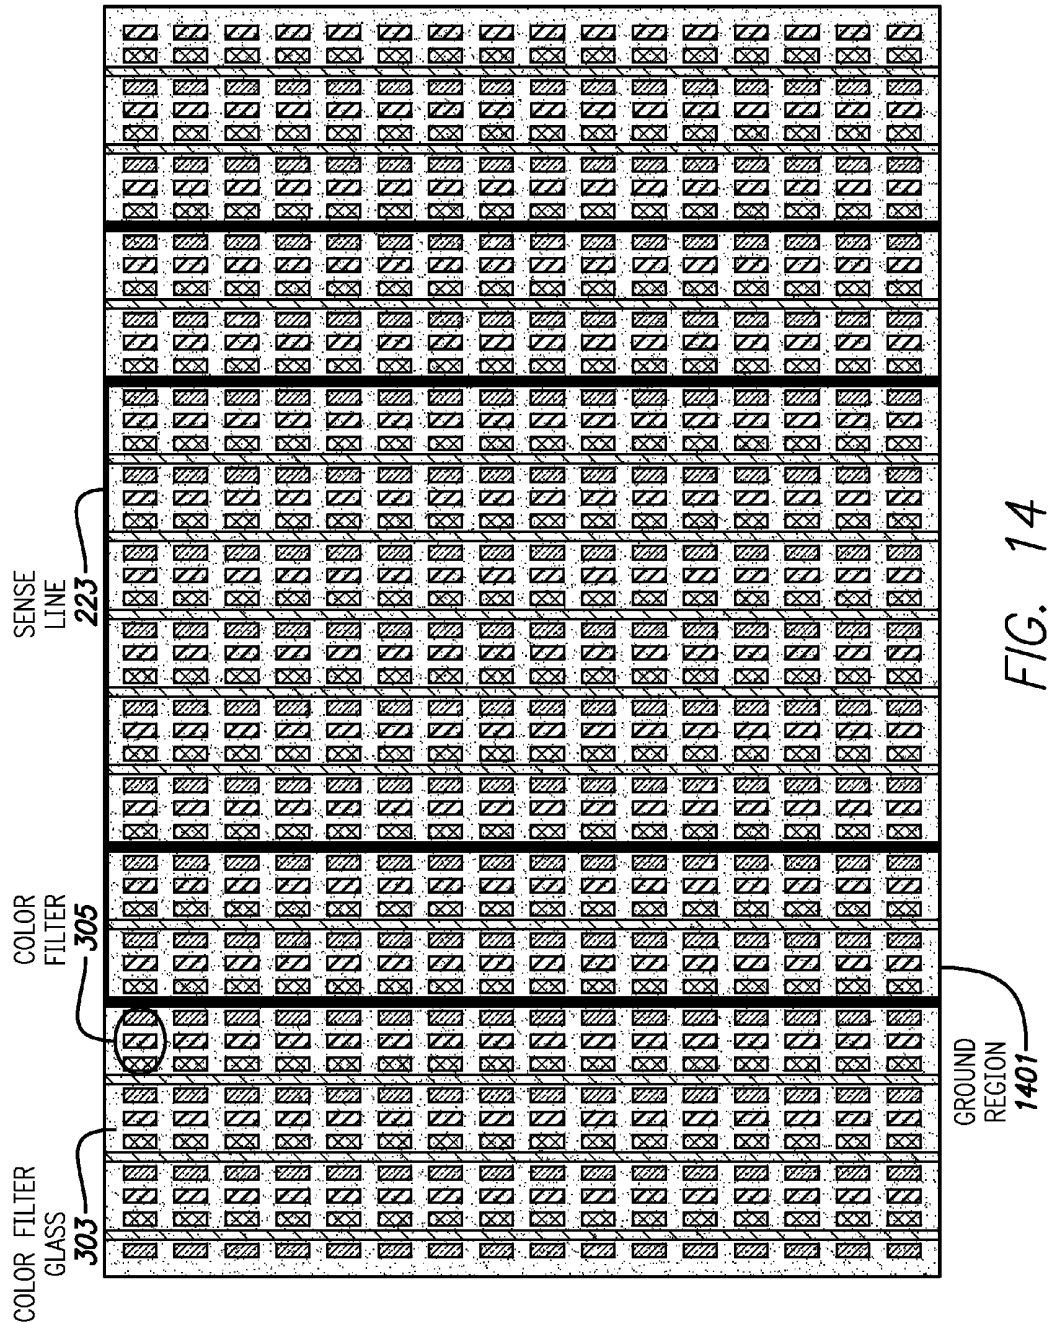


FIG. 13



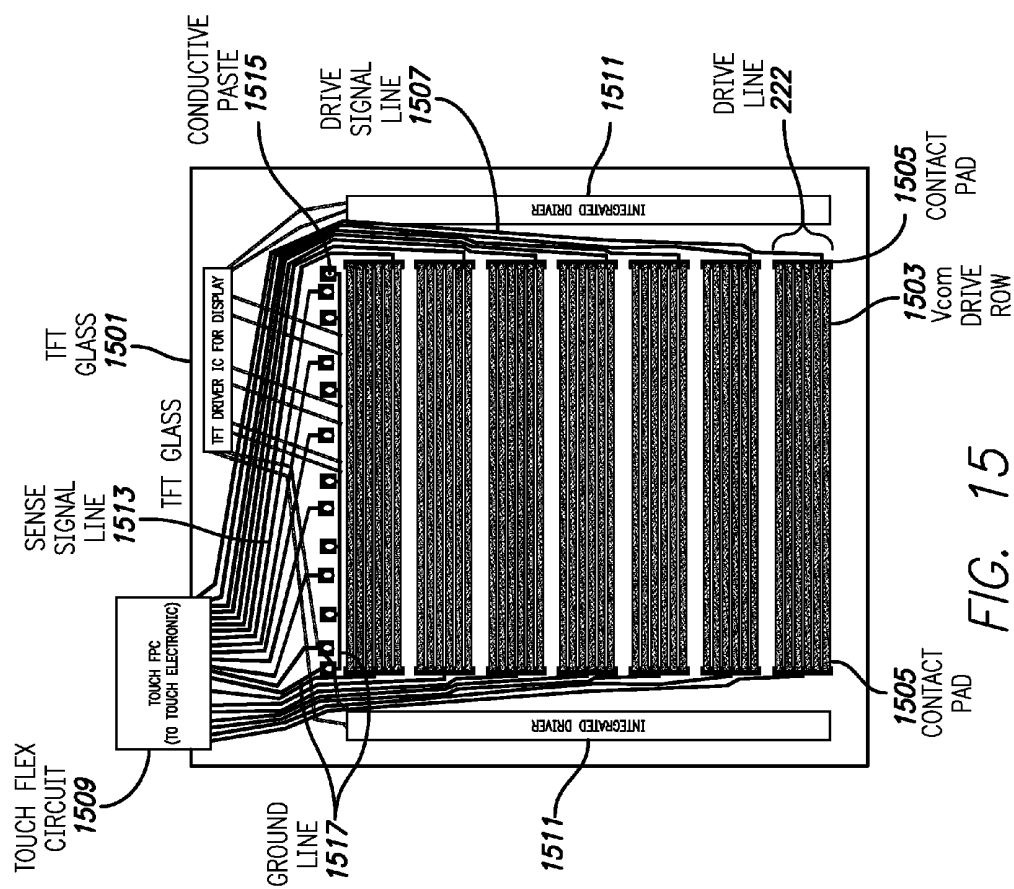


FIG. 15

INTEGRATED TOUCH SCREENS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. patent application Ser. No. 12/976,997, filed Dec. 22, 2010, the entire disclosure of which is incorporated herein by reference for all purposes.

FIELD OF THE DISCLOSURE

[0002] This relates generally to integrated touch screens, and more particularly, to integrated touch screens including drive lines formed of grouped-together circuit elements of a thin film transistor layer and sense lines formed between a color filter layer and a material layer that modifies or generates light.

BACKGROUND OF THE DISCLOSURE

[0003] Many types of input devices are presently available for performing operations in a computing system, such as buttons or keys, mice, trackballs, joysticks, touch sensor panels, touch screens and the like. Touch screens, in particular, are becoming increasingly popular because of their ease and versatility of operation as well as their declining price. Touch screens can include a touch sensor panel, which can be a clear panel with a touch-sensitive surface, and a display device such as a liquid crystal display (LCD) that can be positioned partially or fully behind the panel so that the touch-sensitive surface can cover at least a portion of the viewable area of the display device. Touch screens can allow a user to perform various functions by touching the touch sensor panel using a finger, stylus or other object at a location often dictated by a user interface (UI) being displayed by the display device. In general, touch screens can recognize a touch and the position of the touch on the touch sensor panel, and the computing system can then interpret the touch in accordance with the display appearing at the time of the touch, and thereafter can perform one or more actions based on the touch. In the case of some touch sensing systems, a physical touch on the display is not needed to detect a touch. For example, in some capacitive-type touch sensing systems, fringing electrical fields used to detect touch can extend beyond the surface of the display, and objects approaching near the surface may be detected near the surface without actually touching the surface.

[0004] Capacitive touch sensor panels can be formed from a matrix of drive and sense lines of a substantially transparent conductive material, such as Indium Tin Oxide (ITO), often arranged in rows and columns in horizontal and vertical directions on a substantially transparent substrate. It is due in part to their substantial transparency that capacitive touch sensor panels can be overlaid on a display to form a touch screen, as described above. Some touch screens can be formed by integrating touch sensing circuitry into a display pixel stackup (i.e., the stacked material layers forming the display pixels).

SUMMARY

[0005] The following description includes examples of integrated touch screens including drive lines formed of grouped-together circuit elements of a thin film transistor layer and sense lines formed between a color filter layer and a material layer that modifies or generates light. In some examples, the touch screen can be an in-plane switching (IPS)

liquid crystal display (LCD), fringe field switching (FFS), advanced fringe field switching (AFFS), etc. The common electrodes (Vcom) in the TFT layer can be grouped together during a touch sensing operation to form drive lines. Sense lines can be formed on an underside of a color filter glass, and a liquid crystal region can be disposed between the color filter glass and the TFT layer. Placing the sense lines on the underside of the color filter glass, i.e., within the display pixel cell, can provide a benefit of allowing the color filter glass to be thinned after the pixel cells have been assembled, for example.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] FIGS. 1A-1C illustrate an example mobile telephone, an example media player, and an example personal computer that each include an example touch screen according to embodiments of the disclosure.

[0007] FIG. 2 is a block diagram of an example computing system that illustrates one implementation of an example touch screen according to embodiments of the disclosure.

[0008] FIG. 3 illustrates example configurations of sense lines, drive lines, and other example structures of a touch screen according to embodiments of the disclosure.

[0009] FIG. 3A illustrates an example display pixel stackup according to embodiments of the disclosure.

[0010] FIG. 4 illustrates a more detailed view of an example color filter glass including sense lines disposed on an underside of the color filter glass according to embodiments of the disclosure.

[0011] FIG. 5 illustrates an example color filter glass that includes an organic coat formed over conductive wires according to embodiments of the disclosure.

[0012] FIG. 6 illustrates other example configurations of sense lines, drive lines, and other example structures of a touch screen according to embodiments of the disclosure.

[0013] FIG. 7 illustrates a more detailed view of another example color filter glass including sense lines disposed on an underside of the color filter glass according to embodiments of the disclosure.

[0014] FIG. 8 illustrates an example configuration of drive lines including circuit elements of a TFT layer of a touch screen according to embodiments of the disclosure.

[0015] FIG. 9 illustrates another example configuration of drive lines including circuit elements of a TFT layer of a touch screen according to embodiments of the disclosure.

[0016] FIG. 9A illustrates an example circuit of a TFT substrate according to embodiments of the disclosure.

[0017] FIG. 10 includes an example configuration of a color filter glass including contact pads connected to sense lines according to embodiments of the disclosure.

[0018] FIG. 11 illustrates an example configuration of a TFT glass according to embodiments of the disclosure.

[0019] FIG. 12 illustrates another example configuration of a TFT glass according to embodiments of the disclosure.

[0020] FIG. 13 illustrates an example method of driving circuit elements of a touch screen in a display operation and in a touch sensing operation according to embodiments of the disclosure.

[0021] FIG. 14 illustrates another example configuration of a color filter glass according to embodiments of the disclosure.

[0022] FIG. 15 illustrates another example configuration of a TFT glass according to embodiments of the disclosure.

DETAILED DESCRIPTION

[0023] In the following description of example embodiments, reference is made to the accompanying drawings which form a part hereof, and in which it is shown by way of illustration specific embodiments in which embodiments of the disclosure can be practiced. It is to be understood that other embodiments can be used and structural changes can be made without departing from the scope of the embodiments of this disclosure.

[0024] The following description includes examples of integrated touch screens including drive lines formed of grouped-together circuit elements of a thin film transistor layer and sense lines formed between a color filter layer and a material layer that modifies or generates light. In some examples, the touch screen can be an in-plane switching (IPS) liquid crystal display (LCD), fringe field switching (FFS), advanced fringe field switching (AFFS), etc. The common electrodes (Vcom) in the TFT layer can be grouped together during a touch sensing operation to form drive lines. Sense lines can be formed on an underside of a color filter glass, and a liquid crystal region can be disposed between the color filter glass and the TFT layer. Placing the sense lines on the underside of the color filter glass, i.e., within the display pixel cell, can provide a benefit of allowing the color filter glass to be thinned after the pixel cells have been assembled, for example.

[0025] During a display operation, in which an image is displayed on the touch screen, the Vcom can serve as part of the display circuitry, for example, by carrying a common voltage to create, in conjunction with a pixel voltage on a pixel electrode, an electric field across the liquid crystal. During a touch sensing operation, the a stimulation signal can be applied to a group of Vcom that form a drive line. A sense signal based on the stimulation signal can be received by the sense lines on the underside of the color filter glass and processed by a touch processor to determine an amount and location of touch on the touch screen.

[0026] FIGS. 1A-1C show example systems in which a touch screen according to embodiments of the disclosure may be implemented. FIG. 1A illustrates an example mobile telephone 136 that includes a touch screen 124. FIG. 1B illustrates an example digital media player 140 that includes a touch screen 126. FIG. 1C illustrates an example personal computer 144 that includes a touch screen 128. Touch screens 124, 126, and 128 can be based on mutual capacitance. A mutual capacitance based touch system can include, for example, drive regions and sense regions, such as drive lines and sense lines. For example, drive lines can be formed in rows while sense lines can be formed in columns (e.g., orthogonal). Touch pixels can be formed at the intersections of the rows and columns. During operation, the rows can be stimulated with an AC waveform and a mutual capacitance can be formed between the row and the column of the touch pixel. As an object approaches the touch pixel, some of the charge being coupled between the row and column of the touch pixel can instead be coupled onto the object. This reduction in charge coupling across the touch pixel can result in a net decrease in the mutual capacitance between the row and the column and a reduction in the AC waveform being coupled across the touch pixel. This reduction in the charge-coupled AC waveform can be detected and measured by the

touch sensing system to determine the positions of multiple objects when they touch the touch screen. In some embodiments, a touch screen can be multi-touch, single touch, projection scan, full-imaging multi-touch, capacitive touch, etc.

[0027] FIG. 2 is a block diagram of an example computing system 200 that illustrates one implementation of an example touch screen 220 according to embodiments of the disclosure. Computing system 200 could be included in, for example, mobile telephone 136, digital media player 140, personal computer 144, or any mobile or non-mobile computing device that includes a touch screen. Computing system 200 can include a touch sensing system including one or more touch processors 202, peripherals 204, a touch controller 206, and touch sensing circuitry (described in more detail below). Peripherals 204 can include, but are not limited to, random access memory (RAM) or other types of memory or storage, watchdog timers and the like. Touch controller 206 can include, but is not limited to, one or more sense channels 208, channel scan logic 210 and driver logic 214. Channel scan logic 210 can access RAM 212, autonomously read data from the sense channels and provide control for the sense channels. In addition, channel scan logic 210 can control driver logic 214 to generate stimulation signals 216 at various frequencies and phases that can be selectively applied to drive lines of the touch sensing circuitry of touch screen 220, as described in more detail below. In some embodiments, touch controller 206, touch processor 202 and peripherals 204 can be integrated into a single application specific integrated circuit (ASIC).

[0028] Computing system 200 can also include a host processor 228 for receiving outputs from touch processor 202 and performing actions based on the outputs. For example, host processor 228 can be connected to program storage 232 and a display controller, such as an LCD driver 234. The LCD driver 234 can provide voltages on select (gate) lines to each pixel transistor and can provide data signals along data lines to these same transistors to control the pixel display image as described in more detail below. Host processor 228 can use LCD driver 234 to generate an image on touch screen 220, such as an image of a user interface (UI), and can use touch processor 202 and touch controller 206 to detect a touch on or near touch screen 220, such a touch input to the displayed UI. The touch input can be used by computer programs stored in program storage 232 to perform actions that can include, but are not limited to, moving an object such as a cursor or pointer, scrolling or panning, adjusting control settings, opening a file or document, viewing a menu, making a selection, executing instructions, operating a peripheral device connected to the host device, answering a telephone call, placing a telephone call, terminating a telephone call, changing the volume or audio settings, storing information related to telephone communications such as addresses, frequently dialed numbers, received calls, missed calls, logging onto a computer or a computer network, permitting authorized individuals access to restricted areas of the computer or computer network, loading a user profile associated with a user's preferred arrangement of the computer desktop, permitting access to web content, launching a particular program, encrypting or decoding a message, and/or the like. Host processor 228 can also perform additional functions that may not be related to touch processing.

[0029] Touch screen 220 can include touch sensing circuitry that can include a capacitive sensing medium having a plurality of drive lines 222 and a plurality of sense lines 223.

It should be noted that the term “lines” is a sometimes used herein to mean simply conductive pathways, as one skilled in the art will readily understand, and is not limited to elements that are strictly linear, but includes pathways that change direction, and includes pathways of different size, shape, materials, etc., and multiple electrically conductive circuit elements that can be electrically connected to form a single electrically conductive pathway. Drive lines 222 can be driven by stimulation signals 216 from driver logic 214 through drive interfaces 224a and 224b, and resulting sense signals 217 generated in sense lines 223 can be transmitted through a sense interface 225 to sense channels 208 (also referred to as an event detection and demodulation circuit) in touch controller 206. The stimulation signal may be an alternating current (AC) waveform. In this way, drive lines and sense lines can be part of the touch sensing circuitry that can interact to form capacitive sensing nodes, which can be thought of as touch picture elements (touch pixels), such as touch pixels 226 and 227. This way of understanding can be particularly useful when touch screen 220 is viewed as capturing an “image” of touch. In other words, after touch controller 206 has determined an amount of touch detected at each touch pixel in the touch screen, the pattern of touch pixels in the touch screen at which a touch occurred can be thought of as an “image” of touch (e.g. a pattern of fingers touching the touch screen).

[0030] Structures and operations of various example embodiments of integrated touch screens will now be described with reference to FIGS. 3-15.

[0031] FIG. 3 illustrates example embodiments of sense lines, drive lines, and other example structures of touch screen. FIG. 3 shows a more detailed view of a lower left hand portion of touch screen 220 along line “A” shown in FIG. 2. In the example embodiment shown in FIG. 3, each sense line 223 includes multiple conductive wires 301, e.g., five conductive wires in this example embodiment. Conductive wires 301 are disposed on the underside of a color filter glass 303, between the color filter glass and the TFT glass. The color filter glass 303 can include a plurality of color filters 305. In this example embodiment, color filters 305 each include three colors, blue (B), green (G), and red (R), such as in an RGB display. Each conductive wire 301 is positioned between two columns of color filters 305. In this example, the space between the columns of the color filters can be widened to accommodate the conductive wire. In the example shown, five conductive wires 301 of each sense line 223 can be connected to a contact pad 307 that conductively connects the conductive wires of the sense line and allows each group of five conductive wires to operate as a single sense line. Contact pads 307 can be electrically connected to, for example, sense channels 208 of touch controller 206 shown in FIG. 2, so that sense signals 217 received by each sense line 223 can be processed by the touch controller.

[0032] FIG. 3 also shows a TFT glass 309, on which can be formed circuit elements 311. Circuit elements 311 can be, for example, multi-function circuit elements that operate as part of the display circuitry of the touch screen and also as part of the touch sensing circuitry of the touch screen. In some embodiments, circuit elements 311 can be single-function circuit elements that operate only as part of the touch sensing system. In addition to circuit elements 311, other circuit elements (not shown) can be formed on TFT glass 309, such as transistors, capacitors, conductive vias, data lines, gate lines, etc. Circuit elements 311 and the other circuit elements

formed on TFT glass 309 can operate together to perform various display functionality required for the type of display technology used by touch screen 220, as one skilled in the art would understand. The circuit elements can include, for example, elements that can exist in conventional LCD displays. It is noted that circuit elements are not limited to whole circuit components, such a whole capacitor, a whole transistor, etc., but can include portions of circuitry, such as only one of the two plates of a parallel plate capacitor.

[0033] Some of the circuit elements 311 can be electrically connected together such that the circuit elements 311 and their interconnections together form drive lines 222. Various example methods of connecting together circuit elements 311 to form drive lines 222 will be discussed in more detail in reference to FIGS. 8-9. Some of the circuit elements 311 that lie between drive lines 222 can serve as a buffer region 313. One purpose of the buffer region 313 can be to separate drive lines 222 from one another to reduce or to prevent cross talk and stray capacitance effects. Circuit elements 311 in buffer region 313 can, for example, be unconnected from drive lines 222. In various embodiments, some or all of the circuit elements 311 in buffer region 313 can be, for example, electrically connected to each other, electrically unconnected from each other, maintained at a fixed voltage during a touch sensing operation, maintained at a floating potential during a touch sensing operation, etc. The example configurations of sense lines 223 and drive lines 222 shown in FIG. 3 can be laid out as shown in FIG. 2 as an overlapping orthogonal grid to form touch pixels 226 and 227, for example. Although not illustrated in FIG. 3, it is understood that first and second polarizers can be provided, the first polarizer can be adjacent the TFT glass and the second polarizer can be adjacent the color filter glass such that the TFT glass and the color filter glass are disposed between the first and second polarizers.

[0034] FIG. 3 also shows a pixel material 315 disposed between TFT glass 309 and color filtered glass 303. Pixel material 315 is shown in FIG. 3 as separate volume regions or cells above the circuit elements 311. For example, when the pixel material is a liquid crystal, these volume regions or cells are meant to illustrate regions of the liquid crystal controlled by the electric field produced by the pixel electrode and common electrode of the volume region or cell under consideration. Pixel material 315 can be a material that, when operated on by the display circuitry of touch screen 220, can generate or control an amount, color, etc., of light produced by each display pixel. For example, in an LCD touch screen, pixel material 315 can be formed of liquid crystal, with each display pixel controlling a volume region or cell of the liquid crystal. In this case, for example, various methods exist for operating liquid crystal in a display operation to control the amount of light emanating from each display pixel, e.g., applying an electric field in a particular direction depending on the type of LCD technology employed by the touch screen. In an in-plane switching (IPS), fringe field switching (FFS), and advanced fringe field switching (AFFS) LCD displays, for example, electrical fields between pixel electrodes and common electrodes (Vcom) disposed on the same side of the liquid crystal can operate on the liquid crystal material to control the amount of light from a backlight that passes through the display pixel. In an OLED (organic light emitting diode) display, for example, pixel material 315 can be, for example, an organic material in each pixel that generates light when a voltage is applied across the material. One skilled in

the art would understand that various pixel materials can be used, depending on the type of display technology of the touch screen.

[0035] FIG. 3A illustrates an enlarged view of a display pixel (as for example, a particular R, B, or G sub-pixel). As may be seen in FIG. 3A, there can be provided a first substrate 325 (such as the TFT glass 309 of FIG. 3), a second substrate 327 (such as the color filter glass 303 of FIG. 3), a first polarizer 329 and a second polarizer 331. The first polarizer 329 can be disposed adjacent the first substrate 325, and the second polarizer 331 can be disposed adjacent the second substrate 327. One display pixel of the first substrate 325 is shown greatly enlarged for purposes of illustration. A TFT 335 can have a gate 337, a source 339 connected to a data line 341, and a drain 343 connected to pixel electrode 345. Common electrode 347 can be disposed adjacent the pixel electrode 345 and can be connected to a common electrode conductive line 349. Layers of dielectric material 351a, 351b and 351c can be disposed as shown in FIG. 3A to separate electrodes from one another. FIG. 3A also illustrates gate insulation layer 353. An electrical fringe field between the pixel electrode 345 and the common electrode 347 can control the pixel material disposed between the first and second substrates during the display operation in order to provide a display image.

[0036] FIG. 4 illustrates a more detailed view of color filter glass 303. FIG. 4 includes color filters 305, conductive wires 301, which form sense lines 203. Conductive wires 301 can be, for example, metal lines such as aluminum, etc. In this regard conductive wires 301 can be positioned behind a black mask 401 so that the conductive wires are not visible to a user. Therefore conductive wires 301 need not be transparent conductors. However, in some example embodiments, conductive wires 301 can be transparent metal. Although in the example embodiment shown in FIG. 4 the spacing between the columns of color filters 305 can be widened to accommodate conductive wires 301, in some embodiments the spacing can be different, including equal spacing between the color filters.

[0037] FIG. 5 illustrates an example embodiment that includes an organic coat 501 that has been formed over conductive wires 301. In other words, conductive wires 301 can be formed on the underside of color filter glass 303, and then organic coat 501 can be formed on conductive wires 301, such that the conductive wires are disposed between color filter glass 303 and organic coat 501. Organic coat 501 can be formed of a material that can protect the conductive wires from exposure to chemicals, from physical abrasion, etc.

[0038] FIG. 6 illustrates another example embodiment showing another example configuration of sense lines 223. As in the example shown in FIG. 3, the example shown in FIG. 6 is a perspective view along line "A" shown in FIG. 2. In the example embodiment shown in FIG. 6, each of the sense lines 223 can include a conductive mesh 601. Conductive mesh 601 can be formed of, for example, metal wires, metal strips, etc., that are formed on the underside of color filter glass 303. Conductive mesh 601 can be, for example, a conductive orthogonal grid, the conductive lines of which are disposed between individual color filters 305.

[0039] Sense line 223, formed of conductive mesh 601, can be conductively connected to contact pad 307 such that a sense signal received by the sense line can be transmitted to touch controller 206 for processing. Similar to the previous embodiment, the portion of touch screen 220 shown in

example embodiment in FIG. 6 includes drive lines 222 and buffer regions 313, each of which can be formed of circuit elements 311 that have been grouped together either operationally or physically to perform their respective functions. In a touch sensing operation, stimulation signals applied to drive lines 222 can allow touches to be sensed by sense lines 223 in the areas of various touch pixels, such as touch pixels 226 and 227. The example embodiment shown in FIG. 6 also includes pixel material 315, similar to the example embodiment shown in FIG. 3.

[0040] FIG. 7 illustrates a more detailed view of color filter glass 303 shown in the example embodiment FIG. 6. FIG. 7 includes color filters 305 and conductive mesh 601, which form sense lines 203. Conductive mesh 601 can be, for example, formed of non-transparent metal lines such as aluminum, etc. In this regard conductive mesh 601 can be positioned behind a black mask 701 so that the conductive mesh is not visible to a user. Therefore, in this embodiment, the conductive mesh 601 need not be made of transparent conductors. However, in some example embodiments, conductive mesh 601 can be transparent metal.

[0041] FIG. 8 illustrates a more detailed view of an example configuration of drive lines 222 and buffer regions 313 according to various embodiments. In this example embodiment, circuit elements 311 can include common electrodes 801. Common electrodes 801 can be operated as multi-function circuit elements that can operate as part of the display circuitry in a display operation and can operate as part of the touch sensing circuitry in a touch sensing operation of the touch screen. Common electrodes 801 can be electrically connected together with conductive lines 803, to form the required regions such as regions that operate as drive lines 222 and regions that operate as buffer regions 313. In this example embodiment, common electrodes functional region can be physically connected with fixed conductive lines. In other words, the common electrodes in each region can be permanently connected through the physical design of the touch screen. In other words, common electrodes 801 can be grouped together to form drive lines. Grouping multi-function circuit elements of display pixels can include operating the multi-function circuit elements of the display pixels together to perform a common function of the group. Grouping into functional regions may be accomplished through one or a combination of approaches, for example, the structural configuration of the system (e.g., physical breaks and bypasses, voltage line configurations), the operational configuration of the system (e.g., switching circuit elements on/off, changing voltage levels and/or signals on voltage lines), etc.

[0042] Stimulation signals can be applied to drive lines 222 through drive lead lines 805. For example, drive lead lines can be electrically connected to driver logic 214, which can provide the stimulation signals during the touch sensing operation. Buffer region 313 can be connected to a buffer lead line 807, which can be connected to a buffer operator (not shown).

[0043] In the example shown in FIG. 8, each common electrode (Vcom) 801 can serve as a multi-function circuit element that can operate as display circuitry of the display system of touch screen 220 and can also operate as touch sensing circuitry of the touch sensing system. In this example, each common electrode 801 can operate as a common electrode of the display circuitry of the touch screen, and can also operate together when grouped with other common electrodes as touch sensing circuitry of the touch screen. For example, a

group of common electrodes **801** can operate together as a part of a drive line of the touch sensing circuitry during the touch sensing operation. Other circuit elements of touch screen **220** can form part of the touch sensing circuitry by, for example, electrically connecting together common electrodes **801** of a region, switching electrical connections, etc. Each display pixel can include a common electrode **801**, which can be a circuit element of the display system circuitry in the pixel stackup (i.e., the stacked material layers forming the display pixels) of the display pixels of some types of conventional LCD displays, e.g., fringe field switching (FFS) displays, that can operate as part of the display system to display an image.

[0044] In general, each of the touch sensing circuit elements may be either a multi-function circuit element that can form part of the touch sensing circuitry and can perform one or more other functions, such as forming part of the display circuitry, or may be a single-function circuit element that can operate as touch sensing circuitry only. Similarly, each of the display circuit elements may be either a multi-function circuit element that can operate as display circuitry and perform one or more other functions, such as operating as touch sensing circuitry, or may be a single-function circuit element that can operate as display circuitry only. Therefore, in some embodiments, some of the circuit elements in the display pixel stackups can be multi-function circuit elements and other circuit elements may be single-function circuit elements. In other embodiments, all of the circuit elements of the display pixel stackups may be single-function circuit elements.

[0045] In the embodiment shown in FIG. 9, the circuit elements used to form drive lines, Vcom **901** in this example, can be physically connected together on the TFT glass through conductive lines **903** to form individual rows of connected together Vcom **901**. The individual rows of Vcom, i.e., Vcom drive rows **905**, can be connected together with other Vcom drive rows in the periphery using contact pads **907**. In this example, each drive line **222** can be formed through fixed electrical connections.

[0046] FIG. 9A illustrates a more detailed view of the of the TFT glass substrate previously illustrated in FIGS. 3, 6, 8 and 9. It is understood that the pixel electrodes, gate lines, data lines, TFT elements, and common electrode conductive lines connecting together the common electrodes are also present in FIGS. 3, 6, 8 and 9, but have been omitted for simplicity of illustration. Thus, as seen in FIG. 9A, gate lines **925** extend in a row (horizontal) direction and data lines **927** extend in a column (vertical) direction. The gate lines can be connected to gates of transistors **929** (for example, thin film transistors, TFTs) and control (e.g., turn on) these transistors to permit data from the data lines **927** to be applied to pixel electrodes **931** during a display operation. During the display operation, common electrodes **901** can be held at a preset voltage. FIG. 9A also shows conductive lines **903** interconnecting common electrodes **901** along the row and column directions. An electrical field can be formed by the difference in voltage between pixel electrode **931** and its corresponding common electrode **901** and this electric field can control the pixel material disposed above the first substrate (disposed between the first and second substrates). A pixel can be formed at each crossing of gate line **925** and data line **927** and comprises the pixel electrode **931** and its corresponding common electrode **901**.

[0047] FIGS. 10 and 11 illustrate an example color filter glass design and an example TFT design, respectively, according to various embodiments. FIG. 10 includes an

example configuration of multiple sense lines **223**, each including multiple conductive wires such as conductive wires **301**, connected to multiple contact pads, such as contact pad **311**. For the sake of clarity, individual color filters are not shown in FIG. 10. In this example embodiment, conductive wires **301** and contact pads **307** can be formed on color filter glass **303** by, for example, physical vapor deposition (PVD).

[0048] FIG. 11 illustrates an example TFT glass according to various example embodiments. TFT glass **1101** can include various touch sensing circuitry and display circuitry. Touch sensing circuitry can include, for example, drive lines **222**. In this example embodiment, each drive line **222** can include multiple Vcom drive rows **1103**. In this example embodiment, each Vcom drive row **1103** in a drive line **222** can be connected to a single conductive contact pad **1105** on the left side of the TFT glass, and connected to a single contact pad **1105** on the right side of TFT glass. Contact pads **1105** can be connected through drive signal lines **1107** to touch controller **206** (FIG. 2) through a touch flex circuit **1109**. In this way, for example, multiple Vcom drive rows **1103** can be driven together as a single drive line **222** during a touch sensing operation. TFT glass **1101** can also include integrated drivers **1111** that can drive the display circuitry, for example, using various display circuit elements such as gate lines, data lines, etc. Touch flex circuit **1109** can also be connected to sense signal lines **1113**, which can be connected to contact pads **307** on the color filter glass through conductive paste **1115**.

[0049] FIG. 12 illustrates another example TFT glass design. FIG. 12 shows a TFT glass **1201** in which individual rows of Vcom are electrically connected together to form Vcom drive rows **1203**. In other words, similar to the previous embodiment, each Vcom circuit element in Vcom drive row **1203** is permanently connected to the other Vcom in the drive row. However, in the example embodiment shown in FIG. 12, each individual Vcom drive row **1203** can be connected to a Vcom driver **1205** in the periphery of TFT glass **1201**. Vcom driver **1205** can operate the Vcom drive rows **1203** in each drive line **222** to generate the same stimulation signals on each individual Vcom drive row **1203** of each drive line **222** during a touch sensing operation. In other words, a first stimulation signal can be applied to a first group of individual rows of Vcom, and a second stimulation signal can be applied to a second group of individual rows of Vcom. In this way, for example, a group of multiple Vcom drive rows **1203** can be operated together as a single drive line **222** even though the individual Vcom drive rows themselves are not connected to each other through fixed electrical connections.

[0050] Likewise, during a display operation of the touch screen, integrated gate drivers **1207** can operate the individual Vcom drive rows **1203** as part of the display circuitry to display an image on the touch screen. Therefore, in this example embodiment, the individual Vcom drive rows **1203** can be grouped together or operated individually as needed depending on the operation of the touch screen.

[0051] FIG. 13 illustrates an example method of driving the circuit elements of the touch screen in the display operation and in the touch sensing operation. This example method can apply to an operation of a touch screen including the design of TFT glass **1201** of FIG. 12, for example. In this example embodiment, the display operation in which an image is displayed and the touch sensing operation in which touch is sensed can occur concurrently by operating different portions of the touch screen differently, that is, one group of circuit elements can be operated as display circuitry to display an

image while, at the same time, another group of the circuit elements can be operated as touch sensing circuitry to sense a touch.

[0052] In a first time period **1301**, integrated gate driver **1207**, along with other display circuitry, can update a first group **1303** of circuit elements, e.g., an individual row of display pixels, to display a line of an image on the touch screen. For example, integrated gate driver **1207** can apply a common voltage to the Vcom in the first row of display pixels. Concurrently, in first time period **1301**, Vcom driver **1205** can apply a stimulation signal to a first drive line **1305** that includes a second group **1307** of the circuit elements. Applying the stimulation signal can include, for example, applying the same stimulation signal to each of the individual Vcom drive rows **1203** in the first drive line **222**. Because the image scanning row currently being scanned by integrated gate driver **1207** is not located in first drive line **1305**, the Vcom drive rows **1203** being used for updating the displayed image do not overlap with the Vcom drive rows **1203** used for touch sensing as a drive line.

[0053] A second time period **1302** shows a third group **1309** of circuit elements can be operated as display circuitry, e.g., integrated gate driver **1207** can apply a common voltage to the Vcom in a third row of display pixels. The common voltage applied to the Vcom in the third row can be, for example, of an opposite polarity to the common voltage applied to the Vcom in the first row of display pixels. Concurrently, in second time period **1302**, Vcom driver **1205** can apply a stimulation signal to a second drive line **1311** that includes first group **1303** and additional rows of Vcom **1313**. In this way, for example, display operation and touch sensing operation can occur concurrently in an integrated touch screen.

[0054] In the example driving method shown in FIG. **13**, display updating can be done on a row by row basis for individual Vcom drive rows **1203**. In some embodiments, integrated gate driver **1207** can change the Vcom polarity on a row by row basis as well. For example, for each row of display pixel integrated gate driver **1207** can operate to change the polarity of Vcom, switch the gates of the row of display pixels to an "on" state, write data into each display pixel, and switch the gates to an "off" state. When different rows of Vcom are operated to perform touch sensing concurrently with display updating, as in this example embodiment, it is noted that in the touch sensing groups of circuit elements no data is being written into the display pixels in the rows of pixels in the drive line because the gate lines of these rows of display pixels are in the "off" state.

[0055] FIG. **14** illustrates another example embodiment of sense lines **223**. FIG. **14** illustrates a color filter glass **303** that includes sense lines **223** formed of a transparent conductor, such as indium tin oxide (ITO), on the underside of color filter glass **303**. The ITO can be deposited on the underside of color filter glass **303** to cover a contiguous area including covering color filters **305**. FIG. **14** also illustrates ground regions **1401** between sense lines **223**. Ground regions **1401** can be formed of transparent conductor, such as ITO formed on the underside of color filter glass **303** and electrically separated from the sense lines on either side of each sense line. Ground regions **1401** can be connected to, for example, a ground or virtual ground in the periphery of the panel. Positioning ground regions between sense regions can help reduce interference in some embodiments.

[0056] FIG. **15** illustrates an example TFT glass design, TFT glass **1501**. In this example, TFT glass **1501** can include

various touch sensing circuitry and display circuitry. Touch sensing circuitry can include, for example, drive lines **222**. In this example embodiment, each drive line **222** can include multiple Vcom drive rows **1503**. In this example embodiment, each Vcom drive row **1503** in a drive line **222** can be connected to a single conductive contact pad **1505** on the left side of the TFT glass, and connected to a single contact pad **1105** on the right side of TFT glass. Contact pads **1505** can be connected through drive signal lines **1507** to touch controller **206** through a touch flex circuit **1509**. In this way, for example, multiple Vcom drive rows **1503** can be driven together as a single drive line **222** during a touch sensing operation. TFT glass **1501** can also include integrated drivers **1511** that can drive the display circuitry, for example, using various display circuit elements such as gate lines, data lines, etc. Touch flex circuit **1509** can also be connected to sense signal lines **1513**, which can be connected to contact pads **307** on the color filter glass through conductive paste **1515**.

[0057] In FIGS. **3**, **6**, **8** and **9**, each row of display pixels is illustrated as having a separate common electrode for each display pixel. These common electrodes (for example, circuit elements **311** of FIGS. **3** and **6**, common electrode **801** of FIG. **8**, and common electrode **901** of FIG. **9**) may however, not be physically distinct and separate structures corresponding to each pixel electrode. In some embodiments the common electrodes that are electrically connected together across a particular row, as for example, Vcom drive row **905** of FIG. **9**, may be formed by a single, continuous layer of conductive material, e.g., ITO. Further, a single continuous layer of conductive material (ITO) may be used for an entire drive line **222** such as in FIG. **8** where the illustrated common electrodes within each drive line **222** are electrically connected together along both rows (first direction) and columns (second direction, perpendicular to the first direction).

[0058] In addition, although example embodiments herein may describe the display circuitry as operating during a display operation, and describe the touch sensing circuitry as operating during a touch sensing operation, it should be understood that a display operation and a touch sensing operation may be operated at the same time, e.g., partially or completely overlap, or the display operation and touch phase may operate at different times. Also, although example embodiments herein describe certain circuit elements as being multi-function and other circuit elements as being single-function, it should be understood that the circuit elements are not limited to the particular functionality in other embodiments. In other words, a circuit element that is described in one example embodiment herein as a single-function circuit element may be configured as a multi-function circuit element in other embodiments, and vice versa.

[0059] Although embodiments of this disclosure have been fully described with reference to the accompanying drawings, it is to be noted that various changes and modifications including, but not limited to, combining features of different embodiments, omitting a feature or features, etc., as will be apparent to those skilled in the art in light of the present description and figures.

[0060] For example, one or more of the functions of computing system **200** described above can be performed by firmware stored in memory (e.g. one of the peripherals **204** in FIG. **2**) and executed by touch processor **202**, or stored in program storage **232** and executed by host processor **228**. The firmware can also be stored and/or transported within any computer-readable medium for use by or in connection with

an instruction execution system, apparatus, or device, such as a computer-based system, processor-containing system, or other system that can fetch the instructions from the instruction execution system, apparatus, or device and execute the instructions. In the context of this document, a “computer-readable medium” can be any medium that can contain or store the program for use by or in connection with the instruction execution system, apparatus, or device. The computer readable medium can include, but is not limited to, an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system, apparatus or device, a portable computer diskette (magnetic), a random access memory (RAM) (magnetic), a read-only memory (ROM) (magnetic), an erasable programmable read-only memory (EPROM) (magnetic), a portable optical disc such as a CD, CD-R, CD-RW, DVD, DVD-R, or DVD-RW, or flash memory such as compact flash cards, secured digital cards, USB memory devices, memory sticks, and the like.

[0061] The firmware can also be propagated within any transport medium for use by or in connection with an instruction execution system, apparatus, or device, such as a computer-based system, processor-containing system, or other system that can fetch the instructions from the instruction execution system, apparatus, or device and execute the instructions. In the context of this document, a “transport medium” can be any medium that can communicate, propagate or transport the program for use by or in connection with the instruction execution system, apparatus, or device. The transport readable medium can include, but is not limited to, an electronic, magnetic, optical, electromagnetic or infrared wired or wireless propagation medium.

[0062] Example embodiments may be described herein with reference to a Cartesian coordinate system in which the x-direction and the y-direction can be equated to the horizontal direction and the vertical direction, respectively. However, one skilled in the art will understand that reference to a particular coordinate system is simply for the purpose of clarity, and does not limit the direction of the elements to a particular direction or a particular coordinate system. Furthermore, although specific materials and types of materials may be included in the descriptions of example embodiments, one skilled in the art will understand that other materials that achieve the same function can be used. For example, it should be understood that a “metal layer” as described in the examples below can be a layer of any electrically conductive material.

[0063] In some embodiments, the drive lines and/or sense lines can be formed of other elements including, for example other elements already existing in typical LCD displays (e.g., other electrodes, conductive and/or semiconductive layers, metal lines that would also function as circuit elements in a typical LCD display, for example, carry signals, store voltages, etc.), other elements formed in an LCD stackup that are not typical LCD stackup elements (e.g., other metal lines, plates, whose function would be substantially for the touch sensing system of the touch screen), and elements formed outside of the LCD stackup (e.g., such as external substantially transparent conductive plates, wires, and other elements). For example, part of the touch sensing system can include elements similar to known touch panel overlays.

[0064] Although various embodiments are described with respect to display pixels, one skilled in the art would understand that the term display pixels can be used interchangeably with the term display sub-pixels in embodiments in which

display pixels are divided into sub-pixels. For example, some embodiments directed to RGB displays can include display pixels divided into red, green, and blue sub-pixels. In other words, in some embodiments, each sub-pixel can be a red (R), green (G), or blue (B) sub-pixel, with the combination of all three R, G and B sub-pixels forming one color display pixel. One skilled in the art would understand that other types of touch screen could be used. For example, in some embodiments, a sub-pixel may be based on other colors of light or other wavelengths of electromagnetic radiation (e.g., infrared) or may be based on a monochromatic configuration, in which each structure shown in the figures as a sub-pixel can be a pixel of a single color.

What is claimed is:

1. A touch screen including a plurality of display pixels, the touch screen comprising:

- a color filter layer;
- a thin film transistor (TFT) layer including a plurality of drive lines;
- a liquid crystal layer disposed between the TFT layer and the color filter layer; and
- a plurality of sense lines disposed between liquid crystal layer and the color filter layer.

2. The touch screen of claim 1, wherein each display pixel includes a circuit element in the TFT layer, and each drive line includes a plurality of the circuit elements.

3. The touch screen of claim 2, wherein the circuit elements in each individual row of display pixels are electrically connected through fixed conductive connections, and during a touch sensing operation a first stimulation signal is applied to a first plurality of individual rows of the circuit elements and a second stimulation signal is applied to a second plurality of individual rows of the circuit elements.

4. The touch screen of claim 2, wherein the circuit elements are connected to display circuitry during a display operation of the touch screen.

5. The touch screen of claim 4, wherein the circuit elements include common electrodes.

6. The touch screen of claim 4, wherein the circuit elements apply an electric field to the liquid crystal layer during the display operation.

7. The touch screen of claim 1, wherein each sense line includes a plurality of conductive lines disposed on the color filter layer.

8. The touch screen of claim 7, wherein each sense line includes a conductive mesh disposed on the color filter layer.

9. The touch screen of claim 1, wherein the color filter layer includes a black mask, and the sense lines are disposed on the black mask.

10. A touch screen including a plurality of display pixels, the touch screen comprising:

- a color filter layer;
- a plurality of drive lines that carry, during a touch sensing operation, stimulation signals;
- a pixel material disposed between the plurality of drive lines and the color filter layer, the pixel material including one of a light modifying material and a light generating material;

display circuitry that controls, during a display operation, the pixel material of each display pixel such that a controlled amount of light from each display pixel passes through the color filter to form an image; and

a plurality of sense lines that receive sense signals based on the stimulation signals, the sense lines being disposed between the pixel material and the color filter layer.

11. The touch screen of claim **10**, wherein the sense lines are disposed on the color filter layer.

12. The touch screen of claim **11**, wherein the color filter layer includes a plurality of individual color filters, and the sense lines include conductive material disposed between individual color filters.

13. The touch screen of claim **12**, wherein the sense lines include non-transparent conductive material.

14. The touch screen of claim **11**, wherein the sense lines include transparent conductive material.

15. The touch screen of claim **11**, further comprising an organic coat disposed on the sense lines.

16. A method of operating an integrated touch screen including a plurality of circuit elements, the method comprising:

operating a first group of the circuit elements as display circuitry in a first display operation that displays an image on the touch screen; and

operating a second group of the circuit elements as touch sensing circuitry in a first touch sensing operation that senses a touch on or near the touch screen,

wherein operating the first group in the first display operation occurs concurrently with operating the second group in the first touch sensing operation.

17. The method of claim **16**, further comprising:

operating the first group as touch sensing circuitry in a second touch sensing operation.

18. The method of claim **17**, further comprising:

operating a third group of the circuit elements as display circuitry in a second display operation, wherein operating the third group in the second display operation occurs concurrently with operating the first group in the second touch sensing operation.

19. The method of claim **17**, wherein the second touch sensing operation includes operating one or more additional groups of the circuit elements as touch sensing circuitry concurrently with operating the first group.

20. The method of claim **16**, wherein operating the second group as touch sensing circuitry in the first touch sensing operation includes applying a stimulation signal to the second group.

21. The method of claim **16**, wherein the circuit elements include common electrodes.

22. The method of claim **21**, wherein the first group includes a first row of the common electrodes, and operating the first group of circuit elements in the first display operation includes applying a first common voltage to the first row of the common electrodes.

23. The method of claim **22**, further comprising:

applying a second common voltage to a second row of the common electrodes, the second common voltage being an opposite polarity of the first common voltage.

24. The method of claim **21**, wherein the second group includes a plurality of rows of common electrodes.

25. The method of claim **24**, wherein the plurality of rows of common electrodes are electrically connected through fixed conductive connections.

26. A touch screen including a plurality of display pixels, the touch screen comprising:

a first substrate having a plurality display pixels disposed thereon, each display pixel having a pixel electrode and a switching element for connecting a data line to the pixel electrode to display an image on the touch screen during a display mode of operation, and for disconnecting the data line from the pixel electrode during a touch sensing mode of operation;

the plurality of display pixels having common electrodes for receiving a common voltage during the display mode of operation and a stimulation voltage during a touch sensing mode of operation;

a second substrate including a color filter;

a pixel material disposed between the first and second substrates; and

a plurality of sense lines disposed directly or indirectly on the second substrate on a side thereof facing the first substrate.

27. The touch screen of claim **26** wherein the stimulation voltage in the form of an alternating waveform.

28. The touch screen of claim **27** wherein the plurality of display pixels are arranged along a first direction and along a second direction, perpendicular to the first direction, and wherein each of a plurality of drive lines is formed by at least one group of common electrodes disposed in the first direction; and

the plurality of sense lines are disposed along the second direction, crossing the first direction;

wherein each intersection of the plurality of drive lines with the plurality of sense lines forms a capacitively sensing node.

* * * * *

专利名称(译)	集成触摸屏		
公开(公告)号	US20120162104A1	公开(公告)日	2012-06-28
申请号	US13/251099	申请日	2011-09-30
[标]申请(专利权)人(译)	张世CHANG 钟约翰Z		
申请(专利权)人(译)	张世CHANG 钟JOHN Z.		
当前申请(专利权)人(译)	张世CHANG 钟JOHN Z.		
[标]发明人	CHANG SHIH CHANG ZHONG JOHN Z		
发明人	CHANG, SHIH CHANG ZHONG, JOHN Z.		
IPC分类号	G02F1/1335 G06F3/041		
CPC分类号	G06F3/0412 G06F3/044 G06F2203/04108 G06F2203/04104 G02F1/13338 G06F3/0446 G02F1/1333 G02F1/13306 G02F1/133305 G02F1/133512 G02F1/133514 G02F1/134336 G02F1/1368 G06F1/16		
其他公开文献	US8743300		
外部链接	Espacenet USPTO		

摘要(译)

提供集成触摸屏，包括由薄膜晶体管层的分组在一起的电路元件形成的驱动线和在滤色器层和修改或产生光的材料层之间形成的感测线。 TFT层中的公共电极 (Vcom) 可以在触摸感测操作期间被分组在一起以形成驱动线。感光线可以形成在滤色镜玻璃的下侧，并且液晶区域可以设置在滤色镜玻璃和TFT层之间。将感测线放置在滤色器玻璃的下侧上，即在显示像素单元内，可以提供例如在组装像素单元之后允许滤色器玻璃变薄的益处。

