



US 20120320026A1

(19) **United States**(12) **Patent Application Publication**
Kitayama et al.(10) **Pub. No.: US 2012/0320026 A1**(43) **Pub. Date: Dec. 20, 2012**(54) **LIQUID CRYSTAL DISPLAY DEVICE****Publication Classification**

(75) Inventors: **Masae Kitayama**, Osaka-shi (JP);
Mitsuaki Hirata, Osaka-shi (JP);
Fumikazu Shimoshikiryo, Osaka-shi (JP);
Kenichi Hyodo, Osaka-shi (JP);
Ikumi Itsumi, Osaka-shi (JP); **Yuki Yamashita**, Osaka-shi (JP); **Akane Sugisaka**, Osaka-shi (JP)

(73) Assignee: **SHARP KABUSHIKI KAISHA**,
 Osaka-shi, Osaka (JP)

(21) Appl. No.: **13/575,691**

(22) PCT Filed: **Jan. 27, 2011**

(86) PCT No.: **PCT/JP2011/051586**

§ 371 (c)(1),

(2), (4) Date: **Aug. 29, 2012**

(30) **Foreign Application Priority Data**

Jan. 29, 2010 (JP) 2010-019258

(51) **Int. Cl.**

G09G 3/36 (2006.01)

G06F 3/038 (2006.01)

(52) **U.S. Cl.** **345/212; 345/88**

(57)

ABSTRACT

A color display pixel P_{CD} in a liquid crystal display device (100) includes first through fourth pixels P_1 through P_4 arrayed in two rows by two columns, and first and second signal lines (13a, 13b) which are located in correspondence with each column of pixels and are supplied with signal voltages of polarities opposite to each other from a signal line driving circuit (30) in each vertical scanning period. A TFT (14) of one of the first and third pixel P_1 and P_3 is connected to the first signal line (13a), and a TFT (14) of the other pixel is connected to the second signal line (13b). A TFT (14) of one of the second and fourth pixel P_2 and P_4 is connected to the first signal line (13a), and a TFT (14) of the other pixel is connected to the second signal line (13b). The TFTs (14) of the first through fourth pixels P_1 through P_4 are controlled to be ON/OFF by a common scanning signal, and the polarities of the signal voltages supplied to the first and second signal lines (13a, 13b) are constant during an arbitrary vertical scanning period. Owing to this, the load on the signal line driving circuit is reduced.

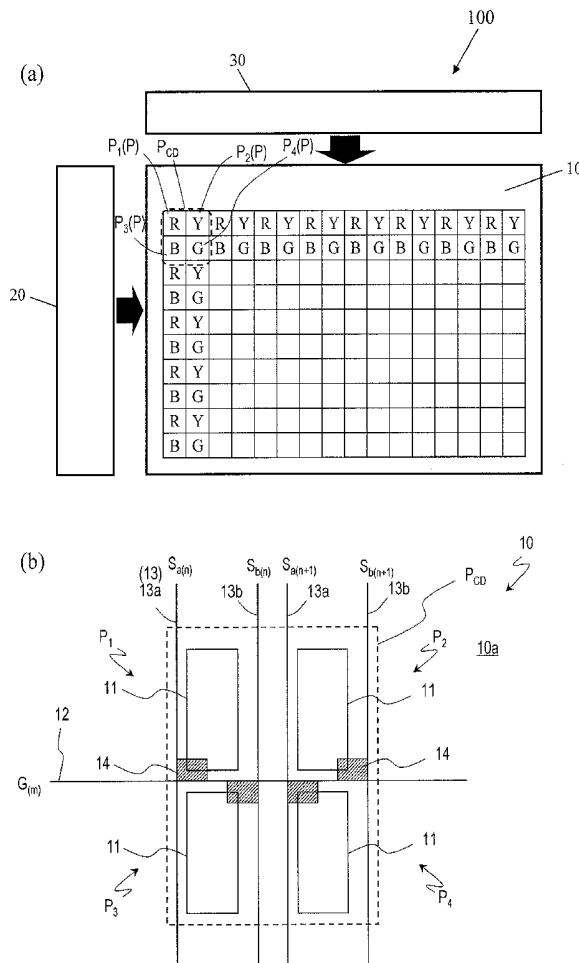


FIG. 1

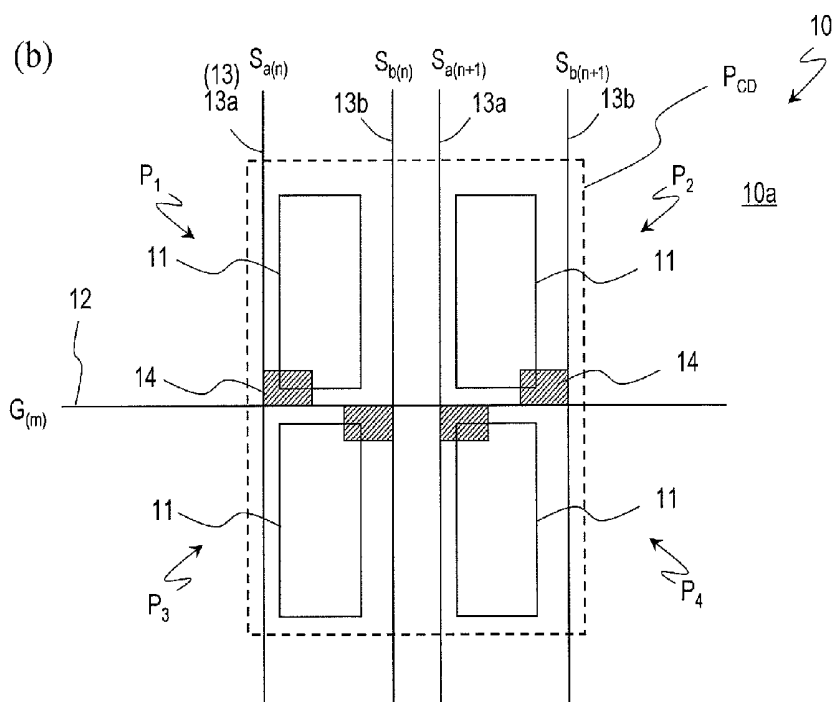
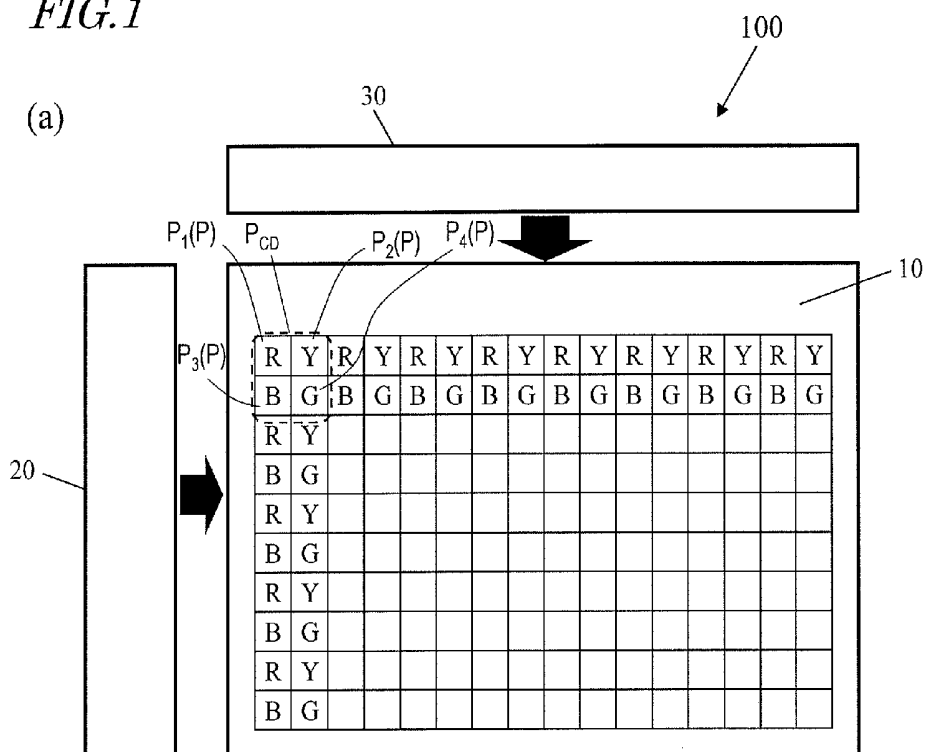


FIG. 2

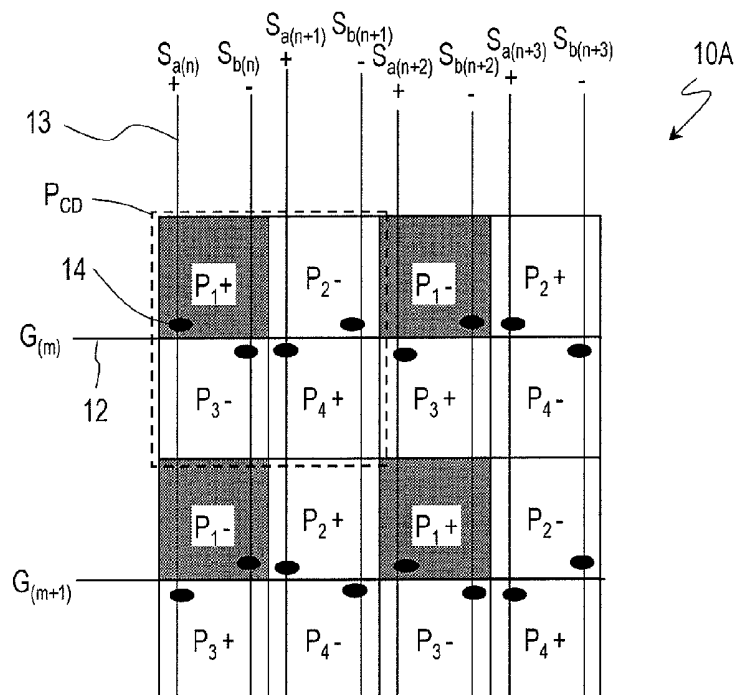


FIG. 3

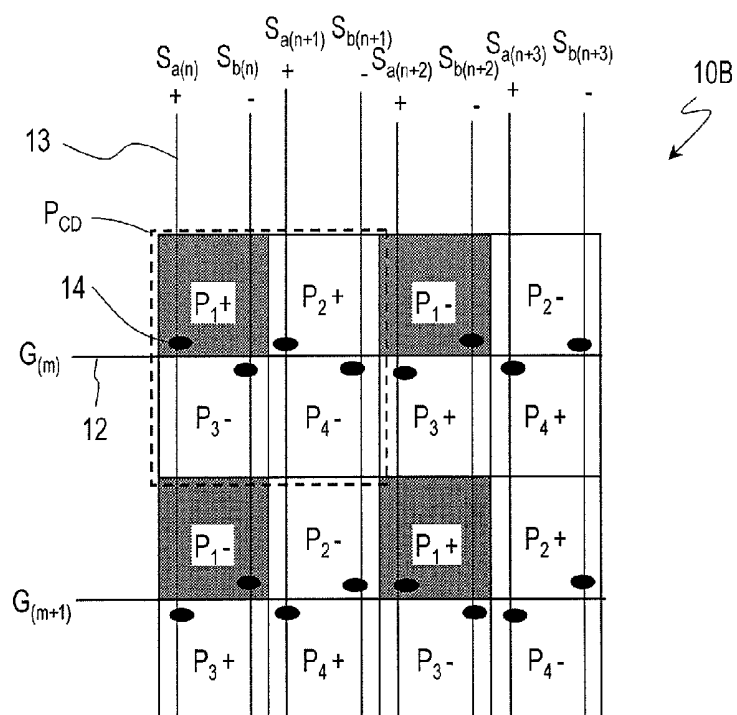


FIG. 4

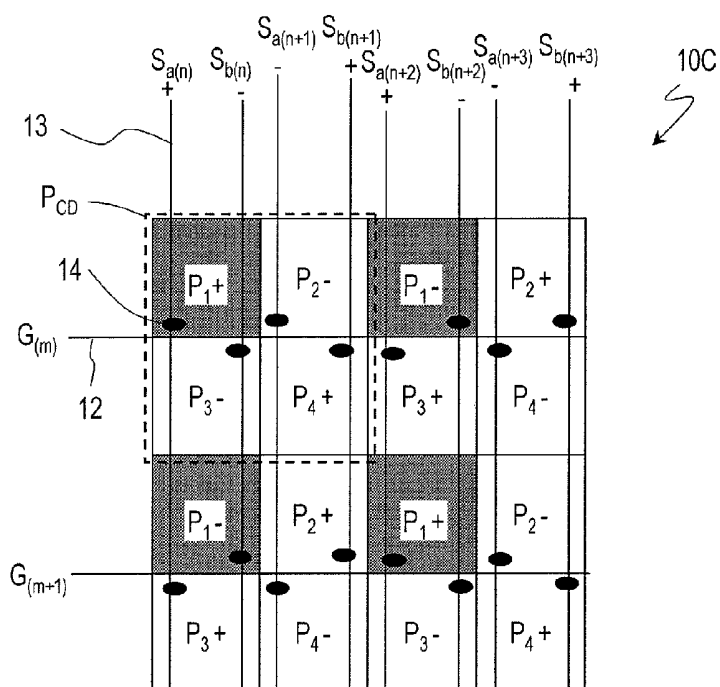


FIG. 5

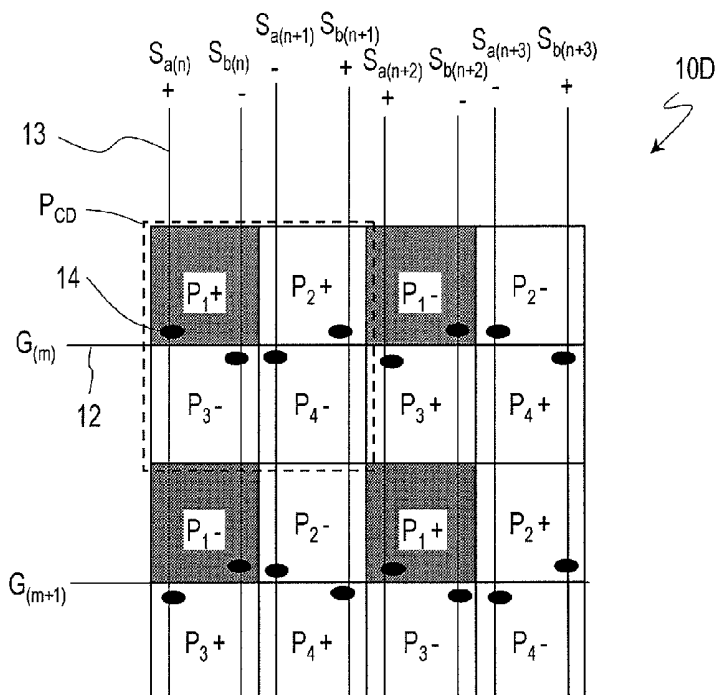


FIG. 6

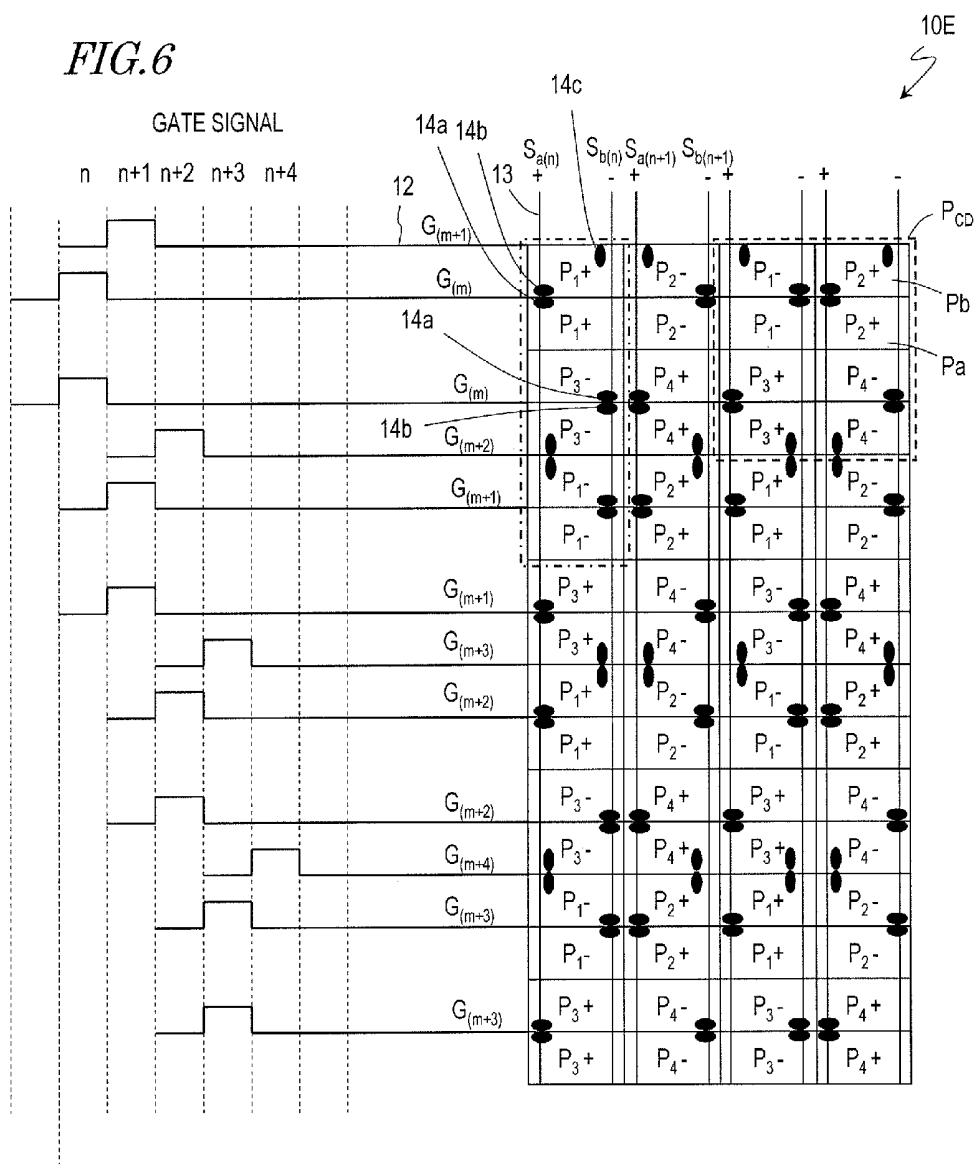


FIG. 7


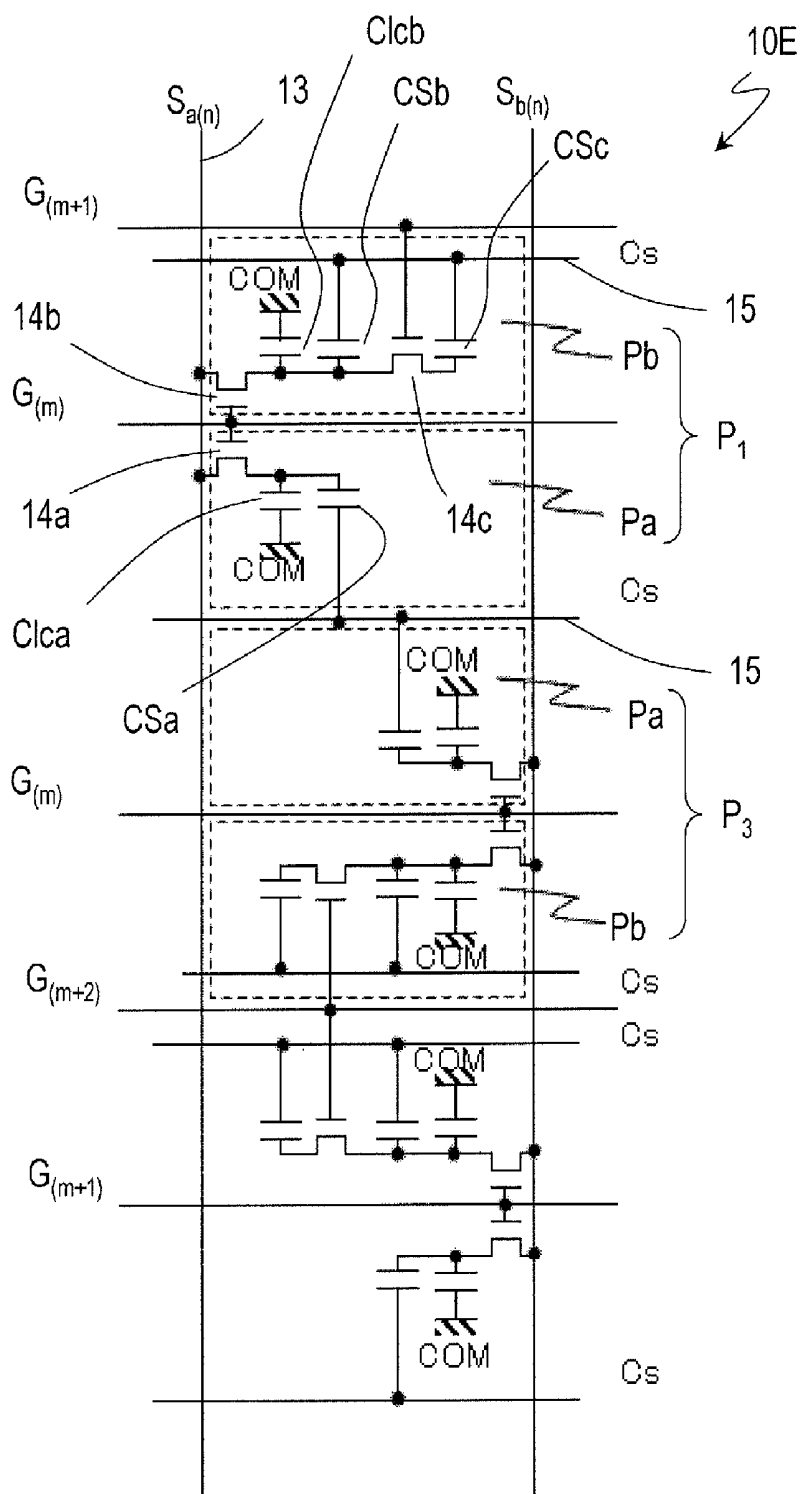


FIG. 8

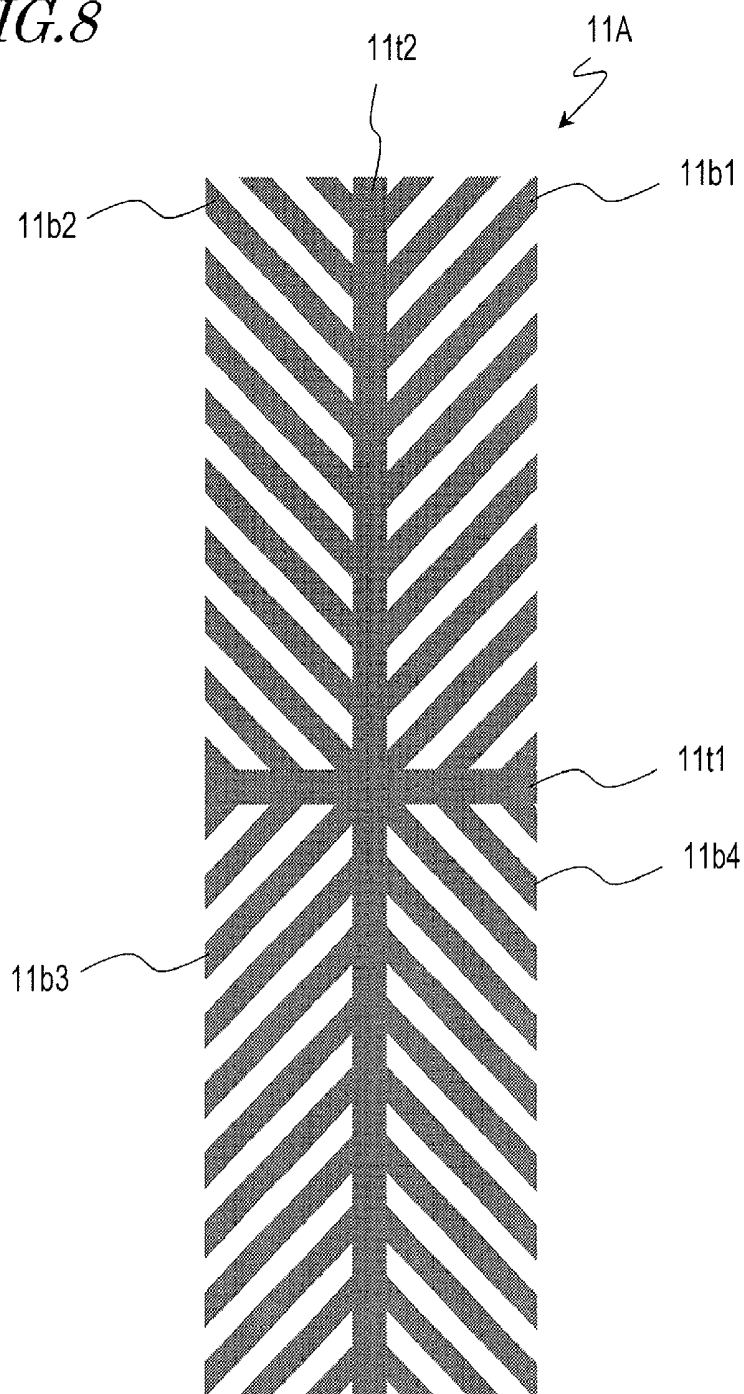

LIQUID CRYSTAL DISPLAY DEVICE

TECHNICAL FIELD

[0001] The present invention relates to a liquid crystal display device, and specifically to a liquid crystal display device for providing color display by four or more types of pixels for displaying different colors from each other.

BACKGROUND ART

[0002] Today, liquid crystal display devices are used in various applications. Each of pixels in a liquid crystal display device exhibits a luminance in accordance with the level of voltage applied to a liquid crystal layer. As an electrical representation, the pixel is represented as a liquid crystal capacitance formed by pixel electrode/liquid crystal layer/counter electrode. The level of voltage applied to the pixel (liquid crystal layer) is represented based on the potential of the counter electrode. A liquid crystal material is a dielectric material, and is deteriorated when being supplied with a DC voltage for a long period of time. In order to prevent this, the polarity (direction) of the voltage (electric field) applied to the liquid crystal layer is inverted at intervals of a certain time period (referred to as the “AC driving”). Frame inversion driving (or field inversion driving), by which the polarity of the voltage (direction of the electric field) applied to each pixel is inverted at intervals of a vertical scanning period is adopted.

[0003] However, in mass-produced liquid crystal display devices, it is difficult to accurately match the absolute values of the voltage before and after the polarity inversion of voltage. Each time the polarity is inverted, the absolute value of the voltage is slightly changed. As a result, while a still image is displayed, each time the polarity is inverted, the luminance is changed and thus the display flickers. According to a method for reducing the flicker, pixels supplied with voltages of opposite polarities are located to be adjacent to each other in a display area, so that the luminances of the pixels are spatially averaged. By use of this effect, the flicker is reduced. A representative technique of such a method is “one-dot inversion driving”, by which the polarities of the voltages applied to the adjacent pixels are made opposite to each other. The term “dot” means the pixel.

[0004] In a conventionally common liquid crystal display device, one color display includes three pixels for displaying red, green and blue, which are the three primary colors of light. The luminance of each pixel is controlled to provide color display. The color display pixel and the pixel may occasionally be referred to as the “pixel” and “sub pixel”, respectively (see, for example, Patent Document 1). When one-dot inversion driving is performed in a liquid crystal display device in which one color display pixel includes R, G and B pixels arrayed in a row direction, the polarities of the pixels in one row become R(+), G(−), B(+), R(−), G(+), B(−). Namely, when the polarities of the voltages applied to pixels adjacent to each other are made inverted to each other, the polarities of the voltages applied to pixels of a same color which are adjacent to each other are also made inverted to each other.

[0005] Recently, in order to enlarge the range of colors which can be displayed by a liquid crystal display device (referred to as the “color reproduction range”), techniques of using an increased number of primary colors for display have been proposed. For example, Patent Document 1 discloses a

liquid crystal display device in which a color display pixel includes a red (R) pixel, a green (G) pixel, a blue (B) pixel, and a pixel of at least one more color (yellow (Y) pixel, a cyan (C) pixel, a magenta (M) pixel or a white (W) pixel). When the white pixel is used, the color reproduction range cannot be enlarged but the display luminance can be increased.

[0006] As shown in FIG. 8(a) of Patent Document 1, when one-dot inversion driving is performed in a liquid crystal display device in which two color pixels are alternately arrayed in the row direction, the polarities of the pixels in one row become, for example, R(+), Y(−), R(+), Y(−). Namely, pixels of the same color are supplied with voltages of the same polarity. When display is provided with pixels of a particular color (e.g., when red is displayed in the entire screen), flicker occurs.

[0007] Patent Document 1 describes that flicker can be prevented by the following. A color display pixel includes four or more pixels, which include N pixels (N is an integer of 2 or greater) at least in a vertical scanning direction (column direction). Two-dot inversion driving (by which the polarity is inverted every second column of pixels) is performed in a horizontal scanning direction (row direction), and N horizontal line inversion driving (by which the polarity is inverted every N'th row of pixels) is performed in the vertical scanning direction.

[0008] Patent Document 2 also discloses a liquid crystal display device in which a color display pixel includes pixels arrayed in two rows by row columns, although this is not for the purpose of enlarging the color reproduction range (in Patent Document 2, the color display pixel is referred to as the “picture element”). As examples of combination of four pixels included in the color display pixel, Patent Document 2 shows a combination of one blue pixel, one red pixel and two green pixels, and a combination of one blue pixel, one red pixel, one green pixel and one white pixel. The liquid crystal display device disclosed in Patent Document 2 includes one scanning line common to the four pixels included in the color display pixel and four signal lines (two signal lines are provided in each of two positions sandwiching two pixels arrayed in the column direction). The polarities of the voltages supplied to adjacent signal lines are opposite to each other. Signal lines connected to pixels located at corresponding positions in color display pixels adjacent to each other in the row direction have different positional relationships from each other with respect to the corresponding pixels. As a result, the polarities of the signal voltages supplied to pixels of a same color which are adjacent to each other in the row direction are opposite to each other. Therefore, flicker can be prevented.

CITATION LIST

Patent Literature

- [0009]** Patent Document 1: Japanese Laid-Open Patent Publication No. 2008-76416
- [0010]** Patent Document 2: Japanese Laid-Open Patent Publication No. 2001-33757

SUMMARY OF INVENTION

Technical Problem

[0011] Currently, liquid crystal display devices operable by double speed or quadruple speed driving and thus having improved moving image display characteristics have been put

into practical use. More specifically, liquid crystal display devices in which the vertical scanning period is $\frac{1}{120}$ sec. or $\frac{1}{240}$ sec. have been developed, as opposed to a conventional liquid crystal display device in which the vertical scanning period is $\frac{1}{60}$ sec. (vertical scanning frequency is 60 Hz). These newly developed liquid crystal display devices are for HDTV, and the display screen thereof has been progressively enlarged.

[0012] The “vertical scanning period” means a time period from when a scanning line (gate bus line) is selected until the same scanning line is selected the next time. In a conventional liquid crystal display device in which double speed driving is not performed, when the video signal is a signal for non-interlace driving, 1 vertical scanning period corresponds to 1 frame period of the video signal, whereas when the video signal is a signal for interlace driving, 1 vertical scanning period corresponds to 1 field of the video signal. For example, in the case of an NTSC signal, 1 vertical scanning period in a liquid crystal display device is 16.7 msec, which is the inverse of the field frequency of the NTSC signal (60 Hz). Since interlace driving is not performed in a liquid crystal display device, a signal voltage is written to all the pixels in both of an odd numbered field and an even numbered field. Therefore, the inverse of the field frequency of the NTSC signal is the vertical scanning period.

[0013] When dot inversion driving is performed in a liquid crystal display device including a great number of pixels, which is operable at 120 Hz or 240 Hz, for example, a liquid crystal display device for HDTV, the load on the signal line driving circuit (source driver) for supplying a signal voltage to the signal lines is increased. Namely, the power consumption by the signal line driving circuit is increased, and thus the caloric value is increased.

[0014] When the technology described in Patent Document 1 or 2 is adopted, flicker can be prevented in a liquid crystal display device in which the color display pixel includes four pixels arrayed in two rows by two columns as described above, but the load on the signal line driving circuit is large. In addition, when the vertical scanning frequency (also referred to simply as the “driving frequency”) is high, flicker is difficult to be visually recognized. From the point of view of industrial production, it is important that the load on the signal line driving circuit should be reduced.

[0015] The present invention made in light of the above-described problems has a main object of reducing the load on the signal line driving circuit in a liquid crystal display device in which a color display pixel includes four pixels arrayed in two rows by two columns.

Solution to Problem

[0016] A liquid crystal display device according to the present invention includes a plurality of pixels arrayed in a matrix of a plurality of rows by a plurality of columns. The liquid crystal display device includes an active matrix substrate including a pixel electrode provided for each of the plurality of pixels, a switching element connected to the pixel electrode, a plurality of scanning lines extending in a row direction, and a plurality of signal lines extending in a column direction; a counter substrate facing the active matrix substrate; a liquid crystal layer provided between the active matrix substrate and the counter substrate; a scanning line driving circuit for supplying a scanning signal to each of the plurality of scanning lines; and a signal line driving circuit for supplying a positive or negative signal voltage to each of the

plurality of signal lines. The plurality of pixels form a plurality of color display pixels, and the plurality of color display pixels each include first, second, third and fourth pixels arrayed in two rows by two columns; wherein the first pixel and the second pixel are adjacent to each other in the row direction, the third pixel and the fourth pixel are adjacent to each other in the row direction, the first pixel and the third pixel are adjacent to each other in the column direction, and the second pixel and the fourth pixel are adjacent to each other in the column direction. The plurality of signal lines include first and second signal lines which are located in correspondence with each column of pixels and are supplied with signal voltages of opposite polarities from each other from the signal line driving circuit in each vertical scanning period. In an arbitrary color display pixel, the switching element of one of the first and third pixels is connected to the first signal line, the switching element of the other of the first and third pixels is connected to the second signal line, the switching element of one of the second and fourth pixels is connected to the first signal line, the switching element of the other of the second and fourth pixels is connected to the second signal line, and the switching elements of the first, second, third and fourth pixels are controlled to be ON/OFF by a common scanning signal. During an arbitrary vertical scanning period, the polarities of the signal voltages supplied to the first and second signal lines are constant. The polarities of the signal voltages supplied to the first and second signal lines are inverted at intervals of a vertical scanning period or at intervals of two or more vertical scanning periods. The color display pixel may include pixels in 2 rows by an even number of columns.

[0017] In an embodiment, in a color display pixel adjacent to the arbitrary color display pixel in the column direction, the switching element of one of the first and third pixels is connected to the second signal line, the switching element of the other of the first and third pixels is connected to the first signal line, the switching element of one of the second and fourth pixels is connected to the second signal line, and the switching element of the other of the second and fourth pixels is connected to the first signal line.

[0018] In an embodiment, in an arbitrary vertical scanning period, a polarity of the signal voltage supplied to each of the first, second, third and fourth pixels included in an arbitrary color display pixel, and a polarity of the signal voltage supplied to each of the first, second, third and fourth pixels included in a color display pixel adjacent to the arbitrary color display pixel in the row direction, are opposite to each other.

[0019] In an embodiment, in an arbitrary vertical scanning period, the polarities of the voltage signals supplied to the first pixel and the second pixel included in an arbitrary first color display pixel are opposite to each other, and the polarities of the voltage signals supplied to the third pixel and the fourth pixel included in the arbitrary first color display pixel are opposite to each other.

[0020] In an embodiment, in an arbitrary vertical scanning period, the polarities of the signal voltages supplied to two arbitrary signal lines adjacent to each other, among the plurality of signals, are opposite to each other.

[0021] In an embodiment, in an arbitrary color display pixel, the switching elements of the first, second, third and fourth pixels are connected to a common scanning line.

[0022] In an embodiment, the first, second, third and fourth pixels include one of a yellow pixel, a cyan pixel, a magenta pixel and a white pixel in addition to a red pixel, a blue pixel and a green pixel.

[0023] In an embodiment, for displaying an intermediate gray scale level, the plurality of pixels each include a bright sub pixel exhibiting a luminance higher than that of the gray scale level to be displayed and a dark sub pixel exhibiting a luminance lower than that of the gray scale level to be displayed.

[0024] In an embodiment, the vertical scanning period is $\frac{1}{120}$ seconds or shorter.

[0025] A liquid crystal display device in an embodiment is of a VA mode, for example, of a PSA mode.

Advantageous Effects of Invention

[0026] According to the present invention, in a liquid crystal display device in which a color display pixel includes four pixels arrayed in two rows by two columns, the load on the signal line driving circuit can be reduced.

BRIEF DESCRIPTION OF DRAWINGS

[0027] FIG. 1(a) is a schematic plan view of a liquid crystal display device **100** in an embodiment according to the present invention; and FIG. 1(b) is a schematic view showing electrical connections regarding pixels in a liquid crystal display panel **10**.

[0028] FIG. 2 shows connections between TFTs **14** of four pixels P_1 through P_4 and two signal lines **13**, and a polarity distribution of signal voltages supplied to the pixels, in a liquid crystal display panel **10A**.

[0029] FIG. 3 shows connections between TFTs **14** of four pixels P_1 through P_4 and two signal lines **13**, and a polarity distribution of signal voltages supplied to the pixels, in a liquid crystal display panel **10B**.

[0030] FIG. 4 shows connections between TFTs **14** of four pixels P_1 through P_4 and two signal lines **13**, and a polarity distribution of signal voltages supplied to the pixels, in a liquid crystal display panel **10C**.

[0031] FIG. 5 shows connections between TFTs **14** of four pixels P_1 through P_4 and two signal lines **13**, and a polarity distribution of signal voltages supplied to the pixels, in a liquid crystal display panel **10D**.

[0032] FIG. 6 shows connections between TFTs of pixels and signal lines, and gate signals, in a liquid crystal display panel **10E** having a multi-pixel structure.

[0033] FIG. 7 shows an equivalent circuit of three pixels (three pixels enclosed by the one-dot chain line in FIG. 6) in the liquid crystal display panel **10E**.

[0034] FIG. 8 is a schematic plan view of a pixel electrode **11A** usable for a PSA mode liquid crystal display device in an embodiment according to the present invention.

DESCRIPTION OF EMBODIMENTS

[0035] Hereinafter, liquid crystal display devices in embodiments according to the present invention will be described with reference to the drawings. The present invention is not limited to the following embodiments provided as examples.

[0036] With reference to FIGS. 1(a) and (b), a structure of a liquid crystal display device **100** in an embodiment according to the present invention will be described. FIG. 1(a) is a schematic plan view of the liquid crystal display device **100**,

and FIG. 1(b) is a schematic view showing electrical connections regarding pixels in a liquid crystal display panel **10**.

[0037] As shown in FIG. 1(a), the liquid crystal display device **100** includes the liquid crystal display panel **10** including a plurality of pixels P arrayed in a matrix of a plurality of rows by a plurality of columns, and a scanning line driving circuit (gate driver) **20** and a signal line driving circuit (source driver) **30** both for supplying driving signals to the liquid crystal display panel **10**.

[0038] The plurality of pixels P in the liquid crystal display panel **10** form a plurality of color display pixels P_{CD} , and each of the color display pixels P_{CD} includes four pixels P . The four pixels P are a first pixel P_1 , a second pixel P_2 , a third pixel P_3 and a fourth pixel P_4 which are arrayed in two rows by two columns. The first pixel P_1 and the second pixel P_2 are adjacent to each other in a row direction, and the third pixel P_3 and the fourth pixel P_4 are adjacent to each other in the row direction. The first pixel P_1 and the third pixel P_3 are adjacent to each other in a column direction, and the second pixel P_2 and the fourth pixel P_4 are adjacent to each other in the column direction.

[0039] In this example, the first pixel P_1 is a red (R) pixel, the second pixel P_2 is a yellow (Y) pixel, the third pixel P_3 is a blue (B) pixel, and the fourth pixel P_4 is a green (G) pixel. FIG. 1(a) shows one row and one column of the color display pixels and omits the other color display pixels. The same color display pixels as those shown in the figure are arrayed in a matrix. The colors of the four pixels P_1 through P_4 included in the color display pixel are not limited to the above. From the point of view of color reproducibility, it is preferable that at least R, G and B pixels are included. Preferably, the other color is yellow (Y), cyan (C) or magenta (M), but may be white (W).

[0040] It is not necessary that the four pixels P_1 through P_4 all have the same size. From the point of view of color reproducibility, it is preferable that the red pixel and the blue pixel are larger than the pixels of the other two colors. In order to provide the scanning lines and the signal lines linearly, it is preferable that each pixel is generally rectangular, that the first pixel P_1 and the second pixel P_2 arrayed in the row direction have an equal length in the column direction, that the third pixel P_3 and the fourth second pixel P_4 arrayed in the row direction have an equal length in the column direction, that the first pixel P_1 and the third pixel P_3 arrayed in the column direction have an equal length (width) in the row direction, and that the second pixel P_2 and the fourth pixel P_4 arrayed in the column direction have an equal length (width) in the row direction. Preferably, the color display pixel P_{CD} is generally square.

[0041] Now, with reference to FIG. 1(b), electrical connections regarding a pixel in the liquid crystal display panel **10** will be described. FIG. 1(b) is a plan view of an active matrix substrate (TFT substrate) **10a** included in the liquid crystal display panel **10**, but omits a liquid crystal layer and a counter substrate located to face the active matrix substrate **10a** with the liquid crystal layer being held therebetween. The counter substrate typically includes a counter electrode, a color filter layer, a light blocking layer (black matrix), and the like. The color filter layer may be provided in the active matrix substrate. As is well known, in a liquid crystal display device of an IPS mode or an FFS mode, the counter electrode may be provided in the active matrix substrate.

[0042] FIG. 1(b) shows an area of the active matrix substrate **10a** which corresponds to four pixels included in one color display pixel P_{CD} .

[0043] As shown in FIG. 1(b), the active matrix substrate **10a** includes a pixel electrode **11** provided for each of the pixels **P**, a switching element (in this example, TFT) **14** connected to the pixel electrode **11**, a plurality of scanning lines (gate bus lines) **12** extending in the row direction, and a plurality of signal lines (source bus lines) **13** extending in the column direction. The scanning line driving circuit **20** shown in FIG. 1(a) supplies a scanning signal to each of the plurality of scanning lines **12**, and the signal line driving circuit **30** shown in FIG. 1(a) supplies a positive or negative signal voltage to each of the plurality of signal lines **13**. Herein, a TFT type liquid crystal display device including the TFT **14** as a switching element will be described, but the switching element may be anything which operates in substantially the same manner as the TFT **14**.

[0044] The plurality of signal lines **13** include a first signal line **13a** and a second signal line **13b** which are provided in correspondence with each column of pixels. The first signal line **13a** and the second signal line **13b** are supplied with signal voltages of opposite polarities from each other from the signal line driving circuit **30** in each vertical scanning period. For example, while the first signal line **13a** is supplied with a positive signal voltage, the second signal line **13b** is supplied with a negative signal voltage. Herein, among the two signal lines **13a** and **13b** located in correspondence with each column of pixels, the left signal line is referred to as the “first signal line **13a**” and the right signal line is referred to as the “second signal line **13b**”. The polarities of the signal voltages supplied to the first signal line **13a** and the second signal line **13b** are independent in each column of pixels. Specifically, referring to FIG. 1(b), the polarity of the signal voltage supplied to a first signal line $S_{a(n)}$ located in correspondence with an n ’th column of pixels, and the polarity of the signal voltage supplied to a first signal line $S_{a(n+1)}$ located in correspondence with the $(n+1)$ ’th column of pixels, are independent from each other. Similarly, the polarity of the signal voltage supplied to a second signal line $S_{b(n)}$ located in correspondence with the n ’th column of pixels, and the polarity of the signal voltage supplied to a second signal line $S_{b(n+1)}$ located in correspondence with the $(n+1)$ ’th column of pixels, are independent from each other. In the above, the polarity of the signal voltage supplied to the first signal line $S_{a(n)}$ and the polarity of the signal voltage supplied to the second signal line $S_{b(n)}$ are opposite to each other. The polarity of the signal voltage supplied to the first signal line $S_{a(n+1)}$ and the polarity of the signal voltage supplied to the second signal line $S_{b(n+1)}$ are opposite to each other.

[0045] In an arbitrary color display pixel P_{CD} , the TFT **14** of one of the first pixel P_1 and the third pixel P_3 is connected to the first signal line **13a**, and the TFT **14** of the other of the first pixel P_1 and the third pixel P_3 is connected to the second signal line **13b**. The TFT **14** of one of the second pixel P_2 and the fourth pixel P_4 is connected to the first signal line **13a**, and the TFT **14** of the other of the second pixel P_2 and the fourth pixel P_4 is connected to the second signal line **13b**. In this example, the TFT **14** of the first pixel P_1 is connected to the first signal line **13a**, and the TFT **14** of the third pixel P_3 is connected to the second signal line **13b**. The TFT **14** of the second pixel P_2 is connected to the first signal line **13a**, and the TFT **14** of the fourth pixel P_4 is connected to the second signal line **13b**, and

the TFT **14** of the fourth pixel P_4 is connected to the first signal line **13a**. The TFTs may each be connected to the opposite signal line.

[0046] The TFTs **14** of the four pixels P_1 through P_4 are all controlled to be ON/OFF by a common scanning signal. In this example, the TFTs **14** of the four pixels P_1 through P_4 are all connected to a common scanning line **12**. Alternatively, as long as the TFTs **14** are controlled to be ON/OFF by a common scanning signal, the scanning signal may be supplied from different scanning lines. For example, as described later, in the case where one pixel electrode includes two sub pixel electrodes, specifically, a bright sub pixel exhibiting a luminance higher than that of the gray scale level to be displayed and a dark sub pixel exhibiting a luminance lower than that of the gray scale level to be displayed, two scanning lines are provided in correspondence with the two sub pixel electrodes and a common scanning signal is supplied to the scanning lines.

[0047] With such a structure, the four pixels P_1 through P_4 included in one color display pixel P_{CD} are driven by one scanning line $G_{(m)}$, and four signal lines $S_{a(n)}$, $S_{b(n)}$, $S_{a(n+1)}$ and $S_{b(n+1)}$. As a result, although the number of rows of pixels is larger (twice) than that in a conventional stripe-array structure (in which four color pixels are provided in each row, and pixels of one of the colors are provided in each column), the time required for supplying a signal voltage to each pixel (time period in which the TFT **14** is in an ON state; also referred to as the “write time”) can be the same as in the conventional stripe-array structure. Accordingly, there is no obstacle against double speed or quadruple speed driving performed on the scanning and signal lines.

[0048] In addition, the polarity of the voltage applied to the first pixel P_1 and the polarity of the voltage applied to the third pixel P_3 are opposite to each other, and the polarity of the voltage applied to the second pixel P_2 and the polarity of the voltage applied to the fourth pixel P_4 are opposite to each other. Therefore, among two among the four pixels P_1 through P_4 included in each color display pixel P_{CD} , two pixels are supplied with a positive voltage, and the other two pixels are supplied with a negative voltage.

[0049] In the liquid crystal display device **100** in an embodiment according to the present invention, during an arbitrary vertical scanning period, the polarities of the signal voltages supplied to the first signal line **13a** and the second signal line **13b** are constant. Needless to say, in the liquid crystal display device **100**, AC driving is performed and therefore the polarities of the signal voltages supplied to the first signal line **13a** and the second signal line **13b** are inverted at intervals of a vertical scanning period. Namely, the signal line driving circuit **30** merely inverts the polarity of the signal voltage supplied to each signal line **13** at intervals of a vertical scanning period, regardless of the number of rows of pixels (i.e., the cycle of polarity inversion is twice the vertical scanning period). Therefore, the load on the signal line driving circuit **30** of the liquid crystal display device **100** is smaller than the load on the signal line driving circuit in the liquid crystal display devices described in Patent Documents 1 and 2 or a conventionally common stripe array type liquid crystal display device. In this example, the polarity of the signal voltage supplied to each signal line **13** is inverted at intervals of a vertical scanning period. Alternatively, the polarity of the signal voltage supplied to each signal line **13** may be inverted at intervals of two or more vertical scanning periods. For example, when one, same image is written with the same

polarity for two vertical scanning periods during driving at 240 Hz, there is an advantage that a sufficient time for charging the pixel can be obtained. As the cycle of polarity inversion is longer, the power consumption is smaller.

[0050] The above-described advantage of the liquid crystal display device **100** is conspicuous when double speed or quadruple speed driving is performed, namely, when the vertical scanning period is $\frac{1}{120}$ sec. or less. Even when the conventional 60 Hz driving is performed, there is an advantage that the power consumption can be reduced. Therefore, as described in Patent Documents 1 and 2, it is preferable that the liquid crystal display device is structured so as to prevent flicker. Hereinafter, with reference to FIG. 2 through FIG. 5, a structure for preventing flicker will be described.

[0051] FIG. 2 through FIG. 5 show the connections between the TFTs **14** of the four pixels P_1 through P_4 and the two signal lines **13**, and a polarity distribution of the signal voltages applied to the pixels, in liquid crystal display panels **10A** through **10D** usable as the liquid crystal display panel **10** of the liquid crystal display device **100**.

[0052] The liquid crystal display panels **10A** through **10D** shown in FIG. 2 through FIG. 5 each have the structure of the liquid crystal display panel **10** described above with reference to FIG. 1. The polarity of the signal voltage supplied to each signal line **13** is not changed during the vertical scanning period and is inverted at intervals of a vertical scanning period. FIG. 2 through FIG. 5 show the polarities of the signal voltages applied to the pixels in a certain vertical scanning period. At the next vertical scanning period, the polarities of the signal voltages applied to the pixels are all inverted.

[0053] In the liquid crystal display panels **10A** and **10B** shown in FIG. 2 and FIG. 3, among the four signal lines $S_{a(n)}$, $S_{b(n)}$, $S_{a(n+1)}$ and $S_{b(n+1)}$, the signal lines $S_{a(n)}$ and $S_{a(n+1)}$ are of the same polarity (in this example, positive), and the signal lines $S_{b(n)}$ and $S_{b(n+1)}$ are of the same polarity (in this example, negative). By contrast, in the liquid crystal display panels **10C** and **10D** shown in FIG. 4 and FIG. 5, among the four signal lines $S_{a(n)}$, $S_{b(n)}$, $S_{a(n+1)}$ and $S_{b(n+1)}$, the signal lines $S_{a(n)}$ and $S_{b(n+1)}$ are of the same polarity (in this example, positive), and the signal lines $S_{b(n)}$ and $S_{a(n+1)}$ are of the same polarity (in this example, negative).

[0054] As shown in FIG. 2 and FIG. 3, when the polarities of the signal voltages supplied to arbitrary two signal lines adjacent to each other are opposite to each other, the following advantages are obtained. For example, it is now assumed that there is a small foreign object on the signal lines and a small leak current is generated between the two signal lines (e.g., $S_{b(n)}$ and $S_{a(n+1)}$) via the foreign object. In this case, when the polarities of the voltages supplied to the signal lines close to each other are opposite to each other, a relatively high voltage is applied between these signal lines. As a result, a relatively large current flows in the foreign object. When this occurs, the foreign object is destroyed by the Joule heat, and as a result, the leak defect may be repaired. In addition, when the polarities of the signal voltages supplied to signal lines adjacent to each other are opposite to each other, the signal line driving circuit for dot inversion driving of a conventional liquid crystal display device having a stripe array of R, G and B pixels can be used as it is.

[0055] Regarding the liquid crystal display panel **10A** shown in FIG. 2, in the color display pixel P_{CD} including the first pixel P_1 of an m 'th row and the n 'th column, the TFT **14** of the first pixel P_1 is connected to the first signal line $S_{a(n)}$, and the TFT **14** of the third pixel P_3 is connected to the second

signal line $S_{b(n)}$. The TFT **14** of the second pixel P_2 is connected to the second signal line $S_{b(n+1)}$, and the TFT **14** of the fourth pixel P_4 is connected to the first signal line $S_{a(n+1)}$. Accordingly, regarding the polarities of the signal voltages supplied to the four pixels P_1 through P_4 , the polarities of the signal voltages supplied to the first pixel P_1 and the second pixel P_2 are opposite to each other, and the polarities of the signal voltages supplied to the third pixel P_3 and the fourth pixel P_4 are opposite to each other.

[0056] Next, the color display pixel P_{CD} including the first pixel P_1 of the $(m+1)$ th row and the n 'th column will be described. In this color display pixel, the TFT **14** of the first pixel P_1 is connected to the second signal line $S_{b(n)}$, and the TFT **14** of the third pixel P_3 is connected to the first signal line $S_{a(n)}$. The TFT **14** of the second pixel P_2 is connected to the first signal line $S_{a(n+1)}$, and the TFT **14** of the fourth pixel P_4 is connected to the second signal line $S_{b(n+1)}$.

[0057] Namely, in one of two color display pixels adjacent to each other in the column direction, the connection relationship between the TFTs **14** of the four pixels P_1 through P_4 and the two signal lines **13** (e.g., signal lines $S_{a(n)}$ and $S_{b(n)}$, and signal lines $S_{a(n+1)}$ and $S_{b(n+1)}$) is opposite to that in the other of the two color display pixels. As a result, the polarities of the voltages applied to the pixels of a same color which are adjacent to each other in the column direction are opposite to each other. For example, the first pixel P_1 of the m 'th row and the n 'th column is supplied with a positive voltage, and the first pixel P_1 of the $(m+1)$ th row and the n 'th column is supplied with a negative voltage. Regarding the second through fourth pixels also, the polarities of the voltages applied to the pixels of a same color which are adjacent to each other in the column direction are opposite to each other.

[0058] Next, the color display pixel P_{CD} including the first pixel P_1 of the m 'th row and the $(n+2)$ th column will be described. In this color display pixel, the TFT **14** of the first pixel P_1 is connected to the second signal line $S_{b(n+2)}$, and the TFT **14** of the third pixel P_3 is connected to the first signal line $S_{a(n+2)}$. The TFT **14** of the second pixel P_2 is connected to the first signal line $S_{a(n+3)}$, and the TFT **14** of the fourth pixel P_4 is connected to the second signal line $S_{b(n+3)}$.

[0059] Namely, in one of two color display pixels adjacent to each other in the row direction, the connection relationship between the TFTs **14** of the four pixels P_1 through P_4 and the two signal lines **13** (e.g., signal lines $S_{a(n)}$ and $S_{b(n)}$, and signal lines $S_{a(n+2)}$ and $S_{b(n+2)}$) is opposite to that in the other of the two color display pixels. As a result, the polarities of the voltages applied to the pixels of a same color which are adjacent to each other in the row direction are opposite to each other. For example, the first pixel P_1 of the m 'th row and the n 'th column is supplied with a positive voltage, and the first pixel P_1 of the m 'th row and the $(n+2)$ th column is supplied with a negative voltage. Regarding the second through fourth pixels also, the polarities of the voltages applied to the pixels of a same color which are adjacent to each other in the row direction are opposite to each other.

[0060] As can be seen from FIG. 2, the polarity of the voltage applied to the first pixel P_1 (hatched) in one color display pixel is opposite to that in a color display pixel adjacent to the one color display pixel in the column direction, and is opposite to that in a color display pixel adjacent to the one color display pixel in the row direction. The second through fourth pixels also have this relationship. Accordingly, the

liquid crystal display panel 10A can prevent flicker as the liquid crystal display devices described in Patent Documents 1 and 2.

[0061] Now, FIG. 3 will be referred to. Regarding the liquid crystal display panel 10B shown in FIG. 3, in the color display pixel P_{CD} including the first pixel P_1 of the m 'th row and the n 'th column, the TFT 14 of the first pixel P_1 is connected to the first signal line $S_{a(n)}$, and the TFT 14 of the third pixel P_3 is connected to the second signal line $S_{b(n)}$. The TFT 14 of the second pixel P_2 is connected to the first signal line $S_{a(n+1)}$, and the TFT 14 of the fourth pixel P_4 is connected to the second signal line $S_{b(n+1)}$. The connection relationship between the TFTs 14 and the two signal lines $S_{a(n+1)}$ and $S_{b(n+1)}$ regarding the second pixel P_2 and the fourth pixel P_4 is opposite to that of the liquid crystal display panel 10A shown in FIG. 2. Accordingly, regarding the polarities of the signal voltages supplied to the four pixels P_1 through P_4 , the polarities of the signal voltages supplied to the first pixel P_1 and the second pixel P_2 are the same as each other, and the polarities of the signal voltages supplied to the third pixel P_3 and the fourth pixel P_4 are the same as each other.

[0062] Next, the color display pixel P_{CD} including the first pixel P_1 of the $(m+1)$ th row and the n 'th column will be described. In this color display pixel, the TFT 14 of the first pixel P_1 is connected to the second signal line $S_{b(n)}$, and the TFT 14 of the third pixel P_3 is connected to the first signal line $S_{a(n)}$. The TFT 14 of the second pixel P_2 is connected to the second signal line $S_{b(n+1)}$, and the TFT 14 of the fourth pixel P_4 is connected to the first signal line $S_{a(n+1)}$.

[0063] Namely, in one of two color display pixels adjacent to each other in the column direction, the connection relationship between the TFTs 14 of the four pixels P_1 through P_4 and the two signal lines 13 (e.g., signal lines $S_{a(n)}$ and $S_{b(n)}$, and signal lines $S_{a(n+1)}$ and $S_{b(n+1)}$) is opposite to that in the other of the two color display pixels. As a result, the polarities of the voltages applied to the pixels of a same color which are adjacent to each other in the column direction are opposite to each other. For example, the first pixel P_1 of the m 'th row and the n 'th column is supplied with a positive voltage, and the first pixel P_1 of the $(m+1)$ th row and the n 'th column is supplied with a negative voltage. Regarding the second through fourth pixels also, the polarities of the voltages applied to the pixels of a same color which are adjacent to each other in the column direction are opposite to each other.

[0064] Next, the color display pixel P_{CD} including the first pixel P_1 of the m 'th row and the $(n+2)$ th column will be described. In this color display pixel, the TFT 14 of the first pixel P_1 is connected to the second signal line $S_{b(n+2)}$, and the TFT 14 of the third pixel P_3 is connected to the first signal line $S_{a(n+2)}$. The TFT 14 of the second pixel P_2 is connected to the second signal line $S_{b(n+3)}$, and the TFT 14 of the fourth pixel P_4 is connected to the first signal line $S_{a(n+3)}$.

[0065] Namely, in one of two color display pixels adjacent to each other in the row direction, the connection relationship between the TFTs 14 of the four pixels P_1 through P_4 and the two signal lines 13 (e.g., signal lines $S_{a(n)}$ and $S_{b(n)}$, and signal lines $S_{a(n+2)}$ and $S_{b(n+2)}$) is opposite to that in the other of the two color display pixels. As a result, the polarities of the voltages applied to the pixels of a same color which are adjacent to each other in the row direction are opposite to each other. For example, the first pixel P_1 of the m 'th row and the n 'th column is supplied with a positive voltage, and the first pixel P_1 of the m 'th row and the $(n+2)$ th column is supplied with a negative voltage. Regarding the second through fourth

pixels also, the polarities of the voltages applied to the pixels of a same color which are adjacent to each other in the row direction are opposite to each other.

[0066] As can be seen from FIG. 3, the polarity of the voltage applied to the first pixel P_1 (hatched) in one color display pixel is opposite to that in a color display pixel adjacent to the one color display pixel in the column direction, and is opposite to that in a color display pixel adjacent to the one color display pixel in the row direction. The second through fourth pixels also have this relationship. Accordingly, the liquid crystal display panel 10B can also prevent flicker as the liquid crystal display devices described in Patent Documents 1 and 2.

[0067] Now, FIG. 4 will be referred to. Regarding the liquid crystal display panel 10C shown in FIG. 4, in the color display pixel P_{CD} including the first pixel P_1 of the m 'th row and the n 'th column, the TFT 14 of the first pixel P_1 is connected to the first signal line $S_{a(n)}$, and the TFT 14 of the third pixel P_3 is connected to the second signal line $S_{b(n)}$. The TFT 14 of the second pixel P_2 is connected to the first signal line $S_{a(n+1)}$, and the TFT 14 of the fourth pixel P_4 is connected to the second signal line $S_{b(n+1)}$.

[0068] The connection relationship between the TFTs 14 of the four pixels P_1 through P_4 and the two signal lines 13 in the liquid crystal display panel 10C is the same as that of the liquid crystal display panel 10B shown in FIG. 3. The difference between the liquid crystal display panel 10C and the liquid crystal display panel 10B is in the polarities of the voltage signals supplied to the signal lines 13. Specifically, in the liquid crystal display panel 10B, among the four signal lines $S_{a(n)}$, $S_{b(n)}$, $S_{a(n+1)}$ and $S_{b(n+1)}$ corresponding to one color display pixel, the signal lines $S_{a(n)}$ and $S_{a(n+1)}$ are of the same polarity (in this example, positive), and the signal lines $S_{b(n)}$ and $S_{b(n+1)}$ are of the same polarity (in this example, negative). By contrast, in the liquid crystal display panel 10C, among the four signal lines $S_{a(n)}$, $S_{b(n)}$, $S_{a(n+1)}$ and $S_{b(n+1)}$, the signal lines $S_{a(n)}$ and $S_{b(n+1)}$ are of the same polarity (in this example, positive), and the signal lines $S_{b(n)}$ and $S_{a(n+1)}$ are of the same polarity (in this example, negative).

[0069] As is clear from a comparison between FIG. 4 and FIG. 3, if the polarities of the second pixel P_2 and the fourth pixel P_4 in FIG. 3 are inverted, the polarity distribution of FIG. 3 matches the polarity distribution of FIG. 4. In the liquid crystal display device 10C, regarding the polarities of the signal voltages supplied to the four pixels P_1 through P_4 , the polarities of the signal voltages supplied to the first pixel P_1 and the second pixel P_2 are opposite to each other, and the polarities of the signal voltages supplied to the third pixel P_3 and the fourth pixel P_4 are opposite to each other.

[0070] As can be seen from FIG. 4, the polarity of the voltage applied to the first pixel P_1 (hatched) in one color display pixel is opposite to that in a color display pixel adjacent to the one color display pixel in the column direction, and is opposite to that in a color display pixel adjacent to the one color display pixel in the row direction. The second through fourth pixels also have this relationship. Accordingly, the liquid crystal display panel 10C can also prevent flicker as the liquid crystal display devices described in Patent Documents 1 and 2.

[0071] Now, FIG. 5 will be referred to. Regarding the liquid crystal display panel 10D shown in FIG. 5, in the color display pixel P_{CD} including the first pixel P_1 of the m 'th row and the n 'th column, the TFT 14 of the first pixel P_1 is connected to the first signal line $S_{a(n)}$, and the TFT 14 of the third pixel

P_3 is connected to the second signal line $S_{b(n)}$. The TFT **14** of the second pixel P_2 is connected to the second signal line $S_{b(n+1)}$, and the TFT **14** of the fourth pixel P_4 is connected to the first signal line $S_{a(n+1)}$.

[0072] The connection relationship between the TFTs **14** of the four pixels P_1 through P_4 and the two signal lines **13** in the liquid crystal display panel **10D** is the same as that of the liquid crystal display panel **10A** shown in FIG. 2. The difference between the liquid crystal display panel **10D** and the liquid crystal display panel **10A** is in the polarities of the voltage signals supplied to the signal lines **13**. Specifically, in the liquid crystal display panel **10A**, among the four signal lines $S_{a(n)}$, S_b , $S_{a(n+1)}$ and $S_{b(n+1)}$ corresponding to one color display pixel, the signal lines $S_{a(n)}$ and $S_{a(n+1)}$ are of the same polarity (in this example, positive), and the signal lines $S_{b(n)}$ and $S_{b(n+1)}$ are of the same polarity (in this example, negative). By contrast, in the liquid crystal display panel **10D**, among the four signal lines $S_{a(n)}$, S_b , $S_{a(n+1)}$ and $S_{b(n+1)}$, the signal lines $S_{a(n)}$ and $S_{b(n+1)}$ are of the same polarity (in this example, positive), and the signal lines $S_{b(n)}$ and $S_{a(n+1)}$ are of the same polarity (in this example, negative).

[0073] As is clear from a comparison between FIG. 5 and

[0074] FIG. 2, if the polarities of the second pixel P_2 and the fourth pixel P_4 in FIG. 5 are inverted, the polarity distribution of FIG. 5 matches the polarity distribution of FIG. 2. In the liquid crystal display device **10D**, regarding the polarities of the signal voltages supplied to the four pixels P_1 through P_4 , the polarities of the signal voltages supplied to the first pixel P_1 and the second pixel P_2 are the same as each other, and the polarities of the signal voltages supplied to the third pixel P_3 and the fourth pixel P_4 are the same as each other.

[0075] As can be seen from FIG. 5, the polarity of the voltage applied to the first pixel P_1 (hatched) in one color display pixel is opposite to that in a color display pixel adjacent to the one color display pixel in the column direction, and is opposite to that in a color display pixel adjacent to the one color display pixel in the row direction. The second through fourth pixels also have this relationship. Accordingly, the liquid crystal display panel **10D** can also prevent flicker as the liquid crystal display devices described in Patent Documents 1 and 2.

[0076] Now, with reference to FIG. 6 and FIG. 7, a structure and operation of a liquid crystal display panel **10E** having a multi-pixel structure will be described. The “multi-pixel structure” is a structure in which for displaying a certain intermediate gray scale level, each pixel includes a bright sub pixel exhibiting a luminance higher than that of the gray scale level to be displayed and a dark sub pixel exhibiting a luminance lower than that of the gray scale level to be displayed. By introducing the multi-pixel structure, the viewing angle dependence of the γ characteristic can be alleviated. As the multi-pixel structure, a structure described in Japanese Laid-Open Patent Publication No. 2006-133577, for example, can be adopted. The disclosure of Japanese Laid-Open Patent Publication No. 2006-133577 is entirely incorporated herein by reference.

[0077] FIG. 6 shows the connection relationship between the TFTs of the pixels and the signal lines, and also shows the timing at which a gate signal as a scanning signal is turned ON. FIG. 7 shows an equivalent circuit of three pixels enclosed by the one-dot chain line in FIG. 6.

[0078] The liquid crystal display panel **10E** shown in FIG. 6 is obtained as a result of applying the multi-pixel structure to the liquid crystal display panel **10A** shown in FIG. 2. The

four pixels P_1 through P_4 each include a sub pixel Pa and a sub pixel Pb. In this example, the sub pixel Pa is a bright sub pixel, and the sub pixel Pb is a dark sub pixel. The bright sub pixel Pa and the dark sub pixel Pb are obtained as a result of dividing each pixel into two in the column direction. Here, for the sake of simplicity, the bright sub pixel Pa and the dark sub pixel Pb are shown as having an approximately equal area size. Nonetheless, the area size ratio of the bright sub pixel Pa and the dark sub pixel Pb is not limited to this, and may be changed when necessary. As shown here as an example, it is preferable that the bright pixels Pa in the four pixels P_1 through P_4 included in the color display pixel P_{CD} are located at a center of the color display pixel P_{CD} in the column direction. Namely, it is preferable that the lower sub pixels in the first pixel P_1 and the second pixel P_2 and the upper sub pixels in the third pixel P_3 and the fourth pixel P_4 are the bright sub pixels Pa.

[0079] If there is a dark sub pixel between the bright sub pixels in the first and second pixels and the bright sub pixels in the third and fourth pixels, colors may blur. For example, when a white square or rectangle having edges parallel to the rows of pixels is displayed, at the upper edge of the rectangle, the bright sub pixels in the first and second pixels of the row of pixels corresponding to the edge are conspicuous. Namely, the bright sub pixels in the pixels of two colors are conspicuous. As a result, the color of the upper edge of the white rectangle appears to blur. In the case where, as described above, the bright sub pixels Pa of the four pixels P_1 through P_4 included in the color display pixel P_{CD} are located at a center of the color display pixel P_{CD} in the column direction, the bright sub pixels Pa of the four pixels are close to each other. Therefore, color blur can be prevented.

[0080] As shown in FIG. 6, the four pixels P_1 through P_4 each include the bright sub pixel Pa and the dark sub pixel Pb. The bright sub pixel Pa is connected to a TFT **14a**, and the dark sub pixel Pb is connected to a TFT **14b**. Gates of the TFTs **14a** and **14b** are connected to a common scanning line **12**, and sources of the TFTs **14a** and **14b** are connected to a common signal line **13**. Namely, the sub pixels Pa and Pb each include a sub pixel electrode corresponding to the pixel electrode **11** shown in FIG. 1(b). The sub pixel electrodes of the sub pixels Pa and Pb are connected to drains of the corresponding TFTs **14a** and **14b** and are connected to the common signal line (source sub line) **13** via the TFTs **14a** and **14b**.

[0081] In the liquid crystal display panel **10A** shown in FIG. 2, the TFTs **14** of the first pixel P_1 , the second pixel P_2 , the third pixel P_3 and the fourth pixel P_4 , namely, four TFTs **14** in total are connected to the common scanning line (gate sub line) **12**. By contrast, in the liquid crystal display panel **10E**, the TFTs of the bright sub pixel and the dark sub pixel of the first pixel P_1 and the bright sub pixel and the dark sub pixel of the second pixel P_2 , namely, four TFTs **14a** and **14b** in total are connected to a common scanning line (gate sub line) **12** (e.g., the upper scanning line $G_{(m)}$ in FIG. 6). Similarly, the TFTs of the bright sub pixel and the dark sub pixel of the third pixel P_3 and the bright sub pixel and the dark sub pixel of the fourth pixel P_4 , namely, four TFTs **14a** and **14b** in total are connected to another common scanning line **12** (e.g., the lower scanning line $G_{(m)}$ in FIG. 6). As shown in FIG. 6, these two scanning lines **12** are supplied with a common gate signal. Referring to FIG. 6, during the period in which the gate signal is HIGH, the TFTs **14a** and **14b** are in an ON state, and signal voltages are supplied from the corresponding signal lines **13**. Accordingly, the sub pixels of the four pixels P_1

through P_4 (eight sub pixels in total) in the liquid crystal display panel 10E are each supplied with a corresponding signal voltage when the corresponding TFTs 14a and 14b are turned ON (like the four pixels P_1 through P_4 in the liquid crystal display panel 10A). The gates of the TFTs 14a and 14b are controlled to be ON/OFF by a common gate signal.

[0082] The four pixels P_1 through P_4 in the liquid crystal display panel 10E each further include a third TFT 14c. As shown in FIG. 7, the third TFT 14c switches the electrical connection between a capacitance CSb of the dark sub pixel Pb and a buffer capacitance CSc connected parallel thereto. A gate of the TFT 14c is connected to the next-stage scanning line (e.g., $G_{(m+1)}$), and is put into an ON state at the same timing as the TFTs 14a and 14b of the next-stage color display pixel, namely, the color display pixel which is adjacent to the color display pixel of interest in the column direction. By putting the third TFT 14c into an ON state, the sub pixel Pb becomes a dark sub pixel.

[0083] With reference to FIG. 7, an operation of forming the bright sub pixel Pa and the dark sub pixel Pb in the first pixel P_1 of the m'th row and the n'th column of the liquid crystal display panel 10E will be described.

[0084] When a gate signal of the scanning line $G_{(m)}$ becomes HIGH, the TFTs 14a and 14b are put into an ON state, and a prescribed signal (herein, $V_{(k)}$ is supplied from the signal line $S_{a(n)}$ to the sub pixels Pa and Pb. Thus, a liquid crystal capacitance Clca and a storage capacitance CSa of the sub pixel Pa (these capacitances are also referred to as the "sub pixel capacitance C_{Pa} ") and a liquid crystal capacitance Clcb and a storage capacitance CSb of the sub pixel Pb (these capacitances are also referred to as the "sub pixel capacitance C_{Pb} ") are charged. One of the pixel electrodes forming each of the liquid crystal capacitances Clca and Clcb is the sub pixel electrode of the corresponding sub pixel, and the other electrode is the counter electrode. The counter electrode is supplied with a common voltage (counter voltage) COM. One of the electrodes forming each of the storage capacitances CSa and CSb is a storage capacitance electrode and is connected to a drain electrode of the TFT 14a or 14b. Thus, the storage capacitance electrode is supplied with the same voltage as that of the sub pixel electrode of the corresponding sub pixel. The other electrode forming each of the storage capacitances CSa and CSb is connected to a storage capacitance line (Cs) 15 and is supplied with a storage capacitance voltage.

[0085] At this point, a gate signal of the scanning line $G_{(m+1)}$ is LOW, and thus the TFT 14c is in an OFF state. In the buffer capacitance CSc, the signal voltage written in the immediately previous vertical scanning period (herein, $V_{(k-1)}$) is retained. The liquid crystal display panel 10E is driven by frame inversion driving. Therefore, the polarity of the voltage which is written in the current vertical scanning period is opposite to the polarity of the voltage written in the immediately previous vertical scanning period.

[0086] Next, when the gate signal of the scanning line $G_{(m)}$ becomes LOW and the TFTs 14a and 14b are put into an OFF state, the sub pixel capacitances C_{Pa} and C_{Pb} are put into the state of retaining $V_{(k)}$.

[0087] Next, when the gate signal of the scanning line $G_{(m+1)}$ becomes HIGH, the TFT 14c is put into an ON state. When TFT 14c is put into the ON state, the sub pixel capacitance C_{Pb} and the buffer capacitance CSc are connected parallel to each other. Accordingly, the charges stored in the sub pixel capacitance C_{Pb} and the charges stored in the buffer capaci-

tance CSc are re-distributed such that voltage $V_{(k)}$ retained by the sub pixel capacitance C_{Pb} and voltage $V_{(k-1)}$ retained by the buffer capacitance CSc are equal to each other. At this point, $V_{(k-1)}$ has a polarity opposite to the polarity of the $V_{(k)}$. Therefore, the overall charge amount stored in the sub pixel capacitance C_{Pb} and the buffer capacitance CSc is reduced, and the voltage of the sub pixel capacitance C_{Pb} becomes lower than voltage $V_{(k)}$ (the absolute value of the voltage of the sub pixel capacitance C_{Pb} becomes smaller than that of $V_{(k)}$). As a result, the luminance of the sub pixel Pb becomes lower than the luminance of the sub pixel Pa in which voltage $V_{(k)}$ is retained.

[0088] Even in the case where the polarity of the signal voltage supplied to each signal line is inverted at intervals of two vertical scanning periods, the above-described operation is usable to make the sub pixel Pb a dark sub pixel. For example, after a negative signal voltage is applied, the polarity is inverted to write a positive signal voltage. As a result, as described above, the luminance of the sub pixel Pb becomes lower than the luminance of the sub pixel Pa. Even when the same positive voltage is supplied after this, the luminance of the sub pixel Pb is not changed. However, in consideration of the average luminance during the two vertical scanning periods in which the positive signal voltage is supplied, the average luminance of the sub pixel Pb is lower than the luminance of the sub pixel Pa. Accordingly, even when the polarity of the signal voltage supplied to each signal line is inverted at intervals of two vertical scanning periods, the effect of the multi-pixel structure can be provided.

[0089] The multi-pixel structure described in Japanese Laid-Open Patent Publication No. 2006-133577 is preferably usable for a vertical alignment type liquid crystal display device in which a plurality of liquid crystal domains are formed in one pixel and which provides display in a normally black mode. (Typically, the plurality of liquid crystal domains include four liquid crystal domains, the directors of which have azimuth angles of 45°, 135°, 225° and 315° (where the rightward direction, i.e., the 3 o'clock direction of a clock face is 0°, and the counterclockwise direction is the positive direction) at least when a voltage is applied to the liquid crystal layer.)

[0090] Another multi-pixel structure usable for a liquid crystal display device according to the present invention is disclosed in Japanese Laid-Open Patent Publication No. 2004-62146 (U.S. Pat. No. 6,958,791) filed by the present applicant. According to this multi-pixel structure, a storage capacitance is provided for each of a plurality of sub pixels included in one pixel, and a storage capacitance counter electrode forming the storage capacitance (connected to the CS bus line) is made electrically independent for each sub pixel. The voltages supplied to the storage capacitance counter electrodes (referred to as the "storage capacitance counter capacitances") are made different. By use of capacitance division, the effective voltages applied to a plurality of areas of the liquid crystal layer corresponding to the plurality of sub pixels are made different. The disclosure of Japanese Laid-Open Patent Publication No. 2004-62146 (U.S. Pat. No. 6,958,791) is entirely incorporated herein by reference.

[0091] As a vertical alignment type liquid crystal display device, Japanese Laid-Open Patent Publication No. 2006-133577 describes a liquid crystal display device of the so-called MVA mode. In an MVA mode liquid crystal display device, linear slits formed in electrodes and linear dielectric projections (ribs) formed on the electrodes on the liquid crys-

tal layer side are located, on the pair of substrates facing each other while having a liquid crystal layer therebetween, to be parallel to, and alternate to, each other when seen in a direction normal to the substrates. Owing to this, the azimuth directions of the directors of the liquid crystal domains formed at the time of voltage application are regulated. The azimuth direction of each liquid crystal domain is perpendicular to the azimuth direction in which the linear slits or dielectric projections (collectively referred to as the "linear structures") extend.

[0092] Today, such MVA mode liquid crystal display devices are widely used for liquid crystal TVs. However, in an MVA mode liquid crystal display device, the alignment regulating force from the linear structures regulates the azimuth direction of the directors of the liquid crystal domains. Therefore, there is a problem that the responsiveness of the liquid crystal molecules is high (the alignment direction changes fast) in the vicinity of the linear structures and low at a position far from the linear structures.

[0093] As a vertical alignment type liquid crystal display device having a response characteristic higher than that of the MVA mode liquid crystal display device, a PSA mode liquid crystal display device is known. The polymer sustained alignment technology (hereinafter, referred to as the "PSA technology") is disclosed in, for example, Japanese Laid-Open Patent Publications Nos. 2002-357830, 2003-177418 and 2006-78968, and K. Hanaoka et al., "A New MVA-LCD by Polymer Sustained Alignment Technology", SID 04 DIGEST, pp. 1200-1203 (2004). The disclosures of these four documents are entirely incorporated herein by reference.

[0094] According to the PSA technology, the pretilt direction of the liquid crystal molecules is controlled as follows. A small amount of polymerizable compound (e.g., a photopolymerizable monomer or oligomer) is mixed in a liquid crystal material. After a liquid crystal cell is assembled, the polymerizable compound is irradiated with active energy rays (e.g., ultraviolet rays) in the state where a prescribed voltage is applied to the liquid crystal layer. The pretilt direction of the liquid crystal molecules is controlled by the polymer which is thus generated. The alignment state of the liquid crystal molecules realized when the polymer is generated is maintained (stored) even after the voltage is removed (in the absence of the voltage). Herein, the layer formed of the polymer will be referred to as an "alignment sustaining layer". The alignment sustaining layer is formed on surfaces of alignment films (on the liquid crystal layer side). The alignment sustaining layer does not need to be in the form of a film covering the surfaces of the alignment films, and may be in the form of particles of the polymer discretely provided.

[0095] The PSA technology has an advantage of adjusting the pretilt azimuth angle and the pretilt angle of the liquid crystal molecules by controlling the electric field or the like formed in the liquid crystal layer. In addition, since an alignment sustaining layer expresses an alignment regulating force on substantially the entire plane thereof contacting the liquid crystal layer, a higher response characteristic than that of the MVA mode liquid crystal display device is provided. When, specifically, double speed driving or the like is performed, the present invention is preferably applicable to a PSA mode liquid crystal display device.

[0096] A PSA mode liquid crystal display device in an embodiment according to the present invention is obtained by, for example, using a pixel electrode 11A shown in FIG. 8

as the pixel electrode 11 of the liquid crystal display panel 10 and applying the above-described PSA technology.

[0097] The pixel electrode 11A includes cross-shaped trunk portions 11t1 and 11t2 located to overlap polarizing axes of a pair of polarizing plates and a plurality of branch portions 11b1, 11b2, 11b3 and 11b4 extending in a direction of about 45° with respect to the cross-shaped trunk portions 11t1 and 11t2.

[0098] The trunk portions include the trunk portion 11t1 extending in the row direction (horizontal direction) and the trunk portion 11t2 extending in the column direction (vertical direction). Where the azimuth angle of the rightward direction of the display plane (the 3 o'clock direction of a clock face) is 0°, the plurality of branch portions include a first group (branch portions 11b1) extending at an azimuth angle of 45° from the trunk portion, a second group (branch portions 11b2) extending at an azimuth angle of 135° from the trunk portion, a third group (branch portions 11b3) extending at an azimuth angle of 225° from the trunk portion, and a fourth group (branch portions 11b4) extending at an azimuth angle of 315° from the trunk portion. The liquid crystal molecules in the liquid crystal layer of the vertical alignment type (having negative dielectric anisotropy) are tilted in azimuth directions in which the corresponding branch portions extend because of oblique electric fields from the trunk portions and the branch portions. A reason for this is that an oblique electric field from the branch portions extending parallel to each other acts to tilt the liquid crystal molecules in an azimuth direction perpendicular to the direction in which the branch portions extend, and an oblique electric field from the trunk portions act to tilt the liquid crystal molecules in directions in which the corresponding branch portions extend. By use of the PSA technology, the above-described alignment of the liquid crystal molecules which is formed when a voltage is applied to the liquid crystal layer can be stabilized.

[0099] Needless to say, the present invention is widely applicable to liquid crystal display devices of, for example, an RTN (also referred to as "VAIN") mode, an IPS mode and an FSS mode in addition to the liquid crystal display devices in the above embodiments.

[0100] In the above description, the row direction is set as the horizontal direction of the display plane and the column direction is set as the vertical direction of the display plane. These directions may be opposite. Namely, the gate bus lines may be located to extend in the vertical direction and the source bus lines may be located to extend in the horizontal direction. In other words, the row direction and the column direction in the above description may be exchanged.

INDUSTRIAL APPLICABILITY

[0101] The present invention is widely applicable to liquid crystal display devices for HDTV and other applications.

REFERENCE SIGNS LIST

- [0102] 10, 10A, 10B, 10C, 10D, 10E Liquid crystal display panel
- [0103] 10a Active matrix substrate
- [0104] 11 Pixel electrode
- [0105] 12 Scanning line
- [0106] 13 Signal line
- [0107] 13a First signal line
- [0108] 13b Second signal line
- [0109] 14 Thin film transistor (TFT)

- [0110] 15 Storage capacitance line
- [0111] 20 Scanning line driving circuit (gate driver)
- [0112] 30 Signal line driving circuit (source driver)
- [0113] 100 Liquid crystal display device
- [0114] P, P₁, P₂, P₃, P₄ Pixel
- [0115] P_{CD} Color display pixel

1. A liquid crystal display device including a plurality of pixels arrayed in a matrix of a plurality of rows by a plurality of columns, the liquid crystal display device comprising:

- an active matrix substrate including a pixel electrode provided for each of the plurality of pixels, a switching element connected to the pixel electrode, a plurality of scanning lines extending in a row direction, and a plurality of signal lines extending in a column direction;
- a counter substrate facing the active matrix substrate;
- a liquid crystal layer provided between the active matrix substrate and the counter substrate;
- a scanning line driving circuit for supplying a scanning signal to each of the plurality of scanning lines; and
- a signal line driving circuit for supplying a positive or negative signal voltage to each of the plurality of signal lines;

wherein:

the plurality of pixels form a plurality of color display pixels, and the plurality of color display pixels each include first, second, third and fourth pixels arrayed in two rows by two columns; wherein the first pixel and the second pixel are adjacent to each other in the row direction, the third pixel and the fourth pixel are adjacent to each other in the row direction, the first pixel and the third pixel are adjacent to each other in the column direction, and the second pixel and the fourth pixel are adjacent to each other in the column direction;

the plurality of signal lines include first and second signal lines which are located in correspondence with each column of pixels and are supplied with signal voltages of opposite polarities from each other from the signal line driving circuit in each vertical scanning period;

in an arbitrary color display pixel, the switching element of one of the first and third pixels is connected to the first signal line, the switching element of the other of the first and third pixels is connected to the second signal line, the switching element of one of the second and fourth pixels is connected to the first signal line, the switching element of the other of the second and fourth pixels is connected to the second signal line, and the switching elements of the first, second, third and fourth pixels are controlled to be ON/OFF by a common scanning signal; and

during an arbitrary vertical scanning period, the polarities of the signal voltages supplied to the first and second signal lines are constant.

2. The liquid crystal display device of claim 1, wherein in a color display pixel adjacent to the arbitrary color display pixel in the column direction, the switching element of one of the first and third pixels is connected to the second signal line, the switching element of the other of the first and third pixels is connected to the first signal line, the switching element of one of the second and fourth pixels is connected to the second signal line, and the switching element of the other of the second and fourth pixels is connected to the first signal line.

3. The liquid crystal display device of claim 1, wherein in an arbitrary vertical scanning period, a polarity of the signal voltage supplied to each of the first, second, third and fourth pixels included in an arbitrary color display pixel, and a polarity of the signal voltage supplied to each of the first, second, third and fourth pixels included in a color display pixel adjacent to the arbitrary color display pixel in the row direction, are opposite to each other.

4. The liquid crystal display device of claim 1, wherein in an arbitrary vertical scanning period, the polarities of the voltage signals supplied to the first pixel and the second pixel included in an arbitrary first color display pixel are opposite to each other, and the polarities of the voltage signals supplied to the third pixel and the fourth pixel included in the arbitrary first color display pixel are opposite to each other.

5. The liquid crystal display device of claim 1, wherein in an arbitrary vertical scanning period, the polarities of the signal voltages supplied to two arbitrary signal lines adjacent to each other, among the plurality of signals, are opposite to each other.

6. The liquid crystal display device of claim 1, wherein in an arbitrary color display pixel, the switching elements of the first, second, third and fourth pixels are connected to a common scanning line.

7. The liquid crystal display device of claim 1, wherein the first, second, third and fourth pixels include one of a yellow pixel, a cyan pixel, a magenta pixel and a white pixel in addition to a red pixel, a blue pixel and a green pixel.

8. The liquid crystal display device of claim 1, wherein for displaying an intermediate gray scale level, the plurality of pixels each include a bright sub pixel exhibiting a luminance higher than that of the gray scale level to be displayed and a dark sub pixel exhibiting a luminance lower than that of the gray scale level to be displayed.

9. The liquid crystal display device of claim 1, wherein the vertical scanning period is $\frac{1}{120}$ seconds or shorter.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US20120320026A1	公开(公告)日	2012-12-20
申请号	US13/575691	申请日	2011-01-27
[标]申请(专利权)人(译)	夏普株式会社		
申请(专利权)人(译)	夏普株式会社		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	KITAYAMA MASAE HIRATA MITSUAKI SHIMOSHIKIRYOH FUMIKAZU HYODO KENICHI ITSUMI IKUMI YAMASHITA YUKI SUGISAKA AKANE		
发明人	KITAYAMA, MASAE HIRATA, MITSUAKI SHIMOSHIKIRYOH, FUMIKAZU HYODO, KENICHI ITSUMI, IKUMI YAMASHITA, YUKI SUGISAKA, AKANE		
IPC分类号	G09G3/36 G06F3/038		
CPC分类号	G02F1/133707 G02F1/13624 G02F2201/52 G09G2330/045 G09G2300/0452 G09G2310/0205 G09G2320/0247 G09G3/36		
优先权	2010019258 2010-01-29 JP		
其他公开文献	US9818348		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示装置 (100) 中的彩色显示像素PCD包括排列成两行两列的第一 (a) 至第四像素P1至P4，以及与每列相对应的第一和第二信号线 (13a , 13b)。在每个垂直扫描周期中，从信号线驱动电路 (30) 向像素提供彼此相反的极性信号电压。第一和第三像素P1和P3之一的TFT (14) 连接到第一信号线 (13a) ，另一个像素的TFT (14) 连接到第二信号线 (13b)。第二和第四像素P2和P4之一的TFT (14) 连接到第一信号线 (13a) ，另一个像素的TFT (14) 连接到第二信号线 (13b)。第一至第四像素P1至P4的TFT (14) 通过共同的扫描信号被控制为导通/截止，并且提供给第一和第二信号线 (13a , 13b) 的信号电压的极性在期间是恒定的。任意垂直扫描周期。由此，减小了信号线驱动电路上的负载。

