

(19)



(11)

EP 1 936 597 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
25.04.2012 Bulletin 2012/17

(51) Int Cl.:
G09G 3/32^(2006.01)

(21) Application number: **07254970.2**

(22) Date of filing: **20.12.2007**

(54) **Organic light emitting diode display**

Organische lichtemittierende Diodenanzeige

Affichage à diode électroluminescente organique

(84) Designated Contracting States:
DE FR GB HU

(30) Priority: **20.12.2006 KR 20060131182**

(43) Date of publication of application:
25.06.2008 Bulletin 2008/26

(73) Proprietor: **Samsung Mobile Display Co., Ltd.**
Suwon-si
Gyeonggi-do (KR)

(72) Inventor: **Choi, Sang-Moo**
c/o Samsung SDI Co., Ltd.
Gyeonggi-do (KR)

(74) Representative: **Mounteney, Simon James**
Marks & Clerk LLP
90 Long Acre
London
WC2E 9RA (GB)

(56) References cited:
EP-A1- 1 635 324 EP-A2- 1 847 982
US-A1- 2005 237 281 US-A1- 2006 262 130

EP 1 936 597 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] Example embodiments relate to an organic light emitting diode (OLED) display and, more particularly, to an OLED display having a pixel initialized by a voltage supplied through a data line.

2. Description of the Related Art

[0002] An OLED display is a type of a flat panel display that uses an OLED to generate light. The light is generated by combining electrons supplied by a cathode and holes supplied by an anode. Images may be realized on the OLED display by driving thin film transistors (TFT) formed at each pixel, which may supply the OLED of the pixel with a driving current corresponding to a data signal. The pixels may be formed at an area where a plurality of scan lines, a plurality of emission control lines and a plurality of data lines intersect one another. Each pixel may further include a pixel circuit for driving the pixel and the OLED to emit light according to the driving current of the pixel circuit. The pixel circuit may include a driving switching element arranged to be driven according to a data signal supplied by the data line, a storage element for storing a voltage between a source electrode of the driving switching element and a gate electrode and a plurality of switching elements.

[0003] Such an OLED is typically driven through a pixel initializing period, a data writing period and a light emitting period. During the pixel initializing period, a previous data signal may be stored in the storage element, and the storage element is initialized to an initial voltage in response to a previous scan signal supplied through a scan line. During the data writing period, the voltage supplied by the data line in response to a current scan signal supplied through the scan line may be stored in the storage element. During the light emitting period, the OLED emits light according to the driving current that flows through the driving switching element corresponding to the data signal stored in the storage element.

[0004] The pixel initializing period, however, requires an extra initial power source and an extra initial line (a line connected to an initial power source) to initialize the previous data signal stored in the storage element. The extra initial power source and the extra initial line complicates the structure of the pixel circuit and reduces an aperture ratio of the pixel. In addition, due to the increase number of data lines, there may be more integrated circuits to drive the OLED display and difficulty in providing a high resolution display.

[0005] In order to manage the extra initial power source and the extra initial line, a demultiplexer (DeMux) may be used, which may have fewer output lines in the data driver. Such a DeMux may include a plurality of data sup-

plying switching elements, which may be connected in common to the output line of the data driver. The respective data supplying switching elements may be coupled to a predetermined data line. Accordingly, such a DeMux can supply the respective data line with the data signal in sequence by operating the data supplying switching elements.

[0006] Further, the DeMux may not initialize the previous data signal, in which case, the pixels may be coupled to each data line simultaneously by the current scan signal. Accordingly, one pixel may be supplied with a current data signal and a subsequent pixel may be supplied with a previous data signal. The previous data signal, however, may have a higher voltage level than the current data signal, which may reduce and/or prevent the supply of the current data signal to the respective pixel, because the driving switching element may be turned OFF by this. In addition, the time to charge the respective data line with the data signal may decrease, and the time during which the pixels are driven according to the scan signal may also decrease. As a result, the time to compensate for a characteristic deviation of the driving switching element included in each pixel may be reduced and, thus, cause non-uniform image quality.

[0007] EP 1 635 324 discloses a light emitting display and a driving method that uses a demultiplexer to reduce the number of output lines of a data driver.

[0008] EP 1 847 982, published after the priority date of the present invention, discloses a method for driving an organic light emitting display device that includes steps of supplying a data signal and a reset voltage to an output line during a horizontal period; supplying the data signal and the reset voltage, supplied to the output line, to a plurality of data lines using a demultiplexer; charging a voltage corresponding to the data signal in a pixel connected with one of the data lines during a period when a scan signal is supplied to a current scan line of the pixel; and allowing the pixel to emit light corresponding to the charged voltage.

SUMMARY OF THE INVENTION

[0009] Example embodiments are therefore directed to an OLED display that substantially overcomes one or more of the problems due to the limitations and disadvantages of the related art.

[0010] It is therefore a feature of example embodiments to provide an OLED display having a pixel initialized by a voltage supplied through a data line so that an extra initial power source and an extra initial line may not be required.

[0011] Another feature of example embodiments provides an OLED display having a simple structure.

[0012] Another feature of example embodiments provides an OLED display having an improved aperture ratio.

[0013] Another feature of example embodiments provides an OLED display having a uniform image quality.

[0014] According to an aspect of the invention, there is provided an OLED display as set out in Claim 1. Preferred features of this aspect are set out in Claims 2 to 19.

[0015] At least one of the above and other features of example embodiments may provide an OLED display having a plurality of scan lines and a plurality of data lines, an OLED adapted to generate light so as to emit images, a data driver coupled to the plurality of data lines, a driving switching element adapted to supply the OLED with a driving current, a storage element having a first electrode and a second electrode, the first electrode may be coupled to a control electrode of the driving switching element and the second electrode may be coupled to a first power source, a first switching element having a first electrode coupled to at least one of the plurality of data lines, a control electrode coupled to at least one of the plurality of scan lines, and a second electrode coupled to a first electrode of the driving switching element, a second switching element having a control electrode coupled to at least one of the plurality of scan lines, the second switching element may be configured in a diode-like state connecting the driving switching element, and a third switching element having a control electrode coupled to a previous scan line, the third switching element may be adapted to initialize a voltage stored in the storage element through at least one of the plurality of data lines.

[0016] The third switching element may include a first electrode coupled to the storage element and a second electrode coupled to at least one of the plurality of data lines. The driving switching element may include a first electrode coupled to the first power source and a second electrode coupled to a second power source.

[0017] The OLED may include an anode coupled to the second electrode of the driving switching element and a cathode coupled to the second power source. The OLED display may further include a fourth switching element coupled between the second electrode of the driving switching element and the anode of the OLED, and a fifth switching element coupled between the first electrode of the driving switching element and the first power source.

[0018] The second switching element may further include a first electrode and a second electrode. The first electrode of the second switching element may be coupled between the control electrode of the driving switching element and the first electrode of the storing element, and the second electrode of the second switching element may be coupled between the second electrode of the driving switching element and the first electrode of the fourth switching element. The first electrode of the driving switching element may be coupled between the second electrode of the first switching element and a second electrode of the fifth switching element, and the second electrode of the driving switching element may be coupled to the second electrode of the second switching element. A control electrode of the fourth switching element may be coupled to an emission control line to control

an emission time of the OLED. A control electrode of the fifth switching element may be coupled to the control electrode of the fourth switching element.

[0019] The fifth switching element may be adapted to transmit the first power source ELVDD to the first electrode of the driving switching element according to an emission control signal supplied from the emission control line.

[0020] The voltage stored in the storage element may be initialized by turning on the third switching element, and a data signal generated by the data driver and supplied via the data line may be stored in the storage element by turning on the first switching element and the second switching element.

[0021] The OLED display may further include a data driver coupled to the plurality of data lines, a data output line coupled between the plurality of data lines and the data driver and a DeMux coupled between the plurality of data lines and the data output line. The DeMux may include an input port coupled to the data output line and at least two output ports coupled to the plurality of data lines. The DeMux may include at least two data supplying switching elements having a first electrode coupled to the input port and a second electrode coupled to the at least two output ports respectively.

[0022] The data signal may be adapted to be stored in the storage element when the data supplying switching elements is being turned on, and when the data signal generated by the data driver is an initial data signal, the data line is initialized. The driving switching element may be configured in a diode-like state when the second switching element and the data supplying switching elements are turned on. The initial data signal may have a lower voltage than a threshold voltage of the driving switching element.

[0023] The OLED display may further include a pixel formed at an area where the plurality of scan lines, the plurality of data lines and a plurality of emission control lines intersect, a scan driver coupled to the plurality of scan lines, an emission control driver coupled to the emission control line and a DeMux driver coupled between the plurality of data lines and the data driver. The pixel may be adapted to be initialized through the plurality of data lines.

[0024] The DeMux driver may further include an input port coupled to a plurality of data output lines, and a plurality of DeMuxs having at least two output ports coupled to at least two data lines. The DeMux driver may include a same number of DeMuxs as a number of data output lines. The data supplying switching elements may be adapted to be turned on in sequence after the first switching element and the second switching element are turned on.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] The above and other features and advantages of example embodiments will become more apparent to

those of ordinary skill in the art by describing in detail example embodiments thereof with reference to the attached drawings, in which:

FIG. 1 is a drawing depicting a schematic structure of an OLED display according to an example embodiment;

FIG. 2 is a diagram of a driving circuit of a DeMux shown in FIG. 1;

FIG. 3 is a diagram of a driving circuit of a pixel shown in FIG. 1;

FIG. 4 is a driving circuit of a relationship of the DeMux and the pixel; and

FIG. 5 is a diagram of a driving waveform supplied through the driving circuit of FIG. 4.

DETAILED DESCRIPTION OF THE INVENTION

[0026] Example embodiments will now be described more fully hereinafter with reference to the accompanying drawings; however, example embodiments may be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these example embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

[0027] Referring to FIG. 1, an OLED display 1 includes an OLED display panel 100, a controller 200, a scan driver 300, a data driver 400, a DeMux driver 500 and an emission control driver 600. The OLED display panel 100 includes a plurality of scan lines S 1 to S_n, which are arranged in a column direction, a plurality of emission control lines E1 to E_n, which are arranged in the column direction, a plurality of data lines DL₁₁ to DL_{ik(=m)}, which are arranged in a row direction and a plurality of pixels 123, which are arranged in the row direction.

[0028] The pixels 123 are formed at an area in which the scan lines S1 to S_n, the emission control lines E1 to E_n and the data lines DL₁₁ to DL_{ik(=m)} intersect one another. The pixels 123 emit light according to a data signal supplied from the data lines DL₁₁ to DL_{ik(=m)}. The pixels 123 control the light in response to an emission time corresponding to an emission control signal supplied from the emission control lines E1 to E_n.

[0029] The controller 200 generates a scan drive control signal (SCS), a data drive control signal (DCS), an emission control drive control signal (ECS) and a DeMux drive control signal (DMCS) corresponding to a synchronizing signal supplied from outside. The drive control signals SCS, DCS, DMCS and ECS are supplied to the scan driver 300, the data driver 400, the DeMux driver 500 and the emission control driver 600, respectively.

[0030] The scan driver 300 generates a scan signal responding to the SCS and supplies the plurality of scan lines S 1 to S_n with the scan signal in sequence. The OLED display panel 100 selects the pixel 123 according to the scan signal supplied from the scan driver 300.

[0031] The data driver 400 generates a data signal for driving the pixels 123 responding to the DCS and supplies the plurality of data output lines D1 to D_i with the data signal in sequence. The OLED display panel 100 selects the pixel 123 according to the data signal supplied from the data driver 400. The data driver 400 further generates an initial data signal for initializing the pixels 123 and supplies the plurality of the data output lines D1 to D_i with the initial data signal in sequence.

[0032] The DeMux driver 500 responds to the DMCS and includes a plurality of DeMuxs 510 for delivering the data signal (or the initial data signal) supplied from the data driver 400 to the data lines DL₁₁ to DL_{ik(=m)}. The DeMux driver 500 includes a same number of DeMuxs 510 as the number of data output lines D1 to D_i. The respective DeMux 510 supplies k data lines DL with the data signal supplied from the data output lines D in sequence.

[0033] The emission control driver 600 generates an emission control signal responding to the emission control driving control signal (ECS) and supplies the plurality of emission control lines E1 to E_n with the emission control signal in sequence. The OLED display panel 100 selects the pixel 123 according to the emission control signal supplied from the emission control driver 600.

[0034] The OLED display 1 further includes a first power source ELVDD and a second power source ELVSS. The first power source ELVDD and the second power source ELVSS provide the pixels 123 with a voltage source and a reference voltage, respectively.

[0035] Referring to FIG. 2, a driving circuit of the DeMux 510 includes an input port 510a coupled to the data output line D1 and output ports 510b1 to 510b3 coupled to the data lines DL11 to DL13. The driving circuit of the DeMux 510 further includes first to third data supplying switching elements M1, M2 and M3.

[0036] The input port 510a is coupled to the data output line D1, e.g., one input port 510a may be connected to one data output line D1. The output ports 510b1 to 510b3 are be coupled to a respective one of the data lines DL 11 to DL 13. The respective output port 510b1 to 510b3 supplies the respective data line DL11 to DL13 with the data signals delivered from the input port 510a in sequence according to an operation of the first to third data supplying switching elements M1, M2 and M3.

[0037] The data supplying switching elements M1, M2 and M3 include a control electrode connected with the controller 200 (shown in FIG. 1), a first electrode (source or drain) connected to the input port 510a in common and a second electrode (drain or source) connected to the respective output port 510b1 to 510b3. The respective data supplying switching element M1, M2 and M3 can be turned ON or OFF according to the DeMux drive control signals DMSC1, DMSC2 and DMSC3 supplied from the controller 200. When the first to third data supplying switching elements M1, M2 and M3 are turned ON, corresponding data signal is supplied to the respective data line DL11 to DL13.

[0038] Referring to FIGS. 3 and 4, a driving circuit of the pixel 123 corresponds to pixels 123R, 123G, 123B, which are coupled to the respective data line DL11 to DL13. The pixels 123R, 123G, 123B can be considered as sub-pixels arranged to emit light of respectively red, blue and green light. The respective pixel 123R, 123G, 123B are initialized through an initial data signal R_i , G_i and B_i supplied through the data lines DL11 to DL13. The driving circuit of the pixel 123 further includes the OLED, the scan line S_n and the pixel circuit 123a for emitting light connected to the data lines DL11 to DL13 and the emission control line E_n . The driving circuit further includes the first power source ELVDD and the second power source ELVSS.

[0039] The OLED includes an anode connected to the pixel circuit 123a and a cathode connected to the second power source ELVSS. The OLED emits one of red, green or blue lights responding to a driving current I_{OLED} supplied through the pixel circuit 123a. The OLED may be made of an organic material, e.g., fluorescent or phosphorescent.

[0040] The pixel circuit 123a includes a driving switching element Td to supply the OLED with the driving current I_{OLED} , a storage element Cst and a plurality of switching elements, e.g., first to fifth switching elements Ts1, Ts2, Ts3, Ts4 and Ts5. The switching elements Td, Ts1, Ts2, Ts3, Ts4 and Ts5 may be a P-type field effect transistor (FET) or an N-type FET.

[0041] The driving switching element Td for each pixel includes a first electrode (source or drain) connected with the first power source ELVDD, a second electrode (drain or source) connected with the anode of the OLED and a control electrode (or gate electrode), which is operated by a voltage according to the data signal supplied from the data line DL. The driving switching element Td distributes the driving current I_{OLED} , which corresponds to the data signal supplied from the data line DL to the OLED display 1.

[0042] A first electrode of the storage element Cst is connected with the control electrode (or gate electrode) of the driving switching element Td, and a second electrode of the storage element Cst is connected with the first electrode (source or drain) of the first power source ELVDD. A voltage between the voltage of the first electrode (source or drain) of the driving switching element Td and the voltage of the control electrode (or gate electrode) of the driving switching element Td is stored in the storage element Cst, so as to maintain the voltage of emitting light of the OLED. The pixel 123 is driven according to the voltage stored in the storage element Cst. Further, during the initialization of any remaining voltage in the storage element, the pixel 123 is initialized to a state where no scan signal is needed.

[0043] The first switching element Ts1 includes a first electrode (source or drain) connected with one of the data lines DL11 to DL13, a second electrode (drain or source) connected with the driving switching element Td and a control electrode (or gate electrode) connected to

the scan line S_n . The first switching element Ts1 supplies the storage element Cst with the data signal supplied from one of the data lines DL11 to DL13.

[0044] The second switching element Ts2 includes a control electrode (or gate electrode) connected with the scan line S_n of the pixel, a first electrode (source or drain) and a second electrode (drain or source). The second switching element Ts2 is coupled between the control electrode (or gate electrode) of the driving switching element Td and the second electrode (drain or source) of the driving switching element Td. In other words, the second switching element Ts2 is connected to the driving switching element Td in a diode-like state. The second switching element Ts2 further causes a threshold voltage of the driving switching element Td to be stored in the storage element Cst.

[0045] The third switching element Ts3 includes a control electrode (or gate electrode) connected to a previous scan line S_{n-1} (i.e. a scan line of a pixel in a previous row), a first electrode (source or drain) connected to one of the data lines DL11 to DL13 and a second electrode (drain or source) connected to the control electrode (or gate electrode) of the driving switching element Td. The third switching element Ts3 initializes the voltage stored in the storage element Cst as a result of the voltage of one of the data lines DL11 to DL13 according to the previous scan signal applied via the previous scan line S_{n-1} .

[0046] The fourth switching element Ts4 includes a first electrode (source or drain) connected with the second electrode (drain or source) of the driving switching element Td, a second electrode (drain or source) connected with the anode of the OLED and a control electrode (or gate electrode) connected with the emission control line E_n . The fourth switching element Ts4 controls driving time from the driving switching element Td to the OLED according to the emission control signal supplied from the emission control line E_n . This obtains the emission time of the OLED.

[0047] The fifth switching element Ts5 includes a first electrode (source or drain) connected to the first power source ELVDD, a second electrode (drain or source) connected to the first electrode (source or drain) of the driving switching element Td and a control electrode (or gate electrode) connected to the emission control line E_n . The fifth switching element Ts5 delivers the first power source ELVDD to the first electrode (source or drain) of the driving switching element Td according to the emission control signal supplied from the emission control line E_n .

[0048] The first power source ELVDD and the second power source ELVSS supply a voltage source and a reference voltage, respectively, for driving the pixels 123. Further, the voltage supplied by the second power source ELVSS is formed to have a lower voltage level than the voltage supplied by the first power source ELVDD. The second power source ELVSS may be a ground voltage or a negative voltage.

[0049] Now, an operation of the OLED display 1 according to example embodiments will be described in de-

tail. More particularly, the operation of the driving circuits of the DeMux 510 and the pixels 123 will be described.

[0050] Referring to FIG. 5, a driving waveform supplied through a driving circuit 110 is shown. The OLED display 1 according to example embodiments is driven through an initializing period Si, a data programming period Sp and a light emitting period Se. The respective pixels 123R, 123G, 123B are initialized by voltages supplied to the data lines DL11 to DL13 during the initializing period Si. The pixels 123R, 123G, 123B are further be supplied with current data signals Rdn, Gdn and Bdn in sequence via the corresponding one of the respective data lines DL11 to DL13 during the data programming period Sp. The data lines DL11 to DL13 are initialized during the respective data line initializing period Sdi.

[0051] The initializing period Si initializes the pixels 123R, 123G and 123B using the previous scan signal supplied from the previous scan line Sn-1. During the initializing period Si (while the previous scan line Sn-1 is being supplied with a previous scan signal of low level), the third switching element Ts3 is turned ON. Accordingly, when the current data signals Rdn, Gdn and Bdn are stored in the previous scan line Sn-1, the remaining voltage in the storage element Cst is initialized as a result of the voltage of a respective one of the data lines DL11 to DL13, which passes through the third switching element Ts3. Further, during the initializing period Si, the voltage level of the data lines DL11 to DL13 is determined to have a lower voltage level than a threshold voltage level. The threshold voltage level of the driving switching element Td is subtracted from the lowest voltage level of the current data signals Rdn, Gdn and Bdn supplied during the data programming period Sp.

[0052] The data programming period Sp supplies the respective pixel 123R, 123G and 123B with the current data signals Rdn, Gdn and Bdn via the current scan signal supplied from the scan line Sn. During the data programming period Sp (while the current scan line Sn is supplied with the current scan signal of low level), the first switching element Ts1 and the second switching element Ts2 are turned ON. The control electrodes of the first to third data supplying switching elements M1, M2 and M3 are supplied with the driving control signals DMCS1 to DMCS3 in sequence and, thereafter, the first to third data supplying switching elements M1, M2 and M3 are turned ON in sequence.

[0053] When the first data supplying switching elements M1 is turned ON, the data signal Rdn passes through the driving switching element Td of the red pixel 123R via the data line DL11 and is stored in the storage element Cst for the red pixel 123R. Further, when the second data supplying switching elements M2 is turned ON, the data signal Gdn passes through the driving switching element Td of the green pixel 123G via the data line DL12 and is stored in the storage element Cst for the green pixel 123G. Even further, when the third data supplying switching elements M3 is turned ON, the data signal Bdn passes through the driving switching element

Td of the blue pixel 123B via the data line DL13 and is selected in the storage element Cst for the blue pixel 123B.

[0054] The supply of the current data signals Rdn, Gdn and Bdn, however, may be impeded when the previous data signals Rde, Gde and Bde remain at the respective data line DL11 to DL13, while the first to third data supplying switching elements M1, M2, M3 are turned ON in sequence. For example, when a current data signal Rdn is supplied to the red pixel 123R, and the first and second switching elements Ts1 and Ts2 are turned ON. Therefore, the green pixel 123G and the blue pixel 123B are coupled to the data lines DL12 and DL13. The green pixel 123G and the blue pixel 123B is supplied with the previous data signals Gde and Bde via the first and the second switching elements Ts1 and Ts2. Further, if the respective previous data signals Gde and Bde have a relatively low voltage level compared with the current data signals Gdn and Bdn, the current data signals Gdn and Bdn may be properly stored. Alternatively, if the previous data signals Gde and Bde have a higher voltage level than the current data signals Gdn and Bdn, the current data signals Gdn and Bdn may not be properly stored due to the structure of the respective pixels 123G and 123B, e.g., a diode-like connection of the driving switching element Td. The red pixel 123R may be affected in the same manner as the green and blue pixels 123G and 123B as mentioned above. However, the effect of the previous data signal Rde in the red pixel 123R may be relatively small because the interval between a supply of the current scan signal and a supply of the current data signal Rdn in the red pixel 123R is smaller than in the case of the green pixel 123G and the blue pixel 123B. Accordingly, in order to affect the previous data signal Rde, the driving circuit employs the data line initializing period Sdi so that the data lines DL11 to DL13 are initialized by lowering the voltage level of the data lines DL11 to DL13 during the data programming period Sp. The respective data line initializing period Sdi may progress at a point of time (ts), e.g., after the pixels 123R, 123G and 123B are supplied with the current data signals Rdn, Gdn and Bdn through the respective data line DL11 to DL13. Further, the respective data line DL11 to DL13 is initialized while the first to third data supplying switching elements M1, M2 and M3 are being turned ON. Further, the respective data line DL11 to DL13 is supplied with the initial data signals Ri, Gi and Bi from the data driver 400 during the data line initializing period Sdi. The initial data signals Ri, Gi and Bi initialize the data lines DL11 to DL13, and are simultaneously supplied to the respective pixel 123R, 123G and 123B. The initial data signals Ri, Gi and Bi then initialize the voltage stored in the storage element Cst included in the respective pixel 123R, 123G and 123B. Further, the voltage level of the initial data signal Ri, Gi and Bi is determined to have a lower voltage level than the threshold voltage level of the driving switching element Td. The threshold voltage level of the driving switching element Td is subtracted from the lowest voltage level

of the current data signals Rdn, Gdn and Bdn supplied during the data programming period Sp. Thus, the current data signals Rdn, Gdn and Bdn are maintained because the respective pixel 123R, 123G and 123B are connected in a diode-like state with the driving switching element Td of each pixel, even if the data lines DL11 to DL13 are supplied with the initial data signals Ri, Gi and Bi.

[0055] The light emitting period Se is a period for the OLED to emit light according to the emission control signal supplied from the emission control line En. During the light emitting period Se, the fourth switching element Ts4 and the fifth switching element Ts5 are turned ON when the emission control signal of the respective pixel 123R, 123G and 123B is at a low level. Therefore, the driving switching element Td is connected with the OLED through the fourth switching element Ts4. Further, the first electrode of the driving switching element Td is supplied with the first power source ELVDD through the fifth switching element Ts5. As a result, the OLED emits light corresponding to the driving current I_{OLED} , which may correspond to the difference of the voltage between the first electrode (source or drain) of the switching device Td and the control electrode (or gate electrode) of the driving switching element Td.

[0056] Because the pixels 123R, 123G and 123B are initialized by the voltage supplied from the respective data line DL11 to DL13 during the initializing period Si, an extra initial line is not required. Further, a structure of the pixel circuit is simpler and, thus, an aperture ratio is improved. That is, the voltage remaining in the storage element Cst for each sub-pixel is initialized as a result of the voltage of a respective one of the data lines DL11 to DL13 so that the remaining voltage supplies the current data signals Rdb, Gdn and Bdn and, thus, extra initial power sources and initial lines are not required.

[0057] Further, the current data signals Rdn, Gdn and Bdn are stored in the storage element Cst included in the respective pixels 123R, 123G and 123B using the DeMux 510 during the data programming period Sp. The data lines DL11 to DL13 are then initialized as the data driver 400 supplies the data lines DL11 to DL13 with the initial data signals Ri, Gi and Bi during the data line initializing period Sdi. Accordingly, the driving time of the pixels 123R, 123G and 123B and the charging time for charging the respective data lines DL11 to DL13 with the current data signals Rdn, Gdn and Bdn may each be longer. Further, the driving time of the pixels 123R, 123G and 123B according to the scan signal may also be longer. As a result, uniformity of the image quality can be improved.

[0058] Further, the OLED display 1 can supply the respective data lines DL11 to DL13 with the current data signals Rdn, Gdn and Bdn while the current scan line Sn is being supplied with the scan signal. Accordingly, the respective pixels 123R, 123G and 123B may supply the current data signals Rdn, Gdn and Bdn without being affected by the previous data signals Rde, Gde and Bde because the data lines DL11 to DL13 are initialized by

the initial data signals Ri, Gi and Bi before the first to third data supplying switching elements M1, M2 and M3 are turned OFF. As such, there is no requirement to separate the actual driving time of the pixels 123R, 123G and 123B and the charging time of the current data signals Rdn, Gdn and Bdn. This provides longer charging time of the current data signals Rdn, Gdn and Bdn and driving time of the pixels 123R, 123G and 123B. In addition, a time for compensating a characteristic deviation of the driving switching element Td included in the pixels 123R, 123G and 123B may be longer and, thus, the uniformity of image quality of the pixels 123R, 123G and 123B is improved.

[0059] Although the above example embodiments described the DeMux connected to the first data output line and the pixels connected to the DeMux, other configurations may be employed. For example, the DeMux may be connected to another data output line included in the DeMux driver and the pixels connected to the DeMux.

[0060] In other example embodiments, the number of pixels connected to the DeMux may not be limited to the red pixel, the green pixel and the blue pixel connected to one DeMux (e.g., situations where k is 3), and that other various modifications may be made according to one ordinary skill in the art.

[0061] It will be understood that when an element is referred to as being "connected to" or "coupled to" another element, it can be directly on the other element or intervening elements may also be present. In contrast, when an element is referred to as being "on," "connected to" or "coupled to" another element, there are no intervening elements present. In addition, it will be understood that when an element is referred to as being "between" two elements, it can be the only elements between the elements, or one or more intervening elements may also be present. Further, when it is described that a device "includes" a constituent element, it means that the device may further include other constituent elements in addition to the element unless specifically referred to the contrary. Like numbers refer to like elements throughout.

[0062] It will also be understood that the terms "first," "second," etc. may be used herein to describe various elements, and should not be limited by these terms. These terms are only used to distinguish an element from another element. Thus, a first element discussed herein could be termed a second element without departing from the teachings of example embodiments.

[0063] Example embodiments have been disclosed herein, and although specific terms are employed, they are used and are to be interpreted in a generic and descriptive sense only and not for purpose of limitation. Accordingly, it will be understood by those of ordinary skill in the art that various changes in form and details may be made without departing from the scope of example embodiments as set forth in the following claims.

Claims

1. An organic light emitting diode, OLED, display, comprising:

a plurality of scan lines and a plurality of data lines;

a data driver (400) coupled to the plurality of data lines;

a plurality of pixels, each pixel being collected to a data line, a current scan line and a previous scan line, each pixel comprising:

an OLED adapted to generate light so as to display images;

a driving switching element (Td) adapted to supply the OLED with a driving current, the driving switching element (Td) having a first electrode coupled to a first power source (ELVDD), a second electrode coupled to a second power source (ELVSS), and a control electrode;

a storage element (Cst) having a first electrode and a second electrode, the first electrode being coupled to the control electrode of the driving switching element (Td) and the second electrode being coupled to the first power source (ELVDD);

a first switching element (Ts1) having a first electrode coupled to the data line, a control electrode coupled to the current scan line, and a second electrode coupled to the first electrode of the driving switching element (Td); and

a second switching element (Ts2) having a control electrode coupled to the current scan line, the second switching element being connected to the driving switching element (Td) in a diode-like state; **characterised in that** the OLED further comprises:

a third switching element (Ts3) having a control electrode coupled to the previous scan line, the third switching element being adapted to initialize a voltage stored in the storage element through the data line; and

a fifth switching element (Ts5) coupled between the first electrode of the driving switching element (Td) and the first power source (ELVDD).

2. An OLED display according to claim 1, wherein the third switching element (Ts3) includes a first electrode coupled to the storage element (Cst) and a second electrode coupled to the data line.

3. An OLED display according to claim 1 or 2, wherein

the second switching element (Ts2) being connected to the driving switching element (Td) in a diode-like state comprises the second switching element (Ts2) being coupled between the control electrode of the driving switching element (Td) and a second electrode of the driving switching element (Td).

4. An OLED display as claimed in any one of claims 1-3, wherein the OLED includes an anode coupled to the second electrode of the driving switching element (Td) and a cathode coupled to the second power source (ELVSS).

5. An OLED display as claimed in claim 4, further comprising:

a fourth switching element (Ts4) coupled between the second electrode of the driving switching element (Td) and the anode of the OLED.

6. An OLED display as claimed in claim 5, wherein the second switching element (Ts2) further comprises a first electrode and a second electrode, the first electrode of the second switching element (Ts2) being coupled between the control electrode of the driving switching element (Td) and the first electrode of the storage element (Cst), and the second electrode of the second switching element (Ts2) being coupled between the second electrode of the driving switching element (Td) and the first electrode of the fourth switching element (Ts4).

7. An OLED display as claimed in claim 5 or 6, wherein the first electrode of the driving switching element (Td) is coupled between the second electrode of the first switching element (Ts1) and a second electrode of the fifth switching element (Ts5), and the second electrode of the driving switching element (Td) is coupled to the second electrode of the second switching element (Ts2).

8. An OLED display as claimed in any one of claims 5 to 7, wherein a control electrode of the fourth switching element (Ts4) is coupled to an emission control line to control an emission time of the OLED.

9. An OLED display as claimed in claim 8, wherein a control electrode of the fifth switching element (Ts5) is coupled to the control electrode of the fourth switching element (Ts4).

10. An OLED display as claimed in any one of claims 1 to 9, wherein the voltage stored in the storage element (Cst) is initialized by turning on the third switching element (Ts3), and a data signal generated by the data driver (400) and supplied via the data line is stored in the storage element (Cst) by turning on the first switching elements (Ts1) and the second

switching element (Ts2).

11. An OLED display as claimed in claim 10, further comprising:

a data output line coupled between the data line and the data driver (400); and
a demultiplexer (510) coupled between the plurality of data lines of the OLED display and the data output line,
wherein the demultiplexer (510) includes an input port coupled to the data output line and at least two output ports coupled to the plurality of data lines.

12. An OLED display as claimed in claim 11, wherein the demultiplexer (510) includes at least two data supplying switching elements having a first electrode coupled to the input port and a second electrode coupled to the at least two output ports respectively.

13. An OLED display as claimed in claim 12, wherein the data signal is adapted to be stored in the storage element (Cst) when the data supplying switching elements are turned on, and when the data signal generated by the data driver is an initial data signal, the data line is initialized.

14. An OLED display as claimed in claim 13, wherein the driving switching element (Td) is configured in a diode-like state when the second switching element (Ts2) and the data supplying switching elements are turned on.

15. An OLED display as claimed in claim 14, wherein the initial data signal has a lower voltage than a threshold voltage of the driving switching element (Td).

16. An OLED display as claimed in any one of claims 1 to 15, wherein:

the plurality of pixels are formed at an area where the plurality of scan lines, the plurality of data lines and a plurality of emission control lines intersect;
a scan driver (300) being coupled to the plurality of scan lines;
an emission control driver (600) being coupled to the plurality of emission control lines; and
a demultiplexer driver coupled between the plurality of data lines and the data driver,
wherein each pixel is initialized by the voltage of one of the plurality of data lines.

17. An OLED display as claimed in claim 16, wherein the demultiplexer driver further comprising:

an input port coupled to a plurality of data output lines; and
a plurality of demultiplexers having at least two output ports coupled to at least two data lines.

18. An OLED display as claimed in claim 17, wherein the demultiplexer driver includes a same number of demultiplexers as a number of data output lines.

19. An OLED display as claimed in claim 17 or 18, wherein the data supplying switching elements are adapted to be turned on in sequence after the first switching element and the second switching element are turned on.

Patentansprüche

1. Organische lichtemittierende Diodenanzeige, OLED, Folgendes umfassend:

eine Vielzahl von Scanleitungen und eine Vielzahl von Datenleitungen;
einen Datentreiber (400), der an die Vielzahl von Datenleitungen gekoppelt ist;
eine Vielzahl von Pixeln, wobei jedes Pixel an eine Datenleitung, eine gegenwärtige Scanleitung und eine vorherige Scanleitung angeschlossen ist, wobei jedes Pixel Folgendes umfasst:

eine OLED, zum Erzeugen von Licht angepasst, um Bilder anzuzeigen;
ein Treiberschaltelement (Td), dazu angepasst, die OLED mit einem Treiberstrom zu versorgen, wobei das Treiberschaltelement (Td) eine erste Elektrode hat, die an eine erste Leistungsquelle (ELVDD) gekoppelt ist, eine zweite Elektrode hat, die an eine zweite Leistungsquelle (ELVSS) gekoppelt ist, und eine Steuerelektrode hat;
ein Speicherelement (Cst) mit einer ersten Elektrode und einer zweiten Elektrode, wobei die erste Elektrode an die Steuerelektrode des Treiberschaltelements (Td) gekoppelt ist und die zweite Elektrode an die erste Leistungsquelle (ELVDD) gekoppelt ist;
ein erstes Schaltelement (Ts1) mit einer ersten Elektrode, die an die Datenleitung gekoppelt ist, einer Steuerelektrode, die an die gegenwärtige Scanleitung gekoppelt ist, und eine zweite Elektrode, die an die erste Elektrode des Treiberschaltelements (Td) gekoppelt ist; und
ein zweites Schaltelement (Ts2) mit einer Steuerelektrode, die an die gegenwärtige Scanleitung gekoppelt ist, wobei das zweite

Schaltelement an das Treiberschaltelement (Td) in einem diodenartigen Zustand angeschlossen ist; **dadurch gekennzeichnet, dass** die OLED außerdem umfasst:

ein drittes Schaltelement (Ts3) mit einer Steuerelektrode, die an die vorherige Scanleitung gekoppelt ist, wobei das dritte Schaltelement dazu angepasst ist, eine im Speicherelement gespeicherte Spannung durch die Datenleitung zu initialisieren; und ein fünftes Schaltelement (Ts5), das zwischen die erste Elektrode des Treiberschaltelements (Td) und die erste Leistungsquelle (ELVDD) gekoppelt ist.

2. OLED-Anzeige nach Anspruch 1, worin das dritte Schaltelement (Ts3) eine erste Elektrode enthält, die an das Speicherelement (Cst) gekoppelt ist, und eine zweite Elektrode, die an die Datenleitung gekoppelt ist.
3. OLED-Anzeige nach Anspruch 1 oder 2, worin das zweite Schaltelement (Ts2), das an das Treiberschaltelement (Td) in einem diodenartigen Zustand angeschlossen ist, das zweite Schaltelement (Ts2) umfasst, das zwischen die Steuerelektrode des Treiberschaltelements (Td) und eine zweite Elektrode des Treiberschaltelements (Td) gekoppelt ist.
4. OLED-Anzeige nach einem der Ansprüche 1-3, worin die OLED eine Anode enthält, die an die zweite Elektrode des Treiberschaltelements (Td) gekoppelt ist, und eine Kathode, die an die zweite Leistungsquelle (ELVSS) gekoppelt ist.
5. OLED-Anzeige nach Anspruch 4, außerdem umfassend:

ein viertes Schaltelement (Ts4), das zwischen die zweite Elektrode des Treiberschaltelements (Td) und die Anode der OLED gekoppelt ist.
6. OLED-Anzeige nach Anspruch 5, worin das zweite Schaltelement (Ts2) außerdem eine erste Elektrode und eine zweite Elektrode umfasst, wobei die erste Elektrode des zweiten Schaltelements (Ts2) zwischen die Steuerelektrode des Treiberschaltelements (Td) und die erste Elektrode des Speicherelements (Cst) gekoppelt ist und die zweite Elektrode des zweiten Schaltelements (Ts2) zwischen die zweite Elektrode des Treiberschaltelements (Td) und die erste Elektrode des vierten Schaltelements (Ts4) gekoppelt ist.
7. OLED-Anzeige nach Anspruch 5 oder 6, worin die

erste Elektrode des Treiberschaltelements (Td) zwischen die zweite Elektrode des ersten Schaltelements (Ts1) und eine zweite Elektrode des fünften Schaltelements (Ts5) gekoppelt ist und die zweite Elektrode des Treiberschaltelements (Td) an die zweite Elektrode des zweiten Schaltelements (Ts2) gekoppelt ist.

8. OLED-Anzeige nach einem der Ansprüche 5 bis 7, worin eine Steuerelektrode des vierten Schaltelements (Ts4) an eine Emissionssteuerleitung gekoppelt ist, um eine Emissionszeit der OLED zu steuern.
9. OLED-Anzeige nach Anspruch 8, worin eine Steuerelektrode des fünften Schaltelements (Ts5) an die Steuerelektrode des vierten Schaltelements (Ts4) gekoppelt ist.
10. OLED-Anzeige nach einem der Ansprüche 1 bis 9, worin die im Speicherelement (Cst) gespeicherte Spannung durch Einschalten des dritten Schaltelements (Ts3) initialisiert wird und ein Datensignal, das vom Datentreiber (400) erzeugt wird und über die Datenleitung angelegt wird, im Speicherelement (Cst) durch Einschalten des ersten Schaltelements (Ts1) und des zweiten Schaltelements (Ts2) gespeichert wird.
11. OLED-Anzeige nach Anspruch 10, außerdem umfassend:

eine Datenausgangsleitung, die zwischen die Datenleitung und den Datentreiber (400) gekoppelt ist; und

einen Demultiplexer (510), der zwischen die Vielzahl von Datenleitungen der OLED-Anzeige und die Datenausgangsleitung gekoppelt ist, worin der Demultiplexer (510) einen Eingangsport enthält, der an die Datenausgangsleitung und mindestens zwei Ausgangsports gekoppelt ist, die an die Vielzahl von Datenleitungen gekoppelt sind.
12. OLED-Anzeige nach Anspruch 11, worin der Demultiplexer (510) mindestens zwei Daten bereitstellende Schaltelemente mit einer ersten Elektrode enthält, die an den Eingangsport gekoppelt ist, und einer zweiten Elektrode, die jeweils an die mindestens zwei Ausgangsports gekoppelt ist.
13. OLED-Anzeige nach Anspruch 12, worin das Datensignal dazu angepasst ist, im Speicherelement (Cst) gespeichert zu werden, wenn die Daten bereitstellenden Schaltelemente eingeschaltet werden, und wenn das vom Datentreiber erzeugte Signal ein anfängliches Datensignal ist, die Datenleitung initialisiert wird.

14. OLED-Anzeige nach Anspruch 13, worin das Treiberschaltelement (Td) in einem diodenartigen Zustand konfiguriert ist, wenn das zweite Schaltelement (Ts2) und die Daten bereitstellenden Schaltelemente eingeschaltet sind. 5
15. OLED-Anzeige nach Anspruch 14, worin das anfängliche Datensignal eine niedrigere Spannung hat als eine Schwellenspannung des Treiberschaltelements (Td). 10
16. OLED-Anzeige nach einem der Ansprüche 1 bis 15, worin:
- die Vielzahl von Pixeln an einem Bereich geformt werden, wo sich die Vielzahl von Scanleitungen, die Vielzahl von Datenleitungen und eine Vielzahl von Emissionssteuerleitungen schneiden; 15
 - ein Scantreiber (300) an die Vielzahl von Scanleitungen gekoppelt ist; 20
 - ein Emissionssteuertreiber (600) an die Vielzahl von Emissionssteuerleitungen gekoppelt ist; und
 - ein Demultiplexer-Treiber zwischen die Vielzahl von Datenleitungen und den Datentreiber gekoppelt ist, 25
 - worin jedes Pixel durch die Spannung von einer der Vielzahl von Datenleitungen initialisiert wird. 30
17. OLED-Anzeige nach Anspruch 16, worin der Demultiplexertreiber außerdem umfasst:
- einen Eingangsport, der an eine Vielzahl von Datenausgangsleitungen gekoppelt ist; und 35
 - eine Vielzahl von Demultiplexern mit mindestens zwei Ausgangsports, die an mindestens zwei Datenleitungen gekoppelt sind.
18. OLED-Anzeige nach Anspruch 17, worin der Demultiplexertreiber eine gleiche Anzahl von Demultiplexern enthält wie eine Anzahl von Datenausgangsleitungen. 40
19. OLED-Anzeige nach Anspruch 17 oder 18, worin die Daten bereitstellenden Schaltelemente dazu angepasst sind, sequenziell eingeschaltet zu werden, sobald das erste Schaltelement und das zweite Schaltelement eingeschaltet sind. 45

Revendications

1. Afficheur à diodes électroluminescentes organiques, OLED, comprenant : 55
- une pluralité de lignes de balayage et une pluralité de lignes de données ;

un dispositif de commande de données (400) couplé à la pluralité de lignes de données ;
une pluralité de pixels, chaque pixel étant connecté à une ligne de données, à une ligne de balayage actuelle et à une ligne de balayage précédente, chaque pixel comprenant :

une OLED conçue pour générer une lumière de manière à afficher des images ;
un élément de commutation de commande (Td) conçu pour délivrer à l'OLED un courant de commande, l'élément de commutation de commande (Td) comportant une première électrode couplée à une première source de puissance (ELVDD), une deuxième électrode couplée à une deuxième source de puissance (ELVSS), et une électrode de commande ;
un élément de stockage (Cst) comportant une première électrode et une deuxième électrode, la première électrode étant couplée à l'électrode de commande de l'élément de commutation de commande (Td) et la deuxième électrode étant couplée à la première source de puissance (ELVDD) ;
un premier élément de commutation (Ts1) comportant une première électrode couplée à la ligne de données, une électrode de commande couplée à la ligne de balayage actuelle, et une deuxième électrode couplée à la première électrode de l'élément de commutation de commande (Td) ; et
un deuxième élément de commutation (Ts2) comportant une électrode de commande couplée à la ligne de balayage actuelle, le deuxième élément de commutation étant connecté à l'élément de commutation de commande (Td) dans un état similaire à celui d'une diode ; **caractérisé en ce que** l'OLED comprend en outre:

un troisième élément de commutation (Ts3) comportant une électrode de commande couplée à la ligne de balayage précédente, le troisième élément de commutation étant conçu pour initialiser une tension stockée dans l'élément de stockage par l'intermédiaire de la ligne de données ; et
un cinquième élément de commutation (Ts5) couplé entre la première électrode de l'élément de commutation de commande (Td) et la première source de puissance (ELVDD).

2. Afficheur à OLED selon la revendication 1, dans lequel le troisième élément de commutation (Ts3) comprend une première électrode couplée à l'élé-

ment de stockage (Cst) et une deuxième électrode couplée à la ligne de données.

3. Afficheur à OLED selon la revendication 1 ou 2, dans lequel le deuxième élément de commutation (Ts2) qui est connecté à l'élément de commutation de commande (Td) dans un état similaire à celui d'une diode comprend le deuxième élément de commutation (Ts2) qui est couplé entre l'électrode de commande de l'élément de commutation de commande (Td) et une deuxième électrode de l'élément de commutation de commande (Td). 5
4. Afficheur à OLED selon l'une quelconque des revendications 1 à 3, dans lequel l'OLED comprend une anode couplée à la deuxième électrode de l'élément de commutation de commande (Td) et une cathode couplée à la deuxième source de puissance (EL-VSS). 10
5. Afficheur à OLED selon la revendication 4, comprenant en outre : 15
 - un quatrième élément de commutation (Ts4) couplé entre la deuxième électrode de l'élément de commutation de commande (Td) et l'anode de l'OLEA. 20
6. Afficheur à OLED selon la revendication 5, dans lequel le deuxième élément de commutation (Ts2) comprend en outre une première électrode et une deuxième électrode, la première électrode du deuxième élément de commutation (Ts2) étant couplée entre l'électrode de commande de l'élément de commutation de commande (Td) et la première électrode de l'élément de stockage (Cst), et la deuxième électrode du deuxième élément de commutation (Ts2) étant couplée entre la deuxième électrode de l'élément de commutation de commande (Td) et la première électrode du quatrième élément de commutation (Ts4). 25
7. Afficheur à OLED selon la revendication 5 ou 6, dans lequel la première électrode de l'élément de commutation de commande (Td) est couplée entre la deuxième électrode du premier élément de commutation (Ts1) et une deuxième électrode du cinquième élément de commutation (Ts5), et la deuxième électrode de l'élément de commutation de commande (Td) est couplée à la deuxième électrode du deuxième élément de commutation (Ts2). 30
8. Afficheur à OLED selon l'une quelconque des revendications 5 à 7, dans lequel une électrode de commande du quatrième élément de commutation (Ts4) est couplée à une ligne de commande d'émission pour commander un temps d'émission de l'OLED. 35

9. Afficheur à OLED selon la revendication 8, dans lequel une électrode de commande du cinquième élément de commutation (Ts5) est couplée à l'électrode de commande du quatrième élément de commutation (Ts4). 40
10. Afficheur à OLED selon l'une quelconque des revendications 1 à 9, dans lequel la tension stockée dans l'élément de stockage (Cst) est initialisée en activant le troisième élément de commutation (Ts3), et un signal de données généré par le dispositif de commande de données (400) et délivré par l'intermédiaire de la ligne de données est stocké dans l'élément de stockage (Cst) en activant le premier élément de commutation (Ts1) et le deuxième élément de commutation (Ts2). 45
11. Afficheur à OLED selon la revendication 10, comprenant en outre :
 - une ligne de sortie de données couplée entre la ligne de données et le dispositif de commande de données (400) ; et
 - un démultiplexeur (510) couplé entre la pluralité de lignes de données de l'afficheur à OLED et la ligne de sortie de données, dans lequel le démultiplexeur (510) comprend un port d'entrée couplé à la ligne de sortie de données et au moins deux ports de sortie couplés à la pluralité de lignes de données. 50
12. Afficheur à OLED selon la revendication 11, dans lequel le démultiplexeur (510) comprend au moins deux éléments de commutation de fourniture de données comportant une première électrode couplée au port d'entrée et une deuxième électrode couplée au moins aux deux ports de sortie, respectivement. 55
13. Afficheur à OLED selon la revendication 12, dans lequel le signal de données est conçu pour être stocké dans l'élément de stockage (Cst) lorsque les éléments de commutation de fourniture de données sont activés, et lorsque le signal de données généré par le dispositif de commande de données est un signal de données initial, la ligne de données est initialisée.
14. Afficheur à OLED selon la revendication 13, dans lequel l'élément de commutation de commande (Td) est configuré dans un état similaire à celui d'une diode lorsque le deuxième élément de commutation (Ts2) et les éléments de commutation de fourniture de données sont activés.
15. Afficheur à OLED selon la revendication 14, dans lequel le signal de données initial a une tension inférieure à une tension de seuil de l'élément de commutation de commande (Td).

16. Afficheur à OLED selon l'une quelconque des revendications 1 à 15, dans lequel :

la pluralité de pixels sont formés dans une zone
 dans laquelle la pluralité de lignes de balayage, 5
 la pluralité de lignes de données et une pluralité
 de lignes de commande d'émission se croisent ;
 un dispositif de commande de balayage (300)
 étant couplé à la pluralité de lignes de balayage ;
 un dispositif de commande de contrôle d'émission 10
 (600) étant couplé à la pluralité de lignes
 de commande d'émission ; et
 un dispositif de commande de démultiplexeur
 étant couplé entre la pluralité de lignes de don- 15
 nées et le dispositif de commande de données,
 dans lequel chaque pixel est initialisé par la ten-
 sion de l'une de la pluralité de lignes de données.

17. Afficheur à OLED selon la revendication 16, dans lequel le dispositif de commande de démultiplexeur 20 comprend en outre :

un port d'entrée couplé à une pluralité de lignes
 de sortie de données ; et
 une pluralité de démultiplexeurs comportant au 25
 moins deux ports de sortie couplés à au moins
 deux lignes de données.

18. Afficheur à OLED selon la revendication 17, dans lequel le dispositif de commande de démultiplexeur 30 comprend un nombre de démultiplexeurs identique à un nombre de lignes de sortie de données.

19. Afficheur à OLED selon la revendication 17 ou 18, dans lequel les éléments de commutation de fourniture de données sont conçus pour être activés en 35 séquence après que le premier élément de commutation et le deuxième élément de commutation ont été activés.

40

45

50

55

FIG. 1

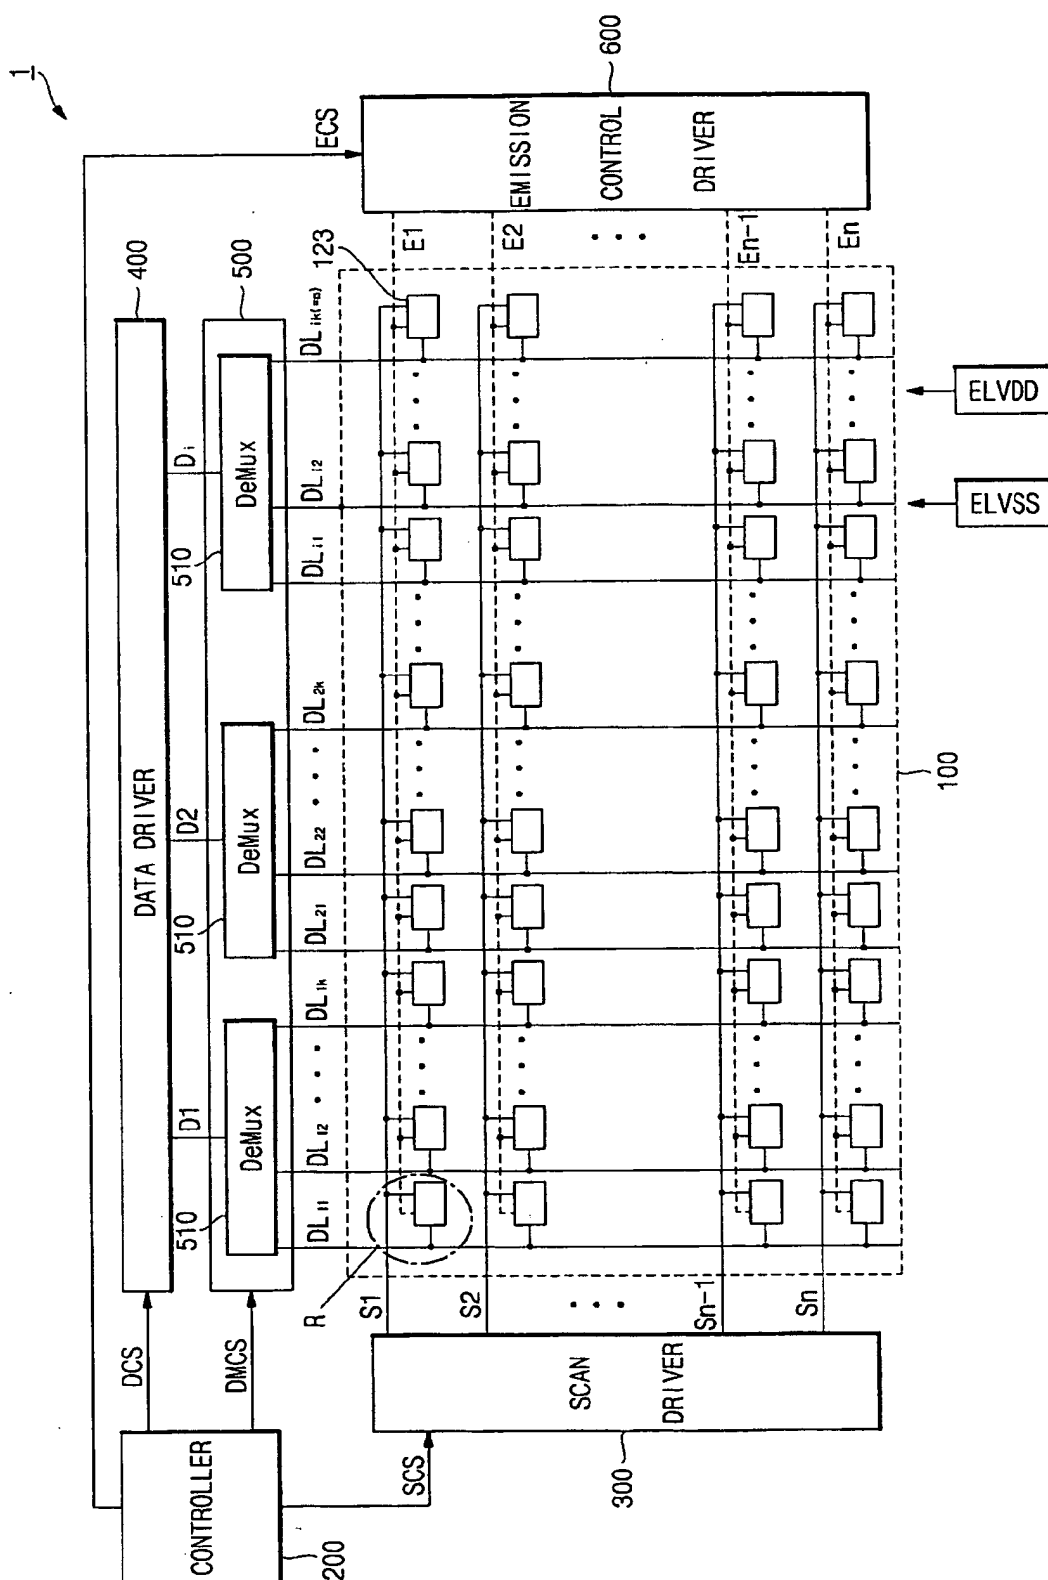


FIG.2

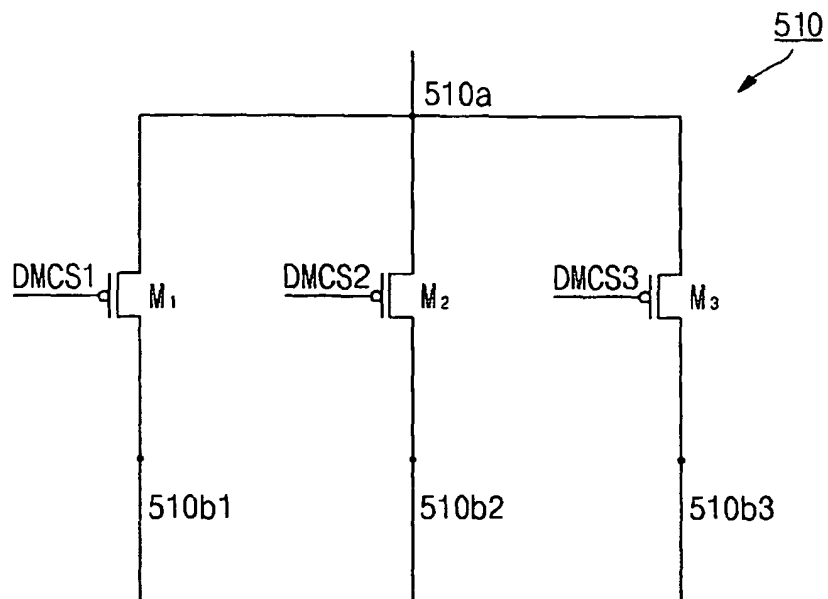


FIG.3

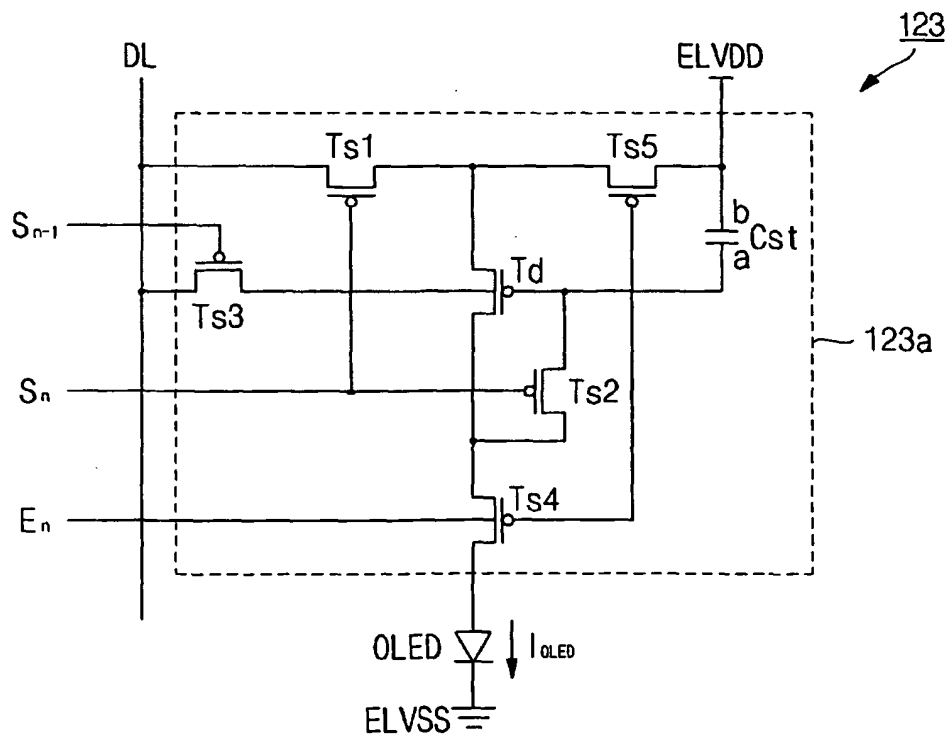


FIG. 4


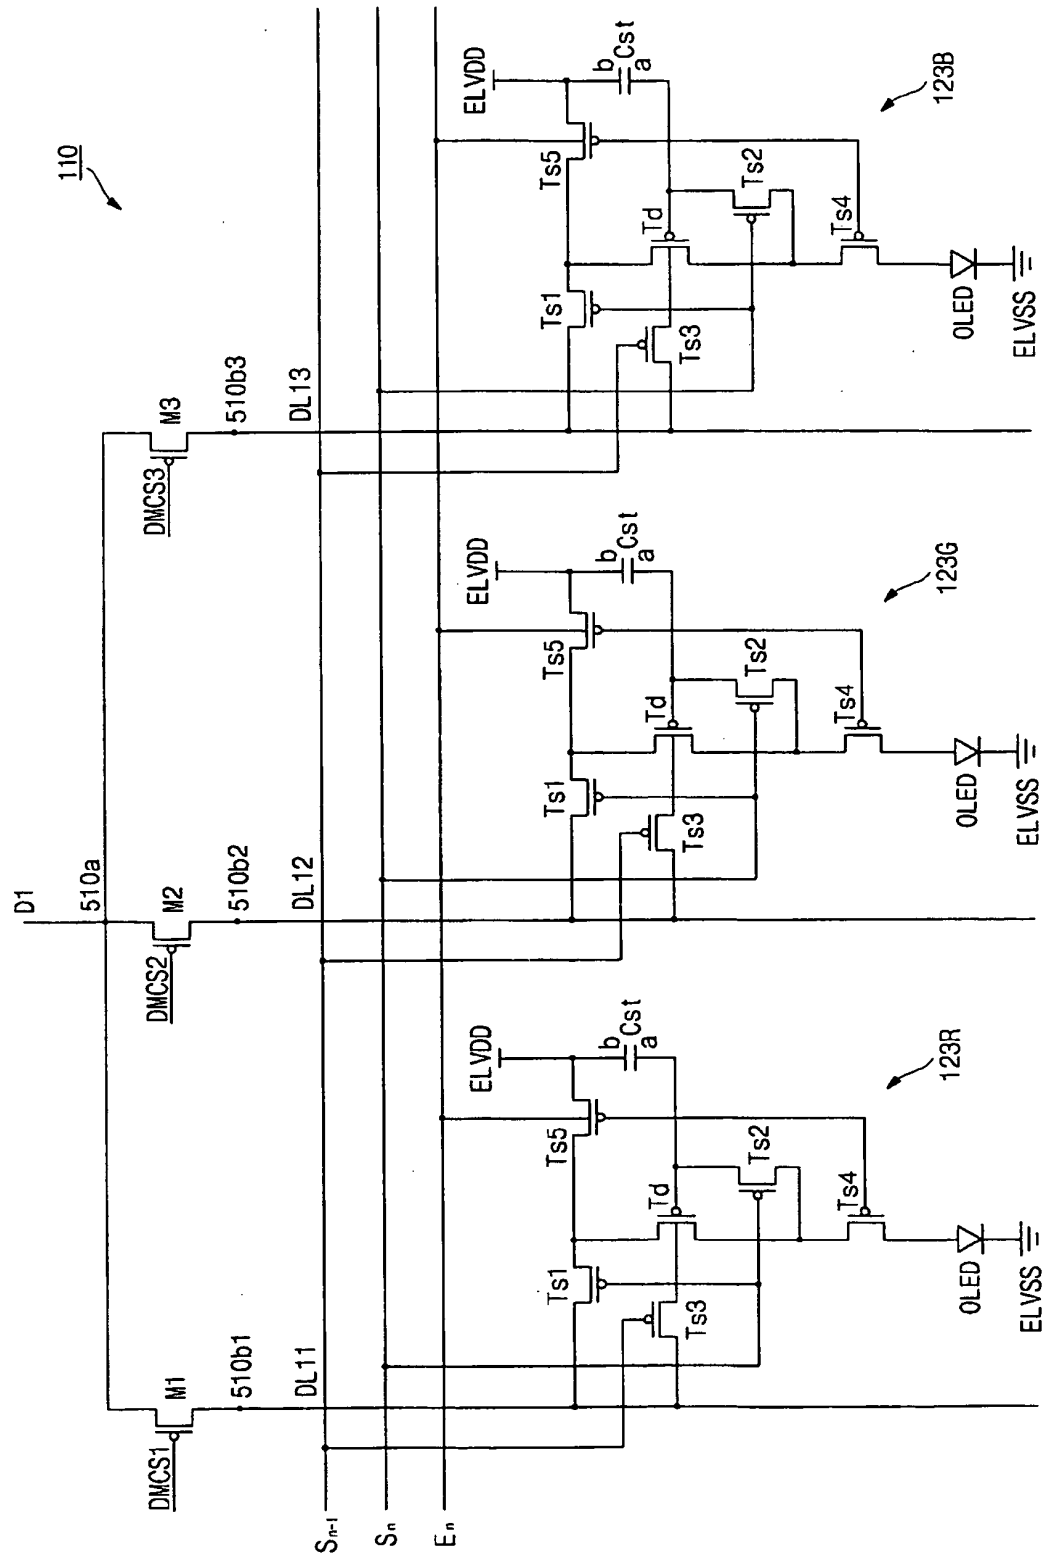


FIG.5

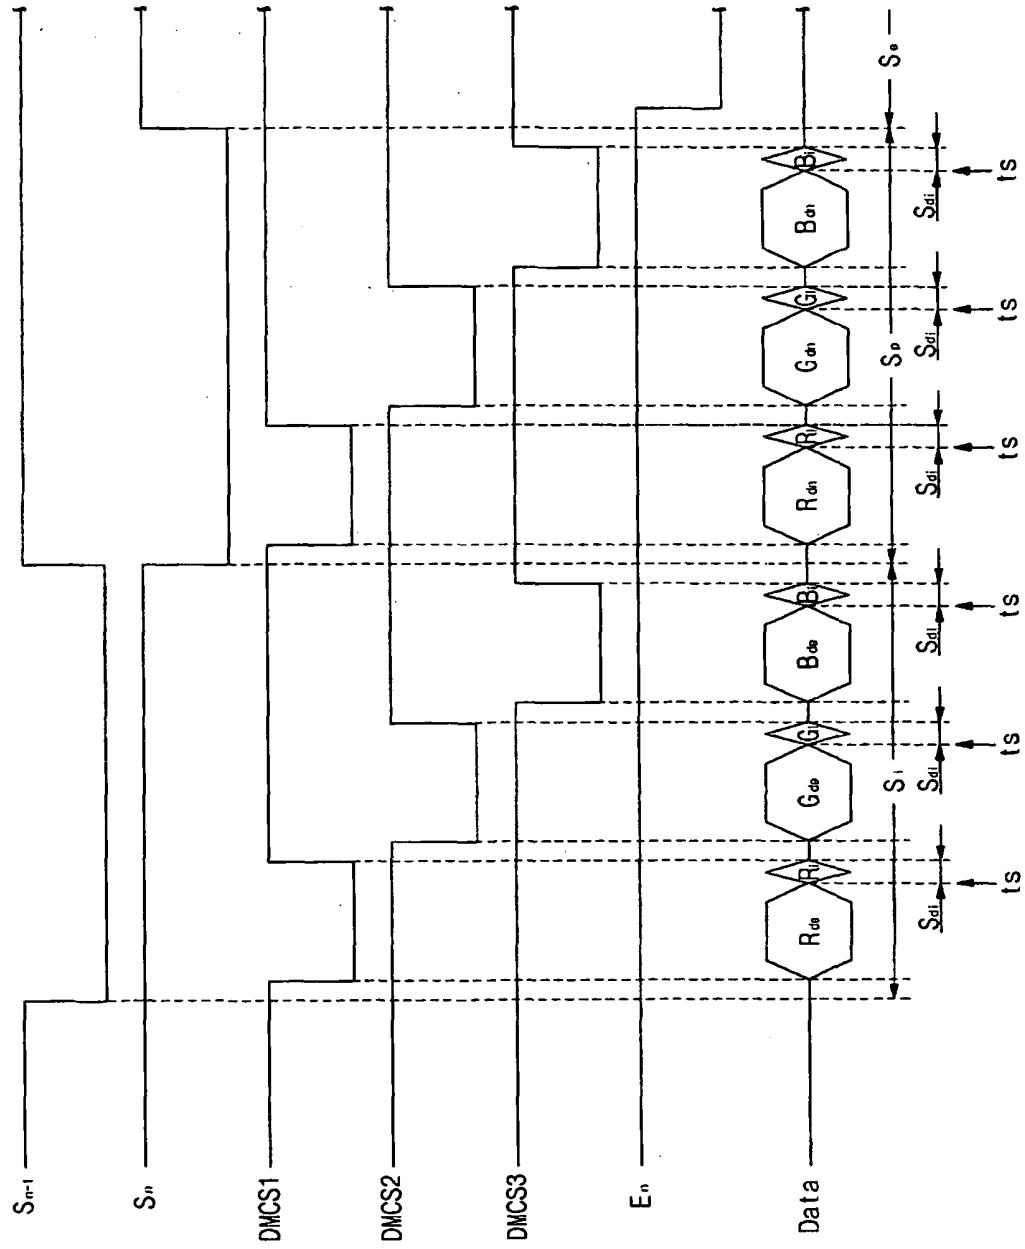

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1635324 A [0007]
- EP 1847982 A [0008]

专利名称(译)	有机发光二极管显示器		
公开(公告)号	EP1936597B1	公开(公告)日	2012-04-25
申请号	EP2007254970	申请日	2007-12-20
[标]申请(专利权)人(译)	三星斯笛爱股份有限公司		
申请(专利权)人(译)	三星SDI CO. , LTD.		
当前申请(专利权)人(译)	三星移动显示器有限公司.		
[标]发明人	CHOI SANG MOO C O SAMSUNG SDI CO LTD		
发明人	CHOI, SANG-MOO C/O SAMSUNG SDI CO., LTD.		
IPC分类号	G09G3/32		
CPC分类号	G09G3/3233 G09G2300/0465 G09G2300/0819 G09G2300/0842 G09G2310/0251 G09G2310/0297 G09G2320/043		
优先权	1020060131182 2006-12-20 KR		
其他公开文献	EP1936597A2 EP1936597A3		
外部链接	Espacenet		

摘要(译)

具有多条扫描线和多条数据线的OLED显示器，适于产生光以发射图像的OLED，耦合到所述多条数据线的数据驱动器，适于向OLED供应OLED的驱动开关元件驱动电流，具有第一电极和第二电极的存储元件，具有第一电极，控制电极和第二电极的第一开关元件，具有连接到所述多个扫描中的至少一个的控制电极的第二开关元件线和第三开关元件具有耦合到先前扫描线的控制电极。第二开关元件可以被配置为连接驱动开关元件的二极管状态。第三开关元件可以适于通过多条数据线中的至少一条初始化存储在存储元件中的电压。

