



US 20090278772A1

(19) **United States**(12) **Patent Application Publication****Lee et al.**(10) **Pub. No.: US 2009/0278772 A1**(43) **Pub. Date: Nov. 12, 2009**(54) **ORGANIC LIGHT EMITTING DISPLAY AND METHOD FOR DRIVING THE SAME****Publication Classification**(51) **Int. Cl.**
G09G 3/30 (2006.01)(52) **U.S. Cl.** **345/76**(57) **ABSTRACT**

An organic light emitting display and a method for driving the same. An organic light emitting display includes: a frame memory having a first portion configured to store a first portion of image signals that is the same in an $n-1^{th}$ frame and an n^{th} frame, and a second portion configured to store a second portion of the image signals that is different in the $n-1^{th}$ frame and the n^{th} frame; a storing unit for storing the first portion of the image signals; a luminance controller for summing the second portion of the image signals and the first portion of the image signals stored in the storing unit to generate a frame data; and a scan driver for supplying light emitting control signals with a controlled pulse width according to a magnitude of the frame data.

(76) Inventors: **Wook Lee, Yongin-city (KR);**
Sung-Cheon Park, Yongin-city
(KR)Correspondence Address:
CHRISTIE, PARKER & HALE, LLP
PO BOX 7068
PASADENA, CA 91109-7068 (US)(21) Appl. No.: **12/463,287**(22) Filed: **May 8, 2009**(30) **Foreign Application Priority Data**

May 9, 2008 (KR) 10-2008-0043175

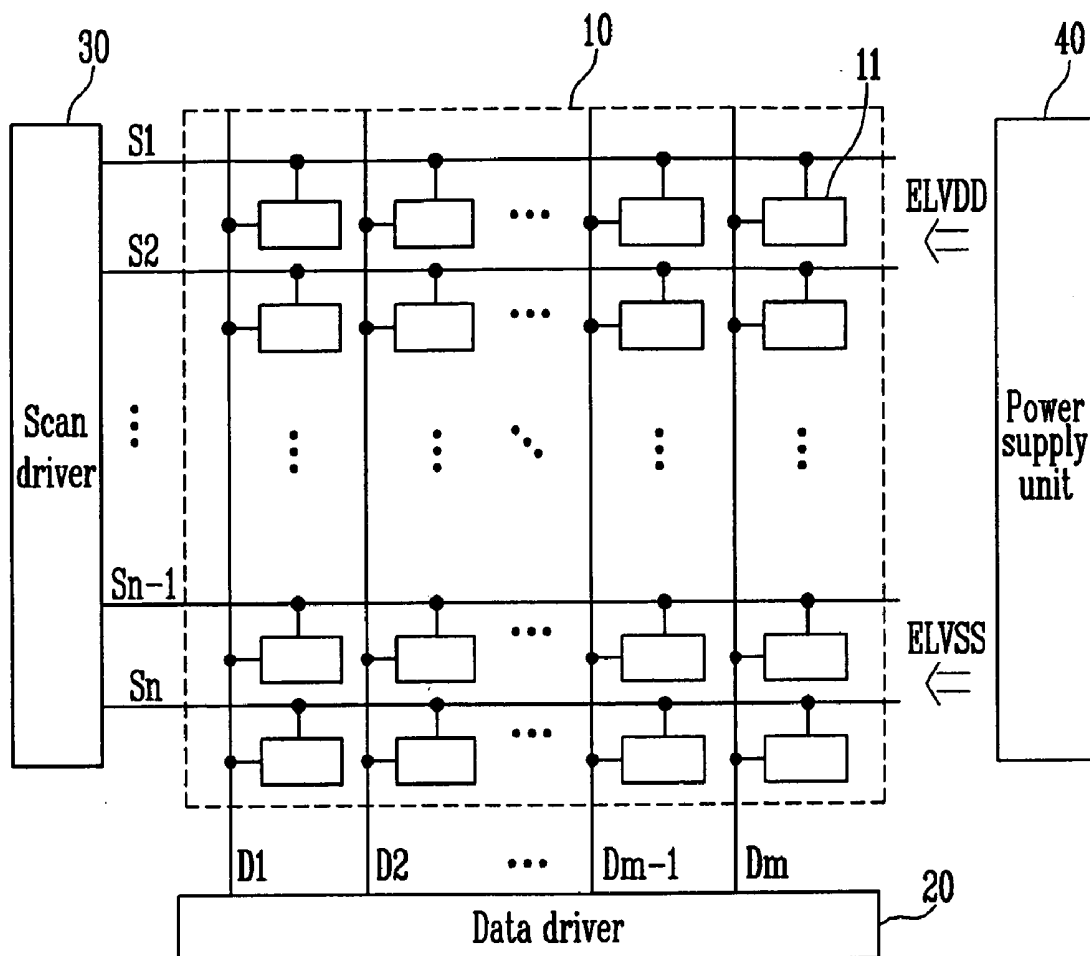


FIG. 1

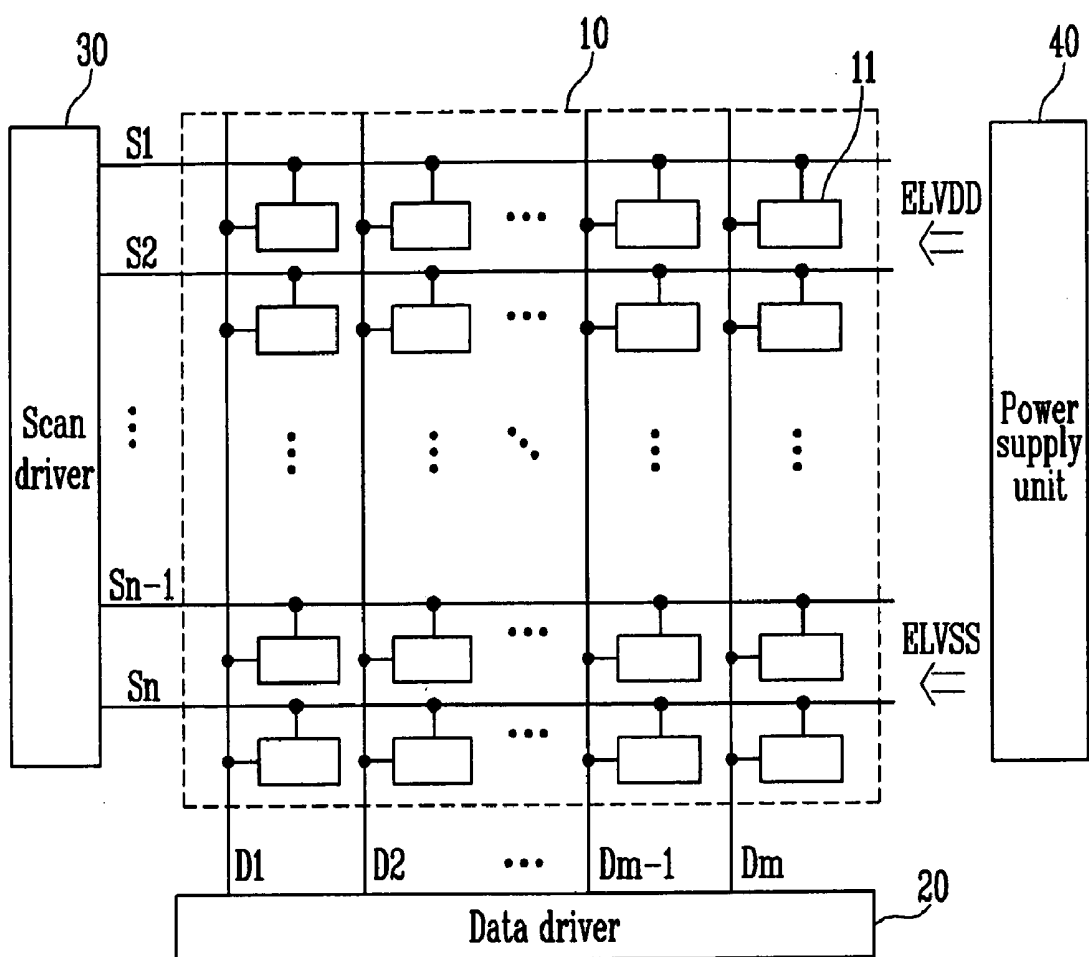


FIG. 2

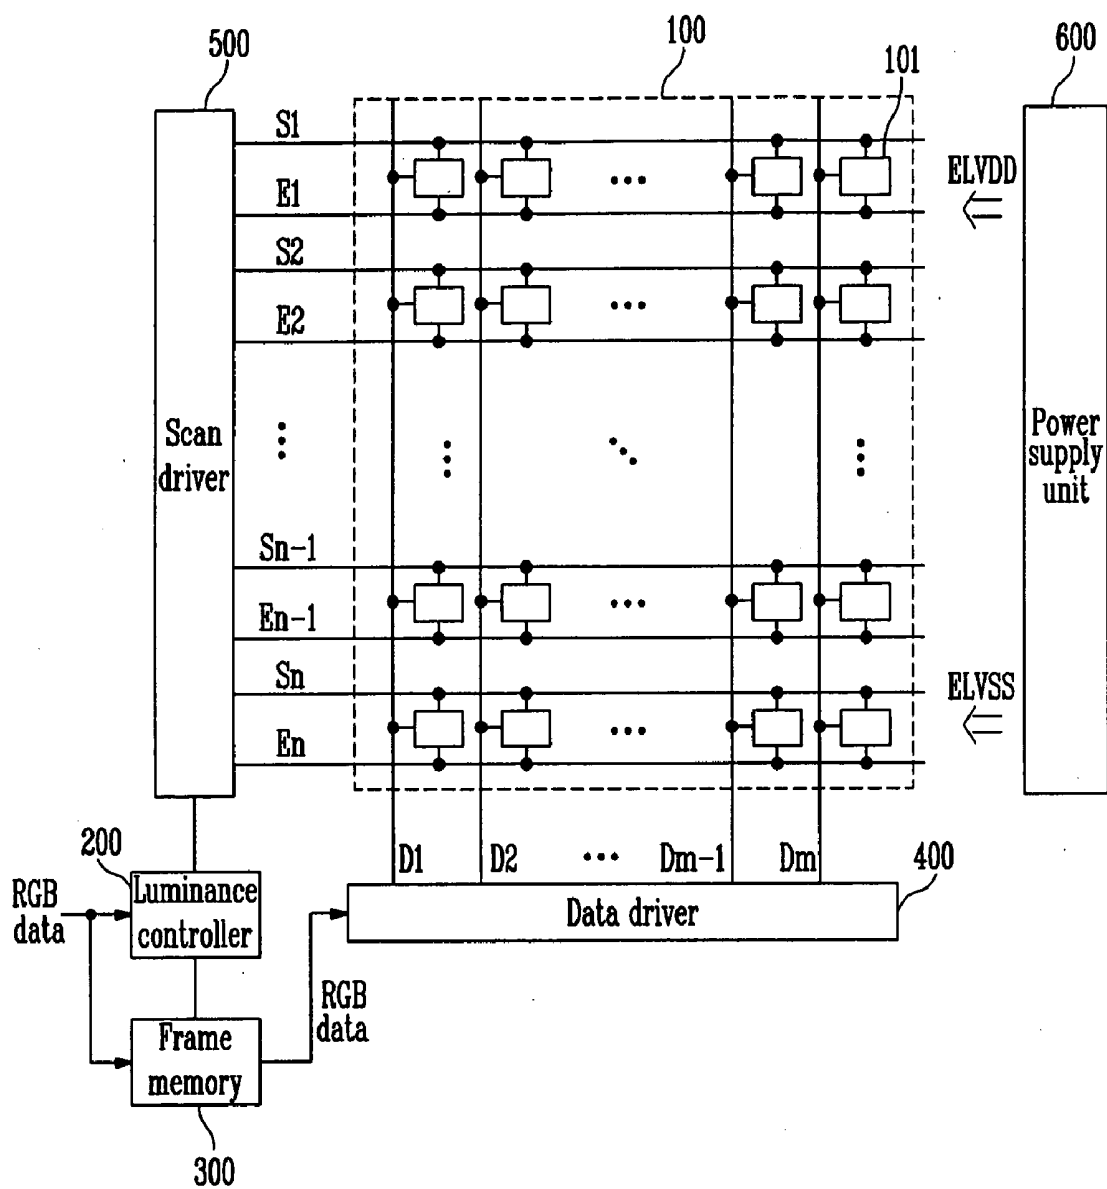


FIG. 3A

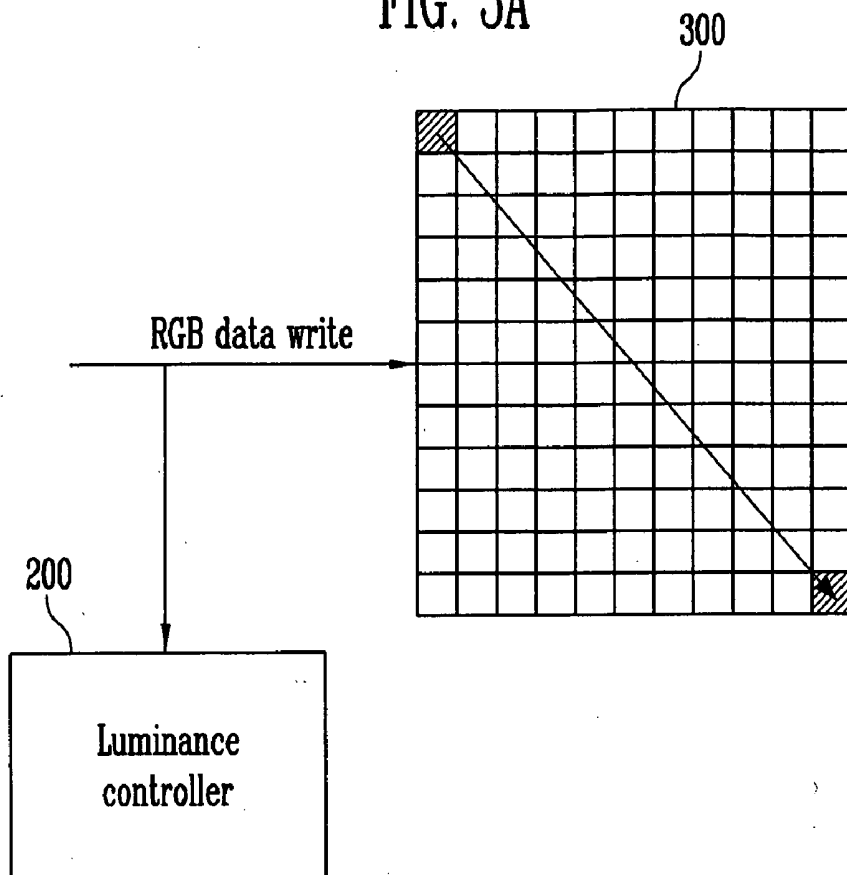


FIG. 3B

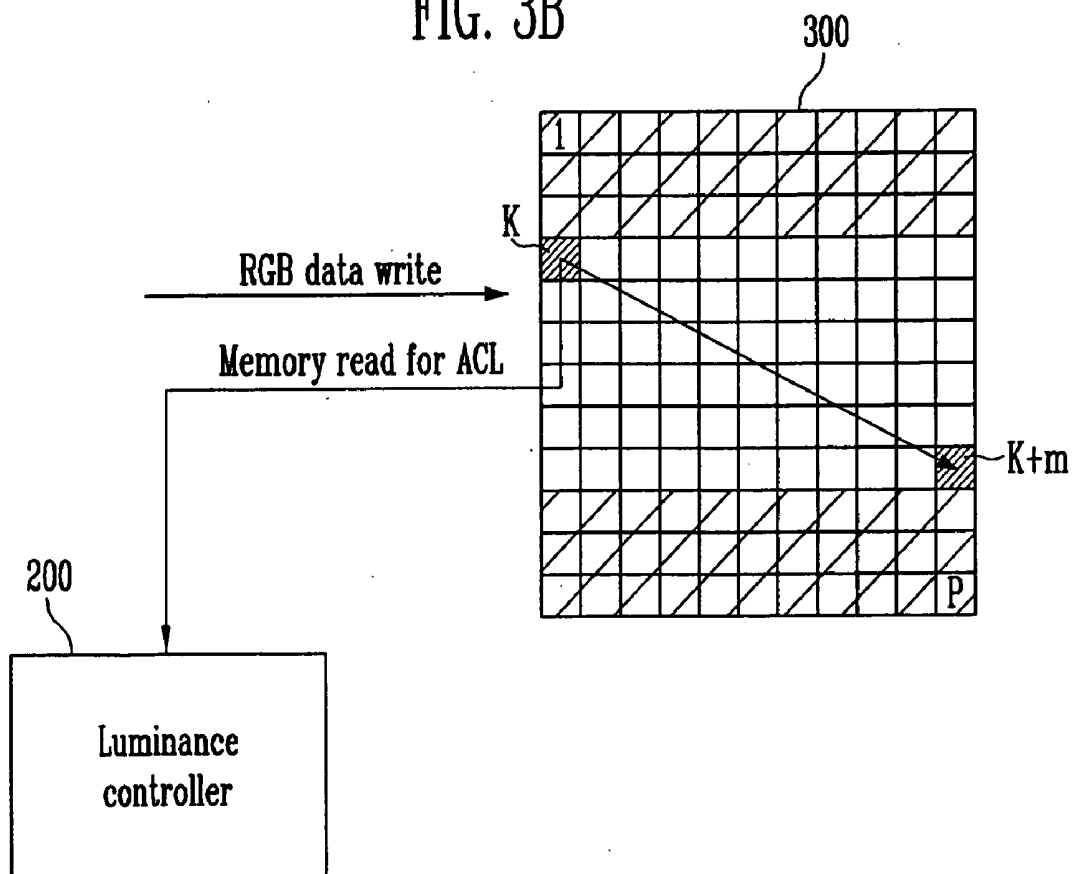


FIG. 3C

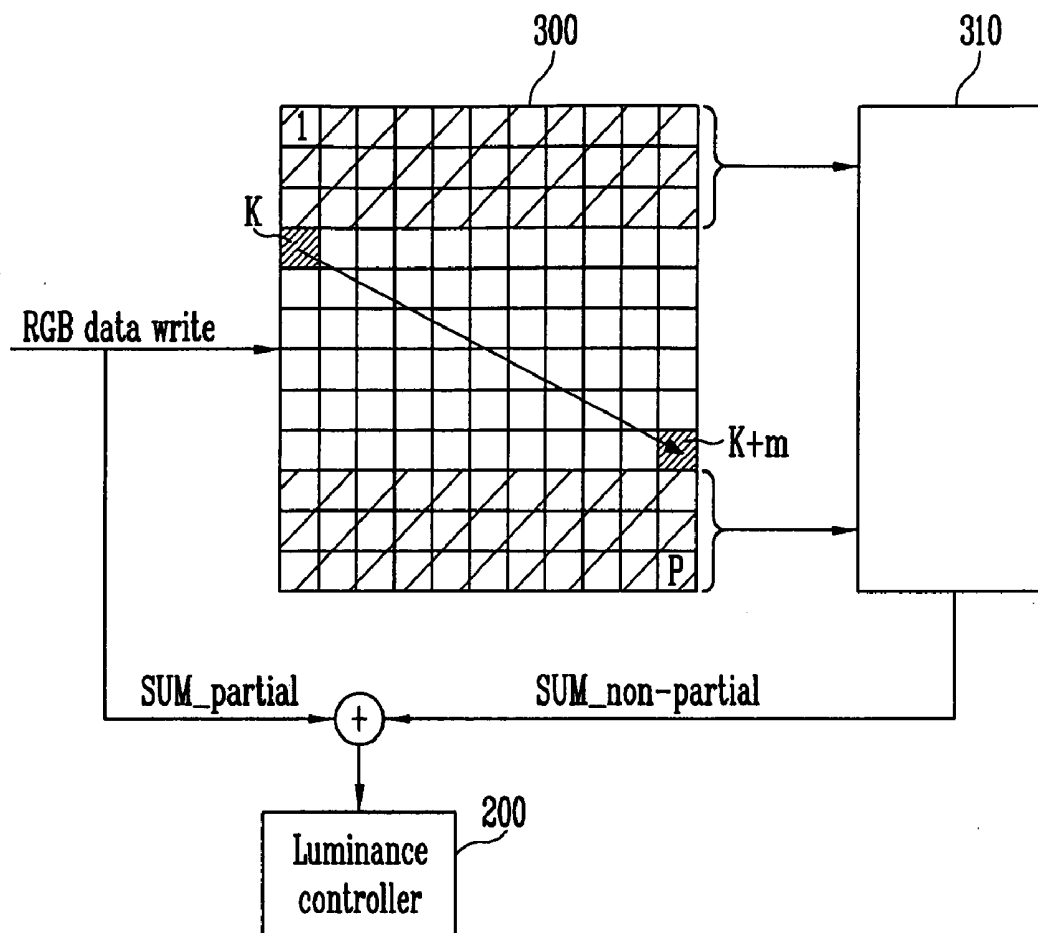


FIG. 4


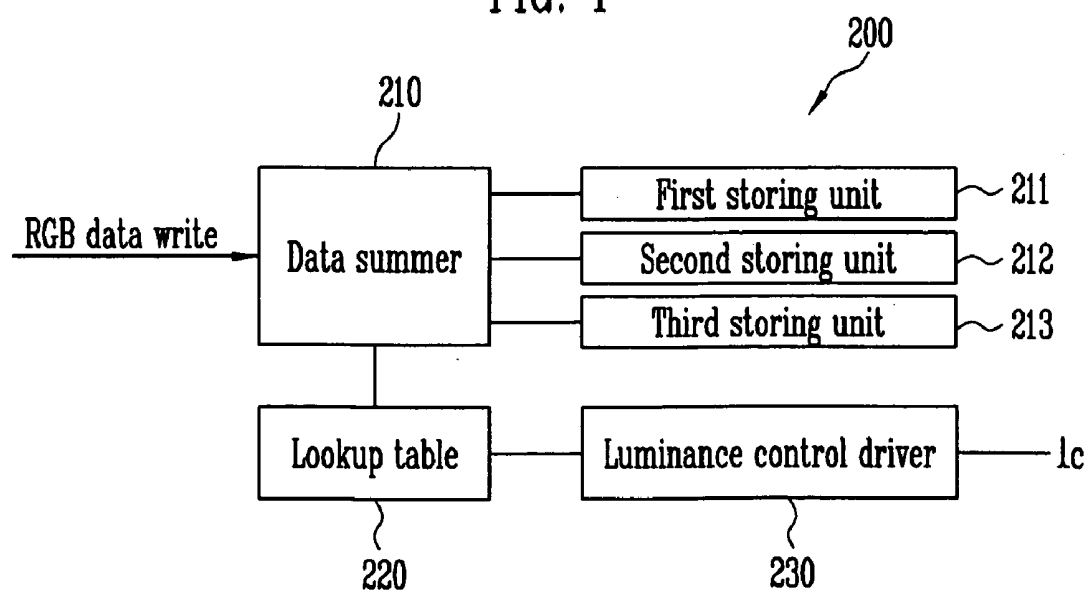


FIG. 5

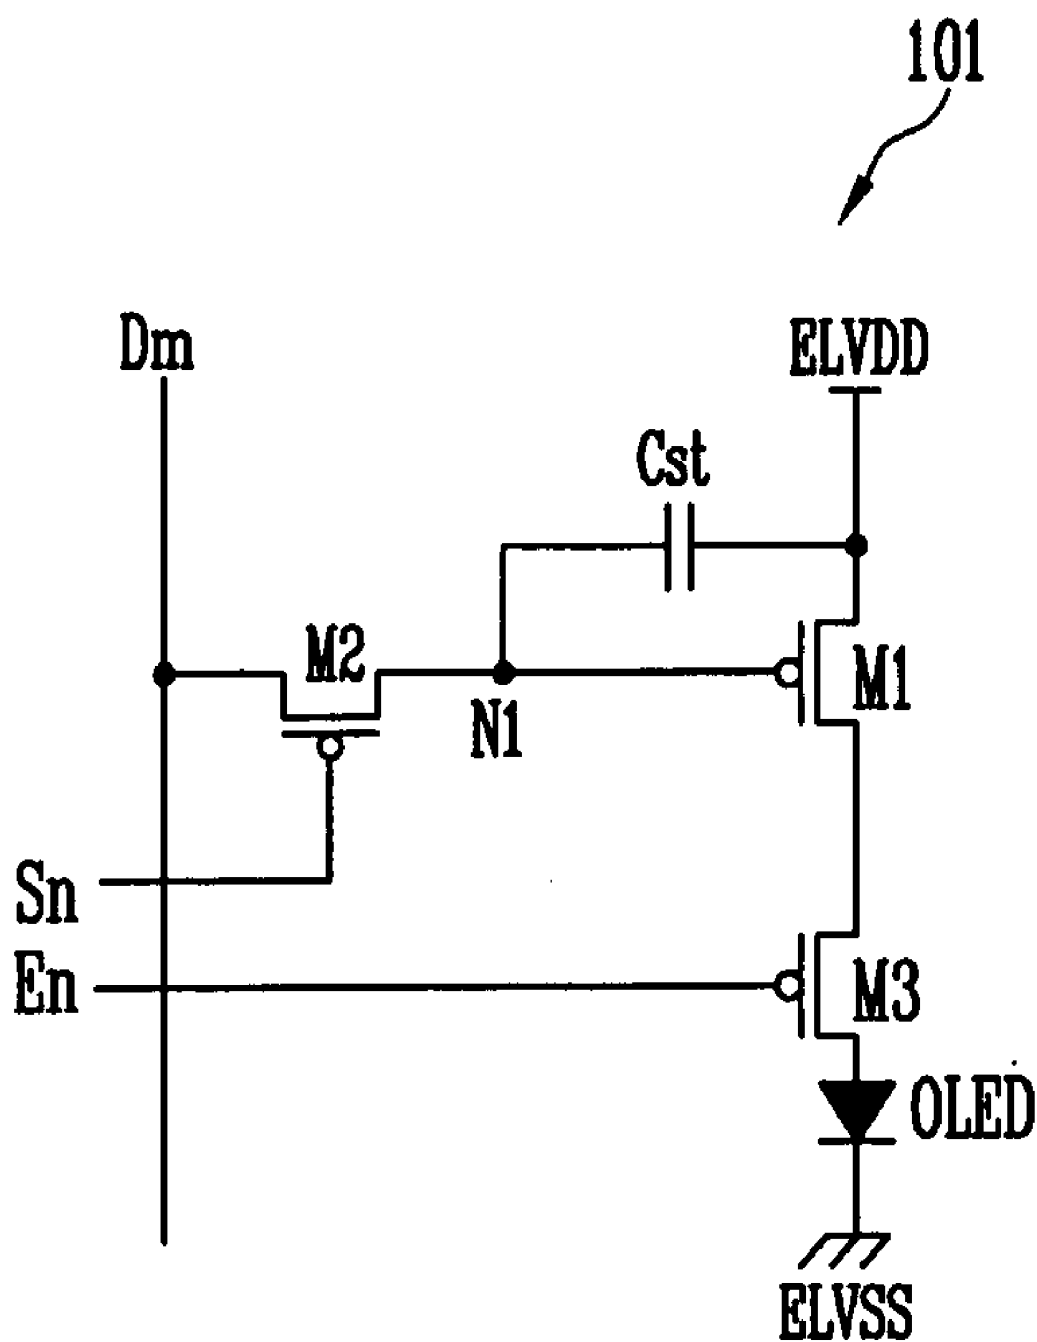

ORGANIC LIGHT EMITTING DISPLAY AND METHOD FOR DRIVING THE SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to and the benefit of Korean Patent Application No. 10-2008-0043175, filed on May 9, 2008, in the Korean Intellectual Property Office, the entire content of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to an organic light emitting display and a method for driving the same.

[0004] 2. Description of Related Art

[0005] Recently, various flat panel display devices with reduced weight and volume in comparison to a cathode ray tube display device have been developed. Among the flat panel display devices, there are a liquid crystal display (LCD), a field emission display (FED), a plasma display panel (PDP), an organic light emitting display, etc.

[0006] An organic light emitting display displays an image by using organic light emitting diodes (OLEDs) to generate light by the recombination of electrons and holes.

[0007] The organic light emitting display as described above has an excellent color reproducibility, a thin thickness, etc. so that its market has been largely expanded to a variety of applications such as applications in a PDA, an MP3 player, a cellular phone, etc.

[0008] An organic light emitting diode, which is included in an organic light emitting display, includes an anode electrode, a cathode electrode and a light emitting layer positioned therebetween. When current flows in a direction from the anode electrode to the cathode electrode, the light emitting layer emits light. Different luminances may be displayed by changing the amount of light emitted by varying the amount of current flowing from the anode electrode to the cathode electrode.

[0009] FIG. 1 is a schematic block diagram showing a conventional organic light emitting display. Referring to FIG. 1, the organic light emitting display includes a display unit 10, a data driver 20, a scan driver 30, and a power supply unit 40. The display unit 10 includes a plurality of pixels 11 each including an organic light emitting diode (not shown). A plurality of n scan lines (S1, S2, . . . Sn-1, and Sn) extend in a row direction for transferring scan signals, a plurality of m data lines (D1, D2, . . . Dm-1, and Dm) extend in a column direction for transferring data signals, a plurality of m first power supply lines (not shown) for transferring a first power ELVDD, and a plurality of m second power supply lines (not shown) for transferring a second power ELVSS that has a lower potential than the first power ELVDD. The display unit 10 displays images by utilizing the organic light emitting diodes to emit light in response to the scan signals, the data signals, the first power ELVDD, and the second power ELVSS.

[0010] The data driver 20 applies the data signals to the display unit 10 through the data lines (D1, D2, . . . Dm-1, and Dm) that are coupled to the display unit 10.

[0011] The scan driver 30 sequentially outputs the scan signals to the scan lines (S1, S2, . . . , Sn-1, and Sn) to transfer the scan signals to a corresponding row of pixels 11 of the display unit 10. The row of pixels 11 of the display unit 10

receiving the scan signal are applied with the data signals from the data driver 20 to display the image, wherein all columns are sequentially selected so that one frame is completed.

[0012] The power supply unit 40 transfers the first power ELVDD and the second power ELVSS that has a lower potential than the first power ELVDD to the display unit 10 to supply a current corresponding to the data signals applied to the pixels 11 according to the voltage difference between the first power ELVDD and the second power ELVSS.

[0013] The organic light emitting display configured as described above allows a large amount of current to flow in the display unit 10 when displaying an image with a high luminance and a small amount of current to flow therein when displaying an image with a low luminance. When the large amount of current flows in the display unit 10 to display the image with a high luminance, a significant load is applied to the power supply unit 40 so that the power supply unit 40 should be capable of a high output current.

SUMMARY OF THE INVENTION

[0014] Embodiments of the present invention provide an organic light emitting display and a method for driving the same capable of reducing power consumption and improving image quality.

[0015] According to an embodiment of the present invention, an organic light emitting display includes: a display unit having a plurality of pixels for displaying images corresponding to image signals in response to a plurality of scan signals, a plurality of light emitting control signals, and a plurality of data signals; a frame memory having a first portion for storing a first portion of the image signals that is the same in an n-1th frame and an nth frame and a second portion for storing a second portion of the image signals that is different between the n-1th frame and the nth frame; a storing unit for storing the first portion of the image signals of the n-1th frame; a luminance controller for summing the second portion of the image signals and the first portion of the image signals stored in the storing unit to generate frame data; a scan driver for supplying the scan signals and the light emitting control signals with a controlled pulse width according to a magnitude of the frame data to the display unit; and a data driver for generating the plurality of data signals by utilizing the image signals stored in the frame memory and supplying the data signals to the display unit.

[0016] According to another embodiment of the present invention, a method is provided for driving an organic light emitting display having a display unit for displaying images corresponding to image signals in response to data signals, scan signals, and light emitting control signals. The method includes: storing a first portion of the image signals that is the same in an n-1th frame and an nth frame; generating first frame data by summing the first portion of the image signals; generating second frame data by summing a second portion of the image signals that is different between the n-1th frame and the nth frame; and controlling pulse widths of the light emitting control signals corresponding to a summed result of the first frame data and the second frame data.

[0017] According to yet another embodiment of the present invention, an organic light emitting display includes: a frame memory having a first portion for storing a first portion of image signals that is the same in an n-1th frame and an nth frame, and a second portion for storing a second portion of the image signals that is different between the n-1th frame and the

n^{th} frame; a storing unit for storing the first portion of the image signals; a luminance controller for summing the second portion of the image signals and the first portion of the image signals stored in the storing unit to generate frame data; and a scan driver for supplying light emitting control signals with a controlled pulse width according to a magnitude of the frame data.

[0018] An organic light emitting display according to the embodiments of the present invention may reduce power consumption and improve image quality.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] The accompanying drawings, together with the specification, illustrate exemplary embodiments of the present invention, and, together with the description, serve to explain the principles of the exemplary embodiments of the present invention.

[0020] FIG. 1 is a schematic block diagram of a conventional organic light emitting display;

[0021] FIG. 2 is a schematic block diagram of an organic light emitting display according to an embodiment of the present invention;

[0022] FIGS. 3A to 3C are schematic drawings showing a process of summing data of image signals in a luminance controller shown in FIG. 2;

[0023] FIG. 4 is a schematic block diagram showing an exemplary luminance controller included in an organic light emitting display according to an embodiment of the present invention; and

[0024] FIG. 5 is a schematic circuit diagram showing an exemplary pixel included in an organic light emitting display according to an embodiment of the present invention.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0025] Hereinafter, certain exemplary embodiments according to the present invention will be described with reference to the accompanying drawings. Here, when a first element is described as being coupled to a second element, the first element may be directly coupled to the second element or may be indirectly coupled to the second element via a third element. Further, some of the elements that are not essential to the complete understanding of the present invention are omitted for clarity. Also, like reference numerals refer to like elements throughout.

[0026] Hereinafter, certain exemplary embodiments according to the present invention will be described with reference to the accompanying drawings.

[0027] FIG. 2 is a schematic block diagram of an organic light emitting display according to an embodiment of the present invention. Referring to FIG. 2, the organic light emitting display includes a display unit 100, a luminance controller 200, a frame memory 300, a data driver 400, a scan driver 500, and a power supply unit 600.

[0028] The display unit 100 includes a plurality of pixels 101 each including an organic light emitting diode (not shown). A plurality of n scan lines ($S1, S2, \dots, Sn-1$, and Sn) extend in a row direction for transferring scan signals. A plurality of n light emitting control lines ($E1, E2, \dots, En-1$, and En) extend in the row direction. A plurality of m data lines ($D1, D2, \dots, Dm-1$, and Dm) extend in a column direction for transferring data signals. First power supply lines (not shown)

transfer a first power ELVDD to the pixels 101, and second power supply lines (not shown) transfer a second power ELVSS to the pixels 101.

[0029] The luminance controller 200 outputs a luminance control signal Ic to limit luminance so that the luminance of the display unit 100 while displaying images does not exceed a suitable level (e.g., a predetermined level). The luminance of the display unit 100 is higher when a large number of the pixels 101 emit light at a high luminance than when a small number of the pixels 101 emit light at a high luminance. For example, when the pixels 101 of the display unit 100 emits light of a full white color, the display unit 100 has a luminance higher than in other cases. Therefore, when an area that is emitting light at a higher luminance as described above is large, power consumption is high. Therefore, in order to reduce the power consumption, the luminance should be lowered to a suitable level (e.g., a predetermined level). Here, the luminance is varied according to the number of pixels 101 that are emitting light at a high luminance by changing a range limiting luminance according to the area that is emitting light at the high luminance.

[0030] The luminance controller 200 determines the magnitude of frame data, which is a sum of image signals (e.g., RGB data) input in one frame, to determine (or to judge) that a large amount of current flows in the display unit 100 due to a large number of pixels 101 emitting light at a high luminance when the magnitude of the frame data is large, or that a small amount of current flows in the display unit 100 due to a small number of pixels 101 emitting light at a high luminance when the magnitude of the frame data is small. Therefore, the luminance controller 200 outputs the luminance control signal Ic to limit luminance corresponding to the magnitude of the frame data.

[0031] When the luminance of the display unit 100 is limited by the luminance controller 200, the amount of current flowing in the display unit 100 is limited so that a high-output power supply unit 600 is not needed. When the luminance of the display unit 100 is not limited, the light emitting time of the light emitting pixels is maintained to be long so that the luminance is increased. Therefore, the contrast ratio of the light emitting pixel 101 to the non-light emitting pixel 101 is large. Therefore, the contrast ratio of the pixels is improved.

[0032] In a method of reducing the amount of current flowing in the display unit 100 according to an embodiment of the present invention, the time for supplying current is reduced by reducing the light emitting time of the pixels 101, thereby making it possible to reduce the amount of current flowing in the display unit 100.

[0033] The luminance controller 200 controls the pulse width of the light emitting control signals transferred through the light emitting control signal lines ($E1, E2, \dots, En-1, En$) in order to control the light emitting time of the display unit 100. The light emitting time of the display unit 100 is controlled according to the pulse width of the light emitting control signal, and the amount of current flowing in the display unit 100 is controlled accordingly.

[0034] The frame memory 300 stores image signals (RGB data) corresponding to one frame period to transfer the image signals (RGB data) to the data driver 400 in a frame unit.

[0035] The data driver 400, which applies the data signals to the display unit 100, receives the image signals (RGB data) to generate the data signals. The data driver 400 is coupled to the data lines ($D1, D2, \dots, Dm-1$, and Dm) of the display unit 100 to apply the generated data signals to the display unit 100.

[0036] The scan driver **500**, which applies the scan signals and the light emitting control signals to the display unit **100**, is coupled to the scan lines ($S_1, S_2, \dots, S_{n-1}$, and S_n) and the light emitting control signal lines ($E_1, E_2, \dots, E_{n-1}$, and E_n) to transfer the scan signals and the light emitting control signals to corresponding rows of the pixels **101**. The pixels **101** applied with the scan signals receive the data signals output from the data driver **400**, and the pixels **101** transferred with the light emitting control signals emit light according to the light emitting control signals.

[0037] The scan driver **500** may include a scan driving circuit for generating the scan signals and a light emitting driving circuit for generating the light emitting control signals. The scan driving circuit and the light emitting driving circuit may be included in one component and may be separated into individual components.

[0038] The row of the pixels **101** applied with the scan signals by the scan driver **500** receive the data signals input from the data driver **400**, and currents corresponding to the data signals and the light emitting control signals flow through the corresponding organic light emitting diodes to emit light to display images. After all rows of pixels **101** are sequentially selected, one frame is completed.

[0039] The power supply unit **600** supplies the first power ELVDD and the second power ELVSS to the display unit **100** so that a current corresponding to the data signal flows through each one of the pixels **101** according to the voltage difference between the first power ELVDD and the second power ELVSS.

[0040] FIGS. 3A to 3C are schematic drawings showing a process of summing the data of the image signals (RGB data) in the luminance controller **200** shown in FIG. 2. FIG. 3A shows the case where the image signals (RGB data) to be stored in the entire frame memory **300** are updated per frame, FIG. 3B shows a first embodiment according to the present invention in which the image signals (RGB data) are stored to a portion of the frame memory **300**, and FIG. 3C shows a second embodiment according to the present invention in which only a portion of the frame memory **300** is updated with newly received image signals (RGB data).

[0041] Referring to FIG. 3A, the luminance controller **200** receives and sums the image signals (RGB data) that are written to the frame memory **300**, thereby generating the frame data per frame. Since the luminance controller **200** generates the frame data by summing the image signals (RGB data) per frame, the method shown in FIG. 3A can be applied to cases where the image signals (RGB data) constituting one entire frame are input.

[0042] When the input image signals (RGB data) correspond to only a portion of one frame, only a portion of a screen (e.g., the display unit **100**) displays updated images, and the remaining portions display the same image from the last frame, as such, it is impossible to sum the image signals (RGB data) of one frame in a data summer.

[0043] Referring to FIG. 3B, all image signals (RGB data) displayed in one frame in an $n-1^{th}$ frame are transferred to the frame memory **300**. Then, image signals corresponding to the different portions in an n^{th} and the $n-1^{th}$ frames are input to the frame memory **300**. In FIG. 3B, addresses of a portion of the frame memory **300** where the $n-1^{th}$ frame and the n^{th} frame differ correspond to addresses k to $k+m$ and addresses of a portion of the frame memory **300** where the $n-1^{th}$ frame is the same as the n^{th} frame corresponds to addresses 1 to $k-1$ and addresses $k+m+1$ to p .

[0044] In FIG. 3B, the image signals corresponding to the addresses between k and $k+m$ during the n^{th} frame are transferred to the frame memory **300**, and the remaining portions of the frame memory **300** store the corresponding portions of the image signals transferred during the $n-1^{th}$ frame. The image signals stored in the addresses between k and $k+m$ in the $n-1^{th}$ frame are read from the frame memory **300** and compared to the image signals to be written in the addresses between k and $k+m$ in the n^{th} frame to generate comparison values.

[0045] The frame data of the n^{th} frame is determined by utilizing the comparison values. For example, assuming that the frame data of the $n-1^{th}$ frame is 200, the sum of the corresponding image signals to be written in the addresses between k and $k+m$ in the $n-1^{th}$ frame is 100, and the sum of the corresponding image signals to be written in the addresses between k and $k+m$ in the n^{th} frame is 90. The difference between the sum of the image signals to be written in the addresses between k and $k+m$ in the $n-1^{th}$ frame and the sum of the image signals to be written in the address between k and $k+m$ in the n^{th} frame becomes 10. In other words, since the difference between the sums of the image signals in the changed portion is 10, the n^{th} frame data is smaller by 10 than the $n-1^{th}$ frame data so that the frame data in the n^{th} frame is 190.

[0046] Therefore, even when the image signals input in one frame corresponds to a portion of the frame, the frame data can be determined.

[0047] However, in order to determine the frame data, time is required for reading the image signals (RGB data) written in the addresses between k and $k+m$ in the $n-1^{th}$ frame the n^{th} frame. In other words, the image signals are read twice, therefore, the data processing speed may be delayed.

[0048] Referring to FIG. 3C, the image signals (RGB data) input to the addresses between 1 and $k-1$ and the addresses between $k+m+1$ and p of the frame memory **300** are the same in the $n-1^{th}$ frame and the n^{th} frame, but the image signals input to the addresses between k and $k+m$ in the $n-1^{th}$ frame are different from the image signals input to the addresses between k and $k+m$ of the frame memory **300** in the n^{th} frame. The image signals input to the addresses between 1 and $k-1$ and the addresses between $k+m+1$ and p of the $n-1^{th}$ frame are stored in a checksum block (or a storing block) **310** used for detecting errors.

[0049] The n^{th} frame receives only the image signals (RGB data) to be stored at the addresses between k and $k+m$ of the frame memory **300**.

[0050] The luminance controller **200** sums the image signals (RGB data) written in the checksum block **310** and, at the same time, sums the image signals (RGB data) input to the addresses between k to $k+m$ of the frame memory **300** to be written in the frame memory **300**. The frame data is generated by utilizing the summed image signals.

[0051] Therefore, the image signals are not read twice unlike the example shown in FIG. 3B so that the data processing speed is not delayed.

[0052] FIG. 4 is a schematic block diagram showing one example of a luminance controller included in an organic light emitting display according to an embodiment of the present invention. Referring to FIG. 4, the luminance controller **200** includes a data summer **210**, a lookup table **220**, and a luminance control driver **230**.

[0053] The data summer **210** extracts information of the frame data by summing the image signals (RGB data) input to

the frame memory **300**. The frame data corresponds to a sum of all video data for one frame, wherein it would be appreciated that when the data value of the frame data is large, it includes many data corresponding to a high gray level, and when the data value of the frame data is small, it includes less data corresponding to a high gray level. The data summer **210** is coupled to a first storing unit **211** and a second storing unit **212**. The first storing unit **211** stores the unchanged portion of the image signals (RGB data) in a partial driving, and the second storing unit **212** stores the changing portion of the image signals (RGB data) in a partial driving. Also, the data summer **210** is coupled to a third storing unit **213** for storing the sum of the portions of the image signals (RGB data) stored in the first storing unit **211** and the second storing unit **212** to store the frame data.

[0054] The lookup table **220** stores the width (or time duration) of the light emitting interval of the light emitting control signal according to the magnitude of the frame data stored in the third storing unit **213**. The light emitting interval of the light emitting control signal stored in the lookup table **220** has a short length (or time duration) when the magnitude of the frame data is large and has a long length (or time duration) when the magnitude of the frame data is small. Also, when the magnitude of the frame data is below a suitable value (e.g., a predetermined value), the light emitting interval is set to be the longest to remove the luminance limitation as described above.

[0055] The luminance control driver **230** outputs the luminance control signal I_c corresponding to the length (or time duration) of the light emitting interval of the light emitting control signal stored in the lookup table **220**. The luminance control signal I_c is input to the scan driver **500** to control the length (or time duration) of the light emitting interval of the light emitting control signal output from the scan driver **500**. Therefore, the scan driver **500** outputs the light emitting control signal with the length (or time duration) of the light emitting interval determined according to the luminance control signal I_c . When the scan driver **500** includes a scan driving circuit and a light emitting control circuit, the luminance control signal I_c is input to the light emitting control circuit to output the light emitting control signals according to the luminance control signal I_c .

[0056] FIG. 5 is a schematic circuit diagram showing one example of a pixel of an organic light emitting display according to an embodiment of the present invention.

[0057] Referring to FIG. 5, the pixel **101** includes an OLED, a first transistor **M1**, a second transistor **M2**, a third transistor **M3**, and a capacitor **Cst**. The scan line S_n , the light emitting control line E_n , the data line D_m , and a power supply line for supplying the first power ELVDD are coupled to the pixel **101**. The scan line S_n and the light emitting control line E_n extend in a row direction, and the data line D_m and the power supply line for supplying the first power ELVDD extend in a column direction.

[0058] A source of the first transistor **M1** is coupled to the power supply line for supplying the first power ELVDD, a drain thereof is coupled to the OLED, and a gate thereof is coupled to a first node **N1**. A current for emitting light is supplied to the OLED according to the signal input to the gate of the first transistor **M1**. The amount of current flowing from the source of the first transistor **M1** to the drain thereof is controlled by the data signal transferred to the first node **N1** through the second transistor **M2**.

[0059] The source of the second transistor **M2** is coupled to the data line D_m , the drain thereof is coupled to the first node **N1**, and the gate thereof is coupled to the scan line S_n to selectively transfer the data signal to the first node **N1** according to the scan signals.

[0060] A first electrode of the capacitor **Cst** is coupled to the source of the first transistor **M1**, and a second electrode thereof is coupled to the first node **N1** to maintain a voltage between the source and the gate of the first transistor **M1** supplied by the data signal.

[0061] The source of the third transistor **M3** is coupled to the drain of the first transistor **M1**, the drain thereof is coupled to the OLED, and the gate thereof is coupled to the light emitting control line E_n . Therefore, on/off of the transistor **M3** is controlled according to the light emitting control signal transferred through the light emitting control line E_n . The third transistor **M3** selectively transfers the current from the first transistor **M1** to the OLED.

[0062] With the above described configuration, when the second transistor **M2** is turned-on by the scan signal applied to the gate of the second transistor **M2**, a voltage corresponding to the data signal is charged in the capacitor **Cst**. Since the voltage charged in the capacitor **Cst** is applied to the gate electrode of the first transistor **M1**, a current flows through the first transistor **M1** from its source to its drain corresponding to the data signal. The current flowing from the source to the drain is selectively provided to the OLED through the third transistor **M3** that is coupled to the drain of the transistor **M1**. Therefore, when the pulse width of the light emitting control signal is controlled, the time in which the third transistor **M3** maintains the on state is controlled so that the amount of current flowing through the OLED is controlled. In other words, when the pulse width of the light emitting control signal is controlled, the luminance of the OLED can be controlled.

[0063] While the present invention has been described in connection with certain exemplary embodiments, it is to be understood that the present invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims, and equivalent thereof.

What is claimed is:

1. An organic light emitting display comprising:

- a display unit having a plurality of pixels for displaying images corresponding to image signals in response to a plurality of scan signals, a plurality of light emitting control signals, and a plurality of data signals;
- a frame memory having a first portion for storing a first portion of the image signals that is the same in an $n-1^{th}$ frame and an n^{th} frame and a second portion for storing a second portion of the image signals that is different between the $n-1^{th}$ frame and the n^{th} frame;
- a storing unit for storing the first portion of the image signals of the $n-1^{th}$ frame;
- a luminance controller for summing the second portion of the image signals and the first portion of the image signals stored in the storing unit to generate frame data;
- a scan driver for supplying the scan signals and the light emitting control signals with a controlled pulse width according to a magnitude of the frame data to the display unit; and

a data driver for generating the plurality of data signals by utilizing the image signals stored in the frame memory and supplying the data signals to the display unit.

2. The organic light emitting display as claimed in claim 1, wherein the luminance controller comprises:

a data summer comprising:

a first storing unit for summing a corresponding portion of the image signals stored in the storing unit to generate a first value, and storing the first value;

a second storing unit for summing another corresponding portion of the image signals that is not stored in the storing unit to generate a second value, and storing the second value; and

a third storing unit for summing the first value and the second value to generate a frame value, and storing the frame value;

a lookup table for storing the pulse widths of the light emitting control signals corresponding to the frame value stored in the third storing unit; and

a controller for generating control signals for controlling the light emitting control signals corresponding to the pulse widths of the light emitting control signals stored in the lookup table.

3. The organic light emitting display as claimed in claim 1, wherein a light emitting time of the display unit is controlled by the pulse widths of the light emitting control signals.

4. The organic light emitting display as claimed in claim 1, wherein the storing unit is a checksum block.

5. The organic light emitting display as claimed in claim 1, wherein only a portion of the display unit displays the images.

6. A method for driving an organic light emitting display having a display unit for displaying images corresponding to image signals in response to data signals, scan signals, and light emitting control signals, the method comprising:

storing a first portion of the image signals that is the same in an $n-1^{th}$ frame and an n^{th} frame;

generating first frame data by summing the first portion of the image signals;

generating second frame data by summing a second portion of the image signals that is different between the $n-1^{th}$ frame and the n^{th} frame; and

controlling pulse widths of the light emitting control signals corresponding to a summed result of the first frame data and the second frame data.

7. The method as claimed in claim 6, wherein only a portion of the display unit displays the images.

8. The method as claimed in claim 6, wherein the first portion of the image signals is stored in a checksum block.

9. An organic light emitting display comprising:

a frame memory having a first portion for storing a first portion of image signals that is the same in an $n-1^{th}$ frame and an n^{th} frame, and a second portion for storing a second portion of the image signals that is different between the $n-1^{th}$ frame and the n^{th} frame;

a storing unit for storing the first portion of the image signals;

a luminance controller for summing the second portion of the image signals and the first portion of the image signals stored in the storing unit to generate frame data; and

a scan driver for supplying light emitting control signals with a controlled pulse width according to a magnitude of the frame data.

10. The organic light emitting display as claimed in claim 9, wherein the luminance controller comprises:

a data summer for summing the image signals to generate a frame value; and

a lookup table for storing pulse widths of the light emitting control signals corresponding to the frame value; and

a controller for generating control signals for controlling the light emitting control signals corresponding to the pulse widths of the light emitting control signals stored in the lookup table.

11. The organic light emitting display as claimed in claim 10, wherein the data summer comprises:

a first storing unit for summing a corresponding portion of the image signals stored in said storing unit to generate a first value, and storing the first value;

a second storing unit for summing another corresponding portion of the image signals that is not stored in said storing unit to generate a second value, and storing the second value; and

a third storing unit for summing the first value and the second value to generate the frame value, and storing the frame value.

* * * * *

专利名称(译)	有机发光显示器及其驱动方法		
公开(公告)号	US20090278772A1	公开(公告)日	2009-11-12
申请号	US12/463287	申请日	2009-05-08
[标]申请(专利权)人(译)	李旭 朴成CHEON		
申请(专利权)人(译)	李旭 朴成, CHEON		
当前申请(专利权)人(译)	三星DISPLAY CO., LTD.		
[标]发明人	LEE WOOK PARK SUNG CHEON		
发明人	LEE, WOOK PARK, SUNG-CHEON		
IPC分类号	G09G3/30		
CPC分类号	G09G3/2081 G09G3/3233 G09G5/393 G09G2300/0842 G09G2300/0861 G09G2360/18 G09G2320/0626 G09G2330/021 G09G2340/16 G09G2360/16 G09G2310/04		
优先权	1020080043175 2008-05-09 KR		
其他公开文献	US8154482		
外部链接	Espacenet USPTO		

摘要(译)

有机发光显示器及其驱动方法。有机发光显示器包括：帧存储器，具有第一部分和第二部分，第一部分被配置为存储在第n-1帧和第n帧中相同的第一部分图像信号，第二部分被配置为存储第二部分的第二部分。在第n-1帧和第n帧中不同的图像信号；存储单元，用于存储图像信号的第一部分；亮度控制器，用于对存储在存储单元中的图像信号的第二部分和图像信号的第一部分求和，以产生帧数据；扫描驱动器，用于根据帧数据的大小提供具有受控脉冲宽度的发光控制信号。

