



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
19.11.2008 Bulletin 2008/47

(51) Int Cl.:
A61B 5/00 (2006.01)

(21) Application number: **08012674.1**

(22) Date of filing: **25.01.2000**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE

(30) Priority: **25.01.1999 US 117097 P**
26.10.1999 US 161565 P

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
07021807.8 / 1 889 569
00907031.9 / 1 148 809

(71) Applicant: **Masimo Corporation**
Irvine, CA 92614 (US)

(72) Inventors:
• **Kiani, Massi E.**
Laguna Niguel, CA 92677 (US)

- **Ali, Ammar, Al**
Tustin, CA 92782 (US)
- **Diab, Mohamed K.**
Mission Viejo, CA 92692 (US)
- **Vaden, Val E.**
Hillsborough, CA 94010 (US)

(74) Representative: **Vossius & Partner**
Siebertstrasse 4
81675 München (DE)

Remarks:

This application was filed on 14-07-2008 as a divisional application to the application mentioned under INID code 62.

(54) **Universal/upgrading pulse oximeter**

(57) A universal/upgrading pulse oximeter (UPO) (210) comprises a portable unit (610) and a docking station (660, 910) together providing three-instruments-in-one functionality for measuring oxygen saturation and related physiological parameters. The portable unit functions as a handheld pulse oximeter. The combination of the docked portable and the docking station functions as a stand-alone, high-performance pulse oximeter. The portable-docking station combination is also connectable to, and universally compatible with, pulse oximeters from various manufacturers through use of a waveform generator (320, 930). The UPO provides a universal sensor to pulse oximeter interface and a pulse oximeter measurement capability that upgrades the performance of conventional instruments by increasing low perfusion performance and motion artifact immunity, for example. Universal compatibility combined with portability allows the UPO to be transported along with patients transferred between an ambulance and a hospital ER, or between various hospital sites, providing continuous patient monitoring in addition to plug-compatibility and functional upgrading for multiparameter patient monitoring systems. The image on the portable display (264, 740) is rotatable, either manually when undocked or as a function of orientation (950). In one embodiment, the docking station (660) has a web server and network interface (1410) that

allows UPO data to be downloaded and viewed as web pages over a local area network (1420) or the Internet.

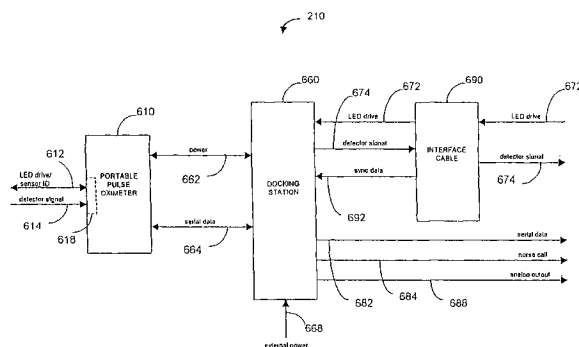


FIG. 6

Description

Background of the Invention

[0001] Oximetry is the measurement of the oxygen level status of blood. Early detection of low blood oxygen level is critical in the medical field, for example in critical care and surgical applications, because an insufficient supply of oxygen can result in brain damage and death in a matter of minutes. Pulse oximetry is a widely accepted noninvasive procedure for measuring the oxygen saturation level of arterial blood, an indicator of oxygen supply. A pulse oximetry system consists of a sensor applied to a patient, a pulse oximeter, and a patient cable connecting the sensor and the pulse oximeter.

[0002] The pulse oximeter may be a standalone device or may be incorporated as a module or built-in portion of a multiparameter patient monitoring system, which also provides measurements such as blood pressure, respiratory rate and EKG. A pulse oximeter typically provides a numerical readout of the patient's oxygen saturation, a numerical readout of pulse rate, and an audible indicator or "beep" that occurs in response to each pulse. In addition, the pulse oximeter may display the patient's plethysmograph, which provides a visual display of the patient's pulse contour and pulse rate.

Summary of the Invention

[0003] FIG. 1 illustrates a prior art pulse oximeter **100** and associated sensor **110**. Conventionally, a pulse oximetry sensor **110** has LED emitters **112**, typically one at a red wavelength and one at an infrared wavelength, and a photodiode detector **114**. The sensor **110** is typically attached to an adult patient's finger or an infant patient's foot. For a finger, the sensor **110** is configured so that the emitters **112** project light through the fingernail and through the blood vessels and capillaries underneath. The LED emitters **112** are activated by drive signals **122** from the pulse oximeter **100**. The detector **114** is positioned at the fingertip opposite the fingernail so as to detect the LED emitted light as it emerges from the finger tissues. The photodiode generated signal **124** is relayed by a cable to the pulse oximeter **100**.

[0004] The pulse oximeter **100** determines oxygen saturation (SpO_2) by computing the differential absorption by arterial blood of the two wavelengths emitted by the sensor **110**. The pulse oximeter **100** contains a sensor interface **120**, an SpO_2 processor **130**, an instrument manager **140**, a display **150**, an audible indicator (tone generator) **160** and a keypad **170**. The sensor interface **120** provides LED drive current **122** which alternately activates the sensor red and IR LED emitters **112**. The sensor interface **120** also has input circuitry for amplification and filtering of the signal **124** generated by the photodiode detector **114**, which corresponds to the red and infrared light energy attenuated from transmission through the patient tissue site. The SpO_2 processor **130**

calculates a ratio of detected red and infrared intensities, and an arterial oxygen saturation value is empirically determined based on that ratio. The instrument manager **140** provides hardware and software interfaces for managing the display **150**, audible indicator **160** and keypad **170**. The display **150** shows the computed oxygen status, as described above. The audible indicator **160** provides the pulse beep as well as alarms indicating desaturation events. The keypad **170** provides a user interface for such things as alarm thresholds, alarm enablement, and display options.

[0005] Computation of SpO_2 relies on the differential light absorption of oxygenated hemoglobin, HbO_2 , and deoxygenated hemoglobin, Hb , to determine their respective concentrations in the arterial blood. Specifically, pulse oximetry measurements are made at red and IR wavelengths chosen such that deoxygenated hemoglobin absorbs more red light than oxygenated hemoglobin, and, conversely, oxygenated hemoglobin absorbs more infrared light than deoxygenated hemoglobin, for example 660 nm (red) and 905 nm (IR).

[0006] To distinguish between tissue absorption at the two wavelengths, the red and IR emitters **112** are provided drive current **122** so that only one is emitting light at a given time. For example, the emitters **112** may be cycled on and off alternately, in sequence, with each only active for a quarter cycle and with a quarter cycle separating the active times. This allows for separation of red and infrared signals and removal of ambient light levels by downstream signal processing. Because only a single detector **114** is used, it responds to both the red and infrared emitted light and generates a time-division-multiplexed ("modulated") output signal **124**. This modulated signal **124** is coupled to the input of the sensor interface **120**.

[0007] In addition to the differential absorption of hemoglobin derivatives, pulse oximetry relies on the pulsatile nature of arterial blood to differentiate hemoglobin absorption from absorption of other constituents in the surrounding tissues. Light absorption between systole and diastole varies due to the blood volume change from the inflow and outflow of arterial blood at a peripheral tissue site. This tissue site might also comprise skin, muscle, bone, venous blood, fat, pigment, etc., each of which absorbs light. It is assumed that the background absorption due to these surrounding tissues is invariant and can be ignored. Thus, blood oxygen saturation measurements are based upon a ratio of the time-varying or AC portion of the detected red and infrared signals with respect to the time-invariant or DC portion:

$$RD/IR = (Red_{AC}/Red_{DC})/(IR_{AC}/IR_{DC})$$

The desired SpO_2 measurement is then computed from this ratio. The relationship between RD/IR and SpO_2 is most accurately determined by statistical regression of

experimental measurements obtained from human volunteers and calibrated measurements of oxygen saturation. In a pulse oximeter device, this empirical relationship can be stored as a "calibration curve" in a read-only memory (ROM) look-up table so that SpO₂ can be directly read-out of the memory in response to input RD/IR measurements.

[0008] Pulse oximetry is the standard-of-care in various hospital and emergency treatment environments. Demand has lead to pulse oximeters and sensors produced by a variety of manufacturers. Unfortunately, there is no standard for either performance by, or compatibility between, pulse oximeters or sensors. As a result, sensors made by one manufacturer are unlikely to work with pulse oximeters made by another manufacturer. Further, while conventional pulse oximeters and sensors are incapable of taking measurements on patients with poor peripheral circulation and are partially or fully disabled by motion artifact, advanced pulse oximeters and sensors manufactured by the assignee of the present invention are functional under these conditions. This presents a dilemma to hospitals and other caregivers wishing to upgrade their patient oxygenation monitoring capabilities. They are faced with either replacing all of their conventional pulse oximeters, including multiparameter patient monitoring systems, or working with potentially incompatible sensors and inferior pulse oximeters manufactured by various vendors for the pulse oximetry equipment in use at the installation.

[0009] Hospitals and other caregivers are also plagued by the difficulty of monitoring patients as they are transported from one setting to another. For example, a patient transported by ambulance to a hospital emergency room will likely be unmonitored during the transition from ambulance to the ER and require the removal and replacement of incompatible sensors in the ER. A similar problem is faced within a hospital as a patient is moved between surgery, ICU and recovery settings. Incompatibility and transport problems are exacerbated by the prevalence of expensive and non-portable multiparameter patient monitoring systems having pulse oximetry modules as one measurement parameter.

[0010] The Universal/Upgrading Pulse Oximeter (UPO) according to the present invention is focused on solving these performance, incompatibility and transport problems. The UPO provides a transportable pulse oximeter that can stay with and continuously monitor the patient as they are transported from setting to setting. Further, the UPO provides a synthesized output that drives the sensor input of other pulse oximeters. This allows the UPO to function as a universal interface that matches incompatible sensors with other pulse oximeter instruments. Further, the UPO acts as an upgrade to existing pulse oximeters that are adversely affected by low tissue perfusion and motion artifact. Likewise, the UPO can drive a SpO₂ sensor input of multiparameter patient monitoring systems, allowing the UPO to integrate into the associated multiparameter displays, patient record

keeping systems and alarm management functions.

[0011] One aspect of the present invention is a measurement apparatus comprising a sensor, a first pulse oximeter and a waveform generator. The sensor has at least one emitter and an associated detector configured to attach to a tissue site. The detector provides an intensity signal responsive to the oxygen content of arterial blood at the tissue site. The first pulse oximeter is in communication with the detector and computes an oxygen saturation measurement based on the intensity signal. The waveform generator is in communication with the first pulse oximeter and provides a waveform based on the oxygen saturation measurement. A second pulse oximeter is in communication with the waveform generator and displays an oxygen saturation value based on the waveform. The waveform is synthesized so that the oxygen saturation value is generally equivalent to the oxygen saturation measurement.

[0012] In another aspect of the present invention, a measurement apparatus comprises a first sensor port connectable to a sensor, an upgrade port, a signal processor and a waveform generator. The upgrade port is connectable to a second sensor port of a physiological monitoring apparatus. The signal processor is configured to compute a physiological measurement based on a signal input to the first sensor port. The waveform generator produces a waveform based on the physiological measurement, and the waveform is available at the upgrade port. The waveform is adjustable so that the physiological monitoring apparatus displays a value generally equivalent to the physiological measurement when the upgrade port is attached to the second sensor port.

[0013] Yet another aspect of the present invention is a measurement method comprising the steps of sensing an intensity signal responsive to the oxygen content of arterial blood at a tissue site and computing an oxygen saturation measurement based on the intensity signal. Other steps are generating a waveform based on the oxygen saturation measurement and providing the waveform to the sensor inputs of a pulse oximeter so that the pulse oximeter displays an oxygen saturation value generally equivalent to the oxygen saturation measurement.

[0014] An additional aspect of the present invention is a measurement method comprising the steps of sensing a physiological signal, computing a physiological measurement based upon the signal, and synthesizing a waveform as a function of the physiological measurement. A further step is outputting the waveform to a sensor input of a physiological monitoring apparatus. The synthesizing step is performed so that the measurement apparatus displays a value corresponding to the physiological measurement.

[0015] A further aspect of the present invention is a measurement apparatus comprising a first pulse oximeter for making an oxygen saturation measurement and a pulse rate measurement based upon an intensity signal derived from a tissue site. Also included is a waveform generation means for creating a signal based upon the

oxygen saturation measurement and the pulse rate measurement. In addition, there is a communication means for transmitting the signal to a second pulse oximeter.

[0016] Another aspect of the present invention is a measurement apparatus comprising a portable portion having a sensor port, a processor, a display, and a docking connector. The sensor port is configured to receive an intensity signal responsive to the oxygen content of arterial blood at a tissue site. The processor is programmed to compute an oxygen saturation value based upon the intensity signal and to output the value to the display. A docking station has a portable connector and is configured to accommodate the portable so that the docking connector mates with the portable connector. This provides electrical connectivity between the docking station and the portable. The portable has an undocked position separate from the docking station in which the portable functions as a handheld pulse oximeter. The portable also has a docked position at least partially retained within the docking station in which the combination of the portable and the docking station has at least one additional function compared with the portable in the undocked position.

[0017] A further aspect of the present invention is a measurement apparatus configured to function in both a first spatial orientation and a second spatial orientation. The apparatus comprises a sensor port configured to receive a signal responsive to a physiological state. The apparatus also has a tilt sensor providing an output responsive to gravity. In addition, there is a processor in communication with the sensor port and the tilt sensor output. The processor is programmed to compute a physiological measurement value based upon the signal and to determine whether the measurement apparatus is in the first orientation or the second orientation based upon the tilt sensor output. A display has a first mode and a second mode and is driven by the processor. The display shows the measurement value in the first mode when the apparatus is in the first orientation and shows the measurement value in the second mode when the apparatus is in the second orientation.

[0018] Another aspect of the present invention is a measurement method comprising the steps of sensing a signal responsive to a physiological state and computing physiological measurement based on the signal. Additional steps are determining the spatial orientation of a tilt sensor and displaying the physiological measurement in a mode that is based upon the determining step.

Brief Description of the Drawings

[0019]

FIG. 1 is a block diagram of a prior art pulse oximeter; FIG. 2 is a diagram illustrating a patient monitoring system incorporating a universal/upgrading pulse oximeter (UPO) according to the present invention;

FIG. 3 is top level block diagram of a UPO embodiment;

FIG. 4 is a detailed block diagram of the waveform generator portion of the UPO embodiment shown in FIG. 3;

FIG. 5 is an illustration of a handheld embodiment of the UPO;

FIG. 6 is a top level block diagram of another UPO embodiment incorporating a portable pulse oximeter and a docking station;

FIG. 7 is a detailed block diagram of the portable pulse oximeter portion of FIG. 6;

FIG. 8A is an illustration of the portable pulse oximeter user interface, including a keyboard and display;

FIGS. 8B-C are illustrations of the portable pulse oximeter display showing portrait and landscape modes, respectively;

FIG. 9 is a detailed block diagram of the docking station portion of FIG. 6;

FIG. 10 is a schematic of the interface cable portion of FIG. 6;

FIG. 11A is a front view of an embodiment of a portable pulse oximeter;

FIG. 11B is a back view of a portable pulse oximeter;

FIG. 12A is a front view of an embodiment of a docking station;

FIG. 12B is a back view of a docking station;

FIG. 13 is a front view of a portable docked to a docking station; and

FIG. 14 is a block diagram of one embodiment of a local area network interface for a docking station.

Detailed Description of the Preferred Embodiments

[0020] FIG. 2 depicts the use of a Universal/Upgrading Pulse Oximeter ("UPO") **210** to perform patient monitoring. A pulse oximetry sensor **110** is attached to a patient (not illustrated) and provides the UPO **210** with a modulated red and IR photo-plethysmograph signal through a patient cable **220**. The UPO **210** computes the patient's oxygen saturation and pulse rate from the sensor signal and, optionally, displays the patient's oxygen status. The UPO **210** may incorporate an internal power source **212**, such as common alkaline batteries or a rechargeable power source. The UPO **210** may also utilize an external power source **214**, such as standard 110V AC coupled with an external step-down transformer and an internal or external AC-to-DC converter.

[0021] In addition to providing pulse oximetry measurements, the UPO **210** also separately generates a signal, which is received by a pulse oximeter **268** external to the UPO **210**. This signal is synthesized from the saturation calculated by the UPO **210** such that the external pulse oximeter **268** calculates the equivalent saturation and pulse rate as computed by the UPO **210**. The external pulse oximeter **268** receiving the UPO signal may be a multiparameter patient monitoring system (MPMS) **260**

incorporating a pulse oximeter module **268**, a standalone pulse oximeter instrument, or any other host instrument capable of measuring SpO₂. The MPMS **260** depicted in FIG. 2 has a rack **262** containing a number of modules for monitoring such patient parameters as blood pressure, EKG, respiratory gas, and SpO₂. The measurements made by these various modules are shown on a multiparameter display **264**, which is typically a video (CRT) device. The UPO **210** is connected to an existing MPMS **260** with a cable **230**, advantageously integrating the UPO oxygen status measurements with other MPMS measurements. This allows the UPO calculations to be shown on a unified display of important patient parameters, networked with other patient data, archived within electronic patient records and incorporated into alarm management, which are all MPMS functions convenient to the caregiver.

[0022] FIG. 3 depicts the major functions of the UPO **210**, including an internal pulse oximeter **310**, a waveform generator **320**, a power supply **330** and an optional display **340**. Attached to the UPO **210** is a sensor **110** and an external pulse oximeter **260**. The internal pulse oximeter **310** provides the sensor **110** with a drive signal **312** that alternately activates the sensor's red and IR LEDs, as is well-known in the art. A corresponding detector signal **314** is received by the internal pulse oximeter **310**. The internal pulse oximeter **310** computes oxygen saturation, pulse rate, and, in some embodiments, other physiological parameters such as pulse occurrence, plethysmograph features and measurement confidence. These parameters **318** are output to the waveform generator **320**. A portion of these parameters may also be used to generate display drive signals **316** so that patient status may be read from, for example, an LED or LCD display module **340** on the UPO.

[0023] The internal pulse oximeter **310** may be a conventional pulse oximeter or, for upgrading an external pulse oximeter **260**, it may be an advanced pulse oximeter capable of low perfusion and motion artifact performance not found in conventional pulse oximeters. An advanced pulse oximeter for use as an internal pulse oximeter **310** is described in U.S. Patent No. 5,632,272 assigned to the assignee of the present invention and incorporated herein by reference. An advanced pulse oximetry sensor for use as the sensor **110** attached to the internal pulse oximeter **310** is described in U.S. Patent No. 5,638,818 assigned to the assignee of the present invention and incorporated herein by reference. Further, a line of advanced Masimo SET[®] pulse oximeter OEM boards and sensors are available from the assignee of the present invention.

[0024] The waveform generator **320** synthesizes a waveform, such as a triangular waveform having a sawtooth or symmetric triangle shape, that is output as a modulated signal **324** in response to an input drive signal **322**. The drive input **322** and modulation output **324** of the waveform generator **320** are connected to the sensor port **262** of the external pulse oximeter **260**. The synthe-

sized waveform is generated in a manner such that the external pulse oximeter **260** computes and displays a saturation and a pulse rate value that is equivalent to that measured by the internal pulse oximeter **310** and sensor **110**. In the present embodiment, the waveforms for pulse oximetry are chosen to indicate to the external pulse oximeter **260** a perfusion level of 5%. The external pulse oximeter **260**, therefore, always receives a strong signal. In an alternative embodiment, the perfusion level of the waveforms synthesized for the external pulse oximeter can be set to indicate a perfusion level at or close to the perfusion level of the patient being monitored by the internal pulse oximeter **310**. As an alternative to the generated waveform, a digital data output **326**, is connected to the data port **264** of the external pulse oximeter **260**. In this manner, saturation and pulse rate measurements and also samples of the unmodulated, synthesized waveform can be communicated directly to the external pulse oximeter **260** for display, bypassing the external pulse oximeter's signal processing functions. The measured plethysmograph waveform samples output from the internal pulse oximeter **310** also may be communicated through the digital data output **326** to the external pulse oximeter **260**.

[0025] It will be understood from the above discussion that the synthesized waveform is not physiological data from the patient being monitored by the internal pulse oximeter **310**, but is a waveform synthesized from predetermined stored waveform data to cause the external pulse oximeter **260** to calculate oxygen saturation and pulse rate equivalent to or generally equivalent (within clinical significance) to that calculated by the internal pulse oximeter **310**. The actual physiological waveform from the patient received by the detector is not provided to the external pulse oximeter **260** in the present embodiment. Indeed, the waveform provided to the external pulse oximeter will usually not resemble the plethysmographic waveform of physiological data from the patient being monitored by the internal pulse oximeter **260**.

[0026] The cable **230** (FIG. 2) attached between the waveform generator **320** and external pulse oximeter **260** provides a monitor ID **328** to the UPO, allowing identification of predetermined external pulse oximeter calibration curves. For example, this cable may incorporate an encoding device, such as a resistor, or a memory device, such as a PROM **1010** (FIG. 10) that is read by the waveform generator **320**. The encoding device provides a value that uniquely identifies a particular type of external pulse oximeter **260** having known calibration curve, LED drive and modulation signal characteristics. Although the calibration curves of the external pulse oximeter **260** are taken into account, the wavelengths of the actual sensor **110**, advantageously, are not required to correspond to the particular calibration curve indicated by the monitor ID **328** or otherwise assumed for the external pulse oximeter **260**. That is, the wavelength of the sensor **110** attached to the internal pulse oximeter **310** is not relevant or known to the external pulse oximeter **260**.

[0027] FIG. 4 illustrates one embodiment of the waveform generator portion 320 of the UPO 210 (FIG. 3). Although this embodiment is illustrated and described as hardware, one of ordinary skill will recognize that the functions of the waveform generator may be implemented in software or firmware or a combination of hardware, software and firmware. The waveform generator 320 performs waveform synthesis with a waveform look-up table ("LUT") 410, a waveform shaper 420 and a waveform splitter 430. The waveform LUT 410 is advantageously a memory device, such as a ROM (read only memory) that contains samples of one or more waveform portions or segments containing a single waveform. These stored waveform segments may be as simple as a single period of a triangular waveform, having a sawtooth or symmetric triangle shape, or more complicated, such as a simulated plethysmographic pulse having various physiological features, for example rise time, fall time and diastolic notch.

[0028] The waveform shaper 420 creates a continuous pulsed waveform from the waveform segments provided by the waveform LUT 410. The waveform shaper 420 has a shape parameter input 422 and an event indicator input 424 that are buffered 470 from the parameters 318 output from the internal pulse oximeter 310 (FIG. 3). The shape parameter input 422 determines a particular waveform segment in the waveform LUT 410. The chosen waveform segment is specified by the first address transmitted to the waveform LUT 410 on the address lines 426. The selected waveform segment is sent to the waveform shaper 420 as a series of samples on the waveform data lines 412.

[0029] The event indicator input 424 specifies the occurrence of pulses in the plethysmograph waveform processed by the internal pulse oximeter 310 (FIG. 3). For example, the event indicator may be a delta time from the occurrence of a previously detected falling pulse edge or this indicator could be a real time or near real time indicator of the pulse occurrence. The waveform shaper 420 accesses the waveform LUT 410 in a manner to create a corresponding delta time between pulses in the synthesized waveform output 428. In one embodiment, the waveform shaper is clocked at a predetermined sample rate. From a known number of samples per stored waveform segment and the input delta time from the event indicator, the waveform shaper 420 determines the number of sequential addresses to skip between samples and accesses the waveform LUT 410 accordingly. This effectively "stretches" or "shrinks" the retrieved waveform segment so as to fit in the time between two consecutive pulses detected by the UPO.

[0030] The waveform splitter 430 creates a first waveform 432 corresponding to a first waveform (such as a red wavelength) expected by the external pulse oximeter 260 (FIG. 3) and a second waveform (such as infrared) 434 expected by the external pulse oximeter 260. The relative amplitudes of the first waveform 432 and second waveform 434 are adjusted to correspond to the ratio output

444 from a calibration curve LUT 440. Thus, for every value of measured oxygen saturation at the sat input 442, the calibration curve LUT 440 provides a corresponding ratio output 444 that results in the first waveform 432 and the second waveform 434 having an amplitude ratio that will be computed by the external pulse oximeter 260 (FIG. 3) as equivalent to the oxygen saturation measured by the internal pulse oximeter 310 (FIG. 3).

[0031] As described above, one particularly advantageous aspect of the UPO is that the operating wavelengths of the sensor 110 (FIG. 3) are not relevant to the operating wavelengths required by the external pulse oximeter 260 (FIG. 3), i.e. the operating wavelengths that correspond to the calibration curve or curves utilized by the external pulse oximeter. The calibration curve LUT 440 simply permits generation of a synthesized waveform as expected by the external oximeter 260 (FIG. 3) based on the calibration curve used by the external pulse oximeter 260 (FIG. 3). The calibration curve LUT 440 contains data about the known calibration curve of the external pulse oximeter 260 (FIG. 3), as specified by the monitor ID input 328. In other words, the waveform actually synthesized is not a patient plethysmographic waveform. It is merely a stored waveform that will cause the external pulse oximeter to calculate the proper oxygen saturation value and pulse rate values. Although this does not provide a patient plethysmograph on the external pulse oximeter for the clinician, the calculated values, which is what is actually sought, will be accurate.

[0032] A modulator 450 responds to an LED drive input 322 to generate a modulated waveform output 324 derived from the first waveform 432 and second waveform 434. Also, a data communication interface 460 transmits as a digital data output 326 the data obtained from the sat 442, pulse rate 462 and synthesized waveform 428 inputs.

[0033] FIG. 5 depicts a handheld UPO 500 embodiment. The handheld UPO 500 has keypad inputs 510, an LCD display 520, an external power supply input 530, an output port 540 for connection to an external pulse oximeter and a sensor input 550 at the top edge (not visible). The display 520 shows the measured oxygen saturation 522, the measured pulse rate 524, a pulsating bar 526 synchronized with pulse rate or pulse events, and a confidence bar 528 indicating confidence in the measured values of saturation and pulse rate. Also shown are low battery 572 and alarm enabled 574 status indicators.

[0034] The handheld embodiment described in connection with FIG. 5 may also advantageously function in conjunction with a docking station that mechanically accepts, and electrically connects to, the handheld unit. The docking station may be co-located with a patient monitoring system and connected to a corresponding SpO₂ module sensor port, external power supply, printer and telemetry device, to name a few options. In this configuration, the handheld UPO may be removed from a first docking station at one location to accompany and con-

tinuously monitor a patient during transport to a second location. The handheld UPO can then be conveniently placed into a second docking station upon arrival at the second location, where the UPO measurements are displayed on the patient monitoring system at that location.

[0035] FIG. 6 shows a block diagram of a UPO embodiment, where the functions of the UPO 210 are split between a portable pulse oximeter 610 and a docking station 660. The portable pulse oximeter 610 ("portable") is a battery operated, fully functional, stand-alone pulse oximeter instrument. The portable 610 connects to a sensor 110 (FIG. 2) through a UPO patient cable 220 (FIG. 2) attached to a patient cable connector 618. The portable 610 provides the sensor 110 with a drive signal 612 that alternately activates the sensor's red and IR LEDs, as is well-known in the art. The portable also receives a corresponding detector signal 614 from the sensor. The portable can also input a sensor ID on the drive signal line 612, as described in U.S. Patent No. 5,758,644 entitled Manual and Automatic Probe Calibration, assigned to the assignee of the present invention and incorporated herein by reference.

[0036] The portable 610 can be installed into the docking station 660 to expand its functionality. When installed, the portable 610 can receive power 662 from the docking station 660 if the docking station 660 is connected to external power 668. Alternately, with no external power 668 to the docking station 660, the portable 610 can supply power 662 to the docking station 660. The portable 610 communicates to the docking station with a bidirectional serial data line 664. In particular, the portable 610 provides the docking station with SpO₂, pulse rate and related parameters computed from the sensor detector signal 614. When the portable 610 is installed, the docking station 660 may drive a host instrument 260 (FIG. 2) external to the portable 610. Alternatively, the portable 610 and docking station 660 combination may function as a standalone pulse oximeter instrument, as described below with respect to FIG. 13.

[0037] In one embodiment, the docking station 660 does not perform any action when the portable 610 is not docked. The user interface for the docking station 660, i.e. keypad and display, is on the portable 610. An indicator LED on the docking station 660 is lit when the portable is docked. The docking station 660 generates a detector signal output 674 to the host instrument 260 (FIG. 2) in response to LED drive signals 672 from the host instrument and SpO₂ values and related parameters received from the portable 610. The docking station 660 also provides a serial data output 682, a nurse call 684 and an analog output 688.

[0038] An interface cable 690 connects the docking station 660 to the host instrument patient cable 230 (FIG. 2). The LED drive signals 672 and detector signal output 674 are communicated between the docking station 660 and the host instrument 260 (FIG. 2) via the interface cable 690. The interface cable 690 provides a sync data output 692 to the docking station 660, communicating

sensor, host instrument (e.g. monitor ID 328, FIG. 3) and calibration curve data. Advantageously, this data allows the docking station 660 to appear to a particular-host instrument as a particular sensor providing patient measurements.

[0039] FIG. 7 provides further detail of the portable 610. The portable components include a pulse oximeter processor 710, a management processor 720, a power supply 730, a display 740 and a keypad 750. The pulse oximeter processor 710 functions as an internal pulse oximeter, interfacing the portable to a sensor 110 (FIG. 2) and deriving SpO₂, pulse rate, a plethysmograph and a pulse indicator. An advanced pulse oximeter for use as the pulse oximeter processor 710 is described in U.S. Patent No. 5,632,272, referenced above. An advanced pulse oximetry sensor for use as the sensor 110 (FIG. 2) attached to the pulse oximeter processor 710 is described in U.S. Patent No. 5,638,818, also referenced above. Further, a line of advanced Masimo SET[®] pulse oximeter OEM boards and sensors are available from the assignee of the present invention. In one embodiment, the pulse oximeter processor 710 is the Masimo SET[®] MS-3L board or a low power MS-5 board.

[0040] The management processor 720 controls the various functions of the portable 610, including asynchronous serial data communications 724 with the pulse oximeter processor 710 and synchronous serial communications 762 with the docking station 660 (FIG. 6). The physical and electrical connection to the docking station 660 (FIG. 6) is via a docking station connector 763 and the docking station interface 760, respectively. The processor 720 utilizes a real-time clock 702 to keep the current date and time, which includes time and date information that is stored along with SpO₂ parameters to create trend data. The processor of the portable 610 and the docking station 660 (FIG. 6) can be from the same family to share common routines and minimize code development time.

[0041] The processor 720 also controls the user interface 800 (FIG. 8A) by transferring data 742 to the display 740, including display updates and visual alarms, and by interpreting keystroke data 752 from the keypad 750. The processor 720 generates various alarm signals, when required, via an enable signal 728, which controls a speaker driver 770. The speaker driver 770 actuates a speaker 772, which provides audible indications such as, for example, alarms and pulse beeps. The processor 720 also monitors system status, which includes battery status 736, indicating battery levels, and docked status 764, indicating whether the portable 610 is connected to the docking station 660 (FIG. 6). When the portable 610 is docked and is on, the processor 720 also decides when to turn on or off docking station power 732.

[0042] Advantageously, the caregiver can set (i.e. configure or program) the behavior of the portable display 740 and alarms when the docked portable 610 senses that an interface cable 690 has connected the docking station 660 to an external pulse oximeter, such as a mul-

tiparameter patient monitoring system. In one user setting, for example, the portable display **740** stops showing the SpO₂ **811** (FIG. 8) and pulse rate **813** (FIG. 8) values when connected to an external pulse oximeter to avoid confusing the caregiver, who can read equivalent values on the patient monitoring system. The display **740**, however, continues to show the plethysmograph **815** (FIG. 8) and visual pulse indicator **817** (FIG. 8) waveforms. For one such user setting, the portable alarms remain active.

[0043] Another task of the processor **720** includes maintenance of a watchdog function. The watchdog **780** monitors processor status on the watchdog data input **782** and asserts the μ P reset output **784** if a fault is detected. This resets the management processor **720**, and the fault is indicated with audible and visual alarms.

[0044] The portable **610** gets its power from batteries in the power supply **730** or from power **766** supplied from the docking station **660** (FIG. 6) via the docking station interface **760**. A power manager **790** monitors the on/off switch on the keypad **750** and turns-on the portable power accordingly. The power manager **790** turns off the portable on command by the processor **720**. DC/DC converters within the power supply **730** generate the required voltages **738** for operation of the portable **610** and docking station power **732**. The portable batteries can be either alkaline rechargeable batteries or another renewable power source: The batteries of the power supply **730** supply docking station power **732** when the docking station **660** (FIG. 6) is without external power. A battery charger within the docking station power supply provides charging current **768** to rechargeable batteries within the power supply **730**. The docking station power supply **990** (FIG. 9) monitors temperature **734** from a thermistor in the rechargeable battery pack, providing an indication of battery charge status.

[0045] A non-volatile memory **706** is connected to the management processor **720** via a high-speed bus **722**. In the present embodiment, the memory **706** is an erasable and field re-programmable device used to store boot data, manufacturing serial numbers, diagnostic failure history, adult SpO₂ and pulse rate alarm limits, neonate SpO₂ and pulse rate alarm limits, SpO₂ and pulse rate trend data, and program data. Other types of non-volatile memory are well known. The SpO₂ and pulse rate alarm limits, as well as SpO₂ related algorithm parameters, may be automatically selected based on the type of sensor **110** (FIG. 2), adult or neonate, connected to the portable **610**.

[0046] The LCD display **740** employs LEDs for a backlight to increase its contrast ratio and viewing distance when in a dark environment. The intensity of the backlight is determined by the power source for the portable **610**. When the portable **610** is powered by either a battery pack within its power supply **730** or a battery pack in the docking station power supply **990** (FIG. 9), the backlight intensity is at a minimum level. When the portable **610** is powered by external power **668** (FIG. 6), the backlight is at a higher intensity to increase viewing distance and

angle. In one embodiment, button on the portable permits overriding these intensity settings, and provides adjustment of the intensity. The backlight is controlled in two ways. Whenever any key is pressed, the backlight is illuminated for a fixed number of seconds and then turns off, except when the portable is docked and derives power from an external source. In that case, the backlight is normally on unless deactivated with a key on the portable **610**.

[0047] FIG. 8A illustrates the portable user interface **800**, which includes a display **740** and a keypad **750**. In one embodiment, the display **740** is a dot matrix LCD device having 160 pixels by **480** pixels. The display **740** can be shown in portrait mode, illustrated in FIG. 8B, or in landscape mode, illustrated in FIG. 8C. A tilt sensor **950** (FIG. 9) in the docking station **660** (FIG. 6) or a display mode key on the portable **610** (FIG. 6) determines portrait or landscape mode. The tilt sensor **950** (FIG. 9) can be a gravity-activated switch or other device responsive to orientation and can be alternatively located in the portable **610** (FIG. 6). In a particular embodiment, the tilt sensor **950** (FIG. 9) is a non-mercury tilt switch, part number CW 1300-1, available from Comus International, Nutley, NJ (www.comus-intl.com). The tilt sensor **950** (FIG. 9) could also be a mercury tilt switch.

[0048] Examples of how the display area can be used to display SpO₂ **811**, pulse rate **813**, a plethysmographic waveform **815**, a visual pulse indicator **817** and soft key icons **820** in portrait and landscape mode are shown in FIGS. 8B and 8C, respectively. The software program of the management processor **720** (FIG. 7) can be easily changed to modify the category, layout and size of the display information shown in FIGS. 8B-C. Other advantageous information for display is SpO₂ limits, alarm, alarm disabled, exception messages and battery status.

[0049] The keypad **750** includes soft keys **870** and fixed keys **880**. The fixed keys **880** each have a fixed function. The soft keys **870** each have a function that is programmable and indicated by one of the soft key icons **820** located next to the soft keys **870**. That is, a particular one of the soft key icons **820** is in proximity to a particular one of the soft keys **870** and has a text or a shape that suggests the function of that particular one of the soft keys **870**. In one embodiment, the button portion of each key of the keypad **750** is constructed of florescent material so that the keys **870**, **880** are readily visible in the dark.

[0050] In one embodiment, the keypad **750** has one row of four soft keys **870** and one row of three fixed keys **880**. Other configurations are, of course, available, and specific arrangement is not significant. The functions of the three fixed keys **880** are power, alarm silence and light/contrast. The power function is an on/off toggle button. The alarm silence function and the light/contrast function have dual purposes depending on the duration of the key press. A momentary press of the key corresponding to the alarm silence function will disable the audible alarm for a fixed period of time. To disable the audible alarm indefinitely, the key corresponding to the

alarm silence function is held down for a specified length of time. If the key corresponding to the alarm silence function is pressed while the audible alarm has been silenced, the audible alarm is reactivated. If the key corresponding to the light/contrast function is pressed momentarily, it is an on/off toggle button for the backlight. If the key corresponding to the light/contrast function is held down, the display contrast cycles through its possible values.

[0051] In this embodiment, the default functions of the four soft keys **870** are pulse beep up volume, pulse beep down volume, menu select, and display mode. These functions are indicated on the display by the up arrow, down arrow, "menu" and curved arrow soft key icons **820**, respectively. The up volume and down volume functions increase or decrease the audible sound or "beep" associated with each detected pulse. The display mode function rotates the display **740** through all four orthogonal orientations, including portrait mode (FIG. **8B**) and landscape mode (FIG. **8C**), with each press of the corresponding key. The menu select function allows the functionality of the soft keys **870** to change from the default functions described above. Examples of additional soft key functions that can be selected using this menu feature are set SpO₂ high/low limit, set pulse rate high/low limit, set alarm volume levels, set display to show trend data, print trend data, erase trend data, set averaging time, set sensitivity mode, perform synchronization, perform rechargeable battery maintenance (deep discharge/recharge to remove battery memory), and display product version number.

[0052] FIG. **9** provides further details of the docking station **660**, which includes a docking station processor **910**, a non-volatile memory **920**, a waveform generator **930**, a PROM interface **940**, a tilt sensor **950**, a portable interface **970** and associated connector **972**, status indicators **982**, a serial data port **682**, a nurse call output **684**, an analog output **688** and a power supply **990**. In one embodiment, the docking station **660** is intended to be associated with a fixed (non-transportable) host instrument, such as a multiparameter patient monitoring instrument in a hospital emergency room. In a transportable embodiment, the docking station **660** is movable, and includes a battery pack within the power supply **990**.

[0053] The docking station processor **910** orchestrates the activity on the docking station **660**. The processor **910** provides the waveform generator **930** with parameters **932** as discussed above for Figures 3 and 4. The processor **910** also provides asynchronous serial data **912** for communications with external devices and synchronous serial data **971** for communications with the portable **610** (FIG. **6**). In addition, the processor **910** determines system status including sync status **942**, tilt status **952** and power status **992**. The portable management processor **720** (FIG. **7**) performs the watchdog function for the docking station processor **910**. The docking station processor **910** sends watchdog messages to the portable processor **720** (FIG. **7**) as part of the synchronous serial data **972** to ensure the correct operation of

the docking station processor **910**.

[0054] The docking station processor **910** accesses non-volatile memory **920** over a high-speed bus **922**. The non-volatile memory **920** is re-programmable and contains program data for the processor **910** including instrument communication protocols, synchronization information, a boot image, manufacturing history and diagnostic failure history.

[0055] The waveform generator **930** generates a synthesized waveform that a conventional pulse oximeter can process to calculate SpO₂ and pulse rate values or exception messages, as described above with respect to FIG. **4**. However, in the present embodiment, as explained above, the waveform generator output does not reflect a physiological waveform. It is merely a waveform constructed to cause the external pulse oximeter to calculate the correct saturation and pulse rate.. In an alternative embodiment, physiological data could be provided to the external pulse oximeter, but the external pulse oximeter would generally not be able to calculate the proper saturation values, and the upgrading feature would be lost. The waveform generator **930** is enabled if an interface cable **690** (FIG. **6**), described below with respect to FIG. **10**, with valid synchronization information is connected. Otherwise, the power to the waveform generator **930** is disabled.

[0056] The status indicators **982** are a set of LEDs on the front of the docking station **660** used to indicate various conditions including external power (AC), portable docked, portable battery charging, docking station battery charging and alarm. The serial data port **682** is used to interface with either a computer, a serial port of conventional pulse oximeters or serial printers via a standard RS-232 DB-9 connector **962**. This port **682** can output trend memory, SpO₂ and pulse rate and support the system protocols of various manufacturers. The analog output **688** is used to interface with analog input chart recorders via a connector **954** and can output "real-time" or trend SpO₂ and pulse rate data. The nurse call output **684** from a connector **964** is activated when alarm limits are exceeded for a predetermined number of consecutive seconds. In another embodiment, data, including alarms, could be routed to any number of communications ports, and even over the internet, to permit remote use of the upgrading pulse oximeter.

[0057] The PROM interface **940** accesses synchronization data **692** from the PROM **1010** (FIG. **10**) in the interface cable **690** (FIGS. **6**, **10**) and provides synchronization status **942** to the docking station processor **910**. The portable interface **970** provides the interconnection to the portable **610** (FIG. **6**) through the docking station interface **760** (FIG. **7**).

[0058] As shown in FIG. **9**, external power **668** is provided to the docking station **660** through a standard AC connector **968** and on/off switch **969**. When the docking station **660** has external power **668**, the power supply **990** charges the battery in the portable power supply **730** (FIG. **7**) and the battery, if any, in the docking station

power supply 990. When the portable 610 (FIG. 6) is either removed or turned off, the docking station power 973 is removed and the docking station 660 is turned off, except for the battery charger portion of the power supply 990. The docking station power 973 and, hence, the docking station 660 turn on whenever a docked portable 610 (FIG. 6) is turned on. The portable 610 (FIG. 6) supplies power for an embodiment of the docking station 660 without a battery when external power 668 is removed or fails.

[0059] FIG. 10 provides further detail regarding the interface cable 690 used to connect between the docking station 660 (FIG. 6) and the patient cable 230 (FIG. 2) of a host instrument 260 (FIG. 2). The interface cable 690 is configured to interface to a specific host instrument and to appear to the host instrument as a specific sensor. A PROM 1010 built into the interface cable 690 contains information identifying a sensor type, a specific host instrument, and the calibration curve of the specific host instrument. The PROM information can be read by the docking station 660 (FIG. 6) as synchronization data 692. Advantageously, the synchronization data 692 allows the docking station 660 (FIG. 6) to generate a waveform to the host instrument that causes the host instrument to display SpO₂ values equivalent to those calculated by the portable 610 (FIG. 6). The interface cable 690 includes an LED drive path 672. In the embodiment shown in FIG. 10, the LED drive path 672 is configured for common anode LEDs and includes IR cathode, red cathode and common anode signals. The interface cable 690 also includes a detector drive path 674, including detector anode and detector cathode signals.

[0060] A menu option on the portable 610 (FIG. 6) also allows synchronization information to be calculated in the field. With manual synchronization, the docking station 660 (FIG. 6) generates a waveform to the host instrument 260 (FIG. 2) and displays an expected SpO₂ value. The user enters the SpO₂ value displayed on the host instrument using the portable keypad 750 (FIG. 7). These steps are repeated until a predetermined number of data points are entered and the SpO₂ values displayed by the portable and the host instrument are consistent.

[0061] FIGS. 11A-B depict an embodiment of the portable 610, as described above with respect to FIG. 6. FIGS. 12A-B depict an embodiment of the docking station 660, as described above with respect to FIG. 6. FIG. 13 depicts an embodiment of the UPO 210 where the portable 610 is docked with the docking station 660, also as described above with respect to FIG. 6.

[0062] FIG. 11A depicts the portable front panel 1110. The portable 610 has a patient cable connector 618, as described above with respect to FIG. 6. Advantageously, the connector 618 is rotatably mounted so as to minimize stress on an attached patient cable (not shown). In one embodiment, the connector 618 can freely swivel between a plane parallel to the front panel 1110 and a plane parallel to the side panel 1130. In another embodiment, the connector 618 can swivel between, and be releasably

retained in, three locked positions. A first locked position is as shown, where the connector is in a plane parallel to the front panel 1110. A second locked position is where the connector 618 is in a plane parallel to the side panel 1130. The connector 618 also has an intermediate locked position 45° between the first and the second locked positions. The connector 618 is placed in the first locked position for attachment to the docking station 660.

[0063] Shown in FIG. 11A, the portable front panel 1110 also has a speaker 772, as described with respect to FIG. 7. Further, the front panel 1110 has a row of soft keys 870 and fixed keys 880, as described above with respect to FIG. 8. In addition, the front panel 1110 has a finger actuated latch 1120 that locks onto a corresponding catch 1244 (FIG. 12A) in the docking station 660, allowing the portable 610 to be releasably retained by the docking station 660. An OEM label can be affixed to a recessed area 1112 on the front panel 1110.

[0064] FIG. 11B depicts the portable back panel 1140. The back panel 1140 has a socket 763, a pole clamp mating surface 1160, and a battery pack compartment 1170. The socket 763 is configured to mate with a corresponding docking station plug 972 (FIG. 12A). The socket 763 and plug 972 (FIG. 12A) provide the electrical connection interface between the portable 610 and the docking station 660 (FIG. 12A). The socket 763 houses multiple spring contacts that compress against plated edge-connector portions of the docking station plug 972 (FIG. 12A). A conventional pole clamp (not shown) may be removably attached to the mating surface 1160. This conveniently allows the portable 610 to be held to various patient-side or bedside mounts for hands-free pulse oximetry monitoring. The portable power supply 730 (FIG. 7) is contained within the battery pack compartment 1170. The compartment 1170 has a removable cover 1172 for protection, insertion and removal of the portable battery pack. Product labels, such as a serial number identifying a particular portable, can be affixed with the back panel indent 1142.

[0065] FIG. 12A depicts the front side 1210 of the docking station 660. The front side 1210 has a docking compartment 1220, a pole clamp recess 1230, pivots 1242, a catch 1244, a plug connector 972 and LED status indicators 982. The docking compartment 1220 accepts and retains the portable 610 (FIGS. 11A-B), as shown in FIG. 13. When the portable 610 (FIGS. 11A-B) is docked in the compartment 1220, the pole clamp recess 1230 accommodates a pole clamp (not shown) attached to the portable's pole clamp mating surface 1160 (FIG. 11B), assuming the pole clamp is in its closed position. The portable 610 (FIGS. 11A-B) is retained in the compartment 1220 by pivots 1242 that fit into corresponding holes in the portable's side face 1130 and a catch 1244 that engages the portable's latch 1120 (FIG. 11A). Thus, the portable 610 (FIGS. 11A-B) is docked by first attaching it at one end to the pivots 1242, then rotating it about the pivots 1242 into the compartment 1220, where it is latched in place on the catch 1244. The portable 610

(FIGS. 11A-B) is undocked in reverse order, by first pressing the latch 1120 (FIG. 11A), which releases the portable from the catch 1244, rotating the portable 610 (FIGS. 11A-B) about the pivots 1242 out of the compartment 1220 and then removing it from the pivots 1242. As the portable is rotated into the compartment, the docking station plug 972 inserts into the portable socket 763 (FIG. 11B), providing the electrical interface between the portable 610 and the docking station 660. The status indicators 982 are as described above with respect to FIG. 9.

[0066] FIG. 12B depicts the back side 1260 of the docking station 660. The back side 1260 has a serial (RS-232 or USB) connector 962, an analog output and nurse call connector 964, an upgrade port connector 966, an AC power plug 968, an on/off switch 969 and a ground lug 1162. A handle 1180 is provided at one end and fan vents 1170 are provided at the opposite end. A pair of feet 1190 are visible near the back side 1260. A corresponding pair of feet (not visible) are located near the front side 1210 (FIG. 12A). The feet near the front side 1210 extend so as to tilt the front side 1210 (FIG. 12A) upward, making the display 740 (FIG. 13) of a docked portable 610 (FIG. 13) easier to read.

[0067] FIG. 13 illustrates both the portable 610 and the docking station 660. The portable 610 and docking station 660 constitute three distinct pulse oximetry instruments. First, the portable 610 by itself, as depicted in FIGS. 11A-B is a handheld pulse oximeter applicable to various patient monitoring tasks requiring battery power or significant mobility, such as ambulance and ER situations. Second, the portable 610 docked in the docking station 660, as depicted in FIG. 13, is a standalone pulse oximeter applicable to a wide-range of typical patient monitoring situations from hospital room to the operating room. Third, the portable 610 docked and the upgrade port 966 (FIG. 12B) connected with an interface cable to the sensor port of a conventional pulse oximeter module 268 (FIG. 2) within a multiparameter patient monitoring instrument 260 (FIG. 2) or other conventional pulse oximeter, is a universal/upgrading pulse oximeter (UPO) instrument 210, as described herein. Thus, the portable 610 and docking station 660 configuration of the UPO 210 advantageously provides a three-in-one pulse oximetry instrument functionality.

[0068] Another embodiment of the docking station 660 incorporates an input port that connects to a blood pressure sensor and an output port that connects to the blood pressure sensor port of a multiparameter patient monitoring system (MPMS). The docking station 660 incorporates a signal processor that computes a blood pressure measurement based upon an input from the blood pressure sensor. The docking station 660 also incorporates a waveform generator connected to the output port that produces a synthesized waveform based upon the computed measurement. The waveform generator output is adjustable so that the blood pressure value displayed on the MPMS is equivalent to the computed blood pressure

measurement. Further, when the portable 610 is docked in the docking station 660 and the blood pressure sensor is connected to the input port, the portable displays a blood pressure value according to the computed blood pressure measurement. Thus, in this embodiment, the docking station 660 provides universal/upgrading capability for both blood pressure and SpO₂.

[0069] Likewise, the docking station 660 can function as an universal/upgrading instrument for other vital sign measurements, such as respiratory rate, EKG or EEG. For this embodiment, the docking station 660 incorporates related sensor connectors and associated sensor signal processors and upgrade connectors to an MPMS or standalone instrument. In this manner, a variety of vital sign measurements can be incorporated into the docking station 660, either individually or in combination, with or without SpO₂ as a measurement parameter, and with or without the portable 610. In yet another embodiment, the docking station 660 can be configured as a simple SpO₂ upgrade box, incorporating a SpO₂ processor and patient cable connector for a SpO₂ sensor that functions with or without the portable 610.

[0070] Unlike a conventional standalone pulse oximeter, the standalone configuration shown in FIG. 13 has a rotatable display 740 that allows the instrument to be operated in either a vertical or horizontal orientation. A tilt sensor 950 (FIG. 9) indicates when the bottom face 1310 is placed along a horizontal surface or is otherwise horizontally-oriented. In this horizontal orientation, the display 740 appears in landscape mode (FIG. 8C). The tilt sensor 950 (FIG. 9) also indicates when the side face 1320 is placed along a horizontal surface or is otherwise horizontally oriented. In this vertical orientation, the display 740 appears in portrait mode (FIG. 8B). A soft key 870 on the portable 610 can override the tilt sensor, allowing the display to be presented at any 90° orientation, i.e. portrait, landscape, "upside-down" portrait or "upside-down" landscape orientations. The handheld configuration (FIG. 11A), can also present the display 740 at any 90° orientation using a soft key 870. In the particular embodiment described above, however, the portable 610 does not have a tilt sensor and, hence, relies on a soft key 870 to change the orientation of the display when not docked.

[0071] FIG. 14 illustrates the docking station 660 incorporated within a local area network (LAN). The LAN shown is Ethernet-based 1460, using a central LAN server 1420 to interconnect various LAN clients 1430 and other system resources such as printers and storage (not shown). An Ethernet controller module 1410 is incorporated with the docking station 660. The controller module 1410 can be incorporated within the docking station 660 housing or constructed as an external unit. In this manner, the UPO, according to the present invention, can communicate with other devices on the LAN or over the Internet 1490.

[0072] The Ethernet controller module 1410 can be embedded with web server firmware, such as the

Hewlett-Packard (HP) BFOOT-10501. The module **1410** has both a 10 Base-T Ethernet interface for connection to the Ethernet **1460** and a serial interface, such as RS-232 or USB, for connection to the docking station **660**. The module firmware incorporates HTTP and TCP/IP protocols for standard communications over the World Wide Web. The firmware also incorporates a micro web server that allows custom web pages to be served to remote clients over the Internet, for example. Custom C++ programming allows expanded capabilities such as data reduction, event detection and dynamic web page configuration.

[0073] As shown in FIG. **14**, there are many applications for the docking station **660** to Ethernet interface. Multiple UPOs can be connected to a hospital's LAN, and a computer on the LAN could be utilized to upload pulse rate and saturation data from the various UPOs, displaying the results. Thus, this Ethernet interface could be used to implement a central pulse oximetry monitoring station within a hospital. Further, multiple UPOs from anywhere in the world can be monitored from a central location via the Internet. Each UPO is addressable as an individual web site and downloads web pages viewable on a standard browser, the web pages displaying oxygen saturation, pulse rate and related physiological measurements from the UPO. This feature allows a caregiver to monitor a patient regardless of where the patient or caregiver is located. For example a caregiver located at home in one city or at a particular hospital could download measurements from a patient located at home in a different city or at the same or a different hospital. Other applications include troubleshooting newly installed UPOs or uploading software patches or upgrades to UPOs via the Internet. In addition alarms could be forwarded to the URL of the clinician monitoring the patient.

[0074] The UPO may have other configurations besides the handheld unit described in connection with FIG. **5** or the portable **610** and docking station **660** combination described in connection with FIGS. 11-13. The UPO may be a module, with or without a display, that can be removably fastened to a patient via an arm strap, necklace or similar means. In a smaller embodiment, this UPO module may be integrated into a cable or connector used for attaching a sensor to a pulse oximeter. The UPO may also be a circuit card or module that can externally or internally plug into or mate with a standalone pulse oximeter or multiparameter patient monitoring system. Alternatively, the UPO may be configured as a simple standalone upgrade instrument.

[0075] Further, although a universal/upgrading apparatus and method have been mainly described in terms of a pulse oximetry measurement embodiment, the present invention is equally applicable to other physiological measurement parameters such as blood pressure, respiration rate, EEG and ECG, to name a few. In addition, a universal/upgrading instrument having a single physiological measurement parameter or a multiple measurement parameter capability and configured as a

handheld, standalone, portable, docking station, module, plug-in, circuit card, to name a few, is also within the scope of the present invention.

[0076] The UPO has been disclosed in detail in connection with various embodiments of the present invention. These embodiments are disclosed by way of examples only and are not to limit the scope of the present invention, which is defined by the claims that follow. One of ordinary skill in the art will appreciate many variations and modifications within the scope of this invention.

Claims

1. A patient monitoring system comprising:
 - a portable physiological measurement device comprising a first local display and capable of operating in a portable mode, said portable mode providing portable monitoring as a standalone unit of one or more physiological parameters of a patient through communication with one or more sensors, and capable of operating in a docked mode, said docked mode providing monitoring of one or more physiological parameters of a patient; and
 - a docking station forming a patient monitoring system when combined with the portable physiological measurement device, said docking station configured to mate with the portable physiological measurement device when the portable physiological measurement device is operating in at least the docked mode, wherein the portable physiological measurement device is in electrical communication with the docking station, and further wherein the docking station is in electrical communication with a second local display.
2. The patient monitoring system of Claim 1, wherein the docking station further comprises a management processor.
3. The patient monitoring system of Claim 2, wherein the management processor generates an output usable by a second patient monitoring system in communication with the docking station to cause to be displayed at least one of the monitored one or more physiological parameters of the patient when the portable physiological measurement device is operating in at least the docked mode.
4. The patient monitoring system of Claim 3, wherein the patient monitoring system communicates with a display device.
5. The patient monitoring system of Claim 1, wherein the one or more physiological parameters comprises

one or more of blood oxygen content, respiratory gas, blood pressure, ECG, and pulse rate.

6. A patient monitoring method utilizing a portable measurement apparatus comprising the steps of: 5

performing a first physiological measurement with a portable measurement apparatus physically and electrically isolated from a docking station forming a standalone patient monitoring system, wherein said docking station is configured to mate with the portable measurement apparatus when the portable physiological measurement apparatus is operating in at least a docked mode, wherein the portable physiological measurement device is in electrical communication with the docking station, and further wherein the docking station is in electrical communication with a second local display presenting information related to said first measurement on a display portion of said standalone apparatus; 10

performing a second physiological measurement with said portable measurement apparatus mated with said docking station; 15

communicating said second physiological measurement to said docking station; and 20

presenting information related to said second measurement on a monitor in communication with said docking station. 25 30

7. The method of Claim 6, further comprising presenting information related to said first measurement on a monitor in communication with said docking station when said portable physiological measurement apparatus is mated with said docking station. 35

8. The method of Claim 6, wherein the physiological measurement comprises a measurement of one or more of blood oxygen content, respiratory gas, blood pressure, ECG, and pulse rate. 40

45

50

55

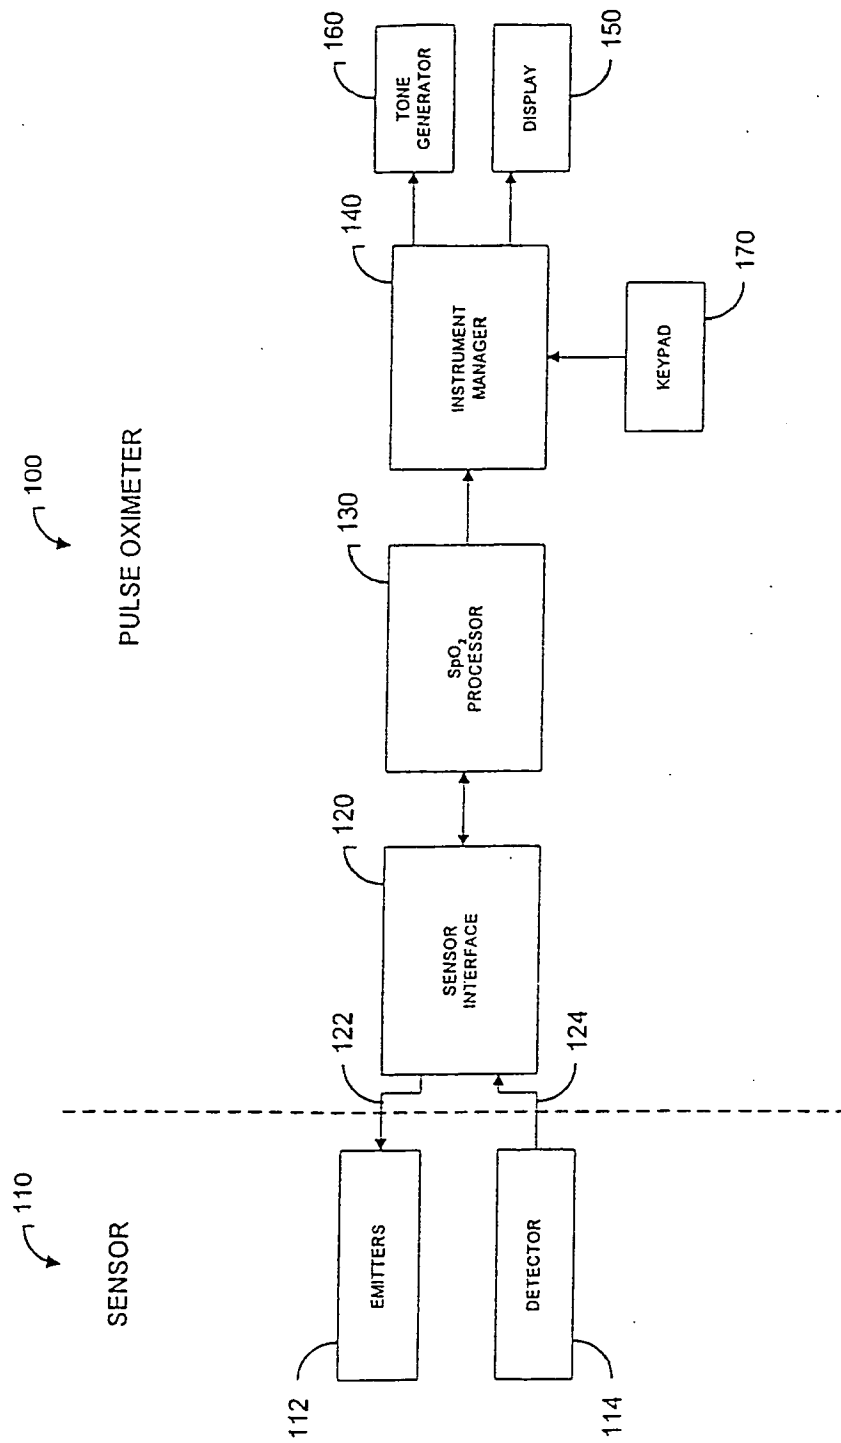


FIG. 1 (prior art)

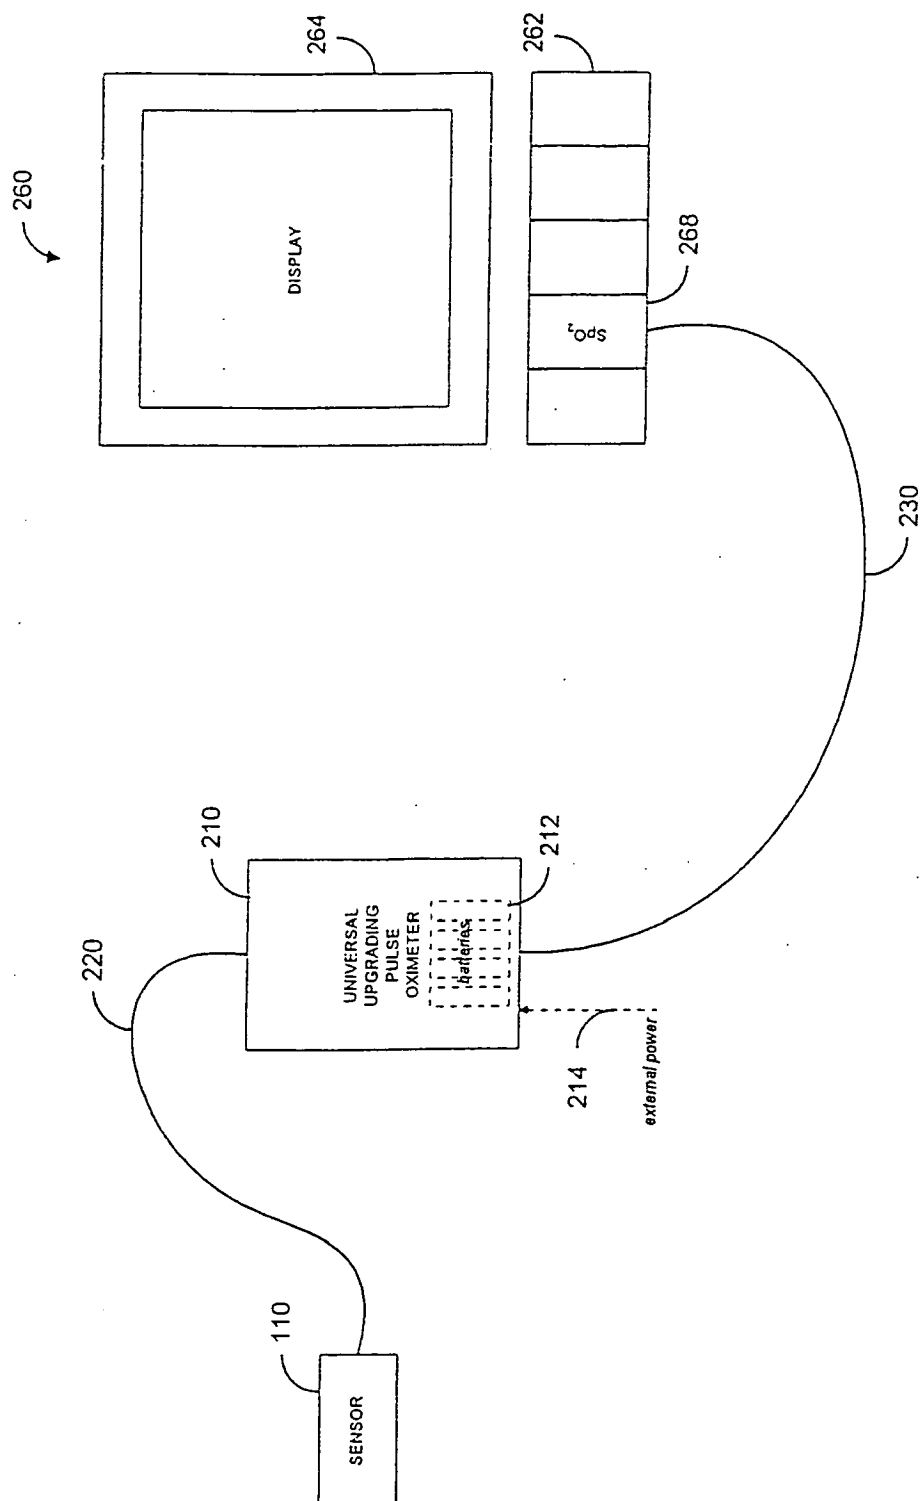


FIG. 2

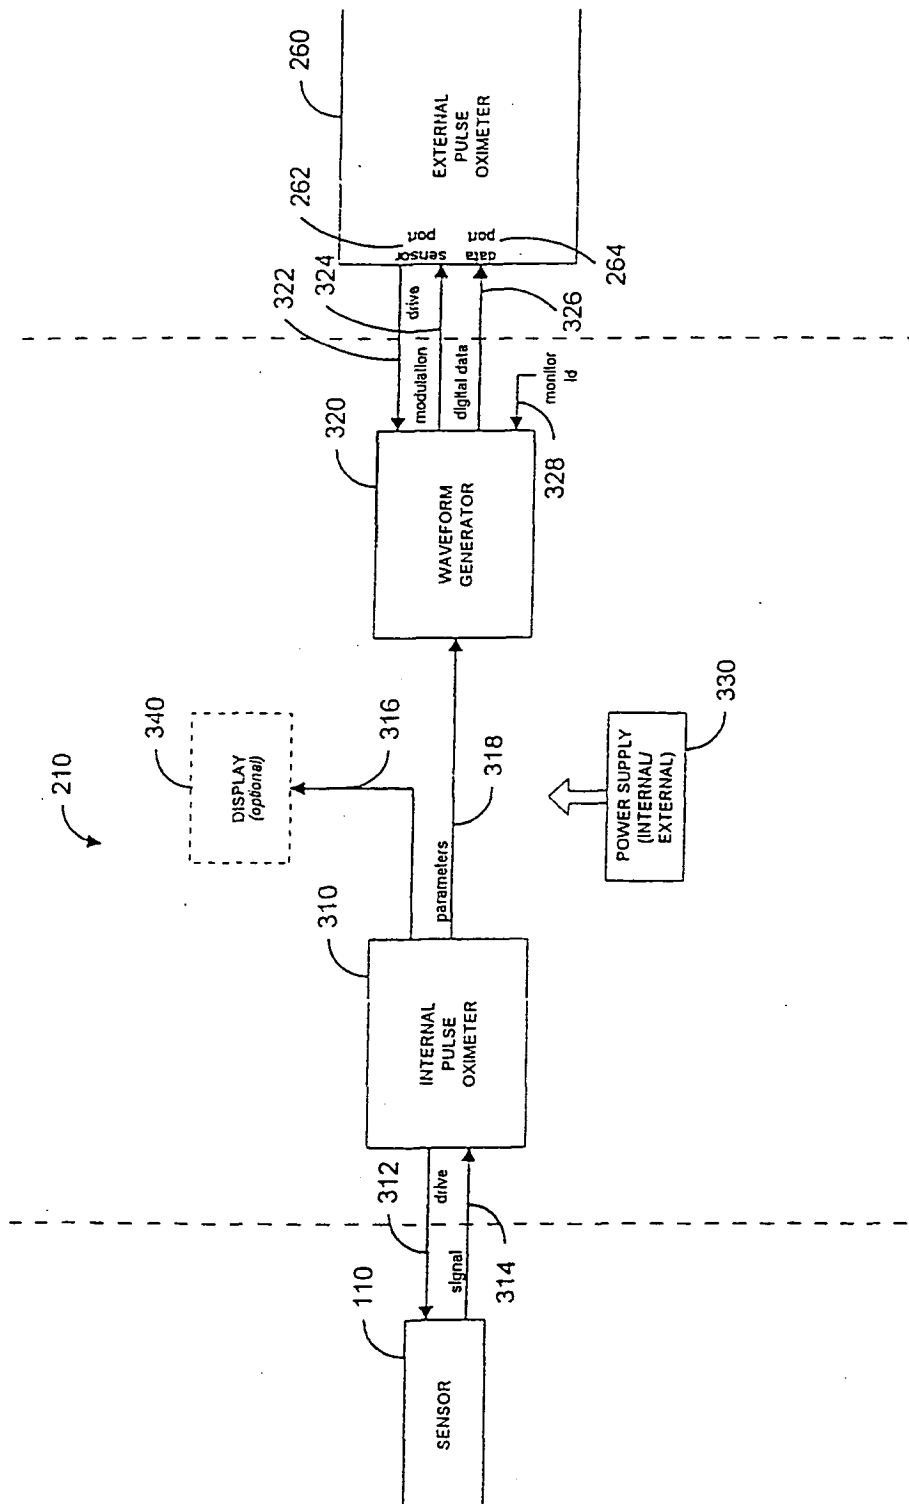


FIG. 3

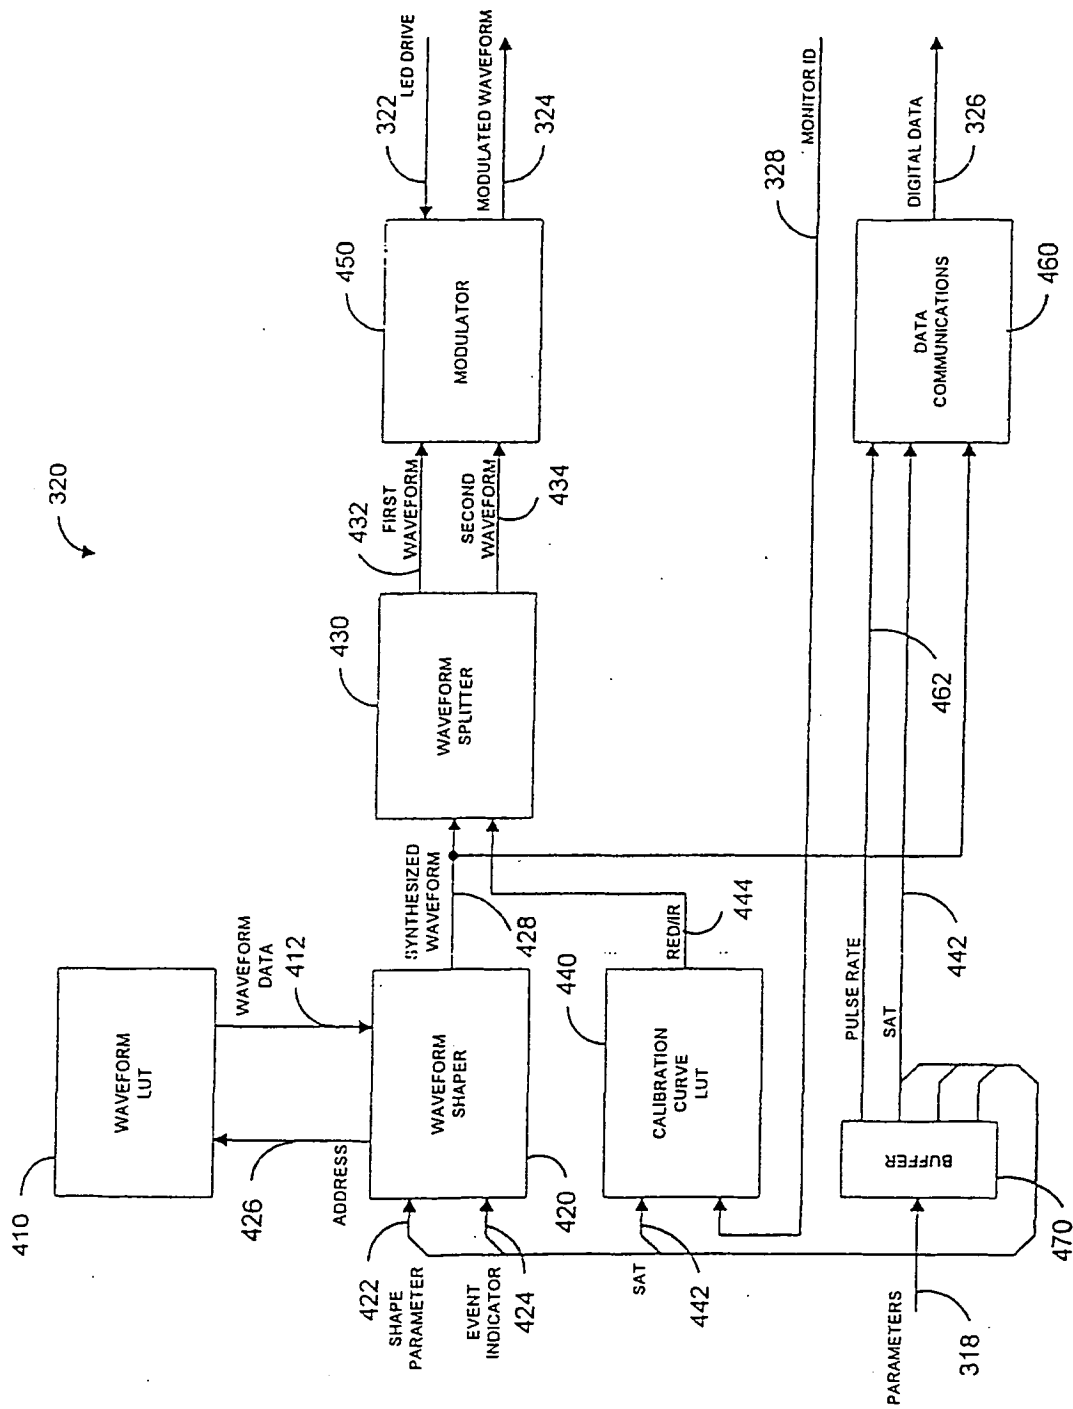


FIG. 4

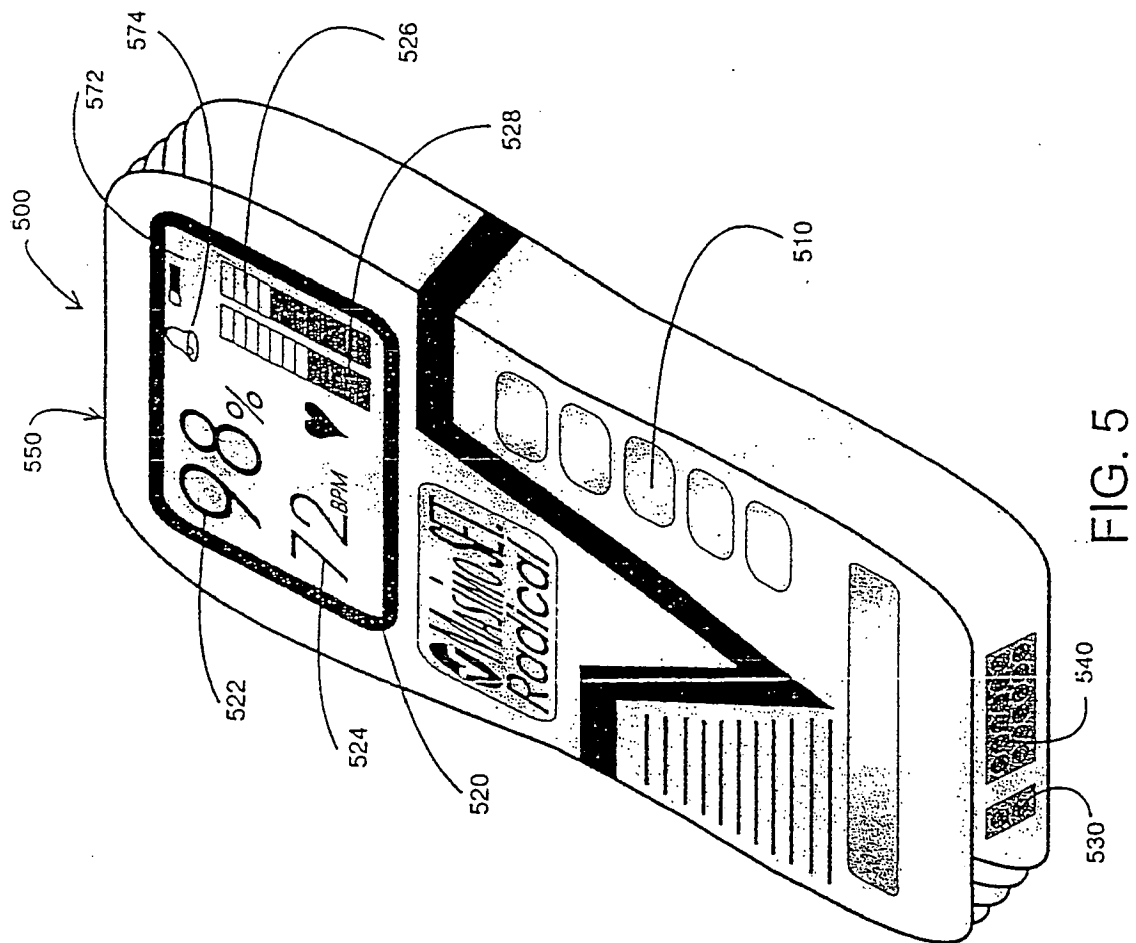


FIG. 5

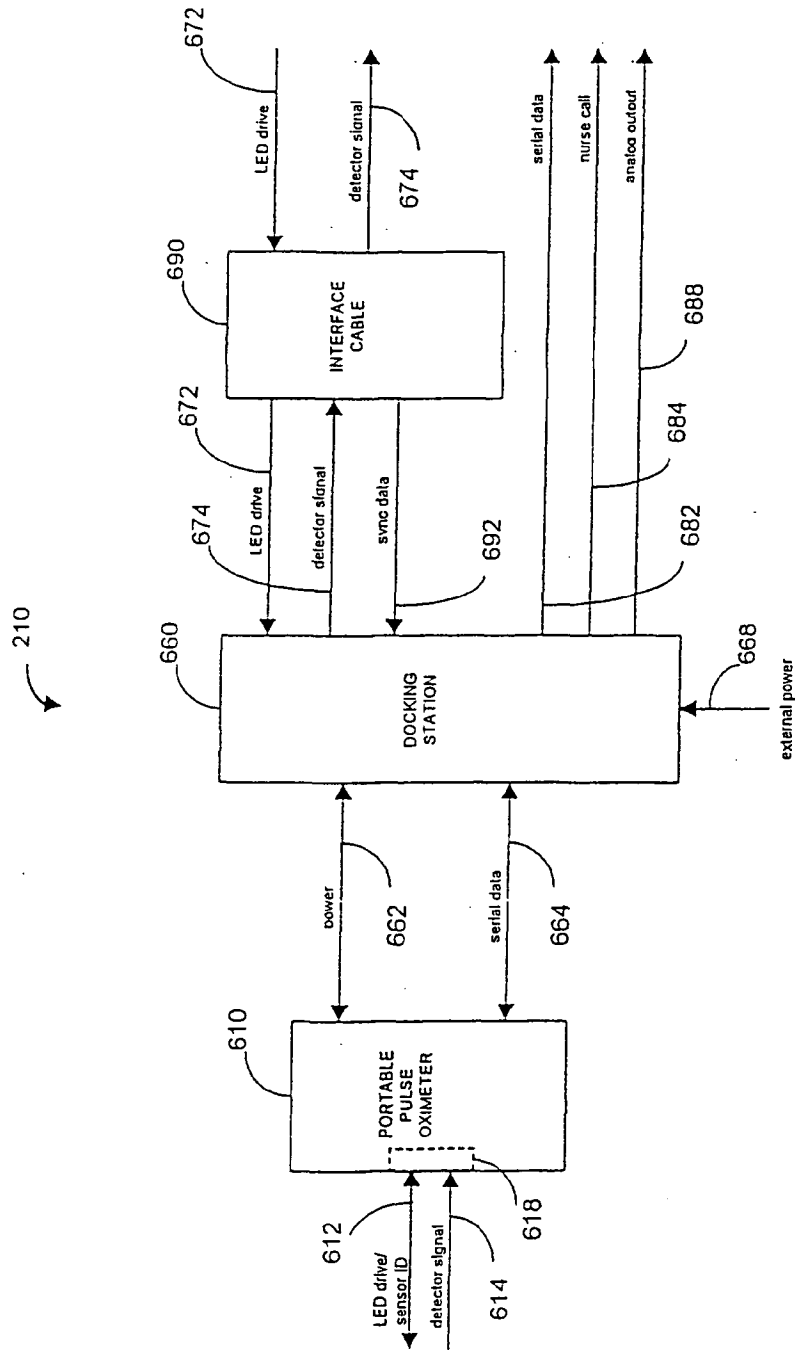


FIG. 6

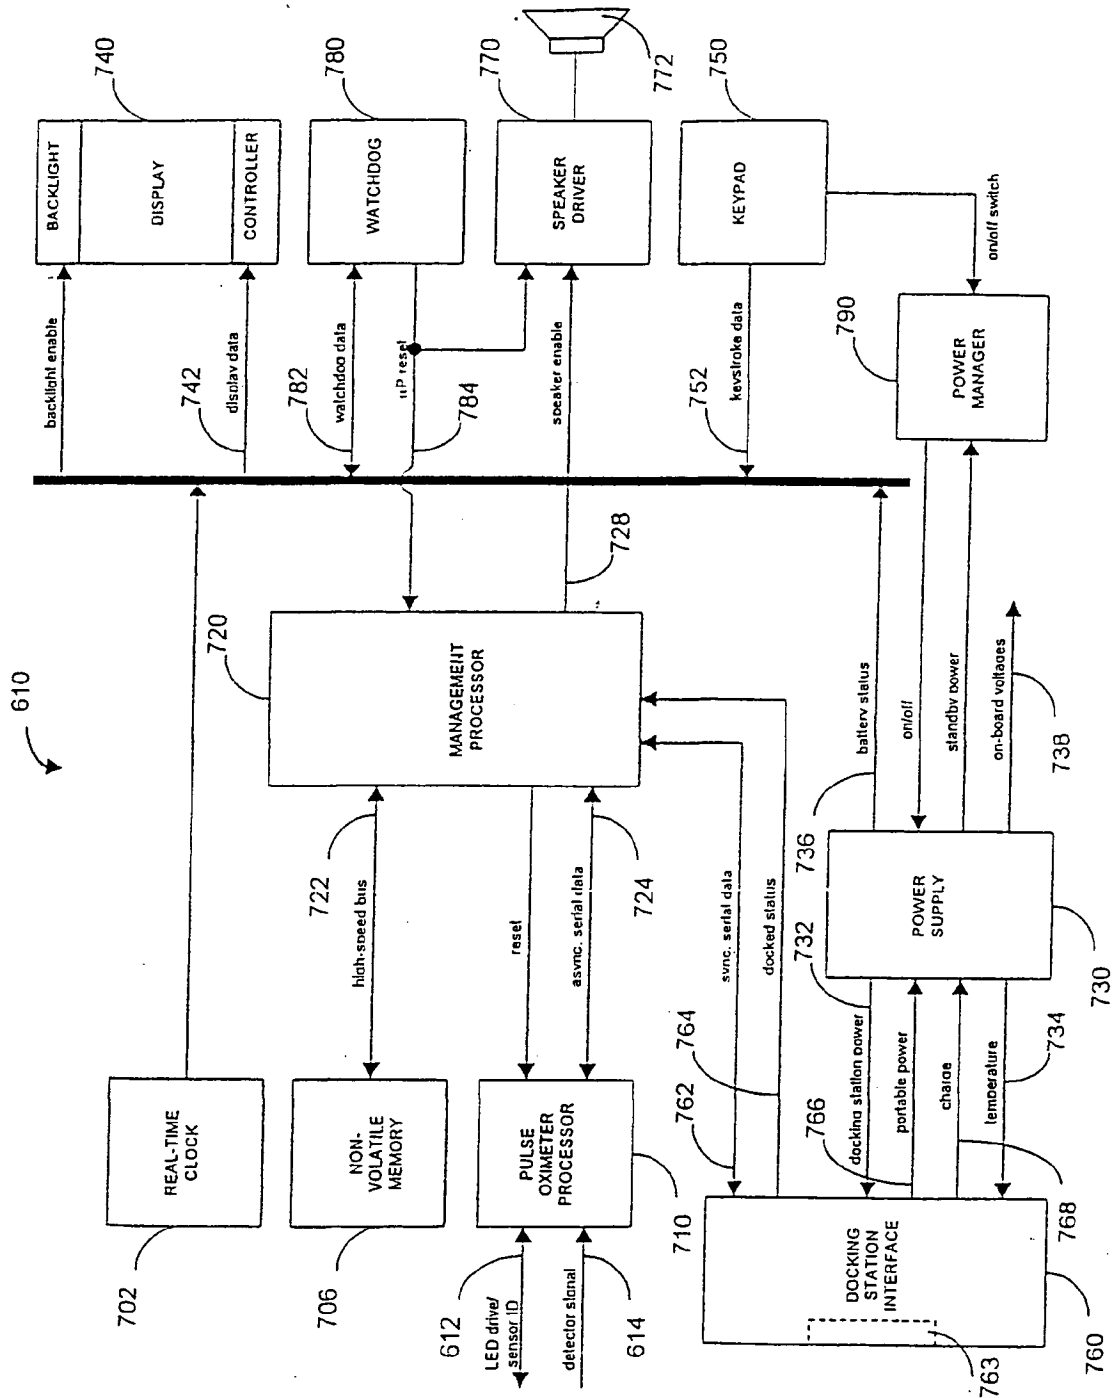


FIG. 7

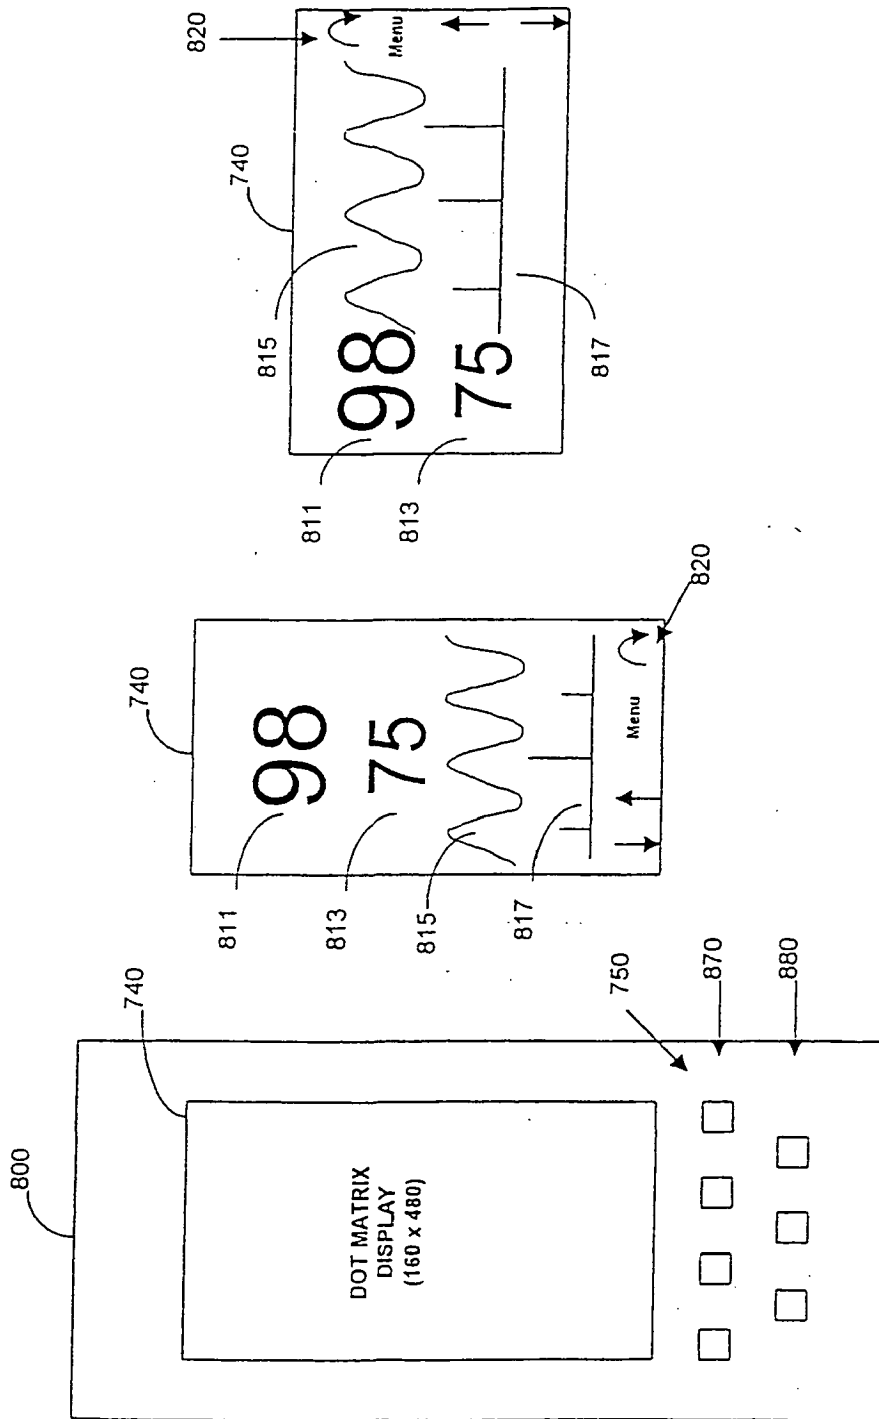


FIG. 8C

FIG. 8B

FIG. 8A

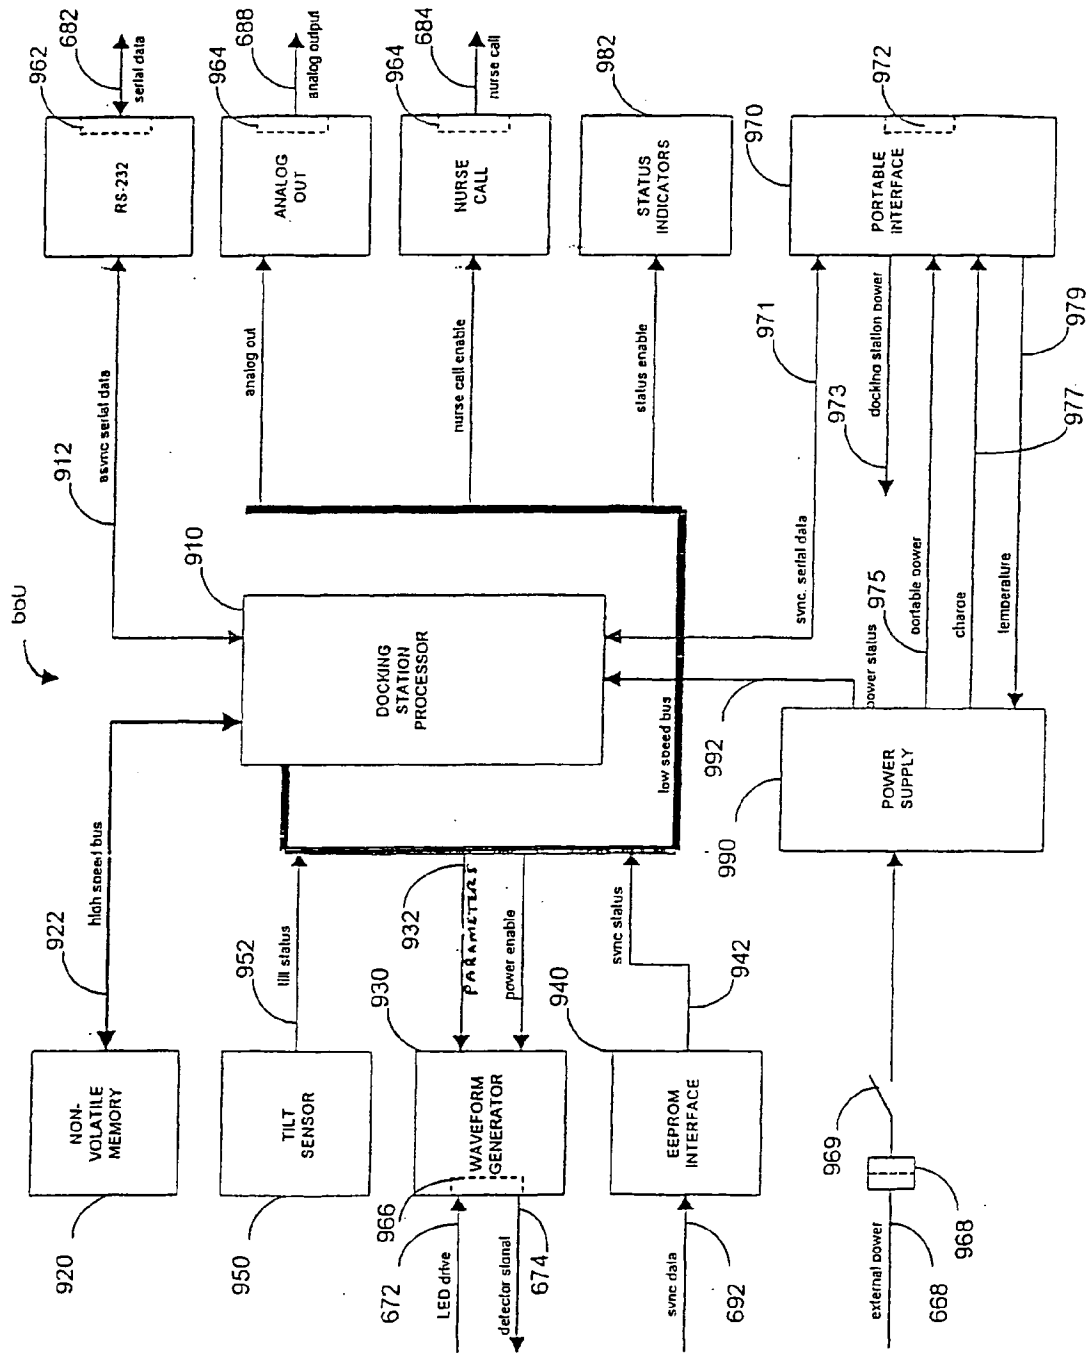


FIG. 9

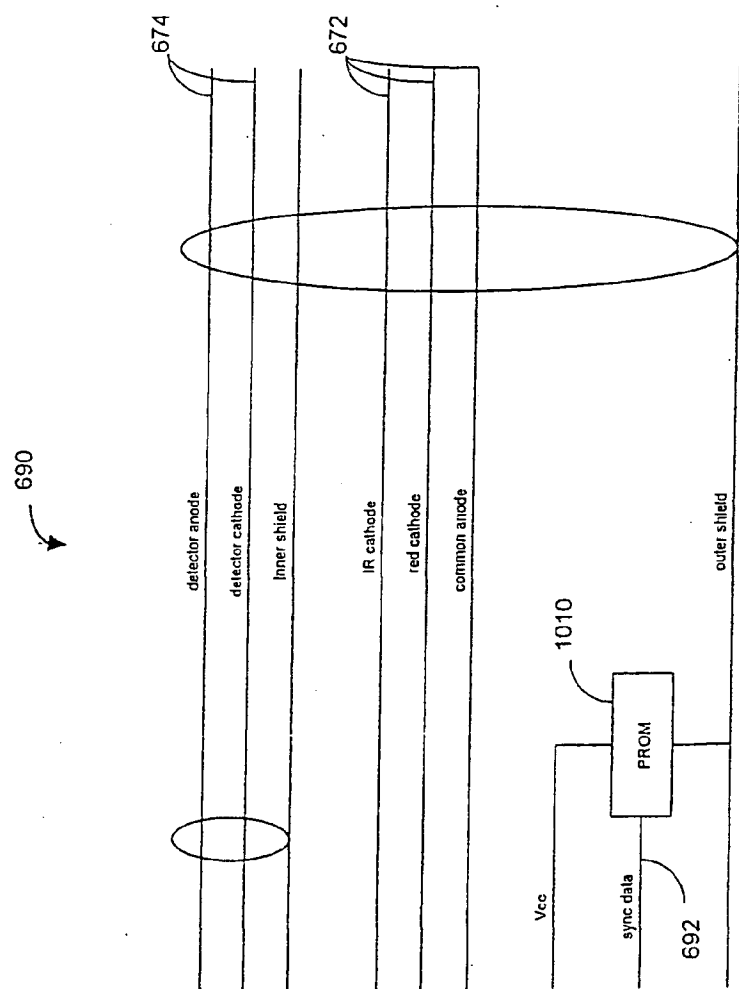


FIG. 10

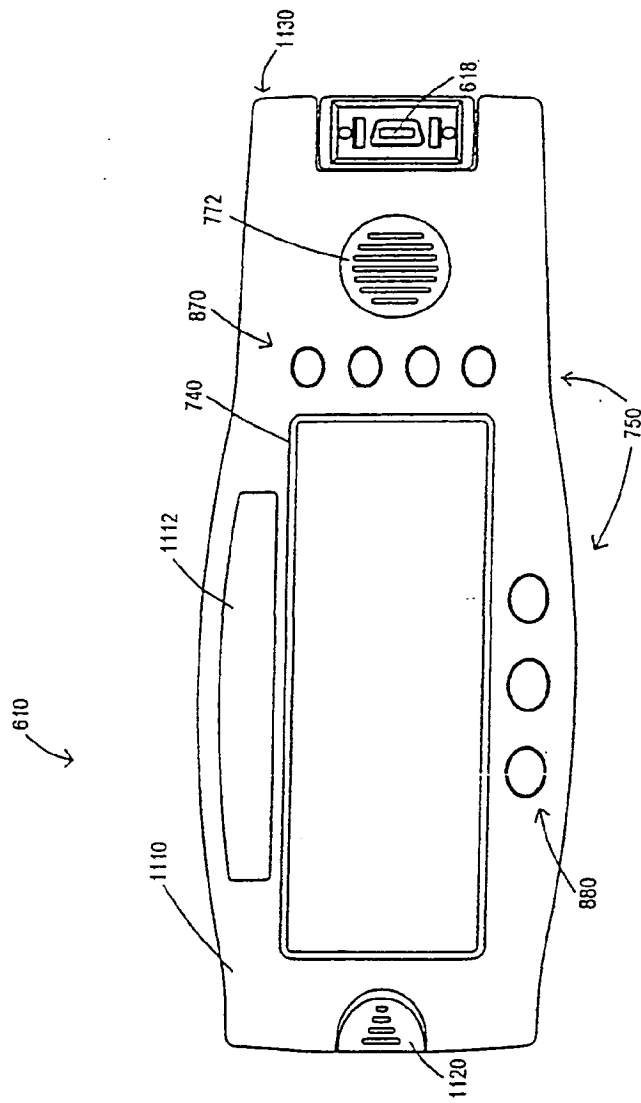


FIG. 11A

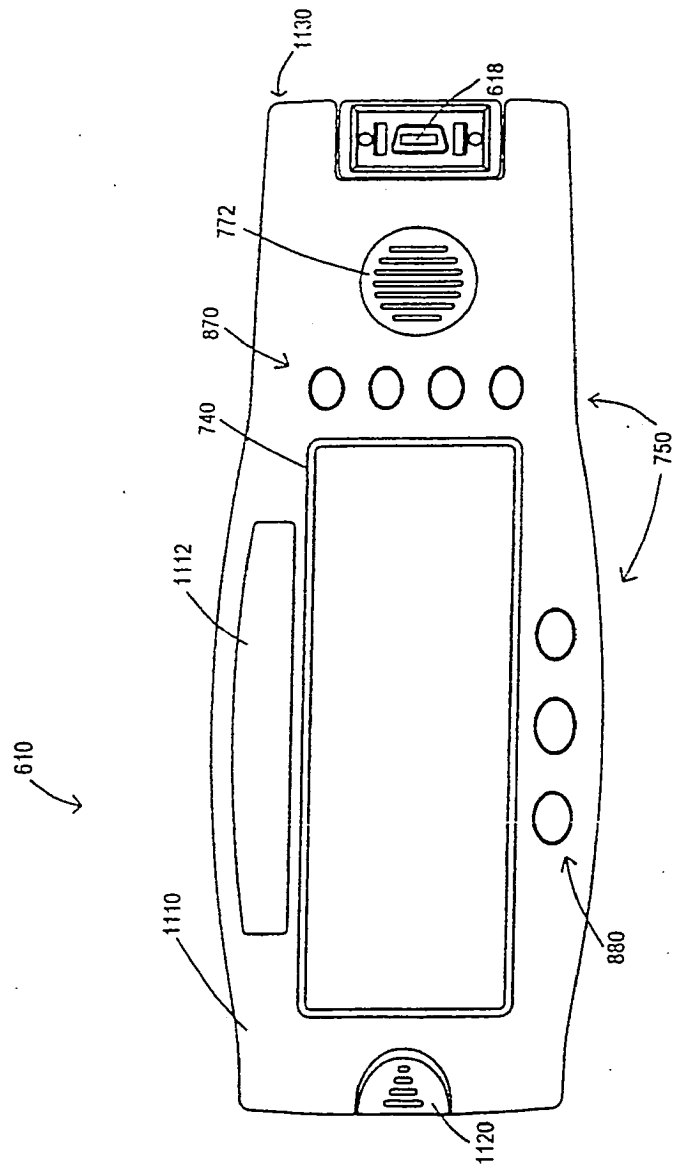


FIG. 11B

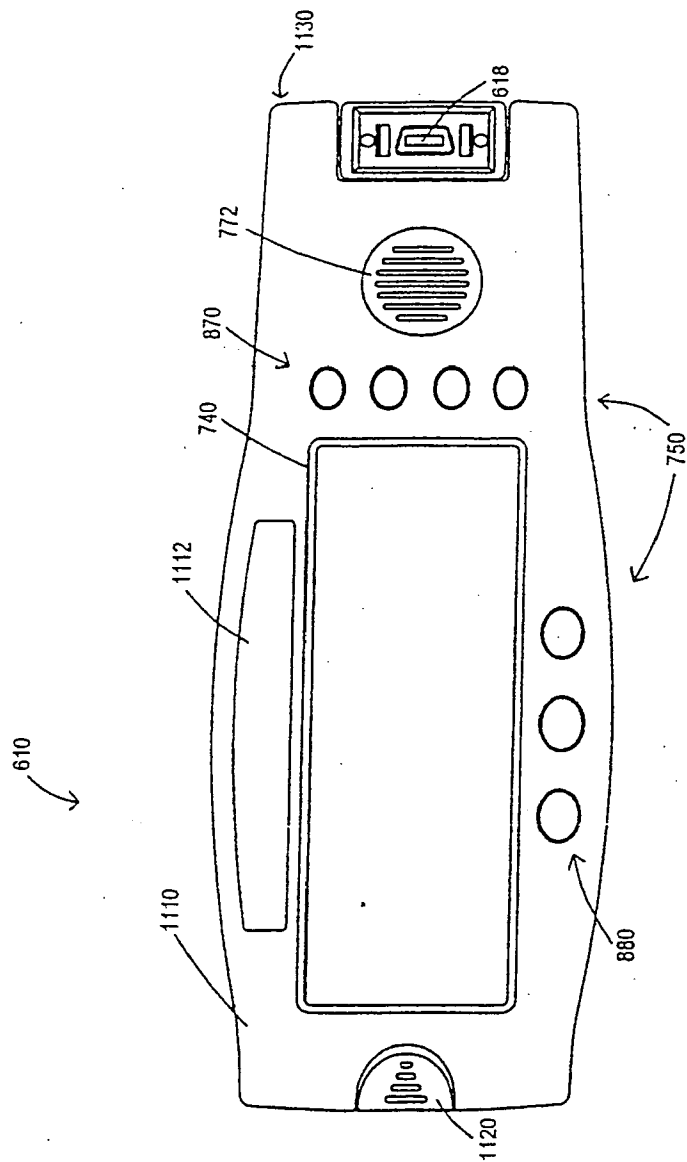


FIG. 12A

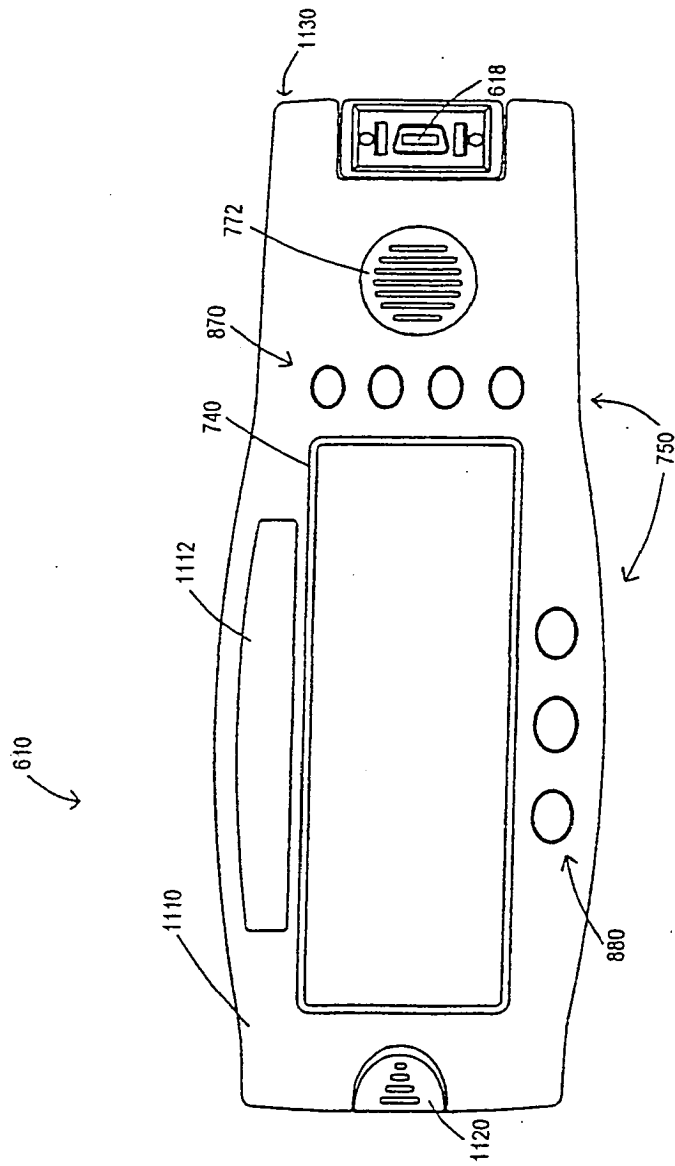


FIG. 12B

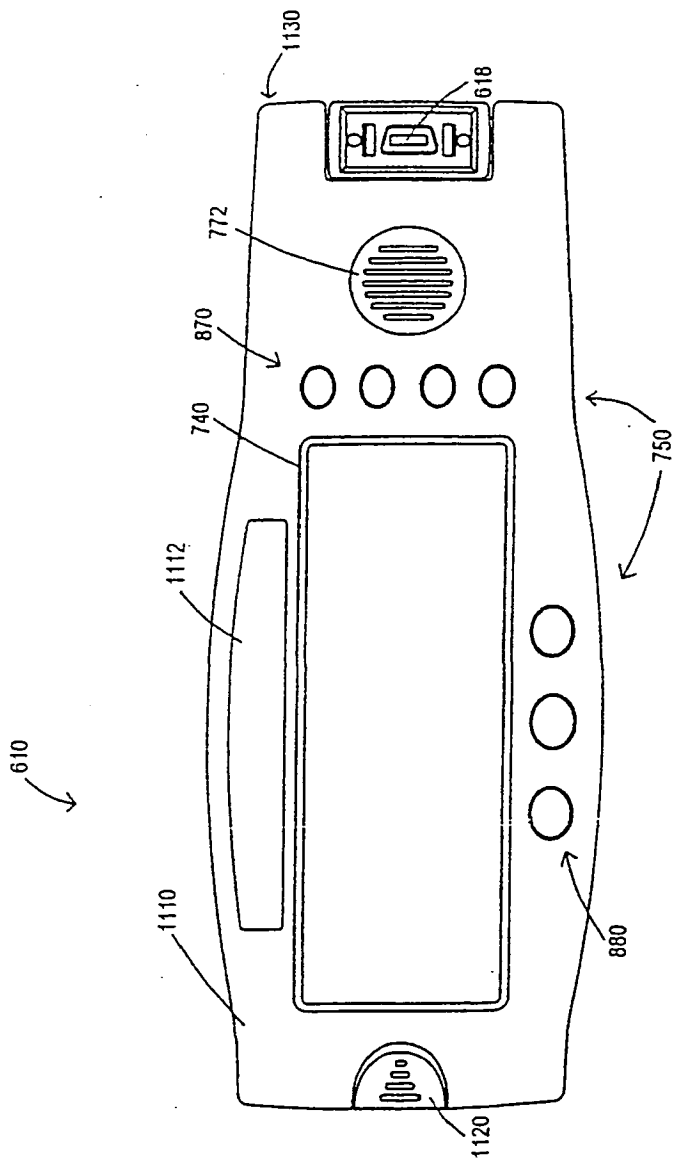


FIG. 13

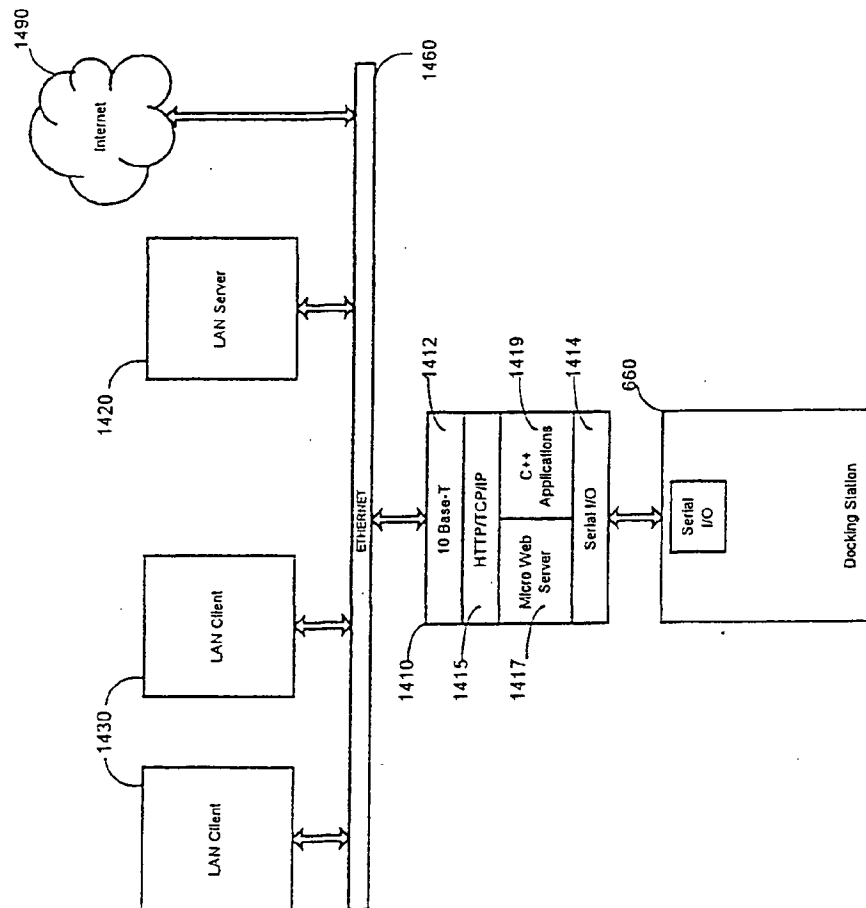


FIG. 14

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5632272 A [0023] [0039]
- US 5638818 A [0023] [0039]
- US 5758644 A [0035]

专利名称(译)	通用/升级脉搏血氧仪		
公开(公告)号	EP1992278A2	公开(公告)日	2008-11-19
申请号	EP2008012674	申请日	2000-01-25
[标]申请(专利权)人(译)	梅西莫股份有限公司		
申请(专利权)人(译)	Masimo公司		
当前申请(专利权)人(译)	Masimo公司		
[标]发明人	KIANI MASSI E ALI AMMAR AL DIAB MOHAMED K VADEN VAL E		
发明人	KIANI, MASSI E. ALI, AMMAR, AL DIAB, MOHAMED K. VADEN, VAL E.		
IPC分类号	A61B5/00 G01N21/27 A61B5/0205 A61B5/145 A61B5/1455 G01N21/35		
CPC分类号	A61B5/002 A61B5/0022 A61B5/14551 A61B5/1495 A61B5/742 A61B5/743 A61B5/7445 A61B2560/0271 A61B2560/0456 A61B2562/085 G16H40/67		
代理机构(译)	法思博事务所		
优先权	60/117097 1999-01-25 US 60/161565 1999-10-26 US		
其他公开文献	EP1992278B1 EP1992278A3		
外部链接	Espacenet		

摘要(译)

通用/升级脉冲血氧计 (UPO) (210) 包括便携式单元 (610) 和对接站 (660,910)，它们一起提供用于测量氧饱和度和相关生理参数的三仪器一体机功能。便携式装置用作手持式脉搏血氧仪。对接便携式和对接站的组合可用作独立的高性能脉搏血氧仪。便携式对接站组合还可通过使用波形发生器 (320,930) 连接到各种制造商的脉冲血氧计并且通用地与之兼容。UPO提供通用传感器，用于脉搏血氧仪接口和脉搏血氧仪测量功能，可提升性能例如，通过增加低灌注性能和运动伪影免疫力的常规仪器。通用兼容性与便携性相结合，允许UPO与在救护车和医院ER之间或在各医院站点之间转移的患者一起运输，除了插件兼容性和多参数患者监测系统的功能升级之外，还提供连续的患者监测。便携式显示器 (264,740) 上的图像可以是可旋转的，可以在未对接时手动或者根据方向 (950) 旋转。在一个实施例中，对接站 (660) 具有允许的网络服务器和网络接口 (1410)。要通过局域网 (1420) 下载和查看为网页的UPO数据互联网。

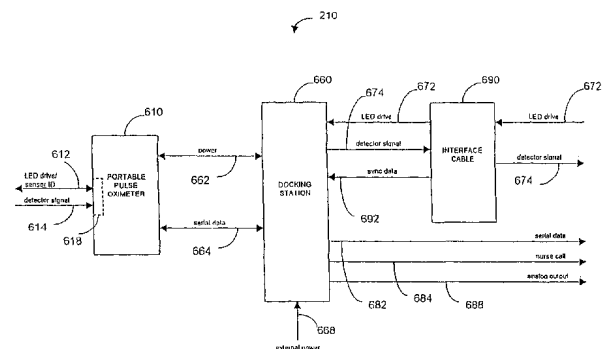


FIG. 6