

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
25 October 2001 (25.10.2001)

PCT

(10) International Publication Number
WO 01/78593 A1

- (51) International Patent Classification⁷: **A61B 5/00**
- (21) International Application Number: PCT/US01/12491
- (22) International Filing Date: 16 April 2001 (16.04.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/198,109 17 April 2000 (17.04.2000) US
- (71) Applicant: **NELLCOR PURITAN BENNETT INCORPORATED** [US/US]; 4280 Hacienda Drive, Pleasanton, CA 94588-2719 (US).
- (72) Inventors: **MANNHEIMER, Paul, D.**; 4119 Sugar Maple Drive, Danville, CA 94506 (US). **FEIN, Michael, E.** (deceased). **PORGES, Charles, E.**; 61 Mira Loma, Orinda, CA 94563 (US).
- (74) Agents: **HAUGHEY, Paul, C.** et al.; Townsend and Townsend and Crew LLP, 2 Embarcadero Center, 8th Floor, San Francisco, CA 94111 (US).
- (81) Designated States (*national*): AU, CA, JP.
- (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- Published:**
- with international search report
 - before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: PULSE OXIMETER SENSOR WITH PIECE-WISE FUNCTION

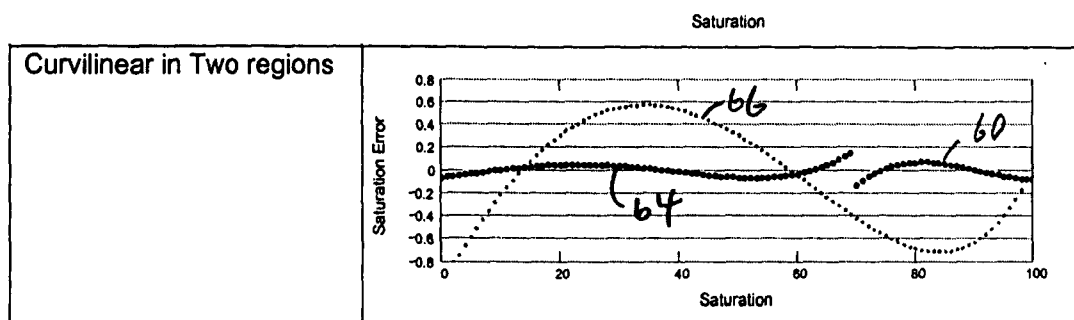

(57) **Abstract:** A memory in a sensor is used to store multiple coefficients for a physiological parameter. In one embodiment, not only are the sensor's specific calibration coefficients stored in a memory in the sensor for the formula to determine oxygen saturation, but multiple sets of coefficients are stored. The multiple sets apply to different ranges of saturation values to provide a better fit to occur by breaking the R to SpO₂ relationship up into different pieces, each described by a different function. The different functions can also be according to different formulas for determining oxygen saturation.



WO 01/78593 A1

PULSE OXIMETER SENSOR WITH PIECE-WISE FUNCTION

BACKGROUND OF THE INVENTION

The present invention relates to oximeter sensors having a memory.

5 Pulse oximetry is typically used to measure various blood flow characteristics including, but not limited to, the blood-oxygen saturation of hemoglobin in arterial blood, and the rate of blood pulsations corresponding to a heart rate of a patient. Measurement of these characteristics has been accomplished by use of a non-invasive sensor which passes light through a portion of the patient's tissue where blood perfuses the tissue, and photoelectrically senses the absorption of light in such tissue. The amount
10 of light absorbed is then used to calculate the amount of blood constituent being measured.

The light passed through the tissue is selected to be of one or more wavelengths that are absorbed by the blood in an amount representative of the amount of
15 the blood constituent present in the blood. The amount of transmitted or reflected light passed through the tissue will vary in accordance with the changing amount of blood constituent in the tissue and the related light absorption. For measuring blood oxygen level, such sensors have been provided with light sources and photodetectors that are adapted to operate at two different wavelengths, in accordance with known techniques for
20 measuring blood oxygen saturation.

Various methods have been proposed in the past for coding information in sensors, including pulse oximeter sensors, to convey useful information to a monitor. For example, an encoding mechanism is shown in Nellcor U.S. Patent No. 4,700,708. This mechanism relates to an optical oximeter probe which uses a pair of light emitting diodes
25 (LEDs) to direct light through blood-perfused tissue, with a detector picking up light which has not been absorbed by the tissue. The operation depends upon knowing the wavelength of the LEDs. Since the wavelength of LEDs can vary from device-to-device, a coding resistor is placed in the sensor with the value of the resistor corresponding to the actual wavelength of at least one of the LEDs. When the oximeter instrument is turned
30 on, it first determines the value of the resistor and thus appropriate saturation calculation coefficients for the value of the wavelengths of the LEDs in the probe.

Other coding mechanisms have also been proposed in U.S. Patent Nos. 5,259,381; 4,942,877; 4,446,715; 3,790,910; 4,303,984; 4,621,643; 5,246,003; 3,720,177;

4,684,245; 5,645,059; 5,058,588; 4,858,615; and 4,942,877, the disclosures of which are all hereby incorporated by reference. The '877 patent in particular discloses storing a variety of data in a pulse oximetry sensor memory, including coefficients for a saturation equation for oximetry.

5 Nellcor pulse oximeter sensors are encoded with a resistor (RCAL) value that corresponds to the wavelength(s) of the LED(s) within the emitter, such as described in Pat. No. 4,700,708. Nellcor pulse oximeter instruments read this resistor coding value and use it as a pointer to a look-up table that holds the proper set of coefficients for that sensor for calculating arterial oxygen saturation (SpO_2). The function that converts the
10 *measured* red and IR signal modulation ratio R (also known as the “ratio of ratios” or “rat-rat”) to a *calculated* saturation value is derived from the basic form of the Lambert-Beer Law:

$$R = \frac{\ln(I_1 / I_2)_{red}}{\ln(I_1 / I_2)_{ir}} = \frac{S \cdot \beta_{O_2Hb}^{red} + (1-S) \cdot \beta_{Hb}^{red}}{S \cdot \beta_{O_2Hb}^{ir} + (1-S) \cdot \beta_{Hb}^{ir}} = \frac{S \cdot c_1 + (1-S) \cdot c_2}{S \cdot c_3 + (1-S) \cdot c_4} \quad (1)$$

where I_1 and I_2 refer to detected light signals at two different points in the cardiac cycle,
15 and the β 's refer to the characteristic light absorption properties of oxygenated and deoxygenated hemoglobin. When solved for the saturation (S), the result takes on the form:

$$SpO_2 = S \cdot 100 = \frac{c_2 - c_4 \cdot R}{(c_3 - c_4) \cdot R + (c_2 - c_1)} \cdot 100. \quad (2)$$

20 Equation 2 can be further simplified to require only three constants (by, for example, dividing each constant by c_2), but will be used as shown for the remainder of this description. Although theoretically based, the four constants c_1 - c_4 are empirically determined. Theoretical values for the constants are insufficient primarily due to the complexities of light scattering and sensor optics. The values of the sets of constants (c_1
25 *through* c_4) vary with each resistor coding bin (each “bin” corresponding to a range of different characterized LED wavelengths). Multiple sets of coefficients (bins) are provided within a lookup table in Nellcor oximeters. When calculated SpO_2 values according to Eq. 2 are less than 70%, a revised value of SpO_2 using a linear function is used:

$$30 \quad SpO_2 = c_5 - c_6 \cdot R, \quad (3)$$

where both c_5 and c_6 vary with the resistor coding value. This linear function was found to better match SpO_2 (arterial oxygen saturation as measured by a pulse oximeter) with SaO_2 (the true value of arterial oxygen saturation, as measured directly on a blood sample) in observations made at low saturations.

5 A limitation of this method is that the proper calibration of the pulse oximetry sensor can be accomplished only if the relationship between the signal modulation ratio (R) to blood SaO_2 conforms to one of the pre-encoded sets of calibration coefficients.

10 A further limitation of this method is that the relationship between R and SaO_2 of the pulse oximetry sensor may not be linear in a low-saturation region, or that the breakpoint may not optimally be located at 70% SpO_2 .

 A yet further limitation of this prior art method is that the functional relationship between the true arterial oxygen saturation and the measured signals may not fit a single function over the entire span of the measurement range.

15

SUMMARY OF THE INVENTION

 The present invention takes advantage of a memory in the sensor to provide enhanced performance. In one embodiment, not only are the sensor's specific calibration coefficients stored in a memory in the sensor for the formula to determine
20 oxygen saturation, but multiple sets of coefficients are stored. The multiple sets apply to different ranges of saturation values to provide a better fit to occur by breaking the R to SpO_2 relationship up into different pieces, each described by a different function. The different functions can also be according to different formulas for determining oxygen saturation.

25 In another aspect of the invention, the sensor can store a variable breakpoint between the two functions used for oxygen saturation. The two functions could either be separate formulas or the same formula with different coefficients. This allows optimization to a value other than the 70% breakpoint of the prior art.

30 In another aspect of the present invention, the sensor can store more than one breakpoint to create more than two functions describing the R to SpO_2 relationship.

 In yet another aspect of the present invention, a spline function is used, breaking up the R to SpO_2 relationship into an arbitrary number of regions.

In one embodiment, the coefficients stored in the sensor memory correspond to a non-linear curve for low saturation values below 70% or some other breakpoint(s).

Each of the methods described here improve the fit between the chosen mathematical function and the arterial oxygen saturation by breaking the relationship into subsets of the full measured range and determining optimum coefficients for each range. Spline-fitting, in this context, similarly breaks the full measurement range into subsets to efficiently describe the numerical relational between the underlying tissue parameter of interest and the actual signals being used to estimate its value.

For a further understanding of the nature and advantages of the invention, reference should be made to the following description taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a pulse oximeter system incorporating the present invention.

Fig. 2 is a graph of R (signal modulation ratio) versus oxygen saturation (SaO_2).

Fig. 3 is a diagram of the contents of a sensor memory according to the invention.

Fig. 4 is a graph of oxygen saturation versus R to illustrate the embodiment for spline or curve fitting to a predefined set of knots.

Figures 5A, 5B, 6A and 6B are graphs illustrating the improved curve fitting of the embodiments of the invention versus the prior art.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

Sensor Reader/Monitor

Fig. 1 is a block diagram of one embodiment of the invention. Fig. 1 shows a pulse oximeter 17 (or sensor reader) which is connected to a non-invasive sensor 15 attached to patient tissue 18. Light from sensor LEDs 14 passes into the patient tissue 18, and after being transmitted through or reflected from tissue 18, the light is received by photosensor 16. Either two or more LEDs can be used depending upon the embodiment of the present invention. Photosensor 16 converts the received energy into an electrical signal, which is then fed to input amplifier 20.

Light sources other than LEDs can be used. For example, lasers could be used, or a white light source could be used with appropriate wavelength filters either at the transmitting or receiving ends.

Time Processing Unit (TPU) 48 sends control signals to the LED drive 32, to activate the LEDs, typically in alternation. Again, depending on the embodiment, the drive may control two or any additional desired number of LEDs.

The signal received from input amplifier 20 is passed through two different channels as shown in the embodiment of Fig. 1 for two different wavelengths. Alternately, three channels for three wavelengths could be used, or N channels for N wavelengths. Each channel includes an analog switch 40, a low pass filter 42, and an analog to digital (A/D) converter 38. Control lines from TPU 48 select the appropriate channel at the time the corresponding LED 14 is being driven, in synchronization. A queued serial module (QSM) 46 receives the digital data from each of the channels via data lines 79. CPU 50 transfers the data from QSM 46 into RAM 52 as QSM 46 periodically fills up. In one embodiment, QSM 46, TPU 48, CPU 50 and RAM 52 are part of one integrated circuit, such as a microcontroller.

Sensor Memory

Sensor 15, which includes photodetector 16 and LEDs 14, has a sensor memory 12 associated with it. Memory 12 is connected to CPU 50 in the sensor reader or monitor 17. The memory 12 could be packaged in a body of the sensor 15 or in an electrical plug connected to the sensor. Alternatively, the memory 12 could be packaged in a housing which is attachable to an external surface of the monitor or the memory 12 could be located anywhere in a signal path between the sensor body and the monitor. Specifically, according to some preferred embodiments, a content of the sensor memory 12 could be constant for all sensors associated with a particular sensor model. In this case, instead of putting an individual memory 12 on each sensor associated with this model, the memory 12 could instead be included in a reusable extension cable associated with the sensor model. If the sensor model is a disposable sensor, in this case a single memory 12 would be incorporated into a reusable extension cable. The reusable cable could then be used with multiple disposable sensors.

Fig 2 is an example of a graph of the ratio of ratios (R) on the X axis versus oxygen saturation (SaO_2) on the Y axis. Shown is a breakpoint 52. In the prior art, a breakpoint of 70% was pre-defined in the monitor software. To the right of the

breakpoint (oxygen saturations between 70-100%) a formula was used with four coefficients. To the left of the breakpoint in the prior art, a linear equation was used with two coefficients. The present invention provides increased flexibility and accuracy by using a non-linear formula for the portion of the curve to the left of breakpoint 52. By using a memory chip in the sensor itself, it is possible to actually store these coefficients on the memory chip, as well as the separate coefficients for the higher saturation values.

In another embodiment of the invention, breakpoint 52 can be stored in the memory chip, and chosen to optimize the curve fitting for the two sets of coefficients. In other words, a better fit to the two curves may be obtained if the breakpoint is 68%, for example. In an alternate embodiment, multiple breakpoints and curves might be used. In addition, rather than using the same formula, different formulas could be used for different sections in another embodiment.

Fig. 3 illustrates the contents of sensor memory 12 of Fig. 1. As illustrated, in a first section of memory 54 are stored a first set of coefficients. A second portion of memory 56 stores a second set of coefficients. Finally, in a third section of memory 58, the breakpoint 52 is stored. Different combinations of these elements could be stored in different memories. For example, the breakpoint could be left out of some, and in others a breakpoint may be provided with only one set of coefficients (with the other set of coefficients in the monitor). Alternately, a breakpoint might be implied from a sensor model number which is stored in the memory, or some other ID value.

Equation:

In one embodiment, an enhanced form of the curvilinear function is used. Instead of using Eq.3 (linear) in the lower saturation region, Eq.2 (non-linear) is used for both the upper and lower saturation regions. The breakpoint that defines when to switch coefficients from an upper-region set to a lower-region set is defined by another coefficient. The breakpoint can be programmed either as a value of R , or as a value of SpO_2 . With the breakpoint defined as a value of R , the algorithm becomes:

$$SpO_2 = \frac{b - d \cdot R}{(c - d) \cdot R + (b - a)} \cdot 100 \begin{cases} R \leq c_5 : a = c_1, b = c_2, c = c_3, d = c_4 \\ R > c_5 : a = c_6, b = c_7, c = c_8, d = c_9 \end{cases} \quad (4)$$

Curve Fitting

Curve fitting to multiple regions follows the same methodology as fitting to a single region. Simply put, the data is partitioned into separate regions and coefficients are determined for each region separately. Commercially available software programs are available, (for example, Mathcad, (Mathsoft, Inc., Cambridge, MA). The process can also be found in, for example, Data Reduction and Error Analysis for the Physical Sciences (Philip Beviyton, McGraw-Hill, New York 1969, Ch. 11 - Least squares fit to an arbitrary function).

Spline Fitting

An alternate embodiment uses either spline (curve) fitting, or linear or higher order interpolation to a predefined set of SpO_2 vs R values ("knots"). A "knot" is a term of art in spline fitting that refers to an x-y pair corresponding to a node on a line, with a number of such knots defining the line. Spline fitting is a technique for interpolation.

For instance, the values of R at specifically defined SpO_2 values would be stored in the sensor memory. An example of this looks like:

R =	a	b	c
$SpO_2 = 100$	95	90	

Alternatively, though less preferably, the independent variable could be swapped:

R =	0.5	0.6	0.7
$SpO_2 =$	x	y	z

a) Only the bold values (e.g., a, b and c) would need to be stored with fixed, pre-selected spaced values of SpO_2 (equally spaced or unequally spaced). Or, alternatively, preselected values of R .

b) An alternative approach would store within the sensor memory the SpO_2 (minimum) and SpO_2 (maximum) values of the spline range, the number of knots that will be defined, and the sequence of defined values of R for those knots.

c) A further alternative approach could store both SpO_2 and the associated R value for each knot.

For each of these options, the instrument would use a spline-fitting algorithm, preferably a cubic spline, to determine the SpO_2 at the measured value of R according to the stored values (an alternative could be a linear or higher order interpolation algorithm).

Fig. 4 illustrates the cubic spline method. Fig. 4 is a graph of oxygen saturation vs. R for a particular sensor emitter. Thus, instead of storing the coefficients as

in the prior art method, the actual R or oxygen saturation values are calculated and stored in the sensor memory for that particular sensor's characteristics (e.g., emitter wavelengths). When the oximeter measures the signal level of the light detector, it determines an oxygen saturation value by determining the point on the curve associated with the calculated R value between two of the sample points shown in Fig. 4.

There exists a trade-off in the number of knots defined and the amount of memory required to store them. Too few knots requires very little storage memory, but may not adequately describe the functional relationship; too many over-define the curve and consumes more memory. The inventors have found that knots spaced 5%-10% apart give adequate results.

Cubic Spline Calculation:

The process for cubic spline interpolation is known to those skilled in the art. Intrinsic in using the spline method is that the value of R needs to be determined first before being translated to SpO_2 . The preferred process for spline interpolation can be accomplished using the functions provided in Mathcad, and treats the endpoints with cubic functions. Other references for cubic spline interpolations are available.

The process of finding the coordinates of the knots in empirical data with a significant amount of noise may require an additional step. Commercially available basic curve fitting programs may be used (sigmaPlot, or TableCurve, or Mathematical for instance) to determine a best-fit functional approximation to the data. Alternately, one can perform a least-squares fit of an arbitrarily chosen analytical function and pick the values of R at the knot locations (SaO_2 values). The analytical function can be an overlapping piece-wise polynomial (e.g., linear or parabolic), or the curvilinear equation of Eq. 1 or Eq. 4. Another approach is to perform a least-squares selection of the knots directly.

Figure 5A shows the conventional curve fitting of the prior art, wherein a linear relationship is used below 70% saturation, with a curvilinear approach above 70%. The residual error due to an imperfect fit to the actual R to SaO_2 response for the curvilinear approach above 70% saturation is illustrated by curve 60, while the residual error of the linear interpolation approach below 70% is illustrated by dots 62. Figure 5B illustrates the use of curvilinear fits in both regions, with a different curvilinear curve 64 being used below 70%. In this instance, a much improved fit is provided. In both figures, the smaller dotted line 66 corresponds to the use of a single curvilinear fit across

both regions, which is also not as accurate, having a much higher error characteristic compared to the curves of the invention, 64 and 60 of Figure 5B.

Figure 6A and 6B show a plurality of knots as circles 70 on the graphs. Dotted line 72 of Figure 6A illustrates a linear interpolation fit to these knots, which
5 shows a residual error prone result with multiple loops. In Figure 6B, on the other hand, the present invention using a cubic spline fitting approach provides a dotted line 74 which is a more accurate fit to the knots 70.

As will be understood by those of skill in the art, the present invention may be embodied in other specific embodiments without departing from the essential
10 characteristics thereof. For example, any function can be used for the formulas for determining oxygen saturation, not just the ones described. For a limited sensor memory, the function representation may be compressed. Any representation of a function could be used. Calibration coefficients may be based on more or different characteristics than the sensor's LED wavelength(s). For example, other LED emitter characteristics or
15 sensor design characteristics can be factors in the sensor's calibration coefficients.

Additionally, the formula for calculating oxygen saturation may be a function of more than the ratio of ratios; for example, other input variables such as signal strength, light levels, and signals from multiple detectors could be used.

This methodology for piece-wise fitting is not limited to oximetry. This
20 method is useful when the relationship between the measured signal and reference value observed during calibration is not adequately described by a single function or set of coefficients over the whole measurement range. The relationship may be broken into subsets, and a piece-wise continuous set of functions may be used to describe the relationship. For example, other blood or tissue constituents could be calculated, such as
25 carboxyhemoglobin, methemoglobin, bilirubin, glucose, lactate, etc. Accordingly, the foregoing description is intended to be illustrative, but not limiting, of the scope of the invention which is set forth in the following claims.

WHAT IS CLAIMED IS:

- 1 1. A patient monitoring sensor comprising:
2 a sensor element for providing signals corresponding to a measured
3 physiological parameter; and
4 a memory storing coefficients for use in a formula for determining said
5 physiological parameter, said coefficients including
6 a first set of coefficients for use with a first formula for a first range of
7 values associated with the signals, and
8 a second set of coefficients for use with either said first formula or a
9 second formula for a second range of the values.
- 1 2. The patient monitoring sensor of claim 1 wherein said sensor is an
2 oximeter sensor, and further comprising:
3 a light emitter for directing light at a patient; and
4 a light detector mounted to receive light from said patient.
- 1 3. The patient monitoring sensor of claim 2 wherein the values are either
2 saturation values or ratiometric values.
- 1 4. The patient monitoring sensor of claim 2 wherein each set of
2 coefficients comprises at least two coefficients.
- 1 5. The patient monitoring sensor of claim 2 wherein said coefficients
2 correspond to a mean wavelength of said light emitter.
- 1 6. The patient monitoring sensor of claim 2 further comprising at least a
2 third set of coefficients stored in said memory for a third range of said saturation values.
- 1 7. The patient monitoring sensor of claim 2 wherein said memory further
2 comprises a second value indicating a breakpoint between said first and second ranges.
- 1 8. An oximeter system comprising:
2 an oximeter sensor;
3 an oximeter in communication with said oximeter sensor, said oximeter
4 including an upper ratiometric signal value or saturation range and a lower ratiometric
5 signal value or saturation range

6 a processor programmed to calculate oxygen saturations, for saturations or
7 ratiometric signal values below a specified level, using a non-linear formula with
8 coefficients.

1 9. The oximeter system of claim 7 wherein said specified level is stored in
2 said oximeter sensor.

1 10. The oximeter system of claim 7 wherein said specified level is other
2 than 70 percent.

1 11. An oximeter sensor comprising:
2 a light emitter for directing light at a patient;
3 a light detector mounted to receive light from said patient; and
4 a memory storing coefficients for use in at least one formula for
5 determining oxygen saturation, said coefficients including at least a first set of
6 coefficients and a second set of coefficients.

1 12. The oximeter sensor of claim 10 wherein said coefficients are
2 dependent on a mean wavelength of said light emitter.

1 13. The oximeter sensor of claim 10 wherein said memory further stores a
2 value indicating a signal breakpoint between said first and second sets of coefficients.

1 14. The oximeter sensor of claim 10 wherein said first and second sets of
2 coefficients are used in the same formula.

1 15. The oximeter sensor of claim 10 wherein said first and second sets of
2 coefficients are used in different formulas.

1 16. The oximeter sensor of claim 14 wherein said different formulas are
2 nonlinear formulas.

1 17. The oximeter sensor of claim 14 wherein said different formulas are
2 linear formulas.

1 18. An oximeter sensor comprising:
2 a light emitter for directing light at a patient;
3 a light detector mounted to receive light from said patient; and

4 a memory storing coefficients for use in a formula for determining oxygen
5 saturation, said coefficients including a first set of coefficients and a second set of
6 coefficients,

7 said memory further storing an indication of a saturation for use in
8 selecting between said first and second sets of coefficients.

1 19. The oximeter sensor of claim 17 wherein the values are either
2 saturation values or ratiometric values.

1 20. The oximeter sensor of claim 17 wherein said coefficients are
2 dependent on a mean wavelength of said light emitter.

1 21. The oximeter sensor of claim 17 wherein said first and second sets of
2 coefficients are used in the same formula.

1 22. An oximeter sensor comprising:
2 a light emitter for directing light at a patient;
3 a light detector mounted to receive light from said patient; and a memory
4 storing a plurality of values of oxygen saturation or ratio-of-ratio values used to
5 determine oxygen saturation, said plurality of values corresponding to a mean wavelength
6 of said light emitter.

1 23. The sensor of claim 22 wherein said values are usable for
2 interpolation.

1 24. An oximeter system comprising:
2 an oximeter sensor comprising
3 a light emitter for directing light at a patient;
4 a light detector mounted to receive light from said patient; and
5 a memory storing a plurality of values of oxygen saturation or signal
6 ratiometric values used to determine oxygen saturation, said plurality of values being
7 dependent on a mean wavelength of said light emitter; and
8 an oximeter in communication with said oximeter sensor for receiving said
9 plurality of values and a light detector signal, said oximeter being programmed to
10 determine oxygen saturation from said light detector signal by fitting said oxygen
11 saturation to a curve defined by said values stored in said memory.

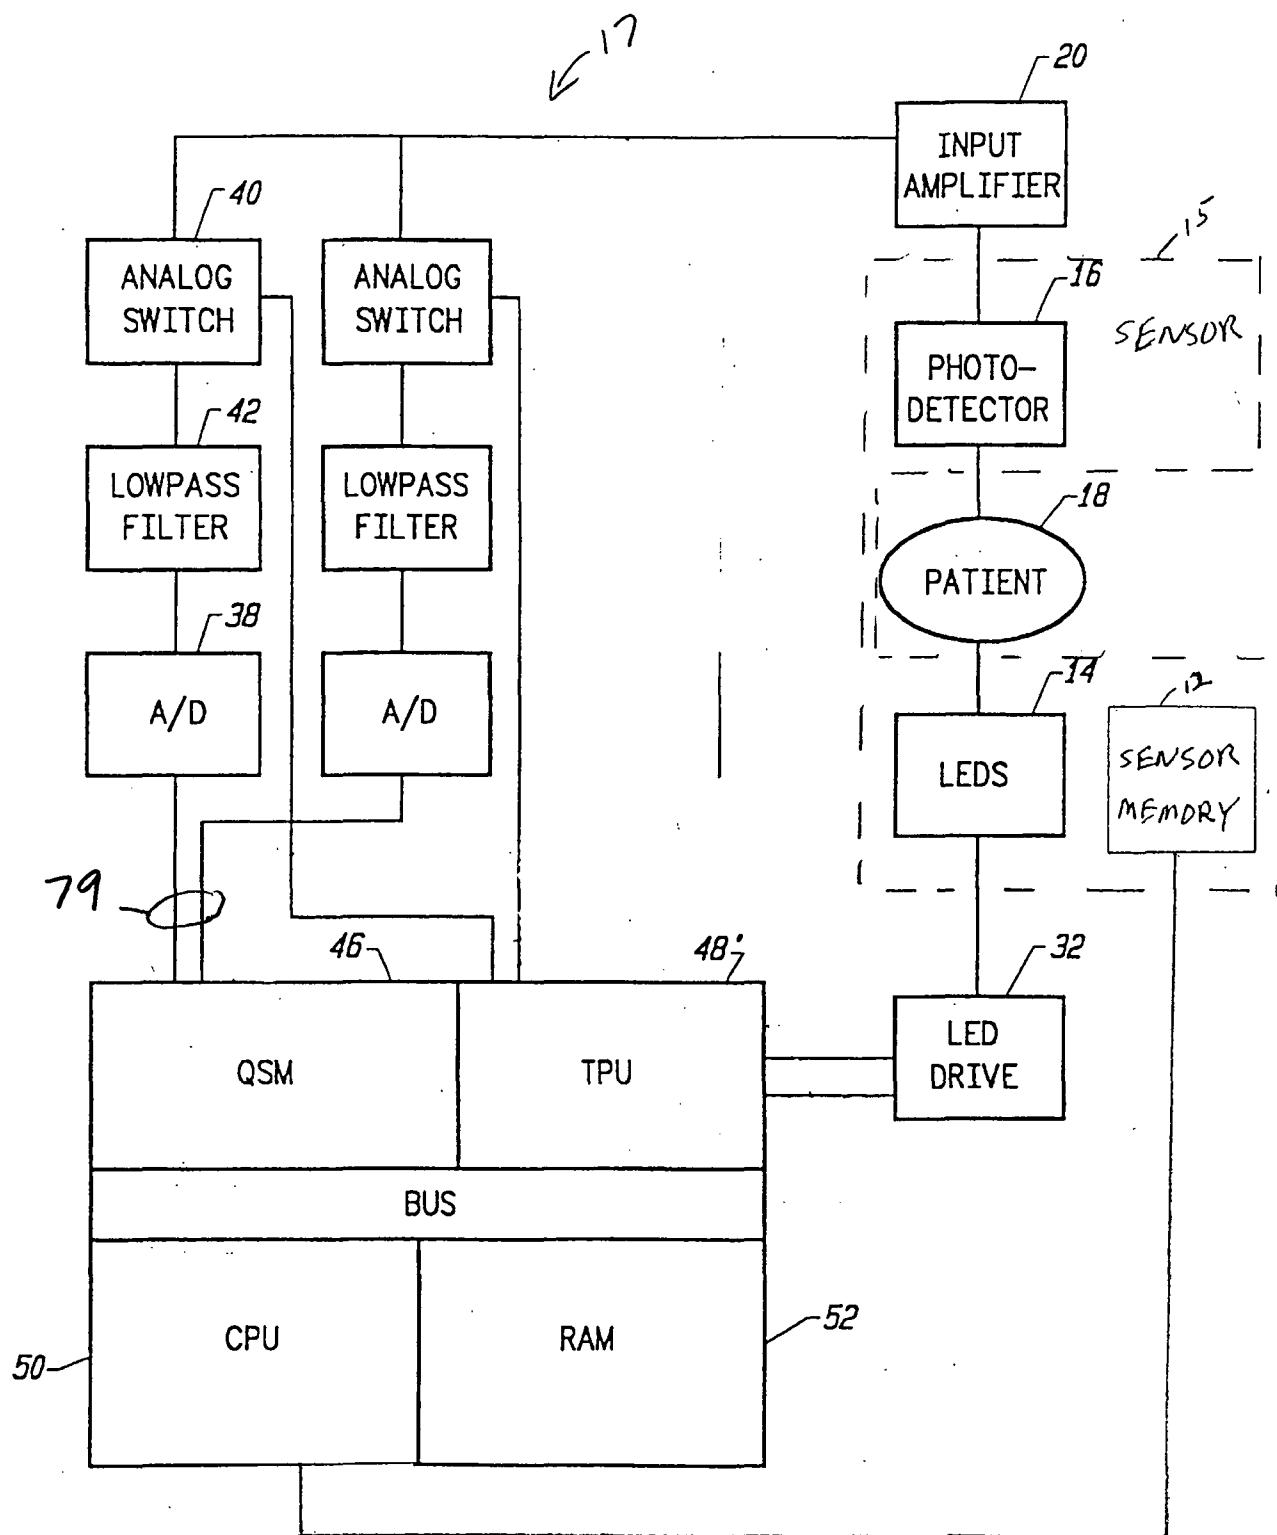


FIG. 1

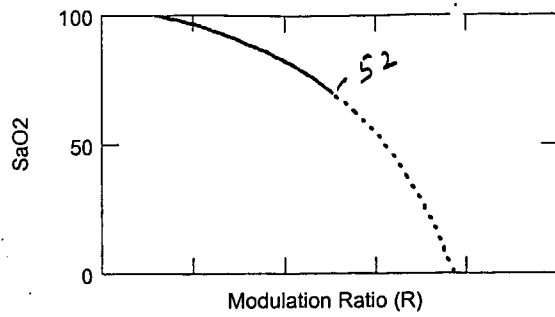


FIG. 2

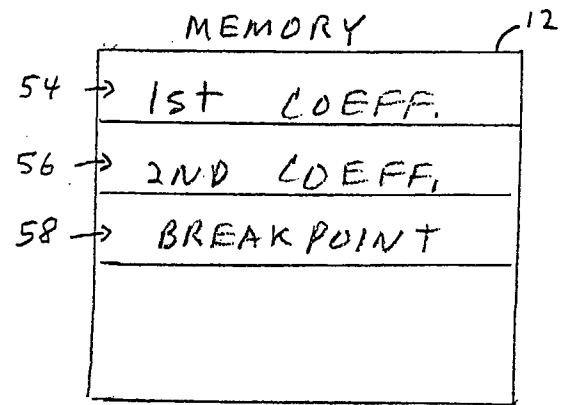


FIG. 3



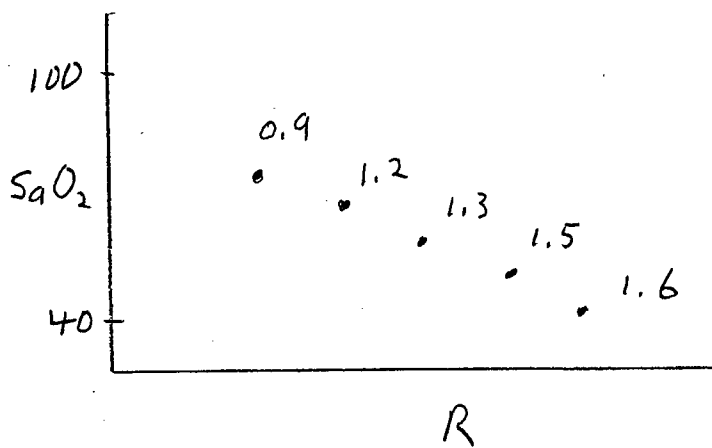


FIG. 4

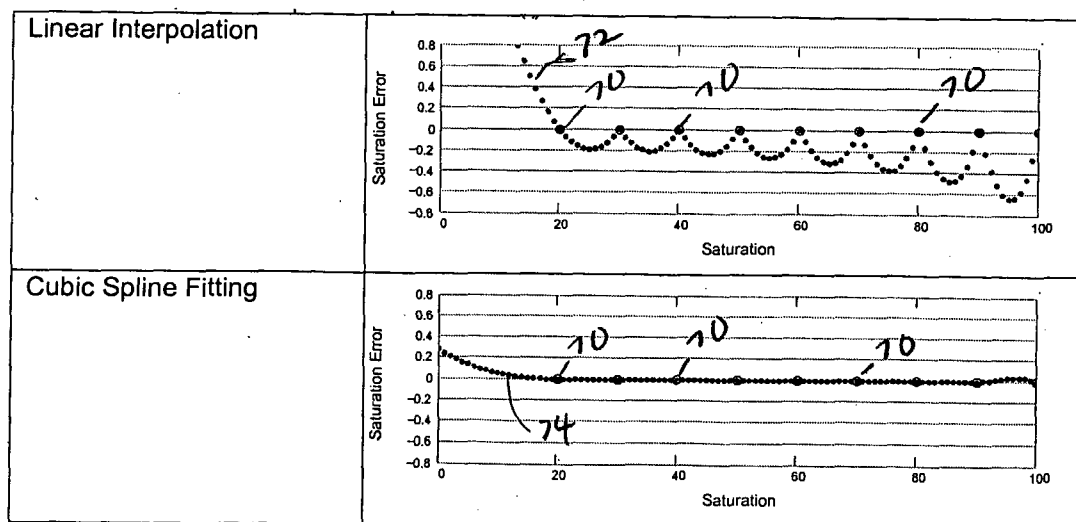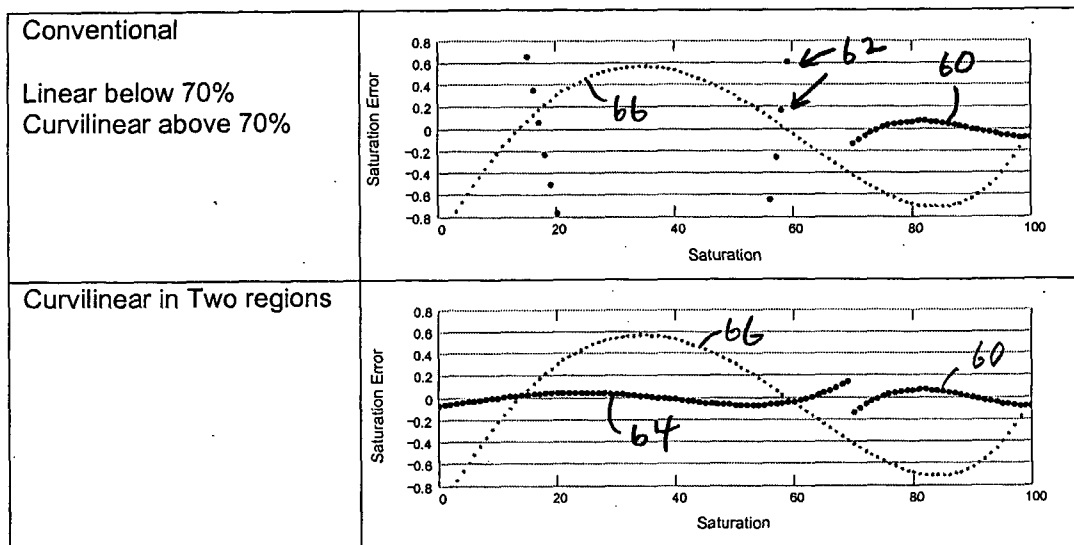

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/12491

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61B5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	US 4 942 877 A (SAKAI TAKAO ET AL) 24 July 1990 (1990-07-24) cited in the application column 2, line 20 - line 50 column 3, line 13 - column 6, line 58 column 12, line 6 - line 37; table 1 ---	1,2,8, 11,18, 22,24 3-6,9, 12,19
Y	US 5 503 148 A (POLOGE JONAS A ET AL) 2 April 1996 (1996-04-02) abstract column 2, line 46 - column 3, line 2 column 4, line 16 - column 8, line 19; table 1 --- -/--	1,2,8, 11,18, 22,24

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

20 August 2001

Date of mailing of the international search report

28/08/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Weihs, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/12491

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 987 343 A (KINAST ERIC) 16 November 1999 (1999-11-16)</p> <p>column 2, line 58 -column 3, line 14 column 3, line 59 -column 4, line 60; table 2</p> <p>---</p>	<p>1,2,5,8, 11,12, 18,22,24</p>
A	<p>EP 0 571 225 A (PURITAN BENNETT CORP) 24 November 1993 (1993-11-24) column 6, line 5 -column 9, line 3; table 1</p> <p>---</p>	<p>1,2,8, 11,22,24</p>
P,A	<p>WO 00 61000 A (MALLINCKRODT INC) 19 October 2000 (2000-10-19)</p> <p>column 3, line 30 -column 5, line 12 column 6, line 13 -column 11, line 14; tables 1,2</p> <p>-----</p>	<p>1,2,5,8, 9,11,12, 18,20, 22,24</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/12491

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4942877	A	24-07-1990	JP 63065845 A	24-03-1988
US 5503148	A	02-04-1996	NONE	
US 5987343	A	16-11-1999	NONE	
EP 0571225	A	24-11-1993	US 5357953 A	25-10-1994
			CA 2096574 A	22-11-1993
			JP 6070916 A	15-03-1994
WO 0061000	A	19-10-2000	NONE	

专利名称(译)	具有分段功能的脉搏血氧仪传感器		
公开(公告)号	EP1274343A1	公开(公告)日	2003-01-15
申请号	EP2001925056	申请日	2001-04-16
[标]申请(专利权)人(译)	内尔科尔普里坦贝内特公司		
申请(专利权)人(译)	NELLCOR PURITAN BENNETT INC.		
当前申请(专利权)人(译)	NELLCOR PURITAN BENNETT INC.		
[标]发明人	MANNHEIMER PAUL D FEIN MICHAEL E DI PORGES CHARLES E		
发明人	MANNHEIMER, PAUL, D. FEIN, MICHAEL, E. DI PORGES, CHARLES, E.		
IPC分类号	G01N21/27 A61B5/00 A61B5/145 A61B5/1455		
CPC分类号	A61B5/14551 A61B2562/085		
优先权	60/198109 2000-04-17 US		
其他公开文献	EP1274343B1		
外部链接	Espacenet		

摘要(译)

传感器中的存储器用于存储生理参数的多个系数。在一个实施例中，不仅传感器的特定校准系数存储在传感器的存储器中，用于公式确定氧饱和度，而是存储多组系数。多组适用于不同的饱和度范围，以通过将R与SpO2关系分解成不同的片段来提供更好的拟合，每个片段由不同的函数描述。不同的功能也可以根据不同的公式来确定氧饱和度。