



(11) **EP 1 475 035 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
22.06.2011 Bulletin 2011/25

(51) Int Cl.:
A61B 5/00 (2006.01) A61B 5/024 (2006.01)

(21) Application number: **04252685.5**

(22) Date of filing: **07.05.2004**

(54) **Ear type apparatus for measuring a bio signal and measuring method therefor**

Apparat und Verfahren zur Messung eines Biosignals im Gehörgang

Appareil et procédé pour mesurer un signal biologique dans le conduit auditif

(84) Designated Contracting States:
DE FI FR GB NL SE

(30) Priority: **09.05.2003 KR 2003029365**

(43) Date of publication of application:
10.11.2004 Bulletin 2004/46

(73) Proprietor: **SAMSUNG ELECTRONICS CO., LTD.**
Suwon-city,
Gyeonggi-do (KR)

(72) Inventors:
• **Bae, Sang-kon**
Seongdong-gu
Seoul (KR)

• **Lee, Jong-youn**
Giheung-eub
Yongin-si
Gyeonggi-do (KR)
• **Yoon, Gil-won**
Seongdong-gu
Seoul (KR)

(74) Representative: **Greene, Simon Kenneth**
Elkington and Fife LLP
Prospect House
8 Pembroke Road
Sevenoaks
Kent TN13 1XR (GB)

(56) References cited:
WO-A-96/23442 US-A- 5 673 692
US-A- 6 080 110 US-A1- 2003 036 685
US-B1- 6 396 416

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to an ear type apparatus for measuring a bio signal and a measuring method therefor. More particularly, the present invention relates to an ear type apparatus for measuring a bio signal, such as temperature, respiration, pulse, and oxygen saturation, which can minimize a motion artifact caused by a subject's motion, and a measuring method therefor.

[0002] When a human body is in an abnormal state, various changes may occur such as an increase in blood pressure, an increase in pulse rate, an increase in body temperature, or a change in an electric potential occurring during a heartbeat, which may be measured by an electrocardiogram. Among these changes, the increase in body temperature is the most representative sign of an abnormal state of a human body and is thus generally measured during a patient diagnosis in hospitals or general medical institutions. Conventionally, body temperature is measured using a mercury thermometer. Recently, various ear type thermometers for measuring a body temperature, i.e., inner body temperature without influence from external temperature, have been developed. In operation, such an ear type thermometer detects an amount of infrared rays emitted from an eardrum at an internal body temperature and converts the detected amount of infrared rays into a temperature value. The ear type thermometer is advantageous in that a measurement time is short and the body temperature can be conveniently measured by inserting the ear type thermometer into an ear.

[0003] A pulse indicates a dynamic extension of an artery that can be felt by a finger. Since the dynamic extension of an artery is due to a contraction of the heart, a heart rate, i.e., a heart's contraction rate, can be inferred from a pulse rate. When a human body is infected by a disease, the pulse rate, rhythm, or strength changes even when the human body is in a stable status. Accordingly, a person's state of health can be checked by measuring the pulse rate, rhythm, or strength.

[0004] Further, oxygen saturation indicates an amount of arterial blood (SpO_2) in which oxygen is saturated. Oxygen saturation is measured to test a pulmonary function, estimate a concentration of oxygen in blood during oxygen therapy at home, or diagnose asthma and pulmonary emphysema. Human respiration is a process of discharging waste gas, i.e., carbonic acid gas, from a human body and providing oxygen to the human body. A human lung accommodates air coming from outside, emits carbonic acid gas, and absorbs oxygen. A pulmonary artery discharges carbonic acid gas collected throughout the human body through pulmonary alveoli using a difference in air pressure during exhalation. Conversely, blood in a pulmonary vein absorbs oxygen from inhaled air and then circulates to the heart. When respiration is unstable, a supply of oxygen is interrupted, which deteriorates the functions of a body's organs. In particular, oxygen saturation directly relates to an amount of oxygen supplied to the organs and thus provides very useful information regarding metabolism.

[0005] FIG. 1 shows an example of a conventional ear type thermometer for measuring body temperature. The ear type thermometer shown in FIG. 1 includes a housing 150 having a probe 110 through which infrared rays pass, a light receiver 120 that receives infrared rays emitted from at least one area from among a human eardrum and peripheral areas of the eardrum through the probe 110, a signal processor 130 that calculates a temperature from an output of the light receiver 120, and a display/sound unit 140 that displays the temperature.

[0006] The light receiver 120 includes a condenser device, which condenses infrared rays passing through the probe 110, and an infrared receiver device, which is disposed to receive the infrared rays condensed by the condenser device to receive infrared rays emitted from at least one area from among the eardrum and the peripheral areas of the eardrum.

[0007] Disadvantageously, the conventional ear type thermometer shown in FIG. 1 is a separate device that has to be additionally carried by a user. Moreover, a tip of the probe 110 of the thermometer needs to be in close contact with an internal surface of a subject's ear in order to accurately measure the subject's body temperature. However, when another person measures a subject's body temperature, the contact between the thermometer and the internal surface of the ear cannot be adjusted effectively. Although the subject can directly adjust the contact when measuring his own body temperature, the subject must remove the thermometer from the ear to view the display unit to check a measured value and verify whether the measurement has been accurately performed. Accordingly, this thermometer is not appropriate for self-diagnosis and is thus usually used when another person measures a subject's body temperature.

[0008] In order to apply such a conventional ear type thermometer to a remote medical treatment, since a measured value needs to be transmitted via a separate transmission apparatus, an interface is required. Accordingly, it is difficult to monitor results of the measurement frequently or for an extended period of time.

[0009] FIG. 2 shows an example of a conventional mobile apparatus that is capable of measuring a bio signal. The exemplary mobile apparatus shown in FIG. 2 is a portable communication terminal, which allows a function of a heart to be diagnosed or obesity to be tested based on a heart rate and a body fat rate, which are detected from a user's body. This apparatus eliminates an inconvenience of carrying a separate apparatus solely for measuring bio information. Electrodes 2a, 2b, 2c, and 2d are attached to an outer surface of a mobile communication terminal in order to measure a user's bio information.

[0010] FIG. 3 is a block diagram of the conventional mobile apparatus shown in FIG. 2. A portable communication terminal 300 includes a communication terminal module 320 and a bio-information measurement module 310 to provide

dual functionality of voice communication and bio information measurement. The communication terminal module 320 includes a transceiver 326 as a user interface unit, a display unit 321, such as a liquid crystal display (LCD), allowing communication of character information, and an input unit 322 such as a keypad. The input unit 322 is used by a user to operate or control the portable communication terminal 300. Communication of information can be implemented by wireless transmission and reception of data via a wireless communication unit 323. A memory unit 324 stores information regarding the user of the portable communication terminal 300 and data necessary for the operation of the central controller 325.

[0011] The bio-information measurement module 310 includes a body fat measurer 311 and a heart rate measurer 312. An interface unit 313 performs data interface between the portable communication terminal 300 and an external electronic apparatus, for example, a removable bio-information measurement module.

[0012] FIG. 4 is a detailed block diagram of the heart rate measurer 312. The heart rate measurer 312 includes a voltage generator 401, electrodes 402, an amplifier 403, a pulse shaper 404, a pulse counter 405, and an interface unit 406. When the electrodes 402 of the voltage generator 401, which are attached to a main body of the portable communication terminal 300, are in close contact with a part of a subject's body, for example, right and left hands, a voltage change signal due to the heart's beat is detected. The voltage change signal is amplified by the amplifier 403, for example, a differential amplifier. The amplified voltage change signal is converted to a pulse signal by the pulse shaper 404. The pulse signal is counted by the pulse counter 405 to obtain a heart rate. An output signal of the pulse counter 405 is a digital signal and is input to the interface unit 406. The central controller (325 of FIG. 3) displays the heart rate on the display unit 321 and transmits it through the wireless communication unit 323. Voltage measurement electrodes used to measure body fat in the body fat measurer 311 are also used as the electrodes 402.

[0013] Disadvantageously, such a conventional portable communication terminal for measuring bio information using electrodes is influenced by a motion artifact caused by a force pressing the electrodes and is sensitive to contamination of the electrodes or the skin since the electrodes directly contact the skin. When the electrodes are exposed outside the communication terminal, they are easily damaged or contaminated.

[0014] To obtain bio information, such as oxygen saturation, a component in blood needs to be detected. Accordingly, a method of applying signals showing different characteristics according to concentrations of oxidized hemoglobin and reduced hemoglobin and obtaining the bio information using a difference between the signals is usually used. In conventional methods, however, since one electrode cannot apply different types of signals, bio information beyond a pulse rate cannot be appropriately measured.

[0015] US 5,673,692 describes an apparatus which may be inserted into the ear of a patient. The apparatus includes an infrared temperature sensor and a pulse oximeter sensor.

[0016] US 6,080,110 describes a headset with a pulse rate detector on one earpiece and a speaker on the other earpiece.

[0017] According to an aspect of the present invention, there is provided an apparatus for measuring a bio signal according to claim 1.

[0018] According to an aspect this aspect there is provided an apparatus for measuring a bio signal including a bio signal measurement unit, which is insertable into an ear to be in close contact with an internal surface of the ear, the bio signal measurement unit having a photo plethysmography (PPG) measurement module for radiating light of different wavelengths onto the internal surface of the ear, detecting light transmitted through the ear, and outputting a PPG signal including bio information, and further having a plurality of electrodes for outputting the PPG signal, an earphone having a speaker for outputting sound and a plurality of electrodes on an outer surface to be connected to the plurality of electrodes of the bio signal measurement unit to receive the PPG signal output from the bio signal measurement unit, a control unit having a PPG signal processor for receiving the PPG signal through the electrodes of the earphone and generating bio information using the PPG signal and a sound processor for outputting a sound signal to the earphone, and an output unit for displaying the bio information generated from the control unit, the output unit being a liquid crystal display apparatus of a mobile communication terminal.

[0019] Preferably, the PPG measurement module includes a light source unit for radiating light onto the internal surface of the ear and a photodetector for detecting light radiated onto the internal surface of the ear and then transmitted through the ear. The light source unit may include a first light source for radiating light of a first wavelength onto the internal surface of the ear, and a second light source for radiating light of a second wavelength onto the internal surface of the ear, wherein the first and second wavelengths are different.

[0020] Preferably, the PPG signal processor includes a peak detector for detecting peaks of the PPG signal and a signal processor for generating the bio information using values of the peaks. The signal processor may include a pulse detector for calculating a time interval between the peaks to measure a pulse rate. The signal processor may include a respiration detector for band-pass filtering the PPG signal to measure a respiration frequency. The signal processor may include a reflection coefficient detector for detecting an AC component and a DC component from each of PPG signals detected at different wavelengths and measuring reflection coefficients and an oxygen saturation detector for detecting oxygen saturation in blood using a ratio between the reflection coefficients of the different wavelengths.

[0021] The PPG signal processor may further include an amplifier for amplifying the PPG signal and a filter for removing noise components from the PPG signal amplified by the amplifier and then outputting the PPG signal to the peak detector.

[0022] Preferably, the bio signal measurement unit further includes a temperature measurement module for sensing infrared rays radiated from a body and outputting an electrical signal corresponding to the sensed infrared rays, and wherein the control unit further includes a temperature processor for calculating a body temperature using the electrical signal output from the temperature measurement module. The temperature measurement module may include a waveguide installed near an eardrum for guiding infrared rays radiated from the eardrum and a light receiver sensing the infrared rays guided by the waveguide and converting the infrared rays to the electrical signal. The waveguide may be made of a material that can reflect infrared rays. The temperature processor may include an amplifier for amplifying the electrical signal received from the temperature measurement module, a filter for removing noise from the amplified electrical signal, and an analog-to-digital converter for converting the electrical signal to a digital signal.

[0023] The output unit is a liquid crystal display apparatus of a mobile communication terminal or a compact disc player. Preferably, the bio information generated from the control unit is wirelessly transmitted to a predetermined medical institution through the mobile communication terminal.

[0024] According to still another aspect of the present invention, there is provided a method of measuring a bio signal according to claim 16.

[0025] Preferably, (b) includes (b1) radiating the light having the different wavelengths onto the internal surface of the ear, receiving the light transmitted through the ear, and outputting the PPG signal, using a PPG measurement module included in the bio signal measurement unit having a side thereof in close contact with the internal surface of the ear; (b2) detecting peaks of the PPG signal; and (b3) generating bio information using the detected peaks.

[0026] Preferably, (b3) includes detecting an AC component and a DC component from each of PPG signals detected at the different wavelengths and measuring reflection coefficients of the different wavelengths, and calculating oxygen saturation in blood using a ratio between the reflection coefficients of the different wavelengths. Preferably, (b3) includes band-pass filtering the PPG signal to detect a respiration frequency. In addition, (b2) may include band-pass filtering the PPG signal collected for a predetermined period of time, detecting an inflection point by differentiating the filtered PPG signal, and storing the inflection point as a peak when the inflection point has a value exceeding a predetermined threshold value.

[0027] Preferably, (b3) may include measuring a pulse rate using a time interval between peaks of the PPG signal. The output unit is a liquid crystal display apparatus of a mobile communication terminal, and (c) may further include wirelessly transmitting the bio signals measured in (a) and (b) to a predetermined medical institution through the mobile communication terminal.

[0028] According to yet another feature of an embodiment of the present invention, there is provided a recording medium having recorded therein a program for executing the above-described method in a computer.

[0029] The present invention provides an apparatus for measuring a bio signal, which is convenient to carry, can be adjusted to be correctly positioned at a body part to be measured by a subject himself, and can transmit measured bio information without requiring a separate transmitter, thereby facilitating long-term monitoring. In addition, the apparatus can obtain pulse and respiration information and simultaneously measure oxygen saturation using changes in absorbance of light having at least two different wavelengths. The present invention further provides a method for measuring a bio signal.

[0030] The above and other features and advantages of the present invention will become more apparent to those of ordinary skill in the art by describing in detail preferred embodiments thereof with reference to the attached drawings in which:

FIG. 1 shows an example of a conventional ear type thermometer for measuring body temperature;

FIG. 2 shows an example of a conventional mobile apparatus that is capable of measuring a bio signal;

FIG. 3 is a block diagram of a conventional mobile apparatus as shown in FIG. 2;

FIG. 4 is a detailed block diagram of a conventional heart rate measurer as shown in FIG. 3;

FIG. 5A is block diagram of an apparatus for measuring a bio signal according to a comparative example;

FIG. 5B shows an example in which an apparatus for measuring a bio signal is applied to a mobile apparatus;

FIG. 6 is a block diagram showing a control unit as shown in FIG. 5A;

FIG. 7 is a detailed block diagram showing a temperature processor as shown in FIG. 6;

FIG. 8 is a detailed block diagram showing a photo plethysmography (PPG) measurement module and a PPG signal processor as shown in FIG. 6;

FIG. 9 is a detailed block diagram showing a signal processor as shown in FIG. 8;

FIG. 10 is a graph of intensity of radiant energy of a black body versus wavelength;

FIG. 11 is a graph showing a transmission characteristic of a sensor filter;

FIG. 12 is a graph showing a temperature characteristic of a sensor;

FIG. 13 is a conceptual diagram of a measured PPG waveform;

FIG. 14 is a flowchart of a method of measuring a pulse rate according to an embodiment of the present invention;
 FIG. 15A is a diagram showing a detected pulse signal;
 FIG. 15B illustrates a method of detecting respiration according to an embodiment of the present invention;
 FIGS. 16A and 16B show a PPG signal and a respiration signal, respectively, which are simultaneously measured;
 FIGS. 17A and 17B, respectively, show a respiration signal detected using a PPG signal and a respiration signal
 obtained by high-pass filtering the respiration signal shown in FIG. 16B; and
 FIG. 18 illustrates a schematic diagram of an apparatus for measuring a bio signal according to an embodiment of
 the present invention.

[0031] The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. The invention may, however, be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like reference numerals refer to like elements throughout.

[0032] FIG. 5A is block diagram of an apparatus for measuring a bio signal according to a comparative example. FIG. 5B shows an example in which the apparatus for measuring a bio signal is applied to a mobile apparatus.

[0033] Referring to FIG. 5A, the apparatus includes a bio signal measurement unit 500, which is insertable into an ear to measure a bio signal; a control unit 550, which calculates bio information using the bio signal measured by the bio signal measurement unit 500; and a display unit 590, which displays the bio information on a screen for a user. The bio signal measurement unit 500 includes a temperature measurement module 510, which measures body temperature using infrared rays radiated from an internal surface of an ear, and a photo plethysmography (PPG) measurement module 520, which is installed on an outer surface of the bio signal measurement unit 500 to closely contact the internal surface of the ear and measure a PPG signal.

[0034] Referring to FIGS. 5A and 5B, the bio signal measurement unit 500 can be easily inserted into the ear due to its shape. The PPG measurement module 520 is installed at the outer surface of the bio signal measurement unit 500 to closely contact the ear surface. The temperature measurement module 510 is installed in the bio signal measurement unit 500 at a position that will be in relatively close proximity to an eardrum. The bio signal measurement unit 500 may have a same shape as an earphone 530, as shown in FIG. 5B. However, since it is preferable that the temperature measurement module 510 is positioned near the eardrum so that it can effectively sense infrared rays radiated from the eardrum, it is preferable to shape the bio signal measurement unit 500 as a conical frustum and to dispose the temperature measurement module 510 at a top of the conical frustum-shaped bio signal measurement unit 500. The temperature measurement module 510 includes a waveguide 511 guiding infrared rays near the eardrum to the bio signal measurement unit 500 and a light receiver 513 implemented by an infrared sensor to sense the infrared rays input through the waveguide 511.

[0035] For the display unit 590, a separate display apparatus or a display apparatus included in an existing apparatus can be used. In the example shown in FIG. 5B, a mobile apparatus is used as the display unit 590. The display unit 590 may be implemented by a liquid crystal display (LCD) of a mobile communication terminal (as shown in FIG. 5B), a personal digital assistant (PDA), a compact disc player, or the like. When a mobile communication terminal is used, bio information can be transmitted to a predetermined medical institution, so that remote examination can be performed. Hereinafter, it is assumed that a mobile apparatus is used for the display unit 590.

[0036] In FIG. 5B, the control unit 550 is shown separate from the bio signal measurement unit 500. The control unit 550 calculates bio information using a signal received from the bio signal measurement unit 500 and outputs the bio information to the display unit 590. When a mobile apparatus is used for the display unit 590, the control unit 550 can be installed within the mobile apparatus. When the control unit 550 is separately installed outside the mobile apparatus, it can be provided with a jack, which can be connected to the earphone 530, as shown in FIG. 5B, so that the control unit 550 controls a sound signal output from the mobile apparatus and outputs the sound signal to the earphone 530.

[0037] FIG. 6 is a block diagram showing the control unit 550 shown in FIG. 5A. The control unit 550 includes a temperature processor 570, which converts a signal detected by the infrared sensor of the temperature measurement module 510 to a temperature value; a PPG signal processor 580, which generates measurement values of a pulse rate, a respiration frequency, and oxygen saturation using the PPG signal measured by the PPG measurement module 520; and a transmitter 565, which selectively transmits an output signal from the temperature processor 570 and an output signal from the PPG signal processor 580 to the mobile apparatus according to a selection signal of the mobile apparatus used for the display unit 590. When the earphone 530, which can output a sound signal from the mobile apparatus, is connected to the control unit 550, the control unit 550 further includes a sound processor 560, which receives a voice signal through a microphone 535, outputs a voice signal from the mobile apparatus through a speaker 537, and adjusts the volume of the output voice signal. Meanwhile, it will be apparent that the signals of the sound processor 560, the temperature processor 570, and the PPG signal processor may be directly input to the mobile apparatus, and a control unit (not shown) included in the mobile apparatus including the display unit 590 may selectively output the signals.

[0038] FIG. 7 is a detailed block diagram showing the temperature processor 570 shown in FIG. 6. The temperature processor 570 includes an amplifier 571, which amplifies a signal output from the temperature measurement module 510; a filter 572, which removes noise components from the amplified signal; and an analog-to-digital (A/D) converter 573, which converts the filtered signal to a digital signal and transmits the digital signal to the transmitter 565.

[0039] FIG. 8 is a detailed block diagram showing the PPG measurement module 520 and the PPG signal processor 580 shown in FIG. 6. The PPG measurement module 520 includes a first light source, which radiates light onto a body part, i.e., an internal surface of an ear closely contacting the bio signal measurement unit 500, at which a bio signal is to be measured; a second light source, which radiates light having a different wavelength than the light of the first light source onto the body part; and a photodetector, which detects light that has been radiated from the first and second light sources and then transmitted through and reflected from the body part with bio information. The PPG signal processor 580 includes an amplifier 581, which amplifies a signal output from the photodetector; a filter 583, which removes noise components from an output signal of the amplifier 581; a peak detector 585, which detects a peak from an output signal from the filter 583; and a signal processor 587, which calculates bio information using a peak value of a signal detected from the light from the first light source and a peak value of a signal detected from the light from the second light source and outputs the bio information to the display unit 590.

[0040] FIG. 9 is a detailed block diagram showing the signal processor 587 shown in FIG. 8. In order to measure a subject's pulse, the signal processor 587 includes a pulse detector 910, which calculates a time interval between peaks detected by the peak detector 585 and measures a pulse based on the time interval.

[0041] In order to measure a subject's oxygen saturation, the signal processor 587 includes an alternating current (AC) detector 920, which detects changes between maximum values and minimum values of a waveform output from the peak detector 585 to detect a light intensity variation due to pulsatile components of an artery; a direct current (DC) detector 922, which detects the minimum values of the waveform output from the peak detector 585 to detect a light intensity due to non-pulsatile components; a reflection coefficient detector 924, which calculates a reflection coefficient using a DC component and an AC component of a pulse wave; and an oxygen saturation detector 926, which calculates oxygen saturation using the reflection coefficient.

[0042] In order to detect a subject's respiration frequency (rate), the signal processor 587 includes a band pass filter (BPF) 930, which band pass filters a pulse signal received from the peak detector 585, and a respiration detector 935, which detects a respiration frequency using the band pass filtered pulse signal.

[0043] Hereinafter, a method of measuring a bio signal according to an embodiment of the present invention will be described with reference to FIGS. 10 through 15B.

[0044] Initially, a method of measuring temperature using the bio signal measurement unit 500 will be described. Since a temperature of human skin tissue varies at different body parts and rapidly changes depending on external temperature, it is important to select an appropriate body part for temperature measurement. Generally, a contact type thermometer is used at an armpit or the rectum, and a non-contact type thermometer is used in an ear canal near an eardrum. The temperature of the eardrum is medically known as being very close to internal body temperature and barely influenced by external temperature. The internal body temperature and radiant electromagnetic energy or infrared energy are related as follows.

[0045] A total amount of electromagnetic energy radiated from a black body is proportional to the fourth power of the temperature of the black body according to Stefan-Boltzmann's Law, as shown in Formula (1).

$$Q = \sigma T^4 \quad \dots(1)$$

[0046] Here, Q represents a total amount of electromagnetic energy radiated from the black body, T denotes the temperature of the black body, and σ denotes a constant called the Stefan-Boltzmann constant. An amount of electromagnetic energy radiated from a body, such as a human body, that is not completely black is influenced by radiant components of the body. Such a body is referred to as a gray body. When the emissivity of the gray body is ω , Formula (1) is modified into Formula (2).

$$Q = \omega \sigma T^4 \quad \dots(2)$$

[0047] Here, the emissivity ω has a value between zero (0) and one (1). The emissivity ω of a human body in a far infrared band is almost one (1), exhibiting characteristics near to those of a black body. Accordingly, an absolute internal body temperature can be calculated using the total amount of infrared energy radiated from the internal body. In addition, a change in the infrared energy is proportional to the fourth power of a change in the internal body temperature.

[0048] FIG. 10 is a graph of an intensity of radiant energy versus wavelength at different temperatures of a black body. Energy radiated from the black body at a constant temperature gradually increases as the wavelength increases and reaches a peak. Thereafter, when the wavelength further increases, the radiant energy decreases. A peak of such a characteristic curve changes as temperature changes, and a wavelength at which the peak occurs also varies with the temperature. As shown in FIG. 10, when the temperature is 1100 K, a peak occurs at a wavelength of about 2.5 μm . When the temperature decreases to 800 K, a peak occurs at a wavelength of about 3.8 μm and the intensity of radiant energy decreases. A wavelength λ giving maximum radiant energy at a particular temperature T is defined by Formula (3).

$$\lambda(\text{max}) = 0.29 / T \quad \dots(3)$$

[0049] Since targets of a non-contact type infrared thermometer generally have a temperature of about 30-40 °C, the targets radiate far infrared rays in which a wavelength of about 8-12 μm provides maximum radiant energy. Accordingly, a photodetector for detecting the far infrared rays is required to have a satisfactory response characteristic in a band of about 8-12 μm .

[0050] A filter of a general sensor used in infrared thermometers needs to have a frequency response characteristic as shown in FIG. 11. More specifically, it is preferable that a response is great at a wavelength of about 6-16 μm , but almost constant transmission appears at the band of about 8-12 μm . Though a total amount of electromagnetic energy radiated from the black body is proportional to the fourth power of the temperature of the black body, when a measurement range is very narrow, for example, 30-40 °C, as in a thermometer, the total amount of electromagnetic energy can be considered as being linear within the range of 30-40 °C. FIG. 12 is a graph of output voltage of the sensor used in FIG. 11 versus temperature. As described above, a linear characteristic appears in a temperature range of 30-40 °C.

[0051] Based on the above-described response of an infrared sensor, the operating principle of the temperature measurement module 510 will be described with reference to FIGS. 5B and 7. As described above, the temperature measurement module 510 includes the waveguide 511 for collecting light and the light receiver 513 implemented by an infrared sensor. The waveguide 511 is disposed near an eardrum to collect radiant infrared rays. The waveguide 511 includes a material reflecting infrared rays therewithin to guide the collected infrared rays to the light receiver 513. Then, the light receiver 513 installed within the bio signal measurement unit 500 detects the infrared rays and generates an electrical detection signal according to an amount of the infrared rays.

[0052] Since the electrical detection signal is too weak to be transmitted or digitized, the signal is amplified by the amplifier 571. The amplified detection signal includes a plurality of noise components, but a signal component required for measurement of body temperature is a DC component appearing in a peak wavelength rather than an AC component changing over time. Accordingly, the amplified detection signal is filtered by the filter 572 to remove the noise and AC components. The filtered detection signal is converted to a digital value by the A/D converter 573. The A/D converter 573 also converts the digital value to a temperature value to be displayed to a user.

[0053] However, when the display unit 590 is implemented by an LCD included in a mobile apparatus, such as a mobile communication terminal as shown in FIG. 5B, the A/D converter 573 simply converts an analog signal to a digital signal. The digital signal can be converted to a temperature value by an operation unit included in the mobile apparatus and then output to the user through the display unit 590. In addition, it is obvious to those skilled in the art that the control unit 550 including the temperature processor 570 can be installed within the mobile apparatus including the display unit 590 so that the temperature measurement module 510 may be directly connected to the mobile apparatus.

[0054] When a user measures his own body temperature using a thermometer provided in the ear type bio signal measurement unit 500, the user inserts the bio signal measurement unit 500 into his ear and monitors the display unit 590. Thus, the user himself can take a measurement and check the results of the measurement. In addition, when re-measurement is required since the bio signal measurement unit 500 is not appropriately inserted into the ear, the user himself can adjust the insertion of the bio signal measurement unit 500.

[0055] A method of measuring oxygen saturation will now be described with reference to FIGS. 8, 9 and 13. Oxygen saturation is a percentage of a concentration of oxidized hemoglobin in a concentration of the total hemoglobin, i.e., a quantification of an amount of oxygen with which blood is saturated in order to maintain the normal functions of human cells. Many methods of detecting oxygen saturation using light having at least two different wavelengths have been researched and developed. In a representative method of measuring oxygen saturation among them, red light and infrared light are radiated onto vital tissue, absorbance of pulsatile components in the arterial blood is obtained at each wavelength, and oxygen saturation is calculated using a ratio between absorbances at different wavelengths. Most light radiated onto a human body is absorbed by non-pulsatile components such as bones and tissue having a constant transmission path, and about 1-2 % of the light is absorbed by the pulsatile components in the arterial blood. The amount of light absorbed by the pulsatile components and the amount of light absorbed by the non-pulsatile components can be obtained at each wavelength using the intensities of the light transmitted through the human body. A ratio between

an amount of light absorbed by the non-pulsatile components and an amount of light absorbed by the pulsatile components at each of the two different wavelengths of the red light and the infrared light, respectively, indicates a light absorbance of hemoglobin in the arterial blood. The oxygen saturation is calculated from a ratio between the amounts of light absorbed by hemoglobin at the two different wavelengths. In FIG. 13, "Ip" denotes a maximum point of a pulsatile component (AC), "Iv" denotes a minimum point of the pulsatile component (AC).

[0056] Referring to FIG. 8, which shows the PPG measurement module 520 and the PPG signal processor 580, incident light from the first light source is transmitted through the body part. When the incident light passes through a path "a", it encounters a blood vessel, in this case, an artery, and is modulated by pulsation. When the incident light passes through a path "b", it is not influenced by pulsation. When a radius of the artery is " r_a " and a radius of the body part is " r_b ", the entire time-invariant component DC of light detected by the photodetector is composed of a time-invariant component DC_a of the light passing through the path "a" and a time-invariant component DC_b of the light passing through the path "b", as shown in FIG. 13, and is expressed by Formula (4).

$$DC = DC_a + DC_b \quad \dots(4)$$

[0057] DC_a can be expressed by Formula (5).

$$DC_a = f(r_a, r_b, \lambda) DC \quad \dots(5)$$

[0058] Here, $f(r_a, r_b, \lambda)$ is a constant denoting a factor changing according to the structure of the body part including an artery, and λ denotes a wavelength of the incident light. An intensity of light transmitted through the body part is modulated by as much as a variation ΔOD_{tot} of light attenuation OD_{tot} by a change in an amount of blood due to pulsation of the artery. Here, the variation ΔOD_{tot} is for the light passing through the path "a" and can be expressed by Formula (6).

$$\Delta OD_{tot} = AC/DC_a = f^{-1}(r_a, r_b, \lambda) AC/DC \quad \dots(6)$$

[0059] Since it is very difficult to accurately measure $f(r_a, r_b, \lambda)$, reflection coefficients R_1 and R_2 for two wavelengths λ_1 and λ_2 are measured, and then a ratio $R_{12} = R_1/R_2$ is obtained, as shown in Formula (7), in order to calculate oxygen saturation without having to accurately measure $f(r_a, r_b, \lambda)$.

$$R_{12} = \frac{R_1}{R_2} = \frac{\Delta OD_{tot, \lambda_1}}{\Delta OD_{tot, \lambda_2}} = \frac{AC_{\lambda_1}/DC_{\lambda_1}}{AC_{\lambda_2}/DC_{\lambda_2}} \quad \dots(7)$$

[0060] Here, AC_{λ_1} and AC_{λ_2} denote time-variant components with respect to the first and second wavelengths λ_1 and λ_2 , and DC_{λ_1} and DC_{λ_2} denote time-invariant components with respect to the first and second wavelengths λ_1 and λ_2 . For example, Formula (7) can be obtained using a pulse oximeter.

[0061] Consequently, as shown in Formula (7), the reflection coefficient detector (924 of FIG. 9) divides the time-variant component AC_{λ_1} or AC_{λ_2} , which has been input from the photodetector through the peak detector 585 and detected by the AC detector 920, by the time-invariant component DC_{λ_1} or DC_{λ_2} detected by the DC detector 922 to obtain a variation $\Delta OD_{tot, \lambda_1}$ or $\Delta OD_{tot, \lambda_2}$ of light attenuation at each wavelength, and divides the variation $\Delta OD_{tot, \lambda_1}$ of attenuation of light from the first light source by the variation $\Delta OD_{tot, \lambda_2}$ of attenuation of light from the second light source to obtain a ratio of the reflection coefficient of the first light source to the reflection coefficient of the second light source.

[0062] The oxygen saturation detector 926 calculates a concentration C_{Hb} of hemoglobin in blood using at least one ratio R_{12} received from the reflection coefficient detector 924. According to an embodiment of the present invention, when the first and second wavelengths λ_1 and λ_2 are selected, the hemoglobin concentration C_{Hb} is calculated using the ratio R_{12} , as shown in Formula (8).

$$C_{Hb} = \frac{35^2(\varepsilon_1 - R_{12}\varepsilon_2)}{k_1a_1 - k_2a_2R_{12}} + 35 \quad \dots(8)$$

[0063] Here, ε_1 denotes an absorption coefficient with respect to the first wavelength λ_1 ; ε_2 denotes an absorption coefficient with respect to the second wavelength λ_2 ; k_1 and k_2 denote constants determined by the first and second wavelengths λ_1 and λ_2 and characteristics of scattering and absorbing incident light at a predetermined body part; and a_1 and a_2 denote constants determined by a size of a scattered particle, a refractive index of hemoglobin, a refractive index of serum, and the first and second wavelengths λ_1 and λ_2 .

[0064] The oxygen saturation detector 926 calculates oxygen saturation S using the measured hemoglobin concentration C_{Hb} , as shown in Formula (9), and outputs the oxygen saturation S to the display unit 590.

[0065] Hereinafter, a procedure in which the oxygen saturation detector 926 detects oxygen saturation will be described. One wavelength λ_x is selected from among at least two wavelengths, and another wavelength λ_o having a maximum difference in an absorption coefficient according to a type of hemoglobin is selected.

[0066] The wavelengths λ_x and λ_o are derived based on bio spectroscopy. While some wavelengths can or cannot be well absorbed according to an amount of hemoglobin (Hb) and oxy-hemoglobin (HbO₂) in blood, other wavelengths are well absorbed regardless of the amount of Hb and HbO₂. In the present invention, the reference wavelength λ_x is barely influenced by the amount of Hb and HbO₂, and the wavelength λ_o readily changes according to the amount of Hb and HbO₂. For example, the wavelength λ_o may be a wavelength of 660 nm giving a maximum difference between an absorption coefficient for Hb and an absorption coefficient for HbO₂; and the wavelength λ_x may be a wavelength of 805 nm selected from a near infrared band of 800 through 950 nm. A discussion of these characteristics of wavelengths may be found in a book by J.G. Webster entitled "Design of Pulse Oximeters," at pages 40-55, published in 1997.

[0067] The oxygen saturation detector 926 obtains a variation $\Delta OD_{tot,\lambda_o}$ of light attenuation at the selected wavelength λ_o and a variation $\Delta OD_{tot,\lambda_x}$ of light attenuation at the selected wavelength λ_x and obtains a ratio R_{ox} of the variation $\Delta OD_{tot,\lambda_o}$ to the variation $\Delta OD_{tot,\lambda_x}$.

[0068] Thereafter, the oxygen saturation detector 926 calculates oxygen saturation S in blood using the ratio R_{ox} and the hemoglobin concentration C_{Hb} according to Formula (9).

$$S = \frac{R_{ox}(\varepsilon_{Hb,x} - \varepsilon_{Hb,o})C_{Hb} + (k_xa_x - k_oa_o)H(1-H)}{(\varepsilon_{HbO_2,o} - \varepsilon_{Hb,o})C_{Hb}} \quad \dots(9)$$

[0069] Here, $\varepsilon_{HbO_2,o}$ denotes an absorption coefficient for HbO₂ with respect to the wavelength λ_o ; $\varepsilon_{Hb,o}$ denotes an absorption coefficient for Hb with respect to the wavelength λ_o ; $\varepsilon_{Hb,x}$ denotes an absorption coefficient for Hb with respect to the wavelength λ_x ; k_x and k_o denote constants determined by the wavelengths λ_x and λ_o and characteristics of scattering and absorbing incident light at a predetermined body part; and a_x and a_o denote constants determined by a size of a scattered particle, a refractive index of hemoglobin, a refractive index of serum, and the wavelengths λ_x and λ_o .

[0070] FIG. 14 is a flowchart of a method of measuring a pulse rate. A method of measuring a pulse rate will be described with further reference to FIGS. 9 and 14.

[0071] When a pulse wave necessary for performing a measurement of oxygen saturation is measured, a change in a blood flow rate in an artery is caused by a heart beat. A pulse rate is measured to measure the heart rate. As shown in FIG. 8, light transmitted through a predetermined body part is received and converted into an electrical signal by the photodetector. The electrical signal is amplified by the amplifier 581 and collected for a predetermined period of time, thereby forming PPG data. In step S1410, the PPG data is band pass filtered by the filter 583. In step S1420, the peak detector 585 differentiates the band-pass filtered signal and finds an inflection point at which a slope changes from positive to negative. In step S1430, an inflection point value is compared with a threshold value set initially, and the inflection point is detected as a peak when the inflection point value exceeds the threshold value, as shown in FIG. 15A. In step S1440, the pulse detector 910 calculates an average of time differences between peaks and, in step S1450, calculates a pulse rate per minute by dividing 60 seconds by the average time difference.

[0072] FIG. 15B illustrates a method of detecting a respiration frequency.

[0073] Referring to FIGS. 9 and 15B, an AC component of a PPG is synchronized with a respiration signal as well as a heart beat. A PPG signal and respiration are related as follows. According to a mechanism based on maintenance of homeostasis of a human body, during inhalation, an intra-thoracic pressure decreases, the amount of blood returning to the heart increases, a blood pressure increases due to an increase in a cardiac output, and a depressor center is

excited to expand peripheral arteries. In contrast, during exhalation, the peripheral arteries are contracted. A change in an optical path length due to expansion and contraction of the peripheral arteries is reflected on the PPG. Synchronization between the AC component and the respiration signal occurs because a change in a blood flow rate is caused by respiration and reflected on the PPG.

[0074] Frequency components in a respiration signal band are classified using a digital filter in order to extract a respiration signal from a PPG signal. A PPG signal output from the peak detector 585 is filtered by the BPF 930 having a cut-off frequency of about 0.13-0.48 Hz including a frequency band of a normal respiration signal. The respiration detector 935 detects a respiration signal from the filtered PPG signal, calculates an average respiration frequency by dividing 60 seconds by an average period of the respiration signal, and outputs the average respiration frequency to the display unit 590.

[0075] FIGS. 16A and 16B show a PPG signal and a respiration signal, respectively. FIG. 17A shows a PPG waveform obtained by band-pass filtering the PPG signal shown in FIG. 16A. FIG. 17B shows a waveform obtained by removing low-frequency components from the respiration signal shown in FIG. 16B. It may be seen from a comparison of FIGS. 17A and 17B that the band-pass filtered PPG signal closely correlates with the respiration signal.

[0076] FIG. 18 is a block diagram of an apparatus for measuring a bio signal according to an embodiment of the present invention. Referring to FIG. 18, the bio signal measurement unit 1800 has a cap shape so that it may be mounted on an earphone 1830 reproducing voice from an existing portable apparatus when a bio signal is measured. The bio signal measurement unit 1800, a controller 1850, and a display unit 1890 have the same structures as those described above, and thus only the difference will be described.

[0077] In the second embodiment, the earphone 1830 supplies driving power to a temperature measurement module including a waveguide 1811 and an infrared sensor 1813 and to a PPG measurement module 1820 and has a plurality of electrodes 1835 on an outer surface for receiving a measured signal. The bio signal measurement unit 1800 has a recess into which the earphone 1830 is inserted. A plurality of electrodes 1815 and 1825 are disposed in the recess so that they are connected to the electrodes 1835 of the earphone 1830 when the earphone 1830 is inserted into the recess. The waveguide 1811 collecting infrared rays and the infrared sensor 1813 converting the collected infrared rays to an electrical signal are installed within the cap shape of the bio signal measurement unit 1800.

[0078] When measuring a bio signal, a user mounts the cap-shaped bio signal measurement unit 1800 on the earphone 1830 such that the electrodes 1815 and 1825 are connected to the electrodes 1835 and then inserts the bio signal measurement unit 1800 combined with the earphone 1830 into his ear.

[0079] The present invention may use code that is recorded on a computer readable recording medium and can be read by a computer. The computer readable recording medium may be any type of medium on which data that can be read by a computer system can be recorded, for example, a ROM, a RAM, a CD-ROM, a magnetic tape, a floppy disc, or an optical data storage device. The present invention may also be realized as carrier waves (for example, transmitted through Internet). Alternatively, computer readable recording media may be distributed among computer systems connected through a network so that the present invention can be realized as a code that is stored in the recording media and can be read and executed in the computers.

[0080] As described above, an apparatus for measuring a bio signal according to an embodiment of the present invention includes a module measuring various types of bio information so that various types of bio information can be simultaneously measured. Also, a bio signal measurement unit including a photo plethysmography (PPG) measurement module is structured to be insertable into an ear to be in close contact with an internal surface of the ear, so that the measurement module remains without any movement, while measuring the PPG signal, thereby capable of minimizing an influence of a motion artifact. In addition, an error occurring due to contamination or damage of a sensor can be reduced.

[0081] Moreover, since an apparatus for measuring a bio signal according to an embodiment of the present invention can be connected to a mobile apparatus such as an earphone, it is convenient to carry. Further, a user is able to reposition the mount of the apparatus based on feel while observing a measured value displayed on a mobile apparatus. Thus, the user is able to perform measurements on himself and self-diagnose a condition.

[0082] When an apparatus for measuring a bio signal according to an embodiment of the present invention is combined with a mobile communication terminal, a measured bio signal can be displayed to a user through a display apparatus included in the mobile communication terminal and easily transmitted to a remote medical institution through the mobile communication terminal. As a result, remote medical treatment is possible.

[0083] Preferred embodiments of the present invention have been disclosed herein and, although specific terms are employed, they are used and are to be interpreted in a generic and descriptive sense only and not for purpose of limitation. Accordingly, it will be understood by those of ordinary skill in the art that various changes in form and details may be made without departing from the scope of the present invention as set forth in the following claims.

Claims

1. An apparatus for measuring a bio signal, comprising:

a bio signal measurement unit (1800), which is insertable into an ear to be in close contact with an internal surface of the ear, the bio signal measurement unit having a photo plethysmography (PPG) measurement module (1820) for radiating light of different wavelengths onto the internal surface of the ear, detecting light transmitted through the ear, and outputting a PPG signal including bio information;
a control unit (1850) having a PPG signal processor (580) for generating the bio information using the PPG signal measured by the PPG measurement module; and
an output unit (1890) for displaying the bio information generated from the control unit;

characterised by further comprising:

a plurality of electrodes (1815,1825) on the bio signal measurement unit for outputting the PPG signal; and
an earphone (1830) having a speaker for outputting sound and a plurality of electrodes (1835) on an outer surface for connection to the plurality of electrodes (1815,1825) of the bio signal measurement unit to receive the PPG signal output from the bio signal measurement unit;
wherein
the output unit is a liquid crystal display apparatus of a mobile communication terminal; and
the control unit (1850) has a sound processor for outputting a sound signal to the earphone.

2. The apparatus as claimed in claim 1, wherein the PPG measurement module (1820) comprises:

a light source unit for radiating light onto the internal surface of the ear; and
a photodetector for detecting light radiated onto the internal surface of the ear and then transmitted through the ear.

3. The apparatus as claimed in claim 2, wherein the light source unit comprises:

a first light source for radiating light of a first wavelength onto the internal surface of the ear; and
a second light source for radiating light of a second wavelength onto the internal surface of the ear,
wherein the first and second wavelengths are different.

4. The apparatus as claimed in any preceding claim, wherein the PPG signal processor comprises:

a peak detector (585) for detecting peaks of the PPG signal; and
a signal processor (587) for generating the bio information using values of the peaks.

5. The apparatus as claimed in claim 4, wherein the signal processor (587) comprises a pulse detector (910) for calculating a time interval between the peaks to measure a pulse rate.

6. The apparatus as claimed in claim 4 or 5, wherein the signal processor (587) comprises a respiration detector (935) for band-pass filtering the PPG signal to measure a respiration frequency.

7. The apparatus as claimed in claim 4, 5 or 6, wherein the signal processor (587) comprises:

a reflection coefficient detector (924) for detecting an AC component and a DC component from each of PPG signals detected at different wavelengths and measuring reflection coefficients; and
an oxygen saturation detector (926) for detecting oxygen saturation in blood using a ratio between the reflection coefficients of the different wavelengths.

8. The apparatus as claimed in any of claims 4 to 7, wherein the PPG signal processor further comprises:

an amplifier (581) for amplifying the PPG signal; and
a filter (583) for removing noise components from the PPG signal amplified by the amplifier and then outputting the PPG signal to the peak detector.

9. The apparatus as claimed in any preceding claim, wherein the bio signal measurement unit further comprises a temperature measurement module for sensing infrared rays radiated from a body and outputting an electrical signal corresponding to the sensed infrared rays, and wherein the control unit further includes a temperature processor (570) for calculating a body temperature using the electrical signal output from the temperature measurement module.

10. The apparatus as claimed in claim 9, wherein the temperature measurement module comprises:

a waveguide (1811) installed near an eardrum for guiding infrared rays radiated from the eardrum; and
a light receiver (1813) for sensing the infrared rays guided by the waveguide and converting the infrared rays to the electrical signal.

11. The apparatus as claimed in claim 10, wherein the waveguide (1811) is made of a material that can reflect infrared rays.

12. The apparatus as claimed in claim 9, 10 or 11, wherein the temperature processor (570) comprises:

an amplifier (571) for amplifying the electrical signal received from the temperature measurement module;
a filter (572) for removing noise from the amplified electrical signal; and
an analog-to-digital converter (573) for converting the electrical signal to a digital signal.

13. The apparatus as claimed in any preceding claim, further comprising a mobile communication terminal through which the bio information generated from the control unit is wirelessly transmitted to a predetermined medical institution.

14. The apparatus as claimed in any preceding claim, wherein the output unit is a liquid crystal display apparatus of a compact disc player.

15. The apparatus as claimed in any preceding claim, wherein the control unit further includes a sound processor for controlling the volume of the sound signal.

16. A method of measuring a bio signal using an ear type bio signal measurement apparatus including a bio signal measurement unit (1800), which is insertable into an ear to measure a bio signal, a control unit (1850) for generating bio information using the measured bio signal, and an output unit (1890) for outputting the bio information, the method comprising:

- (a) receiving infrared rays radiated from an eardrum and measuring a body temperature using the bio signal measurement unit;
- (b) radiating light having different wavelengths onto an internal surface of an ear, which is in close contact with the bio signal measurement unit, to measure a photo plethysmography (PPG) signal including bio information and measuring at least one bio signal from among the group consisting of oxygen saturation, a pulse rate, and a respiration frequency, using the PPG signal; and
- (c) outputting the at least one bio signal measured in (a) and (b),

wherein (a) and (b) are simultaneously performed;

characterised in that the output unit is a liquid crystal display apparatus of a mobile communication terminal and **in that** the measurement apparatus further comprises a plurality of electrodes on the bio signal measurement unit for outputting the PPG signal, an earphone (1830) having a speaker for outputting sound and a plurality of electrodes (1835) on an outer surface for connection to the plurality of electrodes (1815,1825) of the bio signal measurement unit to receive the PPG signal output from the bio signal measurement unit and a control unit having a sound processor for outputting a sound signal to the earphone;
wherein (c) further includes:

transmitting the measured PPG signal from the plurality of electrodes (181,1825) on the biosignal measurement unit to plurality of electrodes (1835) on the outer surface of the earphone (1830); and
wirelessly transmitting the bio signals measured in (a) and (b) to a predetermined medical institution through the mobile communication terminal; and
further **characterised by** outputting a sound signal received from the mobile communication terminal from the earphone.

17. The method as claimed in claim 16, wherein (b) comprises:

- (b1) radiating the light having the different wavelengths onto the internal surface of the ear, receiving the light transmitted through the ear, and outputting the PPG signal, using a PPG measurement module included in the bio signal measurement unit having a side thereof in close contact with the internal surface of the ear;
- (b2) detecting peaks of the PPG signal; and
- (b3) generating bio information using the detected peaks.

18. The method as claimed in claim 17, wherein (b3) comprises:

- detecting an AC component and a DC component from each of PPG signals detected at the different wavelengths and measuring reflection coefficients of the different wavelengths; and
- calculating oxygen saturation in blood using a ratio between the reflection coefficients of the different wavelengths.

19. The method as claimed in claim 17 or 18, wherein (b3) comprises band-pass filtering the PPG signal to detect a respiration frequency.

20. The method as claimed in claim 17, 18 or 19, wherein (b2) comprises:

- band-pass filtering the PPG signal collected for a predetermined period of time;
- detecting an inflection point by differentiating the filtered PPG signal; and
- storing the inflection point as a peak when the inflection point has a value exceeding a predetermined threshold value.

21. The method as claimed in claim 17, 18, 19 or 20, wherein (b3) comprises measuring a pulse rate using a time interval between peaks of the PPG signal.

22. The method as claimed in any of claims 16 to 21, wherein the output unit is a liquid crystal display apparatus of a mobile communication terminal, and (c) further includes wirelessly transmitting the bio signals measured in (a) and (b) to a predetermined medical institution through the mobile communication terminal.

Patentansprüche

1. Vorrichtung zum Messen eines Biosignals, umfassend:

- eine Biosignalmesseinheit (1800), die in ein Ohr einsetzbar ist, so dass sie in engen Kontakt mit einer Innenfläche des Ohrs kommt, wobei die Biosignalmesseinheit ein Photo-Plethysmographie(PPG)-Messmodul (1820) zum Einstrahlen von Licht unterschiedlicher Wellenlängen auf die Innenfläche des Ohrs, Detektieren von durch das Ohr transmittiertem Licht und Ausgeben eines PPG-Signals mit Bioinformationen aufweist,
 - eine Steuereinheit (1850) mit einem PPG-Signalprozessor (580) zum Erzeugen der Bioinformationen unter Verwendung des vom PPG-Messmodul gemessenen PPG-Signals und
 - eine Ausgabeeinheit (1890) zum Anzeigen der von der Steuereinheit erzeugten Bioinformationen,
- dadurch gekennzeichnet, dass** sie weiter umfasst:

- eine Mehrzahl von Elektroden (1815, 1825) an der Biosignalmesseinheit zum Ausgeben des PPG-Signals und
- einen Ohrhörer (1830) mit einem Lautsprecher zum Ausgeben von Schall und eine Mehrzahl von Elektroden (1835) an einer Außenfläche zum Verbinden mit der Mehrzahl von Elektroden (1815, 1825) der Biosignalmesseinheit zum Empfangen des von der Biosignalmesseinheit ausgegebenen PPG-Signals,
- wobei die Ausgabeeinheit eine Flüssigkristallanzeigeeinrichtung eines mobilen Kommunikationsgeräts ist und
- die Steuereinheit (1850) einen Schallprozessor zum Ausgeben eines Schallsignals an den Ohrhörer aufweist.

2. Vorrichtung nach Anspruch 1, wobei das PPG-Messmodul (1820) umfasst:

eine Lichtquelleneinheit zum Einstrahlen von Licht auf die Innenfläche des Ohrs und einen Photodetektor zum Detektieren von auf die Innenfläche des Ohrs eingestrahlt und dann durch das Ohr transmittiertem Licht.

- 5 **3.** Vorrichtung nach Anspruch 2, wobei die Lichtquelleneinheit umfasst:

eine erste Lichtquelle zum Einstrahlen von Licht einer ersten Wellenlänge auf die Innenfläche des Ohrs und eine zweite Lichtquelle zum Einstrahlen von Licht einer zweiten Wellenlänge auf die Innenfläche des Ohrs, wobei die erste und die zweite Wellenlänge unterschiedlich sind.
- 10 **4.** Vorrichtung nach einem der vorhergehenden Ansprüche, wobei der PPG-Signalprozessor umfasst:

einen Peakdetektor (585) zum Detektieren von Peaks im PPG-Signal und einen Signalprozessor (587) zum Erzeugen der Bioinformationen unter Verwendung von Werten der Peaks.
- 15 **5.** Vorrichtung nach Anspruch 4, wobei der Signalprozessor (587) einen Pulsdetektor (935) zum Berechnen eines Zeitintervalls zwischen den Peaks zum Messen einer Pulsrate umfasst.
- 20 **6.** Vorrichtung nach Anspruch 4 oder 5, wobei der Signalprozessor (587) einen Atmungsdetektor (935) zum Bandpassfiltern des PPG-Signals zum Messen einer Atmungsfrequenz umfasst.
- 25 **7.** Vorrichtung nach Anspruch 4, 5 oder 6, wobei der Signalprozessor (587) umfasst:

einen Reflexionskoeffizientendetektor (924) zum Detektieren einer AC-Komponente und einer DC-Komponente aus jedem der PPG-Signale, die bei unterschiedlichen Wellenlängen detektiert wurden, und Messen von Reflexionskoeffizienten und einen Sauerstoffsättigungsdetektor (926) zum Detektieren einer Sauerstoffsättigung im Blut unter Verwendung eines Verhältnisses zwischen den Reflexionskoeffizienten der unterschiedlichen Wellenlängen,
- 30 **8.** Vorrichtung nach einem der Ansprüche 4 bis 7, wobei der PPG-Signalprozessor weiter umfasst:

einen Verstärker (581) zum Verstärken des PPG-Signals und einen Filter (583) zum Eliminieren von Rauschkomponenten aus dem vom Verstärker verstärkten PPG-Signal und dann Ausgeben des PPG-Signals an den Peakdetektor.
- 35 **9.** Vorrichtung nach einem der vorhergehenden Ansprüche, wobei die Biosignalmesseinheit weiter ein Temperaturmessmodul zum Messen von Infrarotstrahlen, die von einem Körper ausgestrahlt werden, und Ausgeben eines elektrischen Signals, das den gemessenen Infrarotstrahlen zugeordnet ist, umfasst und wobei die Steuereinheit weiter einen Temperaturprozessor (570) zum Berechnen einer Körpertemperatur unter Verwendung des vom Temperaturmessmodul ausgegebenen elektrischen Signals umfasst.
- 40 **10.** Vorrichtung nach Anspruch 9, wobei das Temperaturmessmodul umfasst:

einen Wellenleiter (1811), der nahe einem Trommelfell installiert ist, um vom Trommelfell ausgestrahlte Infrarotstrahlen zu leiten, und einen Lichtempfänger (1813) zum Messen der vom Wellenleiter geleiteten Infrarotstrahlen und Umwandeln der Infrarotstrahlen in das elektrische Signal.
- 45 **11.** Vorrichtung nach Anspruch 10, wobei der Wellenleiter (1811) aus einem Material gebildet ist, das Infrarotstrahlen reflektieren kann.
- 50 **12.** Vorrichtung nach Anspruch 9, 10 oder 11, wobei der Temperaturprozessor (570) umfasst:

einen Verstärker (571) zum Verstärken des vom Temperaturmessmodul empfangenen elektrischen Signals, einen Filter (572) zum Eliminieren von Rauschen aus dem verstärkten elektrischen Signal und einen Analog/Digital-Wandler (573) zum Umwandeln des elektrischen Signals in ein digitales Signal.
- 55 **13.** Vorrichtung nach einem der vorhergehenden Ansprüche, weiter umfassend ein mobiles Kommunikationsgerät,

durch das die von der Steuereinheit erzeugten Bioinformationen drahtlos zu einer vorgegebenen medizinischen Einrichtung übertragen werden.

14. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei die Ausgabeeinheit eine Flüssigkristallanzeigeeinrichtung eines Compact-Disc-Abspielgeräts ist.

15. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei die Steuereinheit weiter einen Schallprozessor zum Steuern der Lautstärke des Schallsignals aufweist.

16. Verfahren zum Messen eines Biosignals unter Verwendung einer Ohr-Biosignalmessvorrichtung, umfassend eine Biosignalmesseinheit (1800), die in ein Ohr einsetzbar ist, um ein Biosignal zu messen, eine Steuereinheit (1850) zum Erzeugen von Bioinformationen unter Verwendung des gemessenen Biosignals und eine Ausgabeeinheit (1890) zum Ausgeben der Bioinformationen, wobei das Verfahren umfasst:

(a) Empfangen von Infrarotstrahlen, die von einem Trommelfell ausgestrahlt werden, und Messen einer Körpertemperatur unter Verwendung der Biosignalmesseinheit,

(b) Einstrahlen von Licht mit unterschiedlichen Wellenlängen auf eine Innenfläche eines Ohrs, die in engem Kontakt mit der Biosignalmesseinheit steht, um ein Photo-Plethysmographie(PPG)-Signal zu messen, das Bioinformationen beinhaltet, und Messen mindestens eines Biosignals aus der Gruppe bestehend aus Sauerstoffsättigung, Pulsrate und Atmungsfrequenz unter Verwendung des PPG-Signals und

(c) Ausgeben des mindestens einen in (a) und (b) gemessenen Biosignals, wobei (a) und (b) gleichzeitig durchgeführt werden,

dadurch gekennzeichnet, dass die Ausgabeeinheit eine Flüssigkristallanzeigeeinrichtung eines mobilen Kommunikationsgeräts ist und dass die Messvorrichtung weiter eine Mehrzahl von Elektroden an der Biosignalmesseinheit zum Ausgeben des PPG-Signals, einen Ohrhörer (1830) mit einem Lautsprecher zum Ausgeben von Schall und eine Mehrzahl von Elektroden (1835) an einer Außenfläche zum Verbinden mit der Mehrzahl von Elektroden (1815, 1825) der Biosignalmesseinheit zum Empfangen des von der Biosignalmesseinheit ausgegebenen PPG-Signals und eine Steuereinheit mit einem Schallprozessor zum Ausgeben eines Schallsignals an den Ohrhörer umfasst, wobei (c) weiter umfasst:

Übertragen des gemessenen PPG-Signals von der Mehrzahl von Elektroden (1815, 1825) an der Biosignalmesseinheit zur Mehrzahl von Elektroden (1835) an der Außenfläche des Ohrhörers (1830) und drahtloses Übertragen der in (a) und (b) gemessenen Biosignale zu einer vorgegebenen medizinischen Einrichtung durch das mobile Kommunikationsgerät und weiter **gekennzeichnet durch** Ausgeben eines vom mobilen Kommunikationsgerät empfangenen Schallsignals vom Ohrhörer.

17. Verfahren nach Anspruch 16, wobei (b) umfasst:

(b1) Einstrahlen des Lichts mit den unterschiedlichen Wellenlängen auf die Innenfläche des Ohrs, Empfangen des durch das Ohr transmittierten Lichts und Ausgeben des PPG-Signals unter Verwendung eines in der Biosignalmesseinheit enthaltenen PPG-Messmoduls, wobei eine Seite davon in engem Kontakt mit der Innenfläche des Ohrs steht,

(b2) Detektieren von Peaks des PPG-Signals und

(b3) Erzeugen von Bioinformationen unter Verwendung der detektierten Peaks.

18. Verfahren nach Anspruch 17, wobei (b3) umfasst:

Detektieren einer AC-Komponente und einer DC-Komponente aus jedem der PPG-Signale, die bei unterschiedlichen Wellenlängen detektiert wurden, und Messen von Reflexionskoeffizienten der unterschiedlichen Wellenlängen, und

Berechnen einer Sauerstoffsättigung im Blut unter Verwendung eines Verhältnisses zwischen den Reflexionskoeffizienten der unterschiedlichen Wellenlängen.

19. Verfahren nach Anspruch 17 oder 18, wobei (b3) Bandpassfiltern des PPG-Signals zum Detektieren einer Atmungsfrequenz umfasst.

20. Verfahren nach Anspruch 17, 18 oder 19, wobei (b2) umfasst:

Bandpassfiltern des über eine vorgegebene Zeitspanne aufgenommenen PPG-Signals,
Detektieren eines Wendepunkts durch Differenzieren des gefilterten PPG-Signals und
Speichern des Wendepunkts als Peak, wenn der Wendepunkt einen Wert aufweist, der einen vorgegebenen
Schwellenwert übersteigt.

21. Verfahren nach Anspruch 17, 18, 19 oder 20, wobei (b3) Messen einer Pulsrate unter Verwendung eines Zeitintervalls zwischen Peaks des PPG-Signals umfasst.

22. Verfahren nach einem der Ansprüche 16 bis 21, wobei die Ausgabeeinheit eine Flüssigkristallanzeigeeinrichtung eines mobilen Kommunikationsgeräts ist und (c) weiter drahtloses Übertragen der in

(a) und (b) gemessenen Biosignale zu einer vorgegebenen medizinischen Einrichtung durch das mobile Kommunikationsgerät umfasst.

Revendications

1. Appareil pour mesurer un signal biologique, comprenant :

une unité de mesure de signal biologique (1800), qui peut être insérée dans une oreille pour être en contact étroit avec une surface interne de l'oreille, l'unité de mesure de signal biologique comportant un module de mesure de pléthysmographie optique (PPG) (1820) pour rayonner une lumière à différentes longueurs d'onde sur la surface interne de l'oreille, détecter la lumière transmise à travers l'oreille, et délivrer un signal de PPG comprenant des informations biologiques,
une unité de commande (1850) comportant un processeur de signaux de PPG (580) pour générer les informations biologiques en utilisant le signal de PPG mesuré par le module de mesure de PPG ; et
une unité de sortie (1890) pour afficher les informations biologiques générées par l'unité de commande ;

caractérisé en ce qu'il comprend en outre :

une pluralité d'électrodes (1815, 1825) sur l'unité de mesure de signal biologique pour délivrer le signal de PPG ; et
un écouteur (1830) comportant un haut-parleur pour délivrer un son et une pluralité d'électrodes (1835) sur une surface externe pour une connexion à la pluralité d'électrodes (1815, 1825) de l'unité de mesure de signal biologique pour recevoir le signal de PPG délivré par l'unité de mesure de signal biologique ;

dans lequel

l'unité de sortie est un dispositif d'affichage à cristaux liquides d'un terminal de communication mobile ; et
l'unité de commande (1850) comporte un processeur de son pour délivrer un signal sonore à l'écouteur.

2. Appareil selon la revendication 1, dans lequel le module de mesure de PPG (1820) comprend :

une unité de source de lumière pour rayonner une lumière sur la surface interne de l'oreille ; et
un photodétecteur pour détecter la lumière rayonnée sur la surface interne de l'oreille et transmise ensuite à travers l'oreille.

3. Appareil selon la revendication 2, dans lequel l'unité de source de lumière comprend :

une première source de lumière pour rayonner une lumière à une première longueur d'onde sur la surface interne de l'oreille ; et
une deuxième source de lumière pour rayonner une lumière à une deuxième longueur d'onde sur la surface interne de l'oreille,
dans lequel les première et deuxième longueurs d'onde sont différentes.

4. Appareil selon l'une quelconque des revendications précédentes, dans lequel le processeur de signaux de PPG

comprend :

un détecteur de pic (585) pour détecter les pics du signal de PPG ; et
un processeur de signaux (587) pour générer les informations biologiques en utilisant les valeurs des pics.

5 5. Appareil selon la revendication 4, dans lequel le processeur de signaux (587) comprend un détecteur d'impulsion (910) pour calculer un intervalle de temps entre les pics pour mesurer une fréquence d'impulsion.

10 6. Appareil selon la revendication 4 ou 5, dans lequel le processeur de signaux (587) comprend un détecteur de respiration (935) pour appliquer un filtrage passe-bande au signal de PPG pour mesurer une fréquence de respiration.

7. Appareil selon la revendication 4, 5 ou 6, dans lequel le processeur de signaux (587) comprend :

15 un détecteur de coefficient de réflexion (924) pour détecter une composante alternative et une composante continue de chacun des signaux de PPG détectés à différentes longueurs d'onde et mesurer les coefficients de réflexion ; et

un détecteur de saturation en oxygène (926) pour détecter une saturation en oxygène dans le sang en utilisant un rapport entre les coefficients de réflexion des différentes longueurs d'onde.

20 8. Appareil selon l'une quelconque des revendications 4 à 7, dans lequel le processeur de signaux de PPG comprend en outre :

un amplificateur (581) pour amplifier le signal de PPG ; et

25 un filtre (583) pour retirer les composantes de bruit du signal de PPG amplifié par l'amplificateur et pour délivrer ensuite le signal de PPG au détecteur de pic.

30 9. Appareil selon l'une quelconque des revendications précédentes, dans lequel l'unité de mesure de signal biologique comprend en outre un module de mesure de température pour détecter les rayons infrarouges rayonnés par un corps et pour délivrer un signal électrique correspondant aux rayons infrarouges détectés, et dans lequel l'unité de commande comprend en outre un processeur de température (570) pour calculer une température corporelle en utilisant le signal électrique délivré par le module de mesure de température.

10. Appareil selon la revendication 9, dans lequel le module de mesure de température comprend :

35 un guide d'ondes (1811) installé à proximité d'un tympan pour guider les rayons infrarouges rayonnés par le tympan ; et

un récepteur de lumière (1813) pour détecter les rayons infrarouges guidés par le guide d'ondes et pour convertir les rayons infrarouges en le signal électrique.

40 11. Appareil selon la revendication 10, dans lequel le guide d'ondes (1811) est réalisé en un matériau qui peut réfléchir les rayons infrarouges.

12. Appareil selon la revendication 9, 10 ou 11, dans lequel le processeur de température (570) comprend :

45 un amplificateur (571) pour amplifier le signal électrique reçu du module de mesure de température ;

un filtre (572) pour retirer le bruit du signal électrique amplifié ; et

un convertisseur analogique-numérique (573) pour convertir le signal électrique en un signal numérique.

50 13. Appareil selon l'une quelconque des revendications précédentes, comprenant en outre un terminal de communication mobile par l'intermédiaire duquel les informations biologiques générées par l'unité de commande sont transmises à un organisme médical prédéterminé par une liaison sans fil.

14. Appareil selon l'une quelconque des revendications précédentes, dans lequel l'unité de sortie est un dispositif d'affichage à cristaux liquides d'un lecteur de disque compact.

55 15. Appareil selon l'une quelconque des revendications précédentes, dans lequel l'unité de commande comprend en outre un processeur de son pour commander le volume du signal sonore.

16. Procédé de mesure d'un signal biologique en utilisant un appareil de mesure de signal biologique du type auditif comprenant une unité de mesure de signal biologique (1800), qui peut être insérée dans une oreille pour mesurer un signal biologique, une unité de commande (1850) pour générer des informations biologiques en utilisant le signal biologique mesuré, et une unité de sortie (1890) pour délivrer les informations biologiques, le procédé consistant à :

(a) recevoir des rayons infrarouges rayonnés par un tympan et mesurer une température corporelle en utilisant l'unité de mesure de signal biologique ;

(b) rayonner une lumière ayant différentes longueurs d'onde sur une surface interne d'une oreille, qui est en contact étroit avec l'unité de mesure de signal biologique, pour mesurer un signal de pléthysmographie optique (PPG) comprenant des informations biologiques et pour mesurer au moins un signal biologique du groupe consistant en une saturation en oxygène, une fréquence d'impulsion et une fréquence de respiration, en utilisant le signal de PPG ; et

(c) délivrer ledit au moins un signal biologique mesuré aux étapes (a) et (b),

dans lequel les étapes (a) et (b) sont effectuées simultanément; **caractérisé en ce que** l'unité de sortie est un dispositif d'affichage à cristaux liquides d'un terminal de communication mobile, et **en ce que** l'appareil de mesure comprend en outre une pluralité d'électrodes sur l'unité de mesure de signal biologique pour délivrer le signal de PPG, un écouteur (1830) comportant un haut-parleur pour délivrer un son et une pluralité d'électrodes (1835) sur une surface externe pour une connexion à la pluralité d'électrodes (1815, 1825) de l'unité de mesure de signal biologique pour recevoir le signal de PPG délivré par l'unité de mesure de signal biologique et une unité de commande comportant un processeur de son pour délivrer un signal sonore à l'écouteur ; dans lequel l'étape (c) consiste en outre à :

transmettre le signal de PPG mesuré de la pluralité d'électrodes (181, 1825) sur l'unité de mesure de signal biologique à la pluralité d'électrodes (1835) sur la surface externe de l'écouteur (1830) ; et transmettre, par une liaison sans fil, les signaux biologiques mesurés aux étapes (a) et (b) à un organisme médical prédéterminé par l'intermédiaire du terminal de communication mobile ; et **caractérisé en outre par** la sortie d'un signal sonore reçu du terminal de communication mobile à partir de l'écouteur.

17. Procédé selon la revendication 16, dans lequel l'étape (b) consiste à :

(b1) rayonner la lumière ayant les différentes longueurs d'onde sur la surface interne de l'oreille, recevoir la lumière transmise à travers l'oreille, et délivrer le signal de PPG, en utilisant un module de mesure de PPG inclus dans l'unité de mesure de signal biologique ayant un de ses côtés en contact étroit avec la surface interne de l'oreille ;

(b2) détecter les pics du signal de PPG ; et

(b3) générer des informations biologiques en utilisant les pics détectés.

18. Procédé selon la revendication 17, dans lequel l'étape (b3) consiste à :

détecter une composante alternative et une composante continue dans chacun des signaux de PPG détectés aux différentes longueurs d'onde et mesurer les coefficients de réflexion des différentes longueurs d'onde ; et calculer une saturation en oxygène dans le sang en utilisant un rapport entre les coefficients de réflexion des différentes longueurs d'onde.

19. Procédé selon la revendication 17 ou 18, dans lequel l'étape (b3) comprend le filtrage passe-bande du signal de PPG pour détecter une fréquence de respiration.

20. Procédé selon la revendication 17, 18 ou 19, dans lequel l'étape (b2) consiste à :

appliquer un filtrage passe-bande au signal de PPG collecté pendant une période de temps prédéterminée ; détecter un point d'inflexion en différenciant le signal de PPG filtré ; et mémoriser le point d'inflexion en tant que pic lorsque le point d'inflexion a une valeur dépassant une valeur de seuil prédéterminée.

21. Procédé selon la revendication 17, 18, 19 ou 20, dans lequel l'étape (b3) comprend la mesure d'une fréquence d'impulsion en utilisant un intervalle de temps entre les pics du signal de PPG.

- 22.** Procédé selon l'une quelconque des revendications 16 à 21, dans lequel l'unité de sortie est un dispositif d'affichage à cristaux liquides d'un terminal de communication mobile, et l'étape (c) comprend en outre la transmission, par une liaison sans fil, des signaux biologiques mesurés aux étapes (a) et (b) à un organisme médical prédéterminé par l'intermédiaire du terminal de communication mobile.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1 (PRIOR ART)

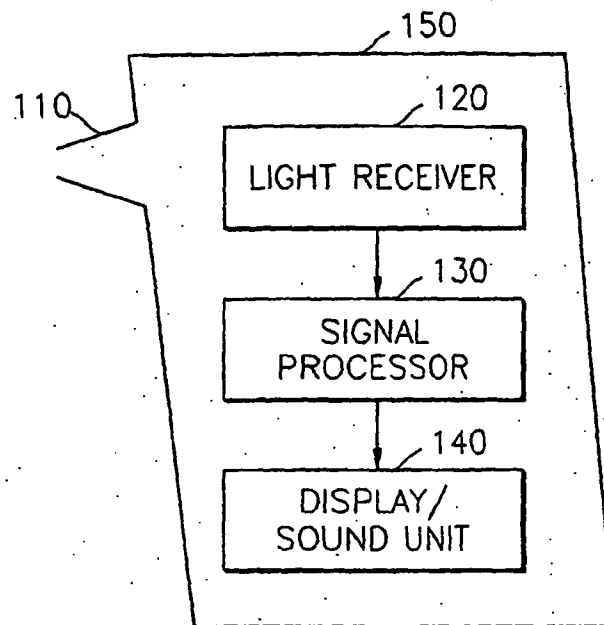


FIG. 2 (PRIOR ART)

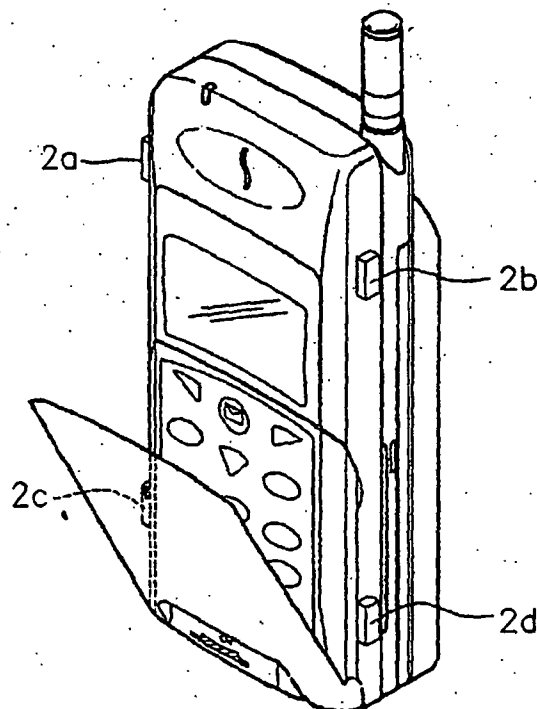


FIG. 3 (PRIOR ART)

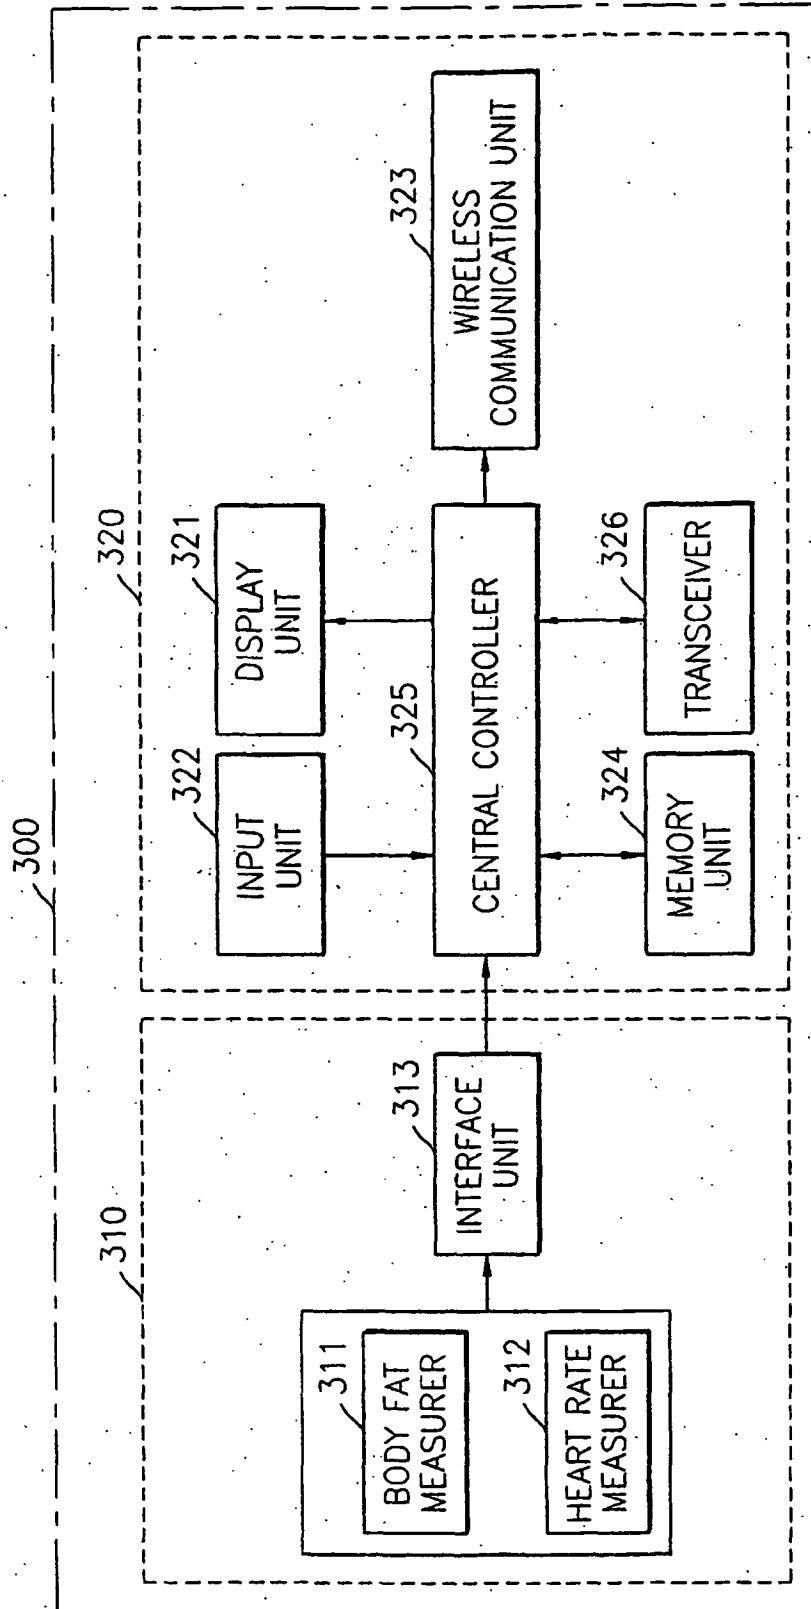


FIG. 4 (PRIOR ART)

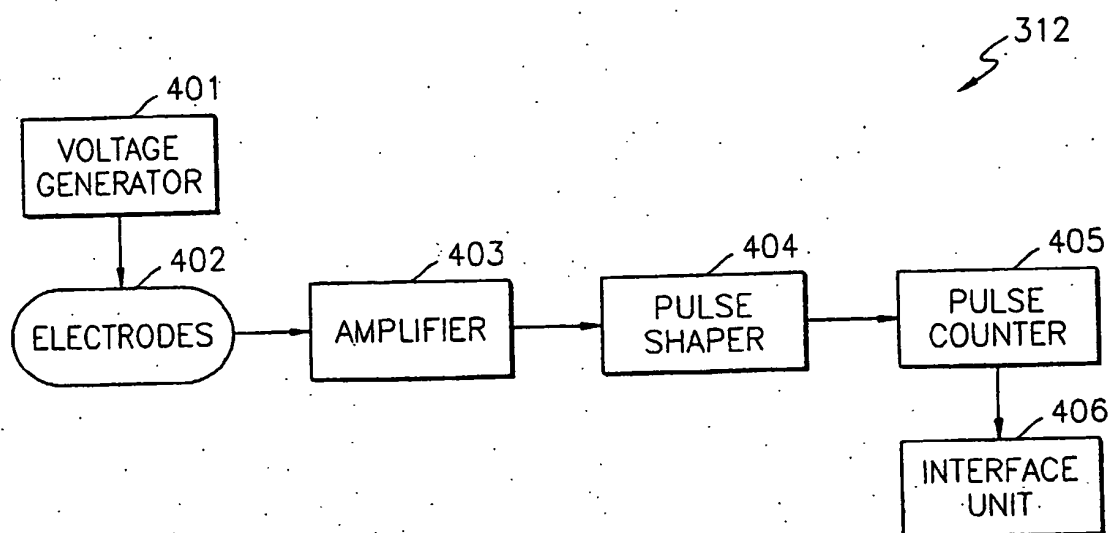


FIG. 5A

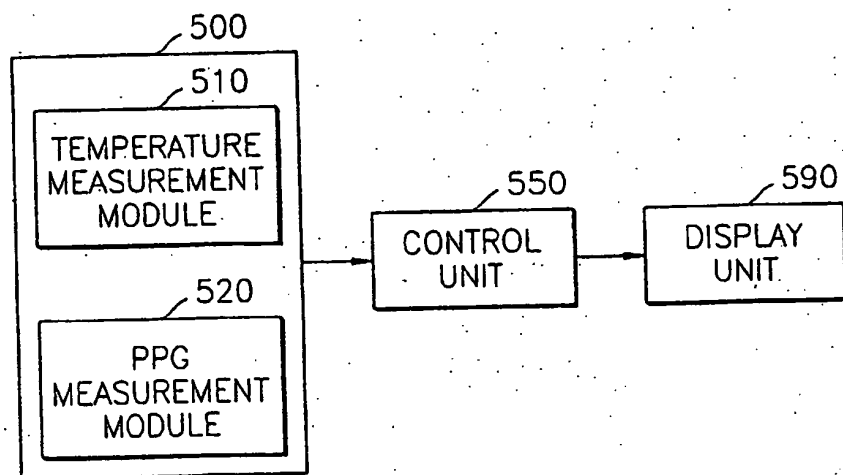


FIG.5B

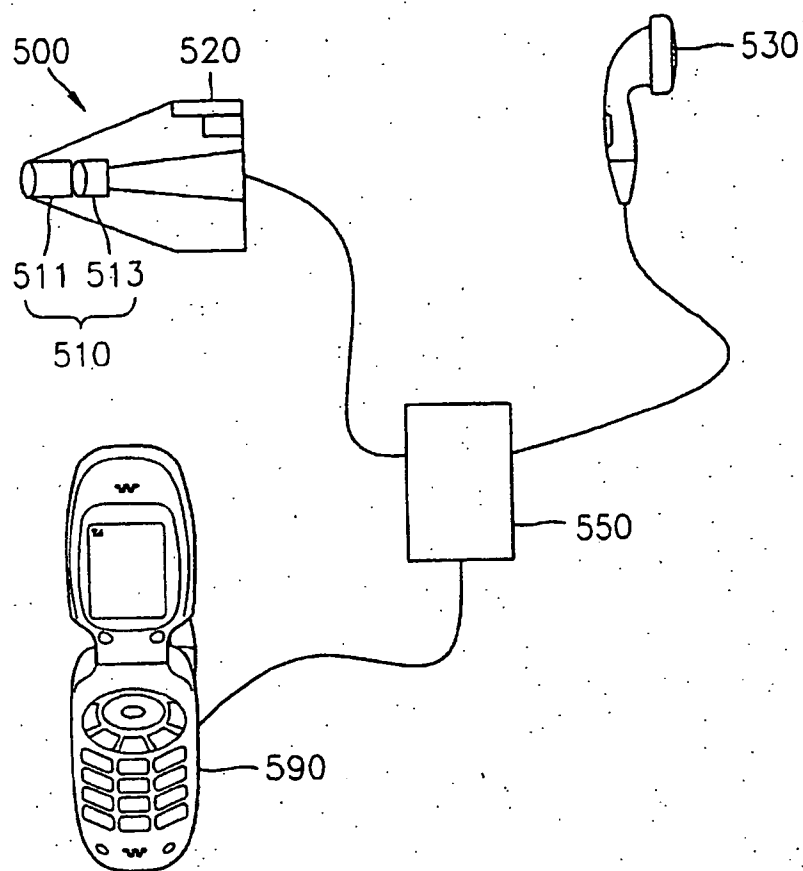


FIG. 6

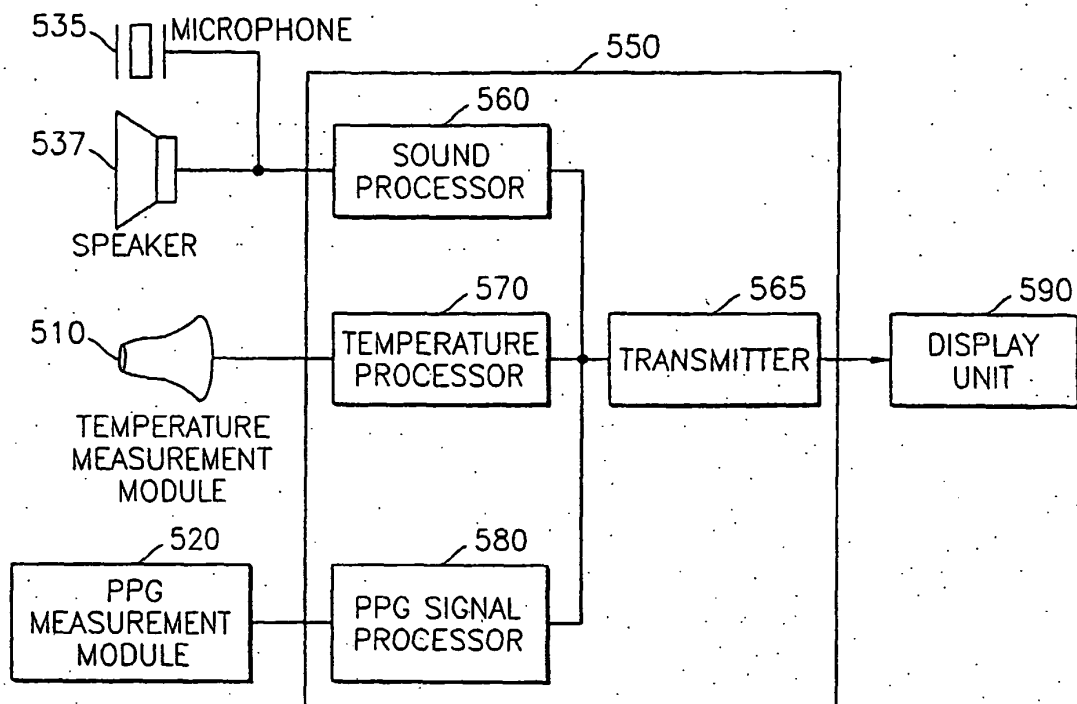


FIG. 7

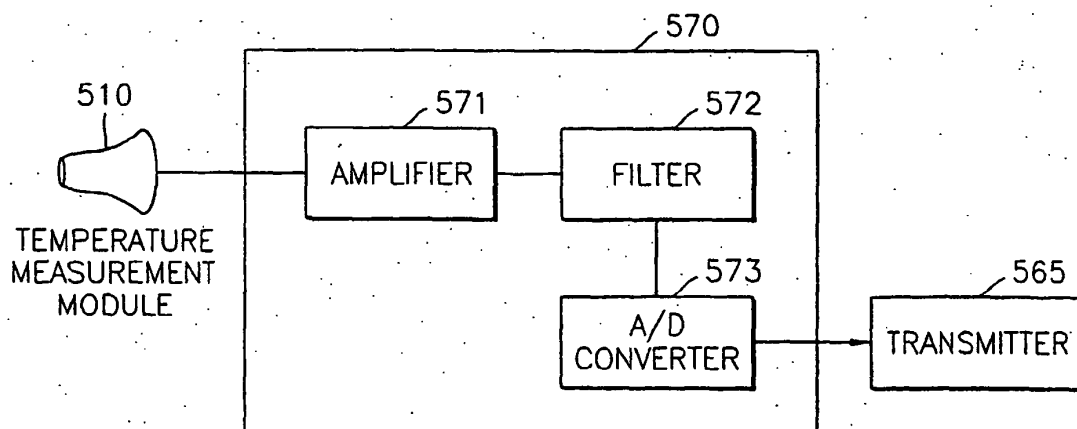


FIG. 8

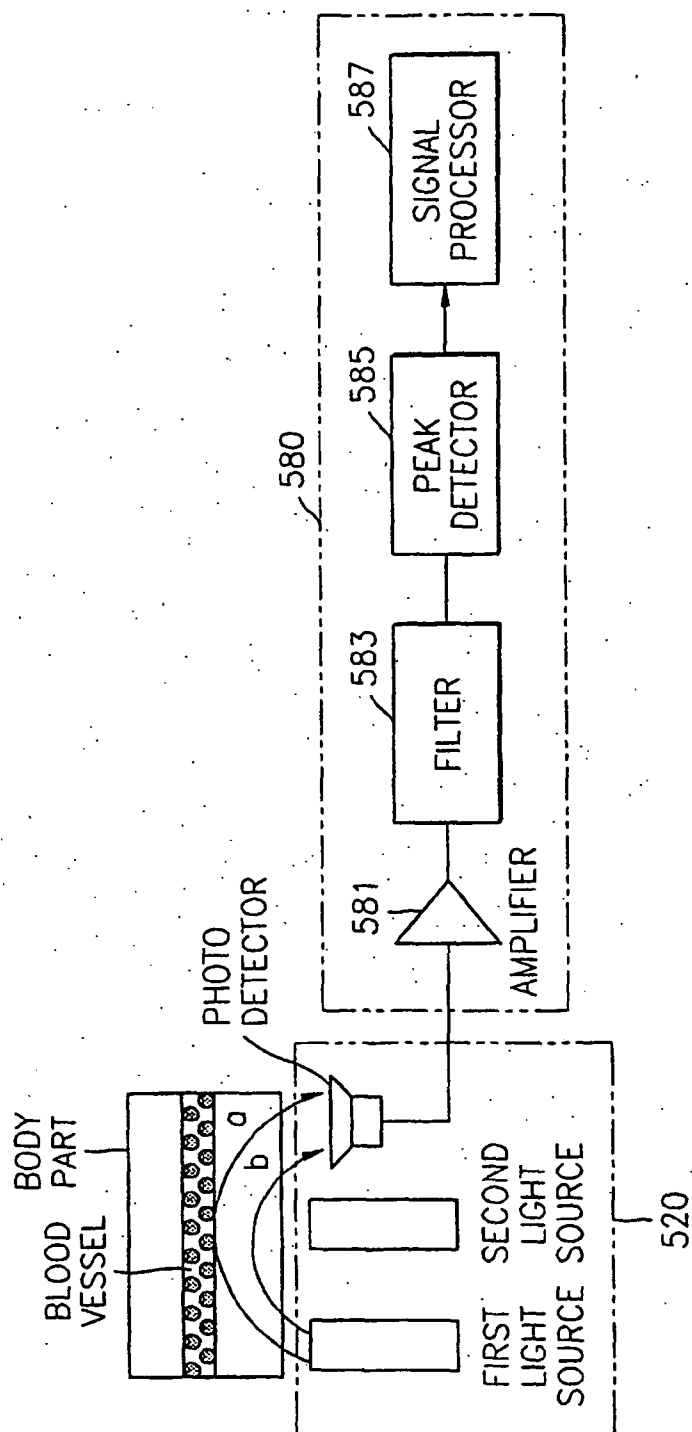


FIG. 9

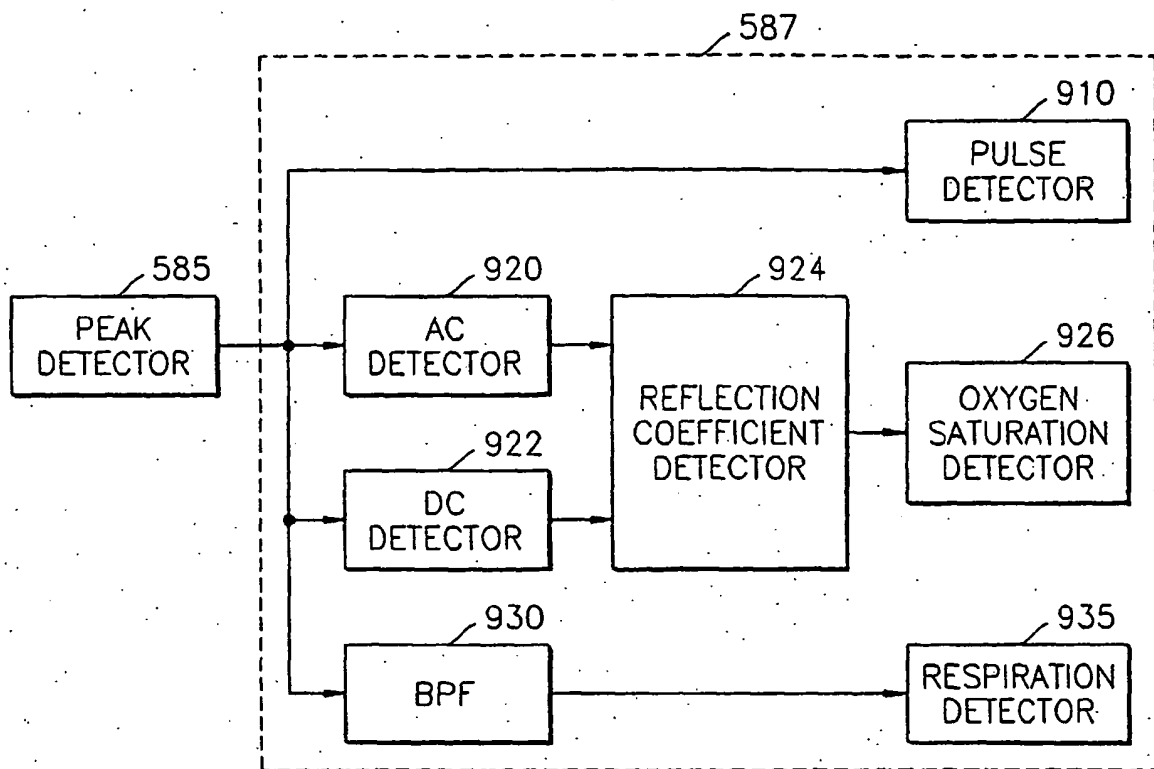


FIG. 10

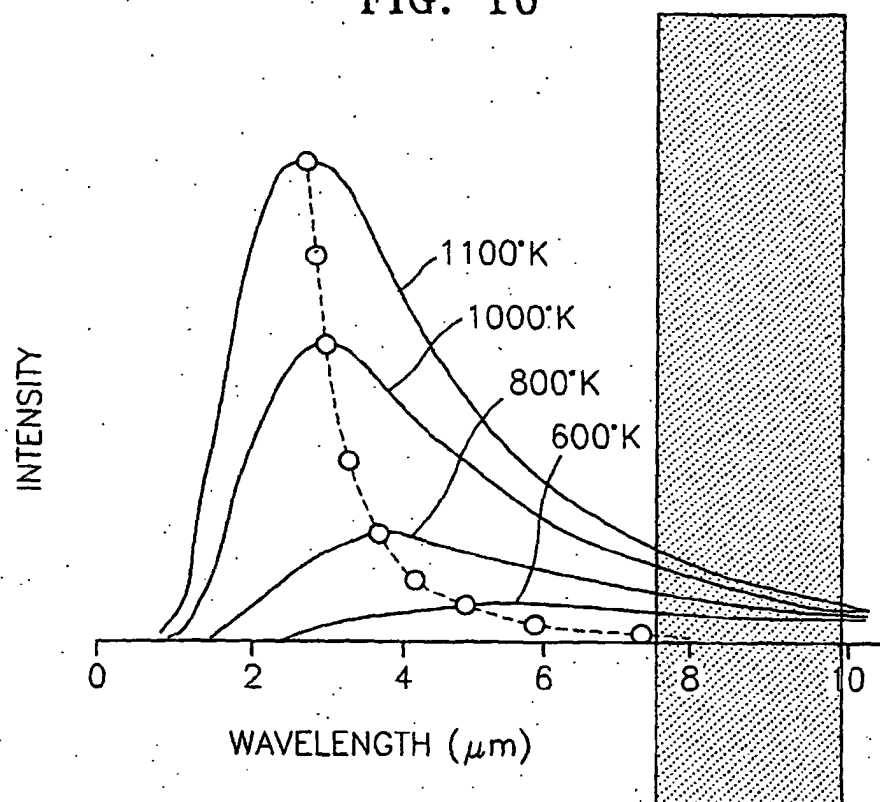


FIG. 11

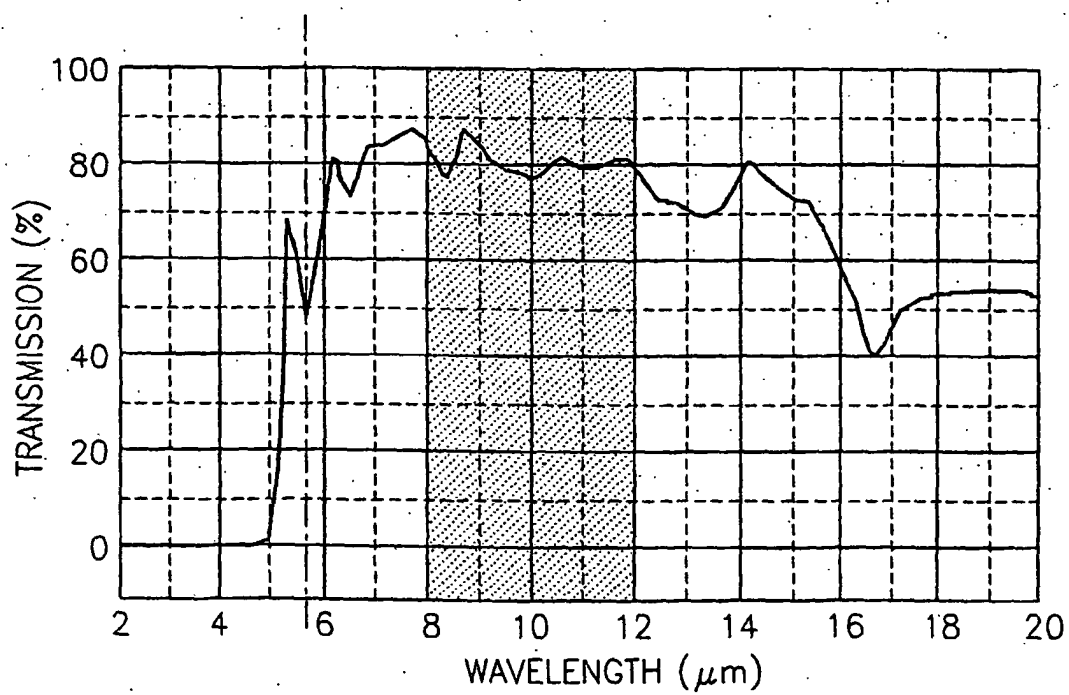


FIG. 12

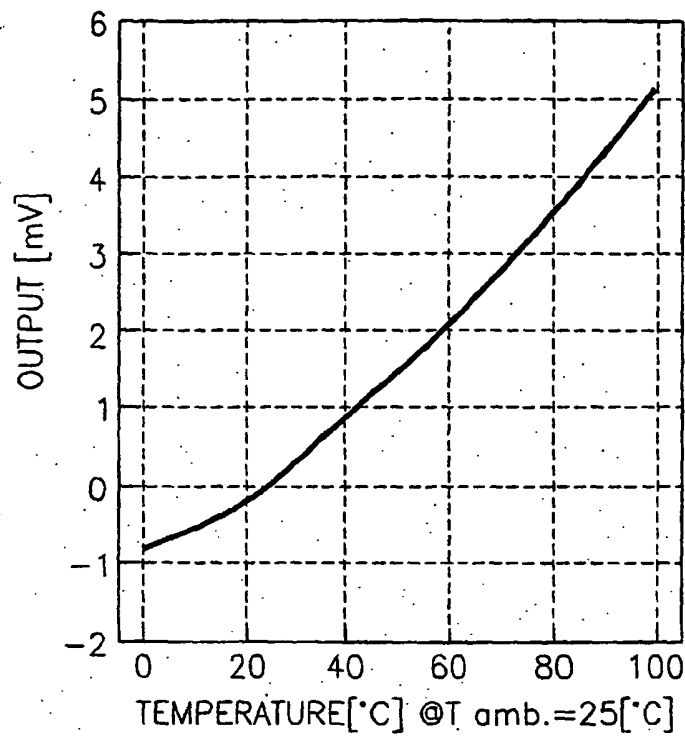


FIG. 13

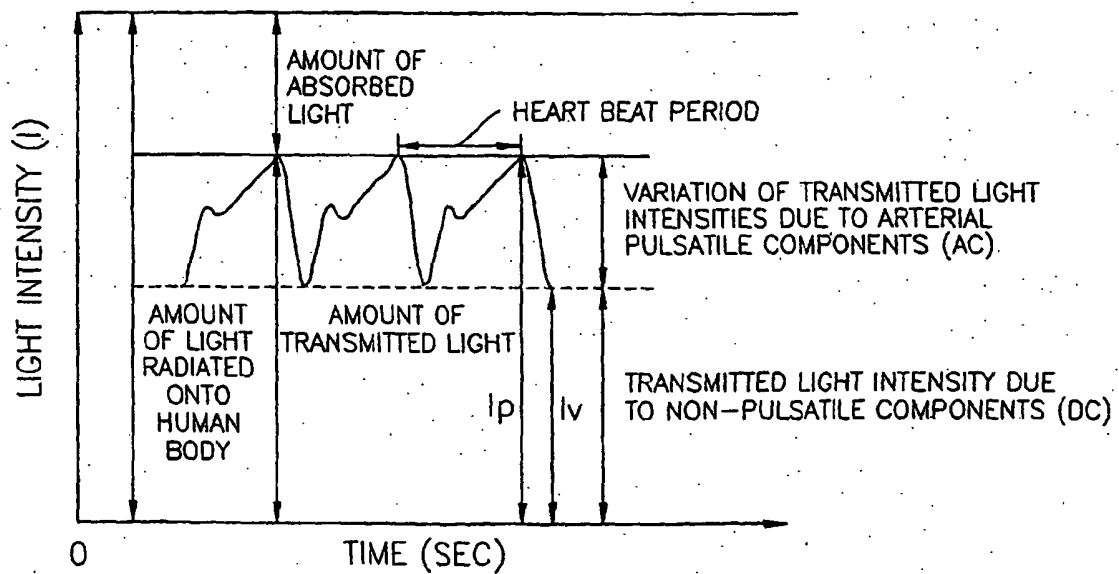


FIG. 14

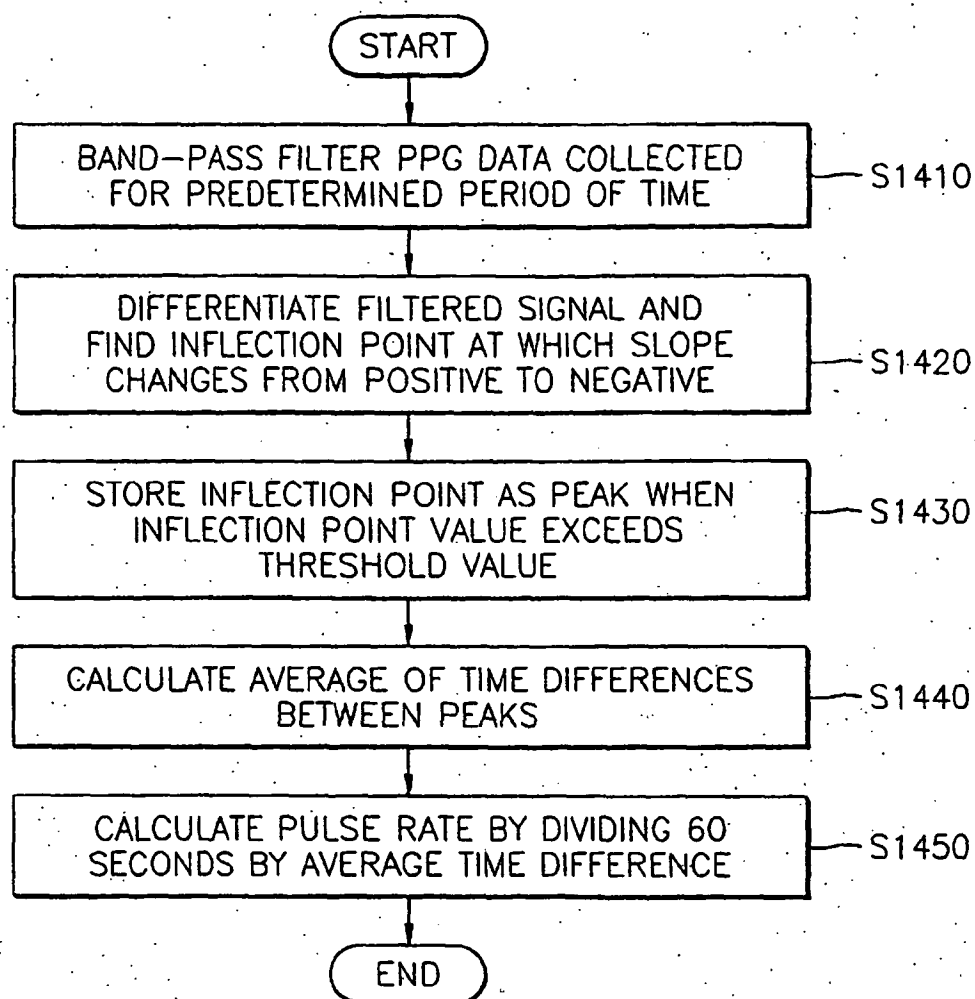


FIG. 15A

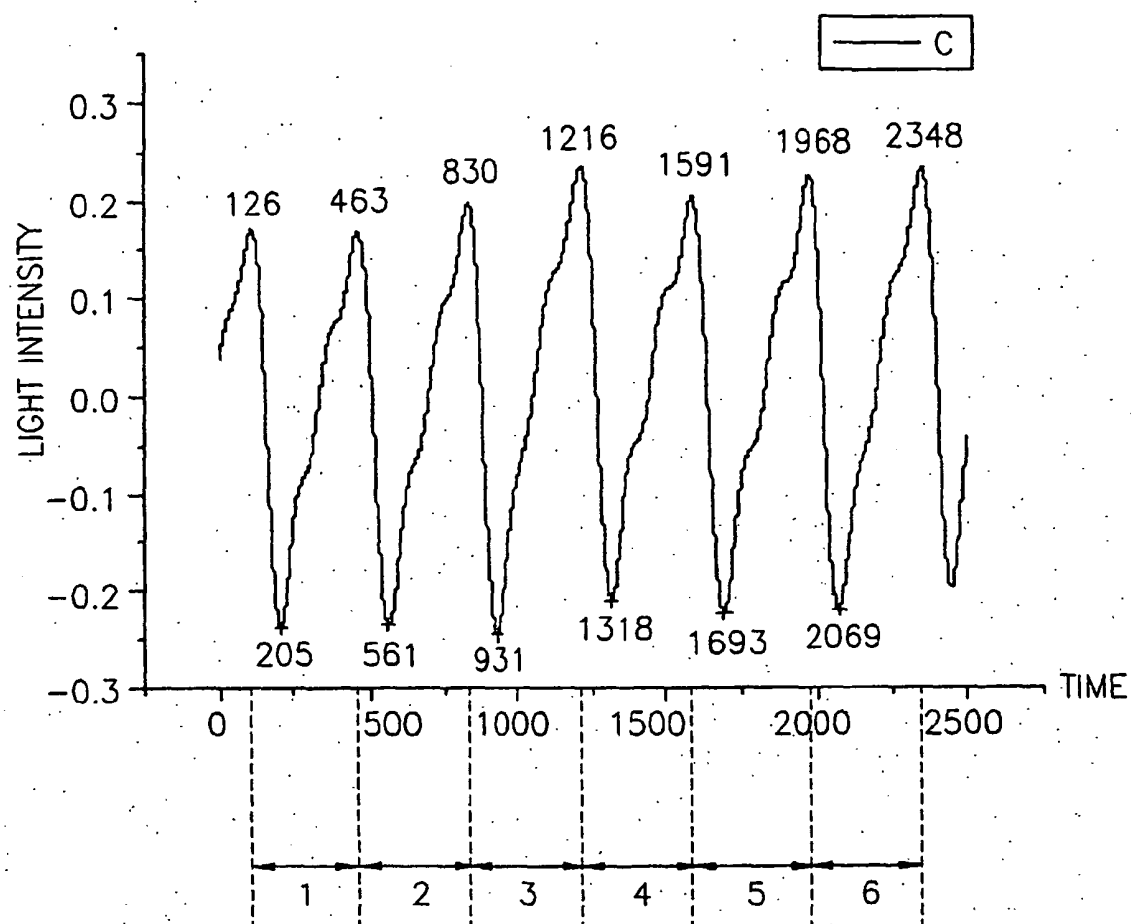


FIG. 15B

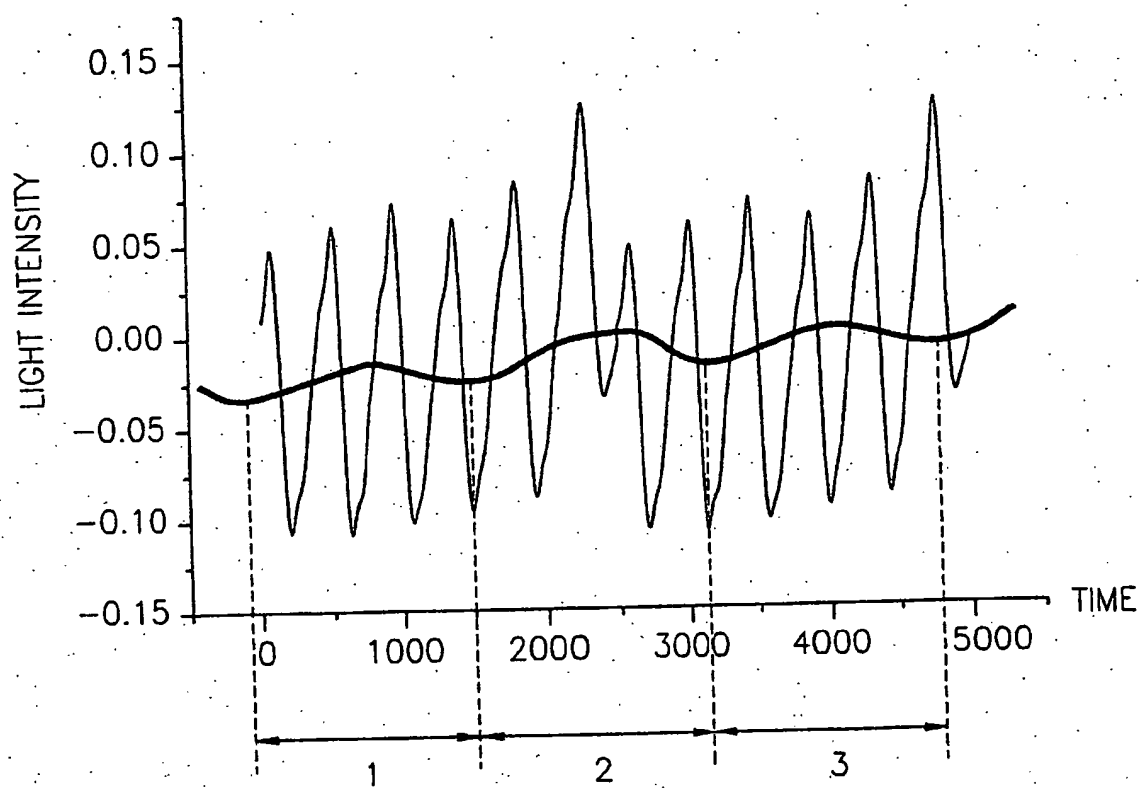


FIG. 16A

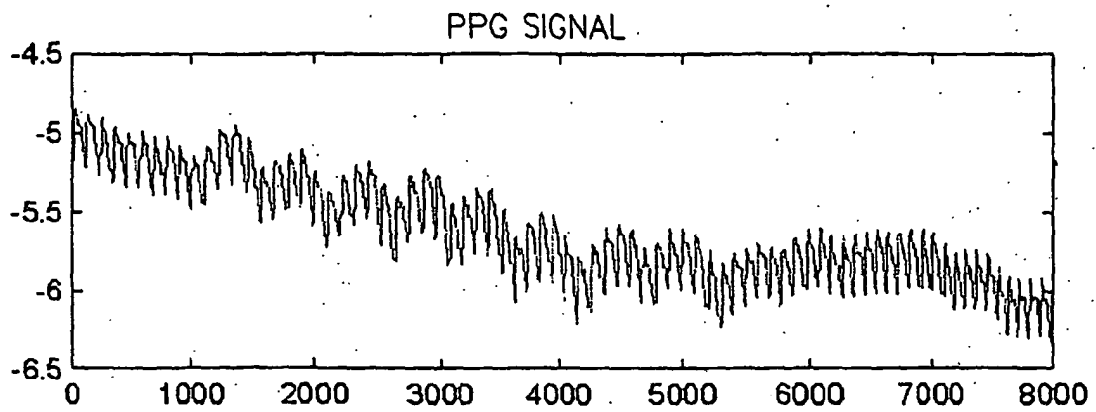


FIG. 16B

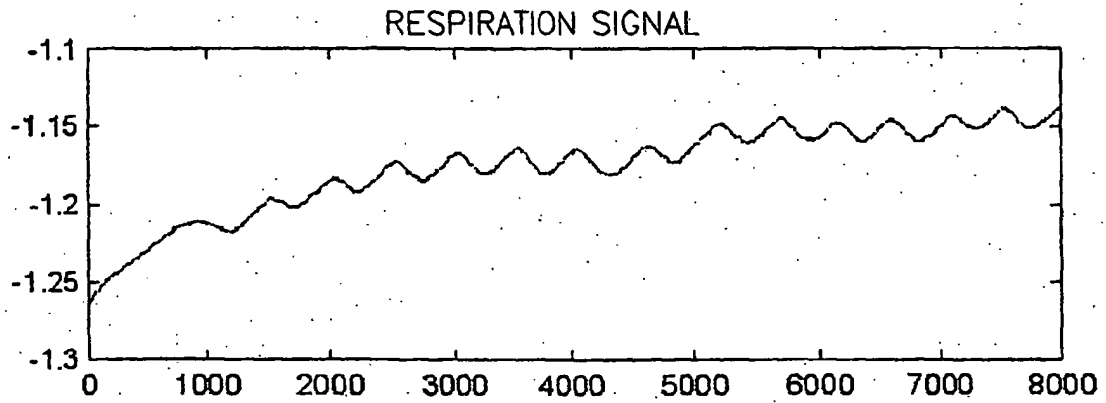


FIG. 17A

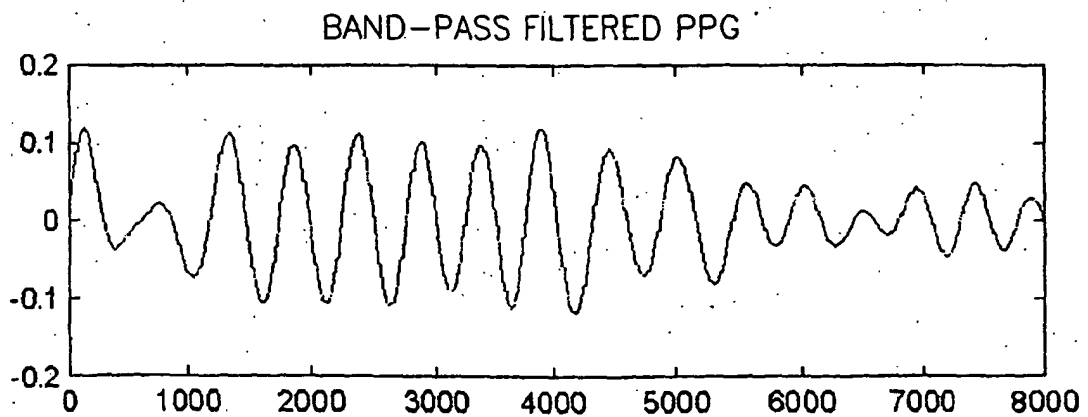


FIG. 17B


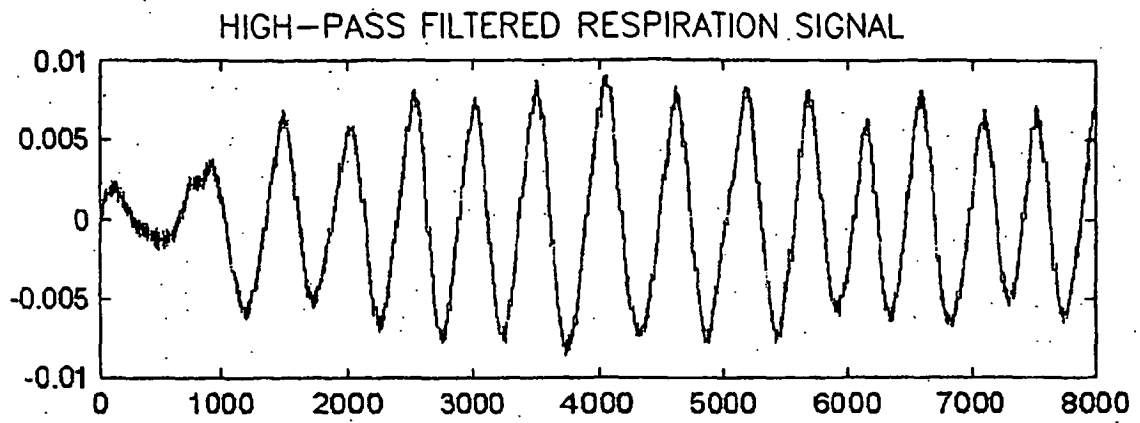


FIG. 18

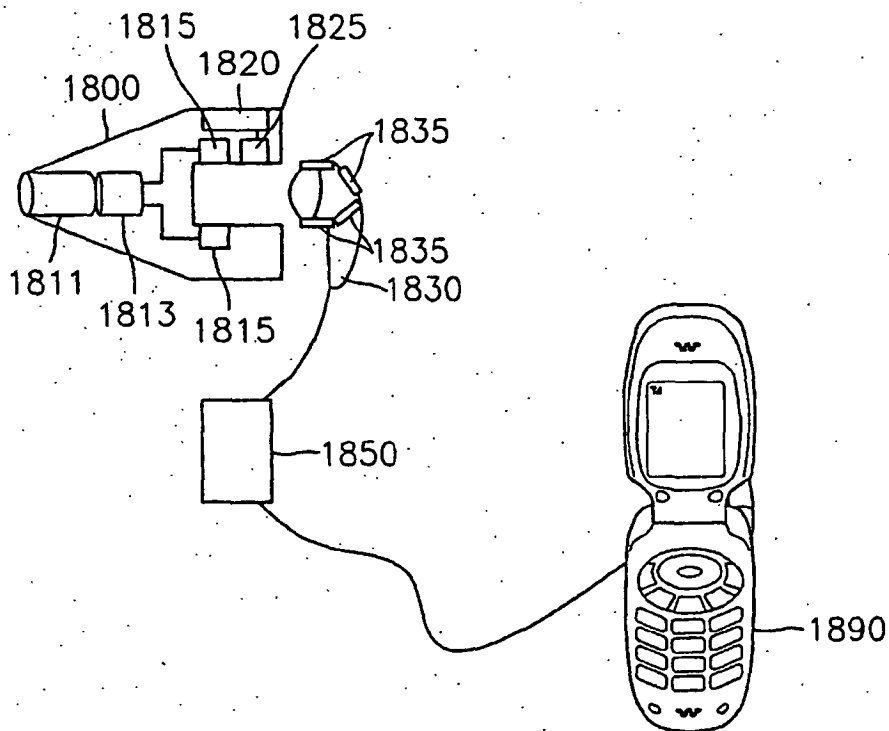

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5673692 A [0015]
- US 6080110 A [0016]

Non-patent literature cited in the description

- **J.G. Webster.** Design of Pulse Oximeters. 1997, 40-55 [0066]

专利名称(译)	用于测量生物信号的耳式装置及其测量方法		
公开(公告)号	EP1475035B1	公开(公告)日	2011-06-22
申请号	EP2004252685	申请日	2004-05-07
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	BAE SANG KON LEE JONG YOUN YOON GIL WON		
发明人	BAE, SANG-KON LEE, JONG-YOUN YOON, GIL-WON		
IPC分类号	A61B5/00 A61B5/024 A61B5/0205 A61B5/01 A61B5/04 A61B5/08 A61B5/145 A61B5/1455 G01J5/04 G01K13/00		
CPC分类号	G01J5/04 A61B5/0002 A61B5/01 A61B5/0205 A61B5/02416 A61B5/02438 A61B5/0816 A61B5/14552 A61B5/6817 G01J5/02 G01J5/025 G01J5/049 G01J5/08 G01J5/0846 H04R1/1016 H04R2420/07		
优先权	1020030029365 2003-05-09 KR		
其他公开文献	EP1475035A1		
外部链接	Espacenet		

摘要(译)

一种用于测量生物信号的装置，包括生物信号测量单元（500），其可插入耳朵中以与耳朵的内表面紧密接触，该生物信号测量单元具有光体积描记（PPG）测量模块（520）用于将不同波长的光辐射到耳朵的内表面上，检测透过耳朵的光，并输出包括生物信息的PPG信号，控制单元（550）具有PPG信号处理器，用于使用PPG信号处理器生成生物信息由PPG测量模块测量的PPG信号和用于显示从控制单元产生的生物信息的输出单元（590）。该装置优选地包括温度测量模块（510），用于使用从耳朵的内表面辐射的红外线来测量体温。输出单元可以由移动电话的液晶显示器实现。

