



(11) **EP 2 114 244 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:

**29.08.2018 Bulletin 2018/35**

(21) Application number: **08729181.1**

(22) Date of filing: **06.02.2008**

(51) Int Cl.:

**A61B 5/0245** <sup>(2006.01)</sup>      **A61N 1/362** <sup>(2006.01)</sup>  
**A61N 1/365** <sup>(2006.01)</sup>      **A61N 1/372** <sup>(2006.01)</sup>  
**A61N 1/39** <sup>(2006.01)</sup>      **A61B 5/00** <sup>(2006.01)</sup>  
**A61B 5/042** <sup>(2006.01)</sup>      **A61B 5/11** <sup>(2006.01)</sup>  
**A61N 1/37** <sup>(2006.01)</sup>      **A61B 5/04** <sup>(2006.01)</sup>  
**A61N 1/368** <sup>(2006.01)</sup>

(86) International application number:

**PCT/US2008/053197**

(87) International publication number:

**WO 2008/098062 (14.08.2008 Gazette 2008/33)**

(54) **SENSING VECTOR SELECTION IN A CARDIAC STIMULUS DEVICE WITH POSTURAL ASSESSMENT**

FÜHLVEKTORAUSWAHL IN EINER HERZSTIMULATIONSVORRICHTUNG MIT HALTUNGSBEURTEILUNG

SÉLECTION DE VECTEUR DE DÉTECTION DANS UN DISPOSITIF DE STIMULATION CARDIAQUE AVEC EXAMEN POSTURAL

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR**

(30) Priority: **07.02.2007 US 672353**

(43) Date of publication of application:

**11.11.2009 Bulletin 2009/46**

(73) Proprietor: **Cameron Health, Inc.**

**St. Paul, MN 55112 (US)**

(72) Inventors:

- **SANGHERA, Rick**  
**San Clemente, CA 92673 (US)**

- **ALLAVATAM, Venugopal**  
**Oceanside, CA 92057 (US)**

(74) Representative: **Pfenning, Meinig & Partner mbB**  
**Patent- und Rechtsanwälte**  
**Joachimsthaler Straße 10-12**  
**10719 Berlin (DE)**

(56) References cited:

**WO-A-2004/105871**      **US-A- 5 331 966**  
**US-A- 6 044 297**      **US-B1- 7 130 689**  
**US-B1- 7 181 281**

**EP 2 114 244 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description**

**Field**

5 [0001] The present invention relates to the field of implantable medical devices. More particularly, the present invention relates to implantable devices that monitor and/or stimulate the heart.

**Background**

10 [0002] Implantable cardiac monitoring and/or stimulus devices can provide various benefits to patients who receive them. Such devices are adapted to monitor cardiac activity of a patient while implanted and, if so equipped, to provide stimulus when necessary to assure adequate cardiac function. New and different methods are desired for configuring and performing cardiac signal assessment in such devices.

15 **Summary**

[0003] The present invention, in an illustrative embodiment, includes an implantable medical device that includes sensing electrodes and circuitry that allow the device, when implanted in a patient, to sense electrical activity emanating from the patient's heart along a plurality of sensing vectors. In the illustrative embodiment, the implantable medical device is configured to select a primary or default sensing vector by observing cardiac signal characteristics along one or more of the plurality of sensing vectors. In an illustrative embodiment, observation of the cardiac signal characteristics includes initialization in terms of the body position or posture of the patient.

20 [0004] In another illustrative embodiment, a device as described above is included as a part of a system including an external programmer, wherein the programmer and implanted device are configured to communicate with one another. In this embodiment, the system is configured such that the patient may be directed to perform certain acts and/or assume selected postures/poses/body positions via the programmer, allowing the implanted device to observe the effects of changes of posture by the patient on captured cardiac signal. The implanted device (or the programmer, depending upon the particular configuration) may then select a primary or default sensing vector.

25 [0005] Another illustrative example includes a method of selecting a vector for use in sensing cardiac events. In the illustrative method, sensing characteristics along several vectors may be considered with the patient in various body positions (for example, standing, sitting, and/or lying down). Using the captured sensing characteristics, a default or primary sensing vector may be selected. In an illustrative example, the method includes directing the patient to assume a set of postures/poses/body positions.

30 [0006] In addition to selecting a primary or default sensing vector, in some embodiments, a secondary vector is selected for various uses.

35 **Brief Description of the Drawings**

[0007]

40 FIGS. 1A-1B illustrate subcutaneous and transvenous cardiac stimulators;

FIG. 2 is a block diagram illustrating steps in an illustrative implant procedure;

45 FIGS. 3-5 show illustrative methods of postural assessment in an implanted medical device;

FIGS. 6A-6B are graphs of variable relationships in an illustrative method of analyzing sensing vectors during postural assessment;

50 FIGS. 7A-7C are graphs of variable relationships in illustrative signal analysis methods; and

FIGS. 8A-8E are graphical representations of display outputs of a programmer during an illustrative method of postural assessment.

55 **Detailed Description**

[0008] The following detailed description should be read with reference to the drawings. The drawings, which are not necessarily to scale, depict illustrative embodiments and are not intended to limit the scope of the invention.

**[0009]** The present invention is related to U.S. application Ser. No. 11/441,522, filed May 26, 2006 and entitled SYSTEMS AND METHODS FOR SENSING VECTOR SELECTION IN AN IMPLANTABLE MEDICAL DEVICE. In particular, the '522 Application shows illustrative methods of analyzing cardiac signals captured along a given sensing vector. The methods shown therein are illustrative of analytical methods and "scoring" that may also be performed in association

with the present invention.

**[0010]** FIGS. 1A-1B, respectively, show subcutaneous and transvenous implanted cardiac stimulus systems relative to the heart. Referring to FIG. 1A, the patient's heart 10 is shown in relation to an implanted, subcutaneous cardiac stimulus system including a canister 12. A lead 14 is secured to the canister 12 and includes sensing electrode A 16, coil electrode 18, and sensing electrode B 20. A can electrode 22 is shown on the canister 12. Several vectors for sensing are therefore available including A-can, B-can, and A-B. It should be noted that the use of the coil electrode 18 as a sensing electrode is also possible. Illustrative subcutaneous systems are shown in U.S. Pat. Nos. 6,647,292 and 6,721,597, and the disclosures of these patents are incorporated herein by reference. Some embodiments include a unitary system having two or more electrodes on a housing as set forth in the '292 patent, rather than that which is shown in FIG. 1A. A unitary system including an additional lead may also be used. It should be understood that for any vector discussed herein, either of the two available polarities for each vector is possible and may be analyzed and/or selected, if desired.

**[0011]** Referring now to FIG. 1B, a transvenous system is shown relative to a patient's heart 30. The transvenous cardiac stimulus system includes a canister 32 connected to a lead 34. The lead 34 enters the patient's heart and includes electrodes A 36 and B 38. The illustrative example also includes coil electrodes 42, shown both internal and external to the heart 30. The coil electrodes 42 may be used for sensing or stimulus delivery. In the illustrative example, electrode A 36 is located generally in the patient's ventricle, and electrode B 38 is located generally in the patient's atrium. The lead 34 may be anchored into the patient's myocardium. Again, a can electrode 40 is shown on the canister 32. With the transvenous system, plural sensing vectors may be defined as well.

**[0012]** In both FIGS. 1A and 1B, one or more sensing electrodes may also be used for stimulus delivery. Some embodiments of the present invention may be used in combination systems that may include sensing vectors defined between two subcutaneous electrodes, a subcutaneous electrode and a transvenous electrode, or two transvenous electrodes. For example, the present invention may be embodied in a hybrid system having electrodes for each of several transvenous, epicardial, and/or subcutaneous locations.

**[0013]** In the configurations of FIGS. 1A and 1B, there are multiple sensing vectors available. Detection of cardiac function along one of these sensing vectors allows the implanted cardiac stimulus system to determine whether treatment is indicated due to the detection and identification of a malignant condition such as, for example, a ventricular tachycardia. An implanting physician may perform vector selection by determining which of the captured vectors is best, for example by visual inspection of a graphical representation of captured signals. However, this requires an assessment of cardiac function along several vectors and may increase the time needed to perform implantation, and also increases the risk of human error. Further, the selection of a vector may require advanced or specialized training, as selection of a suitable vector among those available is not necessarily intuitive.

**[0014]** Robust sensing vector selection methods are desirable, as well as devices adapted to perform such methods. The present invention, in illustrative embodiments, provides such methods and uses various criteria for doing so. Some embodiments include implantable devices and programmers for implantable devices that are adapted to perform such methods.

**[0015]** The systems shown in FIGS. 1A-1B may include operational circuitry and power sources housed within the respective canisters. The power sources may be, for example, batteries or banks of batteries. The operational circuitry may be configured to include such controllers, microcontrollers, logic devices, memory, and the like, as selected, needed, or desired for performing the illustrative methods set forth herein. The operational circuitry may (although not necessarily) further include a charging sub-circuit and a power storage sub-circuit (for example, a bank of capacitors) for building up a stored voltage for cardiac stimulus taking the form of cardioversion and/or defibrillation. The operational circuitry may also be adapted to provide a pacing output. Each of cardioversion/defibrillation and pacing sub-circuitry and capacities may be incorporated into a single device. The methods discussed below may be embodied in hardware within the operational circuitry and/or as instruction sets for operating the operational circuitry and/or in the form of machine-readable media (optical, electrical, magnetic, etc.) embodying such instructions and instruction sets.

**[0016]** Each of the devices 12, 32 may further include such components as would be appropriate for communication (such as RF communication or inductive telemetry) with an external device such as a programmer. To this end, programmers 24 (FIG. 1A) and 42 (FIG. 1B) are also shown. For example, during an implantation procedure, once the implantable device 12, 32 and leads (if included) are placed, the programmer 24, 42 may be used to activate and/or direct and/or observe diagnostic or operational tests. After implantation, the programmer 24, 42 may be used to non-invasively determine the status and history of the implanted device. The programmer 24, 42 and the implanted device 12, 32 may be adapted for wireless communication allowing interrogation of the implanted device in any suitable manner for an implanted device system. The programmers 24, 42 in combination with the implanted devices 12, 32 may also

allow annunciation of statistics, errors, history and potential problem(s) to the user or physician.

5 [0017] FIG. 2 is a block diagram illustrating steps in an illustrative implant procedure. From a start block 100, the first step is the physical implantation itself 102, which may include various surgical preparations as are known in the art, incision of the patient, and emplacement of a system, for example, a transvenous or subcutaneous system as shown above in FIGS. 1A-1B. Methods for physically implanting a transvenous device are well known. A subcutaneous device may be implanted, for example, as set forth in copending U.S. application Ser. No. 11/006,291, filed December 6, 2004 and entitled APPARATUS AND METHOD FOR SUBCUTANEOUS ELECTRODE INSERTION, published as U.S. Pat. Pub. No. 2006/0122676; and/or copending U.S. application Ser. No. 11/497,203, filed August 1, 2006 and entitled ELECTRODE INSERTION TOOLS, LEAD ASSEMBLIES, KITS AND METHODS FOR PLACEMENT OF CARDIAC DEVICE ELECTRODES. With the system in place in the patient, the device is initialized, as indicated at 104. This may include various functions as indicated at 106, such as power-up of the device, system check, lead connection, detection and impedance checks. Initialization 104 may also include vector selection steps and template formation steps, allowing an initial set-up of the device while the patient is in the operating room. Illustrative methods of template formation are discussed in copending U.S. application Ser. No. 10/999,853, filed November 29, 2004 and entitled METHOD FOR DEFINING SIGNAL TEMPLATES IN IMPLANTABLE CARDIAC DEVICES, published as U.S. Pat. Pub. No. 2006/0116595. Illustrative methods of vector selection are discussed in copending U.S. application Ser. No. 11/441,522, filed May 26, 2006 and entitled SYSTEMS AND METHODS FOR SENSING VECTOR SELECTION IN AN IMPLANTABLE MEDICAL DEVICE; copending U.S. application Ser. No. 10/901,258, filed July 27, 2004 and entitled MULTIPLE ELECTRODE VECTORS ON A SUBCUTANEOUS ICD, published as Pat. App. Pub. No. 2005/0049644; and U.S. Pat. No. 6,988,003 entitled OPTIONAL USE OF A LEAD FOR A UNITARY SUBCUTANEOUS IMPLANTABLE CARDIOVERTER-DEFIBRILLATOR. The inclusion of each of functions 106 may vary depending upon the particular device.

10 [0018] After device initialization at 104, the device is tested as indicated at 108. For an implantable cardioverter defibrillator (ICD), for example, fibrillation may be induced in the patient in order to determine whether the ICD accurately senses the fibrillation and successfully delivers therapy that returns the patient to normal cardiac rhythm. If testing is unsuccessful, or if the device does not initialize, the system may be explanted. If, instead, the initialization at 104 is completed successfully and the system passes device testing at 108, then the surgical portion of the implantation is completed, as shown at 110, with appropriate methods including closing incisions made during implantation, etc.

15 [0019] In the illustrative method, postural analysis 112 follows completion of the surgical portion of the implantation method. During postural analysis 112, after the patient has had the device inserted and activated, and, possibly, after the patient has had time to recuperate somewhat, the operation of the implanted device is observed and may be modified. In particular, the patient may be asked to assume a series of positions, for example, sitting down and then standing up, while the implanted device gathers data to determine which of its available sensing vectors is best suited to permanent operation. In one illustrative example, the patient is led through a series of body positions such that the device may determine a single sensing vector for use as a primary or default sensing vector all the time, such that changes in sensing operation do not have to occur whenever the patient changes posture or body position.

20 [0020] In another illustrative example, an optimal or best vector is determined for each of the several body positions, and body position is monitored during operation such that the implanted device may select the optimal vector for a patient's current body position. Body position may be monitored, for example, by the provision of physical sensors that detect body position by reference to gravity, to movements, or the like. Transthoracic impedance can be used to provide a measure of patient body position, for example. An activity sensor may be used to infer whether the patient is standing versus lying down. Alternatively, body position may be monitored by observation of captured electric signals. For example, during postural analysis 112, the system may be configured to identify signal markers to differentiate cardiac signals captured while the patient is in each of several body positions and, thereafter, to identify the patient's body position by observation of the patient's cardiac signals.

25 [0021] Once postural analysis 112 is complete, the patient may then be discharged 114, as the implantation procedure and process is then complete. Following discharge 114, the patient may be requested to return for further diagnostics, for example, initialization may be updated (such as functions 106) and the postural analysis 112 may be later repeated. This may be done, for example, as the patient's physiology changes due to reaction to the implantation itself, with changes in patient medication, and/or as the patient ages.

30 [0022] FIGS. 3-5 show illustrative methods of postural assessment in an implanted medical device. FIG. 3 illustrates a confirmation approach to postural assessment, in which a vector is identified on the basis of its characteristics while the patient is in a given body position, and the identified vector is then checked to confirm that it is usable regardless of the body position of the patient. The method begins at block 130, with the patient in a given body position, in this instance, supine. In other embodiments, the patient may begin in a different body position, such as prone, reclined, standing, or in whatever position the patient prefers to sleep in, for example.

35 [0023] With the patient in the given position, a vector is selected, as shown at 132. A vector may be selected at 132, for example, on the basis of the signal-to-noise ratio (SNR) of cardiac signals captured along that vector. Other metrics for selecting a vector at 132 may include signal amplitude, noise amplitude, etc. In an illustrative embodiment, a com-

bination of SNR and signal amplitude are taken into consideration. For example, a formula using both SNR and amplitude may be used. Some illustrative examples of such analysis are shown in copending U.S. application Ser. No. 11/441,522, filed May 26, 2006 and entitled SYSTEMS AND METHODS FOR SENSING VECTOR SELECTION IN AN IMPLANTABLE MEDICAL DEVICE.

5 **[0024]** In another illustrative embodiment, a default vector is assumed, rather than selected on the basis of any metric. For example, if a particular system and implantation has a vector that works for most patients, then that vector may be selected first to start analysis. In another example, there may be a preferred vector, such as where there are two sensing-only electrodes and one or more sensing/shocking electrodes. Due to possible physical changes at the electrode/tissue interface for the sensing/shocking electrodes when stimulus is delivered, the vector between the two sensing-only electrodes may be "preferred". Thus, in starting the method, the "preferred" vector may be selected at step 132.

10 **[0025]** With the vector selected at 132, a template for analysis of cardiac signals may optionally be formed, as shown at 134. This optional step of the method of FIG. 3 may include capturing a set of signals with the selected vector, identifying likely cardiac events in the set of signals, and forming windows of captured signals around fiducial points likely to correspond to cardiac events.

15 **[0026]** An illustrative example of template formation may be as follows. First, the signal captured along the selected vector may be compared to a threshold and, when the threshold is exceeded, a cardiac event is assumed to be likely. A peak value in a set of samples following the threshold crossing (for example, the next 40 sequential samples, captured at 256 Hz) is identified as a fiducial point, and a window of samples around the fiducial point is calculated. This initial capture is presumed to be a cardiac event. Several additional "events" are subsequently captured in association with later threshold crossings, with the fiducial point and/or window being selected in a manner corresponding to that of the original identified "event".

20 **[0027]** The captured events are then compared to one another, for example, using correlation waveform analysis, or alternatively, another metric such as QRS width, which may be identified as a duration in which the signal remains above a minimum threshold. If the set of events is sufficiently similar, then a template is formed by selecting a representative event or by averaging a set of events. In some embodiments, the template may be dynamically updated by averaging in later-captured events. Additional examples of template formation may also be found in copending U.S. application Ser. No. 10/999,853, filed November 29, 2004 and entitled METHOD FOR DEFINING SIGNAL TEMPLATES IN IMPLANTABLE CARDIAC DEVICES, published as U.S. Pat. Pub. No. 2006/0116595. In some embodiments, template formation may fail where similarity among sets of captured events does not occur. For example, a time-out may be used, and, if after a period of time (60-180 seconds, for example), a template cannot be formed using similarity analysis, the vector under consideration may be identified as poorly suited to detection.

25 **[0028]** Next, the patient is directed to change body positions, as indicated at 136. One or more additional positions beyond the original position may be used. For example, if the patient is supine, as indicated at 130, the patient may be asked to move to a prone position, to sit up, and/or to stand. The positions listed at 138 are merely illustrative, and no set number of such positions is necessary. In an illustrative embodiment, it is determined what positions the patient tends to rest in, for example, reclined, and/or the patient's sleep position, such as on the patient's side, in order that the posture assessment considers those positions the patient is in the most. For each position the patient is asked to assume, the implanted device analyzes the selected vector to determine whether the selected vector will function adequately for cardiac event detection and analysis. In an illustrative example, if the selected vector fails to function adequately in any position, the method skips any remaining body positions and advances to step 140. Otherwise, the selected vector is analyzed at each of at least two positions.

30 **[0029]** In an illustrative example, the selected vector is analyzed in each of the positions by considering one or more of SNR, signal amplitude, and/or noise amplitude. For example, the SNR and signal amplitude may be considered by the use of a formula, as further explained below.

35 **[0030]** The method then goes to step 140, where it is determined whether the selected vector has been verified or confirmed as a "good" sensing vector. If so, the method ends at 142. If the selected vector is not verified or confirmed, the method returns to step 132 and selects a different vector, with the patient being asked to again assume the first body position upon return to step 132 and, thereafter, to move through additional body positions as directed at step 136. In this method, a vector is first selected and then tested as the patient changes body positions.

40 **[0031]** FIG. 4 illustrates a deterministic approach, as contrasted to the confirmation approach of FIG. 3. In FIG. 4, for example, the patient assumes a given body position and holds that position until data is gathered for each of the available vectors. The method of FIG. 4 begins with start block 160. The patient is asked to select a body position, as indicated at 162. Illustrative positions are listed at 164; in an example, the patient is asked to lay supine and is later asked to sit and/or stand. Each vector is then analyzed while the patient remains in the selected body position, as shown at 166. After data is captured for each vector during step 166, it is determined if all positions have been tested, as indicated at 168. If not, the method returns to step 162, where a different body position is selected and the patient is asked to assume a different body position. Once each desired body position is tested, the method exits the loop from 168, and a vector is selected as indicated at 170. Once a vector is identified on the basis of the data captured in the loop of 162-166-168,

the method may perform template formation as indicated at 172. In some embodiments, if template formation 172 fails, the method may return to step 170 and select a different vector. The method then ends, as indicated at 174.

[0032] In an alternative embodiment, first and second vectors are identified, with the second vector being a back-up vector for use either because the first, primary or default vector becomes unavailable or, alternatively, for use if the first vector provides ambiguous indications of whether the patient is experiencing an arrhythmia.

[0033] In some embodiments, a single vector is identified for use while the patient is in any body position. In other embodiments, several templates may be formed for the patient. For example, analysis of data captured while the patient is in a supine position may indicate a different "best" vector than that captured while the patient is an upright position. Two templates could then be formed, without regard for whether the first and second templates are formed using the same vector, where each template includes information for its sensing vector configuration.

[0034] Illustratively, the first template could use sensing vector A-Can (see FIG. 1A) and could be defined at the time of postural assessment while the patient is supine, and the second template could use vector A-B (see FIG. 1A) and could be defined at the time of postural assessment while the patient is sitting upright. Then, during analysis, the primary template at any given time could be whichever indicates ordinary cardiac function. If neither template indicates ordinary cardiac function, it may be presumed that an arrhythmia is occurring, and a stimulus may be delivered. This may be performed as part of a Boolean approach to finding arrhythmic activity:

*IF Analysis(A) fails*

*AND IF Analysis(B) fails*

*THEN Event indicates Malignant Rhythm*

[0035] This tiered analysis may prevent misdiagnosis of the cardiac rhythm due to a change of the patient's body position.

[0036] In another illustrative example, the primary and secondary templates may be "switched" one for the other in response to an output from a body position sensor. For example, if the primary template is associated with a first body position and the secondary template is associated with a second body position, an output of a body position sensor may be monitored, and the templates switched depending upon the body position indicated by the body position sensor.

[0037] Additionally, switching between the templates may be achieved without needing the use of a dedicated position sensor. In an illustrative example, only the Analysis(A) is performed in a morphology-based analysis system until a first threshold of abnormality is met. For example, if an X out of Y counter is used, the Analysis(A) may be used by itself until a first X out of Y threshold is met. In an illustrative example, if 18/24 events is the threshold for a determination that a malignant cardiac rhythm is occurring, then an 8/24 threshold may be used to activate Analysis(B). If 2-3 events occur before Analysis(B) begins functioning, then a smooth transition may occur if the patient has changed positions since, by the time the 18/24 counter fills for Analysis(A), 8 or more events will have been detected using Analysis(B). In an illustrative example, if 4/8 of the events using Analysis(B) are found to meet template comparison parameters, the system may switch to Analysis(B), using a different template and/or vector than Analysis(A) for primary analysis. In some illustrative embodiments that use both primary and secondary templates, stimulus delivery (or preparation for stimulus delivery) may be delayed until it is determined that the analysis with each template indicates a malignant cardiac rhythm.

[0038] The method of FIG. 4 calls for more data to be gathered than the method of FIG. 3, regardless of whether one vector is superior or not. Therefore, this method may be slower in some instances than that of FIG. 3. However, with the method of FIG. 3, the patient may be asked to perform and repeat several movements during postural assessment. If a device is implanted in a patient who is relatively weak, for example, due to advanced congestive heart failure, repeated movements may be undesirable. Illustrative examples may be configured to perform either method. In another illustrative example, the devices (the implanted medical device and/or the programmer) in the system are equipped to perform either method, with the programmer allowing a physician to select one method or the other.

[0039] FIG. 5 illustrates a detailed method for an illustrative embodiment. As indicated at 200, the method begins with the patient (PT) supine. Step 200 may be a directive given from the programmer to a physician to have the patient assume a supine position, or it may be given directly to the patient from the programmer itself. With this position verified (for example, the programmer may request an input indicating that the patient is in the requested position), a first vector is selected, as indicated at 202.

[0040] A VS SCORE<sub>SUP</sub> is then calculated, as indicated at 204. The VS SCORE<sub>SUP</sub> may be a "score" calculated to indicate the quality of the sensing vector. As discussed above, this may include consideration of signal amplitude, SNR, etc. Calculation of a SCORE may make use of a formula, a look-up table, or any suitable method for placing a metric on the quality of a sensing vector. Illustrative methods are shown in copending U.S. application Ser. No. 11/441,522, filed May 26, 2006 and entitled SYSTEMS AND METHODS FOR SENSING VECTOR SELECTION IN AN IMPLANTABLE MEDICAL DEVICE.

EP 2 114 244 B1

[0041] After the score is calculated at 204, it is determined whether all vectors have been analyzed, as indicated at 206. If not, a different vector is selected, as shown at 208, and the method calculates another VS SCORE<sub>SUP</sub> at 204. If all the vectors have been considered at step 206, the method continues to block 210.

[0042] At block 210, the programmer or the implantable device, depending on the system configuration, determines whether additional patient positions are possible. If not, the method continues to step 212, where the vector having the largest SCORE from the initial analysis is selected for use in analysis, and template formation is initiated, as indicated at 214. This opt-out step 210 may be provided to accommodate a patient who is not capable of changing body positions due to physical limitations or to accommodate use during implant procedures.

[0043] If, at step 210, one or more additional patient positions are possible, the method continues to step 220. At step 220, the programmer requests that the patient adopt a different position, for example, standing or sitting. The method then performs similar steps to those performed with the first body position. A vector is selected at 222, a score, VS SCORE<sub>STD</sub>, is calculated at 224, and it is determined whether each vector has been considered at 226. If not, as indicated at 228, the method returns to 224 with a different vector selected. Once all vectors are completed, the vectors are compared, as indicated at 230. In an illustrative embodiment, the formula shown at 236 is used to calculate a PASS<sub>Value</sub> for each vector.

[0044] Formula 236 includes two major terms. FIGS. 6A-6B are graphs of variable relationships in an illustrative method of analyzing sensing vectors during postural assessment, with FIG. 6A illustrating the first term:

$$\sqrt{(SCORE_{SUP})^2 + (SCORE_{STD})^2} - |SCORE_{SUP} - SCORE_{STD}|$$

[0045] The result of this first term increases with the amplitude of each SCORE, and is greatest when the amplitudes of the SCOREs are similar.

[0046] FIG. 6B illustrates relationships for the second term:

$$1 - \left( \frac{Max(AMP_{SUP}, AMP_{STD}) - Min(AMP_{SUP}, AMP_{STD})}{Max(AMP_{SUP}, AMP_{STD})} \right)$$

[0047] When the signal amplitudes are closest to one another, the value of this term approaches 1, while it approaches zero if the maximum signal amplitude of the sensing vector when the patient is in one body position is significantly different from the maximum signal amplitude of the sensing vector when the patient is in the other body position.

[0048] In short, illustrative formula 236 takes into account the size and similarities of the SCOREs, i.e., whether the vector quality is high and the strength of the signal along a given vector is high in the first term, and whether the vector provides relatively consistent output, particularly in terms of signal amplitude, without regard for the body position of the patient. One reason for the inclusion of the second term is that, in the illustrative embodiment, the event detection system of the implantable device includes an amplifying input having two dynamic ranges, one which is larger and one which is smaller. With such a system, it may be better, in some embodiments, to select a vector that captures signal that makes relatively full use of one of the dynamic ranges in each of the patient body positions.

[0049] For example, given dynamic ranges of 0-2.0 mV and 0-4.0 mV, analysis may be easier and more reliable with a first vector in which peak voltages are 0.75 mV for both body positions, rather than a second vector in which peak voltages are 0.75 mV for one body position and 2.5 mV for a second body position, as the latter vector would call for lower amplification to accommodate the second body position but would use the dynamic range poorly when the patient is in the first body position. For example, FIG. 7C illustrates a SCORE calculation in which the amplitude affects the output SCORE in a manner having first and second peaks, with a trough therebetween. While having both terms account for dynamic range is part of some illustrative embodiments, other illustrative embodiments may instead use the formula of FIG. 7A for score calculation, as further explained below.

[0050] The illustrative formula 236 presumes a SCORE value is generated in some manner. Some illustrative embodiments use the following approach:

$$SCORE = S_A \times S_R$$

[0051] Where, for example, S<sub>A</sub> and S<sub>R</sub> may be calculated using one of several approaches. In one such embodiment, the following formula is used:

$$S_A = GAIN * \frac{\exp(N1 * [\ln(N2 * QRS_{Avg} - N3)]^2)}{D1 * QRS_{Avg} - D2}$$

Where:

$$\begin{aligned} GAIN &= 64.0 & N1 &= -34.7222 \\ N2 &= 0.2326 & N3 &= -0.6047 \\ D1 &= 0.3008 & D2 &= -0.7821 \end{aligned}$$

[0052] It should be noted that the limits for  $QRS_{Avg}$ , in this illustrative embodiment, are  $0 < QRS_{Avg} < 4.0$ . A graph illustrating the relationship between  $S_A$  and  $QRS_{Avg}$  is shown in FIG. 7A.

[0053] The illustrative Scoring method further includes calculating a value  $S_R$  as:

$$S_R = C_R * (SNR)^2$$

Where:

if  $SNR \leq 3.5$ ,  $C_R = 0.1$ ;  
 if  $3.5 < SNR \leq 10$ ,  $C_R = 1$ ; and  
 if  $SNR > 10$ ,  $S_R = 100$

[0054] A graph illustrating the relationship between  $S_R$  and the SNR is shown in FIG. 7B.

[0055] In another embodiment,  $S_A$  and  $S_R$  may be calculated from the following look-up table:

LOOKUP TABLE

| $S_A$ | $QRS_{Avg}$ (mV) | $S_R$ | SNR      |
|-------|------------------|-------|----------|
| 0.5   | $\leq 0.5$       | 0.5   | $\leq 3$ |
| 5     | 0.5 - 0.65       | 1     | 3 - 3.5  |
| 10    | 0.65 - 0.8       | 25    | 3.5 - 4  |
| 18    | 0.8 - 1.0        | 50    | 4 - 5    |
| 30    | 1.0 - 1.7        | 75    | 5 - 7.5  |
| 20    | 1.7 - 2.0        | 100   | $> 7.5$  |
| 40    | 2.0 - 3.0        |       |          |
| 15    | 3.0 - 3.5        |       |          |
| 0.5   | 3.5 - 4.0        |       |          |

[0056] It can be seen that the output scores using the lookup table would include a trough in the range of  $1.7 \text{ mV} < QRS_{Avg} < 2.0 \text{ mV}$ , in accordance with an embodiment adapted for multiple dynamic ranges.

[0057] In yet another embodiment,  $S_A$  and  $S_R$  are calculated using another polynomial formula, for example:

$$S_R = C_R * (SNR)^2$$

where:

if  $SNR \leq 3.5$ ,  $C_R = 0.1$ ;  
 if  $3.5 < SNR \leq 10$ ,  $C_R = 1$ ; and  
 if  $SNR > 10$ ,  $S_R = 100$

**[0058]** It can be seen that  $S_R$  is calculated the same here as in the first calculation method shown above, and a graph showing the relationship is shown in FIG. 7B. In this illustrative example,  $S_A$  may be calculated using the following:

$$S_A = \{ C_1*(QRS_{Avg})^6 + C_2*(QRS_{Avg})^5 + C_3*(QRS_{Avg})^4 + C_4*(QRS_{Avg})^3 + C_5*(QRS_{Avg})^2 + C_6*(QRS_{Avg}) + C_7 \}$$

where, if  $QRS_{Avg} \leq 2.0$ ,

$$C_1 = 22.5718 \quad C_2 = -105.9666 \quad C_3 = 160.2345 \\ C_4 = -88.9262 \quad C_5 = 29.6019 \quad C_6 = -1.2859 \\ C_7 = 0.0087$$

and, if  $QRS_{Avg} > 2.0$ ,

$$C_1 = 56.5544 \quad C_2 = -1069.9959 \quad C_3 = 8310.0056 \\ C_4 = -33849.9682 \quad C_5 = 76139.7271 \quad C_6 = -89551.3405 \\ C_7 = 43035.7880$$

**[0059]** A graph illustrating the relationship between  $S_A$  and  $QRS_{Avg}$  is shown in FIG. 7C. Both the lookup table and this third method using a 6<sup>th</sup> order polynomial take into account a system having first and second dynamic ranges by providing a dip in the SCOREs corresponding to input signals that would border between the two dynamic ranges.

**[0060]** These methods of calculating SCOREs are merely illustrative, and those of skill in the art will understand that the values and calculations involved will vary depending upon the positioning of the system, the electronics and electrodes used, power level(s), and, potentially, other variables.

**[0061]** It is sufficient for the present invention that an analysis of a sensing vector is performed with the patient in two or more body positions, if two positions are possible, and that this analysis provides a result that indicates whether or not the vector is useful/usable. For some embodiments, the analysis may further provide results for several vectors such that the vectors may be compared to one another. For example, in the method of FIG. 3, a Boolean output of Yes/No may be a result of vector analysis such that, if a vector is initially selected and is functional, a Yes output results. For the method embodiments of FIGS. 4-5, however, an output of vector analysis that allows comparative analysis is illustrated, as it allows the vectors to be compared to one another at the end of analysis. In alternative embodiments, a method as in FIGS. 4-5 returns Boolean results, with the available vectors prioritized such that the highest priority vector returning a functional result (Yes output, for example) is selected.

**[0062]** Referring again to FIG. 5, after comparison of the vectors at 230, the vector with the largest  $PASS_{value}$  is selected as the default or primary sensing vector, as indicated at 232. Template formation may then be initiated, as indicated at 214, and the device may move on to ordinary function. If desired, a secondary sensing vector may also be identified in step 232. A secondary sensing vector may be used, for example, for any of the reasons set forth above, including to resolve ambiguities, to provide a Boolean check of cardiac function, or to provide a second vector to use when the patient changes body position.

**[0063]** In a more general embodiment making use of similar relationships, the first formula could be of the form:

$$\sqrt{\sum_{i=1}^{i=n} (SCORE_n)^2} - [Max(SCORE_1...SCORE_n) - Min(SCORE_1...SCORE_n)]$$

where n is the number of body positions tested, and  $SCORE_i$  is the score for the vector while the patient is in the i<sup>th</sup> body position. The amplitude factor may be analogous to the above amplitude factor. An additional factor which may be included takes the form:

$$\frac{Min(SCORE_1...SCORE_n)}{Max(SCORE_1...SCORE_n)}$$

**[0064]** This term would further emphasize a minimum score value, for example, when using three body positions in

the postural assessment, if a very low score is achieved in any of the positions, the vector under consideration may be poorly suited to detection regardless of high SCOREs in the other positions, and this factor would reduce the output PASS value.

5 [0065] FIGS. 8A-8E are graphical representations of display outputs of a programmer during an illustrative method of postural assessment. In the illustrative embodiment, the programmer includes a touch screen; in other embodiments, the programmer may include buttons, a keypad or other controls, and may take any suitable form.

10 [0066] FIG. 8A shows a first screen shot. The programmer indicates to the physician that the postural assessment procedure is to start. The physician is asked to ensure that the patient is laying down (a first body position) and then to touch the "continue" icon 300 on the screen. Across the top of the programmer screen, status is indicated for the implanted device. In particular, during these steps, therapy for the device may (optionally) be turned off. The device status as "implanted" is indicated, as is the patient's heart rate. In some embodiments, the programmer may refuse to perform postural assessment if the patient's heart rate is not in a predetermined range, for example, between 50 and 120 bpm.

15 [0067] After the physician presses the "continue" icon 300 from the screen shot of FIG. 8A, the next screen that is seen is that of FIG. 8B, in which the programmer indicates that the device is collecting the patient's rhythm. The physician is requested to keep the patient still. A cancel icon 302 is provided in case the physician determines that the procedure should stop, for example, if the patient feels uncomfortable or ill, displays a physical abnormality (rising heart rate, for example), or if the patient moves. If desired, a status bar may be provided to indicate the progress of the sensing vector analysis to the physician.

20 [0068] Once data is captured for the first patient body position, the next screen shot is that of FIG. 8C. The physician is asked to have the patient sit up (a second body position). With the patient sitting up, the physician is asked to keep the patient still and depress the continue icon 304. The programmer then displays the screen shot of FIG. 8D, which is quite similar to that of FIG. 8B and again includes an optional cancel button 306 and may include a status bar.

25 [0069] As shown in FIG. 8E, once data capture is complete for the second body position, patient tailoring in the illustrative embodiment is complete. The physician (or other operator) may go on to perform other tasks by touching the "continue" icon 310. In other embodiments, additional data capture may ensue, if desired.

30 [0070] In some embodiments, the data capture for the patient may include options for physician input. For example, during data capture, it is possible for an artifact (such as a T-wave) to interfere with detection of R-waves. In some instances, the physician's input may be needed or requested to resolve any questions relating to event classification. Some examples are discussed in copending U.S. application Ser. No. 11/441,522, filed May 26, 2006 and entitled SYSTEMS AND METHODS FOR SENSING VECTOR SELECTION IN AN IMPLANTABLE MEDICAL DEVICE. In one illustrative embodiment, any such questions are delayed until all data has been captured, allowing the physician to concentrate on the programmer to answer such questions, rather than having the patient remain in a predetermined position while such issues are resolved. In another illustrative embodiment, such questions are asked as they arise.

35 [0071] In some embodiments, the above methods may be revisited later, after implantation, by the patient on his or her own. For example, as home-monitoring systems become available for patients with implanted cardiac monitoring and/or stimulus devices, a home monitoring system may be used to communicate with the implanted device, allowing later re-selection of sensing vectors in light of postural assessment. The home monitoring system, in an illustrative example, may include a graphical user interface allowing the user to indicate readiness for postural assessment, after which the home monitoring system may provide graphical output indicating what to do, physically, for the patient to complete home-monitoring self-assessment of postural effects on cardiac signals. Thus, a home monitoring system having functionality allowing it to provide patient directions in support of postural assessment may also be a "programmer" in the methods and systems discussed herein. Yet another illustrative embodiment may include a device as shown in either of FIGS. 1A-1B which includes a sensor or sensing system for determining patient body position. For example, the sensor may be a gravity sensor or accelerometer-type sensor. The sensor may also be used to measure transthoracic impedance as a surrogate for patient body position. In one embodiment, the system need not determine an actual position using the position sensor, but instead may identify position sensor output ranges that correlate to the usefulness of particular vectors and/or templates. For example, when a patient moves from sitting to standing, a position sensor output may indicate a change of position. When the position changes as indicated by the position sensor, the system may determine for itself whether the primary sensing vector should be changed by observing various template analyses. 40 To this end, from the implanted medical device system perspective, knowledge of the position is not needed, but instead, identification of the best template from several that are available is sufficient.

45 [0072] During operation, another illustrative implanted medical device may periodically (at intervals) or occasionally (in response to a condition or request) perform postural assessment without requesting movement by the patient. For example, if the position sensor output is "X", vector selection may be performed. If the position sensor later provides a different output, "Y", vector selection may again be performed, as is may be presumed that the patient is in a different body position. This process may be repeated several times, with templates and vectors identified for various position sensor outputs. After the selection process, if the position sensor output returns to "X", then a vector and/or template associated with position sensor output "X" may be selected. Within this approach, a single vector may have multiple 50

templates, each corresponding to a position sensor output.

[0073] Those skilled in the art will recognize that the present invention may be manifested in a variety of forms other than the specific embodiments described and contemplated herein. Accordingly, departures in form and detail may be made without departing from the scope of the present invention as described in the appended claims.

5

**Claims**

1. An implantable cardiac stimulus system comprising:

10

an implantable medical device (12, 32) including a canister housing operational circuitry coupled to at least three electrodes (16, 20, 22; 36, 38, 40); and

a programmer (24, 42) configured to communicate with the implantable medical device (12, 32) after the implantable medical device (12, 32) is implanted in a patient and having a screen for providing display outputs and means for receiving user input;

15

wherein the system is configured to perform sensing vector selection using postural analysis after the implantable medical device (12, 32) is implanted in a patient such that the at least three electrodes (16, 20, 22; 36, 38, 40) define at least first and second sensing vectors analyzable by the operational circuitry, with the improvement comprising the sensing vector selection including:

20

the programmer (24, 42) is configured to indicate via the screen that the patient is to hold a first body position while a first analysis is performed;

the implantable medical device (12, 32) is configured to capture data using at least the first and second sensing vectors;

25

the implantable medical device (12, 32) is configured to indicate to the programmer (24, 42) that a first data capture for sensing vector analysis using the first and second sensing vectors is completed;

the programmer (24, 42), once the implantable medical device (12, 32) indicates completion of the first data capture for sensing vector analysis, is configured to indicate via the screen that the patient is to hold a second body position while a second analysis is performed;

30

the implantable medical device (12, 32) again is configured to capture data using at least the first and second sensing vectors;

the implantable medical device (12, 32) is configured to indicate to the programmer (24, 42) that a second data capture for sensing vector analysis using the first and second sensing vectors is completed; and the programmer (24, 42) is configured to indicate via the screen that the second analysis is complete.

35

2. The system of claim 1, wherein the implantable medical device (12, 32) is configured to transmit data to the programmer (24, 42) from the first and second data capture, and the programmer (24, 42) is configured to select one of the sensing vectors as a primary sensing vector for use in cardiac event detection.

40

3. The system of claim 1, wherein the implantable medical device (12, 32) is further configured to identify a secondary sensing vector.

4. A system as in any of claims 1-3 wherein the first and second body positions are, in any order, supine and sitting up.

45

5. A system as in any of claims 1-3 wherein the first and second body positions are, in any order, supine and standing.

6. A system as in any of claims 1-3 wherein the first and second body positions are, in any order, supine and prone.

7. A system as in any of claims 1-3 wherein the first and second body positions are, in any order, sitting up and standing.

50

8. A system as in any of claims 1-3 wherein the first and second body positions are, in any order, sitting up and prone.

9. A system as in any of claims 1-3 wherein the first and second body positions are, in any order, standing and prone.

55

**Patentansprüche**

1. Implantierbares Herzstimulationssystem, welches aufweist:

## EP 2 114 244 B1

eine implantierbare medizinische Vorrichtung (12, 32), enthaltend eine Behältergehäuse-Operationsschaltung, die mit zumindest drei Elektroden (16, 20, 22; 36, 38, 40) gekoppelt ist; und  
eine Programmier Vorrichtung (24, 42), die zum Kommunizieren mit der implantierbaren medizinischen Vorrichtung (12, 32) konfiguriert ist, nachdem die implantierbare medizinische Vorrichtung (12, 32) in einen Patienten implantiert wurde, und die einen Schirm zum Liefern von Anzeigeausgaben und Mittel zum Empfangen einer Benutzereingabe hat;

wobei das System konfiguriert ist, eine Erfassungsvektorauswahl unter Verwendung einer Haltungsanalyse durchzuführen, nachdem die implantierbare medizinische Vorrichtung (12, 32) in einem Patienten implantiert wurde, derart, dass die zumindest drei Elektroden (16, 20, 22; 36, 38, 40) zumindest einen ersten und einen zweiten Erfassungsvektor definieren, die durch die Operationsschaltung analysierbar sind, wobei die Verbesserung die Erfassungsvektorauswahl aufweist, die enthält:

die Programmier Vorrichtung (24, 42) konfiguriert ist zum Anzeigen über den Schirm, dass der Patient in einer ersten Körperhaltung zu halten ist, während eine erste Analyse durchgeführt wird;

die implantierbare medizinische Vorrichtung (12, 32) konfiguriert ist, Daten unter Verwendung zumindest des ersten und des zweiten Erfassungsvektors zu erfassen;

die implantierbare medizinische Vorrichtung (12, 32) konfiguriert ist zur Anzeige zu der Programmier Vorrichtung (24, 42), dass eine erste Datenerfassung für die Erfassungsvektoranalyse unter Verwendung des ersten und des zweiten Erfassungsvektors beendet ist;

die Programmier Vorrichtung (24, 42), wenn die implantierbare medizinische Vorrichtung (12, 32) die Beendigung der ersten Datenerfassung für die Erfassungsvektoranalyse anzeigt, konfiguriert ist zum Anzeigen über den Schirm, dass der Patient eine zweite Körperhaltung annehmen soll, während eine zweite Analyse durchgeführt wird;

die implantierbare medizinische Vorrichtung (12, 32) wieder konfiguriert ist zum Erfassen von Daten unter Verwendung zumindest des einen und des zweiten Erfassungsvektors;

die implantierbare medizinische Vorrichtung (12, 32) konfiguriert ist zur Anzeige zu der Programmier Vorrichtung (24, 42), dass eine zweite Datenerfassung für die Erfassungsvektoranalyse unter Verwendung des ersten und des zweiten Erfassungsvektors beendet ist; und

die Programmier Vorrichtung (24, 42) konfiguriert ist zum Anzeigen über den Schirm, dass die zweite Analyse beendet ist.

2. System nach Anspruch 1, bei dem die implantierbare medizinische Vorrichtung (12, 32) konfiguriert ist zum Senden von Daten zu der Programmier Vorrichtung (24, 42) von der ersten und der zweiten Datenerfassung, und die Programmier Vorrichtung (24, 42) konfiguriert ist zum Auswählen eines der Erfassungsvektoren als einen primären Erfassungsvektor zur Verwendung bei einer Herzereigniserfassung.
3. System nach Anspruch 1, bei dem die implantierbare medizinische Vorrichtung (12, 32) weiterhin konfiguriert ist zum Identifizieren eines sekundären Erfassungsvektors.
4. System nach einem der Ansprüche 1 bis 3, bei dem die erste und die zweite Körperhaltung in beliebiger Reihenfolge auf dem Rücken liegend und auf sitzend sind.
5. System nach einem der Ansprüche 1 bis 3, bei dem die erste und die zweite Körperhaltung in beliebiger Reihenfolge auf dem Rücken liegend und stehend sind.
6. System nach einem der Ansprüche 1 bis 3, bei dem die erste und die zweite Körperhaltung in beliebiger Reihenfolge auf dem Rücken liegend und auf dem Bauch liegend sind.
7. System nach einem der Ansprüche 1 bis 3, bei dem die erste und die zweite Körperhaltung in beliebiger Reihenfolge auf sitzend und stehend sind.
8. System nach einem der Ansprüche 1 bis 3, bei dem die erste und die zweite Körperhaltung in beliebiger Reihenfolge auf sitzend und auf dem Bauch liegend sind.
9. System nach einem der Ansprüche 1 bis 3, bei dem die erste und die zweite Körperhaltung in beliebiger Reihenfolge stehend und auf dem Bauch liegend sind.

**Revendications**

**1. Système de stimulation cardiaque implantable comprenant :**

5 un dispositif médical implantable (12, 32) qui inclut un boîtier qui loge un circuit opérationnel qui est couplé à au moins trois électrodes (16, 20, 22 ; 36, 38, 40) ; et un programmeur (24, 42) qui est configuré de manière à ce qu'il communique avec le dispositif médical implantable (12, 32) après que le dispositif médical implantable (12, 32) est implanté sur un patient et qui comporte un écran pour fournir des sorties d'affichage et un moyen pour recevoir une entrée d'utilisateur ; dans

10 lequel : le système est configuré de manière à ce qu'il réalise une sélection de vecteurs de détection en utilisant une analyse de posture après que le dispositif médical implantable (12, 32) est implanté sur un patient de telle sorte que les au moins trois électrodes (16, 20, 22 ; 36, 38, 40) définissent au moins des premier et second vecteurs de détection qui peuvent être analysés par le circuit opérationnel, l'amélioration comprenant le fait que la

15 sélection des vecteurs de détection inclue ce qui suit : le programmeur (24, 42) est configuré de manière à ce qu'il indique, via l'écran, que le patient doit se tenir dans une première position corporelle tandis qu'une première analyse est réalisée ;

20 le dispositif médical implantable (12, 32) est configuré de manière à ce qu'il capture des données en utilisant au moins les premier et second vecteurs de détection ;

le dispositif médical implantable (12, 32) est configuré de manière à ce qu'il indique au programmeur (24, 42) qu'une première capture de données pour une analyse de vecteurs de détection en utilisant les premier et second vecteurs de détection est terminée ;

25 le programmeur (24, 42), une fois que le dispositif médical implantable (12, 32) indique la fin de la première capture de données pour une analyse de vecteurs de détection, est configuré de manière à ce qu'il indique, via l'écran, que le patient doit se tenir dans une seconde position corporelle tandis qu'une seconde analyse est réalisée ;

le dispositif médical implantable (12, 32) est à nouveau configuré de manière à ce qu'il capture des données en utilisant au moins les premier et second vecteurs de détection ;

30 le dispositif médical implantable (12, 32) est configuré de manière à ce qu'il indique au programmeur (24, 42) qu'une seconde capture de données pour une analyse de vecteurs de détection en utilisant les premier et second vecteurs de détection est terminée ; et

le programmeur (24, 42) est configuré de manière à ce qu'il indique, via l'écran, que la seconde analyse est terminée.

35 **2. Système selon la revendication 1, dans lequel le dispositif médical implantable (12, 32) est configuré de manière à ce qu'il transmette des données au programmeur (24, 42) qui sont issues des première et seconde captures de données, et le programmeur (24, 42) est configuré de manière à ce qu'il sélectionne l'un des vecteurs de détection en tant que vecteur de détection primaire pour une utilisation au niveau de la détection d'un événement cardiaque.**

40 **3. Système selon la revendication 1, dans lequel le dispositif médical implantable (12, 32) est en outre configuré de manière à ce qu'il identifie un vecteur de détection secondaire.**

45 **4. Système selon l'une quelconque des revendications 1 à 3, dans lequel les première et seconde positions corporelles sont, dans n'importe quel ordre, la position allongé sur le dos et la position assis.**

**5. Système selon l'une quelconque des revendications 1 à 3, dans lequel les première et seconde positions corporelles sont, dans n'importe quel ordre, la position allongé sur le dos et la position debout.**

50 **6. Système selon l'une quelconque des revendications 1 à 3, dans lequel les première et seconde positions corporelles sont, dans n'importe quel ordre, la position allongé sur le dos et la position couché sur le ventre.**

**7. Système selon l'une quelconque des revendications 1 à 3, dans lequel les première et seconde positions corporelles sont, dans n'importe quel ordre, la position assis et la position debout.**

55 **8. Système selon l'une quelconque des revendications 1 à 3, dans lequel les première et seconde positions corporelles sont, dans n'importe quel ordre, la position assis et la position couché sur le ventre.**

## EP 2 114 244 B1

9. Système selon l'une quelconque des revendications 1 à 3, dans lequel les première et seconde positions corporelles sont, dans n'importe quel ordre, la position debout et la position couché sur le ventre.

5

10

15

20

25

30

35

40

45

50

55

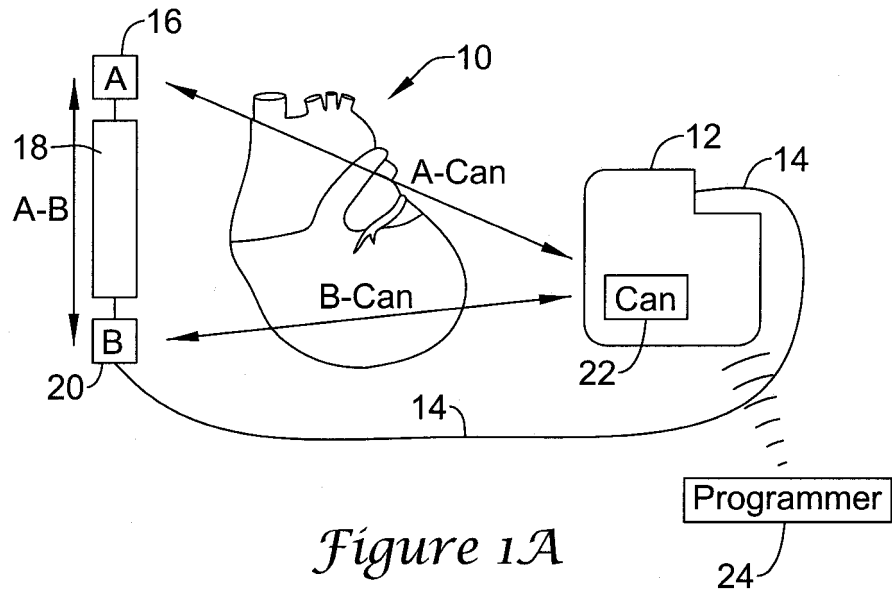


Figure 1A

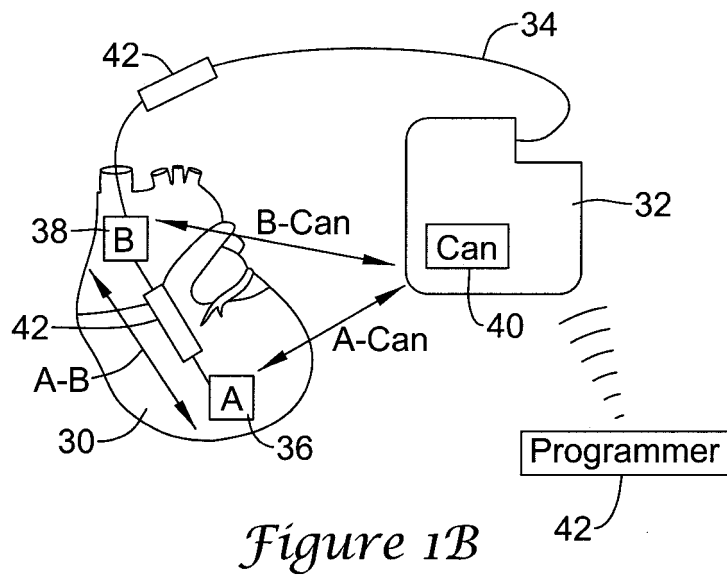


Figure 1B

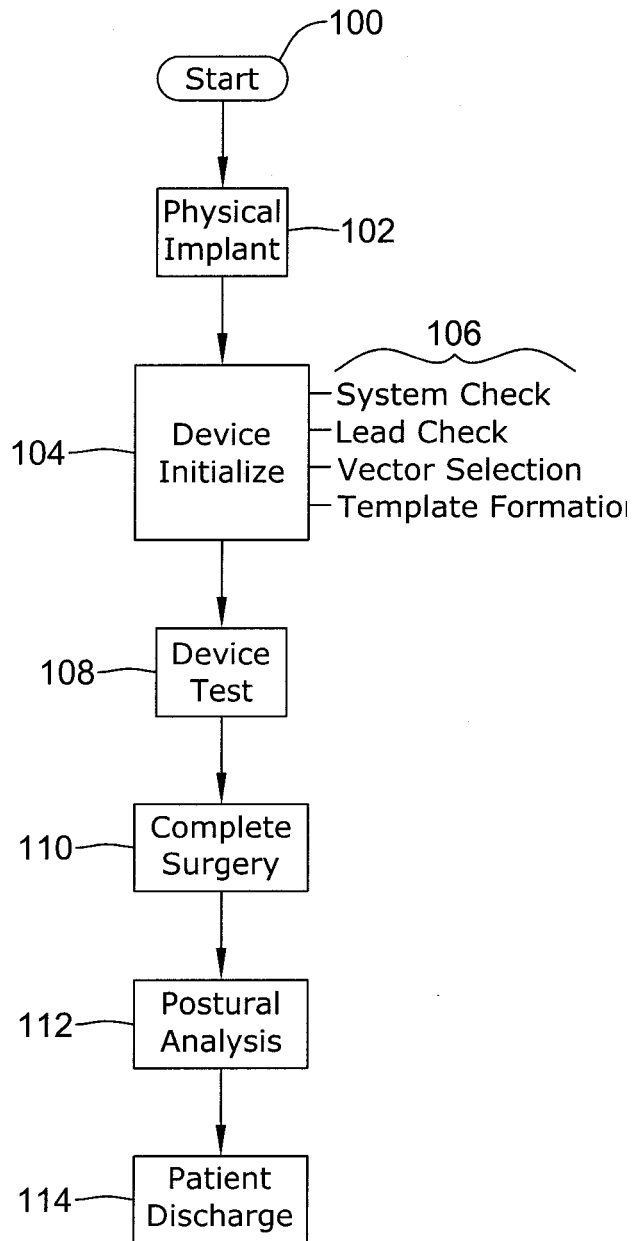


Figure 2

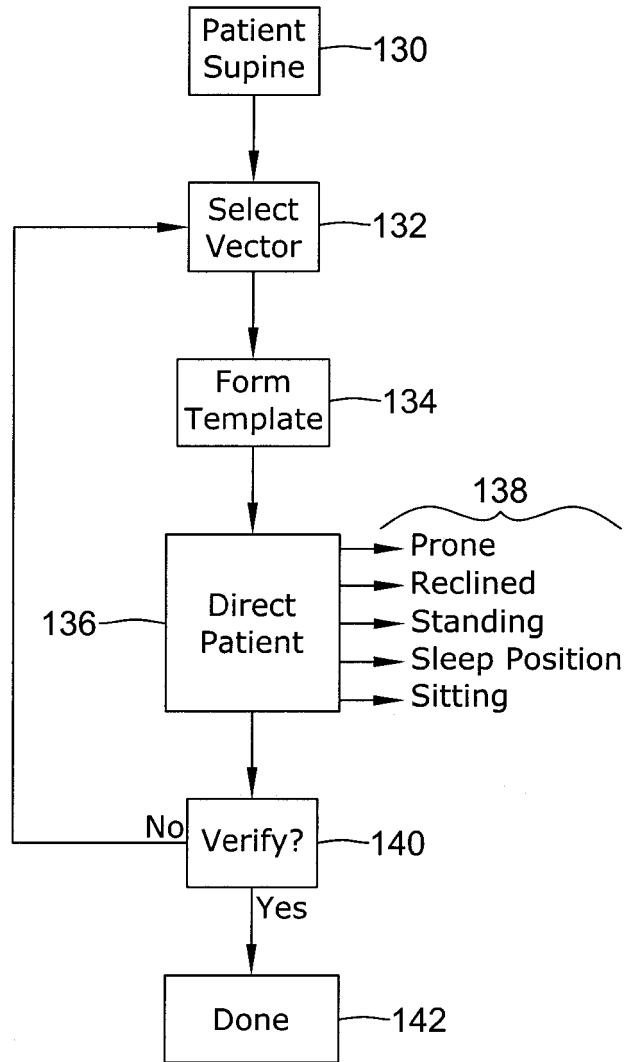


Figure 3

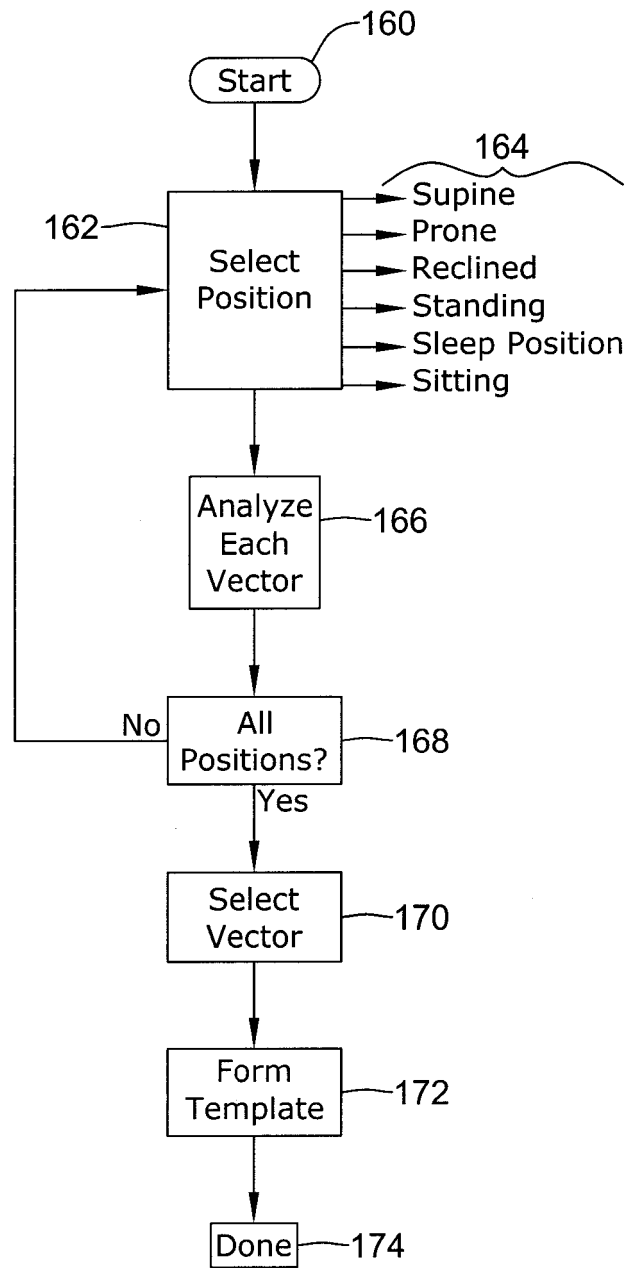


Figure 4

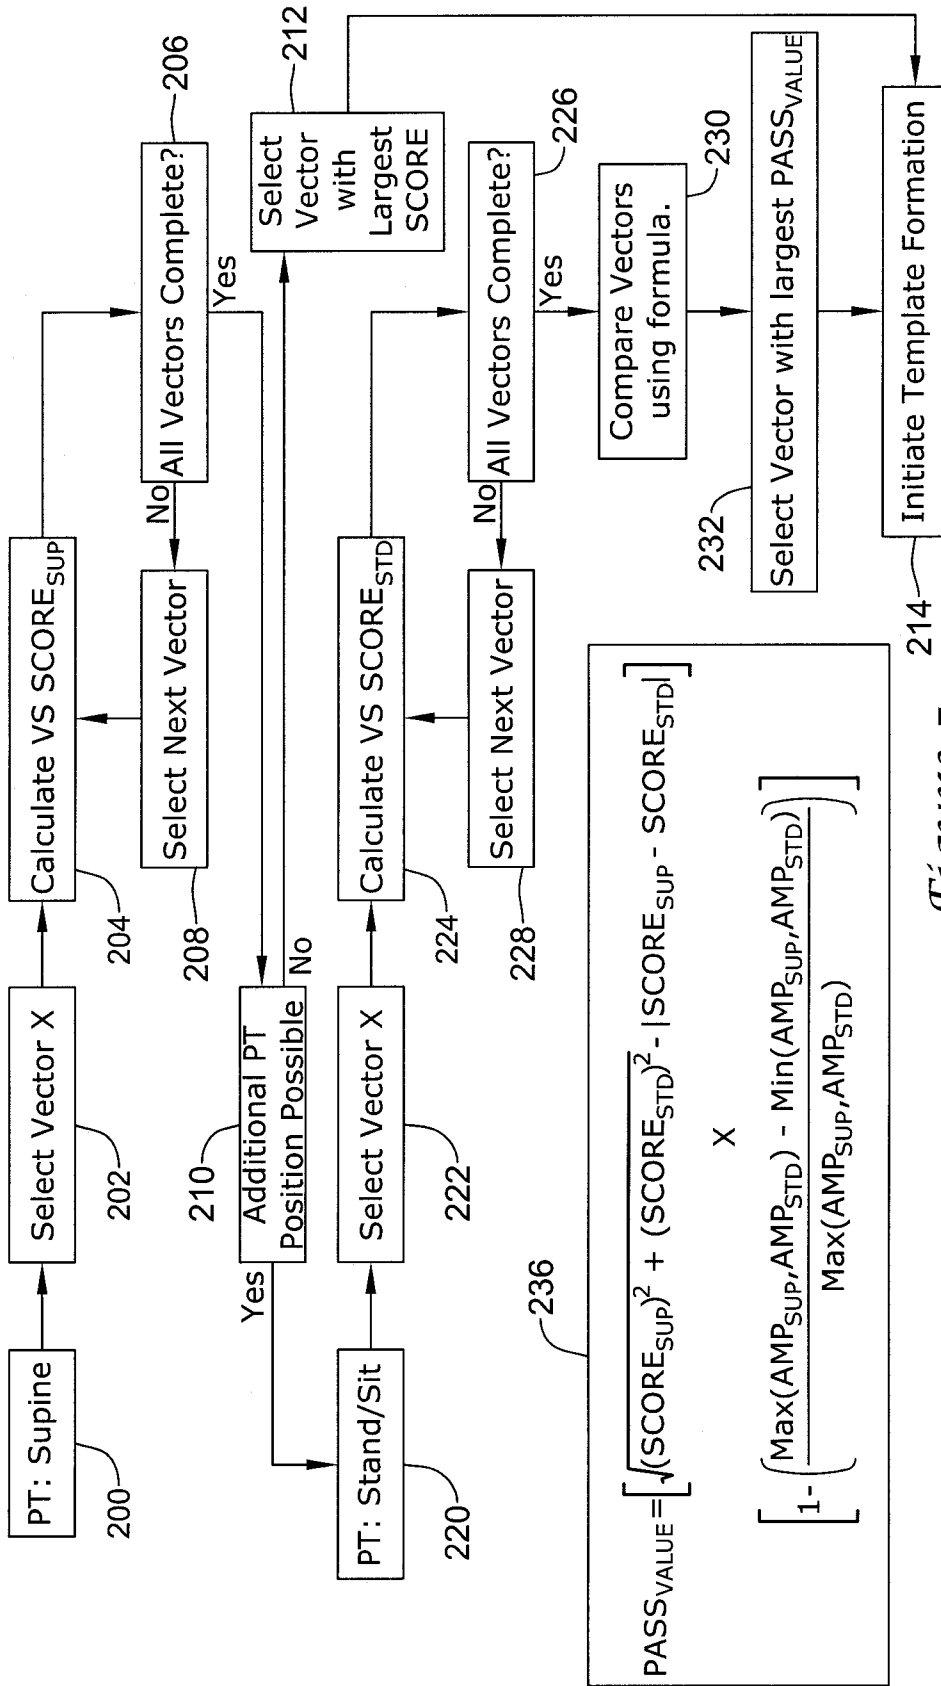


Figure 5


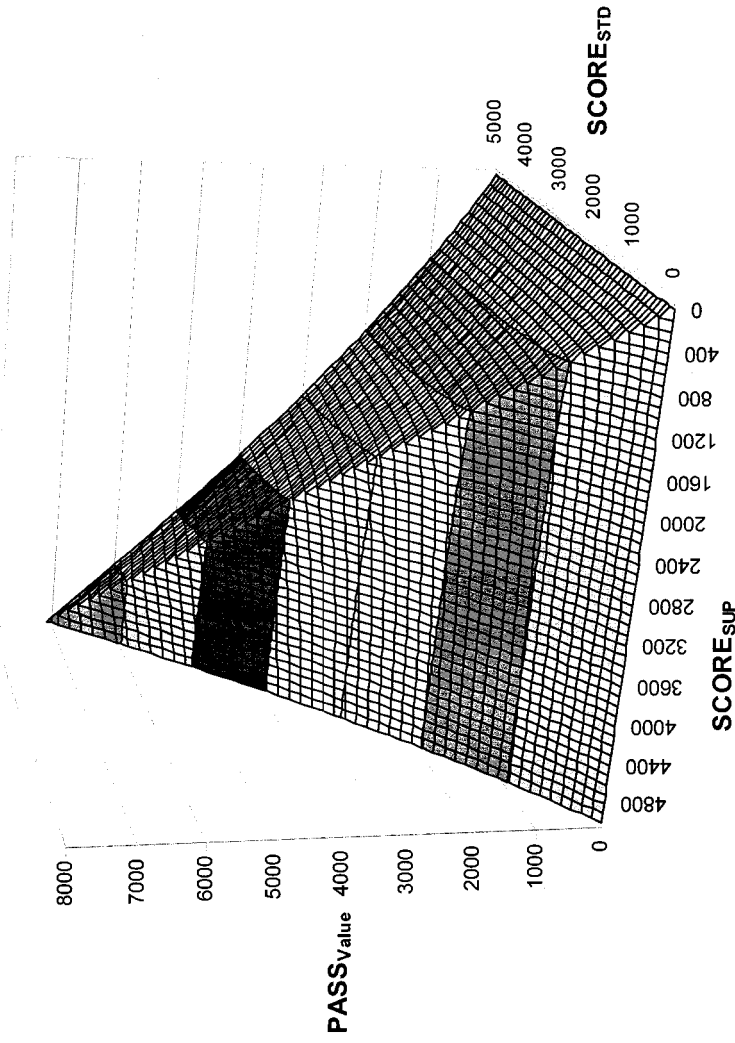


Figure 6A

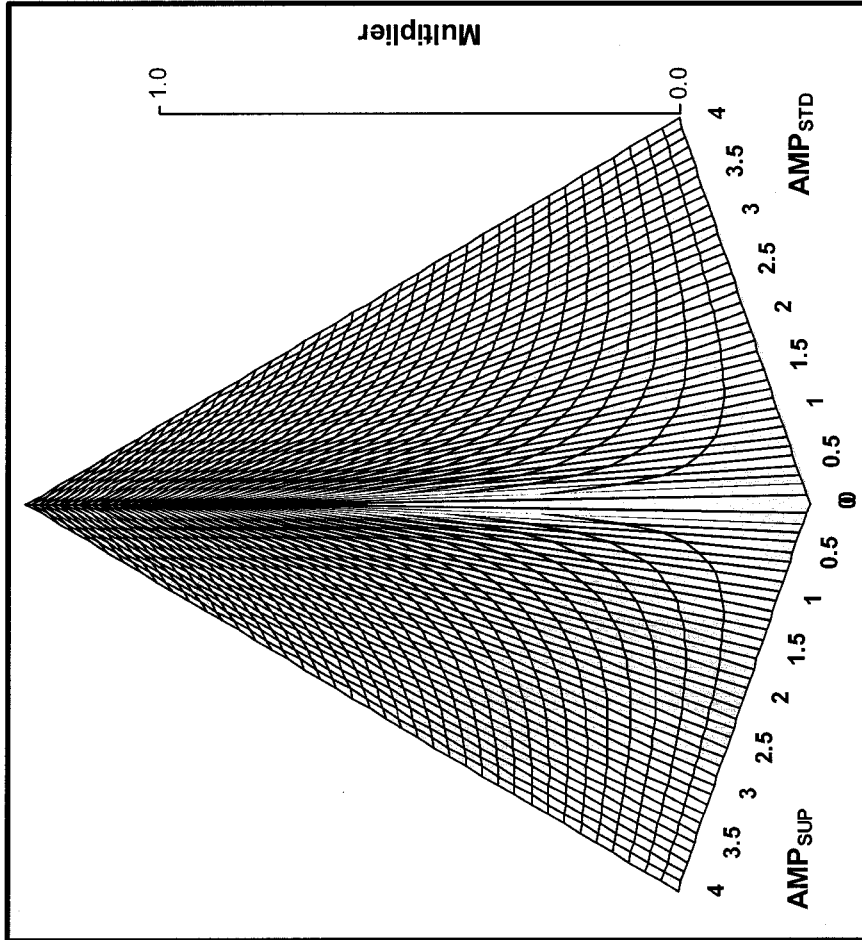

*Figure 6B*

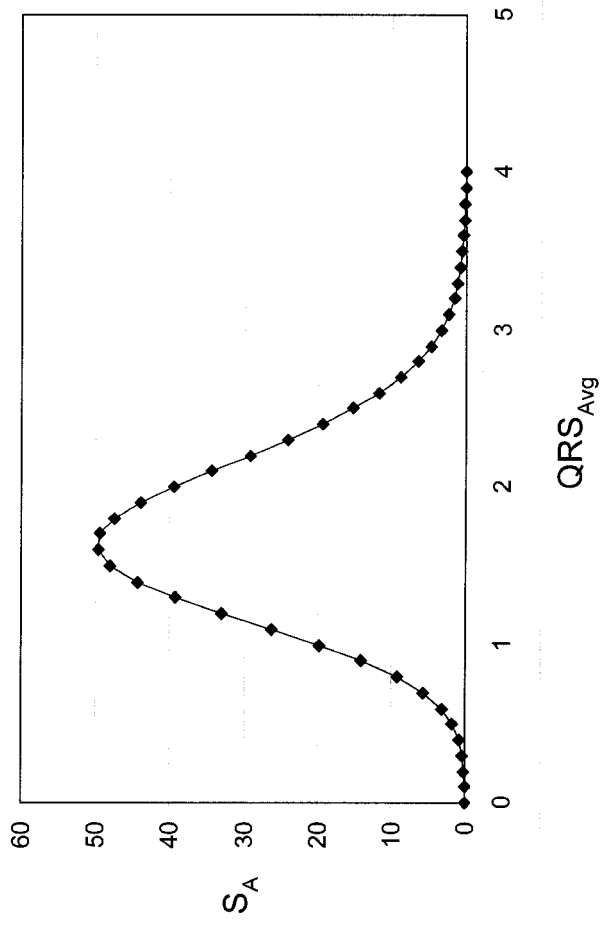


Figure 7A

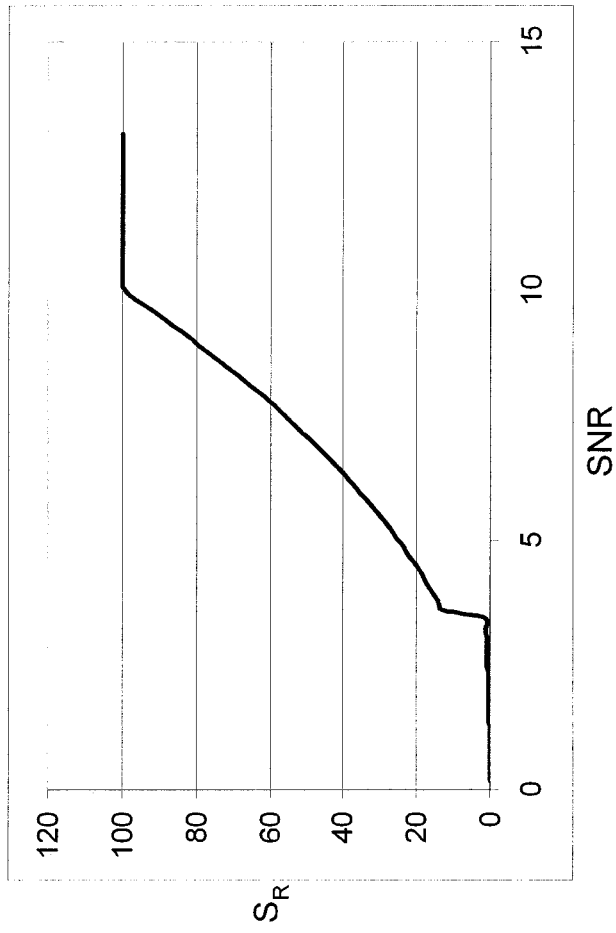


Figure 7B

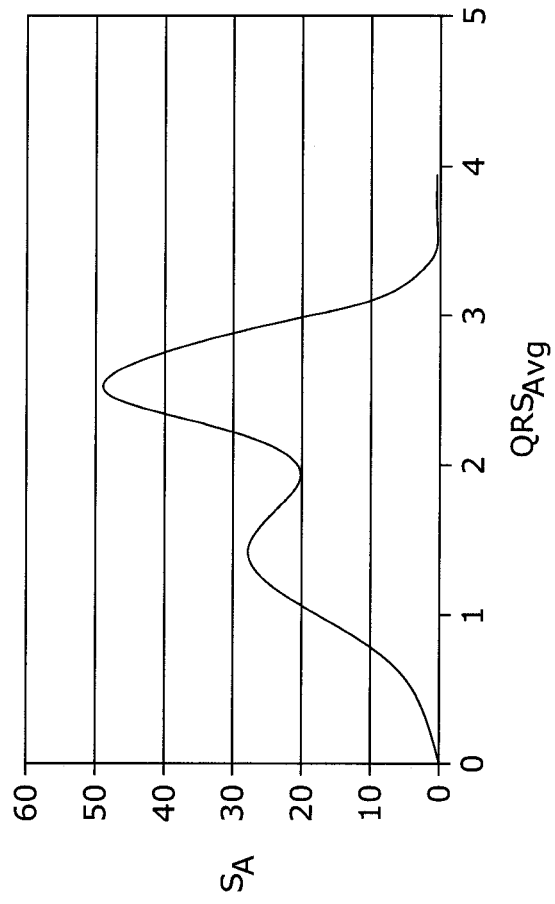


Figure 7C

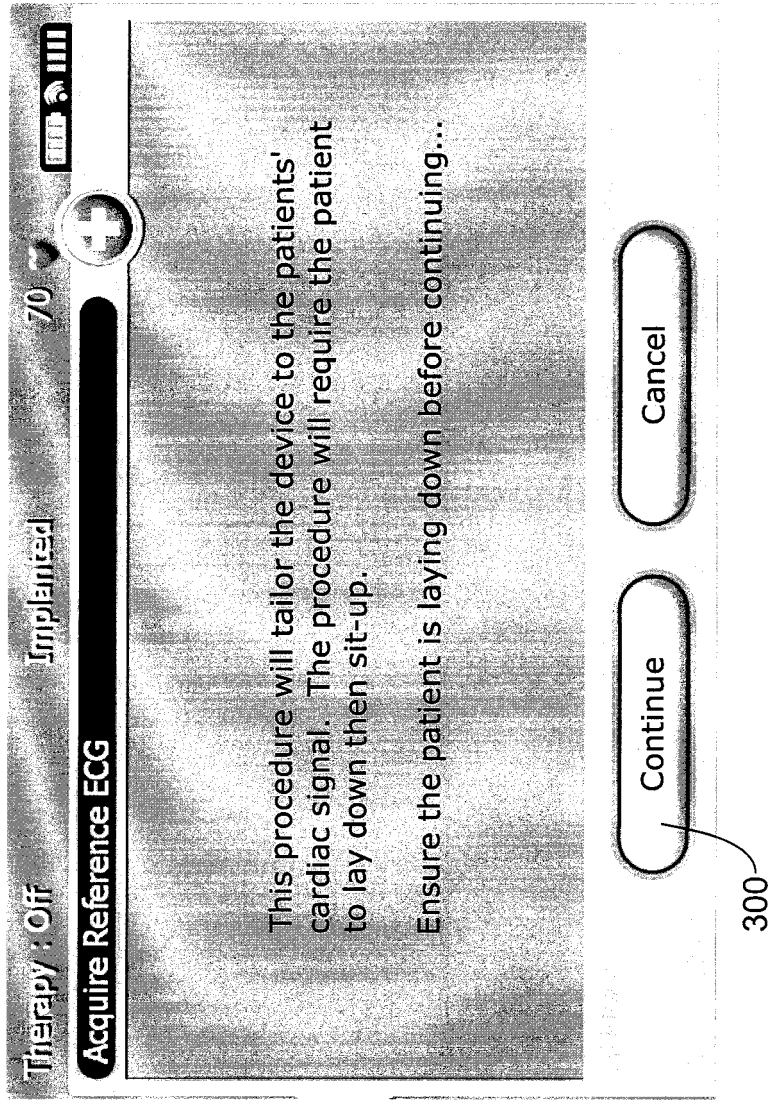


Figure 8A



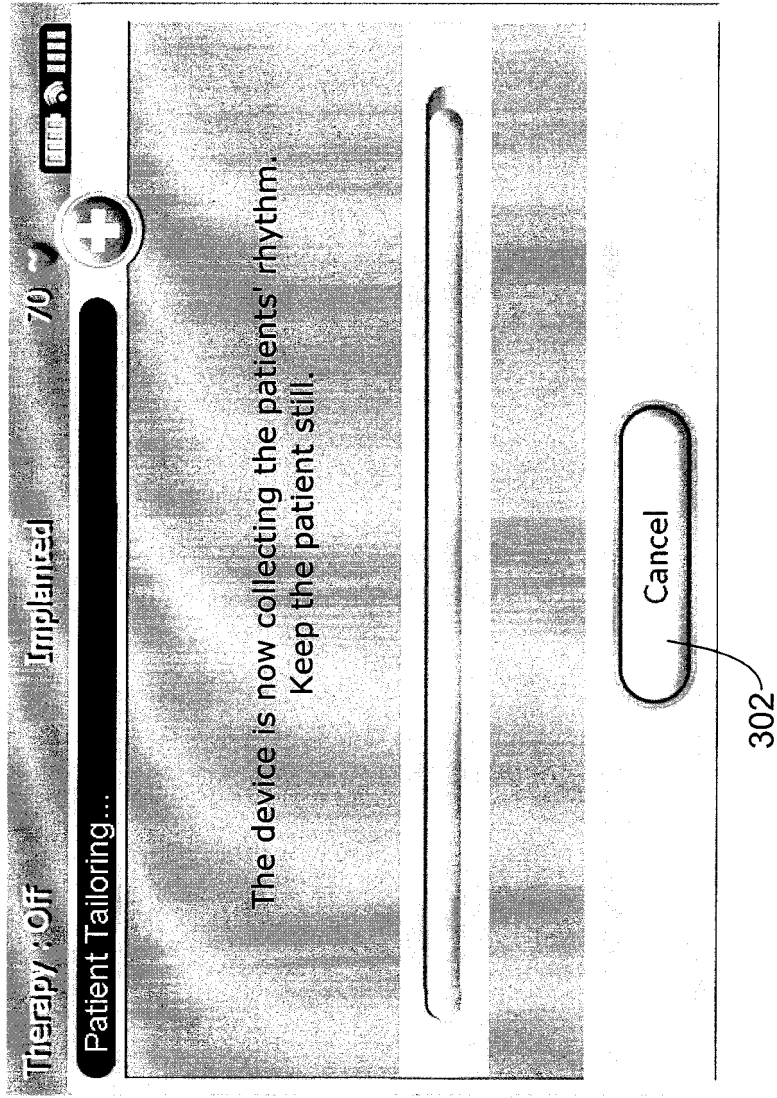



Figure 8B

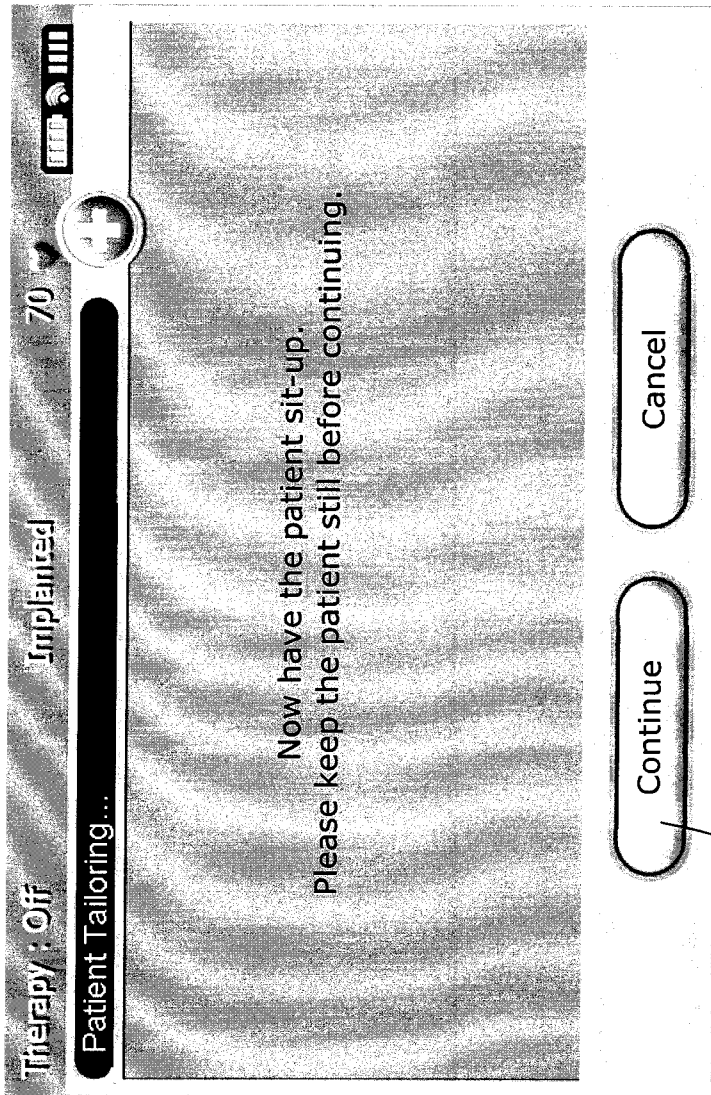

*Figure 8C*

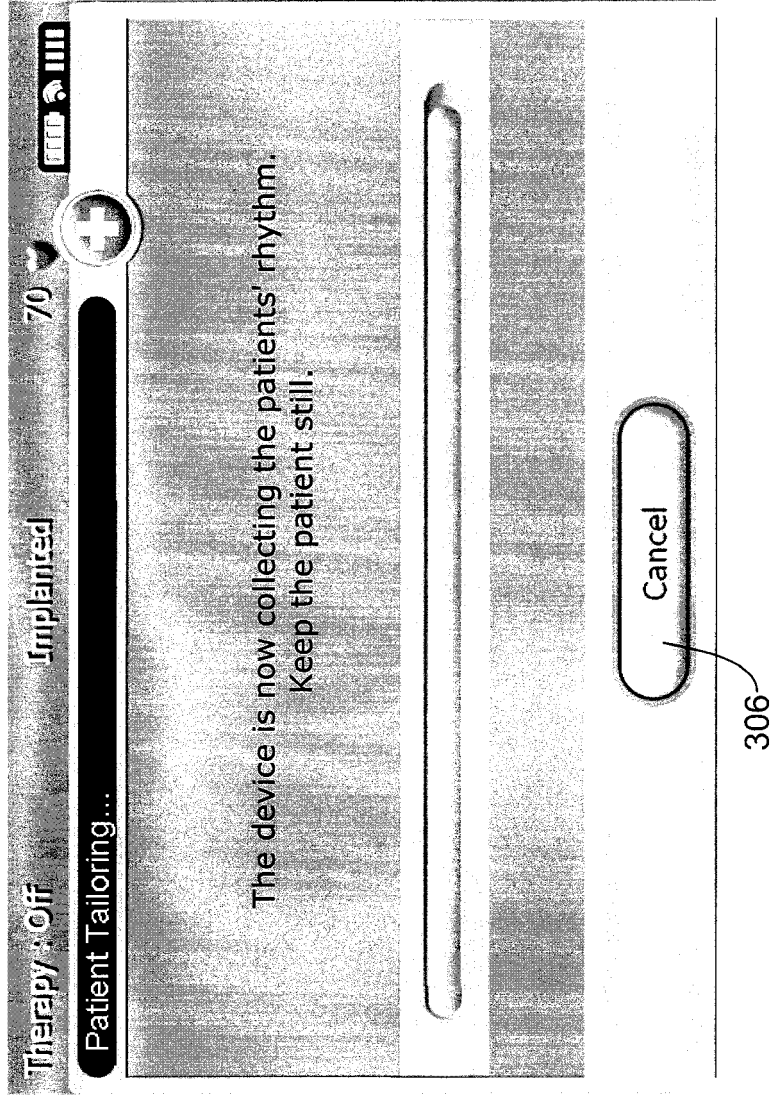

*Figure 8D*

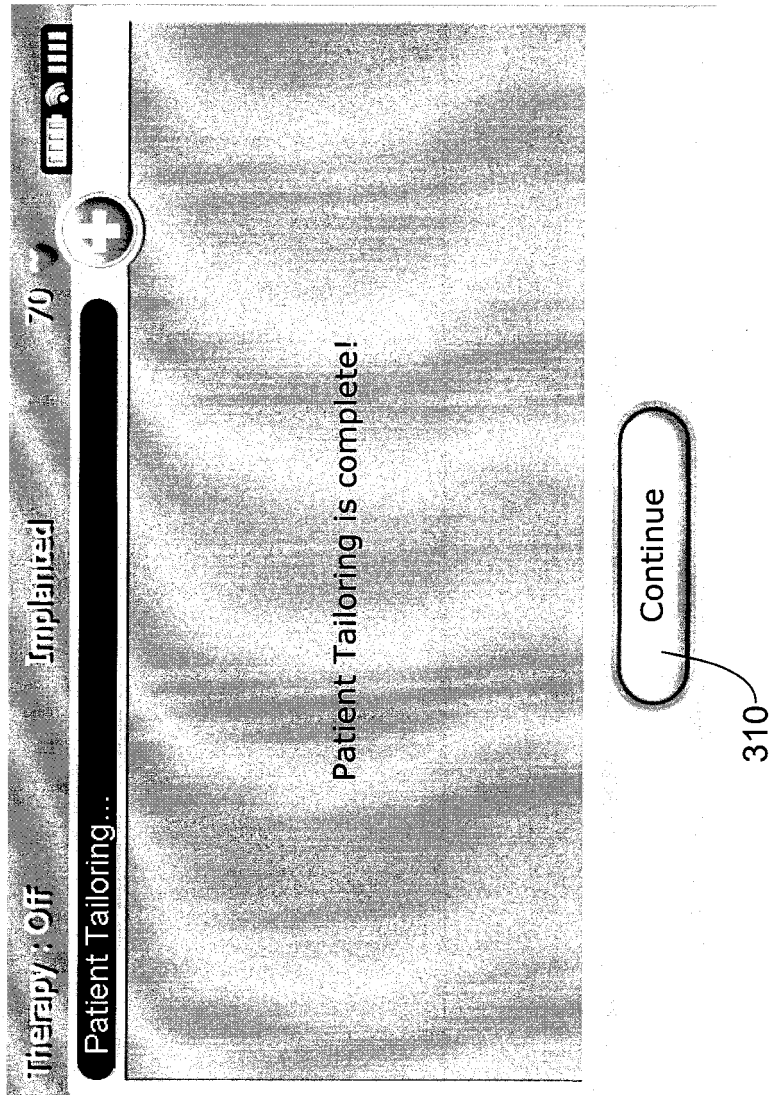

*Figure 8E*

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 44152206 A [0009] [0017] [0023] [0040] [0070]
- US 6647292 B [0010]
- US 6721597 B [0010]
- US 00629104 A [0017]
- US 20060122676 A [0017]
- US 49720306 A [0017]
- US 99985304 A [0017] [0027]
- US 20060116595 A [0017] [0027]
- US 90125804 A [0017]
- US 20050049644 A [0017]
- US 6988003 B [0017]

|                |   |         |            |
|----------------|---|---------|------------|
| 专利名称(译)        | 通过姿势评估在心脏刺激设备中感知矢量选择  |         |            |
| 公开(公告)号        | <a href="#">EP2114244B1</a>   | 公开(公告)日 | 2018-08-29 |
| 申请号            | EP2008729181  | 申请日     | 2008-02-06 |
| [标]申请(专利权)人(译) | 卡梅伦保健公司   |         |            |
| 申请(专利权)人(译)    | CAMERON HEALTH , INC.   |         |            |
| 当前申请(专利权)人(译)  | CAMERON HEALTH , INC.   |         |            |
| [标]发明人         | SANGHERA RICK<br>ALLAVATAM VENUGOPAL  |         |            |
| 发明人            | SANGHERA, RICK<br>ALLAVATAM, VENUGOPAL  |         |            |
| IPC分类号         | A61B5/0245 A61N1/362 A61N1/365 A61N1/372 A61N1/39 A61B5/00 A61B5/042 A61B5/11 A61N1/37<br>A61B5/04 A61N1/368                          |         |            |
| CPC分类号         | A61N1/37247 A61B5/04011 A61B5/042 A61B5/1116 A61B5/7221 A61N1/36535 A61N1/368 A61N1/37<br>A61N1/3702 A61N1/3704 A61N1/3925 A61N1/3956 |         |            |
| 优先权            | 11/672353 2007-02-07 US   |         |            |
| 其他公开文献         | EP2114244A1   |         |            |

摘要(译)

方法，可植入医疗设备和系统，被配置为对来自植入电极的捕获信号进行分析以识别心律失常。在说明性实施例中，分析从两个或更多个感测向量捕获的信号，其中在至少第一和第二身体位置中与患者一起捕获信号。执行分析以识别用于事件检测的主要或默认感测向量和/或模板。

*IF Analysis(A) fails*

*AND IF Analysis(B) fails*

*THEN Event indicates Malignant Rhythm*