



US 20030086043A1

(19) **United States**

(12) **Patent Application Publication**

Seo et al.

(10) **Pub. No.: US 2003/0086043 A1**

(43) **Pub. Date: May 8, 2003**

(54) **MULTI-DOMAIN LIQUID CRYSTAL DISPLAY DEVICE**

(76) Inventors: **Seong Moh Seo**, Kyungki-do (KR); **Hyun Ho Shin**, Kyungki-do (KR); **Kyeong Jin Kim**, Kyungki-do (KR); **Yun Bok Lee**, Kyungki-do (KR); **Jeom Jae Kim**, Seoul (KR)

Correspondence Address:

MCKENNA LONG & ALDRIDGE LLP
1900 K STREET, NW
WASHINGTON, DC 20006 (US)

(21) Appl. No.: **10/308,052**

(22) Filed: **Dec. 3, 2002**

Related U.S. Application Data

(63) Continuation of application No. 09/256,180, filed on Feb. 24, 1999, which is a continuation-in-part of application No. 09/250,262, filed on Feb. 16, 1999, now Pat. No. 6,335,776.

(30) **Foreign Application Priority Data**

Dec. 11, 1998 (KR) 98-54557
Feb. 19, 1999 (KR) 99-05587

Publication Classification

(51) Int. Cl.⁷ G02F 1/1337
(52) U.S. Cl. 349/129

(57) **ABSTRACT**

A multi-domain liquid crystal display device includes first and second substrates facing each other and a liquid crystal layer between the first and second substrates. A plurality of gate bus lines are arranged in a first direction on the first substrate and a plurality of data bus lines are arranged in a second direction on the first substrate to define a pixel region. A pixel electrode is electrically charged through the data bus line in the pixel region. A common-auxiliary electrode surrounds the pixel electrode on a same layer whereon the gate bus line is formed.

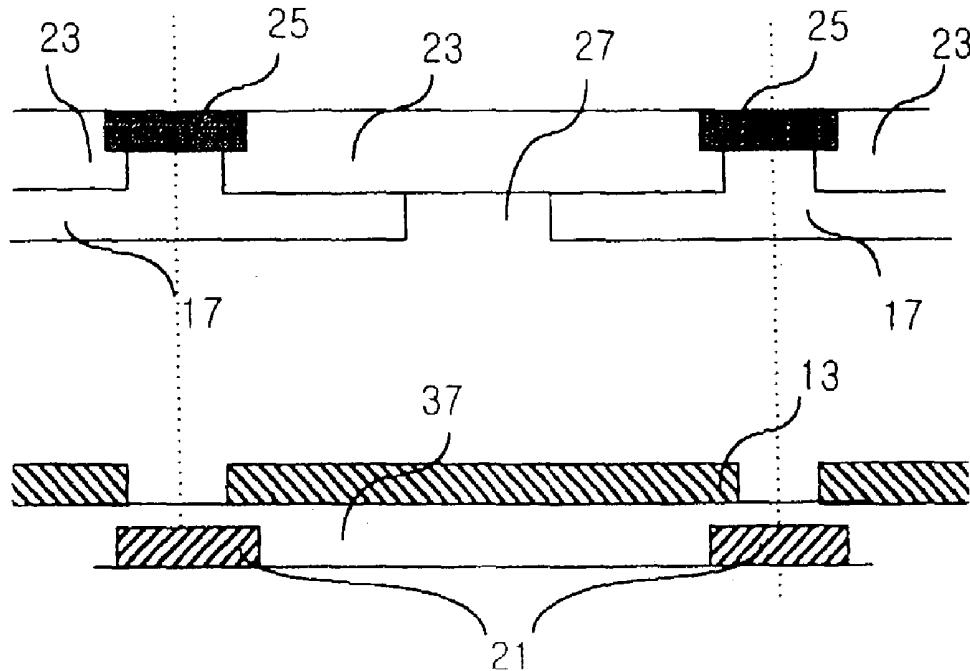


FIG. 1

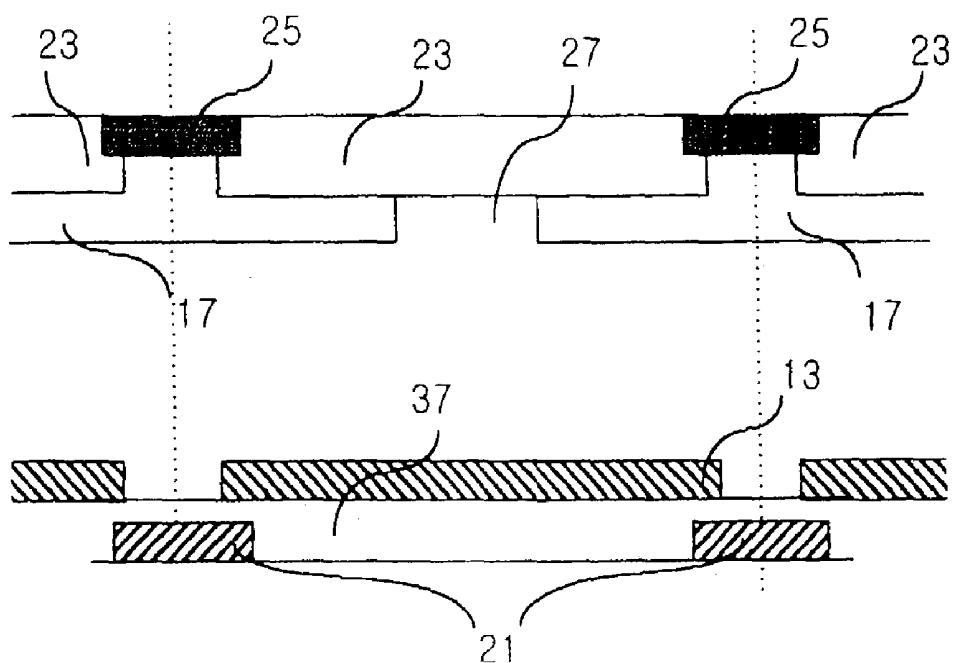


FIG. 2A

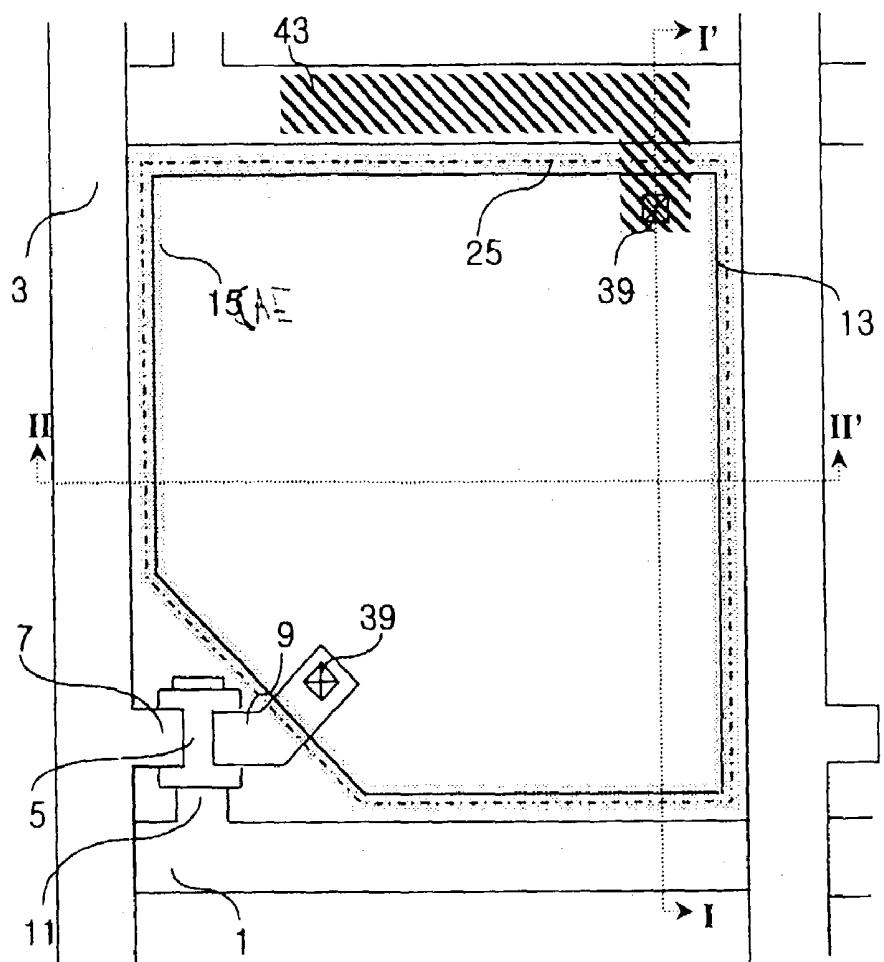


FIG. 2B

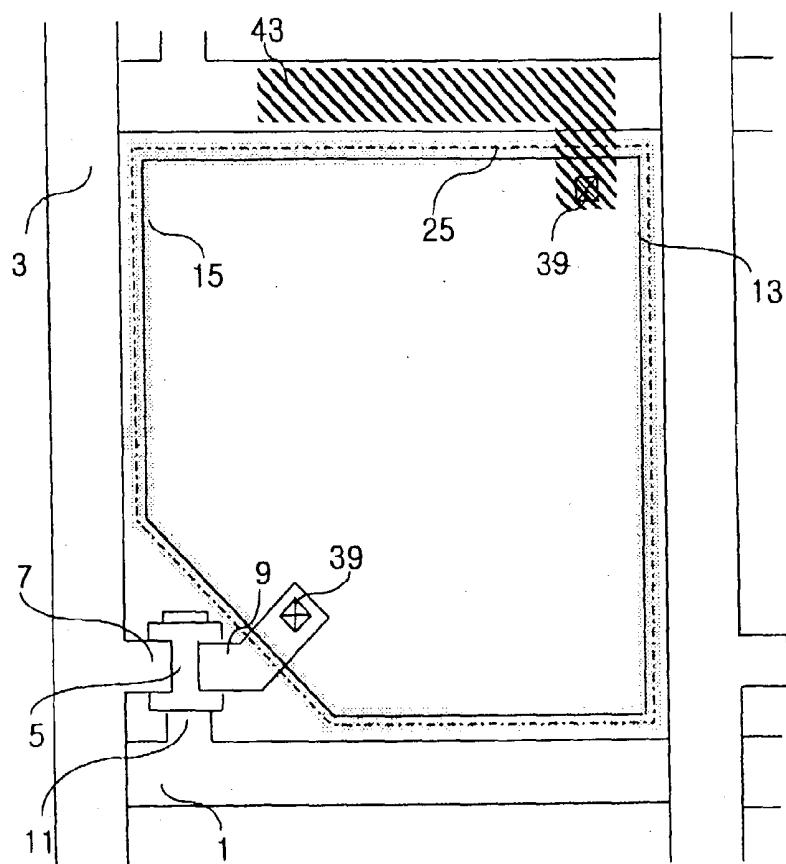


FIG. 2C

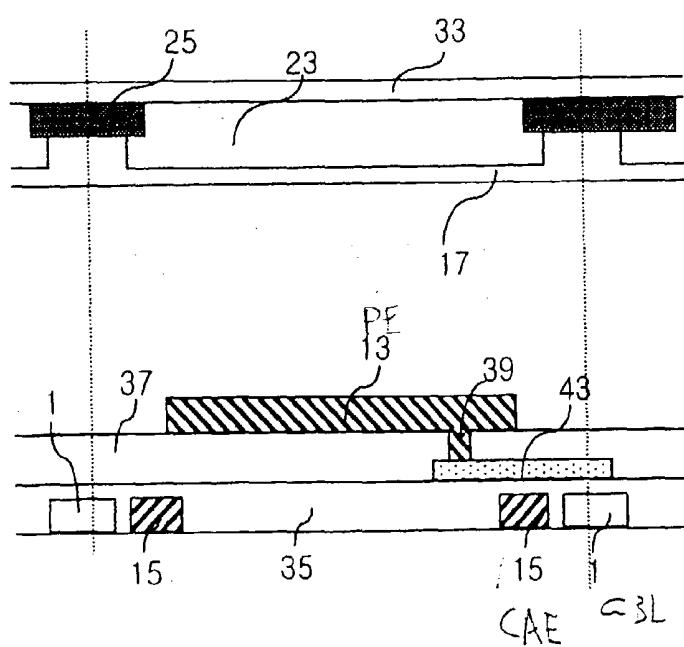


FIG. 2D

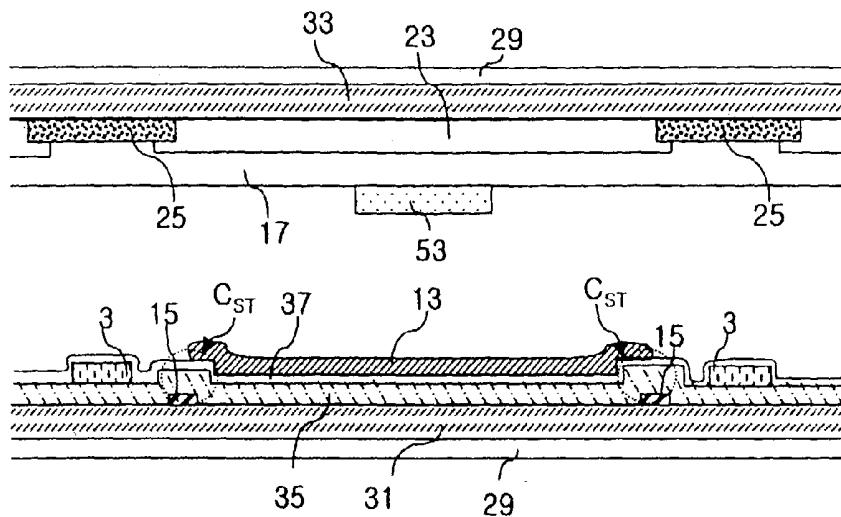


FIG. 2E

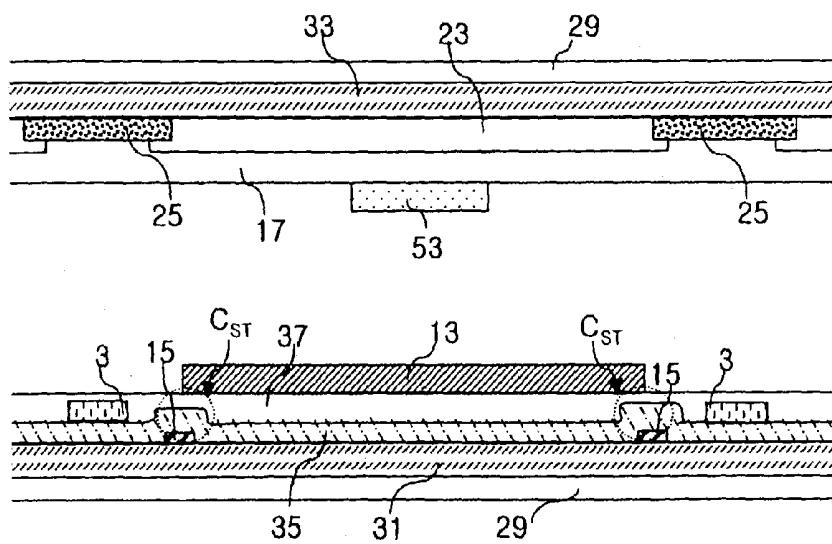


FIG. 2F

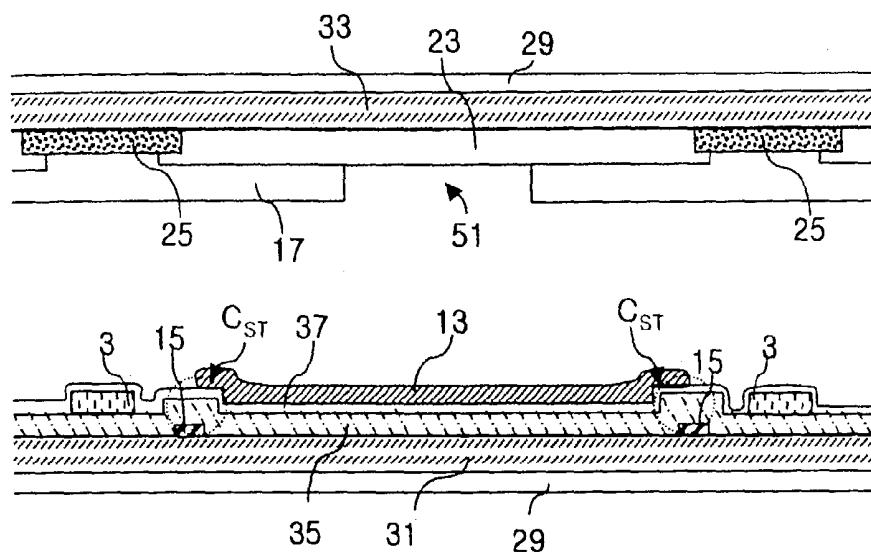


FIG. 2G

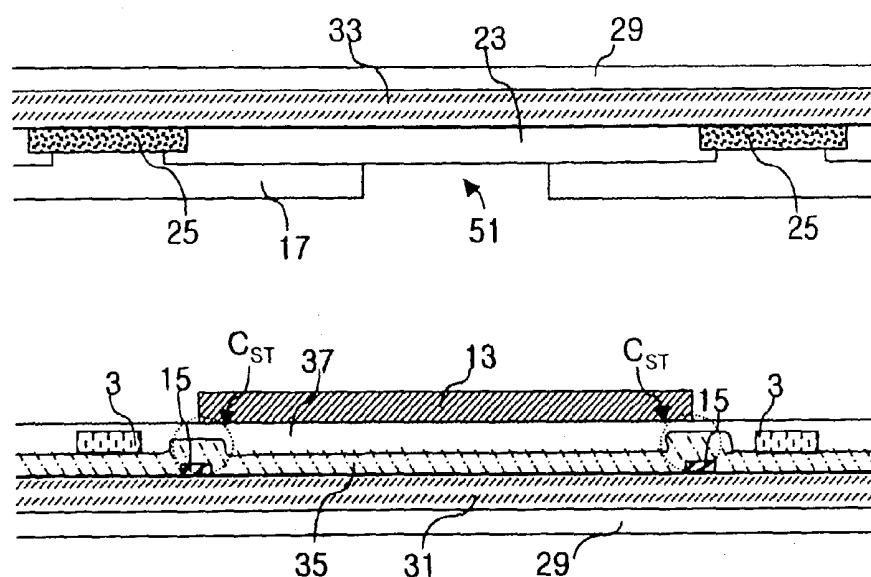


FIG. 3A

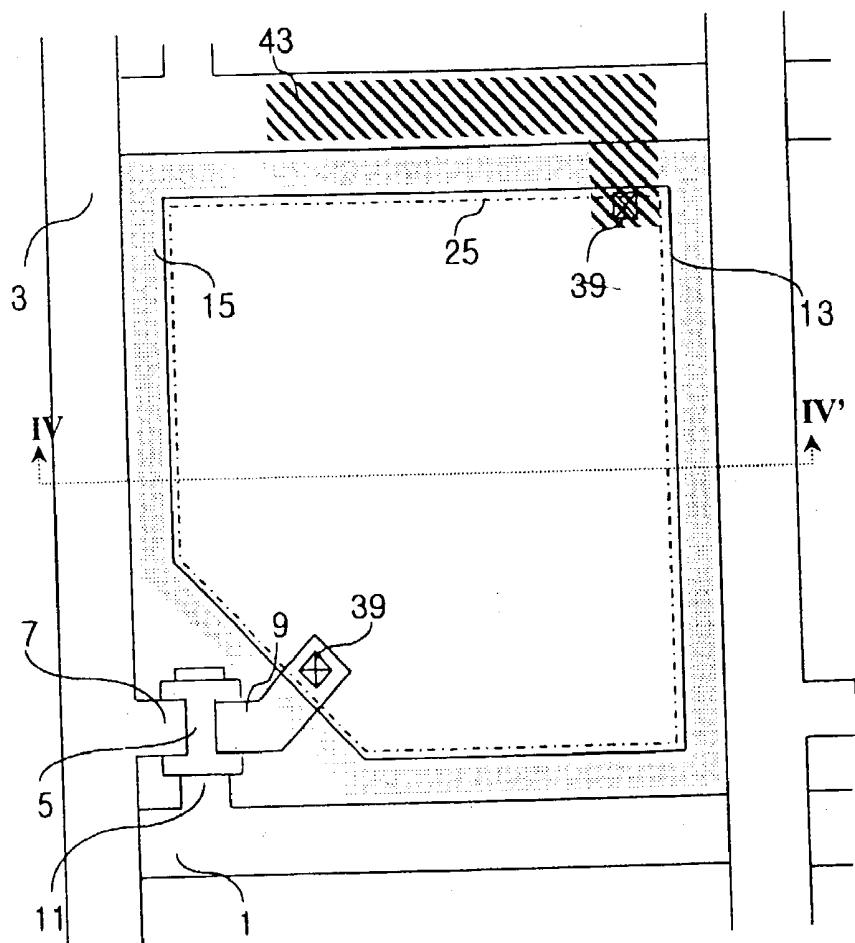


FIG. 3B

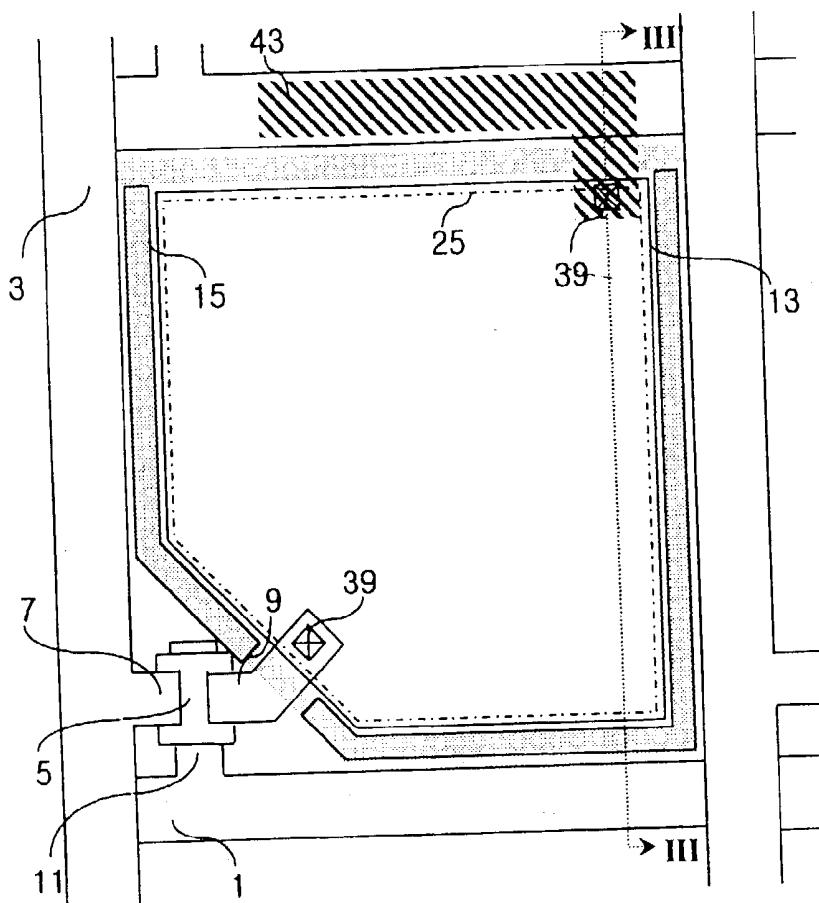


FIG. 3C

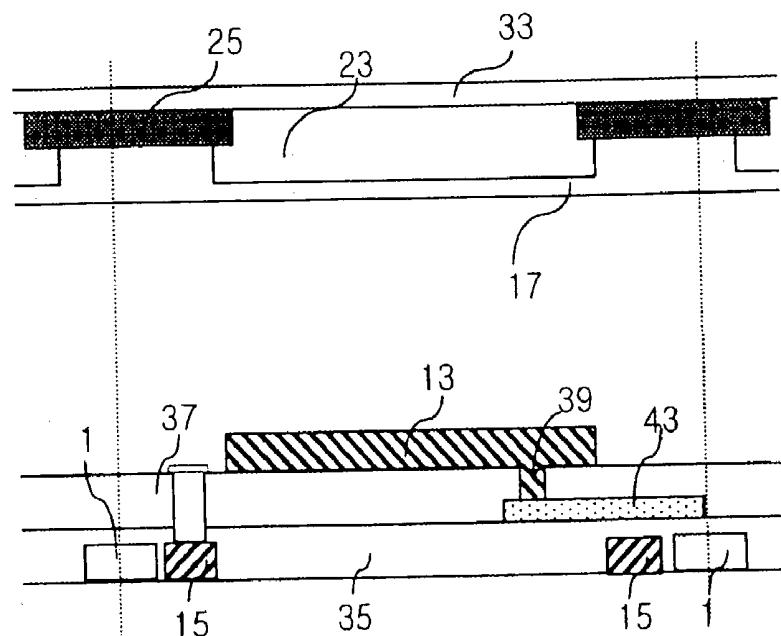


FIG. 3D

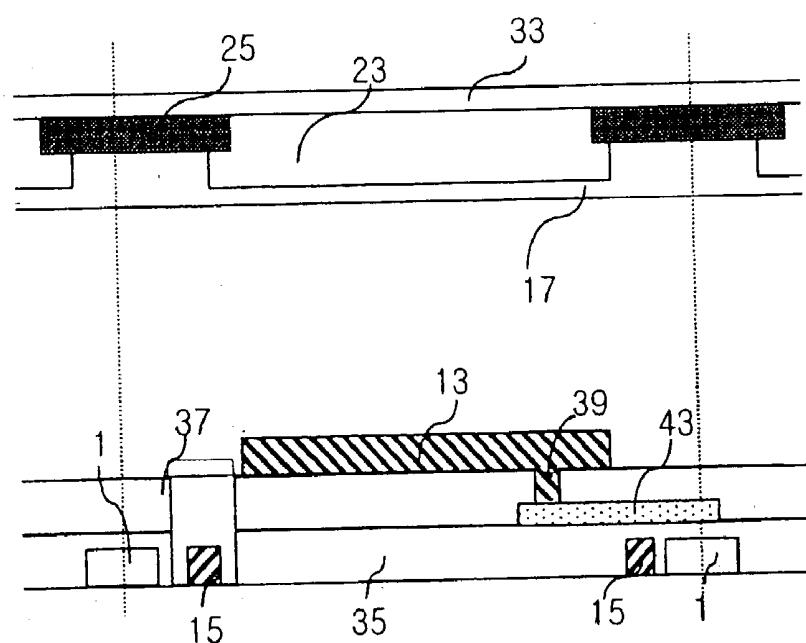


FIG. 3E

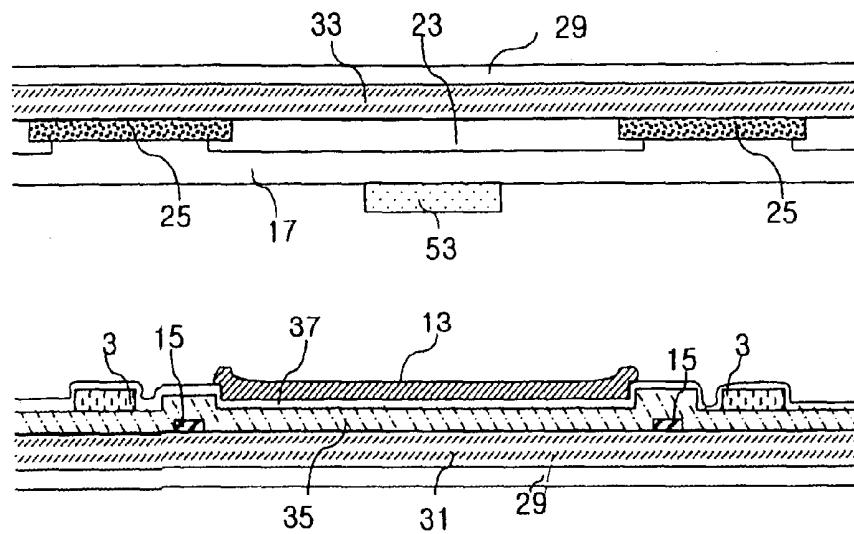


FIG. 3F

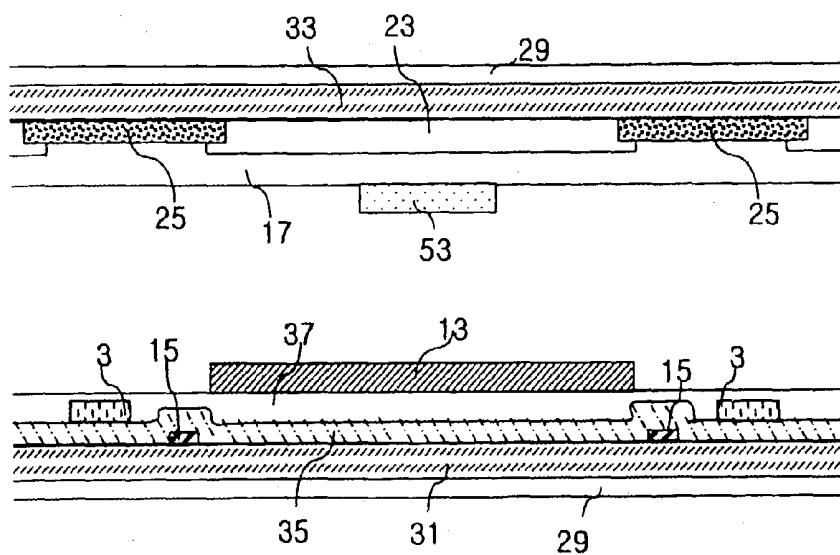


FIG. 3G

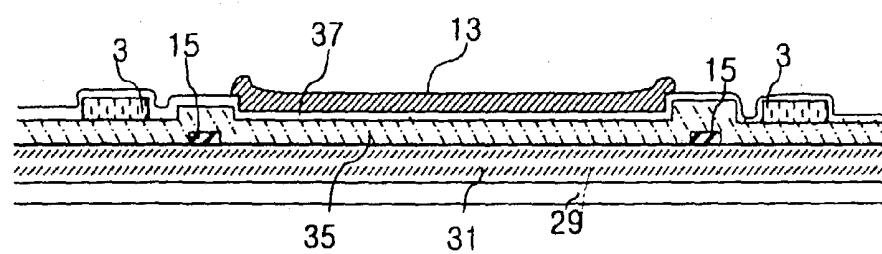
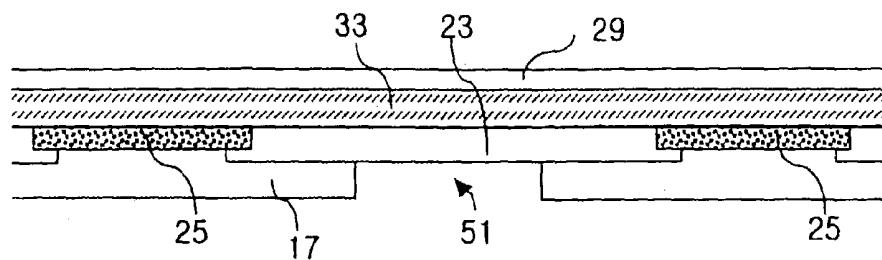


FIG. 3H

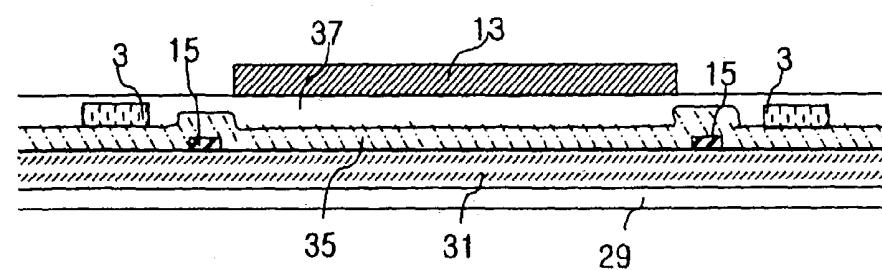
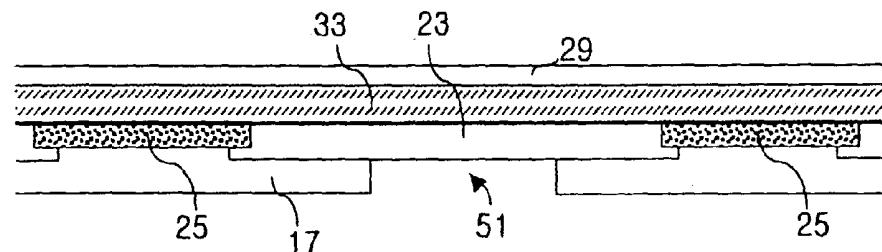


FIG. 4A

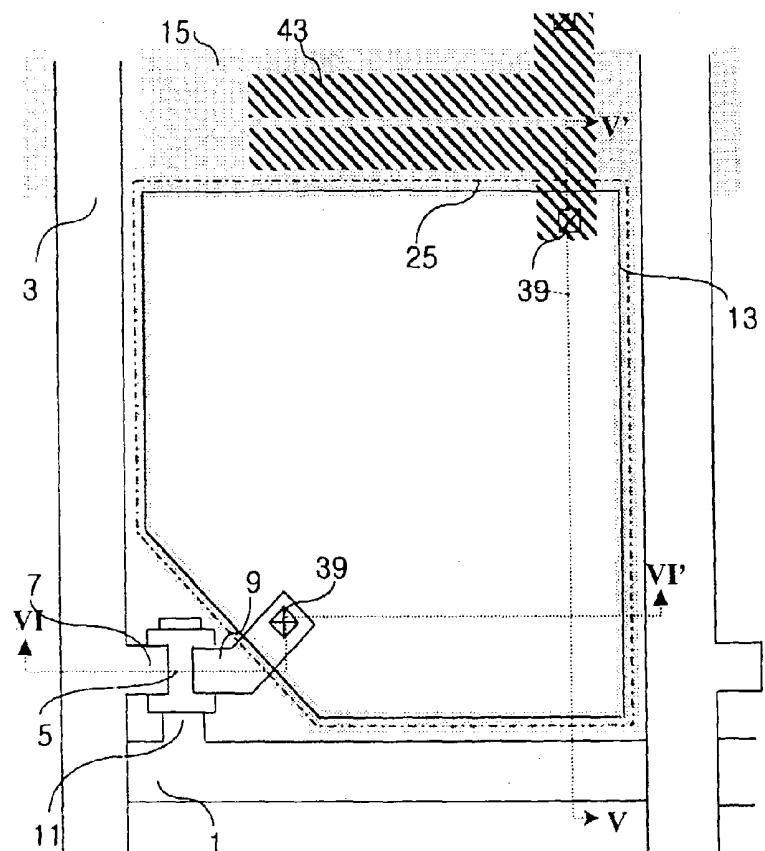


FIG. 4B

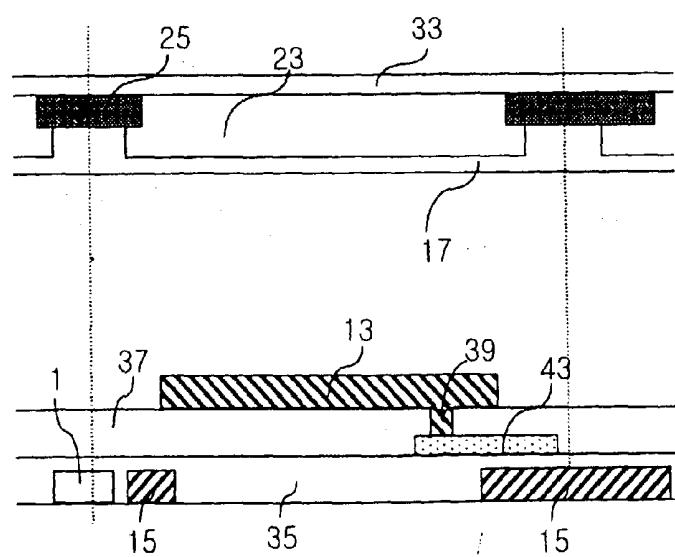


FIG. 4C

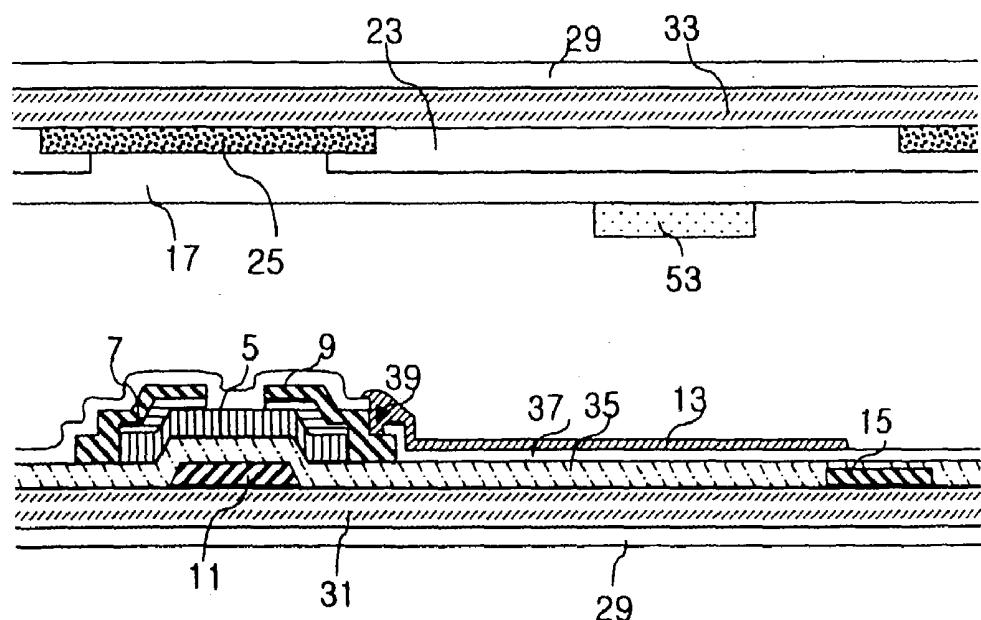


FIG. 4D

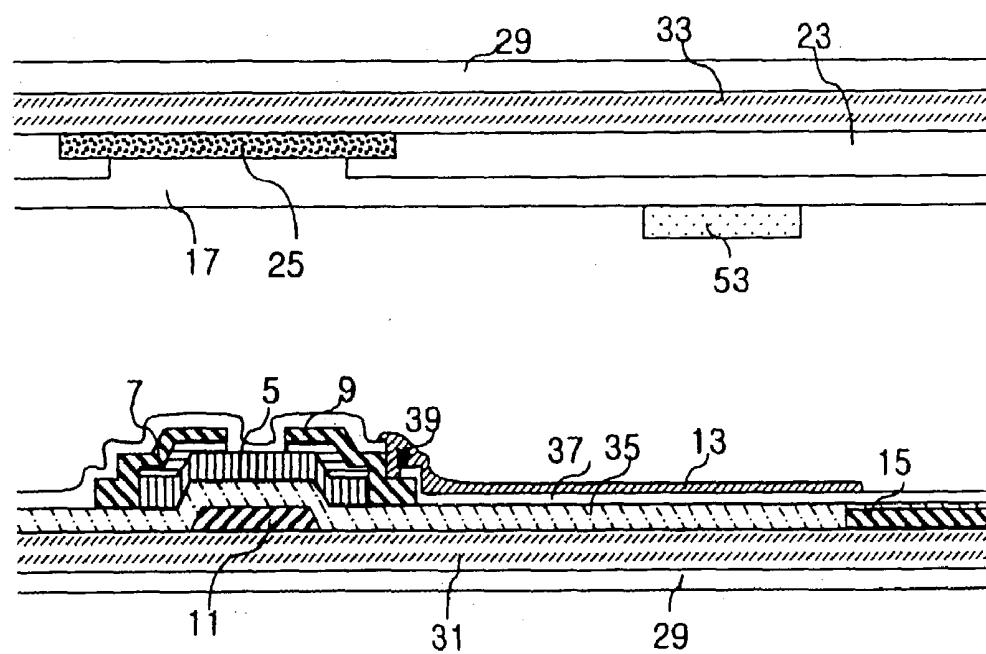


FIG. 4E

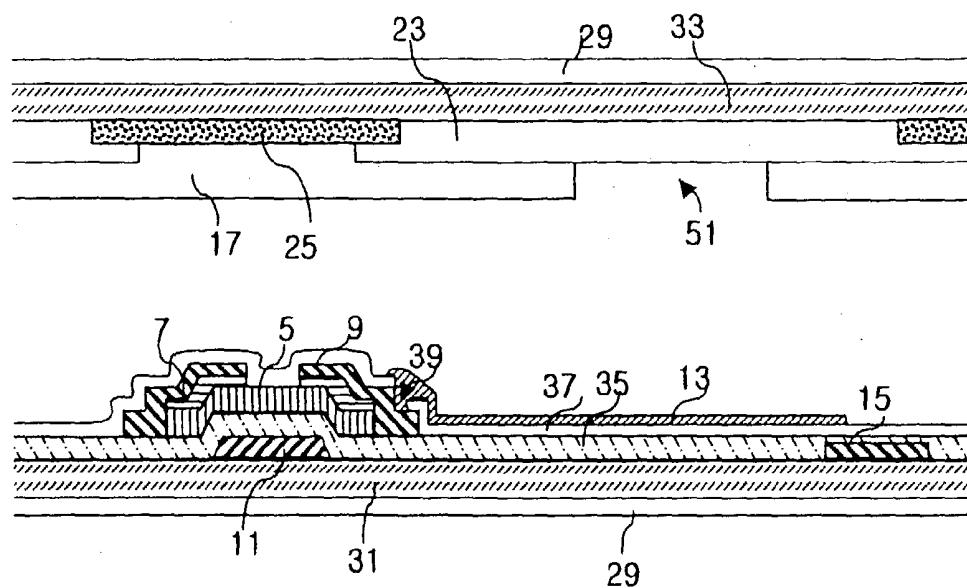


FIG. 4F

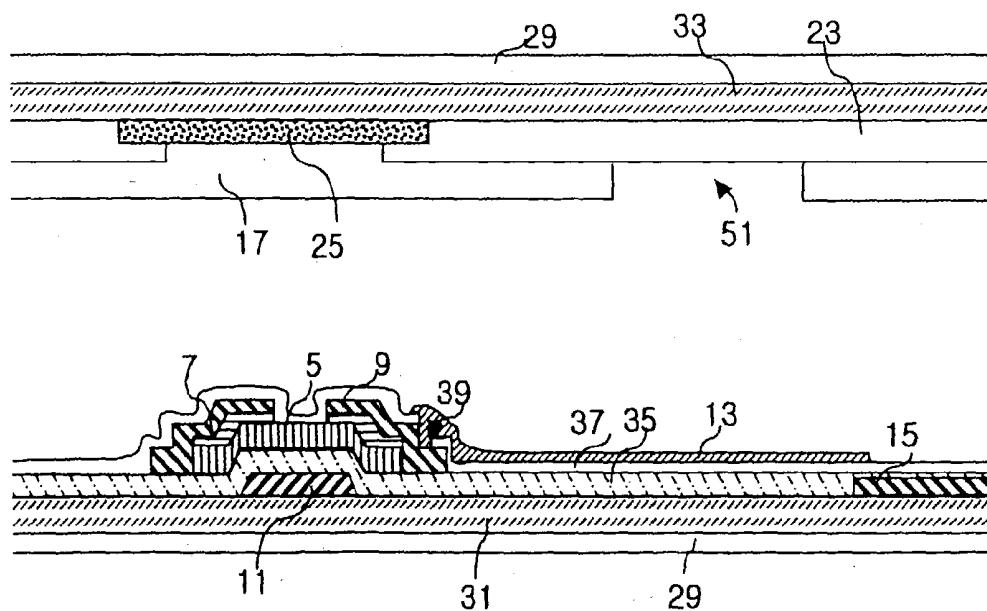


FIG. 5A

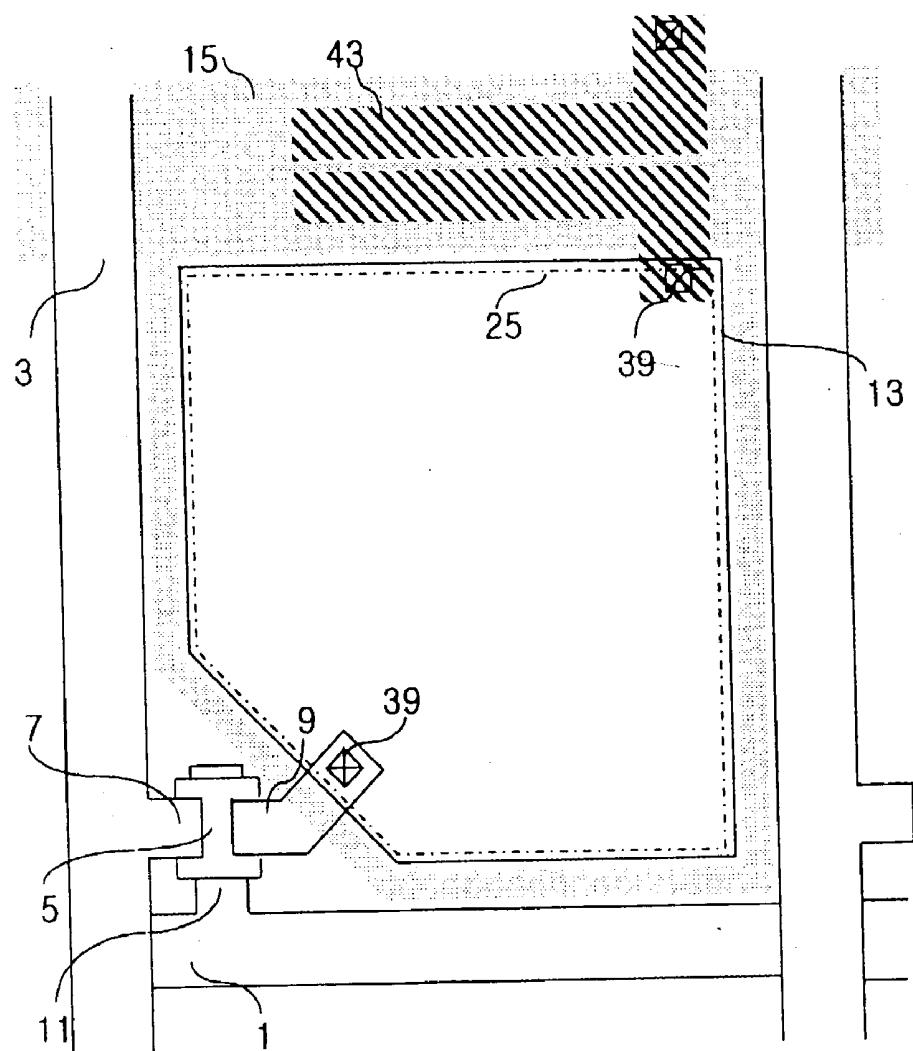


FIG. 5B

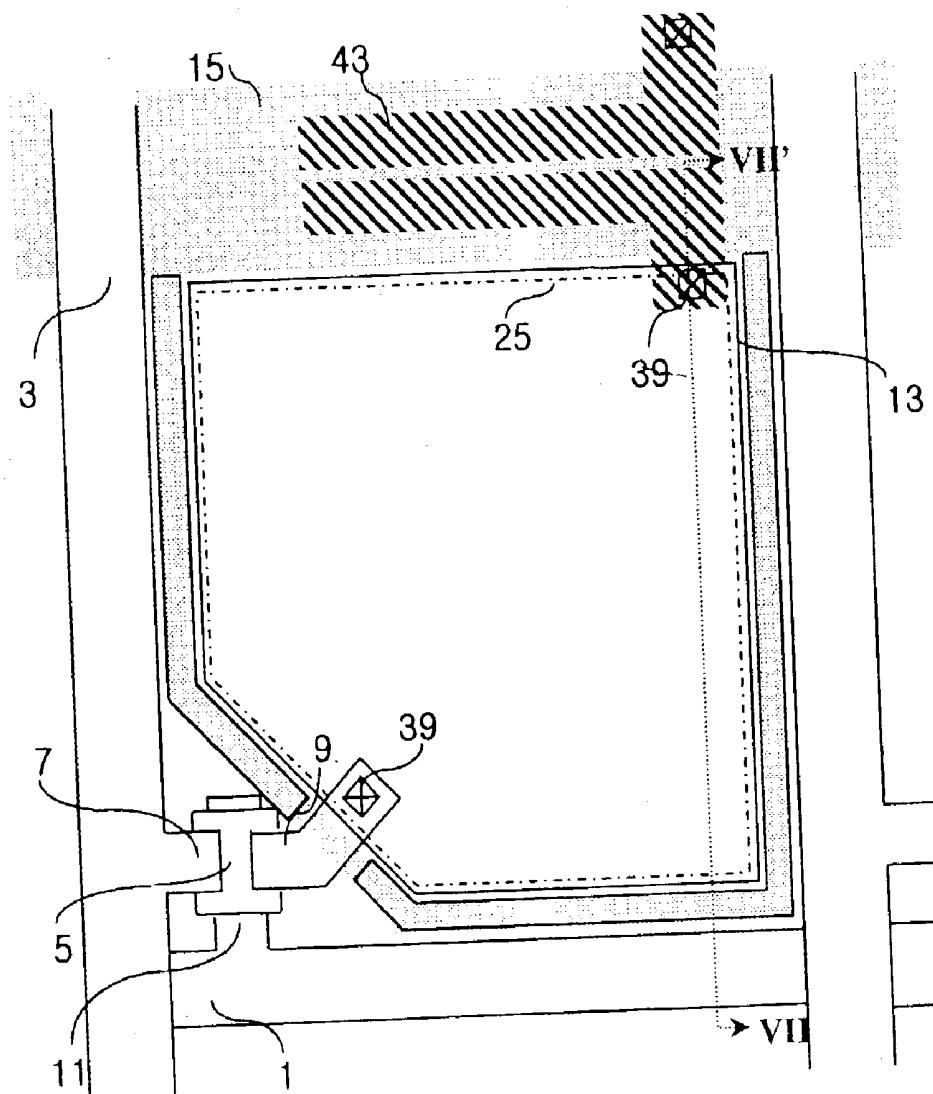


FIG. 5C

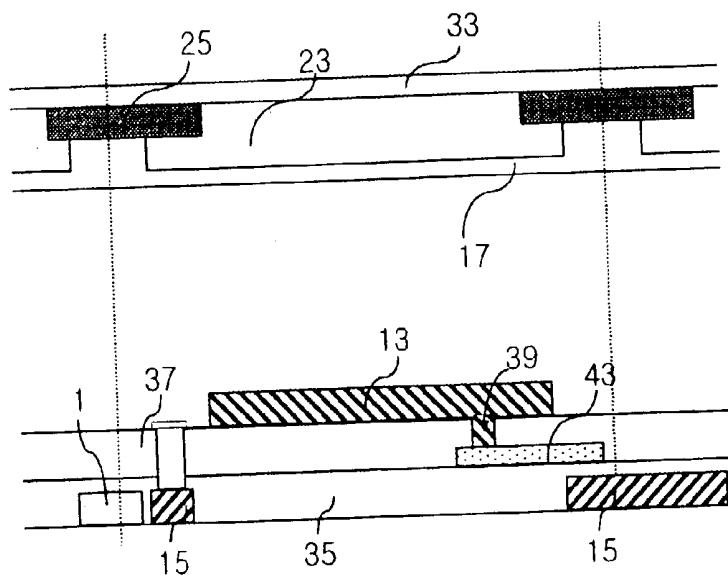


FIG. 5D

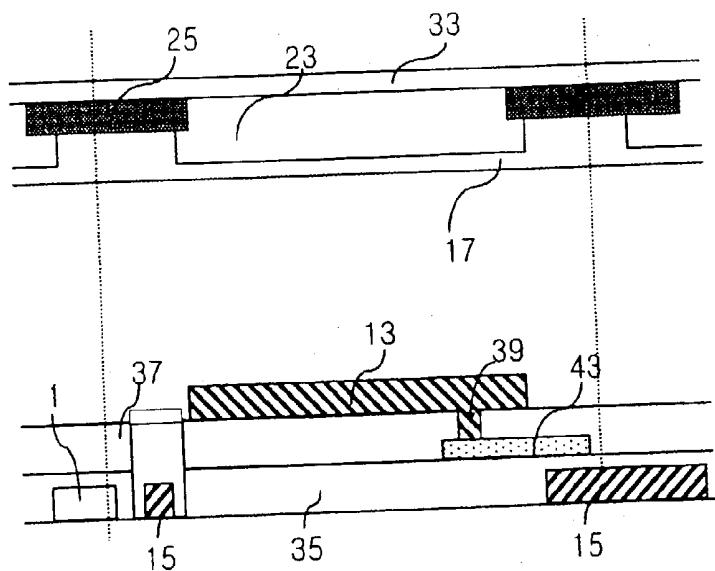


FIG. 6A

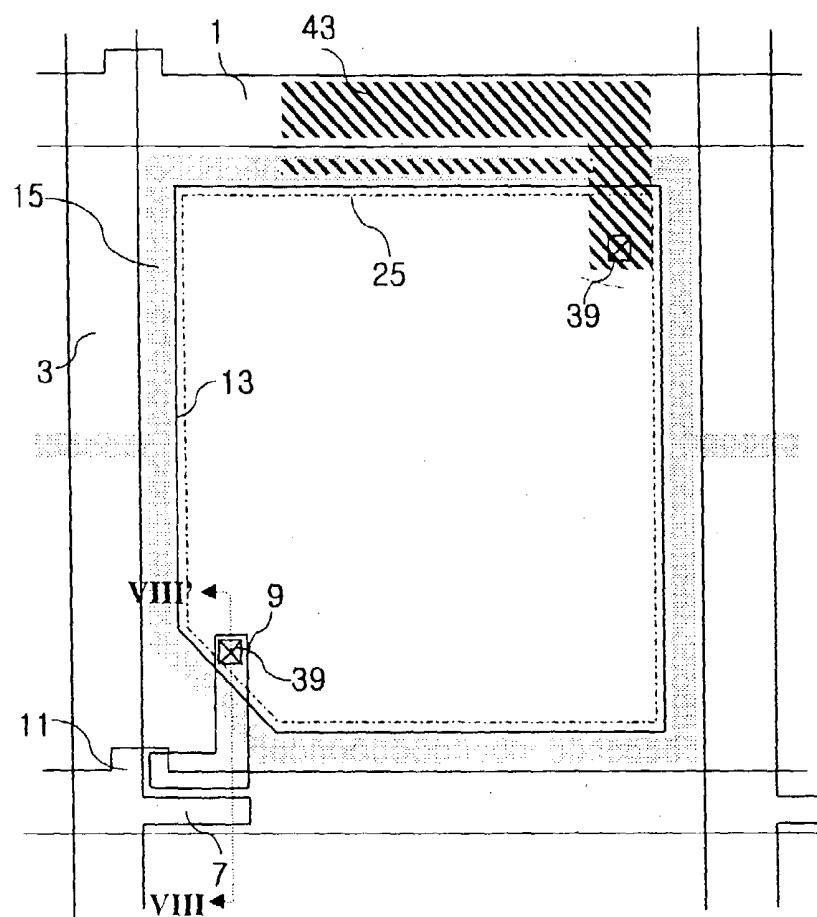


FIG. 6B

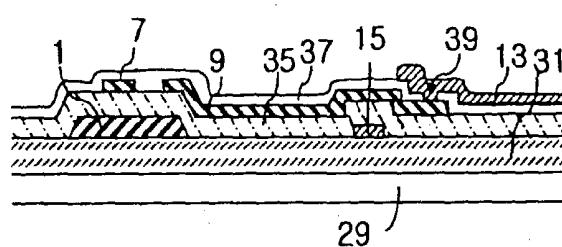


FIG. 7

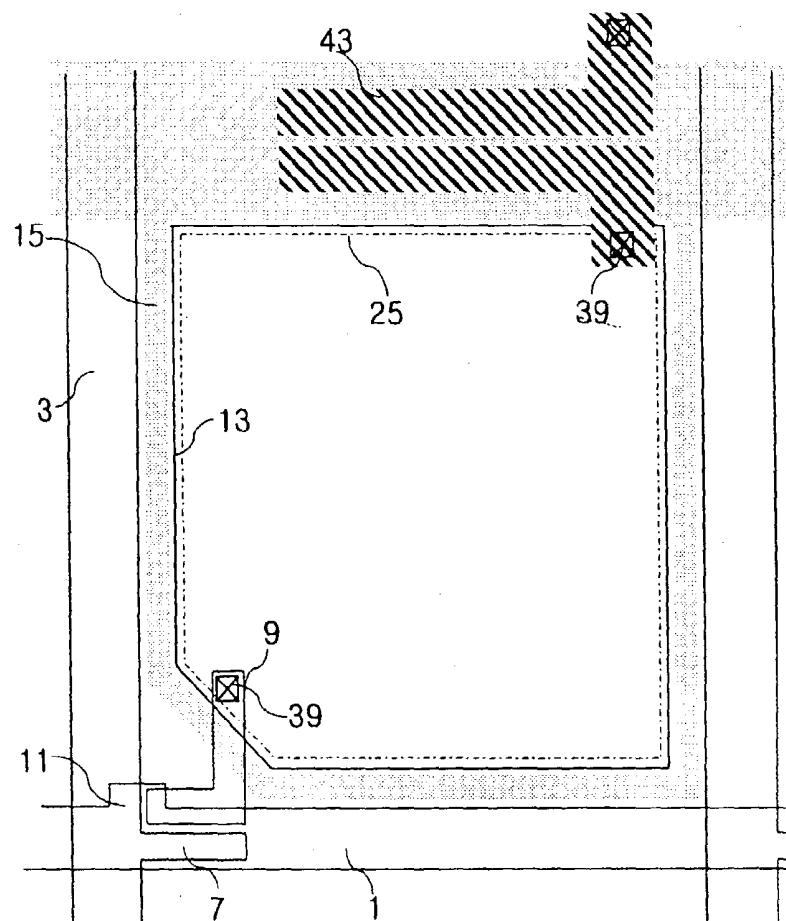


FIG. 8A

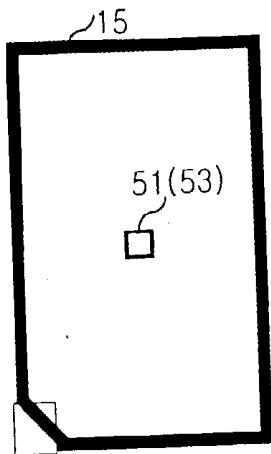


FIG. 8B

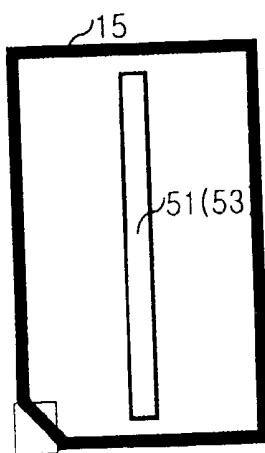


FIG. 8C

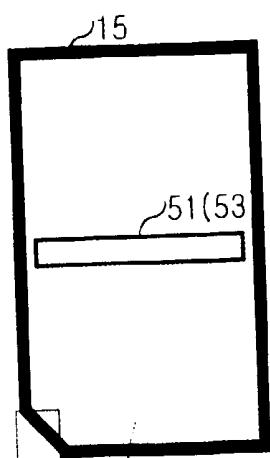


FIG. 8D

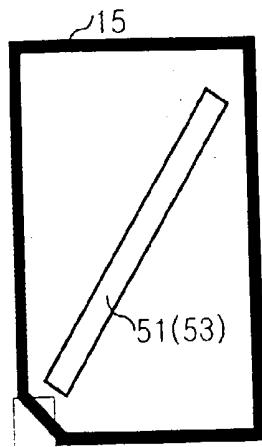


FIG. 8E

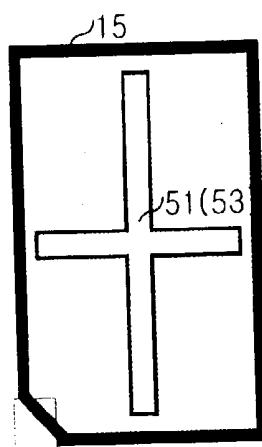


FIG. 8F


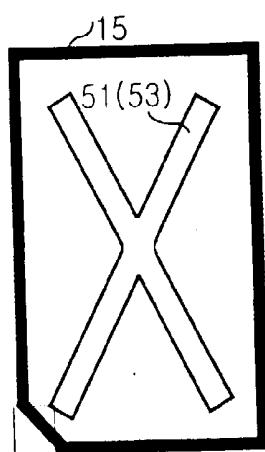


FIG. 8G

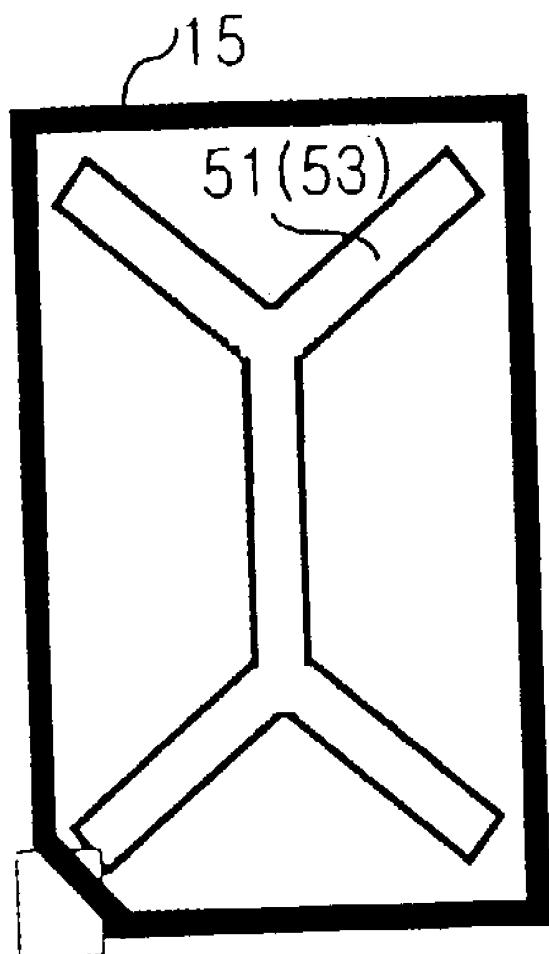

MULTI-DOMAIN LIQUID CRYSTAL DISPLAY DEVICE

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a liquid crystal display device (LCD), and more particularly, to a liquid crystal display device having a side or auxiliary electrode.

[0003] 2. Description of the Related Art

[0004] Recently, an LCD has been proposed where the liquid crystal is not aligned and the liquid crystal is driven by common-auxiliary electrodes insulated from pixel electrodes. **FIG. 1** is sectional view of pixel unit of the conventional LCDs.

[0005] Regarding conventional LCDs, a plurality of gate bus lines arranged in a first direction on a first substrate and a plurality of data bus lines arranged in a second direction on the first substrate divide the first substrate into a plurality of pixel regions. A thin film transistor (TFT) applies image signal delivered from the data bus line to a pixel electrode **13** on a passivation layer **37**. The TFT is formed on each pixel region and comprises a gate electrode, a gate insulator, a semiconductor layer, a source electrode, and a drain electrode, etc. Side electrode **15** is formed surrounding the pixel electrode **13** on the gate insulator, thereon passivation layer **37** is formed over the whole first substrate, and a part of pixel electrode **13** overlaps side electrode **15**.

[0006] Alternatively, pixel electrode **33** is formed on the gate insulator, and passivation layer **37** is formed over the whole first substrate.

[0007] On second substrate, a common electrode **17** is formed and together with pixel electrode **13** applies electric field to a liquid crystal layer. Side electrode **21** and open area (slit) **27** distort the electric field applied to the liquid crystal layer. Then in a unit pixel liquid crystal molecules are driven variously. This means that when voltage is applied to the LCD, dielectric energy due to the distorted electric field arranges the liquid crystal directors in needed or desired positions.

[0008] In the LCDs, however, open area **27** in common electrode **17** or pixel electrode **13** is necessary, and the liquid crystal molecules could be driven stably when the open area is wider. If the electrodes do not have an open area or the width of the open area is narrow, the electric field distortion needed to divide the pixel region becomes weak. Then, when voltage over a threshold voltage, V_{th} , is applied, the time needed to stabilize the liquid crystal directors increases. In particular, the response time can be over 100 msec. At this time, disclination occurs from the area where the liquid crystal directors are parallel with a transmittance axis of the polarizer, which results in a decrease in brightness. Further, according to the surface state of LCDs, the liquid crystal texture has an irregular structure.

SUMMARY OF THE INVENTION

[0009] Accordingly, the present invention is directed to an LCD that substantially obviates one or more problems due to limitations and disadvantages of the related art.

[0010] An object of the present invention is to provide a multi-domain LCD having high response time characteristics and high brightness by stable arrangement of liquid crystal molecules.

[0011] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0012] To achieve the objects and in accordance with the purpose of the invention, as embodied and broadly described herein, a multi-domain liquid crystal display device comprises first and second substrates facing each other; a liquid crystal layer between said first and second substrates; a plurality of gate bus lines arranged in a first direction on said first substrate and a plurality of data bus lines arranged in a second direction on said first substrate to define a pixel region; a pixel electrode electrically charged through said data bus line in said pixel region; a common-auxiliary electrode surrounding said pixel electrode on a same layer whereon said gate bus line is formed; a gate insulator over said whole first substrate; a passivation layer on said gate insulator over said whole first substrate; a light shielding layer on said second substrate; a color filter layer on said light shielding layer; a common electrode on said color filter layer; and an alignment layer on at least one substrate between said first and second substrates.

[0013] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of the specification, illustrates embodiments of the invention and together with description serve to explain the principles of the invention.

[0015] In the drawings:

[0016] **FIG. 1** is a sectional view of the liquid crystal display device in the related art;

[0017] **FIGS. 2A, 2B, and 2C, 2D, 2E, 2F, 2G** are plan and sectional views of the multi-domain liquid crystal display devices according to the first embodiment of the present invention;

[0018] **FIGS. 3A, 3B, and 3C, 3D, 3E, 3F, 3G, 3H** are plan and sectional views of the multi-domain liquid crystal display devices according to the second embodiment of the present invention;

[0019] **FIGS. 4A and 4B, 4C, 4D, 4E, 4F** are plan and sectional views of the multi-domain liquid crystal display devices according to the third embodiment of the present invention;

[0020] **FIGS. 5A, 5B and 5C, 5D** are plan and sectional views of the multi-domain liquid crystal display devices according to the fourth embodiment of the present invention;

[0021] **FIGS. 6A and 6B** are plan and sectional views of the multi-domain liquid crystal display devices according to the fifth embodiment of the present invention;

[0022] **FIG. 7** is a plan view of the multi-domain liquid crystal display device according to the sixth embodiment of the present invention;

[0023] FIGS. 8A to 8G are plan views showing the various electric field inducing windows and dielectric frames according to the embodiments of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0024] Hereinafter, the multi-domain liquid crystal display device of the present invention is explained in detail by accompanying the drawings.

[0025] FIGS. 2A and 2B are plan views of the multi-domain liquid crystal display devices according to the first embodiment of the present invention, and FIGS. 2C and 2D, 2E, 2F, 2G are sectional views taken along the lines I-I' and II-II' in FIG. 2A.

[0026] As shown in the figures, the present invention comprises first and second substrates, a plurality of gate bus lines 1 arranged in a first direction on a first substrate and a plurality of data bus lines 3 arranged in a second direction on the first substrate, a common-auxiliary electrode 15, a TFT, a passivation layer 37, and a pixel electrode 13.

[0027] On a second substrate, a light shielding layer 25 is formed to shield the light leaked from gate and data bus lines 1, 3, and the TFT, a color filter layer 23 is formed on the light shielding layer, a common electrode 17 is formed on the color filter layer, and a liquid crystal layer is formed between the first and second substrates.

[0028] Data bus lines 3 and gate bus lines 1 divide the first substrate into a plurality of pixel regions. The common-auxiliary electrode distorts electric field on a same layer whereon the gate bus line is formed. The TFT is formed on each pixel region and comprises a gate electrode 11, a gate insulator 35, a semiconductor layer 5, an ohmic contact layer (not shown in the figure), and source/drain electrodes 7, 9. Passivation layer 37 is formed on the whole first substrate 31. Pixel electrode 13 is coupled to drain electrode 9.

[0029] To manufacture the multi-domain LCD of the present invention, in each pixel region on the first substrate, a TFT is formed comprising gate electrode 11, gate insulator 35, semiconductor layer 5, ohmic contact layer (not shown in the figure) and source/drain electrodes 7, 9. At this time, a plurality of gate bus lines 1 and a plurality of data bus lines 3 are formed to divide the first substrate 31 into a plurality of pixel regions.

[0030] Gate electrode 11 and gate bus line 1 are formed by sputtering and patterning a metal such as Al, Mo, Cr, Ta, Al alloy, etc. At this time, common-auxiliary electrode 15 is formed surrounding the pixel region. The gate insulator 35 is formed by depositing SiN_x or SiO_x using PECVD thereon. Semiconductor layer 5 and the ohmic contact layer are formed by depositing with PECVD (Plasma Enhanced Chemical Vapor Deposition) and patterning amorphous silicon (a-Si) and doped amorphous silicon (n^+ a-Si), respectively. Also, gate insulator 35, amorphous silicon (a-Si), and doped amorphous silicon (n^+ a-Si) are formed by PECVD and patterned. Data bus line 3 and source/drain electrodes 7, 9 are formed by sputtering and patterning a metal such as Al, Mo, Cr, Ta, Al alloy, etc.

[0031] A storage electrode 43 is formed to overlap gate bus line 1 and/or common-auxiliary electrode 15 at the same

time, the storage electrode 43 makes a storage capacitor with gate bus line 1 and/or common-auxiliary electrode 15.

[0032] Subsequently, passivation layer 37 is formed with BCB (BenzoCycloButene), acrylic resin, polyimide based material, SiN_x or SiO_x on the whole first substrate. Pixel electrode 13 is formed by sputtering and patterning a metal such as ITO (indium tin oxide). A contact hole 39 is formed to connect the pixel electrode to the drain and storage electrodes by opening and patterning a part of the passivation layer on drain electrode 9.

[0033] When common-auxiliary electrode 15 and gate bus line 1 are formed with the same material, the common-auxiliary and gate electrodes are simultaneously formed with one mask and connected electrically to common electrode 17, or it is possible to form them with different materials or double layer with additional masks.

[0034] On the second substrate 33, a light shielding layer 25 is formed to shield any light leakage from gate and data bus lines 1, 3, the TFT, and common-auxiliary electrode 15. A color filter layer 23 is formed R, G, B (red, green, blue) elements to alternate on the light shielding layer. A common electrode 17 is formed with ITO on the color filter layer, and a liquid crystal layer is formed by injecting liquid crystal between the first and second substrates.

[0035] To apply voltage (V_{com}) to common-auxiliary electrode 15, Ag-dotting part is formed in each corner of driving area on first substrate 31, electric field is applied with second substrate 33, and the liquid crystal molecules are driven by the potential different. A voltage (V_{com}) is applied to common-auxiliary electrode 15 by connecting the Ag-dotting part to the common-auxiliary electrode, which is accomplished simultaneously by forming the common-auxiliary electrode.

[0036] On at least one substrate, a compensation film 29 is formed with polymer. The compensation film is a negative uniaxial film, which has one optical axis, and compensates the phase difference of the direction according to viewing-angle. Hence, it is possible to compensate effectively the right-left viewing-angle by widening the area without gray inversion, increasing contrast ratio in an inclined direction, and forming one pixel to multi-domain.

[0037] In the present multi-domain liquid crystal display device, it is possible to form a negative biaxial film as the compensation film, which has two optical axes and wider viewing-angle characteristics as compared with the negative uniaxial film. The compensation film could be formed on both substrates or on one of them.

[0038] After forming the compensation film, polarizer is formed on at least one substrate. At this time, the compensation film and polarizer are preferably composed as one.

[0039] In the multi-domain liquid crystal display device in the FIG. 2, pixel electrode 13 overlaps common-auxiliary electrode 15, light shielding layer 25 overlaps the common-auxiliary electrode, and then the aperture ratio is improved. Storage electrode 43 forms a storage capacitor C_{ST} by overlapping gate bus line 1. Although not shown in the figures, the storage electrode 43 may overlap the common-auxiliary electrode 15.

[0040] Moreover, the LCD in FIG. 2B has lower short generation in the common-auxiliary electrode and gate bus

line than that of **FIG. 2A**. **FIGS. 2D, 2F** show that passivation layer **37** includes SiN_x or SiO_x and **FIGS. 2E, 2G** show that passivation layer **37** includes BCB or acrylic resin in the LCD. Also, **FIGS. 2D, 2E** show that dielectric frame **53** is formed on the common electrode **17**, and **FIGS. 2F, 2G** show that electric field inducing window **51** is formed in the common electrode **17**.

[0041] **FIGS. 3A and 3B** are plan views of the multi-domain liquid crystal display devices according to the second embodiment of the present invention, and **FIGS. 3C and 3D** are sectional views taken along the lines III-III' in **FIG. 3B**, **FIGS. 3E, 3F, 3G, 3H** are sectional views taken along the lines IV-IV' in **FIG. 3A**.

[0042] Pixel electrode **13** does not overlap common-auxiliary electrode **15**, and the light shielding layer **25** overlaps the pixel electrode **13**. At this time, the gate insulator **35** and the passivation layer **37** on the common-auxiliary electrode **15** are removed, which intensifies the electric field of common-auxiliary electrode **15** that is applied to the pixel electrode **13** (refer to **FIG. 3B**).

[0043] The **FIG. 3C** shows a portion of the gate insulator **35** and passivation layer **37** that are removed to expose a part of the common-auxiliary electrode **15**, and the **FIG. 3D** shows that three sides of the common-auxiliary electrode **15** are exposed.

[0044] Storage electrode **43** forms storage capacitor by overlapping gate bus line **1**. Although not shown in the figures, the storage electrode **43** may overlap the common-auxiliary electrode **15**.

[0045] **FIGS. 3E, 3G** show that passivation layer **37** includes SiN_x or SiO_x and **FIGS. 3F, 3H** show that passivation layer **37** includes BCB or acrylic resin in the LCD. Also, **FIGS. 3E, 3F** show that dielectric frame **53** is formed on the common electrode **17**, and **FIGS. 3G, 3H** show that electric field inducing window **51** is formed in the common electrode **17**.

[0046] **FIG. 4A** is a plan view of the multi-domain liquid crystal display device according to the third embodiment of the present invention, and **FIGS. 4B and 4C, 4D, 4E, 4F** are sectional views taken along the lines V-V' and VI-VI' in **FIG. 4A**.

[0047] In the multi-domain LCD of the present invention, a part of upper-down pixels is formed on common-auxiliary electrode **15** that include a storage electrode **43**. The aperture ratio is largely improved as compared to the LCD in **FIG. 2**.

[0048] Moreover, the pixel electrode **13** overlaps common-auxiliary electrode **15**, the light shielding layer **25** overlaps the common-auxiliary electrode **15**, and the storage electrode **43** forms a storage capacitor with common-auxiliary electrode **15**. **FIGS. 4C, 4D** show that dielectric frame **53** is formed on the common electrode **17**, and **FIGS. 4E, 4F** show that electric field inducing window **51** is formed in the common electrode **17**. Also, **FIGS. 4D, 4F** show that the light shield layer **25** is formed only on the thin film transistor.

[0049] **FIGS. 5A and 5B** are plan views of the multi-domain liquid crystal display devices according to the fourth embodiment of the present invention, and **FIGS. 5C and 5D** are sectional views taken along the line VII-VII' in **FIG. 5B**.

[0050] The multi-domain LCD has the same structure as in the third embodiment of the present invention except as follows.

[0051] Pixel electrode **13** does not overlap common-auxiliary electrode **15**, and the light shielding layer **25** overlaps the pixel electrode **13**. At this time, a portion of the gate insulator **35** and passivation layer **37** on the common-auxiliary electrode **15** are removed, which intensifies the electric field of common-auxiliary electrode **15** that is applied to the pixel electrode **13** (refer to **FIG. 5B**).

[0052] **FIG. 5C** shows a portion of the gate insulator **35** and passivation layer **37** that are removed to expose a part of the common-auxiliary electrode **15**, and the **FIG. 5D** shows that three sides of the common-auxiliary electrode **15** are exposed.

[0053] **FIG. 6A** is a plan view of the multi-domain liquid crystal display device according to the fifth embodiment of the present invention, and **FIG. 6B** is a sectional view taken along the line VIII-VIII' in **FIG. 6A**.

[0054] **FIG. 7** is a plan view of the multi-domain liquid crystal display device according to the sixth embodiment of the present invention.

[0055] In the multi-domain LCD of the present invention, a part of upper-down pixels is formed on common-auxiliary electrode **15** that include a common storage electrode **43**. The aperture ratio is largely improved as compared to the LCD in **FIG. 6**.

[0056] In the multi-domain LCD of the present invention, the aperture ratio is enhanced by an optimum structure design of a "n-line" thin film transistor (U.S. Pat. No. 5,694,185) so as to reduce power consumption, increase luminance, and lower reflection, thus improving contrast ratio. Aperture ratio is increased by forming the TFT above the gate line and providing a "n-line" TFT. The parasitic capacitor, occurring between the gate bus line and the drain electrode, can be reduced when a TFT having the same channel length as the symmetrical TFT structure is manufactured due to effect of channel length extension.

[0057] **FIGS. 8A to 8G** are plan views showing the various electric field inducing windows **51** and dielectric frames **53** according to the embodiments of the present invention.

[0058] The multi-domain LCD of the present invention has a dielectric frame **53** on the pixel electrode and/or common electrode, or an electric field inducing window **51** like a hole or slit in the pixel electrode, passivation layer, gate insulator, color filter layer, and/or common electrode by patterning, thereby electric field distortion effect and multi-domain are obtained.

[0059] That is, from forming electric field inducing window **51** or dielectric frame **53**, the multi-domain is obtained by dividing each pixel into four domains such as in a "+", "x", or "double Y" shape, or dividing each pixel horizontally, vertically, and/or diagonally, and differently alignment-treating or forming alignment directions on each domain and on each substrate.

[0060] Furthermore, in multi-domain LCD of the present invention, an alignment layer (not shown in the figure) is formed over the whole first and/or second substrates. The

alignment layer includes a material such as polyamide or polyimide based materials, PVA (polyvinylalcohol), polyamic acid or SiO_2 . When rubbing is used to determine an alignment direction, it should be possible to apply any material suitable for the rubbing treatment.

[0061] Moreover, it is possible to form the alignment layer with a photosensitive material such as PVCN (polyvinylcinnamate), PSCN (polysiloxane cinnamate), and CelCN (cellulosecinnamate) based materials. Any material suitable for the photo-aligning treatment may be used. Irradiating light once on the alignment layer determines the alignment or pretilt direction and the pretilt angle. The light used in the photo-alignment is preferably a light in a range of ultraviolet light, and any of unpolarized light, linearly polarized light, and partially polarized light can be used.

[0062] In the rubbing or photo-alignment treatment, it is possible to apply one or both of the first and second substrates, and to apply different aligning-treatment on each substrate.

[0063] From the aligning-treatment, a multi-domain LCD is formed with at least two domains, and LC molecules of the LC layer are aligned differently one another on each domain. That is, the multi-domain is obtained by dividing each pixel into four domains such as in a “+” or “x” shape, or dividing each pixel horizontally, vertically, and/or diagonally, and differently alignment-treating or forming alignment directions on each domain and on each substrate.

[0064] It is possible to have at least one domain of the divided domains unaligned. It is also possible to have all domains unaligned.

[0065] Consequently, since the multi-domain LCD of the present invention forms the pixel electrode and the common-auxiliary electrode on the same layer, a high voltage is not needed to raise the intensity of the electric field applied between the two electrodes. Also, in the case of conducting an alignment-treatment, a high response time and a stable LC structure can be obtained by a pretilt angle and an anchoring energy. Moreover, the disclination is thus removed to thereby improve the brightness.

[0066] It will be apparent to those skilled in the art that various modifications can be made in the liquid crystal display device of the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A multi-domain liquid crystal display device comprising:

first and second substrates facing each other;

a liquid crystal layer between said first and second substrates;

a plurality of gate bus lines arranged in a first direction on said first substrate and a plurality of data bus lines arranged in a second direction on said first substrate to define a pixel region;

a pixel electrode electrically charged through said data bus line in said pixel region;

a common-auxiliary electrode surrounding said pixel electrode on a same layer whereon said gate bus line is formed;

a gate insulator over said whole first substrate;

a passivation layer on said gate insulator over said whole first substrate;

a light shielding layer on said second substrate;

a color filter layer on said light shielding layer;

a common electrode on said color filter layer; and

an alignment layer on at least one substrate between said first and second substrates.

2. The multi-domain liquid crystal display device according to claim 1, further comprising;

a storage electrode connecting said pixel electrode below said passivation layer and overlapping said gate bus line.

3. The multi-domain liquid crystal display device according to claim 1, further comprising;

a storage electrode connecting said pixel electrode below said passivation layer and overlapping said common-auxiliary electrode.

4. The multi-domain liquid crystal display device according to claim 1, wherein said pixel electrode overlaps said common-auxiliary electrode.

5. The multi-domain liquid crystal display device according to claim 1, wherein said light shielding layer overlaps said common-auxiliary electrode.

6. The multi-domain liquid crystal display device according to claim 1, wherein said pixel electrode is not overlapping said common-auxiliary electrode.

7. The multi-domain liquid crystal display device according to claim 6, wherein said light shielding layer overlaps said pixel electrode.

8. The multi-domain liquid crystal display device according to claim 6, wherein said gate insulator and passivation layer are formed in an area except said common-auxiliary electrode.

9. The multi-domain liquid crystal display device according to claim 1, wherein said common-auxiliary electrode is electrically connected to said common electrode.

10. The multi-domain liquid crystal display device according to claim 1, further comprising;

a dielectric frame for distorting electric field on said pixel electrode.

11. The multi-domain liquid crystal display device according to claim 1, further comprising;

a dielectric frame for distorting electric field on said common electrode.

12. The multi-domain liquid crystal display device according to claim 1, wherein said pixel electrode has an electric field inducing window inside of itself.

13. The multi-domain liquid crystal display device according to claim 1, wherein said passivation layer has an electric field inducing window inside of itself.

14. The multi-domain liquid crystal display device according to claim 1, wherein said gate insulator has an electric field inducing window inside of itself.

15. The multi-domain liquid crystal display device according to claim 1, wherein said common electrode has an electric field inducing window inside of itself.

16. The multi-domain liquid crystal display device according to claim 1, wherein said color filter layer has an electric field inducing window inside of itself.

17. The multi-domain liquid crystal display device according to claim 1, further comprising;

an over coat layer on said color filter layer.

18. The multi-domain liquid crystal display device according to claim 17, wherein said over coat layer has an electric field inducing window inside of itself.

19. The multi-domain liquid crystal display device according to claim 1, wherein said passivation layer includes a material selected from the group consisting of BCB (BenzoCycloButene), acrylic resin, and polyimide compound.

20. The multi-domain liquid crystal display device according to claim 1, wherein said passivation layer includes a material selected from the group consisting of silicon nitride and silicon oxide.

21. The multi-domain liquid crystal display device according to claim 1, wherein said common-auxiliary electrode includes a material selected from the group consisting of ITO (indium tin oxide), aluminum, molybdenum, chromium, tantalum, titanium, and an alloy thereof.

22. The multi-domain liquid crystal display device according to claim 1, wherein said pixel electrode includes a material selected from the group consisting of ITO (indium tin oxide), aluminum, and chromium.

23. The multi-domain liquid crystal display device according to claim 1, wherein said common electrode includes ITO (indium tin oxide).

24. The multi-domain liquid crystal display device according to claim 1, wherein said pixel region is divided into at least two portions, liquid crystal molecules in said liquid crystal layer in each portion being driven differently from each other.

25. The multi-domain liquid crystal display device according to claim 1, wherein said alignment layer is divided into at least two portions, liquid crystal molecules in said liquid crystal layer in each portion being aligned differently from each other.

26. The multi-domain liquid crystal display device according to claim 25, wherein at least one portion of said at least two portions of the alignment layer is alignment-treated.

27. The multi-domain liquid crystal display device according to claim 25, wherein all portions of said at least two portions of the alignment layer are nonalignment-treated.

28. The multi-domain liquid crystal display device according to claim 1, wherein said liquid crystal layer includes liquid crystal molecules having positive dielectric anisotropy.

29. The multi-domain liquid crystal display device according to claim 1, wherein said liquid crystal layer includes liquid crystal molecules having negative dielectric anisotropy.

30. The multi-domain liquid crystal display device according to claim 1, further comprising:

a negative uniaxial film on at least one substrate.

31. The multi-domain liquid crystal display device according to claim 1, further comprising:

a negative biaxial film on at least one substrate.

32. The multi-domain liquid crystal display device according to claim 1, wherein said liquid crystal layer includes chiral dopants.

33. A multi-domain liquid crystal display device comprising:

first and second substrates facing each other;

a liquid crystal layer between said first and second substrates;

a plurality of gate bus lines arranged in a first direction on said first substrate and a plurality of data bus lines arranged in a second direction on said first substrate to define a pixel region;

a pixel electrode electrically charged through said data bus line in said pixel region; and

a common-auxiliary electrode surrounding said pixel electrode on a same layer whereon said gate bus line is formed.

34. A multi-domain liquid crystal display device comprising:

first and second substrates facing each other;

a liquid crystal layer between said first and second substrates;

a plurality of gate bus lines arranged in a first direction on said first substrate and a plurality of data bus lines arranged in a second direction on said first substrate to define a pixel region;

an n-line thin film transistor at a crossing area of said gate and data bus lines;

a pixel electrode electrically charged through said data bus line in said pixel region;

a common-auxiliary electrode surrounding said pixel electrode on a same layer whereon said gate bus line is formed;

a gate insulator over said whole first substrate;

a passivation layer on said gate insulator over said whole first substrate;

a light shielding layer on said second substrate;

a color filter layer on said light shielding layer;

a common electrode on said color filter layer; and an alignment layer on at least one substrate between said first and second substrates.

* * * * *

专利名称(译)	多域液晶显示装置		
公开(公告)号	US20030086043A1	公开(公告)日	2003-05-08
申请号	US10/308052	申请日	2002-12-03
[标]申请(专利权)人(译)	SEO SEONG MOH 申铉HO KIM KYEONG金 李润BOK KIM JAE观选团		
申请(专利权)人(译)	SEO SEONG MOH 申铉HO KIM KYEONG金 李润BOK KIM JAE观选团		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	SEO SEONG MOH SHIN HYUN HO KIM KYEONG JIN LEE YUN BOK KIM JEOM JAE		
发明人	SEO, SEONG MOH SHIN, HYUN HO KIM, KYEONG JIN LEE, YUN BOK KIM, JEOM JAE		
IPC分类号	G02F1/1333 G02F1/1335 G02F1/1362 G02F1/1337		
CPC分类号	G02F1/133512 G02F1/133707 G02F1/136213 G02F2001/136218 G02F2001/133519 G02F2001/133562 G02F1/136286		
优先权	1019980054557 1998-12-11 KR 1019990005587 1999-02-19 KR		
其他公开文献	US6750935		
外部链接	Espacenet USPTO		

摘要(译)

一种多畴液晶显示装置，包括彼此面对的第一和第二基板以及在第一和第二基板之间的液晶层。多条栅极总线沿第一方向布置在第一基板上，多条数据总线沿第二方向布置在第一基板上以限定像素区域。像素电极通过像素区域中的数据总线充电。公共辅助电极围绕像素电极围绕在其上形成栅极总线的同一层上。

