



(11) **EP 3 473 171 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
24.04.2019 Bulletin 2019/17

(51) Int Cl.:
A61B 5/02 (2006.01) A61B 5/1455 (2006.01)
A61B 5/00 (2006.01)

(21) Application number: **16904987.1**

(86) International application number:
PCT/CN2016/085777

(22) Date of filing: **15.06.2016**

(87) International publication number:
WO 2017/214870 (21.12.2017 Gazette 2017/51)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

- **YAO, Zuming**
Shenzhen
Guangdong 518057 (CN)
- **ZHANG, Fei**
Shenzhen
Guangdong 518057 (CN)
- **HE, Xianliang**
Shenzhen
Guangdong 518057 (CN)
- **LIU, Lihan**
Shenzhen
Guangdong 518057 (CN)
- **LI, Ming**
Shenzhen
Guangdong 518057 (CN)
- **JIN, Xingliang**
Shenzhen
Guangdong 518057 (CN)

(71) Applicant: **Shenzhen Mindray Bio-Medical Electronics Co., Ltd.**
Shenzhen, Guangdong 518057 (CN)

(74) Representative: **KIPA AB**
P O Box 1065
251 10 Helsingborg (SE)

(72) Inventors:
• **HAN, Fei**
Shenzhen
Guangdong 518057 (CN)
• **YE, Fei**
Shenzhen
Guangdong 518057 (CN)

(54) **METHOD FOR CALCULATING PHYSIOLOGICAL PARAMETERS AND CORRESPONDING MEDICAL EQUIPMENT**

(57) A method for calculating physiological parameters, comprising: selecting a section of time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a conversion from time domain to frequency domain to obtain a corresponding frequency domain signal; selecting all rational frequency spectrum peak information, calculating energy information of selected reasonable frequency spectrum peaks, and forming a frequency spectrum peak energy ratio sequence; constructing a stability coefficient according to the frequency spectrum peak energy ratio sequence, and if the stability coefficient is low, constructing a compensation coefficient by using the frequency spectrum peak energy ratio sequence; and compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating based on at least one of the

compensated time domain signal and the frequency domain signal to obtain the physiological parameters.

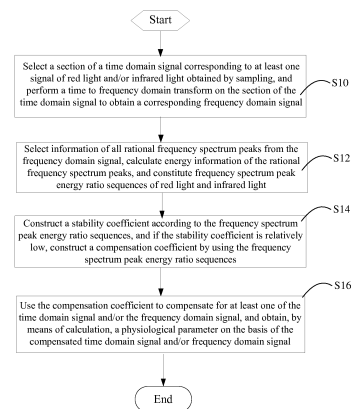


Fig. 5

EP 3 473 171 A1

Description

Technical Field

5 **[0001]** The present disclosure relates to the field of medical monitoring, in particular to methods for calculating physiological parameters and corresponding medical equipments.

Background

10 **[0002]** The metabolic process of the human body is a biological oxidation process, and the oxygen required for the metabolic process enters the human blood through the respiratory system, and is combined with reduced hemoglobin (Hb) in the red blood cells of the blood to form oxyhemoglobin (HbO₂), which is then transported to tissue cells of various parts of the human body. When there is an imbalance between oxygen supply and oxygen consumption in the body, it means that hypoxic conditions occur. Hypoxia has a huge impact on the body. Therefore, a real-time monitoring of arterial blood oxygen concentration is very important in clinical care.

15 **[0003]** Blood oxygen saturation (SpO₂) is the percentage of oxyhemoglobin (HbO₂) capacity to the total hemoglobin (Hb + HbO₂) capacity in the blood, i.e., the concentration of blood oxygen in the blood. As an indirect reflection of arterial blood oxygen saturation (SaO₂), the blood oxygen saturation (SpO₂) is quickly adopted and used by various application fields because of its non-invasive, simple, accurate and rapid characteristics.

20 **[0004]** The application of pulse oximetry is so extensive that the requirements for the accuracy of pulse oximeters are also rising. As will be appreciated by those skilled in the art, there are two key factors in evaluating the pros and cons of the performance of the pulse oximetry: weak perfusion performance and movement performance. If the patient under test has a poor weak perfusion performance or a poor movement performance, the accuracy and stability requirements for the performance of the pulse oximetry are more demanding.

25 **[0005]** Masimo has quickly established its leading position in the blood oxygen industry since the introduction of Masimo's "a technique for an accurate measurement of patient blood oxygen saturation under movement and weak perfusion" in 1998. The core idea of the technique is to establish coefficients R_a and R_v , where R_a is related to an arterial blood oxygen saturation and R_v is related to a venous blood oxygen saturation. By means of the R coefficients, infrared light and red light, a reference signal may be constructed. The energy of the reference signal is related to the coefficients. At the coefficients R_a and R_v , the maximum energy may be reached. Therefore, the coefficient of blood oxygen saturation from 0 to 100% is traversed, and the coefficients R_a and R_v are found to calculate the arterial blood oxygen saturation. This method requires a high amount of computation, and the hardware cost of implementing same is relatively high.

30 **[0006]** It may be understood that, based on Lambert - Bear's law, the oxyhemoglobin (HbO₂) and deoxyhemoglobin (HB) have different absorption characteristics in different light bands, as shown in Fig. 1, which is an oxyhemoglobin and reduced hemoglobin absorption spectrum curve; and the blood oxygen saturation parameter may be further evaluated by using the absorption characteristics.

35 **[0007]** As shown in Fig. 2, which is a working diagram of blood oxygen measurement in the prior art, a light emitting tube is configured to emit two beams of light (for example, red light and near-infrared light) for transmitting through body tissues, and a receiving tube is configured to receive light signals transmitted through the body tissues, so as to obtain the amount of blood pulsating component alternating current (AC) (for example, arterial blood) and the amount of non-pulsating component direct current (DC) (for example, venous blood, muscle, bone, skin, etc.). By using the amount of alternating current (AC) and the amount of direct current (DC) of red and near-infrared light respectively, the ratio of the mapping curve to the arterial blood oxygen saturation (SaO₂), that is, a R coefficient table (as shown in Equation 1) may be obtained. The infinite approximation pulse oxygen saturation (SpO₂) of arterial blood oxygen saturation (SaO₂) may then be obtained based on a look-up table method.

$$R = \frac{AC_{Red} / DC_{Red}}{AC_{Ired} / DC_{Ired}} \dots\dots\dots \text{Equation 1}$$

where AC_{Red} = the amount of red light detected, i.e., the amount of alternating current; DC_{Red} = the maximum transmission amount of red light detected, i.e., the amount of direct current; AC_{Ired} = the amount of infrared light detected; and DC_{Ired} = the amount of direct current of infrared light detected.

55 **[0008]** However, how to accurately identify the AC and DC components in an acquired signal and obtain the accurate R values are not so easy. There are two technologies in the prior art: time domain technology and frequency domain technology.

[0009] The time domain technology has the characteristics of fast response speed and clear phase information. Since

the time domain signal is a mixture of the useful signal and the noise signal, the noise outside a physiological bandwidth may be easily filtered by a high pass/low pass filter; whereas when the noise within the physiological bandwidth occurs, due to the variability of the noise and lack of prior knowledge, the time domain method has almost no way to perform filtering processing on out this part of the noise. Therefore, the time domain technology has natural defects in anti-

5 movement performance.
[0010] The frequency domain technology theoretically may separate the frequency bands of noise and useful signals, thereby achieving the purpose of distinguishing and identifying real signals. According to the definition of digital signal processing, any waveform is composed of multiple sinusoidal waves, and the pulse wave of a physiological parameter is no exception. Therefore, when the physiological pulse wave signal is converted into a frequency domain signal, the
 10 physiological parameter exhibits the fundamental and multiplied frequency characteristics. When interference occurs, the interference frequency spectrum and the fundamental and multiplied frequency spectrum of the physiological parameter are aliased together, and it is very difficult to identify which one is the true frequency spectrum. Therefore, although the frequency domain technology has congenital advantages, it is also very difficult to accurately calculate the blood oxygen related parameter under an interference condition.

15 **[0011]** According to Parseval's theorem, the total energy of the time domain is equal to the total energy of the frequency domain of the signal. Therefore, Equation 1 is also applicable to the frequency domain signal, wherein the AC amount corresponds to the energy change at each frequency point. Under an ideal condition, after normalization, the red and infrared frequency spectrum of the pulse wave is as shown in Fig. 3, and the ratio of the main frequency band and various multiplied frequency bands may be regarded as the corresponding energy ratio in this frequency band. The
 20 meaning of the energy ratio is completely consistent with the meaning of the corresponding R values in Equation 1, that is, it corresponds uniquely to the blood oxygen saturation. In an ideal state without considering noise, the ratio of each frequency band is the same, which corresponds uniquely to the current blood oxygen saturation. In theory, the blood oxygen saturation parameter may be obtained in any frequency band.

25 **[0012]** Similarly, according to the composition theory of the signal, it may be seen that the frequency at which the fundamental frequency peak is located in Fig. 3 is the pulse rate value. The method of routinely detecting the fundamental frequency peak frequency may be obtained by identifying and screening the fundamental and multiplied frequency peaks, based on the theory that the fundamental frequency peak and the harmonic peak have a proportional relationship between energy and frequency. The physiological pulse rate value may be identified by means of this proportional
 relationship.

30 **[0013]** In summary, the pulse rate parameter and the blood oxygen parameter may be obtained by retrieving the position information about the fundamental and multiplied frequency peaks in the frequency domain signal and the energy ratios of the red light and the infrared light. However, in the case of interference, the information about the frequency spectrum peaks of the red light and the infrared light may be confused and annihilated by the noise, and the pulse rate may be abnormally calculated due to the unrecognizable or misidentified fundamental frequency peak
 35 frequency information; and at the same time, the energy ratios of the red light and the infrared light also result in that the blood oxygen calculation deviation is relatively large due to the mixing of noise. As shown in Fig. 4, an illustration of the frequency spectrum distribution under interference is given. It may be seen from Fig. 4 that the frequency spectrum peak energy ratios of the infrared light and the red light are suddenly large and small, and the fundamental frequency peak is almost annihilated. In this case, it is almost impossible to correctly identify the frequency spectrum peak by using the
 40 existing time-frequency domain technology and calculate the accurate blood oxygen and pulse rate parameters.

Summary

45 **[0014]** The technical problem to be solved by the embodiments of the present disclosure is to provide a method for calculating a physiological parameter and corresponding medical equipment, which may improve the accuracy of calculating the physiological parameter (such as the pulse rate value and the blood oxygen parameter) under weak irrigation and movement conditions, and has a low computational complexity and a low demand for computing resources.

[0015] In order to solve the above technical problem, an embodiment of the present disclosure provides a method for calculating a physiological parameter, the method comprising :

50 selecting a section of a time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a time-to-frequency domain transformation on the section of the time domain signal to obtain a corresponding frequency domain signal;

55 selecting all rational frequency spectrum peaks from the frequency domain signal, calculating energy information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak energy ratio sequence; constructing a stability coefficient according to the frequency spectrum peak energy ratio sequence, and if the stability coefficient is relatively low, constructing a compensation coefficient by using the frequency spectrum peak energy ratio sequence; and

compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal.

5 **[0016]** Correspondingly, in another aspect of the present disclosure, further provided is medical equipment for calculating a physiological parameter, comprising:

a sensor comprising at least one light emitting tube and at least one receiving tube, the light emitting tube emitting at least two optical signals of different wavelengths for transmitting through a physiological tissue, and the receiving tube receiving the at least two optical signals transmitted through the physiological tissue and converting the at least two optical signals received into electrical signals;
 10 an analog to digital converter connected to the sensor to convert the electrical signals into digital signals, the digital signals include at least some of the characteristics of the physiological tissue;
 a digital processor connected to the analog to digital converter, the digital processor performing the following processes:
 15

performing a time-to-frequency domain transformation on a section of the digital signal to obtain a corresponding frequency domain signal;
 selecting all rational frequency spectrum peaks from the frequency domain signal, calculating energy information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak energy ratio sequence;
 20 constructing a stability coefficient according to the frequency spectrum peak energy ratio sequence, and if the stability coefficient is relatively low, constructing a compensation coefficient by using the frequency spectrum peak energy ratio sequence; and
 25 compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated digital signal and frequency domain signal.

30 **[0017]** Correspondingly, in another aspect of the present disclosure, further provided is a method for calculating a physiological parameter, the method comprising:

selecting a section of a time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a time-to-frequency domain transformation on the section of the time domain signal to obtain at least one frequency domain signal;
 35 selecting all rational frequency spectrum peaks from the frequency domain signal, calculating position information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak position sequence;
 constructing a time-varying array map according to the frequency spectrum peak position sequence, and constructing at least one stability factor for each position point that varies over time to form a stability factor array map;
 constructing a stability coefficient based on the stability factor array map, and if the stability coefficient is relatively low, calculating a compensation coefficient by using the stability factor array map; and
 40 compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal.

45 **[0018]** Correspondingly, in another aspect of the present disclosure, further provided is a medical equipment for calculating a physiological parameter, comprising:

a sensor comprising at least one light emitting tube and at least one receiving tube, the light emitting tube emitting at least two optical signals of different wavelengths for transmitting through a physiological tissue, and the receiving tube receiving the at least two optical signals transmitted through the physiological tissue and converting the at least two optical signals received into electrical signals;
 50 an analog to digital converter connected to the sensor to convert the electrical signals into digital signals, the digital signals include at least some of the characteristics of the physiological tissue;
 a digital processor connected to the analog to digital converter, the digital processor performing the following processes:
 55

performing a time-to-frequency domain transformation on a section of the digital signal to obtain a corresponding frequency domain signal;

selecting all rational frequency spectrum peaks, calculating position information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak position sequence;
 constructing a time-varying array map according to the frequency spectrum peak position sequence, and constructing at least one stability factor for each position point that varies over time to form a stability factor array map;
 5 constructing a stability coefficient based on the stability factor array map, and if the stability coefficient is relatively low, calculating a compensation coefficient by using the stability factor array map; and
 compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated digital
 10 signal and frequency domain signal.

[0019] Correspondingly, in another aspect of the present disclosure, further provided is a method for calculating a physiological parameter, the method comprising:

selecting a section of a time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a time-to-frequency domain transformation on the section of the time domain signal to obtain at least one frequency domain signal;
 15 selecting all rational frequency spectrum peaks from the frequency domain signal, calculating at least one of energy and position information of the selected rational frequency spectrum peaks, and forming at least one of a frequency spectrum peak energy ratio sequence and a frequency spectrum peak position sequence;
 20 constructing a stability coefficient according to at least one of the frequency spectrum peak energy ratio sequence and the frequency spectrum peak position sequence, and if the stability coefficient is relatively low, constructing a compensation coefficient by using at least one of the frequency spectrum peak energy ratio sequence and the frequency spectrum peak position sequence; and
 25 compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal.

[0020] Correspondingly, in another aspect of the present disclosure, further provided is a medical equipment for calculating a physiological parameter, comprising:

a sensor comprising at least one light emitting tube and at least one receiving tube, the light emitting tube emitting at least two optical signals of different wavelengths for transmitting through a physiological tissue, and the receiving tube receiving the at least two optical signals transmitted through the physiological tissue and converting the at least two optical signals received into electrical signals;
 35 an analog to digital converter connected to the sensor to convert the electrical signals into digital signals, the digital signals include at least some of the characteristics of the physiological tissue;
 a digital processor connected to the analog to digital converter, the digital processor performing the following processes:

performing a time-to-frequency domain transformation on a section of the digital signal to obtain a corresponding frequency domain signal;
 selecting all rational frequency spectrum peaks from the frequency domain signal, calculating at least one of energy and position information of the selected rational frequency spectrum peaks, and forming at least one of a frequency spectrum peak energy ratio sequence and a frequency spectrum peak position sequence;
 45 constructing a stability coefficient according to at least one of the frequency spectrum peak energy ratio sequence and the frequency spectrum peak position sequence, and if the stability coefficient is relatively low, constructing a compensation coefficient by using at least one of the frequency spectrum peak energy ratio sequence and the frequency spectrum peak position sequence; and
 50 compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated digital signal and frequency domain signal.

[0021] The embodiments of the present disclosure have the following beneficial effects:

55 firstly, the embodiments of the present disclosure are based on the frequency domain technology combined with the time domain technology, which may greatly improve the calculation accuracy of the physiological parameter under weak perfusion and movement state, bring a client an excellent clinical performance experience, and greatly improve the application and promotion of the physiological parameter (such as the blood oxygen parameter);

secondly, the present disclosure is implemented by combining the characteristics of time and frequency domain signals with the characteristics of the human physiological parameter, the venous oxygen compensation method and the power spectrum array method are used in the case of interference, so as to improve the accuracy of calculating the physiological parameter (such as the pulse rate value and the blood oxygen parameter) under weak irrigation and movement conditions. The venous oxygen compensation method may eliminate the measurement deviation of blood oxygenation caused by interference, infinitely approach the true physiological blood oxygen value, and greatly provide the accuracy of the calculation of the blood oxygen parameter under the interference condition. The power spectrum array method may eliminate the measurement deviation of the pulse rate caused by interference, may accurately identify the physiological frequency spectrum information even under the long-term interference condition, and greatly provides the accuracy of the calculation of the pulse rate parameter under the interference condition.

[0022] In addition, the methods provided in the embodiments of the present disclosure have low computational complexity and low demand for computing resources.

Brief Description of the Drawings

[0023] In order to more clearly illustrate the embodiments of the present disclosure or the technical solutions in the prior art, the drawings used in the description of the embodiments or the prior art will be briefly described below, and obviously, the drawings in the following description are only some of the embodiments of the present disclosure, and other drawings obtained according to the drawings are still within the scope of the present disclosure for those skilled in the art without involving any inventive effort.

Fig. 1 is a graph showing absorption spectra of oxyhemoglobin and reduced hemoglobin in the prior art;

Fig. 2 is a working principle diagram of blood oxygen measurement in the prior art;

Fig. 3 is a frequency spectrum distribution diagram in the absence of interference;

Fig. 4 is a frequency spectrum distribution diagram in the presence of interference;

Fig. 5 is a schematic diagram of a main process of an embodiment of a method for calculating a physiological parameter provided by the present disclosure;

Fig. 6 is a schematic diagram of a main process of a further embodiment of a method for calculating a physiological parameter provided by the present disclosure;

Fig. 7 is a schematic diagram of a main process of a yet further embodiment of a method for calculating a physiological parameter provided by the present disclosure;

Fig. 8 is a schematic structural diagram of an embodiment of a digital processor used in medical equipment for calculating a physiological parameter provided by the present disclosure;

Fig. 9 is a schematic structural diagram of a compensation coefficient construction unit in Fig. 8;

Fig. 10 is a schematic structural diagram of a further embodiment of a digital processor used in medical equipment for calculating a physiological parameter provided by the present disclosure;

Fig. 11 is a schematic structural diagram of a compensation coefficient construction unit in Fig. 10;

Fig. 12 is a schematic structural diagram of a yet further embodiment of a digital processor used in medical equipment for calculating a physiological parameter provided by the present disclosure;

Fig. 13 is a schematic structural diagram of a compensation processing unit in Fig. 12;

Fig. 14 is a schematic diagram of a venous blood pulsation interfered with an arterial blood pulsation according to an embodiment of the present disclosure;

Fig. 15 is a schematic diagram of a calculation process of a compensation coefficient in an embodiment of the present disclosure;

Fig. 16 is a schematic diagram of blood oxygen distribution in a frequency spectrum band under an interference condition in an embodiment of the present disclosure;

Fig. 17 is a schematic diagram of a framework process of a venous oxygen compensation method in an embodiment of the present disclosure;

Fig. 18 is a schematic diagram of a screening process of the fundamental and multiplied frequencies in an embodiment of the present disclosure;

Fig. 19 is a schematic diagram of a process of a power spectrum array method in an embodiment of the present disclosure;

Fig. 20 is a schematic diagram of a process using both the venous oxygen compensation method and the power spectrum array method of an embodiment of the present disclosure; and

Fig. 21 is a schematic structural diagram of an embodiment of medical equipment for calculating a physiological parameter provided by the present disclosure.

Detailed Description

[0024] In order to make the purposes, technical solutions and advantages of the present disclosure clearer and more comprehensible, the present disclosure is further illustrated in detail below in conjunction with the accompanying drawings and embodiments. It should be understood that the particular embodiments described herein are only used for illustrating the present disclosure and not intended to limit the present disclosure.

[0025] As shown in Fig. 5, which shows a schematic diagram of a main process of an embodiment of a method for calculating the accuracy of a physiological parameter provided by the present disclosure, in this embodiment, the compensation process of a venous oxygen compensation (VOC) method is shown, and specifically, the method comprises the following steps:

Step S10 of selecting a section of a time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a time-to-frequency domain transformation on the section of the time domain signal to obtain a corresponding frequency domain signal;

Step S12 of selecting information about all rational frequency spectrum peaks from the frequency domain signal, calculating energy information of the selected rational frequency spectrum peaks, and forming frequency spectrum peak energy ratio sequences of red light and infrared light, wherein the information about the rational frequency spectrum peaks satisfies at least one of a frequency spectrum energy relationship (e.g., whether there is a fundamental and multiplied frequency relationship), a frequency spectrum amplitude relationship (whether the amplitude is not lower than a fixed value), a frequency spectrum positional relationship, a frequency spectrum peak morphological relationship (e.g., whether the shape of the frequency spectrum peak is bilaterally symmetric about a frequency point) and other factors; and

Step S14 of constructing a stability coefficient according to the frequency spectrum peak energy ratio sequences, and if the stability coefficient is relatively low, constructing a compensation coefficient by using the frequency spectrum peak energy ratio sequences, wherein the stability coefficient is constructed based on deviation statistics for energy ratios of the red light and the infrared light or based on deviation statistics for blood oxygen parameter values, or is an empirical coefficient. The empirical coefficient is abstracted according to the physiological state and the signal-to-noise ratio characteristics. As an example, when a movement interference is identified, the physiological blood oxygen may not be too low; under long-term movement, the physiological blood oxygen will have a downward trend; and when the movement interference is severe and the noise component is much larger than the signal component, the blood oxygen approaches 80%, and so on. Combined with the blood oxygen system, a digital empirical coefficient value may be formed. Specifically, the stability coefficient is compared with a set threshold to determine whether the stability coefficient is relatively low. In an example, information about a mean value, a standard deviation, a maximum value, and a minimum value of a statistical spectrum peak energy ratio deviation sequence or blood oxygen deviation sequence may be used to obtain the stability coefficient according to a specific algorithm.

[0026] In an example, the following method may be used to construct the compensation coefficient:

selecting the mean value of the physiological parameter (such as the blood oxygen parameter) to be the denominator input source of a compensation coefficient calculation formula; selecting (the mean value + the standard deviation) or (the mean value - the standard deviation) to be the numerator input source of the compensation coefficient calculation formula; and

calculating the corresponding compensation coefficient by substituting the numerator input source and the denominator input source into the following compensation coefficient calculation formula:

$$Factor_{compensation} = tabR(Numerator)/tabR(Denominator)$$

where $tabR(Numerator)$ is a R coefficient value obtained by looking up a mapping table of a predetermined blood oxygen and R curve coefficient with the numerator input source being the blood oxygen value, and $tabR(Denominator)$ is a R coefficient value obtained by looking up a mapping table of a predetermined blood oxygen and R curve coefficient with the denominator input source being the blood oxygen value; and $Factor_{compensation}$ is the complement coefficient.

[0027] Step S16 of compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal, wherein the physiological parameter is at least one of blood oxygen,

pulse rate, waveform area, and perfusion index.

[0028] Taking the physiological parameter being the blood oxygen saturation parameter as an example below, a further detailed flowchart in Fig. 5 is illustrated.

[0029] Firstly, in step S10, a section of a time domain signal is selected, which corresponds to at least one signal of red light and infrared light obtained by sampling, and a time-to-frequency domain transformation is performed on the section of the time domain signal to obtain a corresponding frequency domain signal;

next, in step S12, information about all rational frequency spectrum peaks is selected from the frequency domain signal, energy information about the selected rational frequency spectrum peaks is calculated, and forms the frequency spectrum peak energy ratio sequences of the red light and the infrared light, specifically, the blood oxygen distribution sequence is statistically analyzed according to the blood oxygen saturation parameter of each of the rational frequency spectrum peaks, to obtain a plurality of pieces of characteristic information, and specifically, at least the mean value v_{Mean} , the standard deviation v_{Std} , the maximum value v_{Max} , and the minimum value v_{Min} of the blood oxygen saturation are calculated according to the blood oxygen saturation parameter of each of the rational frequency spectrum peaks; and then, in step S14, a stability coefficient is constructed according to the frequency spectrum peak energy ratio sequence, and if the stability coefficient is relatively low, a compensation coefficient is constructed by using the frequency spectrum peak energy ratio sequences. Specifically, in the plurality of pieces of characteristic information obtained in the foregoing step, a difference between the maximum value and the minimum value is used as the stability coefficient, and if the stable system is less than or equal to a set first threshold, the stability coefficient is determined to be relatively low, and there is a need to construct a compensation coefficient.

[0030] Specifically, in some embodiments, the process of constructing the compensation coefficient may be obtained by the following method:

if the standard deviation v_{Std} is less than a preset second threshold at this point, selecting the mean value to be the denominator input source of the compensation coefficient calculation formula; if the number of blood oxygens exceeding the mean value in the blood oxygen sequence accounts for at least half of the total number of the sequence, using the maximum value + the standard deviation as the numerator input source of the compensation coefficient calculation formula, otherwise using the maximum value - the standard deviation as the numerator input source of the compensation coefficient calculation formula;

if the standard deviation is greater than the preset second threshold value, obtaining a repetition factor is obtained in a predetermined manner and using same as the numerator input source of the compensation coefficient calculation formula, and using the mean value as the denominator input source of the compensation coefficient calculation formula; and

calculating the corresponding compensation coefficient by substituting the numerator input source and the denominator input source into the following compensation coefficient calculation formula:

$$Factor_{compensation} = tabR(Numerator)/tabR(Denominator).....Formula 1$$

where $tabR(Numerator)$ is a R coefficient value obtained by looking up a mapping table of a predetermined blood oxygen and R curve coefficient with the numerator input source being the blood oxygen value, and $tabR(Denominator)$ is a R coefficient value obtained by looking up a mapping table of a predetermined blood oxygen and R curve coefficient with the denominator input source being the blood oxygen value; and $Factor_{compensation}$ is the complement coefficient.

[0031] The step of obtaining the repetition factor in a predetermined manner is specifically:

obtaining a maximum blood oxygen parameter set satisfying a certain deviation value (e.g., + 2%) in the statistical blood oxygen distribution sequence, and calculating the mean value of the maximum blood oxygen parameter set as the repetition factor; or

selecting a stable segment within a certain time range (e.g., 4s - 8s) in the historical trend of blood oxygen, and calculating the mean value of the blood oxygen parameter set in the stable segment as the repetition factor; and

finally, in step S16, the compensation coefficient is used to compensate for the time domain signal corresponding to at least one of the red light and the infrared light, and the physiological parameter is further calculated by using at least one of the compensated time domain signal. The physiological parameter is at least one of a blood oxygen parameter, a pulse rate parameter, a waveform area parameter, and a perfusion index parameter. Specifically, the following two methods may be used:

I. according to the compensated time domain signal, the final blood oxygen saturation parameter and the pulse rate value are calculated according to a time domain algorithm; or
 II. a time-to-frequency domain transformation is performed on the compensated time domain signal to obtain a frequency domain signal, and a rational frequency spectrum peak is selected from the frequency domain signal, and the rational frequency spectrum peak is calculated according to a frequency domain algorithm to obtain an accurate final blood oxygen saturation parameter.

[0032] As shown in Fig. 6, which shows a schematic diagram of a main process of another embodiment of a method for calculating the accuracy of a physiological parameter provided by the present disclosure, in this embodiment, the compensation process of a power spectrum array (PSA) method is shown, and specifically, the method comprises the following steps:

Step S20 of selecting a section of a time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a time-to-frequency domain transformation on the section of the time domain signal to obtain at least one frequency domain signal;

Step S22 of selecting information about all rational frequency spectrum peaks from the frequency domain signal, calculating position information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak position sequence, wherein the information about the rational frequency spectrum peaks satisfies at least one or more of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum morphological relationship;

Step S24 of constructing a stability coefficient according to the frequency spectrum peak position sequence, and if the stability coefficient is relatively low, constructing a time-varying array map according to the frequency spectrum peak position sequence, and calculating a compensation coefficient by means of the array map, wherein the stability coefficient is constructed based on at least one of a frequency spectrum energy ratio deviation, a frequency spectrum blood oxygen deviation, a state of a fundamental and multiplied frequency group, and a number of rational frequency spectrum peaks, and whether the stability coefficient is relatively low may be determined according to at least one of a number of stability factors and weight values;

in an example, the stability coefficient is determined according to the state of the fundamental and multiplied frequency group in the frequency spectrum peak position sequence; for example, when a pair of fundamental and multiplied frequency groups are not identified in the frequency spectrum peak position sequence, the stability coefficient is considered to be relatively low;

specifically, the step of constructing the time-varying array map according to the frequency spectrum peak position sequence, and calculating the compensation coefficient by means of the array map comprises:

establishing a cache to store information about the frequency spectrum peaks, which information comprises: each frequency spectrum peak position information PeakArray; each frequency spectrum peak position weight information WeightedArray; and information about the number of frequency spectrum peaks stored ArrayIndex;
 Step S161 of screening a predetermined number of frequency spectrum peaks in the frequency domain signal, sequentially filling same into the cache, writing the position information about each frequency spectrum peak into the PeakArray, incrementing the corresponding position weight in the WeightedArray, and incrementing the total length ArrayIndex, wherein, if the currently screened frequency spectrum peak is the same as a frequency spectrum peak in the cache, the position weight information WeightedArray of the frequency spectrum peak in the cache is directly incremented.

[0033] Step S162, in the cache, assuming each frequency spectrum peak as a suspected fundamental frequency peak, traversing all the other frequency spectrum peaks, determining whether the other frequency spectrum peaks and the suspected fundamental frequency peak satisfy a frequency multiplication relationship, and if so, eliminating the information about the multiplied frequency peaks in the cache, and the position weight coefficients of the multiplied frequency peaks are converted according to the frequency multipliers and added to the position weight coefficient of the corresponding suspected fundamental frequency peak; otherwise, remaining the information about the other frequency spectrum peaks;

Step S163 of selecting three frequency spectrum peaks, position weight coefficients of which are ranked in the front in the last suspected frequency spectrum peak, determining one of them to be the final rational frequency spectrum peak (in some examples, which may be considered as a fundamental frequency peak), and obtaining the pulse rate value according to the determined final frequency spectrum peak; similarly, it may be understood that the corresponding blood oxygen saturation may be obtained, by means of energy calculation, according to the final rational frequency spectrum peak. Specifically, the step further comprises:

comparing the position weight coefficient of each of the selected frequency spectrum peaks with a predetermined third threshold;

if the number of frequency spectrum peaks, the position weight coefficient of which is greater than the third threshold, is one, determining the frequency spectrum peak to be the final rational frequency spectrum peak;

and if the number of frequency spectrum peaks, the position weight coefficient of which is greater than the third threshold, is at least two, determining one of the frequency spectrum peaks to be the final rational frequency spectrum peak, and using information about the later final rational frequency spectrum peak as the compensation coefficient; Step S26 of compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal, wherein the physiological parameter is at least one of blood oxygen, pulse rate, waveform area, and perfusion index, and wherein in an example, the use of the compensation coefficient to compensate for at least one of the time domain signal and the frequency domain signal may be specifically: constructing a band pass filter according to the compensation coefficient, and filtering at least one of the time domain signal and the frequency domain signal to achieve compensation function.

[0034] As shown in Fig. 7, which shows a schematic diagram of a main process of another embodiment of a method for calculating the accuracy of a physiological parameter provided by the present disclosure, in this embodiment, a venous oxygen compensation (VOC) method and a power spectrum array (PSA) method are combined in the compensation process, and specifically, the method comprises the following steps:

Step S30 of selecting a section of a time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a time-to-frequency domain transformation on the section of the time domain signal to obtain at least one frequency domain signal;

Step S32 of selecting information about all rational frequency spectrum peaks from the frequency domain signal, calculating at least one of energy and position information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak energy ratio sequence and a frequency spectrum peak position sequence, wherein the information about the rational frequency spectrum peaks satisfies at least one or more of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship, and the process of forming the frequency spectrum peak energy ratio sequence and the frequency spectrum peak position sequence may be respectively referred to the foregoing description of Step S12 in Fig. 5 and Step S22 in Fig. 6;

Step S34 of constructing a stability coefficient according to signal characteristics of at least one of the frequency spectrum peak energy ratio sequence and the frequency spectrum peak position sequence, and at the same time, determining whether the stability coefficient of at least one of the sequences is relatively low, and if the stability coefficient is relatively low, constructing a compensation coefficient by using the signal characteristics of the at least one of the sequences, wherein the stability coefficient is constructed based on at least one of a frequency spectrum energy ratio deviation, a frequency spectrum blood oxygen deviation, a state of a fundamental and multiplied frequency group, and a number of rational frequency spectrum peaks; and the compensation coefficient is an energy ratio deviation coefficient or a blood oxygen deviation coefficient calculated based on the frequency spectrum peak energy ratio sequence, or a position coefficient statistically obtained over time based on the frequency spectrum peak position sequence.

[0035] The specific process of constructing the stability coefficient according to the frequency spectrum peak energy ratio sequence, and constructing the compensation coefficient may be referred to the foregoing description of step S14 in Fig. 5;

and the specific process of constructing the stability coefficient according to the frequency spectrum peak position sequence, and constructing the compensation coefficient may be referred to the foregoing description of step S24 in Fig. 6, so that they will not be described in detail herein.

[0036] Step S36 of compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and further calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal, wherein the physiological parameter is at least one or more of blood oxygen, pulse rate, waveform area, and perfusion index.

[0037] Specifically, the step comprises at least one of the following: using the compensation coefficient to perform a gain processing on the selected time domain signal to achieve compensation; or using the compensation coefficient to perform filtering processing on the selected frequency domain signal to achieve compensation.

[0038] Correspondingly, the present disclosure further provides a medical equipment for calculating a physiological parameter.

[0039] It will be understood that the method for calculating a physiological parameter disclosed by the present disclosure may be implemented by means of functional modularization, and integrated as a plug-in into other auxiliary diagnostic devices (such as a monitoring device, a defibrillator, an AED, an automatic resuscitation instrument, an electrocardiograph, etc.), or may be made as a single-parameter medical apparatus for monitoring a related physiological parameter, wherein the physiological parameter comprises at least one of a blood oxygen parameter, a pulse rate parameter, a waveform area parameter, and a perfusion index parameter.

[0040] As shown in Fig. 21, which shows a schematic structural diagram of medical equipment disclosed in the present disclosure, in which a single-parameter medical apparatus is shown; and in this embodiment, the medical equipment comprises:

at least one blood oxygen sensor for measuring a part of a human subject, such as a finger, a forehead, an earlobe, a toe, and a sole. The blood oxygen sensor comprises at least a light emitting tube and a receiving tube, and the light emitting tube is configured to emit at least two optical signals of different wavelengths for transmitting through a body tissue of the human subject. In an example, the light emitting tube may emit a red light signal and an infrared light signal. The receiving tube receives the at least two optical signals transmitted through the body tissue of the human subject and converts same into at least two electrical signals. In an example, the two electrical signals are a red light signal and an infrared light signal;

an analog to digital converter connected to the sensor to convert the electrical signals into digital signals, the digital signals include at least some of the characteristics of the physiological tissue;

a digital processor connected to the analog to digital converter, the digital processor performing the following processes:

performing a time-to-frequency domain transformation on a section of the digital signal to obtain a corresponding frequency domain signal;

selecting all rational frequency spectrum peaks from the frequency domain signal, calculating energy information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak energy ratio sequence;

constructing a stability coefficient according to the frequency spectrum peak energy ratio sequence, and if the stability coefficient is relatively low, constructing a compensation coefficient by using the frequency spectrum peak energy ratio sequence; and

compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated digital signal and frequency domain signal.

[0041] Further, the medical equipment comprises: a display unit connected to the digital processor to display the physiological parameter calculated by the digital processor; and/or a communication unit connected to the digital processor to send the physiological parameter calculated by the digital processor.

[0042] The blood oxygen sensor includes two types of transmissive and reflective, and may be generally worn on a part of the human subject, such as the finger, the forehead, the earlobe, the toe and the sole, for measuring a physiological parameter comprising at least one of a blood oxygen parameter, a pulse rate parameter, a waveform area parameter, and a perfusion index parameter. The display unit may be a local display unit, or may be remotely communicated to a remote display unit in a wired/wireless manner. The display unit provides the user with a perceptible parameter representation by means of characters, values, waveforms, bar graphs, voice prompts, etc.

[0043] In one embodiment of the present disclosure, the at least some of the characteristics of the physiological tissue is one or more of the optical characteristics of oxygenated hemoglobin, deoxyhemoglobin, methemoglobin, total hemoglobin and carbon monoxide in the blood.

[0044] In one embodiment of the present disclosure, the rational frequency spectrum peaks satisfy at least one of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship.

[0045] In one embodiment of the present disclosure, the stability coefficient is constructed based on deviation statistics for energy ratios of the red light and the infrared light, or is an empirical coefficient.

[0046] In one embodiment of the present disclosure, the stability factor adjusts a stability weight thereof over time according to at least one of the characteristics of a fundamental and multiplied frequency group and a frequency spectrum peak morphological rationality.

[0047] In one embodiment of the present disclosure, the process of constructing, by the digital processor, the compensation coefficient by using the frequency spectrum peak energy ratio sequence is specifically: selecting the mean value and converting same by means of a coefficient table to a denominator of a compensation

coefficient calculation formula, and selecting (the mean value + the standard deviation) or (the mean value - the standard deviation) and converting same by means of a coefficient table to a numerator of the compensation coefficient calculation formula, and calculating a ratio of the numerator to the denominator to obtain the compensation coefficient.

[0048] In one embodiment of the present disclosure, the physiological parameter is at least one of blood oxygen, pulse rate, waveform area, perfusion index, etc.

[0049] In order to better understand the function and working principle of the digital processor in this embodiment, the following will be described in conjunction with a specific example.

[0050] As shown in Fig. 8, which shows a schematic structural diagram of an embodiment of a digital processor used in medical equipment for calculating a physiological parameter provided by the present disclosure, the digital processor uses a venous oxygen compensation (VOC) method for compensation. Reference is also made to Fig. 9, specifically, the digital processor comprises:

a time-to-frequency domain transformation unit 11 for selecting a section of a time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a time-to-frequency domain transformation on the section of the time domain signal to obtain a corresponding frequency domain signal;

an energy ratio sequence construction unit 12 for selecting information about all rational frequency spectrum peaks from the frequency domain signal, calculating energy information of the selected rational frequency spectrum peaks, and forming frequency spectrum peak energy ratio sequences of red light and infrared light, wherein the information about the rational frequency spectrum peaks satisfies at least one of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship;

a compensation coefficient construction unit 13 for constructing a stability coefficient according to the frequency spectrum peak energy ratio sequences, and if the stability coefficient is relatively low, constructing a compensation coefficient by using the frequency spectrum peak energy ratio sequence, wherein the stability coefficient is constructed based on deviation statistics for energy ratios of the red light and the infrared light or based on deviation statistics for blood oxygen parameter values, or is an empirical coefficient; and the stability coefficient is compared with a set threshold to determine whether the stability coefficient is relatively low; and

a compensation processing unit 14 for using the compensation coefficient to compensate for the time domain signal corresponding to at least one of the red light and the infrared light, and further calculating the physiological parameter by using at least one of the compensated time domain signal.

[0051] The compensation coefficient construction unit 13 further comprises:

a stability coefficient construction subunit 130 for using information about a mean value, a standard deviation, a maximum value, and a minimum value of a statistical spectrum peak energy ratio deviation sequence or blood oxygen deviation sequence to obtain the stability coefficient according to a specific algorithm;

a determining unit 131 for determining whether the stability coefficient constructed by the stability coefficient construction subunit 130 is relatively low;

a numerator and denominator selecting unit 132 for selecting the mean value of the physiological parameter (such as the blood oxygen parameter) to be the denominator input source of a compensation coefficient calculation formula; and selecting (the mean value + the standard deviation) or (the mean value - the standard deviation) to be the numerator input source of the compensation coefficient calculation formula; and

a calculation unit 134 for calculating the corresponding compensation coefficient by substituting the numerator input source and the denominator input source selected by the numerator and denominator selecting unit into the following compensation coefficient calculation formula:

$$Factor_{compensation} = tabR(Numerator)/tabR(Denominator)$$

where $tabR(Numerator)$ is a R coefficient value obtained by looking up a mapping table of a predetermined blood oxygen and R curve coefficient with the numerator input source being the blood oxygen value, and $tabR(Denominator)$ is a R coefficient value obtained by looking up a mapping table of a predetermined blood oxygen and R curve coefficient with the denominator input source being the blood oxygen value; and $Factor_{compensation}$ is the complement coefficient.

[0052] For more details, reference may be made to the aforementioned description of Fig. 5.

[0053] Correspondingly, the present disclosure further provides a medical equipment for calculating a physiological

parameter, in this embodiment, the medical equipment comprises:

a sensor comprising at least one light emitting tube and at least one receiving tube, the light emitting tube emitting at least two optical signals of different wavelengths for transmitting through a physiological tissue, and the receiving tube receiving the at least two optical signals transmitted through the physiological tissue and converting the at least two optical signals received into electrical signals;

an analog to digital converter connected to the sensor to convert the electrical signals into digital signals, the digital signals include at least some of the characteristics of the physiological tissue;

a digital processor connected to the analog to digital converter, the digital processor performing the following processes:

performing a time-to-frequency domain transformation on a section of the digital signal to obtain a corresponding frequency domain signal;

selecting all rational frequency spectrum peaks from the frequency domain signal, calculating position information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak position sequence;

constructing a time-varying array map according to the frequency spectrum peak position sequence, and constructing at least one stability factor for each position point that varies over time to form a stability factor array map;

constructing a stability coefficient based on the stability factor array map, and if the stability coefficient is relatively low, calculating a compensation coefficient by using the stability factor array map; and

compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal.

[0054] Further, the medical equipment comprises: a display unit connected to the digital processor to display the physiological parameter calculated by the digital processor; and/or a communication unit connected to the digital processor to send the physiological parameter calculated by the digital processor.

[0055] In one embodiment of the present disclosure, the two optical signals are red light and infrared light.

[0056] In one embodiment of the present disclosure, the at least some of the characteristics of the physiological tissue is one or more of the optical characteristics of oxygenated hemoglobin, deoxyhemoglobin, methemoglobin, total hemoglobin and carbon monoxide in the blood.

[0057] In one embodiment of the present disclosure, the rational frequency spectrum peaks satisfy at least one or more of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship.

[0058] In one embodiment of the present disclosure, the stability coefficient is constructed based on at least one of a frequency spectrum energy ratio deviation, a frequency spectrum blood oxygen deviation, a state of a fundamental and multiplied frequency group, a number of rational frequency spectrum peaks, and a frequency spectrum peak morphological rationality.

[0059] In one embodiment of the present disclosure, the stability factor adjusts a stability weight thereof over time according to at least one of the characteristics of a fundamental and multiplied frequency group and a frequency spectrum peak morphological rationality.

[0060] In one embodiment of the present disclosure, whether the stability coefficient is stable is determined according to at least one of a number of stability factors and weight values.

[0061] In one embodiment of the present disclosure, the physiological parameter is at least one of blood oxygen, pulse rate, waveform area, perfusion index, etc.

[0062] For more details, reference may be made to the aforementioned description of Fig. 21; and at the same time, in order to better understand the function and working principle of the digital processor in this embodiment, the following will be described in conjunction with a specific example.

[0063] As shown in Fig. 10, which shows a schematic structural diagram of a further embodiment of a digital processor used in medical equipment for calculating a physiological parameter provided by the present disclosure, the digital processor uses a power spectrum array method (PSA) for compensation. Reference is also made to Fig. 11, specifically, the digital processor comprises:

a time-to-frequency domain transformation unit 11 for selecting a section of a time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a time-to-frequency domain transformation on the section of the time domain signal to obtain at least one frequency domain signal;

a frequency spectrum peak position sequence obtaining unit 15 for selecting information about all rational frequency

spectrum peaks from the frequency domain signal, calculating position information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak position sequence, wherein the information about the rational frequency spectrum peaks satisfies at least one or more of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship;

a compensation coefficient construction unit 16 for constructing a stability coefficient according to the frequency spectrum peak position sequence, and if the stability coefficient is relatively low, constructing a time-varying array map according to the frequency spectrum peak position sequence, and calculating a compensation coefficient by means of the array map, wherein the stability coefficient is constructed based on at least one of a frequency spectrum energy ratio deviation, a frequency spectrum blood oxygen deviation, a state of a fundamental and multiplied frequency group, and a number of rational frequency spectrum peaks;

a compensation processing unit 17 for compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal, wherein the physiological parameter is at least one of blood oxygen, pulse rate, waveform area, and perfusion index.

[0064] The compensation coefficient construction unit 16 comprises:

a cache unit 160 for establishing a cache to store information about the frequency spectrum peaks, which information comprises: each frequency spectrum peak position information; each frequency spectrum peak position weight information; and information about the number of frequency spectrum peaks stored;

a frequency spectrum peak information recording unit 162 for screening a predetermined number of frequency spectrum peaks in the frequency domain signal, sequentially filling same into the cache, writing the position information about each frequency spectrum peak, incrementing the corresponding position weight, and incrementing the total length quantity information;

a traversal processing unit 164 for, in the cache, assuming each frequency spectrum peak as a suspected fundamental frequency peak, traversing all the other frequency spectrum peaks, determining whether the other frequency spectrum peaks and the suspected fundamental frequency peak satisfy a frequency multiplication relationship, and if so, eliminating the information about the multiplied frequency peaks in the cache, and the position weight coefficients of the multiplied frequency peaks are converted according to the frequency multipliers and added to the position weight coefficient of the corresponding suspected fundamental frequency peak; otherwise, remaining the information about the other frequency spectrum peaks; and

a compensation coefficient obtaining unit 166 for selecting three frequency spectrum peaks, position weight coefficients of which are ranked in the front in the last suspected frequency spectrum peak, determining one of them to be the final rational frequency spectrum peak, and using the information about the rational frequency spectrum peak as the compensation coefficient.

[0065] For more details, reference may be made to the aforementioned description of Fig. 6.

[0066] Correspondingly, the present disclosure further provides a medical equipment for calculating a physiological parameter, in this embodiment, the medical equipment comprises:

a sensor comprising at least one light emitting tube and at least one receiving tube, the light emitting tube emitting at least two optical signals of different wavelengths for transmitting through a physiological tissue, and the receiving tube receiving the at least two optical signals transmitted through the physiological tissue and converting the at least two optical signals received into electrical signals;

an analog to digital converter connected to the sensor to convert the electrical signals into digital signals, the digital signals include at least some of the characteristics of the physiological tissue;

a digital processor connected to the analog to digital converter, the digital processor performing the following processes:

performing a time-to-frequency domain transformation on a section of the digital signal to obtain a corresponding frequency domain signal;

selecting all rational frequency spectrum peaks from the frequency domain signal, calculating at least one of energy and position information of the selected rational frequency spectrum peaks, and forming at least one of a frequency spectrum peak energy ratio sequence and a frequency spectrum peak position sequence;

constructing a stability coefficient according to at least one of the frequency spectrum peak energy ratio sequence and the frequency spectrum peak position sequence, and if the stability coefficient is relatively low, constructing a compensation coefficient by using at least one of the frequency spectrum peak energy ratio sequence and

the frequency spectrum peak position sequence; and
 compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal.

5

[0067] In one embodiment of the present disclosure, the two optical signals are red light and infrared light.

[0068] In one embodiment of the present disclosure, the at least some of the characteristics of the physiological tissue is one or more of the optical characteristics of oxygenated hemoglobin, deoxyhemoglobin, methemoglobin, total hemoglobin and carbon monoxide in the blood.

10 **[0069]** In one embodiment of the present disclosure, the rational frequency spectrum peaks satisfy at least one of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship.

[0070] In one embodiment of the present disclosure, the stability coefficient is constructed based on at least one of a frequency spectrum energy ratio deviation, a frequency spectrum blood oxygen deviation, a state of a fundamental and multiplied frequency group, and a number of rational frequency spectrum peaks.

15 **[0071]** In one embodiment of the present disclosure, the compensation coefficient is an energy ratio deviation coefficient calculated based on the frequency spectrum peak energy ratio sequence, or a position coefficient statistically obtained over time based on the frequency spectrum peak position sequence.

[0072] In one embodiment of the present disclosure, the process of compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient is specifically:

20 using the compensation coefficient to perform a gain processing on the selected time domain signal to achieve compensation; or

using the compensation coefficient to perform filtering processing on the selected frequency domain signal to achieve compensation.

25

[0073] In one embodiment of the present disclosure, the physiological parameter is at least one of blood oxygen, pulse rate, waveform area, perfusion index, etc.

[0074] For more details, reference may be made to the aforementioned description of Fig. 21; and at the same time, in order to better understand the function and working principle of the digital processor in this embodiment, the following will be described in conjunction with a specific example.

30

[0075] As shown in Fig. 12, which shows a schematic structural diagram of a further embodiment of a digital processor used in medical equipment for calculating a physiological parameter provided by the present disclosure, the digital processor uses a combined venous oxygen compensation (VOC) method and power spectrum array method (PSA) for compensation. Reference is also made to Fig. 13, specifically, the digital processor comprises:

35

a time-to-frequency domain transformation unit 11 for selecting a section of a time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a time-to-frequency domain transformation on the section of the time domain signal to obtain at least one frequency domain signal;

40 a corresponding sequence construction unit 18 for selecting information about all rational frequency spectrum peaks from the frequency domain signal, calculating at least one of energy and position information of the selected rational frequency spectrum peaks, and forming at least one of a frequency spectrum peak energy ratio sequence and a frequency spectrum peak position sequence, wherein the information about the rational frequency spectrum peaks satisfies at least one of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship; and it will be understood that the corresponding sequence construction unit 18 has both the functions of the energy ratio sequence construction unit 13 in Fig. 8 and the frequency spectrum peak position sequence obtaining unit 15 in Fig. 10, and the specific details may be referred to the corresponding description above;

45

a compensation coefficient construction unit 16 for constructing a stability coefficient according to signal characteristics of at least one of the sequences, and at the same time, determining whether the stability coefficient of at least one of the sequences is relatively low, and if the stability coefficient is relatively low, constructing a compensation coefficient by using the signal characteristics of the at least one of the sequences, wherein the stability coefficient is constructed based on at least one of a frequency spectrum energy ratio deviation, a frequency spectrum blood oxygen deviation, a state of a fundamental and multiplied frequency group, and a number of rational frequency spectrum peaks; and the compensation coefficient construction unit 16 may construct the compensation coefficient based on an energy ratio deviation coefficient or a blood oxygen deviation coefficient calculated based on the frequency spectrum peak energy ratio sequence, or a position coefficient statistically obtained over time based on the frequency spectrum peak position sequence. It will be understood that the compensation coefficient construction

50

based on an energy ratio deviation coefficient or a blood oxygen deviation coefficient calculated based on the frequency spectrum peak energy ratio sequence, or a position coefficient statistically obtained over time based on the frequency spectrum peak position sequence. It will be understood that the compensation coefficient construction

55

based on an energy ratio deviation coefficient or a blood oxygen deviation coefficient calculated based on the frequency spectrum peak energy ratio sequence, or a position coefficient statistically obtained over time based on the frequency spectrum peak position sequence. It will be understood that the compensation coefficient construction

unit 16 has both the functions of the compensation coefficient construction unit 16 in Fig. 8 and the compensation coefficient construction unit 16 in Fig. 10, and the specific details may be referred to the corresponding description above; and

a compensation processing unit 17 for compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and further calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal, wherein the physiological parameter is at least one of blood oxygen, pulse rate, waveform area, and perfusion index.

[0076] The compensation processing unit 17 further comprises:

a time domain compensation unit 170 for using the compensation coefficient to perform a gain processing on the selected time domain signal to achieve compensation; or

a frequency domain compensation unit 172 for using the compensation coefficient to perform filtering processing on the selected frequency domain signal to achieve compensation.

[0077] For more details, reference may be made to the aforementioned description of Fig. 7.

[0078] In order to facilitate a better understanding of the present disclosure, the principles and implementation processes of the venous oxygen compensation (VOC) and power spectrum array (PSA) methods referred to in the foregoing will be further explained in conjunction with practical examples.

I. Venous Oxygen Compensation (VOC)

[0079] The applicants believe that under a non-interference condition, venous blood flows relatively slowly due to its physiological characteristics and may be considered as part of the direct current (DC) amount, and the venous blood oxygen saturation does not have any effect on the normal blood oxygen measurement. Under an interference condition, the venous blood is affected by the interference, a venous pulsation is generated, and the alternating current (AC) amount formed by the venous pulsation will be mixed into the AC amount formed by the arterial blood pulsation. According to Equation 1 described above, the oxygen saturation calculated at this point must deviate from the true value; from the physiological point of view, it will be understood that the venous blood oxygen saturation is mixed in the arterial blood oxygen saturation, resulting in that the final blood oxygen saturation deviates from a blood gas value.

[0080] As shown in Fig. 14, a schematic diagram of a venous blood pulsation interfered with an arterial blood pulsation is given. In the case where random interference source characteristics may not be obtained, the time domain algorithm has almost no way to accurately calculate the blood oxygen saturation value; in addition, it is very difficult to obtain the random interference source characteristics.

[0081] As mentioned in the background art, each frequency spectrum band in the frequency domain signal uniquely corresponds to the blood oxygen saturation. Theoretically, the blood oxygen saturation may be calculated for each frequency spectrum band; and due to the randomness of the venous interference, interferences superimposed on different frequency bands also have different weights. The venous oxygen compensation (VOC) method proposed in the present application is constructed based on the two hypothetical models. When the blood oxygen value deviation between the frequency spectrum bands is relatively large, it indicates that the venous pulsation has interfered with the real blood oxygen result, and a difference distribution feature is obtained by collecting and analyzing the change in the blood oxygen value deviations of the frequency spectrum bands, and based on this, the compensation coefficient is constructed to eliminate the interference in a blood oxygen sampling signal, and finally the parameter result infinitely approximating the true physiological blood oxygen may be obtained by recalculating the sampling signal with the interference eliminated.

[0082] Therefore, the process of the venous oxygen compensation (VOC) method is as follows:

Firstly, after the time-to-frequency domain transformation is completed, the difference between the blood oxygen saturations of the frequency spectrum bands in the frequency domain signal is statistically analyzed, thereby obtaining the difference distribution feature. That is, the frequency spectrum peaks that satisfy the condition are obtained from the frequency spectrum signal, and then the oxygen saturation of each frequency spectrum peak is calculated to obtain a blood oxygen saturation sequence. The frequency spectrum peaks satisfying the condition means that they are conform to the range of statistical analysis in terms of the amplitude, energy, width, and morphology. The determination criterion is established in accordance with the characteristics of the physiological signal and the basic method for processing a digital signal. Based on the blood oxygen saturation sequence, the mean value (vMean), the standard deviation (vStd), the maximum value (vMax), the minimum value (vMin), etc. of the blood oxygen are statistically obtained.

Secondly, the compensation coefficient calculation formula is constructed, and the compensation coefficient is

calculated based on the difference distribution feature.

[0083] As shown in Fig. 13, the calculation process of the compensation coefficient is given.

[0084] In a first step, the difference between v_{Max} and v_{Min} is compared with a first threshold (Threshold1), and the v_{Std} value is compared with a second threshold (Threshold2) to determine whether a normal mode or an interference mode is selected. The first threshold and the second threshold are selected to be empirical coefficients obtained according to the characteristics of the physiological parameter and the characteristics of a blood oxygen system. For example, in an example, the first threshold (Threshold1) may be 15% of a blood oxygen deviation, and the second threshold (Threshold2) may be 5% of the blood oxygen deviation.

[0085] In a second step, if the normal mode is selected, it indicates that the fluctuation caused by the venous oxygen is relatively small, and the mean value and the standard deviation may be selected to be the input source of the compensation coefficient calculation formula. The mean value is used as the denominator input source, if the number of blood oxygens exceeding the mean value in the blood oxygen sequence accounts for at least half of the total number of the sequence, $v_{Mean} + v_{Std}$ is used as the numerator, otherwise, $v_{Mean} - v_{Std}$ is used as the numerator.

[0086] In a third step, which is alternative to the second step, if the abnormal mode is selected, it is necessary to introduce a repetition factor. There are two sources of repetition factors: 1) the maximum blood oxygen set, which satisfies a certain value (e.g., $\pm 2\%$), in a blood oxygen sequence is collected and analyzed, and the mean value of the set is taken as the repetition factor, wherein $\pm 2\%$ here is an empirical coefficient which may be adjusted according to the actual change; and 2) a stable segment of the historical trend of the blood oxygen is selected, for example, the stable trend of 4 s - 8 s, the mean value of the set is calculated as the repetition factor, and the time period of 4 s - 8 s is also an empirical coefficient which may be adjusted according to the actual change. This repetition factor is used as the numerator input source, and the mean value is used as the denominator input source.

[0087] In a fourth step, the numerator and denominator parameters are input into Formula 2 below to calculate the compensation coefficient. The calculation formula is as follows, where $tabR$ is a mapping table of blood oxygen and R curve coefficients (as described above), and the corresponding R coefficient values may be obtained by means of inverse look-up according to the input blood oxygen value. The compensation coefficient is the ratio of the R coefficient value of the numerator blood oxygen to the R coefficient value of the denominator blood oxygen.

$$Factor_{compensation} = tabR(Numerator)/tabR(Denominator) \dots \text{Formula 2}$$

[0088] $Factor_{compensation}$ is the compensation coefficient, $tabR(Numerator)$ is the R coefficient value obtained by means of look-up after the numerator is used as the input source and substituted into the mapping table of blood oxygen and R curve coefficients, and $tabR(Denominator)$ is the R coefficient value obtained by means of look-up after the denominator is used as the input source and substituted into the mapping table of blood oxygen and R curve coefficients.

[0089] The following will be combined with a practical example to illustrate how to calculate a compensation coefficient in the venous oxygen compensation (VOC) method. As shown in Fig. 16, a schematic diagram of blood oxygen distribution in a frequency spectrum band under an interference condition is given, assuming that the frequency spectrum signal has four frequency spectrum peaks A, B, C and D in a physiological bandwidth of 0.3 Hz - 5 Hz, and assuming that the frequency spectrum signal is affected by a random pulsation of venous oxygen, and the oxygen saturation values of the frequency spectrum peaks obtained by converting the ratio of infrared light to red light are 96%, 85%, 90%, 87%, respectively. There is a deviation between the calculated values of the four blood oxygen saturation values. By collecting and analyzing the deviation distribution feature, the following may be respectively obtained: $v_{Mean} = 88.3\%$, $v_{Std} = 4.8\%$, $v_{Max} = 96\%$, and $v_{Min} = 85\%$. It is determined that the deviation of v_{Max} from v_{Min} is less than the first threshold (e.g., 15%), and v_{Std} is less than the second threshold (e.g., 5%), so the normal mode is selected. At this point, the number of blood oxygens exceeding the mean value is 2, accounting for 50% of the total blood oxygen sequence, so the numerator is selected as $v_{Mean} + v_{Std} = 93.1\%$, and the denominator is $v_{Mean} = 88.3\%$. The R values corresponding to the numerator and the denominator are respectively obtained by looking up the mapping table of blood oxygen and R curve coefficients, and are substituted into Formula 2, so that a correction factor of about 1.172 may be calculated.

[0090] Again, the compensation coefficient is used to compensate for the loss of the time domain signal due to interference (the frequency domain signal is obtained by transforming this signal). That is, the time domain signal used for the frequency domain transformation is multiplied by the compensation coefficient to obtain a compensation signal. In an example of the present application, compensation is only made for the red light signal, as an example. However, in practical applications, the compensation coefficient may also be divided to achieve compensation for each signal.

[0091] Finally, the time domain signal that completes the compensation is used to be transformed to the frequency domain signal again, and then the frequency domain signal is used to calculate the accurate parameter such as blood oxygen. The embodiment of the present disclosure is an example given based on a frequency domain algorithm. In the

actual application, the frequency domain method may also be omitted, and a time domain algorithm is used to obtain the accurate parameter such as blood oxygen based on the compensated time domain signal.

5 [0092] As shown in Fig. 17, a schematic diagram of a framework process of a venous oxygen compensation (VOC) method is given. The entire process is: selecting a section of a time domain signal, and performing a time-to-frequency domain transformation on same to transform the time domain signal to a frequency domain signal. The characteristics of the physiological signal and the basic knowledge of digital signal processing (e.g., a physiological pulse wave frequency range, a fundamental and multiplied frequency principle, morphological features, etc.) are used, a rational frequency spectrum peak is selected and the blood oxygen saturation parameter of the frequency spectrum peak is calculated. According to the foregoing steps, a series of characteristic information is obtained by statistically analyzing a series of blood oxygen distribution, and according to the characteristic information, whether the blood oxygen saturations have a deviation (or a small deviation) is determined. If not, the result of the blood oxygen parameter is output; otherwise, the compensation coefficient is calculated based on the characteristic information and is compensated into the time domain signal. Finally, the compensated time domain signal is then used to re-perform a time-to-frequency domain transformation, the rational frequency spectrum peak is selected based on the new frequency domain signal, and the final blood oxygen saturation parameter is calculated and output.

10 [0093] It may be seen that the venous oxygen compensation (VOC) method may eliminate the measurement deviation of blood oxygenation caused by interference, infinitely approach the true physiological blood oxygen value, and greatly provide the accuracy of the calculation of the blood oxygen parameter under the interference condition.

20 II. Power spectrum array method (PSA)

[0094] As described in the background art, when an interference exists and severely disturbs the frequency spectrum signal, it is difficult to identify physiological frequency spectrum information from the frequency spectrum. For example, in the frequency spectrum diagram shown in Fig. 4, there is no way to identify the information about the fundamental peak based merely on the energy and frequency relationships of the fundamental and multiplied frequency principle. How to identify the physiological frequency spectrum peak under an interference condition? The present application proposes a hypothesis theory based on the characteristics of random distribution of noise. Any type of interference, such as weak perfusion, limb rubbing, finger shaking, etc., is presented as a random interference component in a blood oxygen sampling signal, and the intensity of the interference is positively correlated with the intensity of movement of the measuring end. Considering the state of the physiological characteristics, most of the interferences are presented as random white noise distribution; and a few thereof are relatively regular interferences (e.g., Parkinson's disease), because of the relatively low amplitude of vibration, the vibration frequency is relatively high, but has no substantial effect on the blood oxygen sampling signal, that is, does not affect the measurement of the blood oxygen parameter. Although the interference signal disturbs the frequency spectrum signal such that the physiological frequency spectrum may not be recognized, no matter how the interference signal changes, the characteristics of the physiological frequency spectrum peak always exist at a certain frequency point and will not change or change slowly in a certain period of time (the physiological characteristics); and at the same time, the interference noise is randomly distributed, and the characteristics of the frequency spectrum change over time. By arranging the frequency spectrum at each moment in chronological order and observing the characteristics of the frequency spectrum signal longitudinally, it may be found that when the amplitudes and positions of most of the frequency spectrum peaks change, there is always at least one frequency spectrum peak, the position of which is relatively stable and does not shift. This frequency spectrum peak is the physiological frequency spectrum peak (fundamental frequency peak). If an identification algorithm may be used to find the frequency spectrum peak, it means that the correct pulse rate value is found. This is the core idea of the power spectrum array method.

35 [0095] In the present application, the general process of the power spectrum array (PSA) method is as follows:

40 Firstly, a cache is established to store information about the frequency spectrum peaks. For example, frequency spectrum peak position information, that is, the currently-located frequency point (PeakArray); frequency spectrum peak position weight information (WeightedArray); and information about the number of frequency spectrum peaks stored (ArrayIndex), wherein the position information and the weight information share the number information. In general, the number of frequency spectrum peaks examined should not be too large. Too many frequency spectrum peaks will increase the complexity and computational complexity of the algorithm identification. For example, 20 may be selected as the upper limit by default, beyond which the analysis would not be carried out. It will be understood that in practical applications, the appropriate number of analysis may also be selected according to the requirements of the system.

45 Secondly, rational frequency spectrum peaks are screened from the frequency domain signal and are filled into the above cache. The criteria for screening are based on a combination of information such as the energy, amplitude, shape, and position of the frequency spectrum peak. When recording the information, the position information about

the frequency spectrum peak is written into the PeakArray, the corresponding position weight in the WeigtedArray is incremented, and the total length ArrayIndex is incremented. By analogy, all the frequency spectrum peaks identified by one calculation are added into the cache. If information recording occurs ≥ 2 times, there is a need to consider whether the frequency spectrum peak to be added is already stored in the cache. If it exists, the corresponding position weight of the WeigtedArray is incremented, otherwise the new frequency spectrum peak is added in the conventional manner. Assuming that each calculation interval is 2 S, the cache needs to accumulate frequency spectrum information for a certain period of time before the identification of the physiological frequency spectrum peak may be initiated. This time needs to be set according to the actual requirements of the system. For example, it may be set to 10 times of calculations, that is, the time trend of 20 S. When 10 times of information storage is satisfied, the relevant trend analysis is started, and after the trend analysis is completed, the earliest stored frequency spectrum information is reduced.

[0096] Again, the true physiological frequency spectrum peak is identified according to the information about the cache. According to the fundamental and multiplied frequency principle, the multiplied frequency peaks in the PeakArray are eliminated; at the same time, the weight coefficients of the multiplied frequency peaks are converted according to the frequency multipliers and added to the weight coefficient of the fundamental frequency peak (for example, the fundamental frequency peak weight coefficient is 3, the weight coefficient of a 2-multiplied frequency peak is 2, the weight coefficient of 2 is divided by the frequency multiplier of 2 to obtain the adjusted weight coefficient of 1, which is added to the weight coefficient of the fundamental frequency peak, that is, the weight coefficient of the fundamental frequency peak is adjusted to 4), and the information about the multiplied frequency stored in the PeakArray and WeigtedArray is eliminated, i.e., is initialized to 0. The detailed process is as shown in Fig. 18, at this point, it may be assumed that each frequency spectrum peak is the fundamental frequency peak, all the other frequency spectrum peaks are traversed, and it is determined whether the other frequency spectrum peaks and the assumed fundamental frequency peak satisfy a frequency multiplication relationship, and if so, the information about the multiplied frequency peaks is eliminated; otherwise, remaining the information. According to the characteristics of the energy attenuation of the fundamental and multiplied frequencies, and the physiological characteristics, in general, the influence of the multiplied frequency having a multiplier more than 4 is relatively small, which may be selected and set according to the requirements of the system in practical applications. Following a similar operation, each frequency spectrum peak is traversed, to complete the elimination of the information about the multiplied frequency peaks. Finally, the peaks with the first three largest weight coefficients are selected as the input information for the next step.

[0097] Finally, it is determined whether the maximum weight coefficient of the frequency spectrum peak is greater than or equal to a set threshold (for example, the threshold may be set to be 8, indicating that there is a stable frequency spectrum peak for 16 s consecutively, which may be selected and set according to the requirements of the system in practical applications). If two or more frequency spectrum peaks satisfy the weight coefficient greater than or equal to the set threshold, there is a need to further make a determination based on the physiological characteristics. For example, under an interference condition, the physiological pulse rate may not be too high and may not be relatively low. The most rational frequency spectrum peak that satisfies the set threshold is selected, the pulse rate parameter is calculated and output, and the weight coefficients of the other frequency spectrum peaks are optimized according to the state at the same time.

[0098] As shown in Fig. 19, a schematic diagram of a process of a power spectrum array (PSA) method is given. It may be seen that the frequency spectrum peak information cache is firstly established, and the cache is filled in chronological order. When the cache is filled up, the stored frequency spectrum peaks are simplified according to the fundamental and multiplied frequency principle, and the frequency spectrum peaks that satisfy the set threshold are selected from the simplified frequency spectrum peaks. If the number of frequency spectrum peaks that satisfy the condition is greater than or equal to two, an exclusion operation is performed on same according to the criterion of converting the physiological characteristics, and finally one rational frequency spectrum peak is selected, and the pulse rate parameter is calculated based on this frequency spectrum peak. The power spectrum array (PSA) method may eliminate the measurement deviation of the pulse rate caused by interference, may accurately identify the physiological frequency spectrum information even under the long-term interference condition, and greatly provides the accuracy of the calculation of the pulse rate parameter under the interference condition.

[0099] In summary, the venous oxygen correction (VOC) method may identify the interference of venous oxygen and compensate for the blood oxygen deviation caused by the interference, and the power spectrum array (PSA) method may accurately identify the pulse rate information in a continuous interference. Each of the two methods has the ability to identify and process the interference. Therefore, when the two methods are combined, the identification and suppression of the interference may be significantly improved, thereby obtaining the great improvement in the accuracy of the calculation of the blood oxygen parameter and the accuracy of the pulse rate parameter.

[0100] As shown in Fig. 20, an example of the combined application of the two solutions in the method provided by the present disclosure is shown. In practical applications, these steps may be adaptively added, deleted, and adjusted

according to the requirements of the system. The general process is as follows: selecting a specified section of a time domain signal, performing a time-to-frequency transformation on same, and perform a retrieval and identification on frequency spectrum peaks based on the transformed frequency spectrum signal, and calculating a blood oxygen value of each rational frequency spectrum peak at the same time. The blood oxygen values of the rational peaks are collected and analyzed to obtain relevant statistical information to prepare for the VOC, and the information about all the frequency spectrum peaks obtained by the current calculation is also recorded to prepared for the PSA. If a pair of fundamental and multiplied frequency groups are identified and the relative deviation of the blood oxygen values of the frequency spectrum peaks is relatively small, the fundamental frequency peak is directly selected to calculate the pulse rate, and the finally resulting blood oxygen and pulse rate values are output. If the pair of fundamental and multiplied frequency groups is not satisfied, the PSA method is implemented, and the rational frequency spectrum peak is calculated. If the time domain signal with the noise/compensated venous oxygen being eliminated is based, but the blood oxygen value is unstable (for example, it does not match the historical trend result), only the pulse rate parameter is calculated and output; otherwise, if the blood oxygen value is stable, the pulse rate value is calculated, and the finally resulting blood oxygen and pulse rate values are output; if the first calculation is performed (the noise/compensated venous oxygen is not eliminated from the time domain signal) and the blood oxygen value is unstable, a VOC identification branch is implemented. A specific filter of the frequency spectrum peaks obtained based on the PSA method is added to the VOC identification branch. Combining the compensation coefficient with the specific filter, the time domain signal is compensated and the noise is eliminated, and then the time-to-frequency domain transformation is performed again and the relevant parameter is calculated.

[0101] In summary, the methods and the medical equipment provided in the embodiments of the present disclosure have the following beneficial effects:

firstly, the embodiments of the present disclosure are based on the frequency domain technology combined with the time domain technology, may greatly improve the calculation accuracy of the blood oxygen and pulse rate parameters under weak perfusion and movement states, bring a client an excellent clinical performance experience, and may greatly improve the application and promotion of the blood oxygen parameter;

secondly, the present disclosure is implemented by combining the characteristics of time and frequency domain signals with the characteristics of the human physiological parameter, the venous oxygen compensation method and the power spectrum array method are used in the case of interference, so as to improve the accuracy of calculating the pulse rate value and the blood oxygen parameter under weak irrigation and movement conditions. The venous oxygen compensation method may eliminate the measurement deviation of blood oxygenation caused by interference, infinitely approach the true physiological blood oxygen value, and greatly provide the accuracy of the calculation of the blood oxygen parameter under the interference condition. The power spectrum array method may eliminate the measurement deviation of the pulse rate caused by interference, may accurately identify the physiological frequency spectrum information even under the long-term interference condition, and greatly provides the accuracy of the calculation of the pulse rate parameter under the interference condition.

[0102] In addition, the methods provided in the embodiments of the present disclosure have low computational complexity and low demand for computing resources.

[0103] Those skilled in the art may understand that the implementation of all or part of the steps in the methods of the above embodiments may be completed by a program to instruct related hardware, and the program may be stored in a computer readable storage medium, such as a ROM/RAM, a magnetic disk, an optical disc, etc.

[0104] The above are only the preferred embodiments of the present disclosure, and are not intended to limit the present disclosure. Any modifications, equivalents, and improvements made within the spirit and principles of the present disclosure should be included in the scope of the present disclosure.

Claims

1. A method for calculating a physiological parameter, comprising:

selecting a section of a time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a time-to-frequency domain transformation on the section of the time domain signal to obtain a corresponding frequency domain signal;

selecting all rational frequency spectrum peaks from the frequency domain signal, calculating energy information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak energy ratio sequence;

constructing a stability coefficient according to the frequency spectrum peak energy ratio sequence, and if the

stability coefficient is relatively low, constructing a compensation coefficient by using the frequency spectrum peak energy ratio sequence; and compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal.

2. The method of claim 1, wherein the rational frequency spectrum peaks satisfy at least one of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship.

3. The method of claim 1, wherein the stability coefficient is constructed based on deviation statistics for energy ratios of the red light and the infrared light, or is an empirical coefficient; and if the stability coefficient is less than or equal to a set threshold, the stability coefficient is determined to be relatively low.

4. The method of claim 3, wherein the step of constructing the stability coefficient according to the frequency spectrum peak energy ratio sequence comprises: constructing the stability coefficient according to a predetermined algorithm by using information about a mean value, a standard deviation, a maximum value, and a minimum value of a statistical spectrum peak energy ratio deviation sequence.

5. The method of claim 4, wherein if the stability coefficient is relatively low, the step of constructing the compensation coefficient by using the frequency spectrum peak energy ratio sequence comprises: selecting the mean value and converting same by means of a coefficient table to a denominator of a compensation coefficient calculation formula, and selecting (the mean value + the standard deviation) or (the mean value - the standard deviation) and converting same by means of a coefficient table to a numerator of the compensation coefficient calculation formula, and calculating a ratio of the numerator to the denominator to obtain the compensation coefficient.

6. The method of claim 4, wherein the physiological parameter is at least one of blood oxygen, pulse rate, waveform area, and perfusion index.

7. A medical equipment for calculating a physiological parameter, comprising:

a sensor comprising at least one light emitting tube and at least one receiving tube, the light emitting tube emitting at least two optical signals of different wavelengths for transmitting through a physiological tissue, and the receiving tube receiving the at least two optical signals transmitted through the physiological tissue and converting the at least two optical signals received into electrical signals; an analog-to-digital converter connected to the sensor to convert the electrical signals into digital signals, the digital signals include at least some of the characteristics of the physiological tissue; a digital processor connected to the analog-to-digital converter, the digital processor performing the following process:

performing a time-to-frequency domain transformation on a section of the digital signal to obtain a corresponding frequency domain signal; selecting all rational frequency spectrum peaks from the frequency domain signal, calculating energy information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak energy ratio sequence; constructing a stability coefficient according to the frequency spectrum peak energy ratio sequence, and if the stability coefficient is relatively low, constructing a compensation coefficient by using the frequency spectrum peak energy ratio sequence; and compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated digital signal and frequency domain signal.

8. The medical equipment of claim 7, wherein the two optical signals are red light and infrared light.

9. The medical equipment of claim 7, wherein the at least some of the characteristics of the physiological tissue is one or more of the optical characteristics of oxygenated hemoglobin, deoxyhemoglobin, methemoglobin, total hemo-

globin, and carbon monoxide in the blood.

10. The medical equipment of claim 7, further comprising:

5 a display unit connected to the digital processor to display the physiological parameter calculated by the digital processor; and/or
a communication unit connected to the digital processor to send the physiological parameter calculated by the digital processor.

11. The medical equipment of claim 7, wherein the rational frequency spectrum peaks satisfy at least one of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship.

12. The medical equipment of claim 8, wherein the stability coefficient is constructed based on deviation statistics for energy ratios of the red light and the infrared light, or is an empirical coefficient.

13. The medical equipment of claim 12, wherein the process of constructing, by the digital processor, the stability coefficient according to the frequency spectrum peak energy ratio sequence comprises: constructing the stability coefficient according to a predetermined algorithm by using information about a mean value, a standard deviation, a maximum value, and a minimum value of a statistical spectrum peak energy ratio deviation sequence.

14. The medical equipment of claim 13, wherein the process of constructing, by the digital processor, the compensation coefficient by using the frequency spectrum peak energy ratio sequence comprises:
selecting the mean value and converting same by means of a coefficient table to a denominator of a compensation coefficient calculation formula, and selecting (the mean value + the standard deviation) or (the mean value - the standard deviation) and converting same by means of a coefficient table to a numerator of the compensation coefficient calculation formula, and calculating a ratio of the numerator to the denominator to obtain the compensation coefficient.

15. The medical equipment of claim 7, wherein the physiological parameter is at least one of blood oxygen, pulse rate, waveform area, perfusion index, etc.

16. A method for calculating a physiological parameter, comprising:

35 selecting a section of a time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a time-to-frequency domain transformation on the section of the time domain signal to obtain at least one frequency domain signal;
selecting all rational frequency spectrum peaks from the frequency domain signal, calculating position information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak position sequence;
40 constructing a time-varying array map according to the frequency spectrum peak position sequence, and constructing at least one stability factor for each position point that varies over time to form a stability factor array map;
constructing a stability coefficient based on the stability factor array map, and if the stability coefficient is relatively low, calculating a compensation coefficient by using the stability factor array map; and
45 compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal.

17. The method of claim 16, wherein the rational frequency spectrum peaks satisfy at least one or more of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship.

18. The method of claim 16, wherein the stability coefficient is constructed based on at least one of a frequency spectrum energy ratio deviation, a frequency spectrum blood oxygen deviation, a state of a fundamental and multiplied frequency group, a number of rational frequency spectrum peaks, and a frequency spectrum peak morphological rationality.

19. The method of claim 16, wherein the stability factor adjusts a stability weight thereof over time according to at least

one of the characteristics of a fundamental and multiplied frequency group and a frequency spectrum peak morphological rationality.

5 20. The method of claim 19, further comprising determining whether the stability coefficient is relatively low according to at least one of a number of stability factors and weight values.

10 21. The method of claim 16, wherein at least one frequency spectrum peak with the highest weight is selected from the stability factors, and is combined with at least one of frequency characteristics and frequency spectrum peak morphological features to calculate the compensation coefficient.

22. The method of claim 16, wherein the physiological parameter is at least one of blood oxygen, pulse rate, waveform area, perfusion index, etc.

15 23. A medical equipment for calculating a physiological parameter, comprising:

a sensor comprising at least one light emitting tube and at least one receiving tube, the light emitting tube emitting at least two optical signals of different wavelengths for transmitting through a physiological tissue, and the receiving tube receiving the at least two optical signals transmitted through the physiological tissue and converting the at least two optical signals received into electrical signals;

20 an analog to digital converter connected to the sensor to convert the electrical signals into digital signals, the digital signals include at least some of the characteristics of the physiological tissue;

a digital processor connected to the analog to digital converter, the digital processor performing the following processes:

25 performing a time-to-frequency domain transformation on a section of the digital signal to obtain a corresponding frequency domain signal;

selecting all rational frequency spectrum peaks, calculating position information of the selected rational frequency spectrum peaks, and forming a frequency spectrum peak position sequence;

30 constructing a time-varying array map according to the frequency spectrum peak position sequence, and constructing at least one stability factor for each position point that varies over time to form a stability factor array map;

constructing a stability coefficient based on the stability factor array map, and if the stability coefficient is relatively low, calculating a compensation coefficient by using the stability factor array map; and

35 compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated digital signal and frequency domain signal.

24. The medical equipment of claim 23, wherein the two optical signals are red light and infrared light.

40 25. The medical equipment of claim 23, wherein the at least some of the characteristics of the physiological tissue is one or more of the optical characteristics of oxygenated hemoglobin, deoxyhemoglobin, methemoglobin, total hemoglobin and carbon monoxide in the blood.

45 26. The medical equipment of claim 23, further comprising:

a display unit connected to the digital processor to display the physiological parameter calculated by the digital processor; and/or

a communication unit connected to the digital processor to send the physiological parameter calculated by the digital processor.

50 27. The medical equipment of claim 23, wherein the rational frequency spectrum peaks satisfy at least one or more of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship.

55 28. The medical equipment of claim 23, wherein the stability coefficient is constructed based on at least one of a frequency spectrum energy ratio deviation, a frequency spectrum blood oxygen deviation, a state of a fundamental and multiplied frequency group, a number of rational frequency spectrum peaks, and a frequency spectrum peak morphological rationality.

29. The medical equipment of claim 23, wherein the stability factor adjusts a stability weight thereof over time according to at least one of the characteristics of a fundamental and multiplied frequency group and a frequency spectrum peak morphological rationality.
- 5 30. The medical equipment of claim 29, further comprising determining whether the stability coefficient is relatively low according to at least one of a number of stability factors and weight values.
31. The medical equipment of claim 23, wherein the physiological parameter is at least one of blood oxygen, pulse rate, waveform area, perfusion index, etc.
- 10 32. A method for calculating a physiological parameter, comprising:
- selecting a section of a time domain signal corresponding to at least one signal of red light and infrared light obtained by sampling, and performing a time-to-frequency domain transformation on the section of the time domain signal to obtain at least one frequency domain signal;
- 15 selecting all rational frequency spectrum peaks from the frequency domain signal, calculating at least one of energy and position information of the selected rational frequency spectrum peaks, and forming at least one of a frequency spectrum peak energy ratio sequence and a frequency spectrum peak position sequence;
- 20 constructing a stability coefficient according to at least one of the frequency spectrum peak energy ratio sequence and the frequency spectrum peak position sequence, and if the stability coefficient is relatively low, constructing a compensation coefficient by using at least one of the frequency spectrum peak energy ratio sequence and the frequency spectrum peak position sequence; and
- 25 compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated time domain signal and frequency domain signal.
33. The method of claim 32, wherein the rational frequency spectrum peaks satisfy at least one of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship.
- 30 34. The method of claim 32, wherein the stability coefficient is constructed based on at least one of a frequency spectrum energy ratio deviation, a frequency spectrum blood oxygen deviation, a state of a fundamental and multiplied frequency group, and a number of rational frequency spectrum peaks.
- 35 35. The method of claim 32, wherein the compensation coefficient is an energy ratio deviation coefficient calculated based on the frequency spectrum peak energy ratio sequence, or a position coefficient statistically obtained over time based on the frequency spectrum peak position sequence.
- 40 36. The method of claim 32, wherein the step of compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient comprises:
- using the compensation coefficient to perform a gain processing on the selected time domain signal to achieve compensation; or
- 45 using the compensation coefficient to perform filtering processing on the selected frequency domain signal to achieve compensation.
37. The method of claim 32, wherein the physiological parameter is at least one or more of blood oxygen, pulse rate, waveform area, and perfusion index.
- 50 38. A medical equipment for calculating a physiological parameter, comprising:
- a sensor comprising at least one light emitting tube and at least one receiving tube, the light emitting tube emitting at least two optical signals of different wavelengths for transmitting through a physiological tissue, and the receiving tube receiving the at least two optical signals transmitted through the physiological tissue and converting the at least two optical signals received into electrical signals;
- 55 an analog to digital converter connected to the sensor to convert the electrical signals into digital signals, the digital signals include at least some of the characteristics of the physiological tissue;
- a digital processor connected to the analog to digital converter, the digital processor performing the following

processes:

performing a time-to-frequency domain transformation on a section of the digital signal to obtain a corresponding frequency domain signal;

selecting all rational frequency spectrum peaks from the frequency domain signal, calculating at least one of energy and position information of the selected rational frequency spectrum peaks, and forming at least one of a frequency spectrum peak energy ratio sequence and a frequency spectrum peak position sequence; constructing a stability coefficient according to at least one of the frequency spectrum peak energy ratio sequence and the frequency spectrum peak position sequence, and if the stability coefficient is relatively low, constructing a compensation coefficient by using at least one of the frequency spectrum peak energy ratio sequence and the frequency spectrum peak position sequence; and compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient, and calculating the physiological parameter based on at least one of the compensated digital signal and frequency domain signal.

- 39. The medical equipment of claim 38, wherein the two optical signals are red light and infrared light.
- 40. The medical equipment of claim 38, wherein the at least some of the characteristics of the physiological tissue is one or more of the optical characteristics of oxygenated hemoglobin, deoxyhemoglobin, methemoglobin, total hemoglobin and carbon monoxide in the blood.
- 41. The medical equipment of claim 38, wherein the rational frequency spectrum peaks satisfy at least one of a frequency spectrum energy relationship, a frequency spectrum amplitude relationship, a frequency spectrum positional relationship, and a frequency spectrum peak morphological relationship.
- 42. The medical equipment of claim 38, wherein the stability coefficient is constructed based on at least one of a frequency spectrum energy ratio deviation, a frequency spectrum blood oxygen deviation, a state of a fundamental and multiplied frequency group, and a number of rational frequency spectrum peaks.
- 43. The medical equipment of claim 38, wherein the compensation coefficient is an energy ratio deviation coefficient calculated based on the frequency spectrum peak energy ratio sequence, or a position coefficient statistically obtained over time based on the frequency spectrum peak position sequence.
- 44. The medical equipment of claim 42, wherein the process of compensating for at least one of the time domain signal and the frequency domain signal by using the compensation coefficient comprises:
 - using the compensation coefficient to perform a gain processing on the selected time domain signal to achieve compensation; or
 - using the compensation coefficient to perform filtering processing on the selected frequency domain signal to achieve compensation.
- 45. The medical equipment of claim 38, wherein the physiological parameter is at least one of blood oxygen, pulse rate, waveform area, perfusion index, etc.

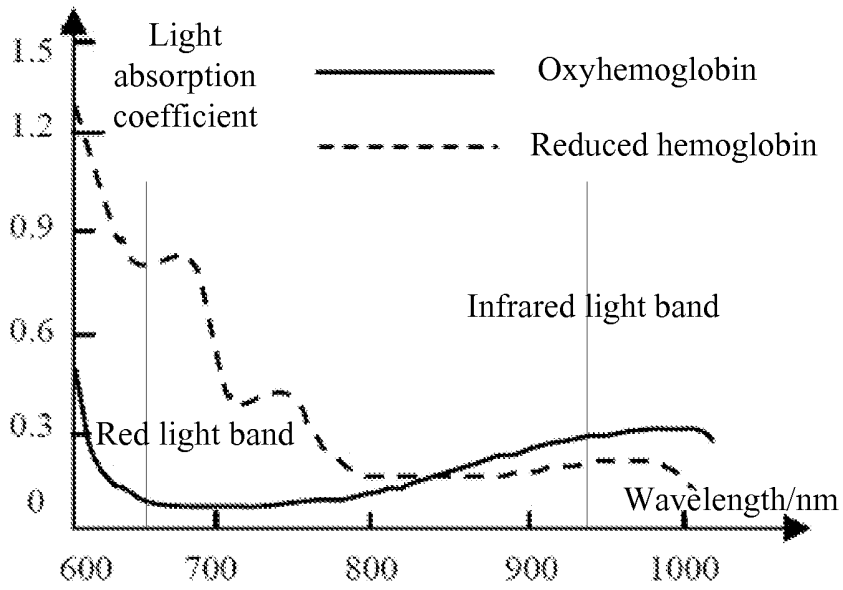


Fig. 1

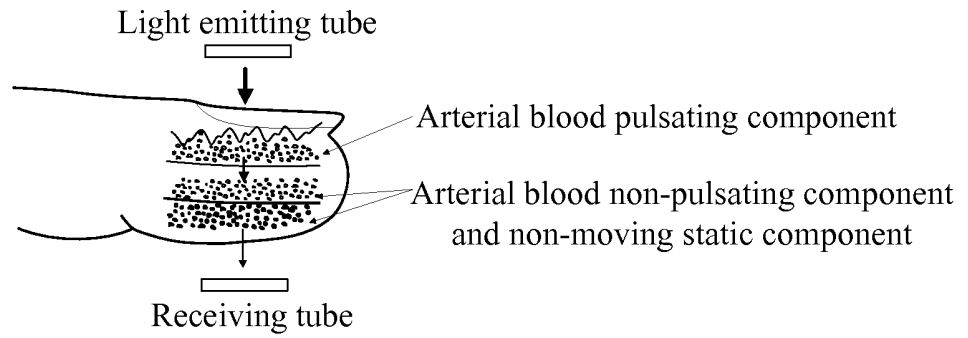


Fig. 2

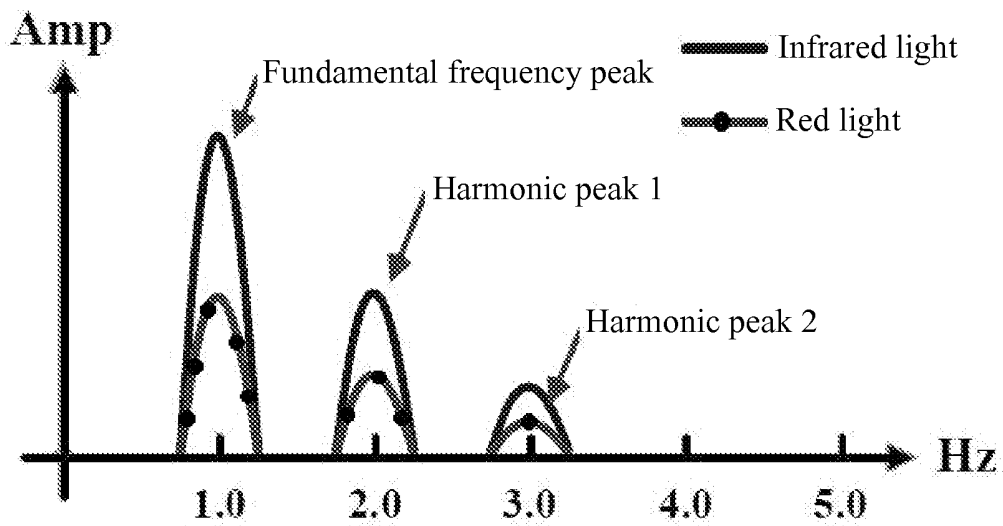


Fig. 3

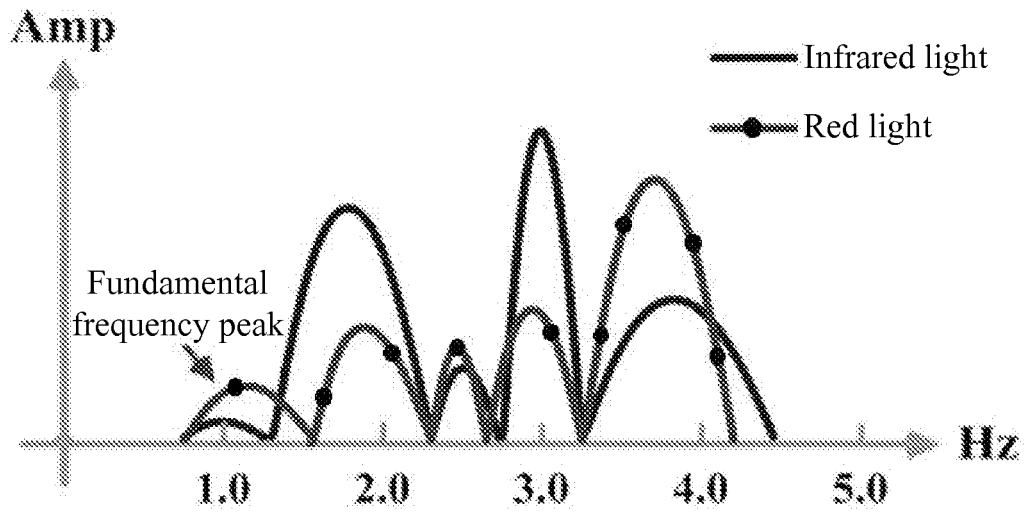
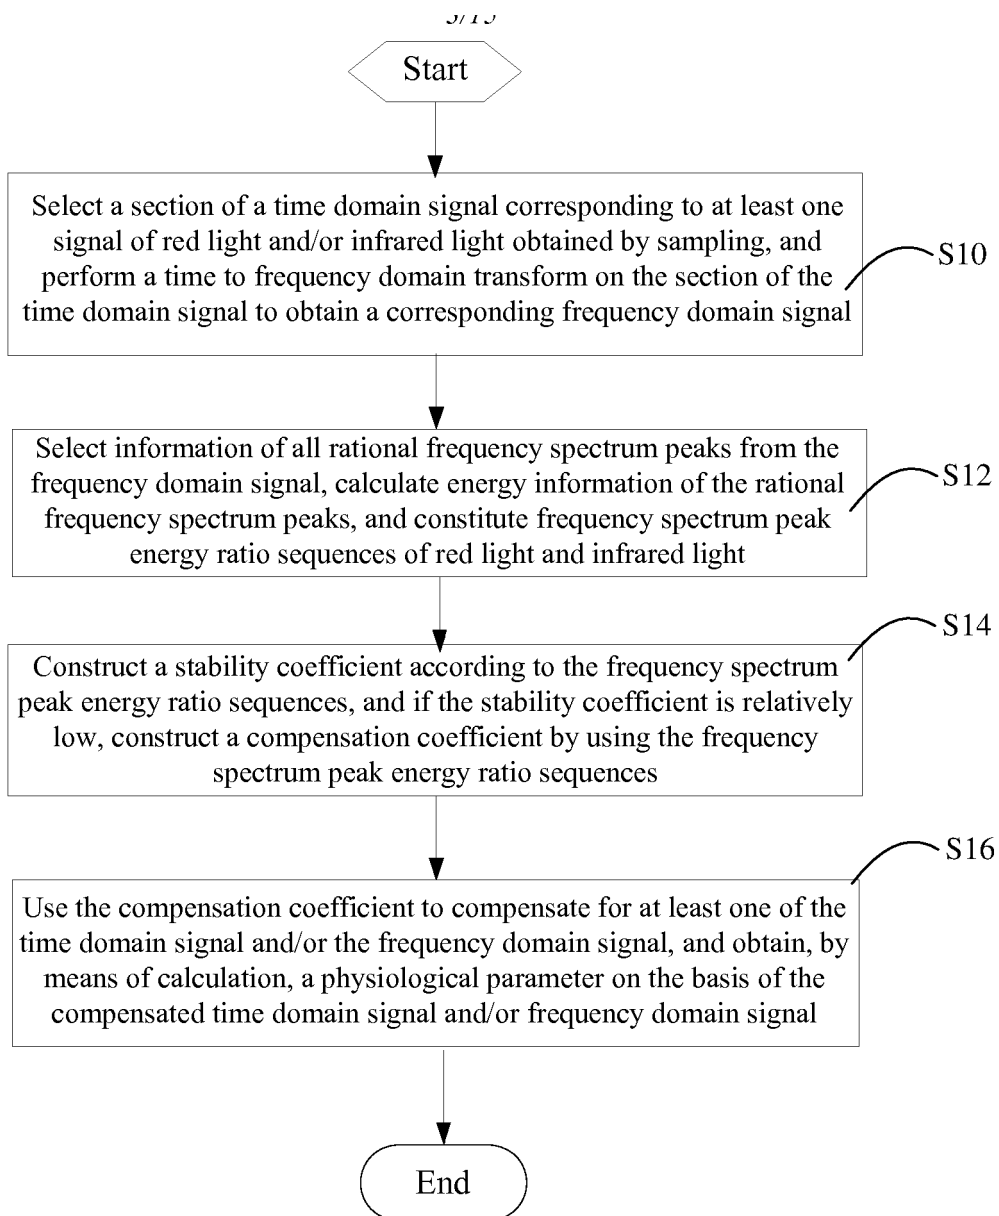
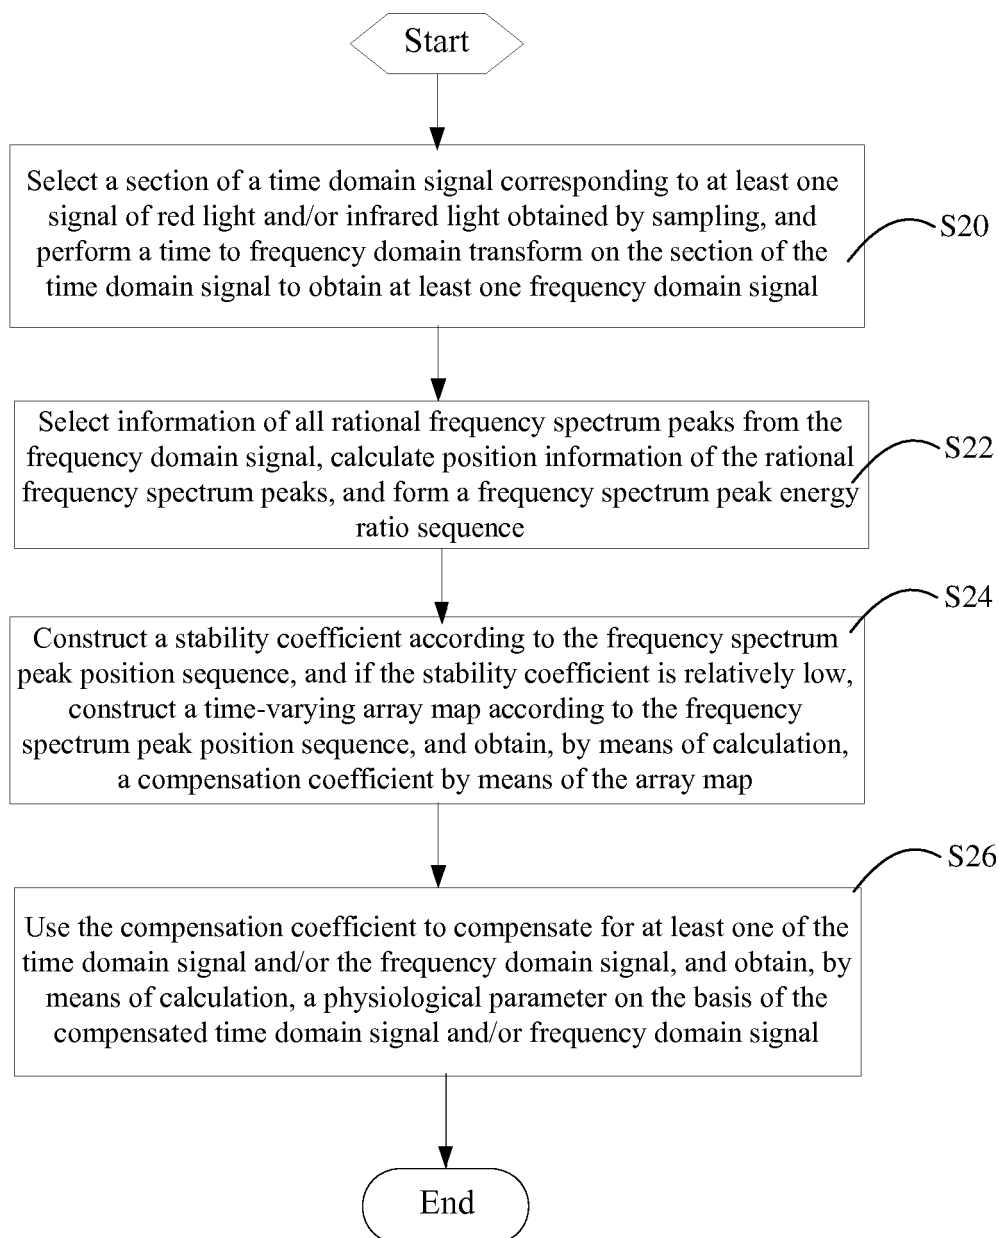
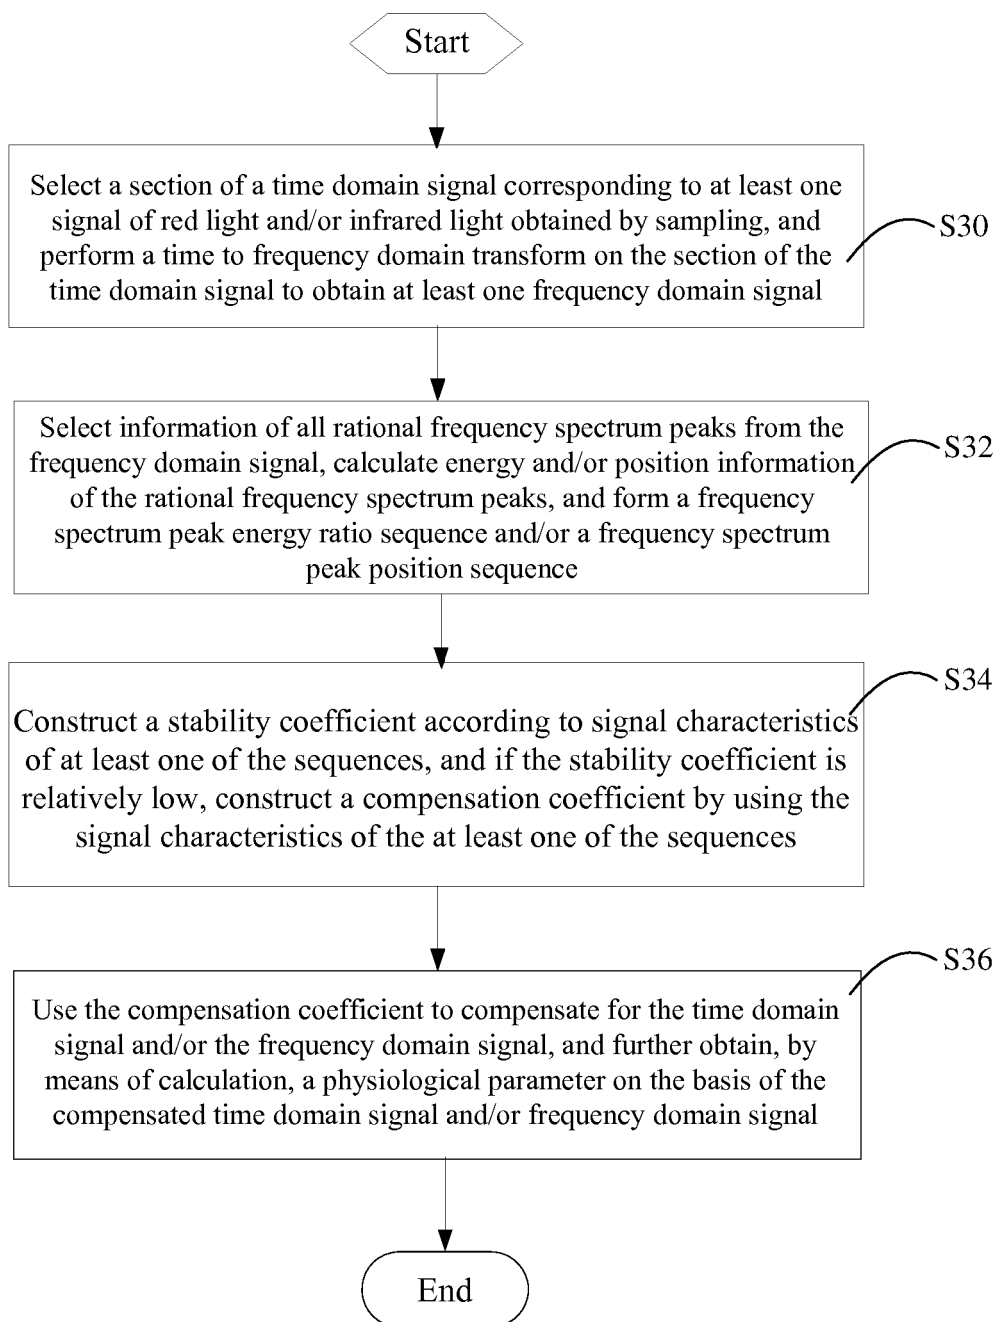


Fig. 4

*Fig. 5*

*Fig. 6*

*Fig. 7*

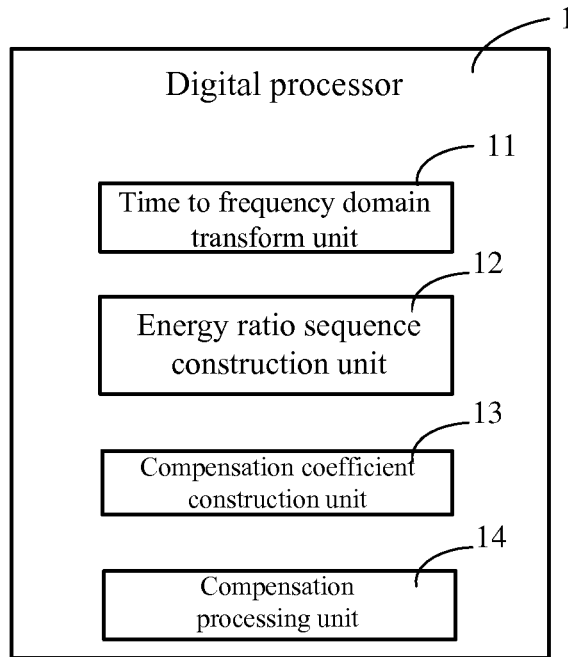


Fig. 8

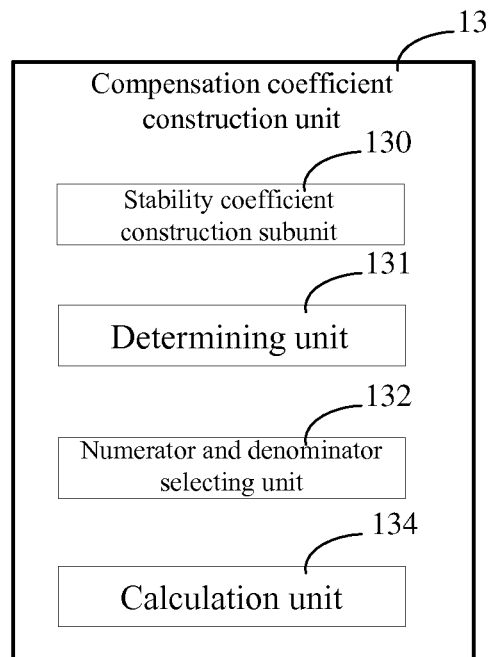


Fig. 9

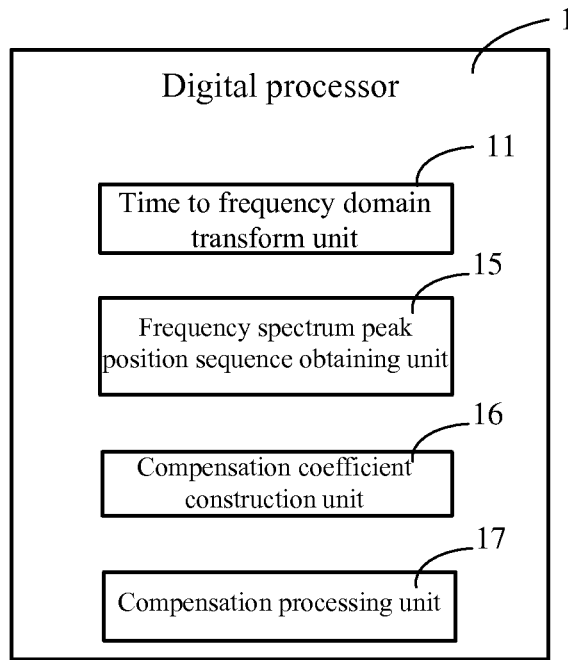


Fig. 10

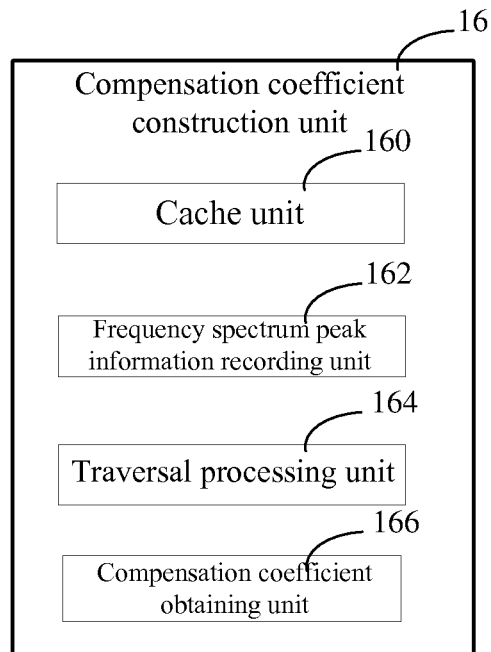


Fig. 11

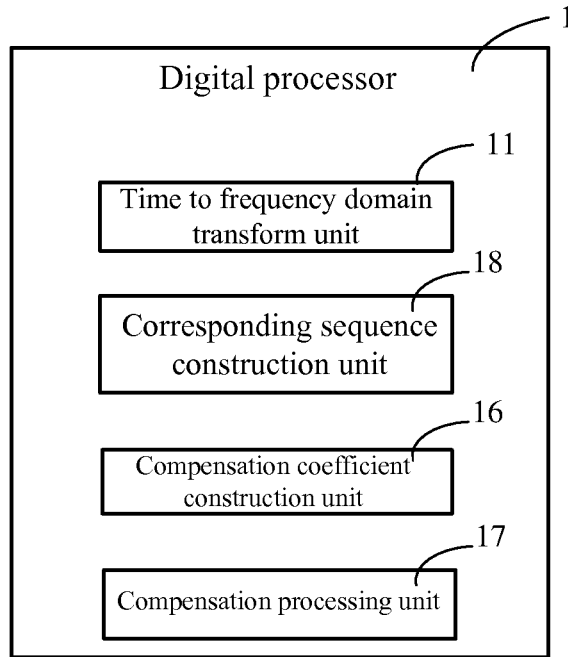


Fig. 12


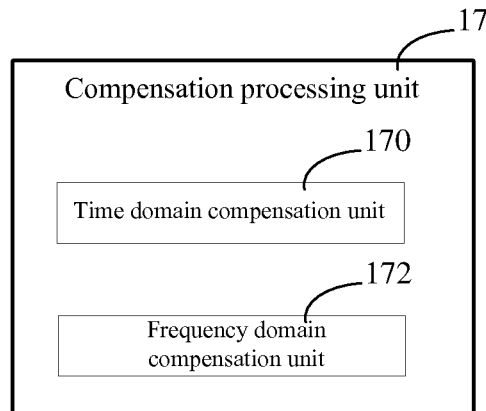


Fig. 13

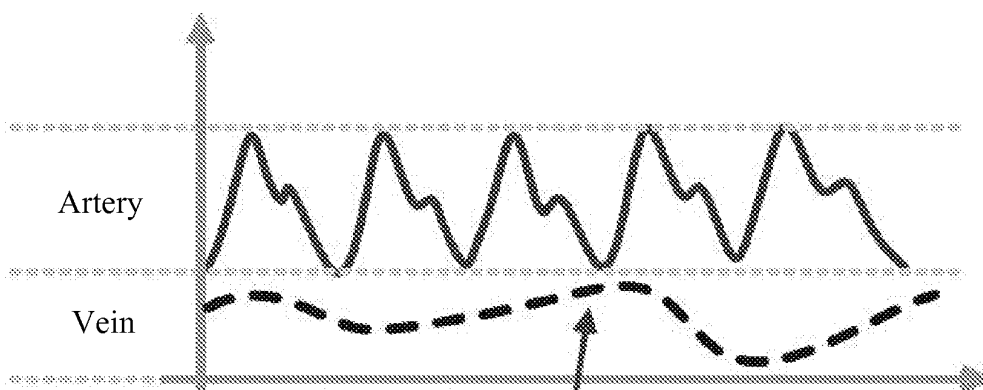

A pulsation is generated in venous blood under interference, and mixed with an arterial blood pulsation, resulting in a blood oxygen value deviating from a blood gas value

Fig. 14

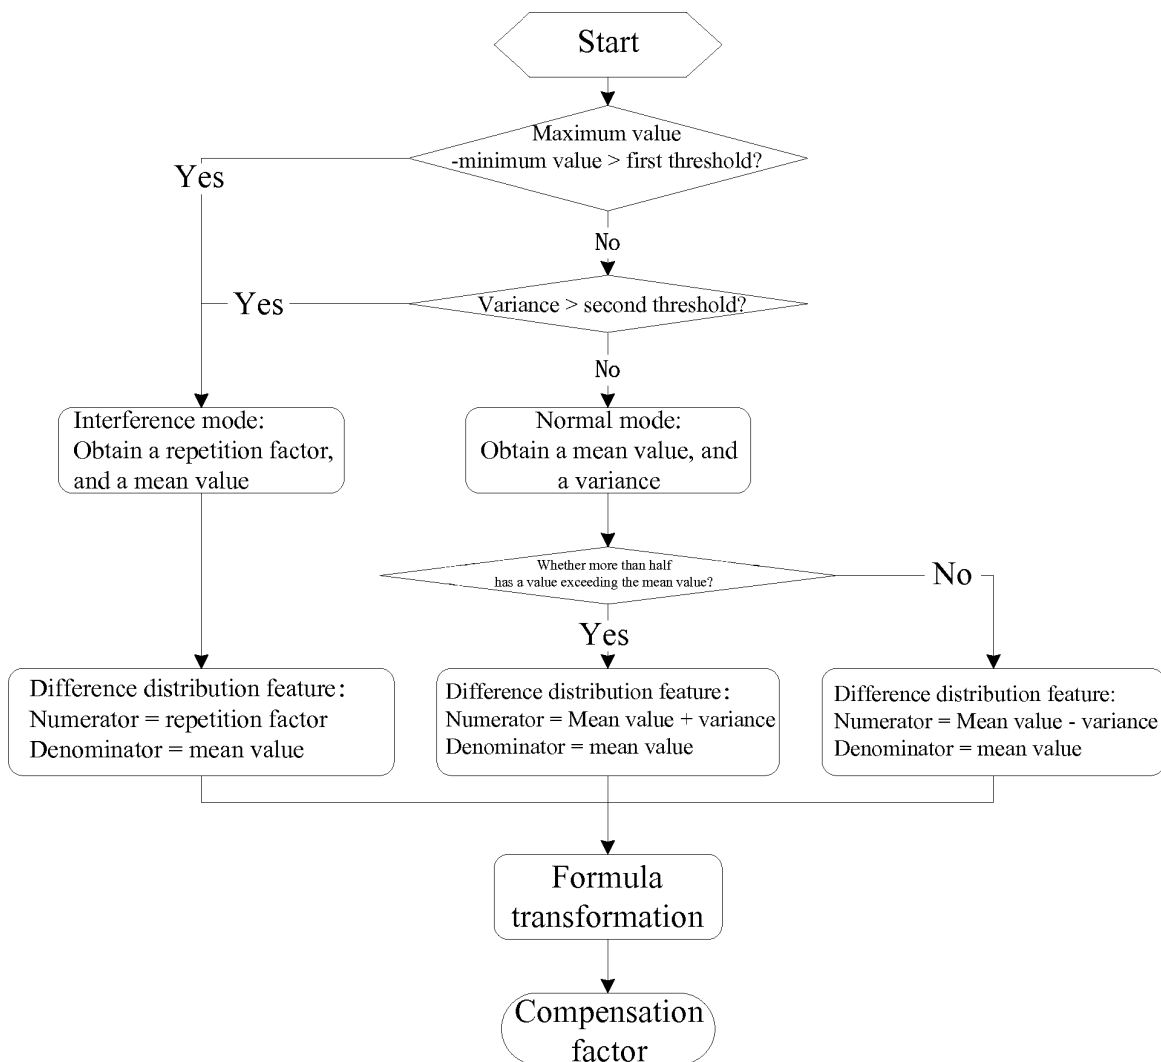


Fig. 15

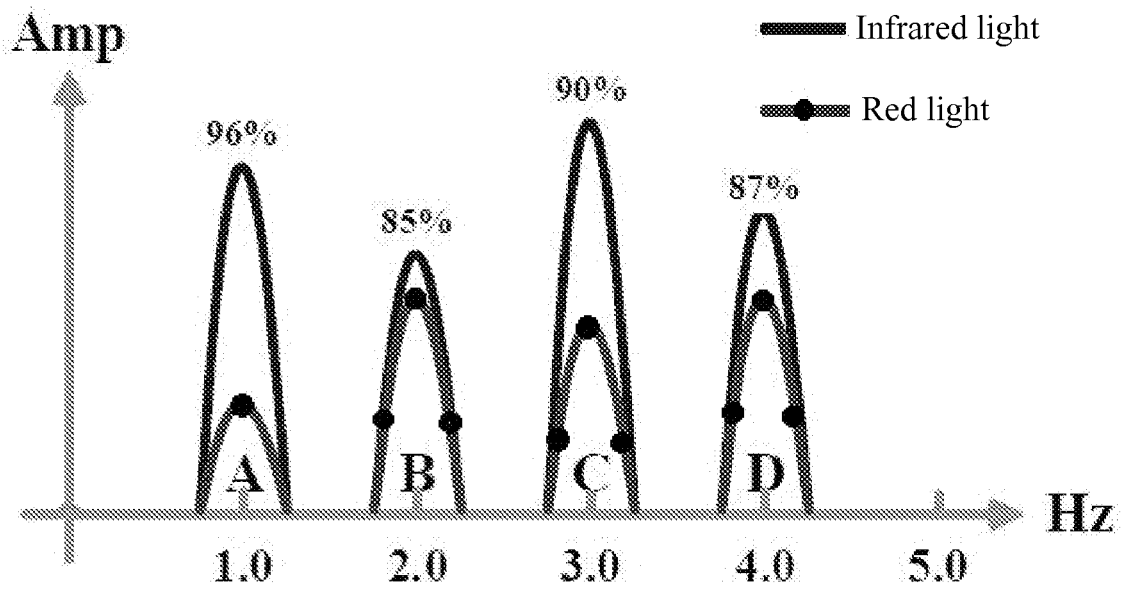


Fig. 16

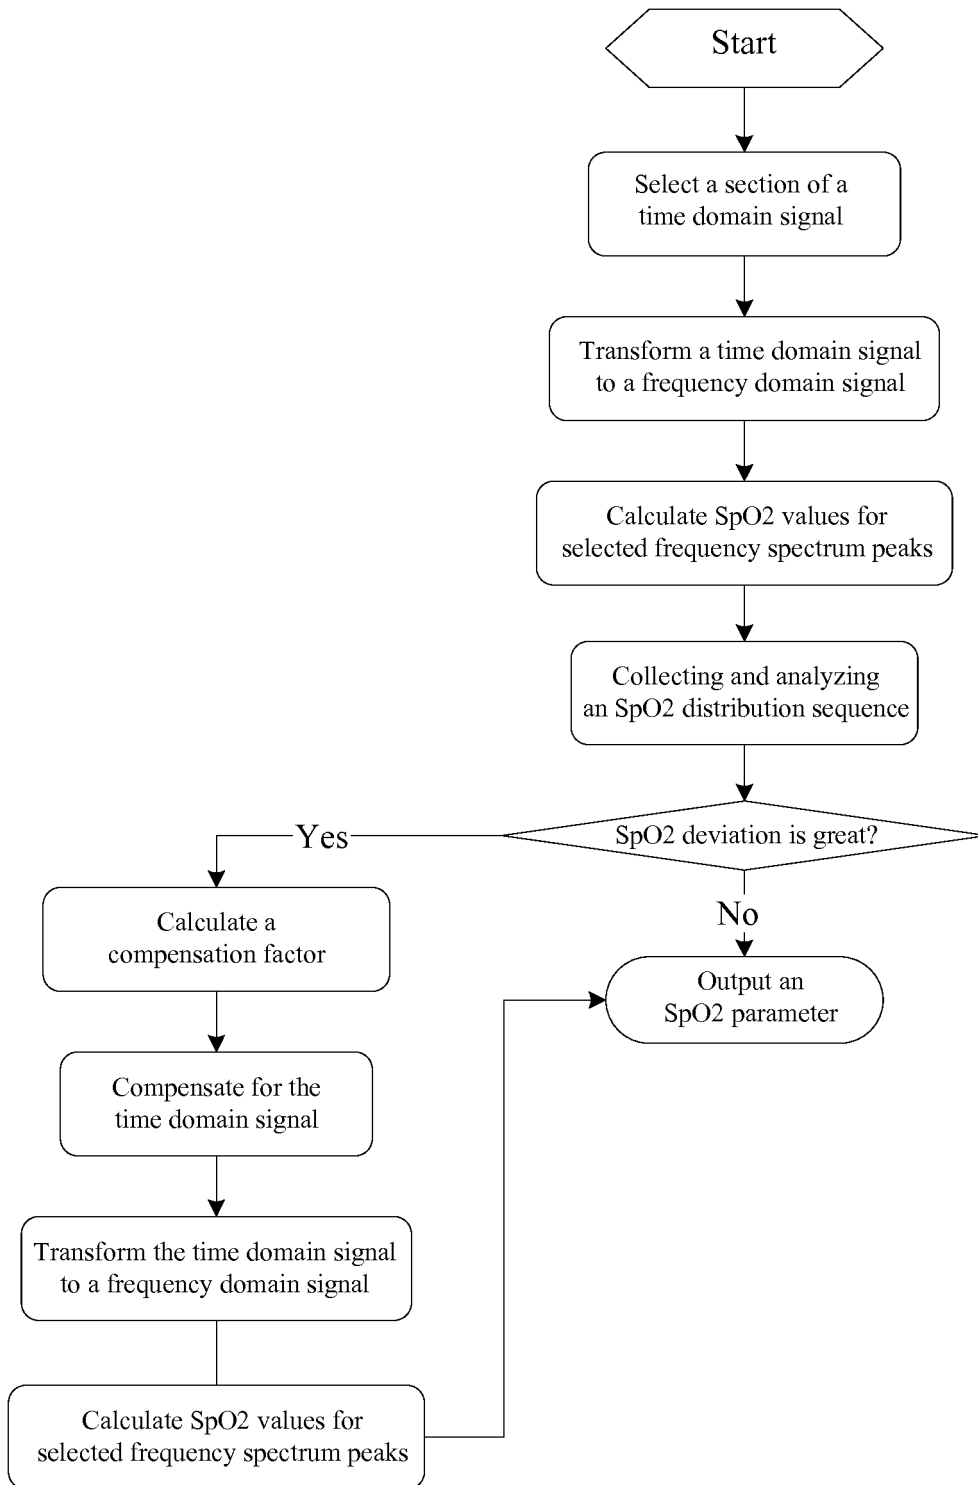


Fig. 17

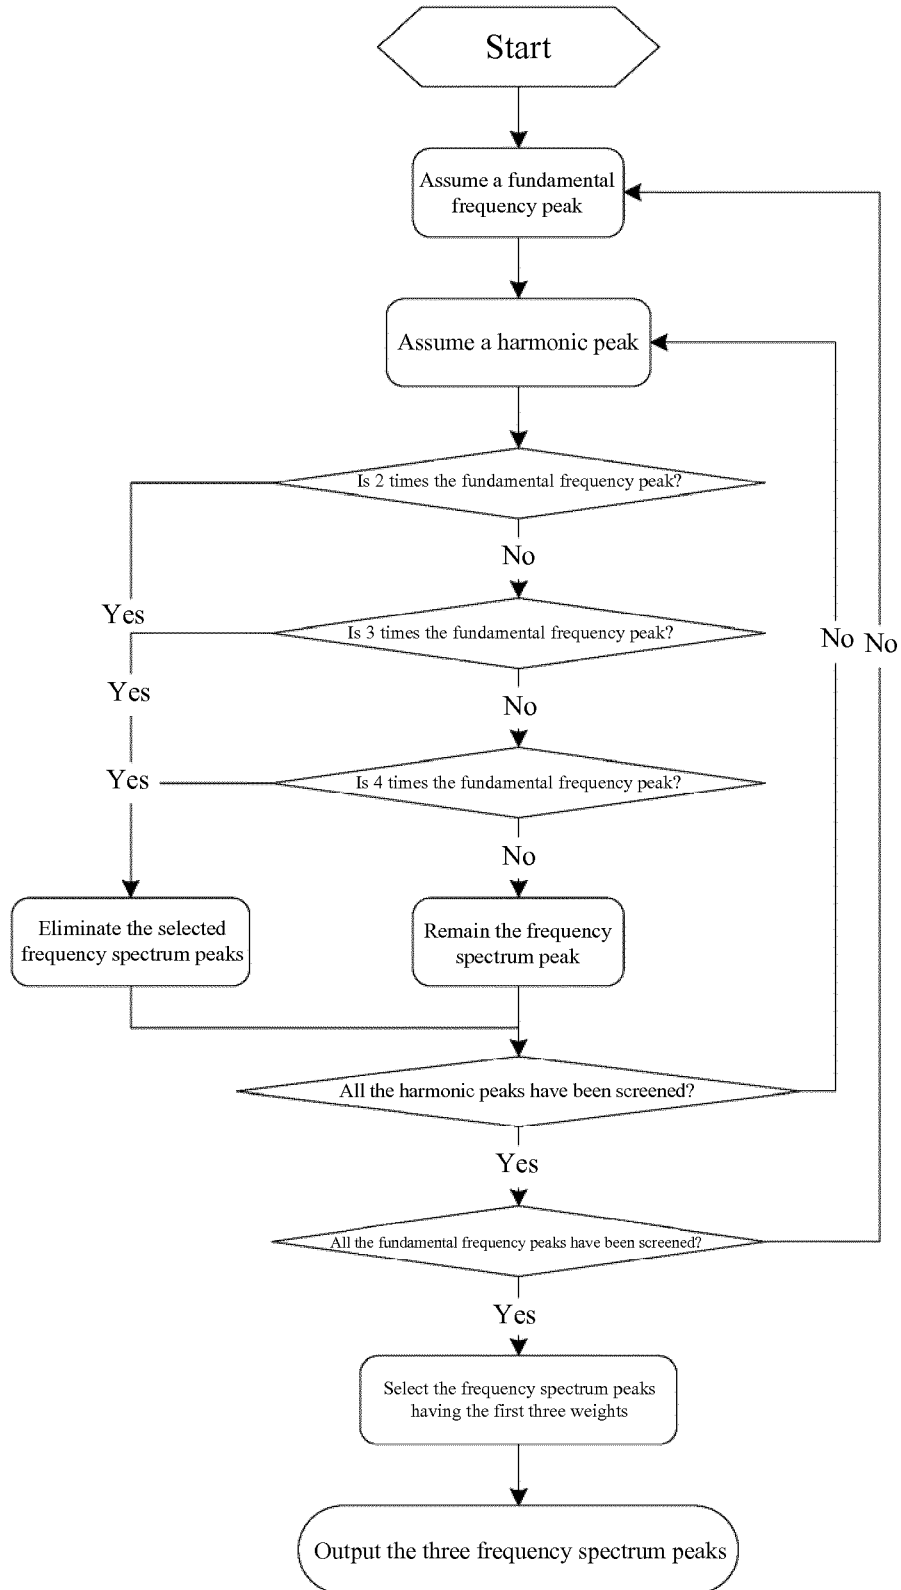


Fig. 18

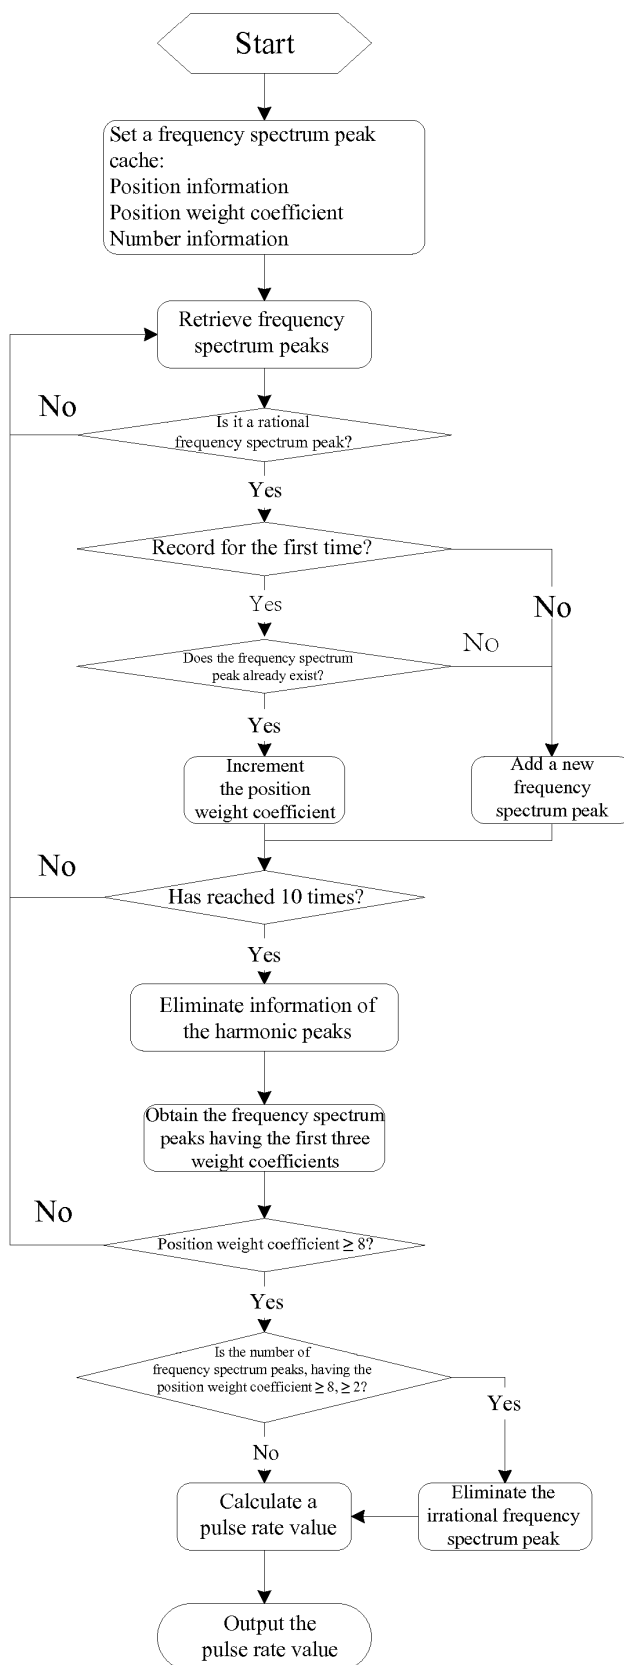


Fig. 19

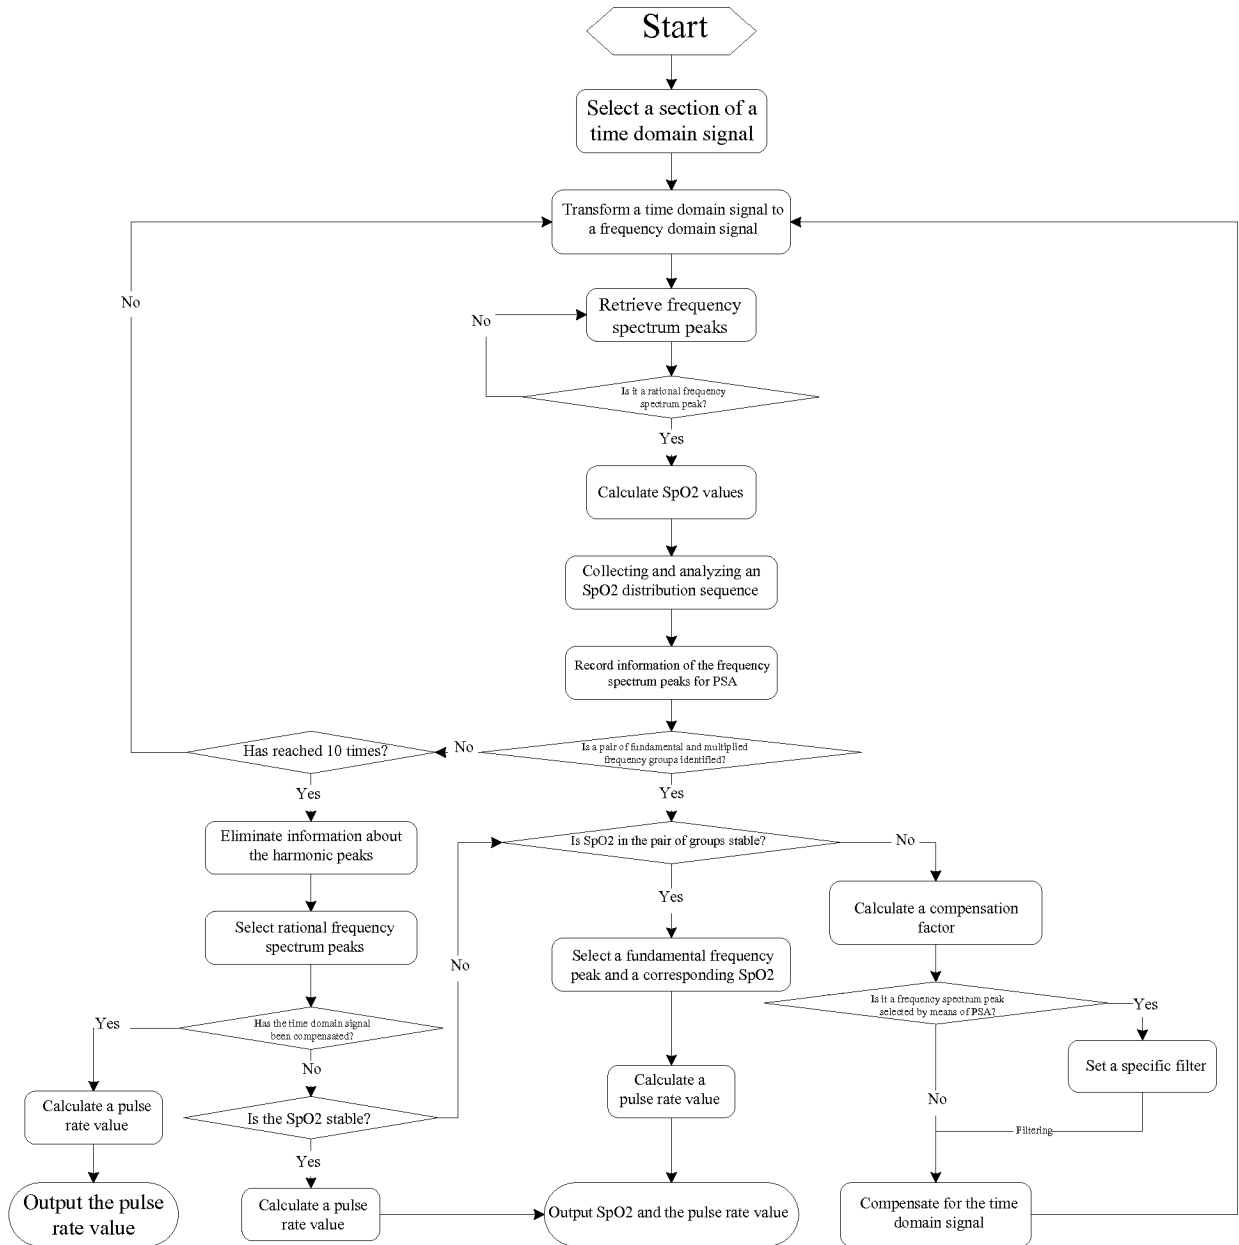


Fig. 20

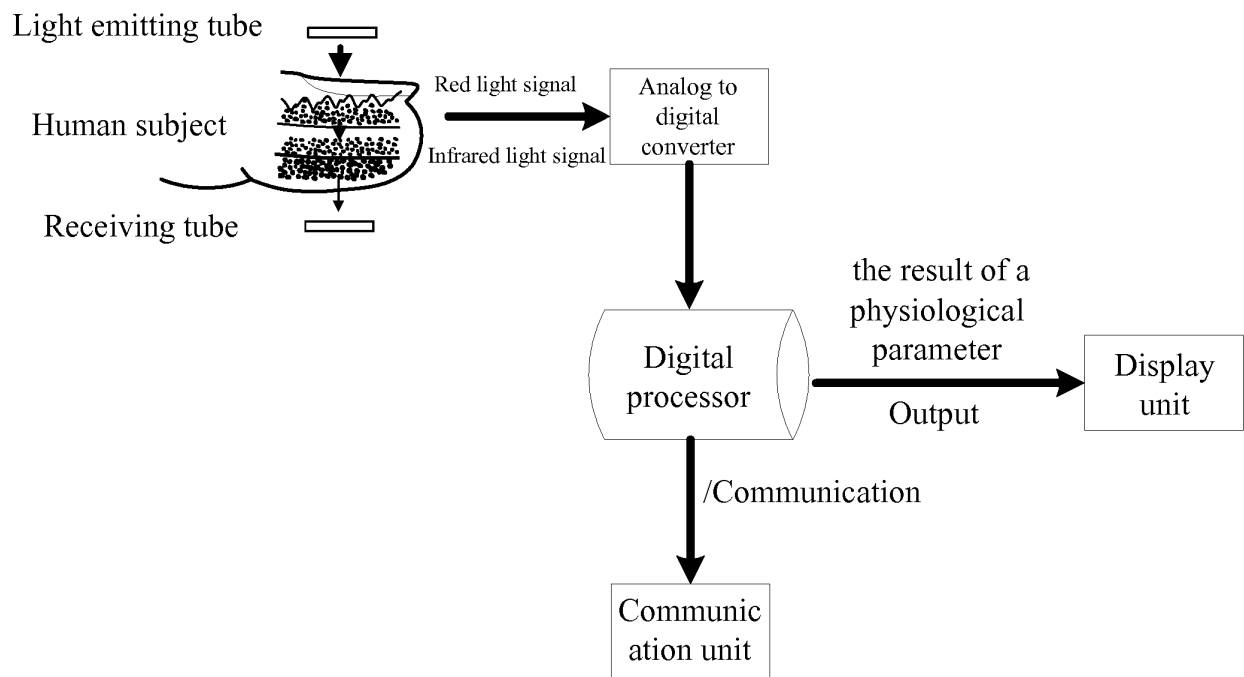


Fig. 21

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2016/085777

5	A. CLASSIFICATION OF SUBJECT MATTER	
	A61B 5/02(2006.01)i; A61B 5/1455(2006.01)i; A61B 5/00(2006.01)i	
	According to International Patent Classification (IPC) or to both national classification and IPC	
10	B. FIELDS SEARCHED	
	Minimum documentation searched (classification system followed by classification symbols)	
	A61B 5	
	Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched	
15	Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)	
	CNABS, CNTXT, VEN, CNKI: frequency domain, frequency spectrum, time frequency, blood oxygen, pulse rate, exercise, interference, lowperfusion, spectral, frequency, oxygen+, blood, pulse, rate	
20	C. DOCUMENTS CONSIDERED TO BE RELEVANT	
	Category*	Citation of document, with indication, where appropriate, of the relevant passages
		Relevant to claim No.
25	A	CN 101103921 A (BEIJING M&B ELECTRONIC INSTRUMENTS CO., LTD.), 16 January 2008 (16.01.2008), description, page 1, paragraph 5 to page 6, paragraph 4, and figures 1-6
	A	CN 103230267 A (BEIJING INSTITUTE OF TECHNOLOGY), 07 August 2013 (07.08.2013), the whole document
	A	CN 101039617 A (PULSETRACER TECHNOLOGIES INC.), 19 September 2007 (19.09.2007), the whole document
30	A	CN 1830386 A (SHENZHEN MINDRAY BIO-MEDICAL ELECTRONICS CO., LTD.), 13 September 2006 (13.09.2006), the whole document
	A	US 2014343385 A1 (COVIDIEN LP), 20 November 2014 (20.11.2014), the whole document
	A	US 2013172760 A1 (FOUNDATION OF STATE UNIVERSITY OF NEW YORK THE RES), 04 July 2013 (04.07.2013), the whole document
35	<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.	
40	* Special categories of cited documents:	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
	“A” document defining the general state of the art which is not considered to be of particular relevance	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
45	“E” earlier application or patent but published on or after the international filing date	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
	“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“&” document member of the same patent family
	“O” document referring to an oral disclosure, use, exhibition or other means	
	“P” document published prior to the international filing date but later than the priority date claimed	
50	Date of the actual completion of the international search	Date of mailing of the international search report
	10March 2017 (10.03.2017)	20March 2017 (20.03.2017)
55	Name and mailing address of the ISA/CN: State Intellectual Property Office of the P. R. China No. 6, Xitucheng Road, Jimenqiao Haidian District, Beijing 100088, China Facsimile No.: (86-10) 62019451	Authorized officer SHEN, Yanyan Telephone No.:(86-10) 62085634

Form PCT/ISA/210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2016/085777

5
10
15
20
25
30
35
40
45
50
55

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 101103921 A	16 January 2008	CN 100463651 C	25 February 2009
CN 103230267 A	07 August 2013	CN 103230267 B	03 June 2015
CN 101039617 A	19 September 2007	None	
CN 1830386 A	13 September 2006	US 7471970 B2	30 December 2008
		US 2009112074 A1	30 April 2009
		CN 100450437 C	14 January 2009
		US 2006206019 A1	14 September 2006
		US 8275434 B2	25 September 2012
US 2014343385 A1	20 November 2014	US 2006200015 A1	07 September 2006
		US 8423109 B2	16 April 2013
		US 2013217987 A1	22 August 2013
		WO 2006094215 A1	08 September 2006
		EP 1919351 A1	14 May 2008
		US 9351674 B2	31 May 2016
		US 8818475 B2	26 August 2014
		US 2008255436 A1	16 October 2008
		US 7392075 B2	24 June 2008
US 2013172760 A1	04 July 2013	US 8858450 B2	14 October 2014
		US 8388543 B2	05 March 2013
		US 2008287815 A1	20 November 2008

专利名称(译)	计算生理参数和相应医疗设备的方法		
公开(公告)号	EP3473171A4	公开(公告)日	2020-06-17
申请号	EP2016904987	申请日	2016-06-15
[标]申请(专利权)人(译)	深圳迈瑞生物医疗电子股份有限公司		
申请(专利权)人(译)	深圳迈瑞生物医疗电子股份有限公司.		
当前申请(专利权)人(译)	深圳迈瑞生物医疗电子股份有限公司.		
[标]发明人	HAN FEI YE FEI YAO ZUMING ZHANG FEI HE XIANLIANG LIU LIHAN LI MING JIN XINGLIANG		
发明人	HAN, FEI YE, FEI YAO, ZUMING ZHANG, FEI HE, XIANLIANG LIU, LIHAN LI, MING JIN, XINGLIANG		
IPC分类号	A61B5/02 A61B5/1455 A61B5/00		
CPC分类号	A61B5/00 A61B5/02 A61B5/1455 A61B5/024 A61B5/14551 A61B5/7225 A61B5/7257		
代理机构(译)	KIPA AB		
其他公开文献	EP3473171A1		
外部链接	Espacenet		

摘要(译)

一种用于计算生理参数的方法，包括：选择与通过采样获得的红光和红外光中的至少一个信号相对应的时域信号的一部分，并进行从时域到频域的转换以获得对应的频域信号；选择所有合理的频谱峰值信息，计算选定的合理频谱峰值的能量信息，形成频谱峰值能量比序列。根据频谱峰值能量比序列构造稳定系数，如果稳定系数低，则利用频谱峰值能量比序列构造补偿系数。通过使用所述补偿系数补偿时域信号和频域信号中的至少一个，并基于补偿后的时域信号和频域信号中的至少一个进行计算以获得生理参数。