




US 20050094062A1

(19) **United States**(12) **Patent Application Publication**
Cheng et al.(10) **Pub. No.: US 2005/0094062 A1**(43) **Pub. Date: May 5, 2005**(54) **LIQUID CRYSTAL DISPLAY WITH
NARROW FRAME AREA****Publication Classification**(51) **Int. Cl.⁷** **G02F 1/1333**(52) **U.S. Cl.** **349/110**(75) **Inventors: Jia-Shyong Cheng**, Yangmei Town
(TW); **Chieh-Hsiung Yang**, Yangmei
Town (TW)**Correspondence Address:**
VOLPE AND KOENIG, P.C.
UNITED PLAZA, SUITE 1600
30 SOUTH 17TH STREET
PHILADELPHIA, PA 19103 (US)(73) **Assignee: Hannstar Display Corp.**, Taipei (TW)(21) **Appl. No.: 10/817,357**(22) **Filed: Apr. 2, 2004**(30) **Foreign Application Priority Data**

Oct. 29, 2003 (TW)..... 092130145

(57) **ABSTRACT**

The present invention discloses a liquid crystal display with a narrow frame area. The liquid crystal display comprises a first substrate, plural scan line metal layers and plural data line metal layers formed on the first substrate, a second substrate attached to the first substrate by applying a seal at a periphery of one of the first substrate and the second substrate, and an opaque layer formed on the second substrate at the inside of the seal. In which, the scan line metal layers and the data line metal layers extend to the outside of the seal, and overlap with each other to form an integrated black matrix on the first substrate, which overlaps with the opaque layer on the second substrate so as to prevent a light leakage in an overlapped area thereof and narrow down the frame area.

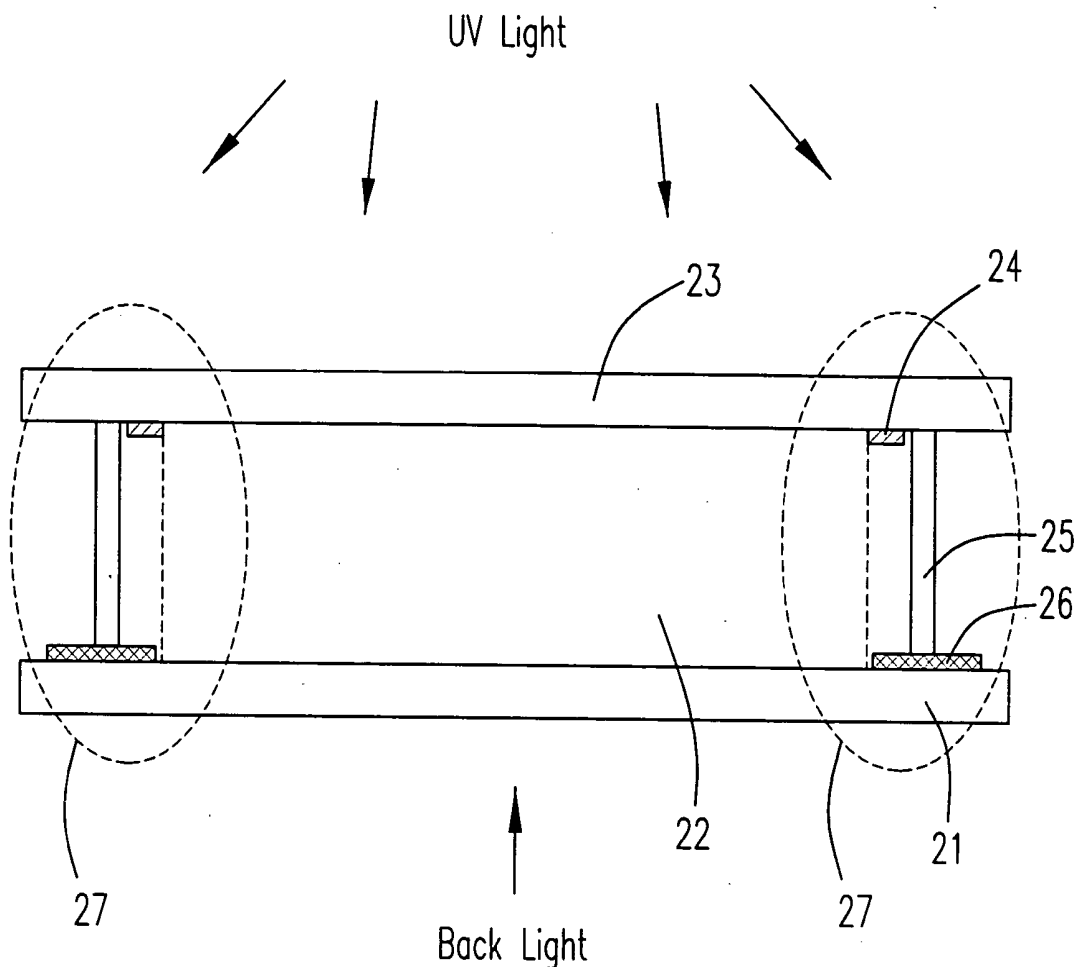

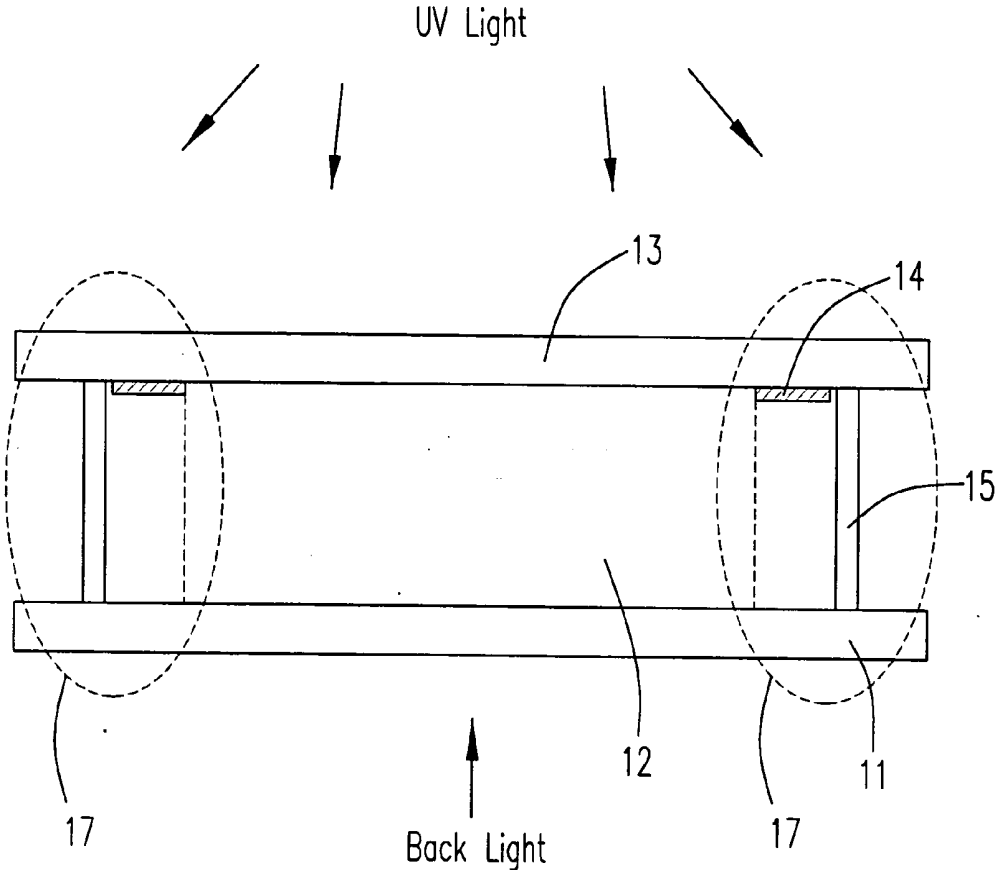


Fig. 1 (PRIOR ART)

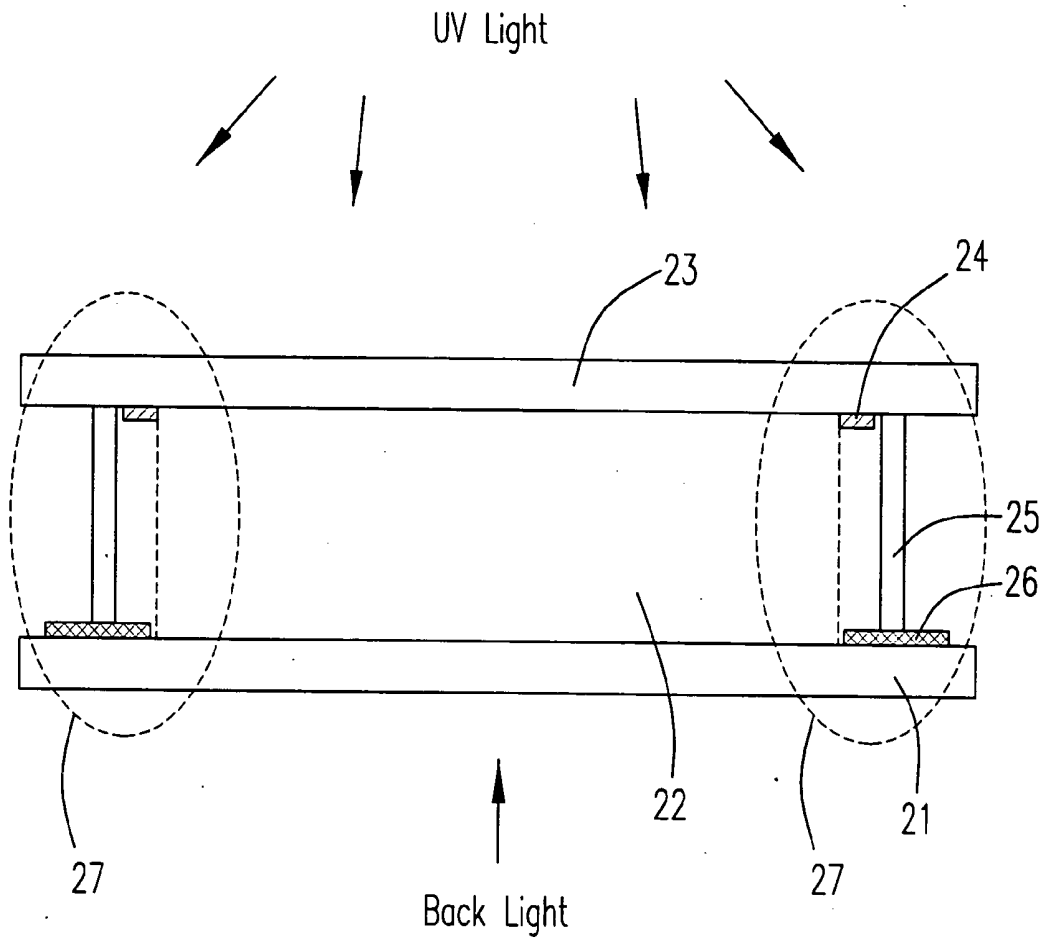


Fig. 2

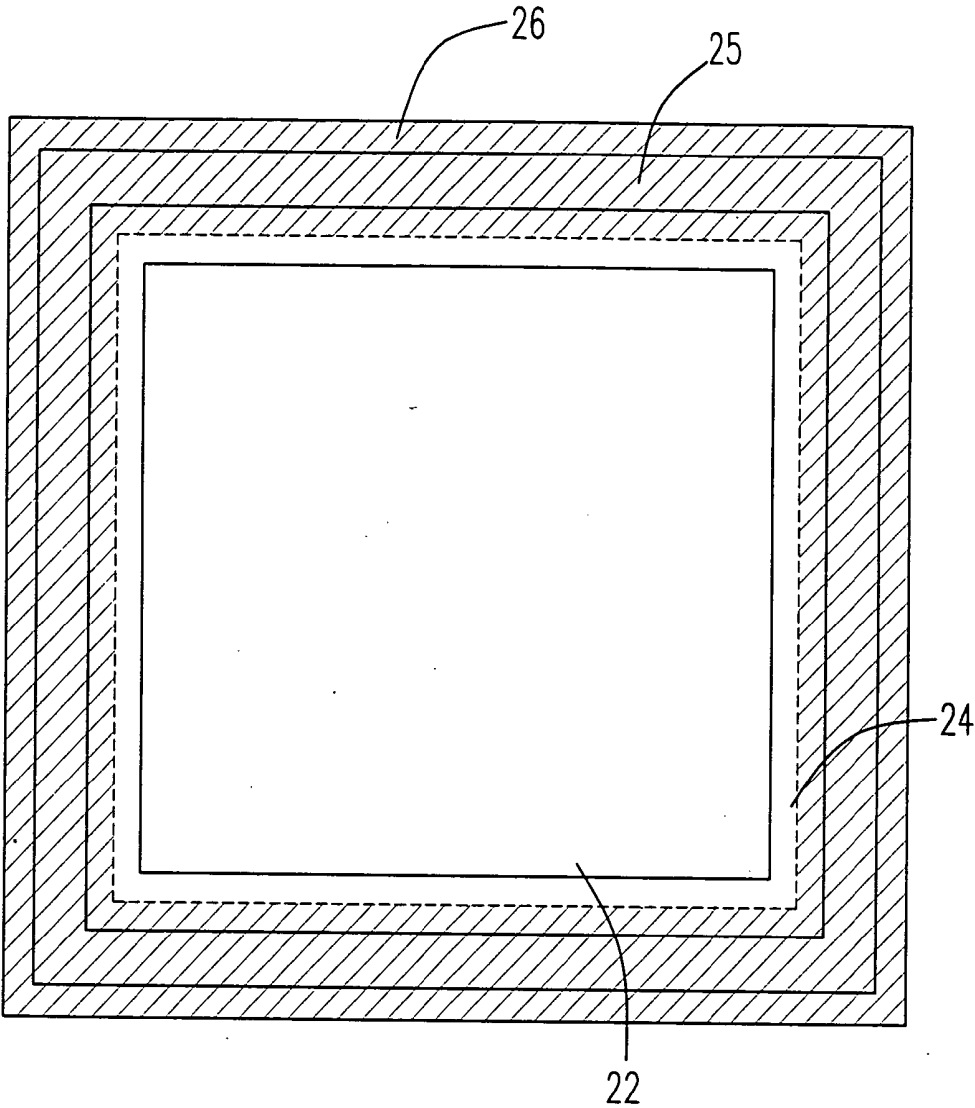


Fig. 3

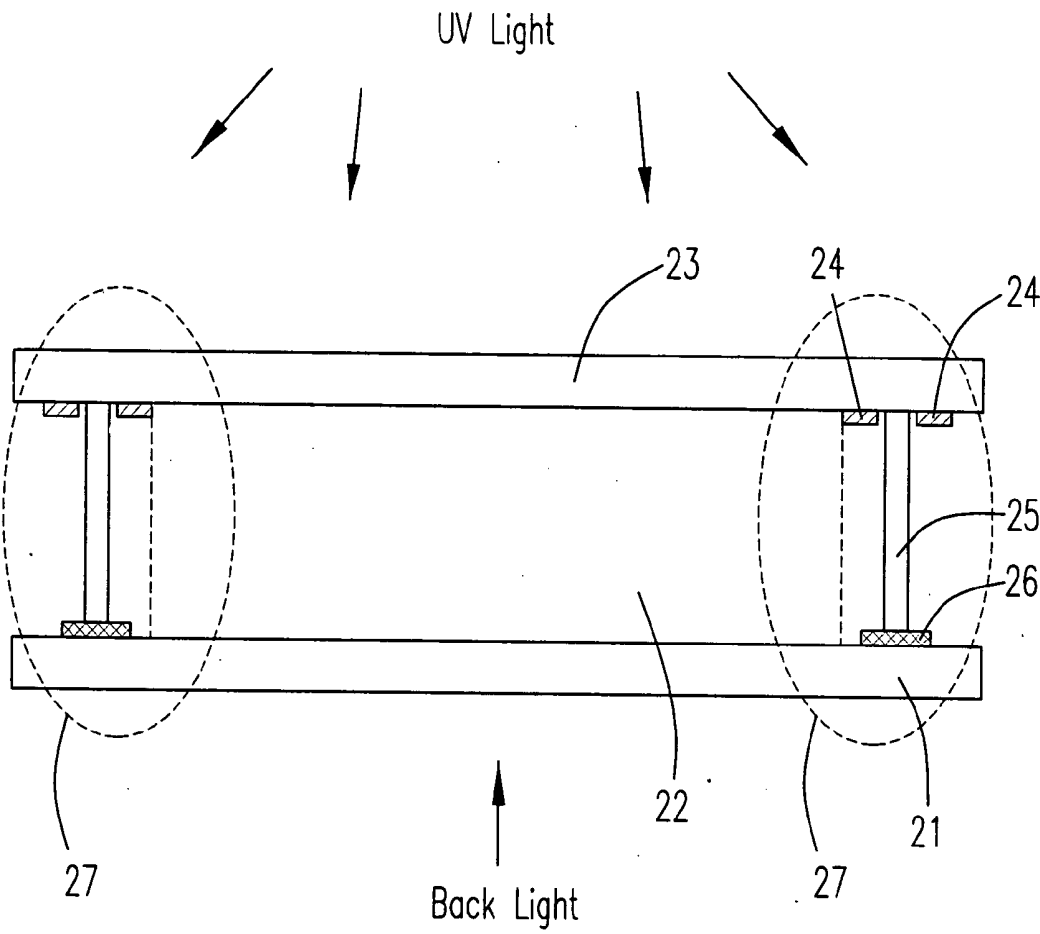


Fig. 4

LIQUID CRYSTAL DISPLAY WITH NARROW FRAME AREA

FIELD OF THE INVENTION

[0001] The present invention relates to a liquid crystal display, and more particularly to a liquid crystal display with a narrow frame area.

BACKGROUND OF THE INVENTION

[0002] In the current display industry, the liquid crystal display (LCD) has gradually replaced the cathode ray tube (CRT) to become a mainstream product due to its excellent properties of low radiation and low power consumption. The liquid filling method of the conventional liquid crystal display is to suck up the liquid crystal slowly by capillarity, after the upper and lower substrates are assembled. Such liquid filling method is time-consuming and is a waste of liquid crystal. Therefore, a new liquid filling method of one drop fill (ODF) is developed. The one drop fill (ODF) process is to directly drop the liquid crystal onto the lower substrate, and then assemble the upper and lower substrates. This new process greatly reduces the time and the materials for filling the liquid crystal, and thus it is absolutely advantageous to the display panel with super large size.

[0003] Please refer to **FIG. 1** showing a cross-sectional view of the liquid crystal display formed by the one drop fill (ODF) process according to the prior art. The formed liquid crystal display includes a first substrate **11**, a second substrate **13**, and a black matrix **14**, a scan line metal and a data line metal (not shown) and an active display area **12** enclosed between the first substrate **11** and the second substrate **13**, which are attached to each other by a seal **15**.

[0004] In the one drop fill (ODF) process, the seal **15** is solidified by a UV light. Therefore, the seal **15** has to be completely exposed to the UV light for a better solidification effect. However, the liquid crystal material would be damaged by the UV light, and hence, the liquid crystal in the active display area **12** must be protected by a UV shield during the exposure to UV light. The simplest way is to use the combination of the color resist of the color filter and the black matrix **14** as a UV shield of the active display area **12**. Although this way is simple, it has a disadvantage that the seal **15** must be located at the area outside the black matrix **14** so as to be fully exposed to the UV light for solidification. To prevent the seal **15** from being shielded by the black matrix **14** and in view of the alignment error during the manufacturing process, the seal **15** has to be at a distance from the active display area **12**, which results in an increase of the frame area **17** including the black matrix **14** and the seal **15**. Therefore, the effective utilization area of the substrate for display is reduced, and is not suitable for use in the portable product, such as a notebook, that demands a narrow frame area.

[0005] Therefore, the purpose of this invention is to provide a liquid crystal display with a narrow frame area to overcome the drawbacks of prior art.

SUMMARY OF THE INVENTION

[0006] It is an object of the present invention to provide a liquid crystal display with a narrow frame area, in which the metal layers formed in the TFT manufacturing process are

deposited and patterned in the frame area to form a UV shield. The way is to use the metal layers, which are the same as the scan line metal layers and the data line metal layers, in the frame area and form an integrated black matrix to prevent a light leakage in the frame area. In addition, the seal can be formed in the overlapped area to further narrow down the frame area of the liquid crystal display.

[0007] In accordance with an aspect of the present invention, the liquid crystal display with a narrow frame area comprises a first substrate, plural scan line layers and plural data line metal layers formed on the first substrate, a second substrate attached to the first substrate by applying a seal at a periphery of the first substrate and the second substrate, and an opaque layer formed on the second substrate at the inside of the seal, wherein the scan line metal layers and the data line metal layers extend to the outside of the seal, and overlap with each other to form an integrated black matrix on the first substrate, which overlaps with the opaque layer on the second substrate so as to prevent a light leakage in an overlapped area thereof and narrow down the frame area.

[0008] Preferably, the liquid crystal display is manufactured by a one drop fill (ODF) process.

[0009] Preferably, the opaque layer is a black matrix.

[0010] Preferably, the opaque layer is a mixture of a metal and an oxide of the metal.

[0011] Preferably, the opaque layer is a resin with opacity.

[0012] Preferably, the resin is one of a black resin and a color resin.

[0013] Preferably, the opaque layer is a color filter.

[0014] Preferably, the color filter is one selected from a group consisting of a red-colored layer, a green-colored layer, a blue-colored layer and a combination thereof.

[0015] Preferably, the seal overlaps with the integrated black matrix.

[0016] Preferably, the seal is solidified by a UV light.

[0017] Preferably, the integrated black matrix comprises an amorphous silicon layer.

[0018] In accordance with a further aspect of the present invention, the liquid crystal display with a narrow frame area comprises a first substrate, plural scan line metal layers and plural data line metal layers formed on the first substrate, a second substrate attached to the first substrate by applying a seal at a periphery of one of the first substrate and the second substrate, and an opaque layer formed on the second substrate at the inside and outside of the seal, wherein the scan line metal layers and the data line metal layers extend to the outside of the seal, and overlap with each other to form an integrated black matrix on the first substrate, which overlaps with the opaque layer on the second substrate so as to prevent a light leakage in an overlapped area thereof and narrow down the frame area.

[0019] Preferably, the liquid crystal display is manufactured by a one drop fill (ODF) process.

[0020] Preferably, the opaque layer is a black matrix.

[0021] Preferably, the opaque layer is a mixture of a metal and an oxide of the metal.

[0022] Preferably, the opaque layer is a resin with opacity.

[0023] Preferably, the resin is one of a black resin and a color resin.

[0024] Preferably, the opaque layer is a color filter.

[0025] Preferably, the color filter is one selected from a group consisting of a red-colored layer, a green-colored layer, a blue-colored layer and a combination thereof.

[0026] Preferably, the seal overlaps with the integrated black matrix.

[0027] Preferably, the seal is solidified by a UV light.

[0028] Preferably, the integrated black matrix comprises an amorphous silicon layer.

[0029] The above objects and advantages of the present invention will become more readily apparent to those ordinarily skilled in the art after reviewing the following detailed descriptions and accompanying drawings, in which:

BRIEF DESCRIPTION OF THE DRAWINGS

[0030] **FIG. 1** shows a cross-sectional view of the liquid crystal display formed by the one drop fill (ODF) process according to the prior art;

[0031] **FIG. 2** shows a cross-sectional view of the liquid crystal display formed by the one drop fill (ODF) process according to a preferred embodiment of the present invention;

[0032] **FIG. 3** shows a top view of the liquid crystal display formed by the one drop fill (ODF) process according to a preferred embodiment of the present invention; and

[0033] **FIG. 4** shows a cross-sectional view of the liquid crystal display formed by the one drop fill (ODF) according to another preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0034] Please refer to **FIG. 2** showing a cross-sectional view of the liquid crystal display formed by the one drop fill (ODF) process according to a preferred embodiment of the present invention. The liquid crystal display includes a first substrate **21**, a second substrate **23**, and an active display area **22** between the first substrate **21** and the second substrate **23**. According to the manufacturing method for the liquid crystal display of the present invention, plural scan line metal (gate metal) layers are formed first on the first substrate **21**, and then plural data line metal (source and drain metal) layers are formed on the scan line metal layers. The second substrate **23** is attached to the first substrate **21** via a seal **25**, which is coated at an outside periphery of the first substrate and is solidified by a UV light. At least one opaque layer **24**, such as a black matrix (BM) or a color filter (CF), is formed on the second substrate **23** at the inside of the seal **25**. In which, the color filter can be a red-colored layer, a green-colored layer, a blue-colored layer or a combination thereof. For completely solidifying the seal **25**, it is better not to overlap the seal **25** and the opaque layer **24**, so that the seal **25** can be completely exposed to the UV light. The first substrate **21** and the second substrate **23** are both glass substrates. In addition, the seal **25** can also be coated at an outside periphery of the second substrate **23**.

[0035] The main feature of the present invention is that the scan line metal layers and the data line metal layers extend to the outside of the seal **25**. The extended scan line metal layers and data line metal layers overlap with each others to form an integrated black matrix **26** so as to prevent a light leakage in the overlapped area and narrow down the frame area **27** of the liquid crystal display. In addition, a semiconductor layer, such as an amorphous silicon layer, or a dielectric layer or a combination of the above layers, can be formed between the extended scan line metal layers and data line metal layers to prevent the short problem.

[0036] Please refer to **FIG. 3** showing a top view of the liquid crystal display formed by the one drop fill (ODF) process according to a preferred embodiment of the present invention. As shown in **FIG. 3**, the central area of the liquid crystal display is the active display area **22**, and the areas outside the active display area **22** are sequentially the opaque layer **24**, the seal **25**, and the integrated black matrix **26** formed by the overlapped scan line metal layers and data line metal layers, in which the opaque layer **24** overlaps with the integrated black matrix **26**.

[0037] Please refer to **FIG. 4** showing a cross-sectional view of the liquid crystal display according to another preferred embodiment of the present invention. In which, the opaque layer **24** can be formed both at the inside and the outside of the seal **25** on the second substrate **23**.

[0038] The integrated black matrix of the present invention is not limited to the combination of the scan line metal and the data line metal; it can be formed by any other materials that can be used for light-shielding. To prevent a light leakage, the integrated black matrix can overlap with the seal completely or partially. The structure of the present invention can be applied to the amorphous silicon type of liquid crystal display and the poly-silicon type of liquid crystal display.

[0039] In conclusion, the liquid crystal display of the present invention includes the scan line metal layers and the data line metal layers extending to the outside of the seal. By the overlap of the extended scan line metal layers and data line metal layers, the integrated black matrix is formed to prevent a light leakage in the overlapped area and narrow down the frame area of the liquid crystal display. Therefore, the present invention overcomes the disadvantages of the prior art and owns the industrial values.

[0040] While the invention has been described in terms of what is presently considered to be the most practical and preferred embodiments, it is to be understood that the invention needs not be limited to the disclosed embodiment. On the contrary, it is intended to cover various modifications and similar arrangements included within the spirit and scope of the appended claims which are to be accorded with the broadest interpretation so as to encompass all such modifications and similar structures.

What is claimed is:

1. A liquid crystal display with a narrow frame area, comprising:

a first substrate;

plural scan line metal layers and plural data line metal layers formed on said first substrate;

a second substrate attached to said first substrate by applying a seal at a periphery of one of said first substrate and said second substrate; and

an opaque layer formed on said second substrate at the inside of said seal,

wherein said scan line metal layers and said data line metal layers extend to the outside of said seal, and overlap with each other to form an integrated black matrix on said first substrate, which overlaps with said opaque layer on said second substrate.

2. The liquid crystal display according to claim 1, wherein said liquid crystal display is manufactured by a one drop fill (ODF) process.

3. The liquid crystal display according to claim 1, wherein said opaque layer is a black matrix.

4. The liquid crystal display according to claim 1, wherein said opaque layer is a mixture of a metal and an oxide of said metal.

5. The liquid crystal display according to claim 1, wherein said opaque layer is a resin with opacity.

6. The liquid crystal display according to claim 5, wherein said resin is one of a black resin and a color resin.

7. The liquid crystal display according to claim 1, wherein said opaque layer is a color filter.

8. The liquid crystal display according to claim 7, wherein said color filter is one selected from a group consisting of a red-colored layer, a green-colored layer, a blue-colored layer and a combination thereof.

9. The liquid crystal display according to claim 1, wherein said seal overlaps with said integrated black matrix.

10. The liquid crystal display according to claim 1, wherein said seal is solidified by a UV light.

11. The liquid crystal display according to claim 1, wherein said integrated black matrix comprises an amorphous silicon layer.

12. A liquid crystal display with a narrow frame area, comprising:

a first substrate;

plural scan line metal layers and plural data line metal layers formed on said first substrate;

a second substrate attached to said first substrate by applying a seal at a periphery of one of said first substrate and said second substrate; and

an opaque layer formed on said second substrate at the inside and outside of said seal,

wherein said scan line metal layers and said data line metal layers extend to the outside of said seal, and overlap with each other to form an integrated black matrix on said first substrate, which overlaps with said opaque layer on said second substrate.

13. The liquid crystal display according to claim 12, wherein said liquid crystal display is manufactured by a one drop fill (ODF) process.

14. The liquid crystal display according to claim 12, wherein said opaque layer is a black matrix.

15. The liquid crystal display according to claim 12, wherein said opaque layer is a mixture of a metal and an oxide of said metal.

16. The liquid crystal display according to claim 12, wherein said opaque layer is a resin with opacity.

17. The liquid crystal display according to claim 16, wherein said resin is one of a black resin and a color resin.

18. The liquid crystal display according to claim 12, wherein said opaque layer is a color filter.

19. The liquid crystal display according to claim 18, wherein said color filter is one selected from a group consisting of a red-colored layer, a green-colored layer, a blue-colored layer and a combination thereof.

20. The liquid crystal display according to claim 12, wherein said seal overlaps with said integrated black matrix.

21. The liquid crystal display according to claim 12, wherein said seal is solidified by a UV light.

22. The liquid crystal display according to claim 12, wherein said integrated black matrix comprises an amorphous silicon layer.

* * * * *

专利名称(译)	液晶显示屏，边框窄		
公开(公告)号	US20050094062A1	公开(公告)日	2005-05-05
申请号	US10/817357	申请日	2004-04-02
[标]申请(专利权)人(译)	瀚宇彩晶股份有限公司		
申请(专利权)人(译)	瀚宇彩晶股份有限公司.		
当前申请(专利权)人(译)	瀚宇彩晶股份有限公司.		
[标]发明人	CHENG JIA SHYONG YANG CHIEH HSIUNG		
发明人	CHENG, JIA-SHYONG YANG, CHIEH-HSIUNG		
IPC分类号	G02F1/1333 G02F1/1335 G02F1/1339		
CPC分类号	G02F1/133512 G02F2001/133388 G02F1/1339		
优先权	092130145 2003-10-29 TW		
其他公开文献	US7061560		
外部链接	Espacenet USPTO		

摘要(译)

本发明公开了一种具有窄边框面积的液晶显示器。液晶显示器包括第一基板，多个扫描线金属层和形成在第一基板上的多个数据线金属层，通过在第一基板和第二基板之一的周边处施加密封而附接到第一基板的第二基板基板和在密封件内侧的第二基板上形成的不透明层。其中，扫描线金属层和数据线金属层延伸到密封的外侧，并且彼此重叠以在第一基板上形成集成的黑色矩阵，其与第二基板上的不透明层重叠，从而防止其重叠区域中的漏光并缩小框架区域。

