



(11) **EP 1 675 506 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:

**16.09.2015 Bulletin 2015/38**

(21) Application number: **04796177.6**

(22) Date of filing: **25.10.2004**

(51) Int Cl.:

**A61B 5/00 (2006.01)**

(86) International application number:

**PCT/US2004/035135**

(87) International publication number:

**WO 2005/043100 (12.05.2005 Gazette 2005/19)**

(54) **SYSTEM FOR DETECTING FLUID CHANGES**

SYSTEM ZUM NACHWEIS VON FLÜSSIGKEITSVERÄNDERUNGEN

SYSTEME POUR DETECTER DES VARIATIONS FLUIDIQUES

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **24.10.2003 US 514355 P**

(43) Date of publication of application:

**05.07.2006 Bulletin 2006/27**

(60) Divisional application:

**12005361.6 / 2 526 857**

(73) Proprietor: **Bayer Medical Care Inc.**

**Indianola, PA 15051 (US)**

(72) Inventors:

- **BOUTON, Chad**  
**Delaware, OH 43015 (US)**

• **RUGGERI, Felicia**  
**Columbus, OH 43212 (US)**

• **HARPHAM, Raymond**  
**Columbus, OH 43214 (US)**

• **HELD, Jeffrey**  
**Columbus, OH 43214 (US)**

(74) Representative: **Thoma, Michael**

**Lorenz - Seidler - Gossel**

**Rechtsanwälte Patentanwälte Partnerschaft mbB**

**Widenmayerstraße 23**

**80538 München (DE)**

(56) References cited:

**WO-A2-03/063680**

**US-A- 4 647 281**

**US-A- 6 047 215**

**US-A1- 2003 004 433**

**US-A1- 2003 036 674**

**US-B1- 6 263 226**

**US-B1- 6 300 906**

**US-B1- 6 415 170**

**EP 1 675 506 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### CROSS-REFERENCE TO RELATED APPLICATION

**[0001]** This application claims benefit of U. S. Provisional Patent Application Serial No. 60/514,355, filed October, 24,2003.

### BACKGROUND OF THE INVENTION

**[0002]** The present invention relates generally to the detection of fluid and/or other material in tissue, and especially, to a system for detecting changes in the level of fluid in tissue. In certain embodiments, the system of the present invention detects if fluid level has increased or has otherwise become abnormal.

**[0003]** The following information is provided to assist the reader to understand the invention disclosed below and the environment in which it will typically be used. The terms used herein are not intended to be limited to any particular narrow interpretation unless clearly stated otherwise in this document. References set forth herein may facilitate understanding of the present invention or the background of the present invention. Inclusion of a reference herein, however, is not intended to and does not constitute an admission that the reference is available as prior art with respect to the present invention

**[0004]** Changed, elevated or abnormal fluid levels in living tissue can result from a number of physiological conditions. For example, edema is an abnormal accumulation of watery fluid in the intercellular spaces of connective tissue. Edematous tissues are swollen and, when punctured, secrete a thin incoagulable fluid. Edema is most frequently a symptom of disease rather than a disease in itself, and it may have a number of causes, most of which can be traced back to gross variations in the physiological mechanisms that normally maintain a constant water balance in the cells, tissues, and blood. Among the causes may be diseases of the kidneys, heart, veins, or lymphatic system; malnutrition; or allergic reactions.

**[0005]** Moreover, bleeding (hemorrhage) can cause blood to collect and clot (hematoma). Hematomas can, for example, occur beneath the outermost of three membranes that cover the brain (meninges) as a result of a head injury. There are two types of cranial subdural hematomas. An acute subdural hematoma occurs soon after a severe head injury. A chronic subdural hematoma is a complication that may develop weeks after a head injury. Such a head injury may have been so minor that the patient does not remember it. An epidural hematoma is a traumatic accumulation of blood between the inner table of the skull and the stripped-off dural membrane. The inciting event often is a focused blow to the head. It is often difficult to detect hematomas, particularly when the hematoma occurs well after the time of an injury.

**[0006]** In addition to accumulation of body fluids, elevated fluid levels in tissue can arise as a result of intro-

duction of a fluid into the body, for example, during an injection procedure. In that regard, in many medical diagnostic and therapeutic procedures, a physician or other person injects fluid into a patient's blood vessels. Moreover, in recent years, a number of injector-actuated syringes and powered injectors for pressurized injection of contrast medium in procedures such as angiography, computed tomography, ultrasound and NMR/MRI have been developed.

**[0007]** Extravasation or infiltration is the accidental infusion or leakage of an injection fluid such as a contrast medium or a therapeutic agent into tissue surrounding a blood vessel rather than into the blood vessel itself. Extravasation can be caused, for example, by rupture or dissection of fragile vasculature, valve disease, inappropriate needle placement, or patient movement resulting in the infusing needle being pulled from the intended vessel or causing the needle to be pushed through the wall of the vessel. High injection pressures and/or rates of some modern procedures can increase the risk of extravasation. In computed tomography, for example, contrast injection flow rates can be in the range of 0.1 to 10 ml/s.

**[0008]** Extravasation can cause serious injury to patients. In that regard, certain injection fluids such as contrast media or chemotherapy drugs can be toxic to tissue. It is, therefore, very important when performing fluid injections to detect extravasation as soon as possible and discontinue the injection upon detection.

**[0009]** Several extravasation detection techniques are known in the art. Two simple and very useful techniques for detecting extravasation are palpation of the patient in the vicinity of the injection site and simple visual observation of the vicinity of the injection site by a trained health care provider. In the palpation technique, the health care provider manually senses swelling of tissue near the injection site resulting from extravasation. By visual observation, it is also sometimes possible to observe directly any swelling of the skin in the vicinity of an injection site resulting from extravasation.

**[0010]** In addition to palpation and observation, there are a number of automated methods of detecting extravasation that may include automatic triggering of an alarm condition upon detection. Unfortunately, each of these automated methods of detecting extravasation is limited by significant drawbacks.

**[0011]** In that regard, several plethysmographic detection techniques are available. For example, mercury strain gauge plethysmographs measure the volume change resulting from venous blood flow in a cross sectional area of a limb of a patient. Air cuff or pulse volume recorder plethysmographs measure the changes in pressure within a recording cuff. Such plethysmographs can be cumbersome to operate and/or insensitive to small changes in volume.

**[0012]** Impedance plethysmographs use low-frequency electromagnetic energy transmitted via galvanic contact with the skin to measure changes in the electrical

impedance in a defined tissue volume of a limb. Detection of extravasation via impedance changes is disclosed, for example, in U. S. Patent Nos. 5,964, 703 and 5,947, 910. In this method, an impedance change of a certain level relative to a baseline measurement in the vicinity of the injection site is interpreted as being an extravasation. A change in impedance occurs during extravasation because injection fluid in the tissue of the patient changes both the volume and the electrical impedance properties of the tissue. Use of electrodes in impedance plethysmographs can, however, result in instabilities. For example, maintaining suitable electrical (ohmic or galvanic) contact between the electrodes of impedance plethysmographs and the skin of the patient is often very difficult.

**[0013]** Photo-plethysmographs measure the optical scattering properties of capillary blood to detect the presence of extravasated fluids in tissue. An example of a photoplethysmograph is described in U. S. Patent 4, 877, 034. Because light is heavily absorbed in tissue, however, the sensitivity of photo-plethysmographs is generally limited to the top 1/4 inch of tissue. Many extravasations, however, occur deeper than 1/4 inch. Moreover, the injection medium may flow into interstitial spaces remote from the photoplethysmograph sensors and go undetected.

**[0014]** A number of extravasation detection devices attempt to measure temperature differences to determine if an extravasation has occurred. For example, U. S. Patent 4,647, 281 discloses subcutaneous temperature sensing of extravasation to trigger an alarm. In this method of extravasation detection, an antenna and a microwave radiometer instantaneously measure the temperature of the subcutaneous tissue at the site where fluid is injected by measuring microwave radiation emitted naturally from the body. An algorithm periodically determines the temperature difference between tissue and injected fluid, and compares the difference to a fixed threshold. An alarm processor uses the comparison to determine an alarm condition.

**[0015]** In addition, U. S. Patent 5,334, 141 discloses a microwave extravasation detection system employing a reusable microwave antenna and a disposable attachment element for releasably securing the microwave antenna to a patient's skin over an injection site. The attachment element holds the antenna in intimate contact with the patient's skin to optimize microwave transfer therebetween, while shielding the antenna from environmental noise signals. U. S. Patent 5,954, 668 also discloses use of a microwave antenna to sense temperature of tissue to detect extravasation. Although measurement of temperature changes and emissivity using microwave energy can result in instantaneous detection, temperature differences are often too small for practical measurement.

**[0016]** In addition to microwave radiometry for the detection of extravasation as described above, radiometry has also been proposed for the detection of pulmonary edema as described in U. S. Patent 4, 488, 559. U. S.

Patent 4,240, 445 discloses detection of pulmonary edema via transmitting electromagnetic energy through a transmission line coupled to tissue. U. S. Patent 4,690, 149 discloses detection of brain edema via impedance changes detected by a sensor. A proposed method of detection of brain edema is also disclosed in U. S. Patent 6,233, 479, in which a measured signal from a microwave antenna is compared to a stored characteristic edema signal.

**[0017]** Microwave energy has also been used for the detection of tumors in living tissue as described in U. S. Patent 6,061, 589. Unlike the passive measurements in microwave radiometry, U. S. Patent 6,061, 589 disclosed transmission of electromagnetic energy into the body (breast tissue) using a microwave antenna in and a resultant signal is measured. In that regard, U. S. Patent 6,061, 589 describes a microwave antenna to detect incipient tumors in accordance with differences in relative dielectric characteristics. Electromagnetic energy in the microwave frequency range is applied to a discrete volume in the tissue and scattered signal returns are collected. The irradiated location is shifted or changed in a predetermined scanning pattern. The returned signals are processed to detect anomalies indicative of the present of a tumor.

**[0018]** Microwave energy has also been used as in non-invasive tomographic spectroscopy imaging. See U. S. Patent Nos. 6,332, 087 and 6,026, 173. Microwave energy has further been used to measure the fat content in nonliving organic tissue. For example, M. Kent, "Hand Held Fat/Water Determination", (1993), available at [www.distell.com/products/papers/paper2.htm](http://www.distell.com/products/papers/paper2.htm), discloses a microstrip sensor for such a determination. In general, the fat content of pelagic and other fatty species of fish is proportion to water content. The dielectric properties of the fish depend on the water content. In the device of Kent, changes in transmission properties of the fish were calibrated against water content.

**[0019]** It is desirable to develop improved devices, systems and methods for detecting changes in fluid levels in tissue, and particularly, for detecting elevated or otherwise abnormal levels of fluids in living tissue (for example, as a result of edema, hematoma or extravasation). The objectives and advantages of the invention herein presented will become fully apparent to persons skilled in the relevant art from a reading of the detailed description section of this document, and will become particularly apparent when the detailed description is considered along with the drawings and claims presented herein.

**[0020]** A sensor device having a u-shaped housing including arrays of transmitting and receiving antennas for detection of fluid changes within tissue is disclosed by US 2003/0036674 A1. The area of highest detection sensitivity is located within in an opening formed by the u-shaped housing.

## SUMMARY OF THE INVENTION

**[0021]** The objectives and advantages of the invention are attained by a system according to the features of claim 1. Preferable embodiments of the system are subject-matter of the dependent claims.

**[0022]** In one embodiment, the sensor device further includes an RF cable assembly for each of the antenna elements. Each of the RF cable assemblies includes at one end thereof a connector. At the other end thereof, the RF cable assembly is electrically connected to the antenna element corresponding thereto. The sensor device can additionally or alternatively include at least one flexible circuit board assembly for transmission of energy to and from the antenna elements. The flexible circuit board can include at least one splitter such that electromagnetic energy can be transmitted to at least two of the plurality of antenna elements using a single transmission trace within the flexible circuit board. The flexible circuit board can include at least one combiner such that electromagnetic energy can be received from at least two of the plurality of antenna elements and carried by a single transmission trace within the flexible circuit board.

**[0023]** The sensor device can further include an attachment mechanism to operably attach the sensor device to the tissue of the body. The attachment mechanism can include an adhesive portion defining a cutout region generally coextensive with the opening of the housing. The adhesive portion has one side thereof coated with a first adhesive adapted to removably attach to the tissue and an opposite side thereof coated with a second adhesive adapted to attach to a bottom surface of the housing. The attachment mechanism can further include a release band affixed to a perimeter of the adhesive portion. In one embodiment, the first adhesive is adapted to facilitate removal of the attachment mechanism from the patient. For example, the first adhesive can provide less adhesion than the second adhesive.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0024]** The invention, and particularly its presently preferred and alternative embodiments and related aspects, will be better understood by reference to the detailed disclosure below and to the accompanying drawings, in which:

Figure 1A illustrates a perspective view of an extravasation sensor according to a one embodiment of the present invention, showing antennae on a bottom surface thereof designed for contact with the skin of a patient and RF cable assemblies associated therewith.

Figure 1B is a bottom view of the extravasation sensor shown in Figure 1A.

Figure 1C is a side view of the extravasation sensor

shown in Figure 1A, with the bottom surface thereof facing towards the bottom of the page.

Figure 1D is a top view of the extravasation sensor shown in Figure 1A.

Figure 1E is an end view of the extravasation sensor shown in Figure 1A, with the bottom surface thereof facing towards the bottom of the page.

Figure 2 illustrates a generalized and idealized structural layout of the sensor of Figure 1A, showing high sensitivity zones and an intermediate, reduced sensitivity zone.

Figure 3 depicts a layout for a flexible circuit board, showing flexible striplines for use in conveying signals to and from the antennae of an extravasation sensor such as the one shown in Figure 1A.

Figure 4 illustrates a step-by-step procedure for using an attachment mechanism to attach an extravasation sensor of the present invention to the skin of a patient.

Figure 5 illustrates an extravasation sensor attached to the patient via the attachment mechanism of Figure 4 and its use within a control room of an imaging suite.

Figure 6A illustrates an extravasation sensor according to the present invention including one or more indicators to provide a visual indication of extravasation.

Figure 6B illustrates an extravasation sensor according to the present invention into which an arm button has been incorporated and which doubles as a visual indicator of extravasation.

Figure 6C illustrates an extravasation sensor according to the present invention into which an indicator has been incorporated into each antenna element as a visual indicator of extravasation.

Figure 7 illustrates a system for wirelessly transmitting a signal indicative of extravasation from an extravasation sensor (such as the one shown in Figure 1A) to a remote receiver.

## DETAILED DESCRIPTION OF THE INVENTION

**[0025]** While the system of the present invention is generally applicable to the sensing any fluid within body tissue (whether a body fluid or an introduced fluid), the present invention is primarily described herein with reference to the representative example of extravasation of a fluid intended to be injected into a vascular structure.

One skilled in the art will appreciate, however, that elevated, abnormal or changing levels of generally any fluid can be detected using the sensors, systems and methods of the present invention. Detection of body fluids in the present invention includes, but is not limited to, the detection of fluid changes as a result of edema, hematoma, ruptured bowel and colostomy tubing leakage into the peritoneal cavity. Introduced or foreign fluid detectible in the present invention include fluid introduced via generally any technique known in the medical arts including, but not limited to, injection, infusion and IV drip. As described above, changes in complex permittivity and permeability as a result of changing fluid levels in tissue are detected by application of electromagnetic energy to the tissue and detection of a resultant signal.

**[0026]** Complex permittivity and permeability govern how an-electromagnetic wave will propagate through a substance. Complex permittivity typically has the greatest effect since it varies significantly between tissue types and fluids of interest. The complex permeability of various tissues and many fluids of interest is approximately that of a vacuum, reducing the effect of this parameter. Some fluids, however, such as MRI contrast agents may have an appreciable complex permeability difference from tissue. Although blood contains small amounts of iron, the permeability value for any significant volume of blood is typically insignificant. Complex permittivity is generally expressed as:

$$\epsilon^* = \epsilon' - j\epsilon''$$

wherein  $\epsilon'$  is the real component of the complex value and is known as the dielectric constant or sometimes simply referred to as the "permittivity." The term  $\epsilon''$  is the imaginary component of the complex value and is often referred to as the "loss factor." The ratio of ( $\epsilon''/\epsilon'$ ) is known as the "loss tangent." The complex permittivity (and sometimes permeability) of certain substances differ from the body tissue at certain frequencies. In the present invention, such differences in permittivity and/or permeability are used for the detection and level monitoring of certain fluids and substances in biological tissue.

**[0027]** Published U. S. Patent Application Publication Nos. 2003/0036674 and 2003/0036713, assigned to the assignee of the present invention disclose transmitting and receive antenna elements, sensing methods and processing algorithms suitable for use in the present invention. The studies of sensors incorporating such antenna elements have shown that electromagnetic energy having, for example, a frequency in the range of approximately 300 MHz to approximately 30 GHz (and, more preferably, in the range of approximately 1 GHz to approximately 10 GHz, and, even more preferably, in the range of approximately 3 GHz to approximately 5 GHz) provides good penetration into tissue. In general, such electromagnetic energy is launched into the subcutane-

ous tissue and a resultant signal is measured. Electromagnetic energy in the frequency range set forth above has been found to transmit through the skin and to transmit or propagate well within, for example, fat. Good transmission through the fat layer is beneficial for detection of extravasation as many extravasations occur in the fat layer. The sensitivity to extravasation of the systems, devices and methods of the present invention is thus increased as compared, for example, to impedance plethysmography.

**[0028]** Figure 1A-1 E illustrate multiple views of one embodiment of an extravasation sensor 10 of the present invention. Extravasation sensor 10 includes a housing 20, a plurality of antenna or sensor elements 60a, 60b, 60c and 60d, and the RF cable assemblies 100 associated therewith. Each of coaxial cables 100 includes a subminiature coaxial connector (SMA connector) 110.

**[0029]** The housing 20 can, for example, be fabricated from a base material, such as urethane and/or silicone material. A ferromagnetic and/or other material suitable to absorb leakage of electromagnetic energy can be mixed into the base material. A carbonyl iron powder, such as the EW grade carbonyl iron powder produced by the BASF Corporation, of Mount Olive, New Jersey, is suitable for this purpose. The ferromagnetic powder is mixed into the housing base material at least around the antenna elements and cables. A ferromagnetic material with appreciable permeability (e. g.,  $> 1$ ), such as the EW grade carbonyl iron powder, provides a mixture that creates a flexible housing capable of absorbing stray leakage of electromagnetic energy. If not effectively addressed, such leakage could potentially cause artifacts to be induced within the signals conveyed from the antenna elements 30 as a result of, for example, palpation of the skin in the area of the extravasation sensor 10 or as a result of other movement of the sensor 10. In addition to motion and palpation artifacts, such leakage could also decrease the sensitivity of the sensor 10 to the presence of subcutaneous fluid. It is apparent that one can also mix the ferromagnetic material into a different base material (for example, a base material that will form a more rigid housing).

**[0030]** As illustrated, for example, in Figures 1A-1E and 2, housing 20 of the extravasation sensor 10 defines an opening 24 between the antenna elements 60a-d. Opening 24 provides both visual and tactile (palpation) access to the site of interest where subcutaneous fluid will likely accumulate should extravasation occur. Opening 24 thus provides the operator with the option of checking for or confirming the presence of fluid merely by looking at or palpating the skin through opening 24 in housing 20.

**[0031]** Housing 20 also includes segments 30 and 30a that bridge the gap between seatings 40 (positioned at intersections 50 between connected segments 30 and 30a) in which antenna elements 60a-d are seated. Bridge segments 30 and 30a are, for example, low in profile to provide an operator access through opening 24 to the site of interest for the purpose of palpation. Nurses or

technologists often position their hand in such a manner that low-profile bridge segments 30 and 30a (particularly those bridge segments 30a on the sides of sensor 10) allow improved ability to palpate the site of interest to check for extravasation. As best shown in Figures 1A and 1C, side bridge segments 30a can be curved outwardly away from the center of the palpation area to allow increased accessibility.

**[0032]** Similar to the antenna element described in Published U. S. Patent Application Nos. 2003/0036674 and 2003/0036713, antenna elements 60a-d (each of which is generally identical in structure), in several embodiments of the present invention, include an active antenna or resonant structure 62 surrounded by a substrate 64 such as a ceramic material (for example,  $\text{MgCaTiO}_2$ ). Resonant structures 62 are, for example, adapted to transmit and receive electromagnetic energy in the frequency ranges set forth above. The substrate material can, for example, have a moderate to high dielectric constant (for example, in the range of approximately 5 to approximately 100 or in the range of approximately 50 to approximately 80) or high permittivity and low loss. To reduce the size of the antenna structure, several embodiments used in the studies of the present invention used a ceramic material in the range of 5-15, thereby reducing manufacturing costs. The impedance of substrate 64 is preferably similar to that of the surface of the tissue to be studied.

**[0033]** Unlike several of the embodiments of the antenna elements of U. S. Patent Application Nos. 2003/0036674 and 2003/0036713, antenna elements 60a-d of the present invention did not include a superstrate material. In U. S. Patent Application Publication Nos. 2003/0036674 and 2003/0036713, the antenna elements such as shown in Figure 7D of each of those published U. S. patent applications were positioned atop or otherwise formed within a substrate and shielded from direct contact with the skin by use of a superstrate. By forming antenna elements 60a-d without a superstrate, antenna element 60a-d becomes electromagnetically loaded when adjacent to human tissue on which extravasation sensor 10 is positioned. This electromagnetic loading increases the bandwidth of extravasation sensor 10, which increases its ability to detect subcutaneous pools of various shapes and sizes.

**[0034]** Microstrip antennae 60a through 60d used in several studies of the present invention were fabricated from a ceramic laminate material coated with thin layers of copper on the front and back thereof. Such a material is, for example, available from Rogers Corporation of Chandler, Arizona under the product name RT/duroid® 6010LM. Such microwave laminates are ceramic-PTFE composites designed for electronic and microwave circuit applications requiring a relatively high dielectric constant. RT/duroid 6010LM laminate has a dielectric constant of approximately 10.2. The laminate was approximately 2.5 mm thick and was supplied with both sides thereof clad with 1/4 to 2 oz./ft.<sup>2</sup> (8 to 70  $\mu\text{m}$ ) electrode-

posited copper foil. In fabricating antennae (or microstrip antennae) 60a-d of the present invention, some of the copper material was etched from the top of the laminate to form generally planar antenna active element or resonant structure 62, thereby forming a margin between the outer edge of resonant structure 62 and the outer edge of substrate 64. The copper on the bottom side of the laminate formed ground plane 66 of antenna 62a-d. Side shielding 68 of a conductive material can be provided to, for example, improve tissue coupling and prevent stray energy.

**[0035]** Side shielding 68 and rearward, ground plane 66 form an electrically conductive cavity. Resonant structure 62 and the cavity can resonate together in the frequency range of interest. Such resonance matching can improve efficiency by, for example, increasing power output relative to power input for transmission, and increasing power received relative to power available for reception. Each antenna element 60a through 60d can also include a conductive front lip 67 on the surface of the ceramic material to provide additional shielding. Coupled with the protection provided by the side shielding 68, forward conductive lip 67 for each antenna elements 60a-d serves to further decrease the leakage of stray electromagnetic energy. In one embodiment, conductive lip 67 was fabricated from a conductive material such as copper having a thickness of approximately 0.010 inches.

**[0036]** Although square antennae or resonant structures 62 were used in the studies of the present invention, it is clear to one skilled in the art that many alternative antenna element or resonant structure geometries (for example, circular or rectangular) can be used in the antennae of the present invention.

**[0037]** In the embodiment of Figures 1A through 2, sensor 10 includes two antenna sets or pairs 70a and 70b. First antenna pair 70a includes first transmitting antenna element 60a and first receiving antenna element 60b. Second antenna pair 70b includes second transmitting antenna element 60c and second receiving antenna element 60d. The transmitting and receiving antenna elements of each of first antenna pair 70a and second antenna pair 70b are held in spaced connection by bridging segments 30. The length of bridging segments 30, and thus the space between the transmitting and receiving antenna elements, can be used to adjust the sensitivity of the antenna pair to fluid changes in the high sensitivity zone of the sensor (see, for example, Figure 2 and the discussion thereof below) located between the transmitting antenna and the receiving antenna of the antenna pair. In that regard, increasing the distance between the transmitting antenna and the receiving antenna increases the volume of tissue encompassed by the high sensitivity zone, but also increases the minimum volume of fluid change that can be detected.

**[0038]** Figure 2 illustrates a schematic structural layout for extravasation sensor 10 of the present invention, in which four antenna elements 60a through 60d are separated to form a first high sensitivity zone 80a between

antenna elements 60a and 60b and a second high sensitivity zone between antenna elements 60c and 60d. Between high sensitivity zones 80a and 80b is a region or zone 84 of lower or reduce sensitivity.

**[0039]** The size of the reduced sensitivity zone 84 (and the sensitivity therein) is determined by the length of side bridging segments 30a which operatively connect and space first antenna pair 70a and second antenna pair 70b. In this embodiment of the present invention, the spacing between antenna pairs 70a and 70b effectively increases the sensing range of extravasation sensor 10. However, lower sensitivity to small volumes of subcutaneous fluid in reduced sensitivity zone 84 between antenna pairs 70a and 70b is achieved by spacing antenna pairs 70a and 70b. High sensitivity zones 80a and 80b are "primary" areas in which fluid build up can be detected with highest sensitivity. The formation of intermediate, reduced sensitivity zone 84, however, allows a small, clinically insignificant amount of fluid (e. g., blood contrast agent, or saline) to collect before extravasation sensor 10 indicates a positive response. This configuration can be particularly desirable in, for example, the computerized tomography (CT) setting wherein extravasation of a small amount of fluid happens in a percentage of procedures and does not require the termination of the CT examination. In that regard, a study by Birnbaum et al. (Birnbaum et al., "Extravasation Detection Accessory: Clinical Evaluation in 500 Patients," *Radiolog* (1999)) noted an occurrence rate of 2.6% for small leaks of contrast agent at the tip of the catheter with a volume range of such leaks of approximately 0.5 to 3cc. During an injection procedure, sensor 10 can be positioned so that the tip of the injection catheter is placed within reduced sensitivity zone 84 (for example, positioned generally centrally within reduced sensitivity zone 84 or within open area 24).

**[0040]** Using sensing algorithms and thresholds as disclosed in Published U. S. Patent Application Nos. 2003/0036674 and 2003/0036713, small volumes of fluid (for example, volumes no greater than 5cc or no greater than 3cc) can accumulate within the overall sensing region while not crossing the alarm threshold. Further, higher threshold values can be set and remain effective at desired levels (that is, clinically significant levels). Moreover, by creation of reduced sensitivity zone 84 the volume at which the overall sensing region begins to become saturated (i.e., at which fluid has filled the overall sensing region and the sensor's the signal stops changing) is increased to a larger volume by creation of reduced sensitivity zone 84.

**[0041]** As described above, reduced sensitivity zone 84 allows small, clinically insignificant, extravasation (blood and/or contrast agent) volumes to accumulate while significantly reducing the probability of a false positive alarm. Indeed, in several clinical studies of the present invention, false positive alarms were maintained below 0.1 % while a positive extravasation detection rate in excess of 95% was achieved.

**[0042]** As illustrated for example in Figure 2, reduced sensitivity zone 84 is located between high sensitivity zones or sensing areas 80a and 80b. Increased fluid levels in low sensitivity region 84 can cause tissue distortion in one or both of high sensitivity zones 80a and 80b, and indirectly cause some level of sensor response. Because of such effective overlap of high sensitivity zones 80a and 80b and intermediate, reduced sensitivity zone 84, the overall fluid volume sensing range of sensor 10 is increased significantly.

**[0043]** In addition to maintaining a predetermined, desired spacing between the antenna elements of each antenna element pair and a predetermined, desired spacing between the antenna element pairs, housing 20 also maintains a desired relative orientation between the antenna elements of each antenna element pair and between the antenna element pairs. Also, housing 20 assists in assuring that each of antenna elements 60a-d is generally coplanar when sensor device 10 is in operative connection with a patient's skin.

**[0044]** Figure 3 illustrates an embodiment, which is not part of the invention, and which uses a flexible circuit board (also referred to as a "RF flex circuit board") to create a unique thin, "flexible strip" or flexible circuit transmission system 200 that can be used to carry and distribute the electromagnetic (for example, microwave) signals being transmitted from and received by extravasation sensor 300. Sensor 300 includes antenna elements 360a-d which operate in a manner as described above in connection with antenna elements 60a-d. Flexible strip transmission system 200 includes transmission lines or traces 210. The flexible strip transmission system 200 is provided with "side vias" 220 which (in connection with conductive layers laminated on the major surfaces of the flexible strip) complete a shielded, full coaxial structure for use in carrying microwave signals to and from antenna elements 360a-d of sensor 300. In that regard, top and bottom conductive layers of flexible strip transmission system 200 serve as ground planes, while vias between those layers are used to provide side shielding. As shown in Figure 3, traces 210 can, for example, include splitting and combining geometries 212 to split the energy between multiple transmitting antenna elements such as antenna elements 260a and 260c and to combine energy from multiple receiving antenna elements such as antenna elements 260b and 260d if desired. This splitting and combining allows the use of fewer cables when connecting sensor 300 to processing circuitry. Flex circuit boards and other materials suitable for use at microwave frequencies are commercially available from, for example, DuPont and the Advanced Circuit Materials Division of Rogers Corporation, of Chandler, Arizona.

**[0045]** A further advantage of the use of flex circuit board in connection with an energy transmission system of the sensors of the present invention is that a low-profile connection to the antennas elements can be achieved. Use of coaxial cables which are soldered to the antennas elements of the present invention can require a sizeable

bending radius, creating a higher profile connection. RF flex circuit includes an RF vertical transition including a center signal via surrounded by ground/reference vias completing a coaxial structure to transmit/receive microwave energy to and from the antennas elements. The antenna elements can, for example, be wave soldered in an automated process directly to the thin RF flex circuit without use of additional connectors or cables, achieving a low-profile connection.

**[0046]** By using thin dielectric layers in the flex circuit boards of the present invention and designing appropriate signal traces in the signal plane, small changes in the gain and phase characteristics during, for example, bending and twisting of the RF flex circuit were achieved. These results can reduce effects, if any, of motion artifact during sensor use.

**[0047]** Figure 4 illustrates a step-by-step procedure for using an attachment mechanism 400 of the present invention to attach an extravasation sensor 450 of the present invention to the skin of a patient. Designed to be disposable, attachment mechanism 400 includes a double-sided adhesive portion 410 and a release band 420 (which preferably includes no adhesive) around the perimeter of adhesive portion 410. In addition, adhesive portion 410 defines a cutout region 430. Cutout region 430 can be shaped in the shape of an arrow (pointing, for example, in the direction of contrast medium flow) or other shape to indicate a preferred orientation for attachment. One side of double-sided adhesive portion 410 is designed to attach to the skin of the patient over the site or region of interest (typically centralized on the tip of the catheter), and the opposite side is designed to permit extravasation sensor 450 to be affixed thereto. When properly applied, cutout region 430 of adhesive portion 420 and an opening 470 of extravasation sensor 450 are generally coextensive, thereby allowing the operator visual and tactile (palpation) access to the site of interest.

**[0048]** As illustrated in Figure 4, in a first step an operator removes a first cover film or layer 412 from the side of double-sided adhesive portion 410 including the adhesive adapted to attach to the patient's skin. In step 2, attachment mechanism 400 is attached to the patient skin with the arrow of cutout portion 430 pointing in the direction of the contrast medium flow. In step 3, a second cover film or layer 414 is removed from the side of double-sided adhesive portion 410 including the adhesive adapted to attach sensor 450 to attachment mechanism 400. In step 4, sensor 450 is attached to the attachment mechanism 400 so that open area 470 of sensor 450 is in general alignment with cutout region 430. In step 5, the sensing module is armed.

**[0049]** As illustrated, for example, in Figure 5, release band 420 of attachment mechanism 400 enables the operator to pull attachment mechanism 400 off the skin after use of extravasation sensor 450 is complete. For ease of use, the color, material or texture of adhesive portion 410 and release band 420 can be different. This difference facilitates the positioning and secure attachment of

extravasation sensor 450. Each side of attachment mechanism 400 can have a different level of adhesion (i.e., aggressiveness of adhesive) which facilitates the tailoring of the adhesion to the skin side which may be less than that of the sensor side.

**[0050]** In several studies of the attachment mechanisms of the present invention, 3M Medical Double Coated Tape #1512 available from 3M of Saint Paul, Minnesota was used.

**[0051]** This tape is fabricated from a hypoallergenic polyethylene material. Whatever double-sided adhesive tape or film is used, the double-sided adhesive tape preferably maintains sufficient contact with the skin and (upon proper use) provides resistance to wrinkling and formation of air pockets upon placement. The double-sided adhesive tape material preferably has a low electromagnetic loss factor (that is, in the sensor's operating frequency range). Such properties allow the electromagnetic energy (for example, microwaves) to penetrate the adhesive tape effectively. Most adhesive tapes possess these characteristics. Tapes that contain metallic particles or other conductive materials, however, may not be suitable for use in the attachment mechanisms of the present invention. The tape can, however, contain, for example, a material such as a ceramic material that yields a thin structure with low electromagnetic loss and an impedance that matches the surface tissue. This embodiment can provide better coupling of the microwave energy between the antennas and the tissue to increase detection sensitivity while decreasing leaked energy and thereby decreasing any palpation/motion artifact.

**[0052]** As an alternative to the steps described in connection with Figure 4, one can first adhere the double-sided tape to the sensor face while applying pressure with fingers across the entire sensor contact/antenna faces (ensuring good adhesion and prevention of air pockets). The inner or patient side cover film 412 is the removed and the attachment mechanism/sensor assembly is placed against the skin, briefly applying pressure.

**[0053]** As shown in Figures 4, 5 and 6A, and as described above, opening 470 for palpation in the housing of extravasation sensor 400 as well as the cutout region of the attachment mechanism can be formed to indicate the direction to which the sensor should be placed (e.g., arrow shaped). This shape of opening 470 also helps the operator to align extravasation sensor 450 and attachment mechanism 400 for optimal attachment to a patient's skin, which is important for integrity of the signals detected and conveyed by extravasation sensor 400.

**[0054]** Extravasation sensor 450 and other extravasation sensors of the present invention can also be equipped with one or more user interfaces or indicator. Figures 6A and 6B, respectively, illustrate that a light pipe 480 or other visual indicators, such as light-emitting diodes 580 (LEDs) on sensor 500, can be incorporated into the extravasation sensors of the present invention to provide, for example, a visual indication of extravasation. Additional or alternatively, other types of indicators

such as audible indicators or tactile indicators can be provided. In Figure 6A, a light pipe 480 is incorporated into the RF cable assembly that interconnects the extravasation sensor and its associated base/control unit so that the entire cable or a portion thereof lights to indicate a positive extravasation state. A light pipe can also pass through the cabling to light an indicator on the housing of the sensor. In Figure 6C, a plurality of indicator lights 580 are provided. Furthermore, a user input button for functions such as "arming" or "baselining" the overall system can be implemented at the extravasation sensor of the present invention. In Figure 6B, indicator 580 is also a user input button. An audible, tactile and/or visual alarm can also be integrated within the housing of the sensor. These features are advantageous because the user often focuses on the injection site (in CT application, for example) and therefore will not only more readily observe the light indicators situated there but also be more readily disposed to provide input from there.

**[0055]** An indicator device such as indicator light 480 can alternatively or additionally be mounted to or otherwise integrated into a remote display or controller unit for the injector system, as, for example, illustrated in Figure 5 in the context of a CT imaging suite. Such a remote display or control unit is typically located in the control room of a CT suite rather than in the scanner room where the injector and extravasation sensor will be sited.

**[0056]** Figure 7 illustrates a system 700 for wirelessly transmitting a signal indicative of extravasation from an extravasation sensor 800 outfitted with a transmitter 710 (for example, an RF transmitter) to a remote receiver 720. Such a wireless system 700 can be implemented with any extravasation sensor of the present invention. In one embodiment, wireless system 700 includes a short RF cable 730 connecting sensor 800 to transmitter 710. In use, extravasation sensor 800 can be attached to, for example, the upper arm about the site of the injection and transmitter 710 can be strapped or otherwise attached near or directly to the wrist. If extravasation sensor 800 is attached to the back of the hand or wrist, RF transmitter 710 can then be strapped to the upper arm much like a sports radio. Short RF cable 730 interconnects the two components as described above, and can be either a distinct component or emanate from the housing of sensor 800. Short RF cable 730 in this configuration can improve performance and decrease the potential of motion artifacts and other complications that may be associated with certain longer cables. In the embodiment of Figure 7, sensor 800 includes a palpation opening 840 and indicator lights 880 which operate as described above.

**[0057]** Although the various embodiments and related aspects of the invention herein described and illustrated are presented primarily in the context of CT imaging procedures, one skilled in the art understands that the invention may also be applied or adapted to other types of applications such as positron emission tomography (PET), magnetic resonance imaging (MRI), magnetic

resonance angiography (MRA) and ultrasound procedures as well as a wide variety of therapeutic and other procedures.

## Claims

1. A system comprising a sensor device for detecting a change in the level of fluid within tissue of a body and an associated control unit connected to the sensor device, the sensor device comprising:

a housing (20) having a plurality of bridge segments (30, 30a), the bridge segments (30, 30a) comprising bridging segments (30) and spacing segments (30a), the bridge segments connecting at intersections (50) and being arranged to circumscribe an opening (24) defined by the housing; and

four and only four antenna elements (60 a - d) at least partially seated within the housing at the intersections of the bridge segments (30a, 30b), wherein the antenna elements (60 a - d) are arranged in a rectangular shape and the corners of the rectangular shape are formed by the antenna elements (60 a - d), each antenna element comprising a generally planar antenna mounted to a substrate material (64) at a base of the planar antenna, an outer surface of the planar antenna facing away from the substrate, each antenna element further comprising an electrical shield surrounding the substrate,

wherein the antenna elements (60 a - d) comprise a first antenna element pair (70a) and a second antenna element pair (70b), the first antenna element pair (70a) comprising a first transmitting antenna element (60a) and a first receiving antenna element (60b), the first transmitting antenna element (60a) being spaced from and connected to the first receiving antenna element (60b) by a first bridging segment (30), the second antenna element pair comprising a second transmitting antenna element (60c) and a second receiving antenna element (60d), the second transmitting antenna element (60c) being spaced from and connected to the second receiving antenna element (60d) by a second bridging segment (30);

wherein the control unit is adapted to transmit a signal to the first and second transmitting antenna (60a, 60c) and adapted to receive a signal from the first and second receiving antenna (60b, 60d);

wherein a first area of higher sensitivity (80a) is defined by the area between the first transmitting antenna element (60a) and the first receiving antenna element (60b), and a second area of higher sensitivity (80b) is defined by the area

between the second transmitting antenna element (60c) and the second receiving antenna element (60d);

wherein the first antenna element pair (70a) and the second antenna element pair (70b) being placed in spaced connection by a first spacing segment (30a) and a second spacing segment (30a) so that an open area (24) is defined by the first antenna element pair (70a), the second antenna element pair (70b), the first spacing segment (30a) and the second spacing segment (30a) and wherein the first spacing segment (30a) and the second spacing segment (30a) space the first antenna element pair (70a) and the second antenna element pair (70b) to create an area of reduced sensitivity (84) between the first antenna element pair (70a) and the second antenna element pair (70b).

and wherein the distance between the first and second antenna pairs (70a, 70b) is greater than the distance between the first transmitting antenna element (60a) and the first receiving antenna element (60b) and greater than the distance-between the second transmitting antenna element (60c) and the second receiving antenna element (60d).

2. The system of claim 1 wherein the sensor device further comprises an RF cable assembly (100) for each of the antenna elements (60 a - d), each of the RF cable assemblies at one end thereof comprising a connector (110) and at the other end thereof being electrically connected to the antenna element corresponding thereto.
3. The system of claim 1 or 2 wherein the sensor device further comprises at least one flexible circuit board (200) assembly for transmission of energy to and from the antenna elements (60 a - d).
4. The system of claim 3 wherein the flexible circuit board (200) comprises at least one splitter (212) such that electromagnetic energy can be transmitted to at least two of the plurality of antenna elements using a single transmission trace (210) within the flexible circuit board.
5. The system of claim 3 or 4 wherein the flexible circuit board comprises at least one combiner (212) such that electromagnetic energy can be received from at least two of the plurality of antenna elements and carried by a single transmission trace (210) within the flexible circuit board.
6. The system of any of claims 1 to 5 wherein the sensor device further comprises an attachment mechanism (400) to operably attach the sensor device (450) to the tissue of the body, the attachment mechanism

comprising: an adhesive portion (410) defining a cut-out region (430) generally coextensive with the opening of the housing, the adhesive portion having one side thereof coated with a first adhesive adapted to removably attach to the tissue and an opposite side thereof coated with a second adhesive adapted to attach to a bottom surface of the housing.

7. The system of claim 6 wherein the attachment mechanism (400) further comprises a release band (420) affixed to a perimeter of the adhesive portion (410).
8. The system of claim 6 or 7 wherein the first adhesive provides less adhesion than the second adhesive.
9. The system of anyone of claims 1 - 8 wherein the electrical shield comprises a rearward section (66) adjacent a rearward side of the substrate, side shields (68) encompassing sides of the substrate and a forward section (67) adjacent a forward side of the substrate and extending inward from the side shields, a margin being maintained between the planar antenna and the forward section.

#### Patentansprüche

1. System, das eine Sensorvorrichtung, um eine Veränderung in dem Niveau eines Fluids innerhalb eines Körpergewebes zu detektieren, und eine damit verbundene Steuereinheit, die mit der Sensorvorrichtung verbunden ist, umfasst, wobei die Sensorvorrichtung umfasst:
  - ein Gehäuse (20) mit mehreren Brückensegmenten (30, 30a), wobei die Brückensegmente (30, 30a) Brückensegmente (30) und Abstandsegmente (30a) umfassen, wobei die Brückensegmente an den Schnittstellen (50) verbinden und angeordnet sind, um eine Öffnung (24) abzugrenzen, die durch das Gehäuse definiert ist; und
  - vier und nur vier Antennenelemente (60 a-d), die mindestens teilweise innerhalb des Gehäuses an den Schnittstellen der Brückensegmente (30, 30a) sitzen, wobei die Antennenelemente (60 a-d) in einer rechteckigen Form angeordnet sind und die Ecken der rechteckigen Form durch die Antennenelemente (60 a-d) gebildet werden, wobei jedes Antennenelement eine im Allgemeinen ebene Antenne umfasst, die an einem Substratmaterial (64) an einem Boden der ebenen Antenne befestigt ist, wobei eine äußere Oberfläche der ebenen Antenne von dem Substrat weggerichtet ist, wobei jedes Antennenelement ferner eine elektrische Abschirmung, die das Substrat umgibt, umfasst, wobei die Antennenelemente (60 a-d) ein erstes

Antennenelementepaar (70a) und ein zweites Antennenelementepaar (70b) umfassen, wobei das erste Antennenelementepaar (70a) ein erstes Übertragungsantennenelement (60a) und ein erstes Empfangsantennenelement (60b) umfasst, wobei das erste Übertragungsantennenelement (60a) von dem ersten Empfangsantennenelement (60b) beabstandet ist und mit diesem durch ein erstes Brückensegment (30) verbunden ist,

wobei das zweite Antennenelementepaar ein zweites Übertragungsantennenelement (60c) und ein zweites Empfangsantennenelement (60d) umfasst, wobei das zweite Übertragungsantennenelement (60c) von dem zweiten Empfangsantennenelement (60d) beabstandet ist und mit diesem durch ein zweites Brückensegment (30) verbunden ist;

wobei die Steuereinheit dafür ausgelegt ist, ein Signal an die erste und zweite Übertragungsantenne (60a, 60c) zu übertragen und dafür ausgelegt ist, ein Signal von der ersten und zweiten Empfangsantenne (60b, 60d) zu empfangen; wobei ein erster Bereich einer höheren Sensitivität (80a) durch den Bereich zwischen dem ersten Übertragungsantennenelement (60a) und dem ersten Empfangsantennenelement (60b) definiert ist, und wobei ein zweiter Bereich einer höheren Sensitivität (80b) durch den Bereich zwischen dem zweiten Übertragungsantennenelement (60c) und dem zweiten Empfangsantennenelement (60d) definiert ist;

wobei das erste Antennenelementepaar (70a) und das zweite Antennenelementepaar (70b) in einer beabstandeten Verbindung durch ein erstes Abstandssegment (30a) und durch ein zweites Abstandssegment (30a) so angeordnet sind, dass ein offener Bereich (24) durch das erste Antennenelementepaar (70a), das zweite Antennenelementepaar (70b), das erste Abstandssegment (30a) und durch das zweite Abstandssegment (30a) definiert ist, und wobei das erste Abstandssegment (30a) und das zweite Abstandssegment (30a) das erste Antennenelementepaar (70a) und das zweite Antennenelementepaar (70b) beabstandet zueinander halten, um einen Bereich von reduzierter Sensitivität (84) zwischen dem ersten Antennenelementepaar (70a) und dem zweiten Antennenelementepaar (70b) zu erzeugen,

und wobei der Abstand zwischen dem ersten und dem zweiten Antennenelementepaar (70a, 70b) größer als der Abstand zwischen dem ersten Übertragungsantennenelement (60a) und dem ersten Empfangsantennenelement (60b) und größer als der Abstand zwischen dem zweiten Übertragungsantennenelement (60c) und dem zweiten Empfangsantennenelement (60d)

ist.

2. System nach Anspruch 1, wobei die Sensorvorrichtung ferner eine HF-Kabelanordnung (Hochfrequenz-) für jedes Antennenelement (60 a-d) umfasst, wobei jede der HF-Kabelanordnungen an einem Ende davon einen Verbinder (110) umfasst und an dem anderen Ende davon mit dem dazu entsprechenden Antennenelement verbunden ist.
3. System nach Anspruch 1 oder 2, wobei die Sensorvorrichtung ferner mindestens eine flexible Schaltplattenanordnung (200) für eine Übertragung von Energie an die und von den Antennenelementen (60 a-d).
4. System nach Anspruch 3, wobei die flexible Schaltplatte (200) mindestens einen Verteiler (Splitter) (212) derart umfasst, dass elektromagnetische Energie an mindestens zwei der mehreren Antennenelemente unter Verwendung eines einzelnen Übertragungsverlaufs (210) innerhalb der flexiblen Schaltplatte übertragen werden kann.
5. System nach Anspruch 3 oder 4, wobei die flexible Schaltplatte mindestens einen Kombinator (212) derart umfasst, dass elektromagnetische Energie von mindestens zwei der mehreren Antennenelemente empfangen werden kann und durch einen einzelnen Übertragungsverlauf (210) innerhalb der flexiblen Schaltplatte transportiert werden kann.
6. System nach einem der Ansprüche 1 bis 5, wobei die Sensorvorrichtung ferner einen Befestigungsmechanismus (400) umfasst, um im Betrieb die Sensorvorrichtung (450) an dem Gewebe des Körpers zu befestigen, wobei der Befestigungsmechanismus umfasst: einen Klebeabschnitt (410), der einen Aussparungsbereich (430) definiert, der im Allgemeinen flächengleich mit der Öffnung des Gehäuses ist, wobei der Klebeabschnitt eine Seite davon aufweist, die mit einem ersten Klebemittel beschichtet ist, das dafür ausgelegt ist, sich entfernbar an dem Gewebe zu befestigen, und eine gegenüberliegende Seite davon aufweist, die mit einem zweiten Klebemittel beschichtet ist, das dafür ausgelegt ist, sich an einer Bodenoberfläche des Gehäuses zu befestigen.
7. System nach Anspruch 6, wobei der Befestigungsmechanismus (400) ferner ein Ablöseband (420) umfasst, das an der Umfangslänge des Klebeabschnitts (410) befestigt ist.
8. System nach Anspruch 6 oder 7, wobei das erste Klebemittel weniger Klebkraft als das zweite Klebemittel bereitstellt.
9. System nach einem der Ansprüche 1 bis 8, wobei

die elektrische Abschirmung einen hinteren Abschnitt (66), der zu einer Rückseite des Substrats benachbart ist, Seitenabschirmungen (68), die Seiten des Substrats umfassen, und einen Vorderabschnitt (67), der zu einer Vorderseite des Substrats benachbart ist und der sich von den Seitenabschirmungen aus nach innen erstreckt, umfasst, wobei ein Rand zwischen der ebenen Antenne und dem Vorderabschnitt aufrechterhalten wird.

## Revendications

1. Système comprenant un capteur destiné à détecter une modification dans le niveau d'un fluide à l'intérieur du tissu d'un corps, ainsi qu'une unité de commande associée reliée au capteur, le capteur comprenant :

un logement (20) comportant une pluralité de segments (30, 30a) formant pont, les segments formant pont (30, 30a) comprenant des segments de pontage (30) et des segments d'espacement (30a), les segments formant pont se raccordant au niveau d'intersections (50) et étant agencés pour circonscrire une ouverture (24) définie par le logement, et

quatre et seulement quatre éléments d'antenne (60a à d), au moins partiellement appuyés dans le logement au niveau des intersections des segments formant pont (30a, 30b), les éléments antenne (60a à d) étant agencés en une forme rectangulaire et les coins de la forme rectangulaire étant formés par les éléments d'antenne (60a à d), chaque élément d'antenne comprenant une antenne globalement plane montée sur un matériau formant substrat (64) au niveau de la base de l'antenne plane, la surface externe de l'antenne plane étant opposée au substrat, chaque élément d'antenne comprenant de plus un écran électrique entourant le substrat,

dans lequel les éléments d'antenne (60a à d) comprennent une première paire d'éléments d'antenne (70a) et une seconde paire d'éléments d'antenne (70b), la première paire d'éléments d'antenne (70a) comprenant un premier élément d'antenne d'émission (60a) et un premier élément d'antenne de réception (60b), le premier élément d'antenne d'émission (60a) étant espacé du premier élément d'antenne de réception (60b) et relié à celui-ci par l'intermédiaire d'un premier segment de pontage (30), la seconde paire d'éléments d'antenne comprenant un second élément d'antenne d'émission (60c) et un second élément d'antenne de réception (60d), le second élément d'antenne d'émission (60c) étant espacé du second élément d'antenne de réception (60d) et relié à celui-ci par

l'intermédiaire d'un second segment de pontage (30),

dans lequel l'unité de commande est conçue pour émettre un signal vers la première et la seconde antenne d'émission (60a, 60c), et elle est conçue pour recevoir un signal provenant de la première et de la seconde antenne de réception (60b, 60d),

dans lequel une première zone de plus grande sensibilité (80a) est définie par la surface comprise entre le premier élément d'antenne d'émission (60a) et le premier élément d'antenne de réception (60b), et une seconde zone de plus grande sensibilité (80b) est définie par la surface comprise entre le second élément d'antenne d'émission (60c) et le second élément d'antenne de réception (60d),

dans lequel la première paire d'éléments d'antenne (70a) et la seconde paire d'éléments d'antenne (70b) sont placées pour être éloignées d'un premier segment d'espacement (30a) et d'un second segment d'espacement (30a) de telle sorte que soit définie une zone ouverte (24) par la première paire d'éléments d'antenne (70a), la seconde paire d'éléments d'antenne (70b), le premier segment d'espacement (30a) et le second segment d'espacement (30a), le premier segment d'espacement (30a) et le second segment d'espacement (30a) créant un espace entre la première paire d'éléments d'antenne (70a) et la seconde paire d'éléments d'antenne (70b) afin de créer une zone de sensibilité réduite (84) entre la première paire d'éléments d'antenne (70a) et la seconde paire d'éléments d'antenne (70b),

et dans lequel la distance entre les première et seconde paires d'antennes (70a, 70b) est supérieure à la distance entre le premier élément d'antenne d'émission (60a) et le premier élément d'antenne de réception (60b), et supérieure à la distance entre le second élément d'antenne d'émission (60c) et le second élément d'antenne de réception (60d).

2. Système selon la revendication 1, dans lequel le capteur comprend en outre un assemblage de câbles HF (100) pour chacun des éléments d'antenne (60a à d), chacun des ensembles de câbles HF comprenant à l'une de ses extrémités un connecteur (110) et étant relié électriquement à l'élément d'antenne qui lui correspond à son autre extrémité.
3. Système selon la revendication 1 ou 2, dans lequel le capteur comprend en outre au moins une carte à circuit imprimé souple (200) pour permettre la transmission d'énergie depuis et vers les éléments d'antenne (60a à d).

4. Système selon la revendication 3, dans lequel la carte à circuit imprimé souple (200) comprend au moins un séparateur (212) de telle sorte que l'énergie électromagnétique puisse être transmise vers au moins deux de la pluralité d'éléments d'antenne en utilisant une unique piste de transmission (210) dans la carte à circuit imprimé souple. 5
5. Système selon la revendication 3 ou 4, dans lequel la carte à circuit imprimé souple comprend au moins un circuit de combinaison (212) de telle sorte que l'énergie électromagnétique puisse être reçue depuis au moins deux de la pluralité d'éléments d'antenne et soit transportée par une unique piste de transmission (210) dans la carte à circuit imprimé souple. 10  
15
6. Système selon l'une quelconque des revendications 1 à 5, dans lequel le capteur comprend en outre un mécanisme de fixation (400) destiné à fixer fonctionnellement le capteur (450) au tissu du corps, le mécanisme de fixation comprenant : une partie adhésive (410) définissant une région de découpe (430) globalement coextensive avec l'ouverture du logement, la partie adhésive présentant un côté revêtu d'un premier adhésif conçu pour se fixer au tissu tout en étant amovible, et le côté opposé de celle-ci comportant un second adhésif conçu pour se fixer à la surface inférieure du logement. 20  
25  
30
7. Système selon la revendication 6, dans lequel le mécanisme de fixation (400) comprend en outre une bande de libération (420) fixée au périmètre de la partie adhésive (410). 35
8. Système selon la revendication 6 ou 7, dans lequel le premier adhésif procure moins d'adhérence que le second adhésif.
9. Système selon l'une quelconque des revendications 1 à 8, dans lequel l'écran électrique comprend une section arrière (66) contiguë au côté arrière du substrat, des écrans latéraux (68) entourant les flancs du substrat et une section avant (67) contiguë au côté avant du substrat et s'étendant vers l'intérieur depuis les écrans latéraux, une marge étant maintenue contre l'antenne plane et la section avant. 40  
45  
50  
55

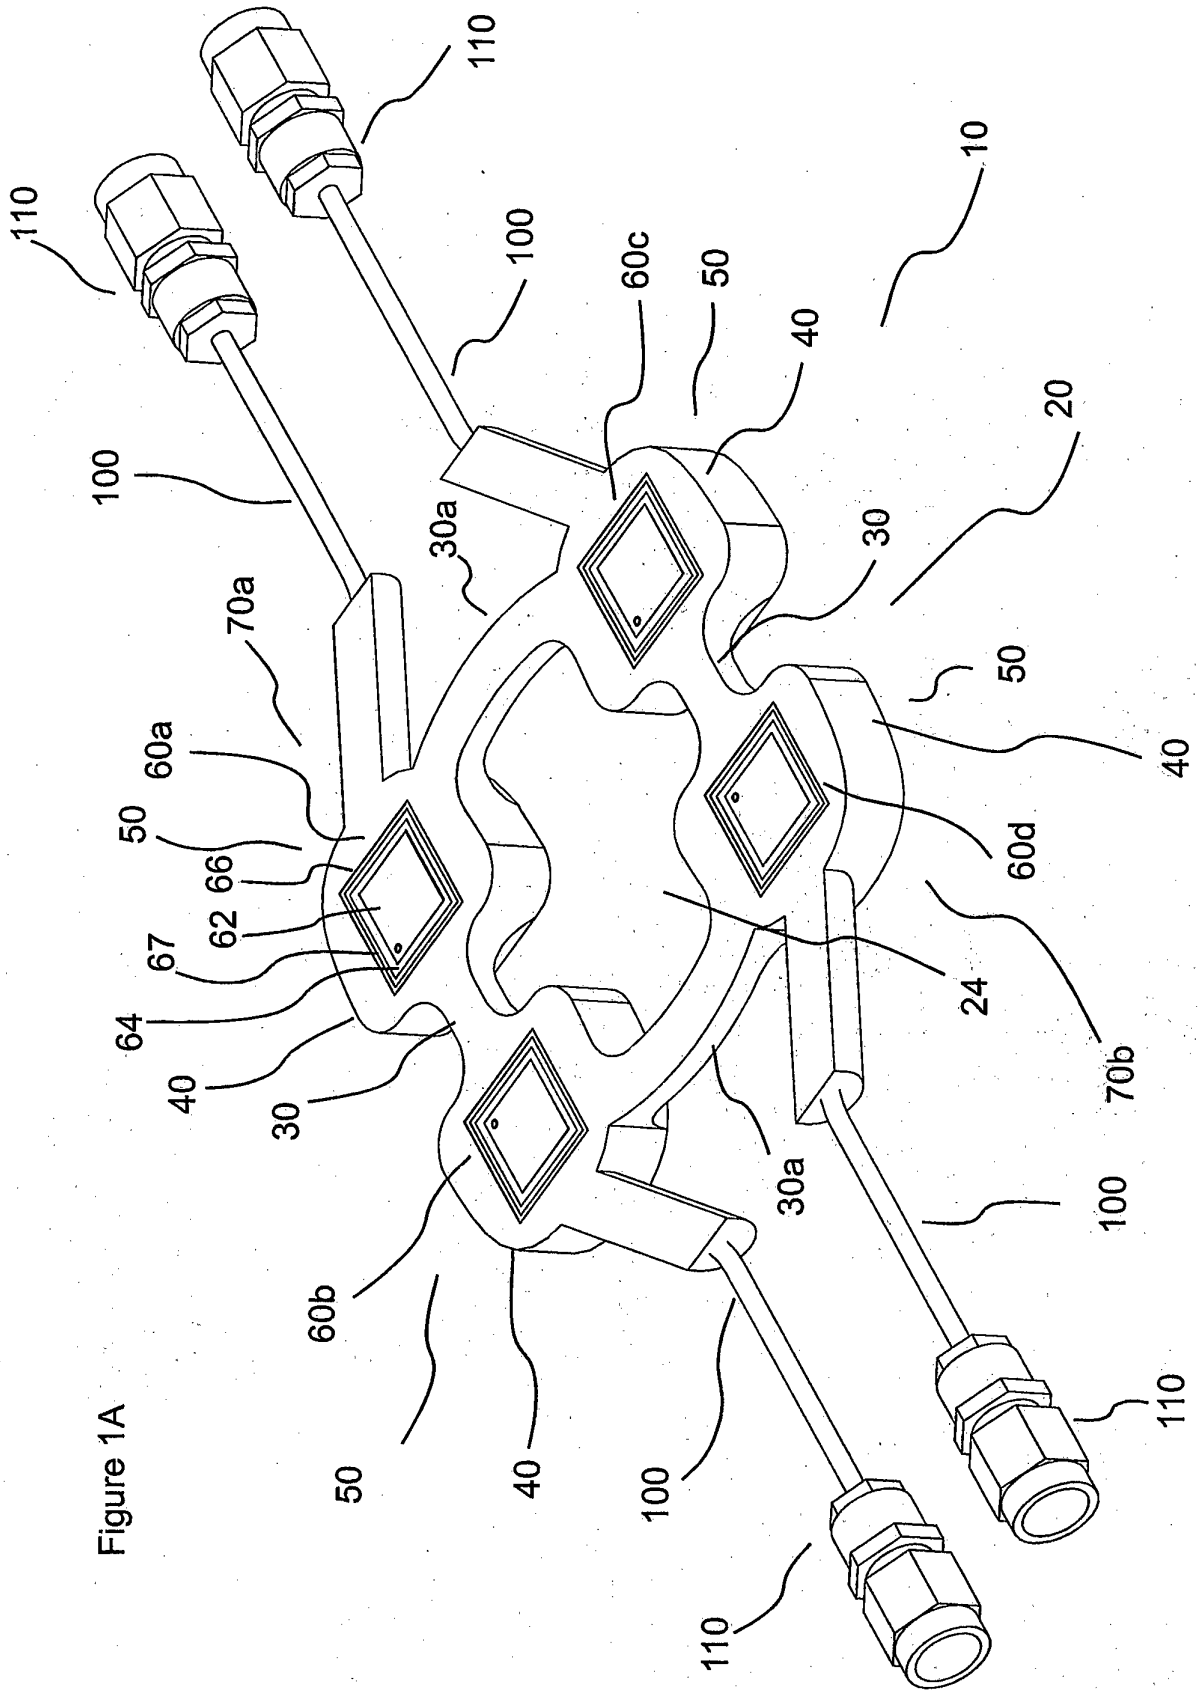
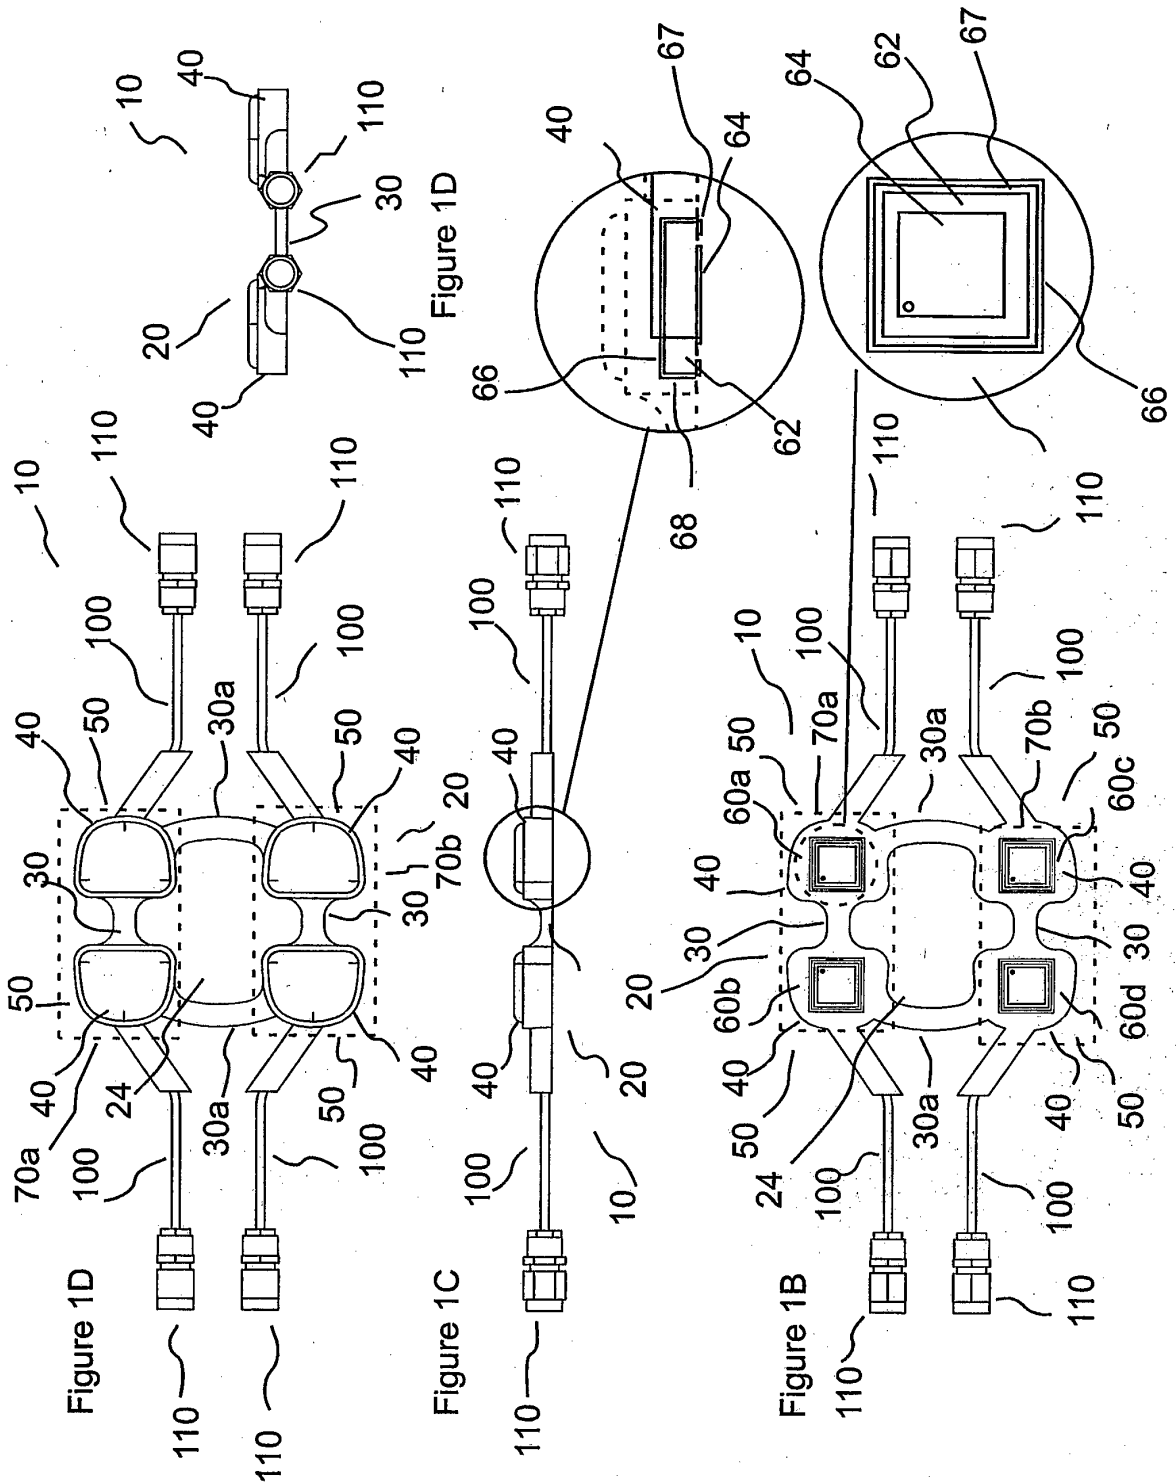


Figure 1A



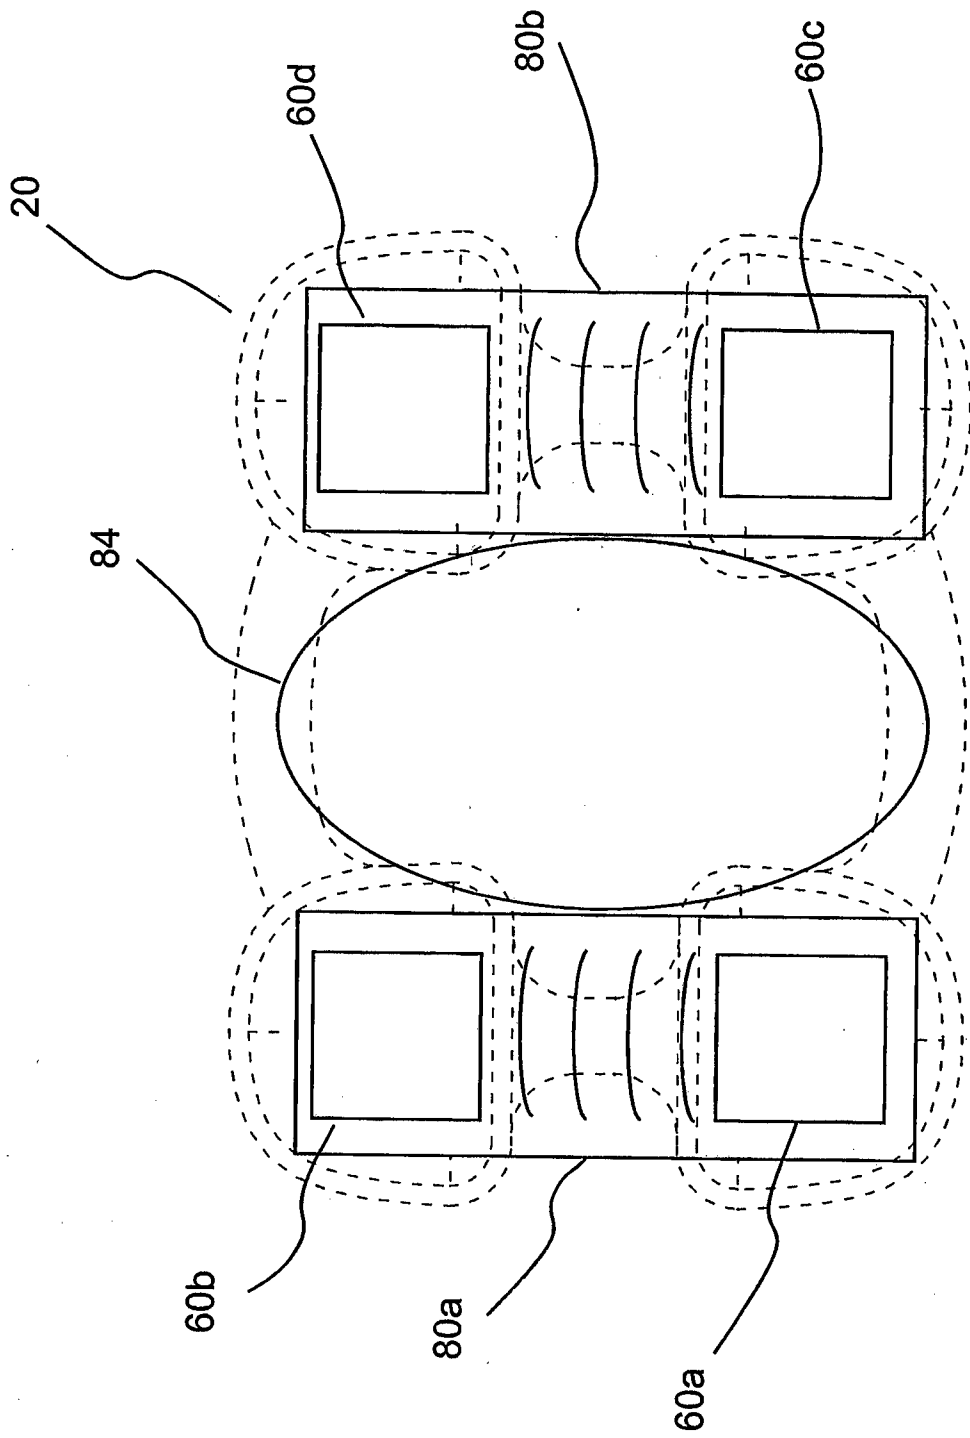
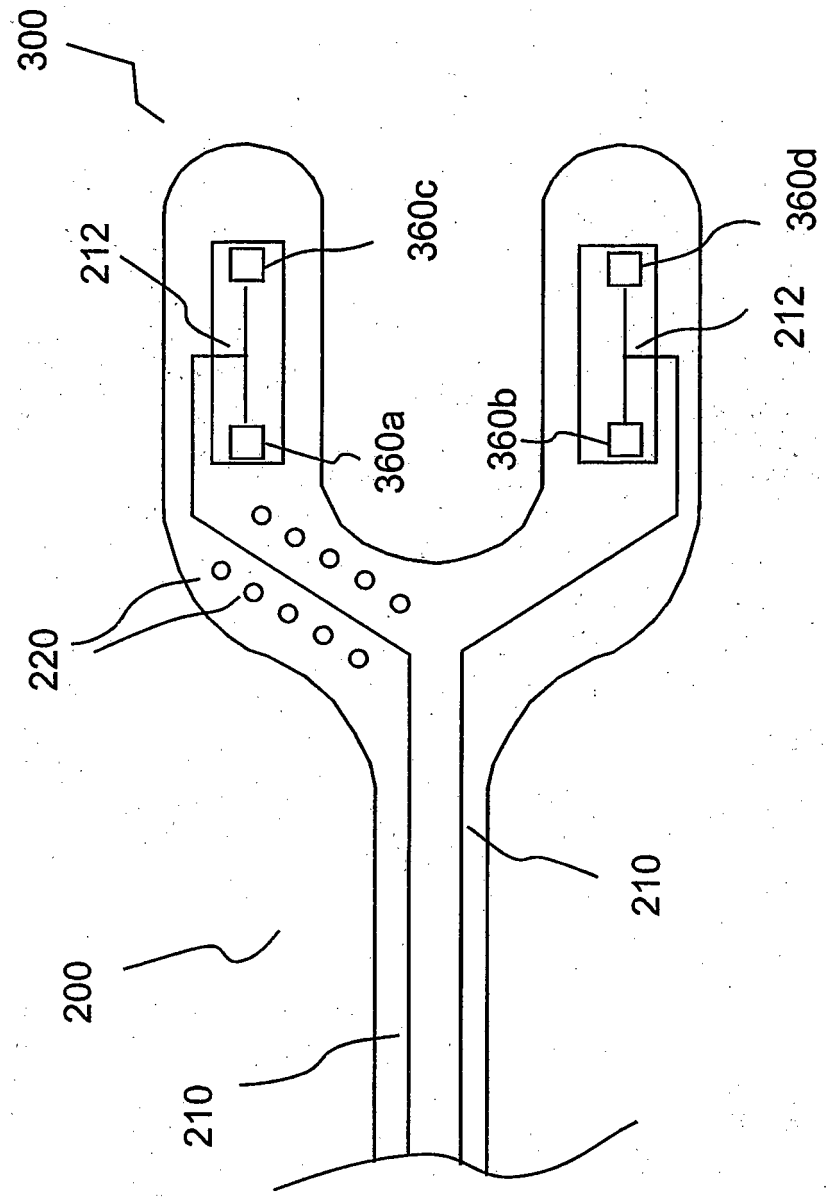


Figure 2

Figure 3



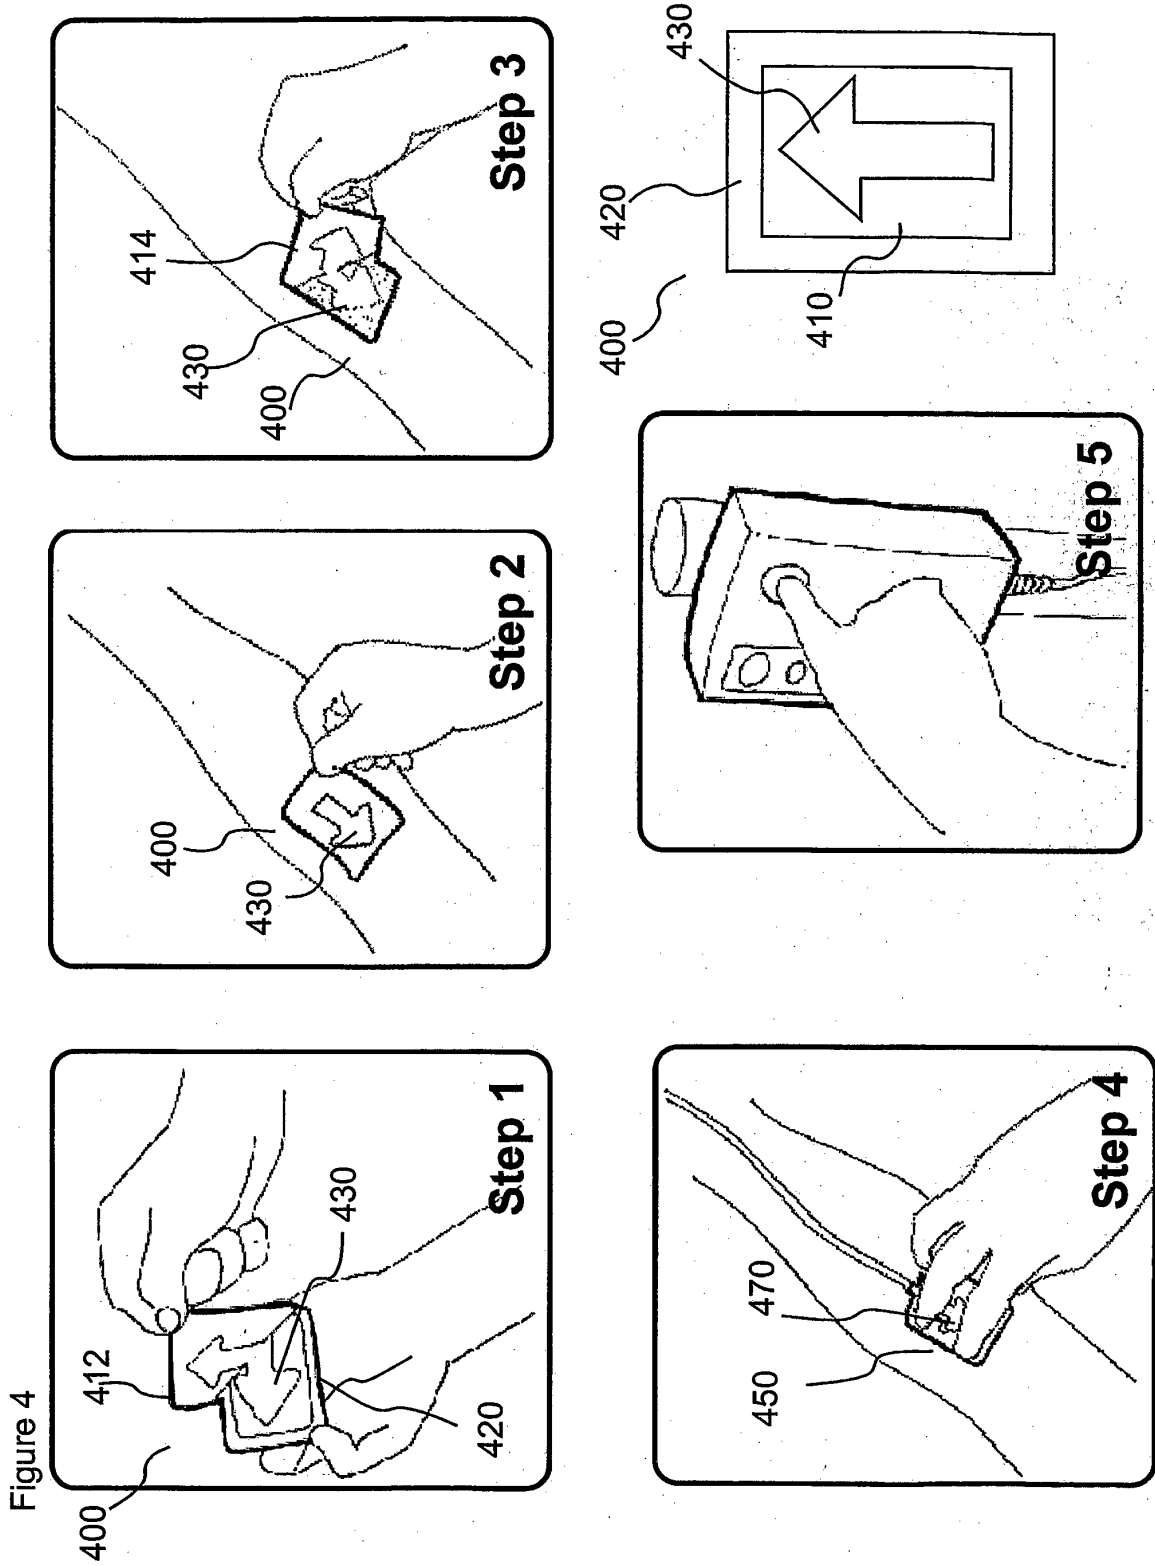


Figure 5

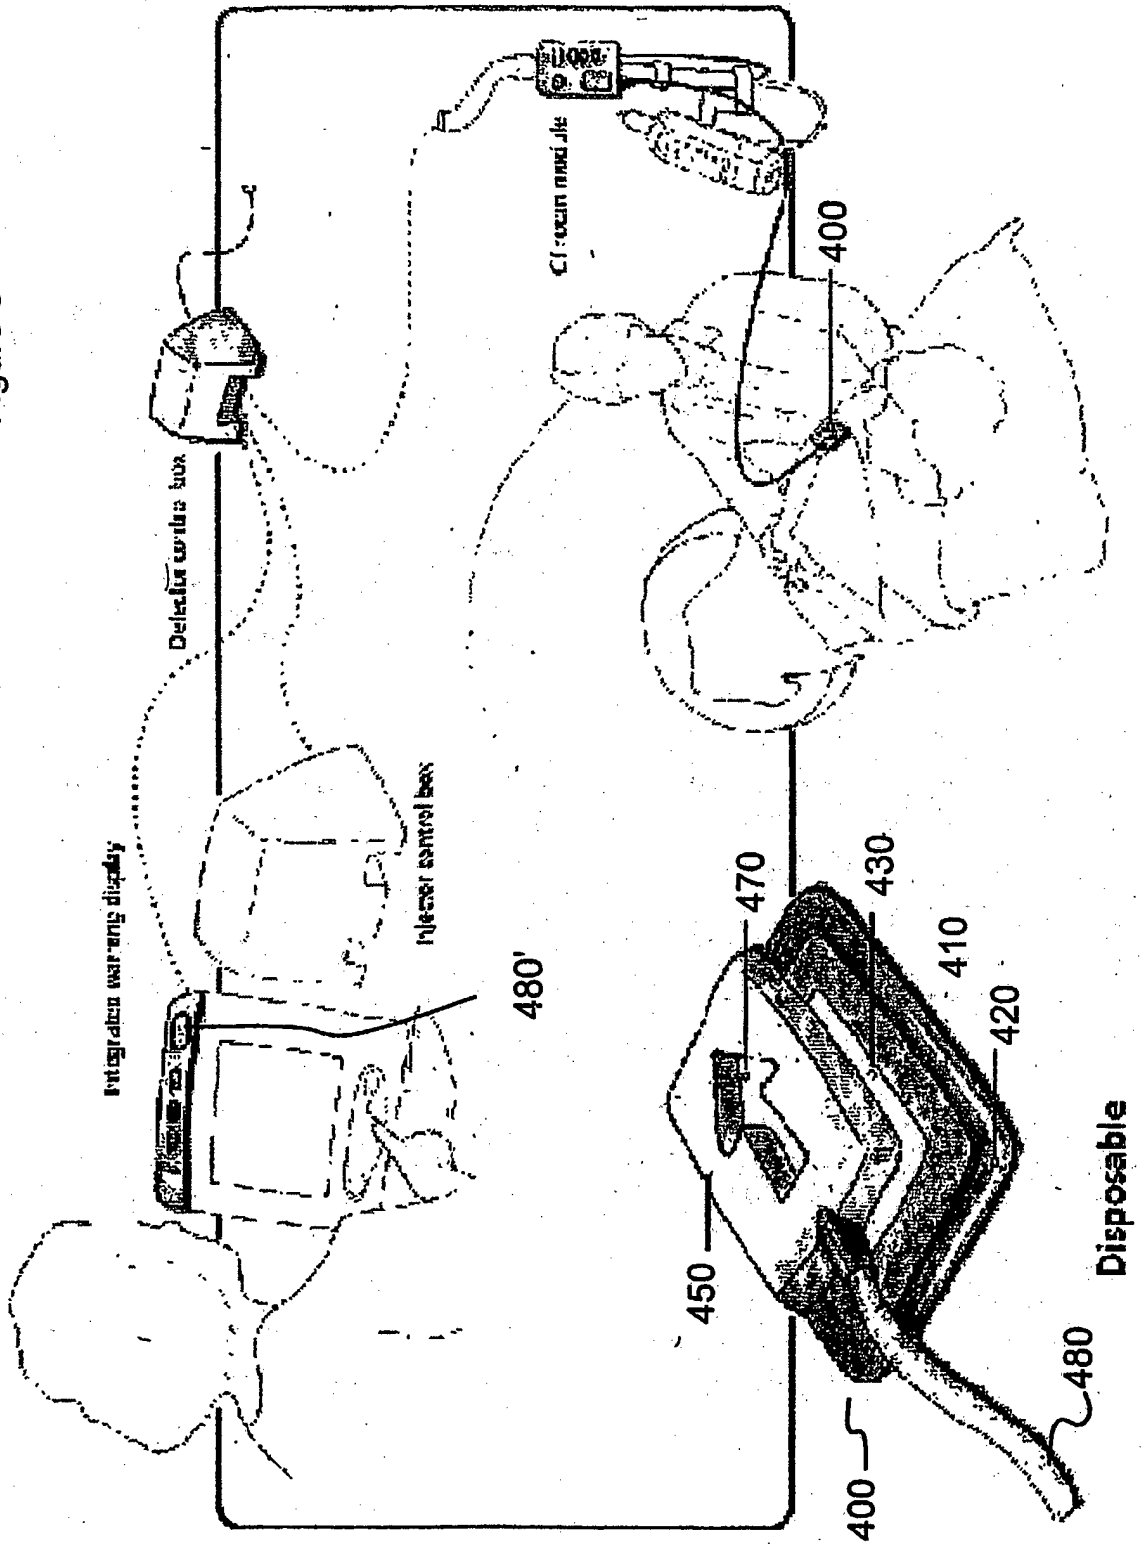




Figure 6B

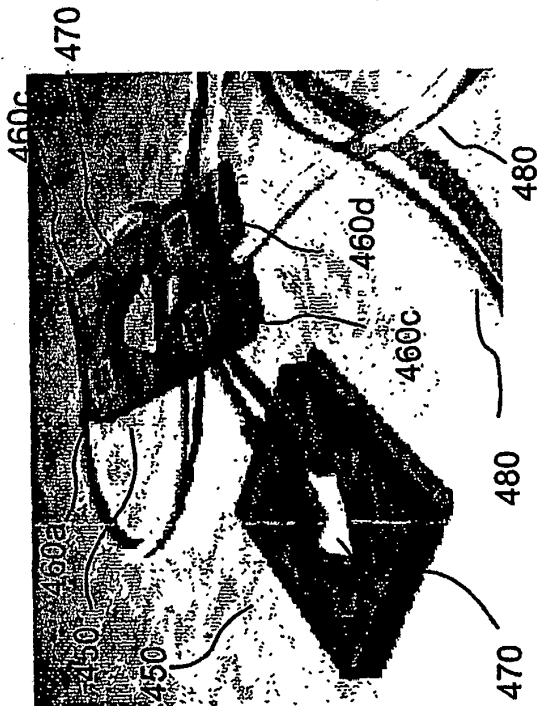


Figure 6A



Figure 6C

680

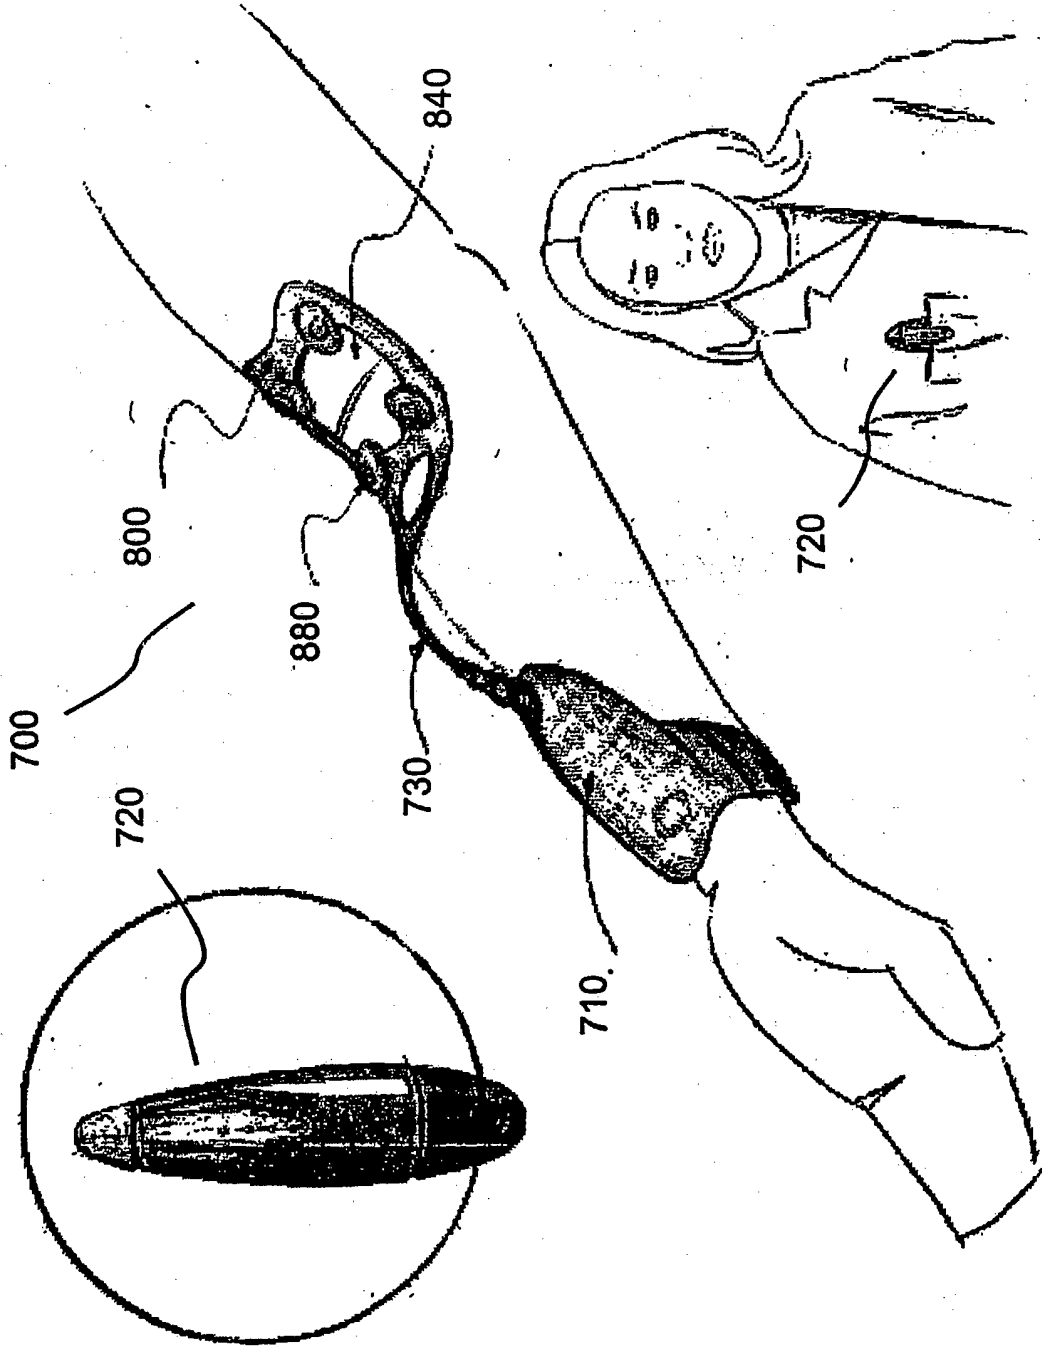


Figure 7

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 51435503 P [0001]
- US 5964703 A [0012]
- US 5947910 A [0012]
- US 4877034 A [0013]
- US 4647281 A [0014]
- US 5334141 A [0015]
- US 5954668 A [0015]
- US 4488559 A [0016]
- US 4240445 A [0016]
- US 4690149 A [0016]
- US 6233479 A [0016]
- US 6061589 A [0017]
- US 6332087 A [0018]
- US 6026173 A [0018]
- US 20030036674 A1 [0020]
- US 20030036674 A [0027] [0032] [0033] [0040]
- US 20030036713 A [0027] [0032] [0033] [0040]

**Non-patent literature cited in the description**

- **M. KENT.** *Hand Held Fat/Water Determination*, 1993, [www.distell.conz/products/papers/paper2.htm](http://www.distell.conz/products/papers/paper2.htm) [0018]
- **BIRNBAUM et al.** Extravasation Detection Accessory: Clinical Evaluation in 500 Patients. *Radiolog*, 1999 [0039]

专利名称(译)	用于检测流体变化的系统		
公开(公告)号	<a href="#">EP1675506B1</a>	公开(公告)日	2015-09-16
申请号	EP2004796177	申请日	2004-10-25
[标]申请(专利权)人(译)	梅德拉股份有限公司		
申请(专利权)人(译)	MEDRAD INC.		
当前申请(专利权)人(译)	拜耳医疗保健INC.		
[标]发明人	BOUTON CHAD RUGGERI FELICIA HARPHAM RAYMOND HELD JEFFREY		
发明人	BOUTON, CHAD RUGGERI, FELICIA HARPHAM, RAYMOND HELD, JEFFREY		
IPC分类号	A61B5/00 A61B5/053 A61M5/168 G01L G01N22/00		
CPC分类号	A61B5/0004 A61B5/0507 A61B5/0537 A61B5/411 A61B5/4878 A61B5/6833 A61B2562/02 A61B2562/046 A61M5/16836 A61M2205/3523		
代理机构(译)	THOMA , MICHAEL		
优先权	60/514355 2003-10-24 US		
其他公开文献	EP1675506A2 EP1675506A4		
外部链接	<a href="#">Espacenet</a>		

摘要(译)

用于无线传递流体水平和/或身体组织内的流体水平变化的改进系统 ( 700 ) 包括用于检测流体水平和/或水平变化的传感器装置 ( 800 )。组织内的液体;发射器 ( 710 )，其与传感器装置可操作地连接，用于从其接收指示流体水平和/或组织内流体水平变化的信号，并用于发送指示流体水平的无线信号和/或液体水平的变化;遥控接收器 ( 720 )，用于接收发射器发射的无线信号。

$$\epsilon^* = \epsilon' - j\epsilon''$$