



US 20050237812A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0237812 A1**

Chang

(43) **Pub. Date: Oct. 27, 2005**

(54) **THIN FILM TRANSISTOR ARRAY PANEL
FOR A LIQUID CRYSTAL DISPLAY**

(30) **Foreign Application Priority Data**

Jun. 7, 2002 (KR) 2002-0031803

(75) Inventor: **Jong-Woong Chang, Suwon-city (KR)**

Publication Classification

Correspondence Address:

**F. CHAU & ASSOCIATES, LLC
130 WOODBURY ROAD
WOODBURY, NY 11797 (US)**

(51) **Int. Cl. 7 G11C 11/34**

(52) **U.S. Cl. 365/185.22**

(73) Assignee: **Samsung Electronics Co., Ltd.**

(57) ABSTRACT

(21) Appl. No.: **11/168,886**

A plurality of gate lines formed on an insulating substrate, each gate line including a pad for connection to an external device; a plurality of data lines intersecting the gate lines and insulated from the gate lines, each data line including a pad for connection to an external device; and a conductor overlapping at least one of the gate lines and the data lines are included. An overlapping distance of the gate lines or the data lines and a width of the conductor decreases as the length of the gate lines or the data lines increases. Accordingly, the difference in the RC delays due to the difference of the length of the signal lines is compensated to be reduced.

(22) Filed: **Jun. 28, 2005**

Related U.S. Application Data

(63) Continuation of application No. 10/915,584, filed on Aug. 9, 2004, now Pat. No. 6,919,591.

Continuation of application No. 10/359,731, filed on Feb. 6, 2003, now Pat. No. 6,774,414.

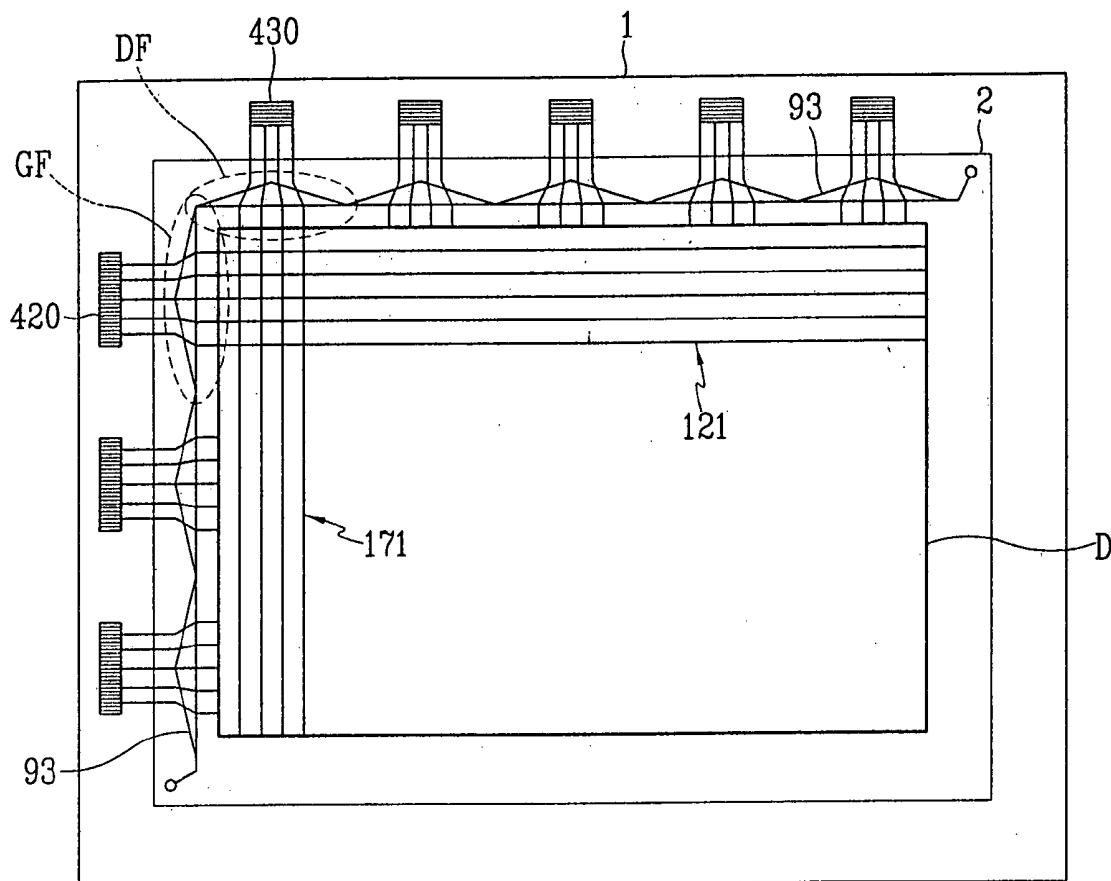


FIG. 1

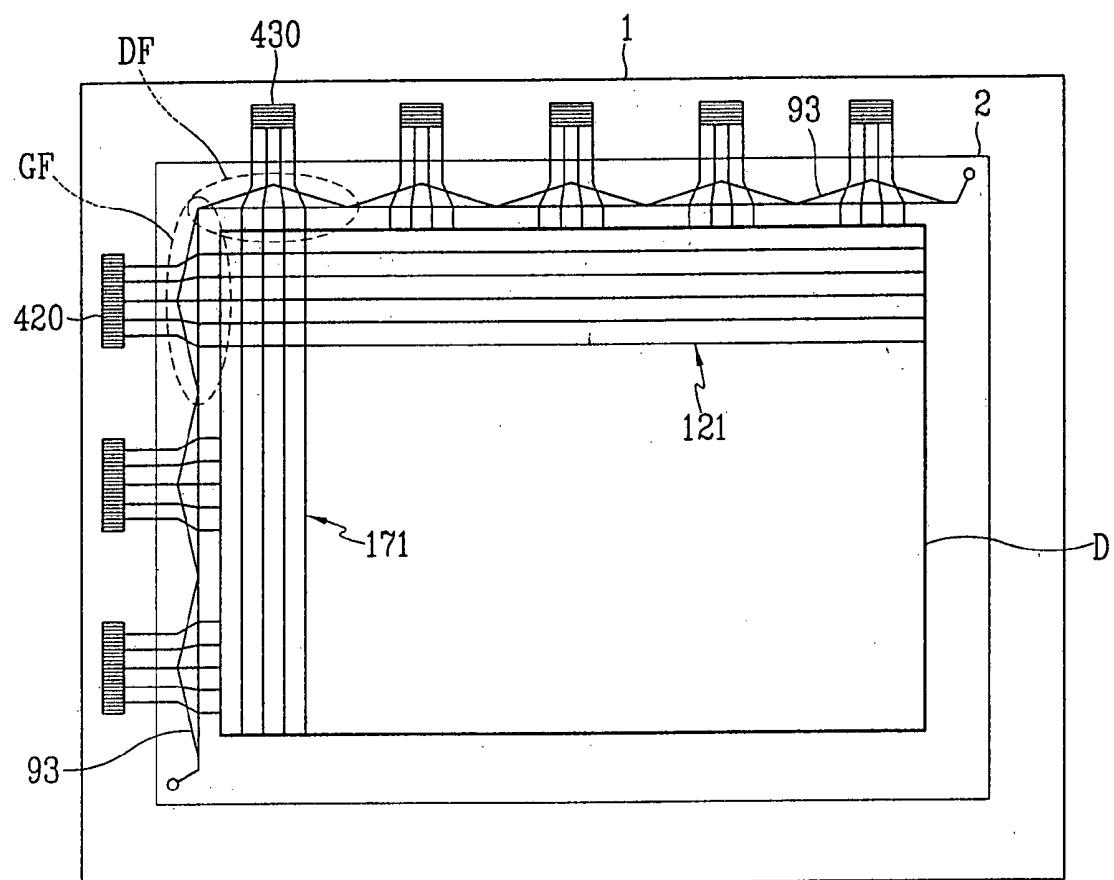


FIG. 2

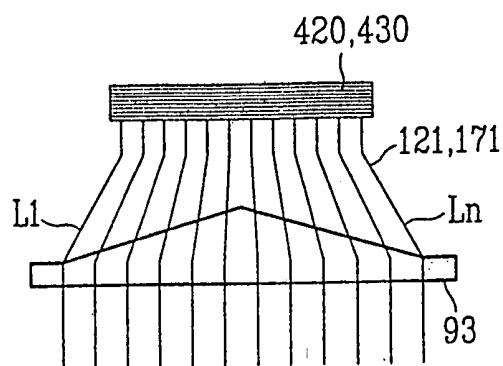


FIG. 3

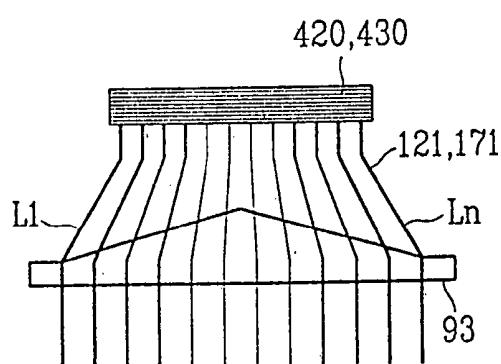


FIG. 4

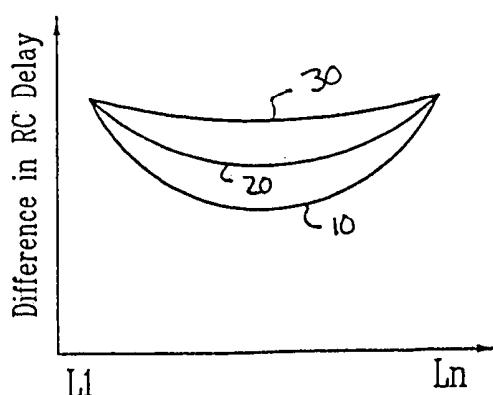


FIG. 5

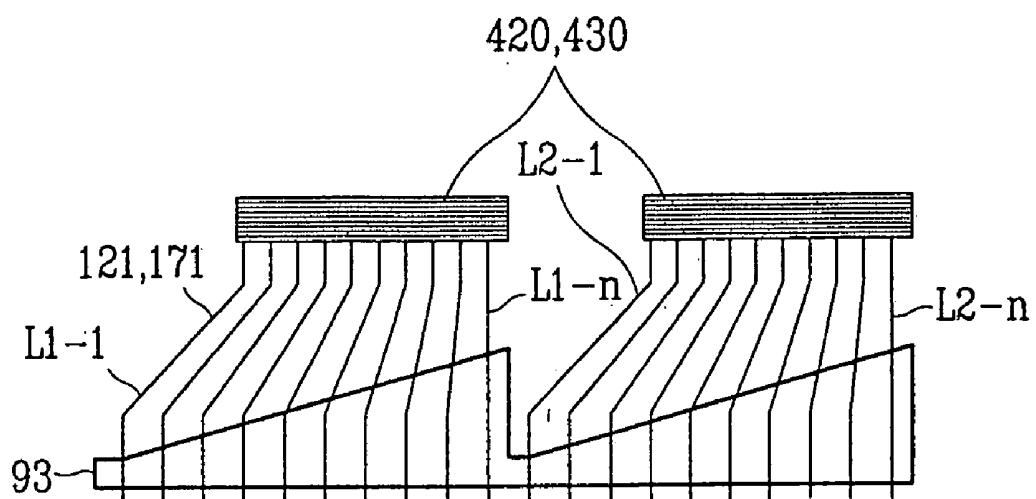


FIG. 6

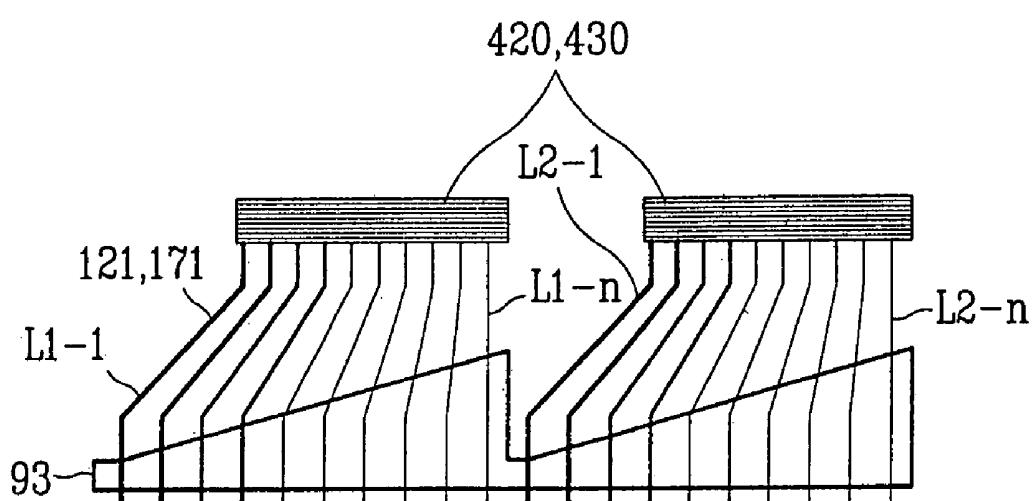


FIG. 7A
PRIOR ART

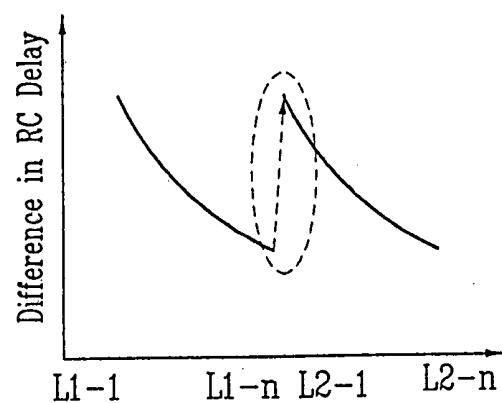


FIG. 7B

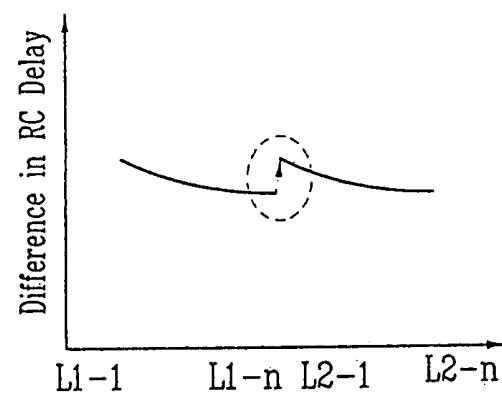


FIG. 7C

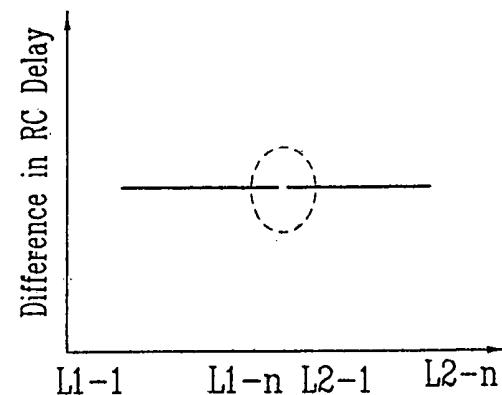


FIG. 8

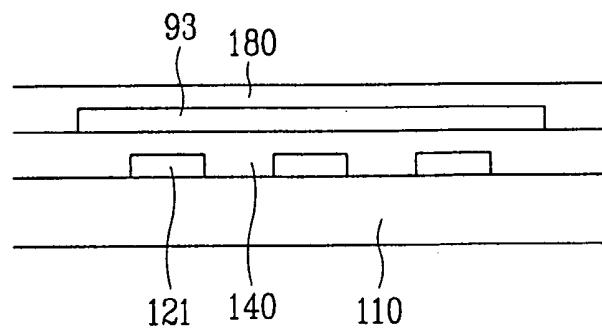


FIG. 9

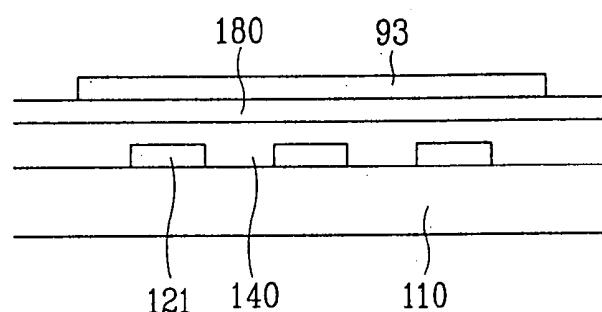


FIG. 10


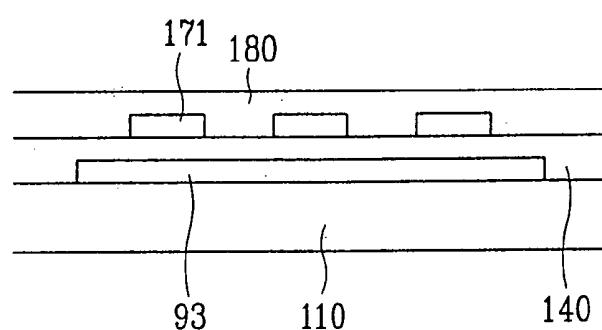


FIG. 11

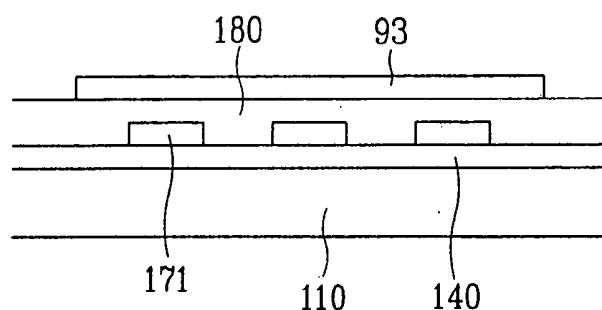

THIN FILM TRANSISTOR ARRAY PANEL FOR A LIQUID CRYSTAL DISPLAY

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a Continuation of U.S. application Ser. No. 10/915,584 filed Aug. 9, 2004 and 10/359,731 filed on Feb. 6, 2003, and now U.S. Pat. No. 6,774,414, which claims priority to Korean Application No. 01-31803 filed on Jun. 7, 2002.

BACKGROUND OF THE INVENTION

[0002] (a) Field of the Invention

[0003] The present invention relates to a thin film transistor array panel, and in particular, to a thin film transistor array panel including a fan out area provided with a connection connecting a signal line to a pad and located between a display area and a pad area.

[0004] (b) Description of the Related Art

[0005] Generally, a thin film transistor ("TFT") array panel for a liquid crystal display ("LCD") or an electroluminescence ("EL") display is used as a circuit board for driving respective pixels in an independent manner. The TFT array panel includes a scanning signal wire or a gate wire transmitting scanning signals, an image signal wire or a data wire transmitting image signals, TFTs connected to the gate and the data wire, pixel electrodes connected to the TFTs, a gate insulating layer covering the gate wire for insulation, and a passivation layer covering the TFTs and the data wire for insulation. The TFT includes a gate electrode, which is a part of the gate wire, a semiconductor layer forming a channel, source and drain electrodes, which are parts of the data wire, a gate insulating layer, and a passivation layer. The TFT is a switching element for transmitting the image signals from the data wire to the pixel electrode in response to the scanning signals from the gate wire.

[0006] A plurality of driving integrated circuits ("ICs") are connected to the TFT array panel for applying driving signals to the gate lines and the data lines. The driving ICs are connected to the gate lines or the data lines via pads, which are clustered on a narrow area for connection to the driving ICs. On the contrary, the distances between the gate lines or the data lines on a display area are determined by the size of the pixels to have larger values than the distances between the pads. Accordingly, a fan-out area where the distances between the signal lines gradually increase is provided between the pad area and the display area. The fan-out area results in the difference in the length between the signal lines, thereby causing different RC delays between the signal lines. The difference in the RC delay causes a difference in image signals resulting in a deteriorated image quality.

SUMMARY OF THE INVENTION

[0007] In accordance with the present invention, a difference in RC delay between signal lines of a thin film transistor array panel is reduced. A conductor having a varying width depending on an overlapping length of the conductor with signal lines is provided.

[0008] According to an embodiment of the present invention, a thin film transistor array panel is provided, which

includes: an insulating substrate; a plurality of gate lines formed on the insulating substrate, each gate line including a pad for connection to an external device; a plurality of data lines intersecting the gate lines and insulated from the gate lines, each data line including a pad for connection to an external device; and a conductor overlapping at least one of the gate lines and the data lines, wherein an overlapping distance of the gate lines or the data lines and a width of the conductor decreases as the length of the gate lines or the data lines increases.

[0009] Preferably, each data line includes a pad portion including the pad, a display portion, and a fan-out portion connecting the display portion and the pad portion, and width of the fan-out portion of the data line increases as length of the fan-out portion of the data line increases. Preferably, each gate line comprises a pad portion including the pad, a display portion, and a fan-out portion connecting the display portion and the pad portion, and width of the fan-out portion of the gate line increases as length of the fan-out portion of the data line increases. The conductor is preferably applied with a common electrode voltage. It is preferable that the thin film transistor array panel further includes a pixel electrode located on a pixel area defined by intersections of the gate lines and the data lines, wherein the conductor includes substantially the same layer and the same material as the pixel electrode.

[0010] The conductor may overlap the gate lines, wherein the conductor includes substantially the same layer and the same material as the data lines. The conductor may overlap the data lines, wherein the conductor includes substantially the same layer and the same material as the gate lines. The conductor may include a first conductive segment overlapping the gate lines and a second conductive segment overlapping the data lines, the first conductive segment includes substantially the same layer and the same material as the data lines, and the second conductive segment substantially the same layer and the same material as the gate lines. The conductor may be floated.

[0011] According to another embodiment of the present invention, a thin film transistor array panel is provided, which includes: an insulating substrate; a plurality of gate lines formed on the insulating substrate, each gate line including a pad for connection to an external device; a gate insulating layer formed on the gate lines; a plurality of data lines formed on the gate insulating layer and intersecting the gate lines, each data line including a pad for connection to an external device; a passivation layer formed on the data lines; and a conductor overlapping at least one of the gate lines and the data lines via at least one of the gate insulating layer and the passivation layer.

[0012] It is preferable that an overlapping distance of the gate lines or the data lines and a width of the conductor decreases as the length of the gate lines or the data lines increases. Preferably, RC delays of the gate lines are substantially the same as each other, and RC delays of the data lines are substantially the same as each other.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] FIG. 1 is a layout view of a TFT array panel according to an embodiment of the present invention;

[0014] FIG. 2 is a layout view of signal lines in a fan-out area of a TFT array panel according to a first embodiment of the present invention;

[0015] **FIG. 3** is a layout view of signal lines in a fan-out area of a TFT array panel according to a second embodiment of the present invention.

[0016] **FIG. 4** is a graph illustrating the RC delays of the signal lines on the fan-out areas of the TFT array panel according to the first and the second embodiments of the present invention compared with the RC delay of a conventional TFT array panel;

[0017] **FIG. 5** is a layout view of signal lines in a fan-out area of a TFT array panel according to a third embodiment of the present invention;

[0018] **FIG. 6** is a layout view of signal lines in a fan-out area of a TFT array panel according to a fourth embodiment of the present invention;

[0019] **FIG. 7A** is a graph illustrating the RC delay of the signal lines on the fan-out areas of a conventional TFT array panel;

[0020] **FIG. 7B** is a graph illustrating the RC delay of the signal lines on the fan-out areas of a TFT array panel according to the third embodiment of the present invention;

[0021] **FIG. 7C** is a graph illustrating the RC delay of the signal lines on the fan-out areas of a TFT array panel according to the fourth embodiment of the present invention;

[0022] **FIG. 8** is a sectional view of signal lines on a gate fan-out area of a TFT array panel according to a fifth embodiment of the present invention;

[0023] **FIG. 9** is a sectional view of signal lines on a gate fan-out area of a TFT array panel according to a sixth embodiment of the present invention;

[0024] **FIG. 10** is a sectional view of signal lines on a data fan-out area of a TFT array panel according to a seventh embodiment of the present invention; and

[0025] **FIG. 11** is a sectional view of signal lines on a data fan-out area of a TFT array panel according to an eighth embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0026] The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the present invention are shown. The present invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

[0027] In the drawings, the thickness of layers and regions are exaggerated for clarity. Like numerals refer to like elements throughout. It will be understood that when an element such as a layer, region or substrate is referred to as being "on" another element, it can be directly on the other element or intervening elements may also be present. In contrast, when an element is referred to as being "directly on" another element, there are no intervening elements present.

[0028] Now, panels for liquid crystal displays (LCDs) according to embodiments of the present invention will be described in detail with reference to the accompanying drawings for one of ordinary skill in the art to easily carry out.

[0029] A TFT array panel according to an embodiment of the present invention will be described with reference to **FIG. 1**, which illustrates an LCD including a TFT array panel according to an embodiment of the present invention.

[0030] An LCD including a TFT array panel according to an embodiment of the present invention includes a TFT array panel **1** and a color filter array panel **2** opposite each other and a liquid crystal layer (not shown) interposed between the TFT array panel **1** and the color filter array panel **2**.

[0031] Regarding the color filter array panel **2**, there are provided a plurality of red, green and blue color filters (not shown), a black matrix (not shown) defining a plurality of pixel areas, and a common electrode (not shown).

[0032] The TFT array panel **1** according to an embodiment of the present invention includes a plurality of gate lines **121** extending in a transverse direction and transmitting scanning signals, a plurality of data lines **171** intersecting the gate lines **121** to define a plurality of pixel areas and transmitting image signals, a plurality of pixel electrodes (not shown) located on the pixel areas arranged in a matrix and made of transparent conductive material such as indium tin oxide ("ITO") and indium zinc oxide ("IZO") or reflective conductive material, and a plurality of TFTs (not shown) located at the intersections of the gate lines **121** and the data lines **171** and connected to the gate lines **121** and the data lines **171** to control the image signals to be applied to the pixel electrodes in response to the scanning signals.

[0033] In the meantime, the TFT array panel **1** includes a display area **D** for displaying images, a plurality of pad areas and a plurality of fan-out areas **GF** and **DF** located between the display area and the pad areas. The display area **D** includes the pixel areas defined by the intersections of the signal lines **121** and **171**. Each pad area is provided with a plurality of gate pads (not shown) for transmitting the scanning signals from an external device to the gate lines **121** or a plurality of data pads (not shown) for transmitting the image signals from an external device to the data lines **171**. Each fan-out area is provided for connecting the signal lines **121** and **171** to the clustered pads.

[0034] Although the color filters, the black matrix and the common electrode in this embodiment are provided on the color filter array panel **2**, they may be provided on the TFT array panel **1**.

[0035] The pad areas are connected to a plurality of gate driving integrated circuits ("ICs") **420** and a plurality of data driving ICs **430** mounted by out lead bonding ("OLB"). A plurality of conductors **93** are provided on the fan-out areas **GF** and **DF** and overlap the gate lines **121** or the data lines **171**. The conductors **93** are connected to a common electrode voltage to reduce the RC delay due to the difference in length between the signal lines **121** and **171** on the fan-out area **GF** and **DF**. Alternatively, the conductors **93** are floated. The width of each conductor **93** varies depending on the length of the signal lines **121** and **171**, e.g., the width increases as the length of the signal line **121** and **171** overlapping the conductor **93** decreases.

[0036] Fan-out areas of TFT array panels according to embodiments of the present invention will be described more in detail below.

[0037] The embodiments illustrate an exemplary chip on glass (“COG”) type LCD where the gate driving ICs **420** and the data driving ICs **430** are mounted directly on the TFT array panel 1 using OLB. Alternatively, the driving ICs **420** and **430** may be mounted on a separate panel or films (e.g., tape carrier package type (“TCP”)).

[0038] **FIG. 2** is a layout view of signal lines in a fan-out area of a TFT array panel according to a first embodiment of the present invention.

[0039] The width of the signal lines **121** and **171** of a TFT array panel according to a first embodiment of the present invention are equal to each other and the signal lines **121** and **171** overlap the conductor **93**. The width of each conductor **93** is largest at the overlap with the shortest one among the signal lines **121** and **171** and decreases as the length of the signal lines **121** and **171** overlapping the conductor **93** increases. When a group of signal lines L1-Ln connected to one IC on the fan-out area are symmetrically arranged, the conductor **93** is the widest at the center and becomes narrow as it goes to ends.

[0040] The conductors **93** include the same layer made of a transparent conductive material such as ITO and IZO as the pixel electrodes. Alternatively, the conductors **93** are preferably made of Al alloy. The conductors **93** may include the same layer as the signal lines **121** or **171**. The conductors **93** overlapping the gate lines **121** preferably include the same layer as the data lines **171**, e.g., to be made of the same material as the data lines **171**, while the conductors **93** overlapping the data lines **171** preferably include the same layer as the gate lines **121**, e.g., to be made of the same material as the gate lines **121**.

[0041] The conductors **93** are connected to the common voltage via dummy pins of ICs.

[0042] The capacitance between the conductors **93** and the signal lines compensates for the difference in resistance and capacitances between the signal lines.

[0043] **FIG. 3** is a layout view of signal lines **121**, **171** in a fan-out area of a TFT array panel according to a second embodiment of the present invention.

[0044] A plurality of conductors **93** overlapping signal lines **121** and **171** are provided on a TFT array panel 1 according to a second embodiment of the present invention. The width of each conductor **93** is largest at the overlap with the shortest one among the signal lines **121** and **171** and decreases as the length of the signal lines **121** and **171** overlapping the conductor **93** increases, like the first embodiment. In addition, a group of signal lines L1-Ln connected to one IC on the fan-out area are symmetrically arranged like the first embodiment.

[0045] Differently, the width of the signal lines **121** and **171** increases in proportion to their lengths. The increase of the width in proportional to the length is intended to make the resistances of the signal lines **121** and **171** equal. For example, high resistance of a signal line including a long portion on the fan-out area is compensated by this configuration. In the fan-out area having a symmetrical arrangement of the signal lines L1 and Ln connected to one IC according to this embodiment, the width of the signal lines decreases as it goes to the center while the width increases as it goes to the ends.

[0046] The RC delay becomes much more uniform by providing the conductors **93** for compensating the difference in the capacitances and by widening the signal lines **121** and **171** in proportion to their lengths for compensating the difference in the resistances.

[0047] Only the variation of the width of the signal lines without the provision of the conductor may compensate the RC delay. However, the widthwise variation is limited by practical processes such as the limitation of the distance between the signal lines due to the resolution of light expositors, the limitation of the width of the signal lines due to the etching errors, and the marginal consideration of a cutting process for cutting the substrates to separate them into a plurality of cells for LCDs. Accordingly, only the variation of the width of the signal lines without the conductor may not fully compensate the difference in the RC delay between the signal lines.

[0048] **FIG. 4** is a graph illustrating the RC delay of signal lines on a fan-out area of a TFT array panel according to the first and the second embodiments of the present invention compared with the RC delay of a conventional TFT array panel. The abscissa of **FIG. 4** indicates the positions of the signal lines connected to one IC. For example, L1 and Ln indicate the leftmost and the rightmost signal lines, respectively.

[0049] The lowermost curve **10** shown in **FIG. 4** represents the RC delay of the signal lines of a conventional TFT array panel without any compensation for RC delay. The intermediate curve **20** represents the RC delay of the signal lines of a TFT array panel with conductors **93** according to the first embodiment. The uppermost curve **30**, which is nearly a straight line, represents the RC delay of the signal lines with different widths of a TFT array panel with conductors **93** according to the second embodiment.

[0050] **FIG. 4** suggests that the provision of the conductors **93** and the variation of the line width of the signal lines make the RC delay uniform.

[0051] **FIG. 5** is a layout view of signal lines **121**, **171** in a fan-out area of a TFT array panel according to a third embodiment of the present invention.

[0052] According to the third embodiment, the arrangement of the signal lines **121** and **171** connected to one IC **420**, **430** on the fan-out area are asymmetrical. However, a rule that the width of the conductor **93** decreases as the length of the signal lines **121** and **171** overlapping the conductor **93** increases is also applied to this embodiment like the first embodiment. Under this rule, the conductor **93** has various shapes depending on the arrangement of the signal lines **121** and **171** on the fan-out area.

[0053] **FIG. 6** is a layout view of signal lines **121**, **171** in a fan-out area of a TFT array panel according to a fourth embodiment of the present invention.

[0054] According to the fourth embodiment, the arrangement of the signal lines **121** and **171** connected to one IC **420**, **430** on the fan-out area are asymmetrical. However, a rule that the width of the conductor **93** decreases as the length of the signal lines **121** and **171** overlapping the conductor **93** increases and the width of the signal lines **121** and **171** increases in proportion to their length is also applied to this embodiment like the second embodiment. Under this

rule, the conductor 93 has various shapes depending on the arrangement of the signal lines 121 and 171 on the fan-out area.

[0055] **FIG. 7A** is a graph illustrating the RC delay of the signal lines on the fan-out areas of a conventional TFT array panel, **FIG. 7B** is a graph illustrating the RC delay of the signal lines on the fan-out areas of a TFT array panel according to the third embodiment of the present invention, and **FIG. 7C** is a graph illustrating the RC delay of the signal lines on the fan-out areas of a TFT array panel according to the fourth embodiment of the present invention.

[0056] As shown in **FIG. 7A**, the extreme variation of the RC delay deteriorates the image quality since the discontinuity in the RC delay appears as a discontinuous line on a screen. As shown in **FIGS. 7B and 7C**, the provision of the conductors 93 and the variation of the line width of the signal lines make the RC delay uniform, thereby preventing the deterioration of the image quality.

[0057] Now, cross-sections of fan-out areas according to embodiments of the present invention will be described with reference to the drawings.

[0058] **FIG. 8** is a sectional view of signal lines on a gate fan-out area of a TFT array panel according to a fifth embodiment of the present invention.

[0059] A plurality of gate lines 121 is formed on an insulating substrate 110, and a gate insulating layer 140 is formed on the gate lines 121. A conductor 93 made of the same material as data lines (not shown) is formed on the gate insulating layer 140, and a passivation layer 180 is formed on the conductor 93. A plurality of pixel electrodes (not shown) are formed on the passivation layer 180.

[0060] **FIG. 9** is a sectional view of signal lines on a gate fan-out area of a TFT array panel according to a sixth embodiment of the present invention.

[0061] Different from the fifth embodiment, a conductor 93 made of the same material as pixel electrodes (not shown) is formed on a passivation layer 180.

[0062] **FIG. 10** is a sectional view of signal lines on a data fan-out area of a TFT array panel according to a seventh embodiment of the present invention.

[0063] A conductor 93 made of the same material as gate lines (not shown) is formed on an insulating substrate 110, and a gate insulating layer 140 is formed on the conductor 93 and the gate lines. A plurality of data lines 171 is formed on the gate insulating layer 140, and a passivation layer 180 is formed on the data lines 171. A plurality of pixel electrodes (not shown) are formed on the passivation layer 180.

[0064] **FIG. 11** is a sectional view of signal lines on a data fan-out area of a TFT array panel according to an eighth embodiment of the present invention.

[0065] Different from the seventh embodiment, a conductor 93 made of the same material as pixel electrodes (not shown) is formed on a passivation layer 180.

[0066] According to the present invention, the difference in the RC delays due to the different lengths of signal lines on a fan-out area of a TFT array panel is compensated for by providing a conductor and differentiating the width of the signal lines.

[0067] While the present invention has been described in detail with reference to the preferred embodiments, those skilled in the art will appreciate that various modifications and substitutions can be made thereto without departing from the spirit and scope of the present invention as set forth in the appended claims.

What is claimed is:

1. A thin film transistor array panel comprising:
an insulating substrate;
a plurality of gate lines formed on the insulating substrate, each gate line including a pad for connection to an external device;
a plurality of data lines intersecting the gate lines and insulated from the gate lines, each data line including a pad for connection to an external device; and
a plurality of conductors respectively overlapping at least one of the gate lines and the data lines,
wherein capacitance between the gate lines or the data lines and the conductors decreases as a length of the gate lines or the data lines increases.
2. The thin film transistor array panel of claim 1, wherein each data line comprises a pad portion including the pad, a display portion and a fan-out portion connecting the display portion and the pad portion, and resistance per unit length of the fan-out portion of the data line decrease as a length of the fan-out portion of the data line increases.
3. The thin film transistor array panel of claim 1, wherein each gate line comprises a pad portion including the pad, a display portion and a fan-out portion connecting the display portion and the pad portion, and resistance per unit length of the fan-out portion of the gate line decrease as a length of the fan-out portion of the gate line increases.
4. The thin film transistor array panel of claim 1, wherein the conductors are applied with a reference voltage.
5. The thin film transistor array panel of claim 1, further comprising a pixel electrode located on a pixel area defined by intersections of the gate lines and the data lines, wherein the conductors are formed substantially in a same layer and of a same material as the pixel electrode.
6. The thin film transistor array panel of claim 1, wherein the conductors overlap the gate lines, wherein the conductors are formed substantially in a same layer and of a same material as the data lines.
7. The thin film transistor array panel of claim 1, wherein the conductors overlap the data lines, wherein the conductors are formed substantially in a same layer and of a same material as the gate lines.
8. The thin film transistor array panel of claim 1, wherein the conductors include first conductive segments overlapping the gate lines and second conductive segments overlapping the data lines, the first conductive segments are formed substantially in a same layer and of a same material as the data lines, and the second conductive segments are formed substantially in a same layer and of a same material as the gate lines.
9. The thin film transistor array panel of claim 1, wherein the conductors are floated.

10. A thin film transistor array panel comprising:
an insulating substrate;
a plurality of gate lines formed on the insulating substrate,
each gate line including a pad for connection to an
external device;
a plurality of data lines intersecting the gate lines and
insulated from the gate lines, each data line including
a pad for connection to an external device; and
a plurality of conductors respectively overlapping at least
one of the gate lines and the data lines,
wherein overlapping area between the gate lines or the
data lines and the conductors decreases as a length of
the gate lines or the data lines increases.

11. The thin film transistor array panel of claim 10,
wherein each data line comprises a pad portion including the
pad, a display portion and a fan-out portion connecting the
display portion and the pad portion, and resistance per unit
length of the fan-out portion of the data line decrease as a
length of the fan-out portion of the data line increases.

12. The thin film transistor array panel of claim 10,
wherein each gate line comprises a pad portion including the
pad, a display portion and a fan-out portion connecting the
display portion and the pad portion, and resistance per unit
length of the fan-out portion of the gate line decrease as a
length of the fan-out portion of the gate line increases.

13. The thin film transistor array panel of claim 10,
wherein the conductors are applied with a reference voltage.

14. The thin film transistor array panel of claim 10, further
comprising a pixel electrode located on a pixel area defined
by intersections of the gate lines and the data lines, wherein
the conductors are formed substantially in a same layer and of
a same material as the pixel electrode.

15. The thin film transistor array panel of claim 10,
wherein the conductors overlap the gate lines, wherein the
conductors are formed substantially in a same layer and of
a same material as the data lines.

16. The thin film transistor array panel of claim 10,
wherein the conductors overlap the data lines, wherein the
conductors are formed substantially in a same layer and of
a same material as the gate lines.

17. The thin film transistor array panel of claim 10,
wherein the conductors include first conductive segments
overlapping the gate lines and second conductive segments
overlapping the data lines, the first conductive segments are
formed substantially in a same layer and of a same material
as the data lines, and the second conductive segments are
formed substantially in a same layer and of a same material
as the gate lines.

18. The thin film transistor array panel of claim 10,
wherein the conductors are floated.

* * * * *

专利名称(译)	用于液晶显示器的薄膜晶体管阵列面板		
公开(公告)号	US20050237812A1	公开(公告)日	2005-10-27
申请号	US11/168886	申请日	2005-06-28
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	CHANG JONG WOONG		
发明人	CHANG, JONG-WOONG		
IPC分类号	G02F1/1345 G02F1/1368 G09F9/30 G09G3/36 G11C11/34 H01L23/528		
CPC分类号	G02F1/1345 G09G3/3611 G09G2300/0426 G09G2320/0223 H01L2924/0002 H01L23/528 H01L2924/00		
优先权	1020020031803 2002-06-07 KR		
其他公开文献	US7488996		
外部链接	Espacenet	USPTO	

摘要(译)

形成在绝缘基板上的多条栅极线，每条栅极线包括用于连接到外部器件的焊盘;多条数据线，与栅极线交叉并与栅极线绝缘，每条数据线包括用于连接到外部器件的焊盘;并且包括与栅极线和数据线中的至少一个重叠的导体。随着栅极线或数据线的长度增加，栅极线或数据线的重叠距离和导体的宽度减小。因此，补偿了由于信号线长度的差异引起的RC延迟的差异。

