




US 20060082704A1

(19) **United States**(12) **Patent Application Publication**  
**Chu et al.**(10) **Pub. No.: US 2006/0082704 A1**(43) **Pub. Date: Apr. 20, 2006**(54) **LIQUID CRYSTAL DISPLAY****Publication Classification**(76) Inventors: **Cheng-Jen Chu**, Tainan County (TW);  
**Fu-Cheng Chen**, Tainan County (TW);  
**Chien-Hung Chen**, Tainan County (TW)(51) **Int. Cl.**  
**G02F 1/1335** (2006.01)(52) **U.S. Cl.** ..... **349/106; 349/114**(57) **ABSTRACT**Correspondence Address:  
**TROP PRUNER & HU, PC**  
**8554 KATY FREEWAY**  
**SUITE 100**  
**HOUSTON, TX 77024 (US)**

A liquid crystal display includes a first substrate and a second substrate, a liquid crystal layer disposed between the first and second substrate, and a backlight module disposed under the second substrate. The first substrate comprises color filters disposed in array, wherein each color filter has a chromaticity-adjusting region; a thickness of the color filters and a size of the chromaticity-adjusting region are adjustable for adjusting the chromaticity of the LCD. The second substrate comprises pixel electrodes corresponding to the color filters. Therefore, the liquid crystal display can easily adjust and perfect the chromaticity of the liquid crystal display under the restrictions of the material of the color filters, the backlight module, and the design thereof.

(21) Appl. No.: **10/871,853**(22) Filed: **Jun. 18, 2004**(30) **Foreign Application Priority Data**

Nov. 6, 2003 (TW)..... 92131038

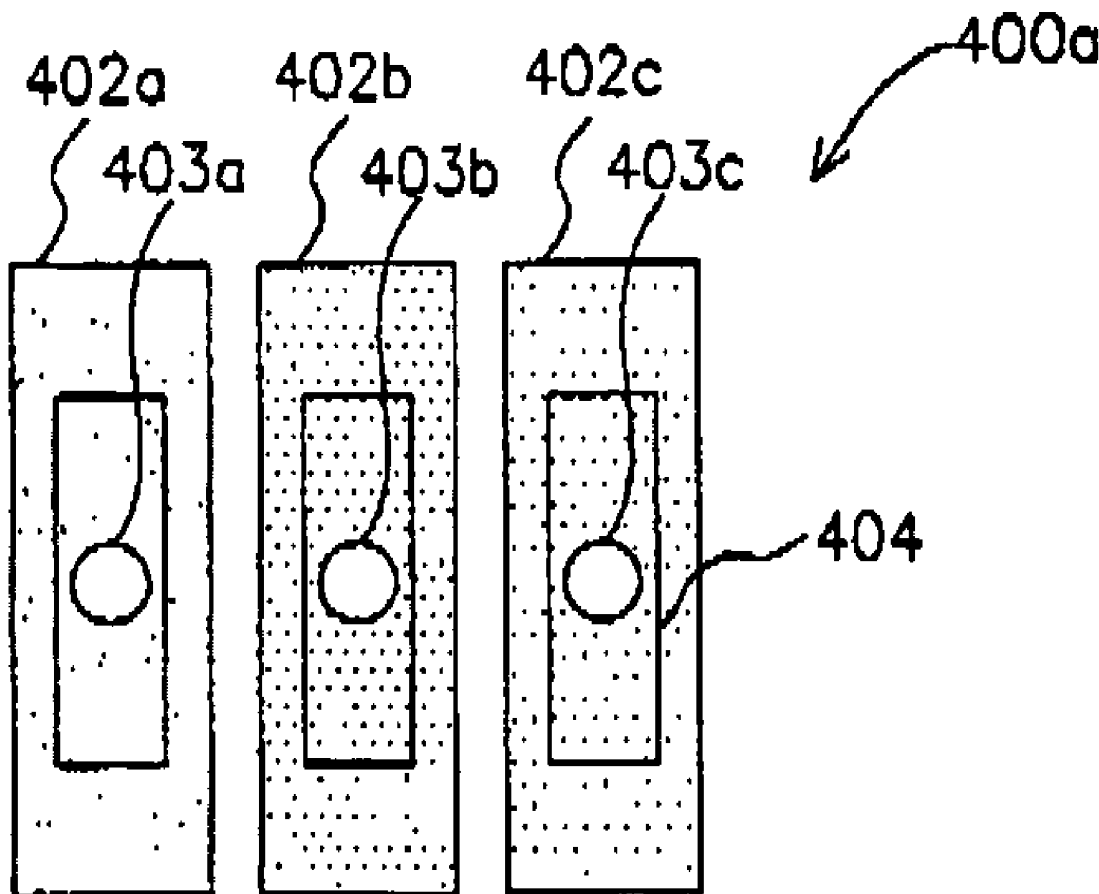

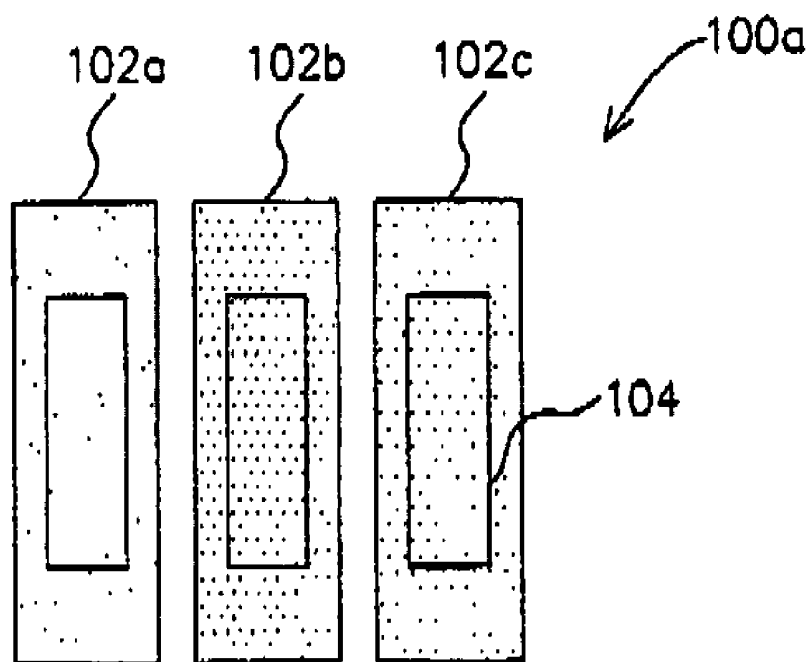


FIG. 1A (PRIOR ART)

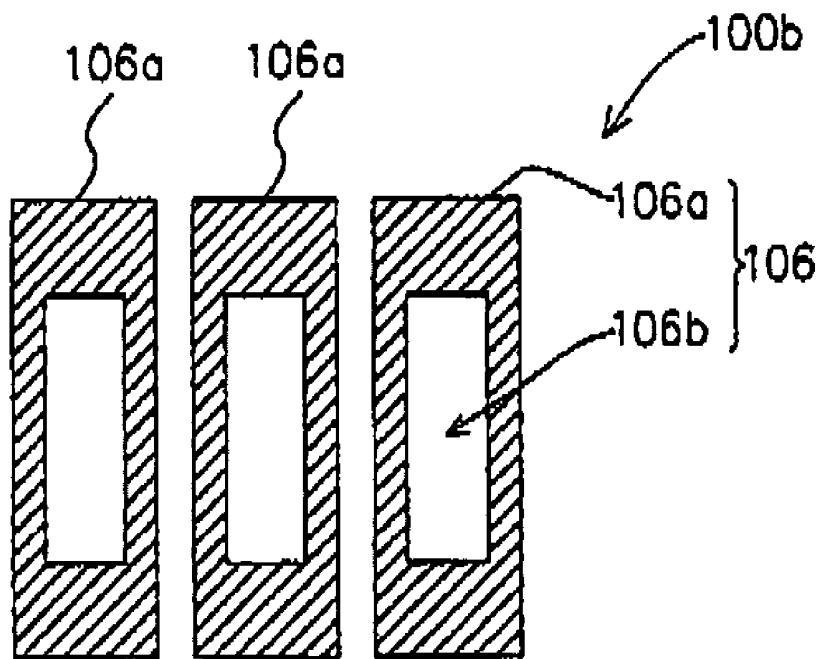


FIG. 1B (PRIOR ART)

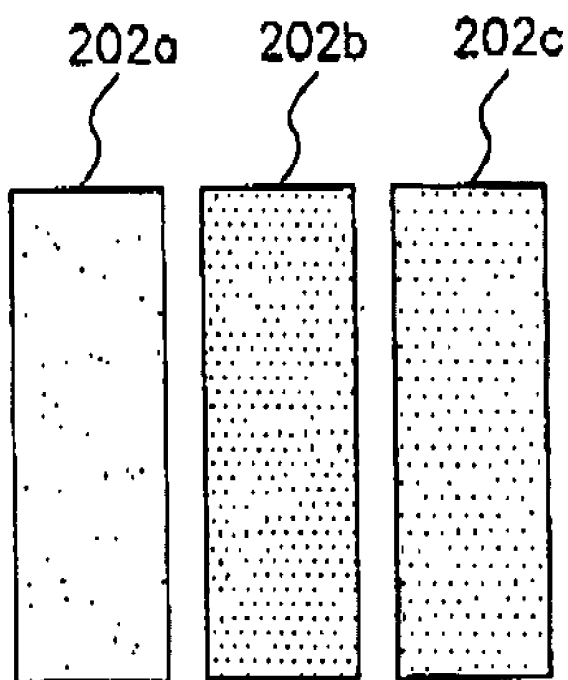


FIG. 2A (PRIOR ART)

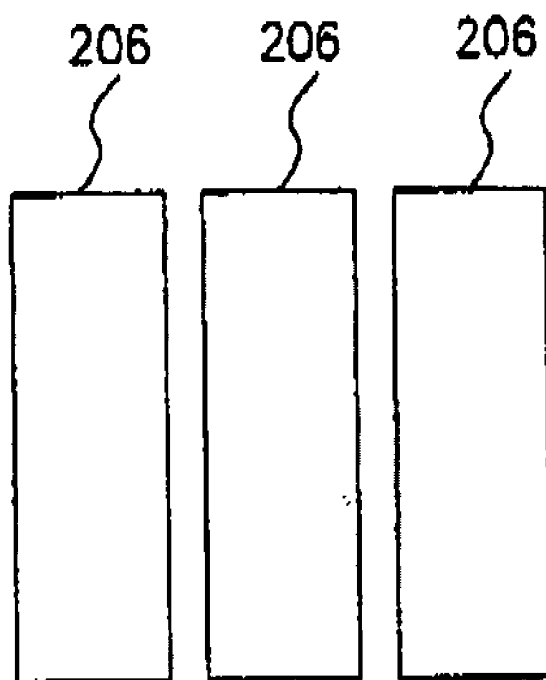


FIG. 2B (PRIOR ART)

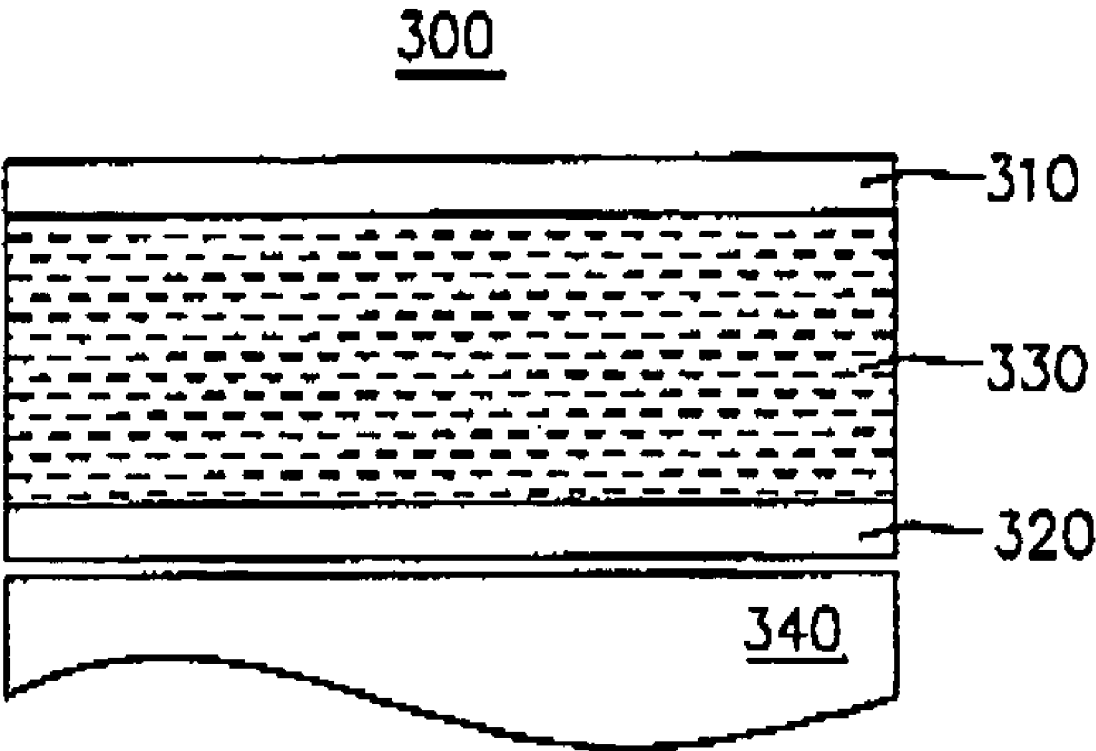


FIG. 3

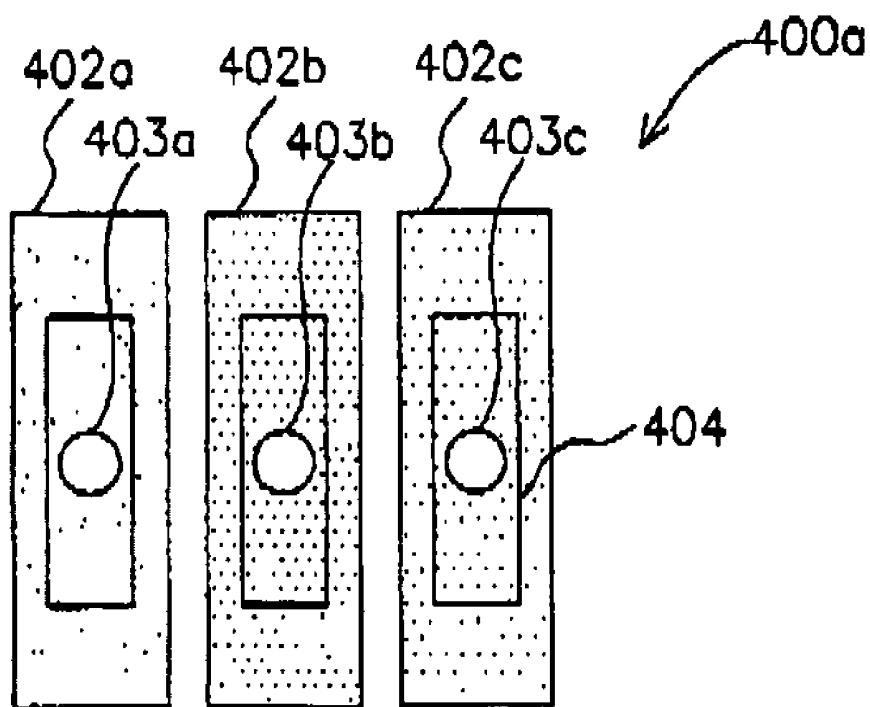


FIG. 4A

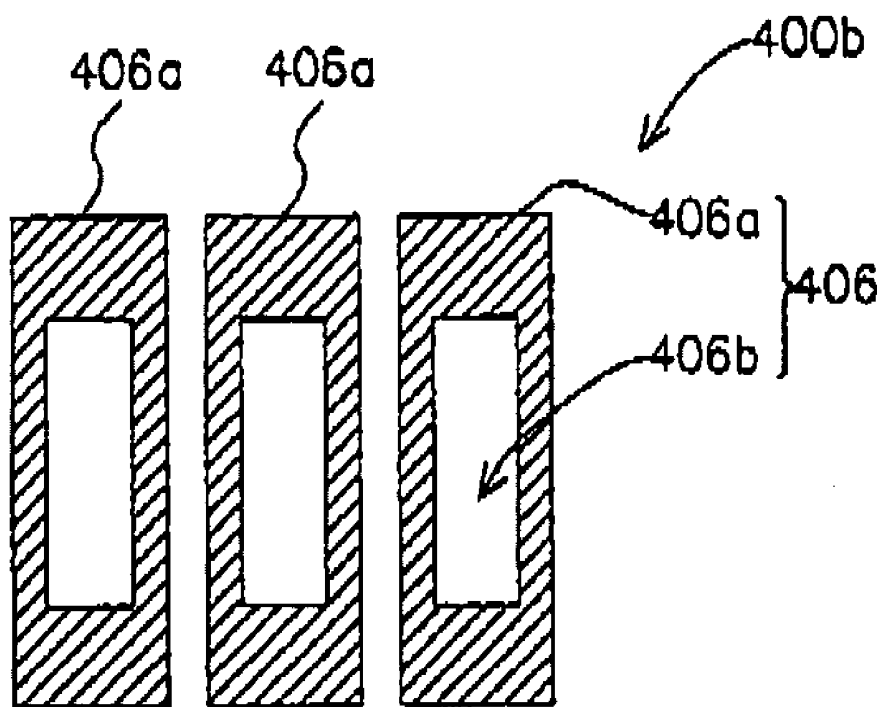


FIG. 4B

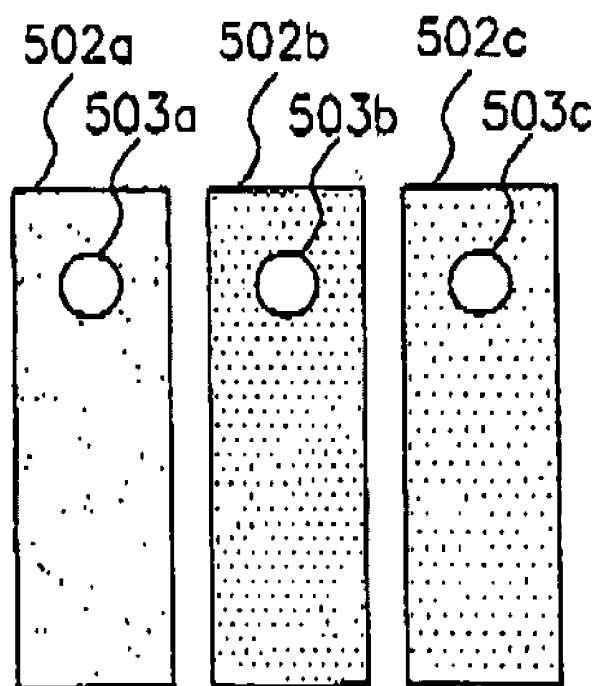


FIG. 5A

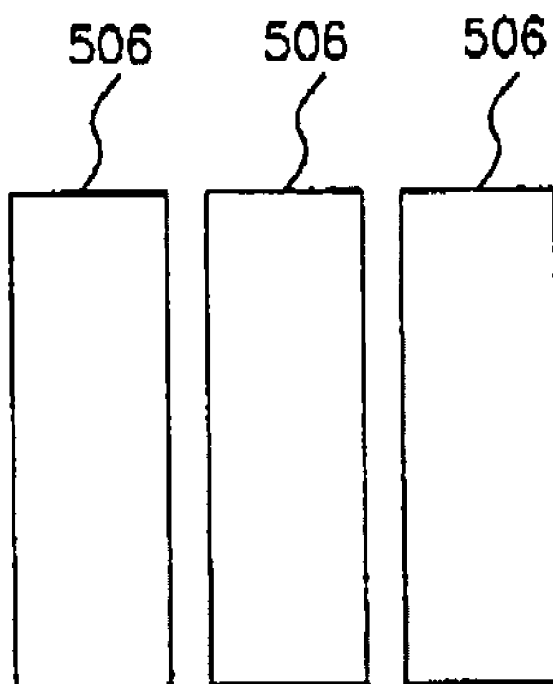


FIG. 5B

## LIQUID CRYSTAL DISPLAY

### BACKGROUND OF THE INVENTION

#### [0001] 1. Field of the Invention

[0002] The present invention relates to a liquid crystal display (LCD), such as a transmissive LCD or a transreflective LCD, and more particularly to a liquid crystal display adapted to adjust the chromaticity thereof.

#### [0003] 2. Description of the Related Art

[0004] Recently, liquid crystal displays (LCD) have been widely used and combined with a variety of electronic devices. However, the manufacturing process of LCD is getting more and more complicated. Because LCD is not a self-luminous display, a light source is required for illuminating the LCD. The LCD are generally classified according to the light source, namely, transmissive LCD, transreflective LCD and reflective LCD.

[0005] The reflective LCD has a reflective film formed on the bottom substrate for reflecting outside light. If the light source, such as front light, is not sufficient, reflective LCD cannot be used under the weak brightness environment.

[0006] The transmissive LCD with backlight modules can be used under the weak brightness environment. The transreflective LCD cooperating with the backlight modules can also operate under the similar circumstances. Following are the descriptions of the two types of LCDs.

[0007] **FIGS. 1A and 1B** are exploded schematic drawings showing a prior art transreflective LCD. **FIGS. 2A and 2B** are exploded schematic drawings showing a prior art transmissive LCD.

[0008] Referring to **FIGS. 1A and 1B**, the top portion **100a** of the prior art transreflective LCD includes a red, a green and a blue color filters **102a**, **102b** and **102c**, respectively, are being disposed between the liquid crystal layer (not shown) and a glass substrate (not shown). The region **104** is the transmissive region of the transreflective LCD. The bottom portion **100b** of the transreflective LCD includes pixel electrodes **106** disposed between the liquid crystal layer (not shown) and another glass substrate (not shown). The transmissive region **106b** corresponds to the region **104** of **FIG. 1A**; the reflective region **106a** is the area outside the transmissive region **106b**. When the top and bottom portions **100a** and **100b** are combined, the backlight module (not shown) under the bottom portion **100b** transmits white light passing through the transmissive region **106b**, and the red, green and blue color filters **102a**, **102b** and **102c**.

[0009] Additionally, referring to **FIG. 2A**, the top portion of the transmissive LCD has a structure similar to that of **FIG. 1A**. Referring to **FIG. 2B**, compared with **FIG. 1B** the pixel electrode **206** is a transparent electrode **206**. When the structures of **FIGS. 2A and 2B** are combined, the backlight module (not shown) under the bottom portion **100b** transmits white light passing through the transmissive region **106b**, and the red, green and blue color filters **202a**, **202b** and **202c**.

[0010] However, because of the restrictions under the circumstances, such as the material of the color filters, the backlight module and the design of the LCD, the prior art LCD cannot easily adjust the chromaticity thereof. The

problem will be more serious when the transmissive LCD and the transreflective LCD need to generate sufficient chromaticity of the red, green and blue lights, as well as white light.

### SUMMARY OF TM INVENTION

[0011] Therefore, an object of the present invention is to provide a liquid crystal display (LCD) for adjusting the chromaticity of the transmissive regions.

[0012] Another object of the present invention is to provide a liquid crystal display (LCD) for adjusting the chromaticity of the transmissive regions under the restrictions of the material of the color filters, the backlight module and the design thereof.

[0013] According to the objects described above, the present invention discloses a LCD, which comprises a first substrate, a second substrate, a liquid crystal layer disposed between the first and the second substrates, and a backlight module under the second substrate. The first substrate has a plurality of color filters arranged in array, wherein each of the color filters has a chromaticity-adjusting region, and each thickness of the color filters and the size of the chromaticity-adjusting region are adjustable for adjusting a chromaticity of the LCD. The second substrate has a plurality of pixel electrodes corresponding to the color filters.

[0014] In the embodiment of the present invention, the chromaticity-adjusting region includes an opening.

[0015] The present invention also provides a transmissive LCD, which comprises a first substrate, a second substrate, a liquid crystal layer disposed between the first and the second substrates, and a backlight module under the second substrate. The first substrate has a plurality of color filters arranged in array, wherein each of the color filters has a chromaticity-adjusting region, and the thickness of each of the color filters and the size of the chromaticity-adjusting region are adjustable for adjusting the chromaticity of the LCD. The second substrate has a plurality of transparent electrodes corresponding to the color filters.

[0016] The present invention further provides a transreflective LCD, which comprises a first substrate, a second substrate, a liquid crystal layer disposed between the first and the second substrates, and a backlight module under the second substrate. The second substrate has a plurality of pixel electrodes arranged in array, wherein each of the pixel electrodes has a transmissive region and a reflective region. The first substrate having a plurality of color filters arranged in array, wherein each of the color filters has a chromaticity-adjusting region, and the thickness of each of the color filters and the size of the chromaticity-adjusting region are adjustable for adjusting the chromaticity of the LCD.

[0017] Because the present invention disposes a chromaticity-adjusting region in each color filter, the size of the chromaticity-adjusting region and the thickness of the color filters are adjustable. Therefore, the chromaticity can be adjusted by adjusting the chromaticity-adjusting region. Moreover, because the present invention allows the adjustment of the chromaticity of the transmissive regions under the restrictions of the material of the color filters, the backlight module and the design thereof the performance of the LCD can be perfect.

[0018] In order to make the aforementioned and other objects, features and advantages of the present invention understandable, a preferred embodiment accompanied with figures is described in detail below.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0019] **FIGS. 1A and 1B** are exploded schematic drawings showing a prior art transmissive LCD.

[0020] **FIGS. 2A and 2B** are exploded schematic drawings showing a prior art transmissive LCD.

[0021] **FIG. 3** is a schematic drawing of a liquid crystal display (LCD).

[0022] **FIGS. 4A and 4B** are exploded schematic drawings showing a first exemplary pixel structure of a transmissive LCD of the present invention.

[0023] **FIGS. 5A and 5B** are exploded schematic drawings showing a second exemplary pixel structure of a transmissive LCD of the present invention.

#### DESCRIPTION OF SOME EMBODIMENTS

[0024] **FIG. 3** is a schematic drawing of a liquid crystal display (LCD). Referring to **FIG. 3**, the LCD 300 comprises: a first substrate 310, a second substrate 320, a liquid crystal layer 330 disposed between the first and the second substrates 310 and 320, respectively, and a backlight module 340 under the second substrate 320. The LCD 300 can be, for example, a transmissive LCD or a transmissive LCD (TRLCD). In the present invention, the LCD 300 has a chromaticity-adjusting region in each color filter for adjusting the chromaticity of the LCD as desired. Following are embodiments of the present invention, but not limited thereto.

[0025] **FIGS. 4A and 4B** are exploded schematic drawings showing a first exemplary pixel structure of a transmissive LCD of the present invention. Referring to **FIGS. 3, 4A and 4B**, the top half portion 400a of the transmissive LCD includes color filters, including red, green, and blue color filters 402a, 402b and 402c, respectively, on the first substrate 310. The red, green, and blue color filters 402a, 402b and 402c have chromaticity-adjusting regions 403a, 403b and 403c, respectively, which size can be adjusted separately or together for adjusting the chromaticity of the LCD as desired. The chromaticity-adjusting regions 403a, 403b and 403c can be, for example, in a form openings. In addition, according to the embodiment of the present invention, the thickness of the color filters 402a, 402b and 402c are also being adjusted for perfecting the chromaticity. The region 404 shown in **FIG. 4A** is the transmissive region of the transmissive LCD.

[0026] Referring to **FIGS. 3, 4A and 4B**, the bottom half portion 400b of the transmissive LCD includes the pixel electrodes 406 on the second substrate 320, corresponding to the red, green, and blue color filters 402a, 402b and 402c. The pixel electrode 406 has a transmissive region 406b and a reflective region 406a, wherein the chromaticity-adjusting regions 403a, 403b and 403c correspond to the transmissive region 406b and the reflective region 406a of each pixel electrode 406. The transmissive region 406b of the pixel electrode 406 corresponds to the region 404 shown in **FIG. 4A**. When the top and bottom portions 400a and 400b,

respectively, of the pixel are combined, a pixel structure is formed as shown in **FIG. 3**. The transmissive region 406b of the pixel electrode 406 can be, for example, indium tin oxide (ITO); the reflective region 406a of the pixel electrode 406 can be, for example, a metal electrode.

[0027] **FIGS. 5A and 5B** are exploded schematic drawings showing a second exemplary pixel structure of a transmissive LCD of the present invention. Referring to **FIGS. 3, 5A and 5B**, the top half portion 400a of the transmissive LCD include the color filters, including red, green, and blue color filters 502a, 502b and 502c, respectively, on the first substrate 310. The red, green, and blue color filters 502a, 502b and 502c have chromaticity-adjusting regions 503a, 503b and 503c, respectively, which size can be adjusted separately or together for adjusting the chromaticity as desired.

[0028] Referring to **FIGS. 3, 5A and 5B**, compared with **FIG. 1B** the bottom half portion of the transmissive LCD is a transparent electrode, such as ITO. When the structures of **FIGS. 5A and 5B** are combined, a pixel structure is formed as shown in **FIG. 3**. The backlight module 340 under the second substrate 320 transmits white light passing through the transparent electrode 506, the liquid crystal layer 320 and the red, green, and blue color filters 502a, 502b and 502c, respectively.

[0029] Accordingly, the feature of the present invention is to dispose a chromaticity-adjusting region in each color filter, wherein the size of the chromaticity-adjusting region and the thickness of the color filters are adjustable. Therefore, a desired chromaticity can be achieved by the adjusting of the chromaticity-adjusting region. Moreover, because the present invention allows the adjustment of the chromaticity of the transmissive regions under the restrictions of the material of the color filters, the backlight module and the design thereof, the performance of the LCD can be accordingly promoted.

[0030] Although the present invention has been described in terms of exemplary embodiments, it is not limited thereto. Rather, the appended claims should be constructed broadly to include other variants and embodiments of the invention which may be made by those skilled in the field of his art without departing from the scope and range of equivalents of the invention.

What is claimed is:

1. A liquid crystal display (LCD), comprising:

a first substrate, having a plurality of color filters arranged in array, wherein each of the color filters has a chromaticity-adjusting region, and a thickness of each of the color filters and the size of the chromaticity-adjusting region are adjustable for adjusting a chromaticity of the LCD;

a second substrate, corresponding to the first substrate, having a plurality of pixel electrodes corresponding to the color filters;

a liquid crystal layer, disposed between the first and the second substrates; and

a backlight module, disposed under the second substrate.

2. The LCD of claim 1, wherein the chromaticity-adjusting region includes an opening.

3. The LCD of claim 1, wherein the color filters includes red, green and blue color filters.

4. The LCD of claim 1, wherein the pixel electrodes includes transparent electrodes.

5. The LCD of claim 4, wherein a material of the pixel electrode includes indium tin oxide.

6. The LCD of claim 1, wherein each of the pixel electrodes has a transmissive region and a reflective region.

7. The LCD of claim 6, wherein each of the chromaticity-adjusting regions of the color filters corresponds to the each transmissive region of the pixel electrodes.

8. The LCD of claim 6, wherein each of the transmissive region of the pixel electrodes includes a transparent electrode.

9. The LCD of claim 6, wherein each of the reflective region of the pixel electrodes comprises a metal electrode.

10. A transmissive liquid crystal display (LCD), comprising:

a first substrate, having a plurality of color filters arranged in array, wherein each of the color filters has a chromaticity-adjusting region, and a thickness of each of the color filters and the size of the chromaticity-adjusting region are adjustable for adjusting a chromaticity of the LCD;

a second substrate, corresponding to the first substrate, having a plurality of transparent electrodes corresponding to the color filters;

a liquid crystal layer, disposed between the first and the second substrates; and

a backlight module, disposed under the second substrate.

11. The transmissive LCD of claim 10, wherein the chromaticity-adjusting region includes an opening.

12. The transmissive LCD of claim 10, wherein the color filters includes red, green and blue color filters.

13. The transmissive LCD of claim 10, wherein material of the transparent electrode includes indium tin oxide.

14. A transmissive liquid crystal display (LCD), comprising:

a first substrate, having a plurality of pixel electrodes arranged in array, wherein each of the pixel electrodes has a transmissive region and a reflective region;

a second substrate, corresponding to the first substrate, having a plurality of color filters corresponding to the pixel electrodes, wherein each of the color filters has a chromaticity-adjusting region corresponding to the each transmissive region of the pixel electrodes, and a thickness of each of the color filters and a size of the chromaticity-adjusting region are adjustable for adjusting a chromaticity of the LCD;

a liquid crystal layer, disposed between the first and the second substrates; and

a backlight module, disposed under the second substrate.

15. The transmissive LCD of claim 14, wherein the chromaticity-adjusting region includes an opening.

16. The transmissive LCD of claim 14, wherein the color filters includes red, green and blue color filters.

17. The transmissive LCD of claim 14, wherein each of the transmissive region of the pixel electrodes includes a transparent electrode.

18. The transmissive LCD of claim 14, wherein each of the reflective region of the pixel electrodes comprises a metal electrode.

\* \* \* \* \*

|                |                                                      |         |            |
|----------------|------------------------------------------------------|---------|------------|
| 专利名称(译)        | 液晶显示器                                                |         |            |
| 公开(公告)号        | <a href="#">US20060082704A1</a>                      | 公开(公告)日 | 2006-04-20 |
| 申请号            | US10/871853                                          | 申请日     | 2004-06-18 |
| [标]申请(专利权)人(译) | 朱成JEN<br>陈富成<br>陈建HUNG                               |         |            |
| 申请(专利权)人(译)    | 储成JEN<br>陈福成<br>陈剑虹                                  |         |            |
| 当前申请(专利权)人(译)  | 群创光电                                                 |         |            |
| [标]发明人         | CHU CHENG JEN<br>CHEN FU CHENG<br>CHEN CHIEN HUNG    |         |            |
| 发明人            | CHU, CHENG-JEN<br>CHEN, FU-CHENG<br>CHEN, CHIEN-HUNG |         |            |
| IPC分类号         | G02F1/1335 G02B5/20 G02F1/13357 G02F1/1343           |         |            |
| CPC分类号         | G02F1/133514 G02F1/133555                            |         |            |
| 优先权            | 092131038 2003-11-06 TW                              |         |            |
| 其他公开文献         | US7233375                                            |         |            |
| 外部链接           | <a href="#">Espacenet</a> <a href="#">USPTO</a>      |         |            |

#### 摘要(译)

液晶显示器包括第一基板和第二基板，设置在第一基板和第二基板之间的液晶层，以及设置在第二基板下方的背光模块。第一基板包括阵列设置的滤色器，其中每个滤色器具有色度调节区域；滤色器的厚度和色度调节区域的尺寸是可调节的，以调节LCD的色度。第二基板包括与滤色器对应的像素电极。因此，液晶显示器可以在滤色器材料，背光模块及其设计的限制下容易地调整和完善液晶显示器的色度。

