



US 20060209235A1

(19) **United States**(12) **Patent Application Publication**
Kim(10) **Pub. No.: US 2006/0209235 A1**(43) **Pub. Date: Sep. 21, 2006**(54) **METHOD OF MANUFACTURING LIQUID
CRYSTAL DISPLAY DEVICE****Publication Classification**(75) **Inventor: Min Joo Kim, Seoul (KR)**(51) **Int. Cl.****G02F 1/1333 (2006.01)**(52) **U.S. Cl. 349/110**

Correspondence Address:

BRINKS HOFER GILSON & LIONE**P.O. BOX 10395****CHICAGO, IL 60610 (US)**

(57)

ABSTRACT(73) **Assignee: LG PHILIPS LCD CO., LTD.**(21) **Appl. No.: 11/384,108**(22) **Filed: Mar. 17, 2006**(30) **Foreign Application Priority Data**

Mar. 18, 2005 (KR) P2005-22705

A method of manufacturing a liquid crystal display (LCD) device and corresponding LCD device are disclosed. An ink-jet apparatus is provided with a solution containing a black matrix resin and ball spacers. The solution is then coated on a predetermined portion of a substrate by the ink-jet apparatus. This permits formation of both a black matrix layer and ball spacers at the same time, with the ball spacers provided in only a non-pixel area of the substrate.

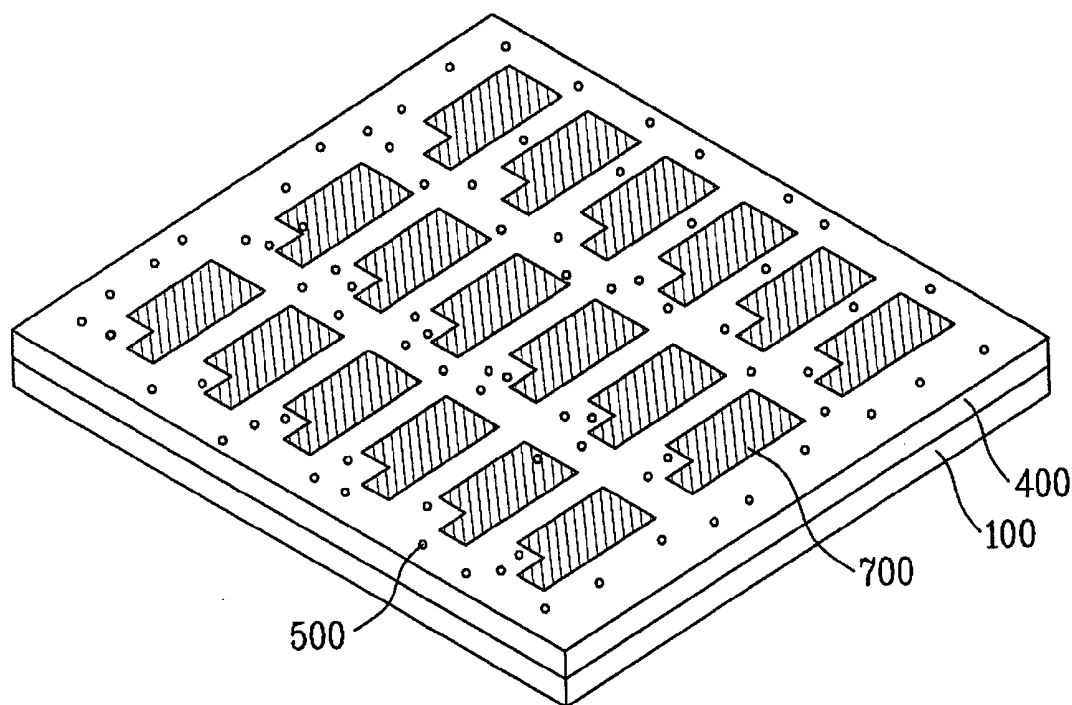


FIG. 1
Related Art

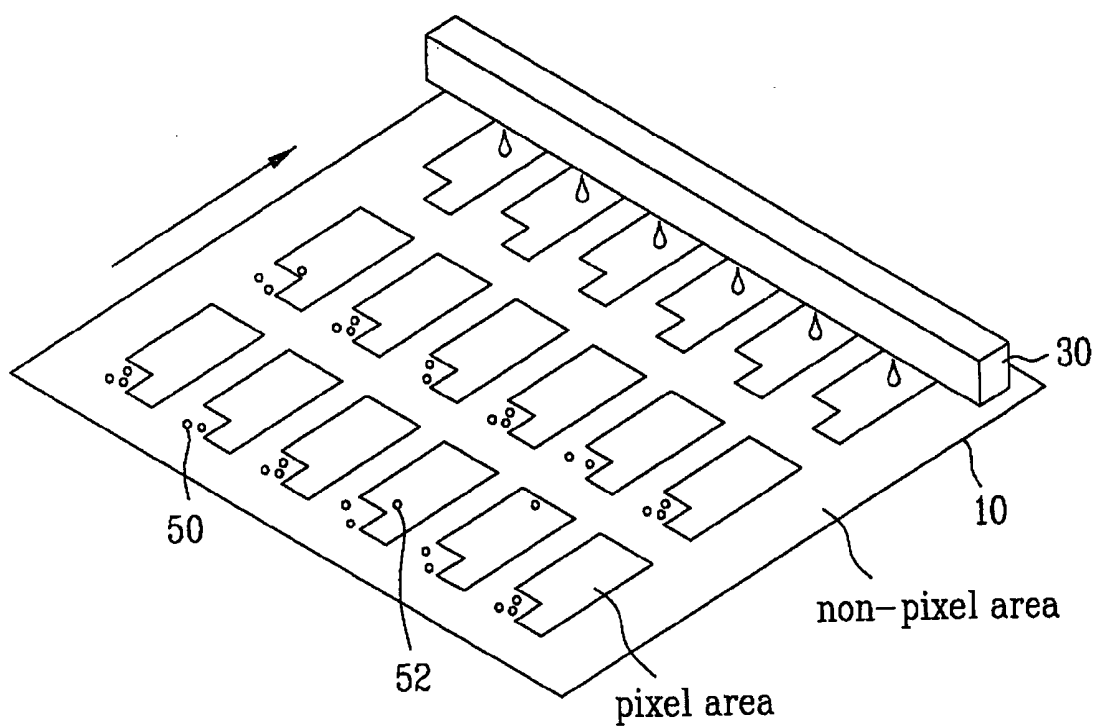


FIG. 2A

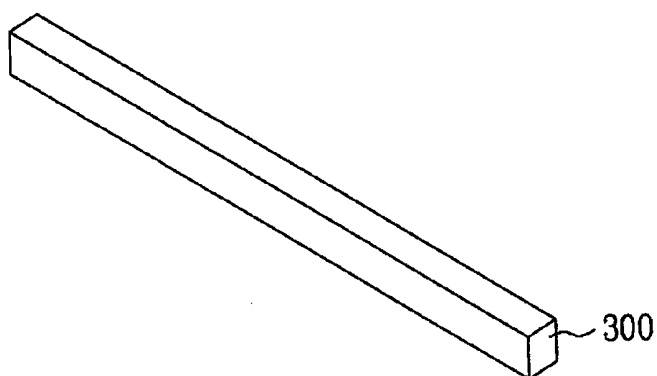


FIG. 2B


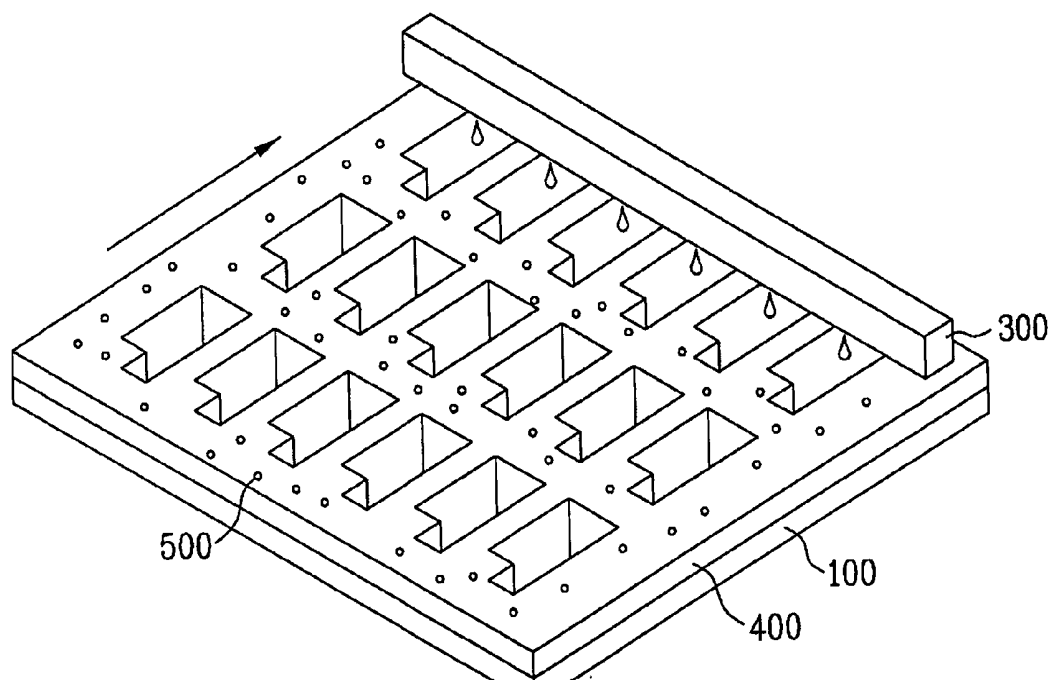


FIG. 2C

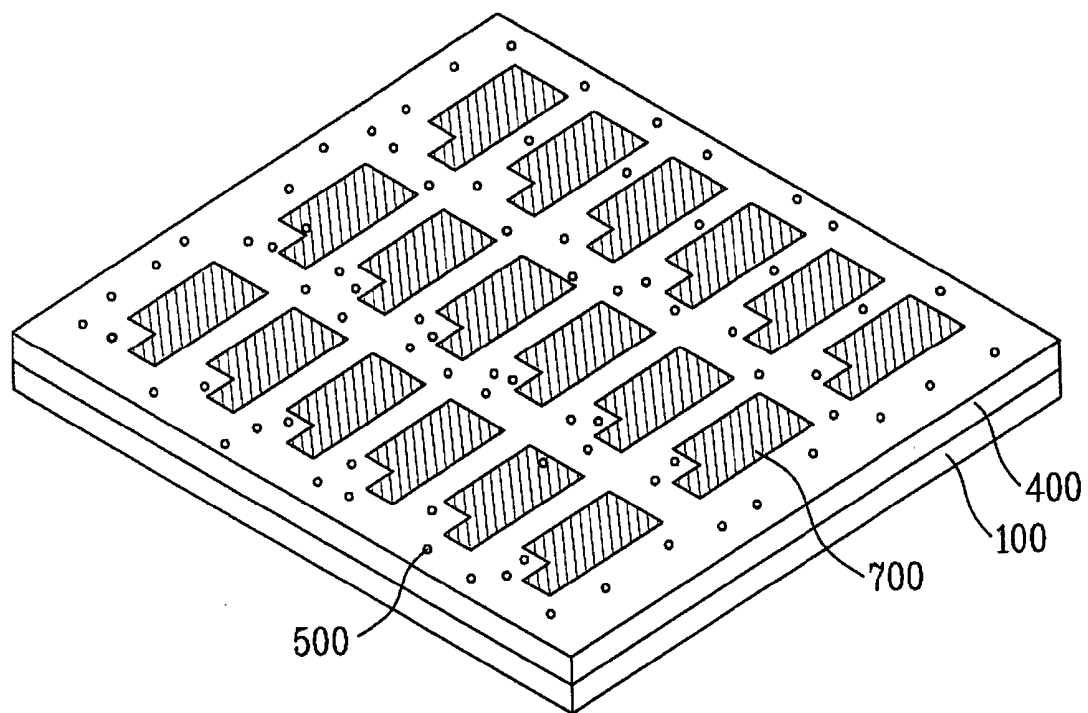

METHOD OF MANUFACTURING LIQUID CRYSTAL DISPLAY DEVICE

[0001] This application claims the benefit of the Korean Patent Application No. P2005-22705, filed on Mar. 18, 2005, which is hereby incorporated by reference as if fully set forth herein.

[0002] 1. Technical Field

[0003] The present invention relates to a liquid crystal display (LCD) device, and more particularly, to ball spacers formed between two substrates of a liquid crystal display (LCD) device to maintain a cell gap therebetween.

[0004] 2. Discussion of the Related Art

[0005] Among various ultra-thin flat type display devices, which include a display screen having a thickness of several centimeters, a liquid crystal display (LCD) device can be widely used for notebook computers, monitors, aircraft, and etc. since it has advantages such as low power consumption and portability.

[0006] The LCD device includes lower and upper substrates facing each other at a predetermined interval therebetween, and a liquid crystal layer formed between the lower and upper substrates. In addition, spacers are formed between the lower and upper substrates to maintain a cell gap therebetween.

[0007] To form the sphere-shaped spacers of the related art, first, ball spacers are mixed in a solution at a predetermined density. The solution containing the ball spacers is then sprayed onto the substrate through a nozzle.

[0008] In the case of the above method of spraying the solution containing the ball spacers through the nozzle, the ball spacers may be sprayed onto pixel regions of the substrate, which is undesired. That is, the picture quality of the LCD device may be deteriorated due to the ball spacers sprayed onto the pixel regions of the LCD device. Accordingly, instead of the above method of spraying the solution containing the ball spacers through the nozzle, an ink-jet method has been recently proposed.

[0009] **FIG. 1** is a perspective view of schematically showing a method for forming ball spacers by a related art ink-jet method.

[0010] As shown in **FIG. 1**, an ink-jet apparatus 30 is moved along in a direction (shown by the arrow) above a substrate 10 including a pixel area and a non-pixel area. During this process, ball spacers are dispensed onto the non-pixel area of the substrate 10 by the ink-jet apparatus 30.

[0011] The ink-jet apparatus 30 is comprised of an ink head for storing a solution containing the ball spacers, and a nozzle for dispensing the solution containing the ball spacers onto the substrate 10.

[0012] When the ink-jet apparatus 30 moves above the substrate 10, the solution containing the ball spacers is dispensed onto the substrate 10 through the nozzle. After completing the dispensing process, the solution dispensed on the substrate 10 dries. That is, after the solvent evaporates from the solution, only the ball spacers remain on the substrate 10.

[0013] The above method of using the ink-jet apparatus 30, the ball spacers 50 are formed in the desired portion of the substrate by controlling the nozzle. Accordingly, the ball spacers 50 can be formed on only the non-pixel area of the substrate 10, thereby preventing the deterioration of picture quality.

[0014] However, even though the ball spacers 50 are formed on the non-pixel area of the substrate 10, the ball spacers may move from the non-pixel area to the pixel area during transfer of the substrate 10.

[0015] In addition, when dispensing the solution containing the ball spacers through the nozzle, drops of the solution dispensed may collect together and thus may grow in size. In this case, the ball spacers 52 may move to the pixel area as the drops grow in size.

[0016] As shown above, even in the case of using the ink-jet apparatus, the ball spacers 52 may move to the pixel area when transferring the substrate or when dispensing the solution, thereby deteriorating the picture quality.

SUMMARY

[0017] By way of example only, in one embodiment, a method of manufacturing an LCD device comprises providing an ink-jet apparatus having a solution containing a black matrix (BM) resin and ball spacers, and coating the solution on a predetermined portion of a substrate using the ink-jet apparatus to simultaneously provide both a black matrix (BM) layer and the ball spacers on the substrate.

[0018] In another embodiment, a method of manufacturing an LCD device comprises coating a predetermined non-pixel area of a first substrate with a solution containing a black matrix (BM) resin and ball spacers, providing a second substrate opposite to the first substrate, and forming a liquid crystal layer.

[0019] In another embodiment, an LCD device comprises a first transparent substrate containing a black matrix (BM) layer in a non-pixel area, the BM layer having ball spacers dispensed therein, a second transparent substrate opposite to the first substrate, and a liquid crystal layer disposed between the first and second substrates.

[0020] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

[0022] **FIG. 1** is a perspective view of showing a method for forming ball spacers by a related art ink-jet method; and

[0023] **FIGS. 2A to 2C** are perspective views of showing a method for forming an LCD device according to the preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE
INVENTION

[0024] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0025] Hereinafter, a method of manufacturing a liquid crystal display (LCD) device according to the present invention will be described with reference to the accompanying drawings.

[0026] **FIGS. 2A to 2C** are perspective views of showing a method for forming an LCD device according to the preferred embodiment of the present invention.

[0027] As shown in **FIG. 2A**, an ink-jet apparatus **300** provided with a solution containing a black matrix resin and ball spacers is prepared. The ink-jet apparatus **300** is comprised of an ink head (not shown) for storing the solution, and a nozzle (not shown) for dispensing the solution onto a substrate. The black matrix resin forms a black matrix layer on the substrate on which it is deposited. The black matrix layer prevents light leakage in the LCD device. The black matrix resin comprises material commonly known to those skilled in the art.

[0028] Then, as shown in **FIG. 2B**, the solution is coated on a predetermined portion of a substrate **100** by the ink-jet apparatus **300**. Accordingly, it is possible to form both the black matrix layer **400** and the ball spacers **500** at the same time. The substrate **100** can be either a thin film transistor substrate, which contains thin film transistors or other switches, or a color filter substrate, which opposes the thin film transistor substrate with the liquid crystal disposed therebetween.

[0029] The solution containing the black matrix resin and the ball spacers is coated and dried on the predetermined portion of the substrate **100**. By drying the solution, the black matrix resin forms the black matrix layer **400**, and the ball spacers **500** is formed in the black matrix layer **400**.

[0030] The process of coating the solution onto the substrate may be performed by moving the ink-jet apparatus **300** above the substrate **100**, or by moving the substrate **100**.

[0031] The black matrix layer **400** is formed in a non-pixel area of the substrate **100**. That is, the ball spacers **500** are formed only in the non-pixel area of the substrate **100** and does not substantially move from the area in which they are deposited.

[0032] After that, as shown in **FIG. 2C**, a color filter layer **700** is formed on the substrate **100** except at regions containing the black matrix layer **400** and the ball spacers **500**.

[0033] The color filter layer **700** is formed of pigments of red, green and blue. As described above, the color filter layer **700** may be formed after the black matrix layer **400** and the ball spacers **500**. However, the color filter layer **700** may be formed before the black matrix layer **400** and the ball spacers **500**.

[0034] Although not shown, a common electrode or an overcoat layer may be formed on an entire surface of the substrate **100**. For a Twisted Nematic (TN) mode LCD device, the common electrode is formed on the entire surface

of the substrate **100** since the common electrode is formed on the color filter substrate. For an In-Plane Switching (IPS) mode LCD device, the overcoat layer is formed on the entire surface of the substrate **100** since the common electrode is formed on the thin film transistor substrate.

[0035] Although not shown, an alignment layer may be formed on the entire surface of the substrate **100**. The alignment layer is formed by coating an alignment material on the substrate **100**, and providing a predetermined direction to the coated alignment material.

[0036] The above process of coating the alignment material may be performed with the ink-jet apparatus. However, it is not limited to the ink-jet apparatus. For example, the process of coating the alignment material may be formed in a spin coating method or a slit coating method.

[0037] Also, the process of providing the predetermined direction to the coated alignment material is performed in a rubbing-alignment method or a photo-alignment method. If using the rubbing-alignment method, the ball spacers may move. In this respect, it is preferable to use the photo-alignment method when using the ball spacers.

[0038] If applying the photo-alignment method, the alignment material may be formed of a polyvinylcinnamate (PVCN), polysiloxanecinnamate (PSCN), or cellulosecinnamate (CelCN)-based compound, for example.

[0039] Although not shown, a thin film transistor substrate is provided opposite to the substrate **100**. Then, a liquid crystal layer is formed between the two substrates, thereby completing the LCD device.

[0040] The thin film transistor substrate contains gate and data lines, a thin film transistor, and a pixel electrode. The gate and data lines cross each other on a transparent substrate to define a unit pixel region. The thin film transistor includes a gate electrode, a source electrode, and a data electrode. The thin film transistor is formed adjacent to a crossing area of the gate and data lines. The pixel electrode is formed in the pixel region and is connected with the drain electrode of the thin film transistor. For an IPS mode LCD device, a common electrode is additionally formed in parallel to the pixel electrode. In addition, the color filter can be formed on the thin film transistor substrate in a COT (color filter-on-transistor) or TOC (transistor-on-color filter) arrangement, with the black matrix and ball spacers formed on either the thin film transistor substrate or the substrate opposing the thin film transistor substrate.

[0041] The liquid crystal layer may be provided using a dispensing method or an injection method. If the dispensing method is applied, liquid crystal is dispensed on either of the two substrates, and then the two substrates are bonded to each other. If the injection method is applied, after bonding the two substrates with a sealant, liquid crystal is injected to a space between the two substrates by capillary action using the pressure difference between the space (which may be under vacuum) and the external environment.

[0042] The elements provided on the substrate may be variable on material and formation method within the scope apparent to those skilled in the art.

[0043] In the method of manufacturing the LCD device, the ball spacers and the black matrix resin are coated on the substrate at the same time and the resin dried to form a black

matrix layer. Accordingly, the ball spacers are formed only in area covered by the black matrix layer. That is, the ball spacers do not move to a pixel area, thereby improving the picture quality. Although an ink-jet process has been described as the method of coating the substrate, other methods may be used such as those provided above.

[0044] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the inventions. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A method of manufacturing an LCD device, the method comprising:

providing an ink-jet apparatus having a solution containing a black matrix (BM) resin and ball spacers; and

coating the solution on a predetermined portion of a substrate using the ink-jet apparatus to simultaneously provide both a black matrix (BM) layer and the ball spacers on the substrate.

2. The method of claim 1, further comprising forming a color filter layer on the substrate except portions of the substrate containing the BM layer and the ball spacers.

3. The method of claim 2, wherein the color filter layer is formed before the BM layer and the ball spacers.

4. The method of claim 2, wherein the color filter layer is formed after the BM layer and the ball spacers.

5. The method of claim 2, further comprising forming a common electrode or an overcoat layer on an entire surface of the substrate.

6. The method of claim 2, further comprising forming an alignment layer on an entire surface of the substrate.

7. The method of claim 6, wherein the alignment layer is formed using a photo-alignment method.

8. The method of claim 1, further comprising:

providing another substrate opposite to the substrate; and

forming a liquid crystal layer.

9. The method of claim 8, wherein providing the other substrate comprises:

forming gate and data lines crossing each other on a transparent substrate, so as to define a unit pixel region;

forming a thin film transistor adjacent to a crossing area of the gate and data lines, the thin film transistor including a gate electrode, a source electrode and a drain electrode; and

forming a pixel electrode connected with the drain electrode of the thin film transistor.

10. The method of claim 8, wherein forming the liquid crystal layer comprises bonding the two substrates to each other after dispensing liquid crystal on one of the two substrates.

11. The method of claim 8, wherein forming the liquid crystal layer comprises injecting liquid crystal to a space between the two substrates after bonding the two substrates to each other.

12. A method of manufacturing an LCD device, the method comprising:

coating a predetermined non-pixel area of a first substrate with a solution containing a black matrix (BM) resin and ball spacers;

providing a second substrate opposite to the first substrate; and

forming a liquid crystal layer.

13. The method of claim 12, further comprising drying the solution to simultaneously provide both a black matrix (BM) layer and ball spacers on the substrate.

14. The method of claim 12, wherein the BM resin is sufficiently thick such that as the BM resin sets, neither the BM resin nor the ball spacers substantially impinge on a pixel area of the first transparent substrate.

15. The method of claim 12, wherein coating the first substrate with the solution comprises dispensing the solution onto the first substrate using an ink-jet apparatus.

16. The method of claim 12, further comprising forming a color filter layer on the first substrate in a pixel area of the first substrate.

17. The method of claim 16, wherein the color filter layer is formed before the BM layer and the ball spacers.

18. The method of claim 16, wherein the color filter layer is formed after the BM layer and the ball spacers.

19. The method of claim 12, wherein forming the liquid crystal layer comprises bonding the first and second substrates to each other after dispensing liquid crystal on one of the first and second substrates.

20. The method of claim 12, wherein forming the liquid crystal layer comprises injecting liquid crystal to a space between the first and second substrates after bonding the first and second substrates to each other.

21. The method of claim 12, wherein the first substrate is a thin film transistor substrate.

22. The method of claim 12, wherein the first substrate is a color filter substrate.

23. An LCD device comprising:

a first transparent substrate containing a black matrix (BM) layer in a non-pixel area, the BM layer having ball spacers dispensed therein;

a second transparent substrate opposite to the first substrate; and

a liquid crystal layer disposed between the first and second substrates.

24. The device of claim 23, further comprising a color filter layer on the first substrate in a pixel area of the first substrate.

25. The device of claim 23, wherein the first substrate is a thin film transistor substrate.

26. The device of claim 23, wherein the first substrate is a color filter substrate.

27. The device of claim 23, wherein the second substrate comprises:

gate and data lines crossing each other on the second substrate to define a unit pixel region;

a thin film transistor adjacent to a crossing area of the gate and data lines, the thin film transistor including a gate electrode, a source electrode and a drain electrode; and

a pixel electrode connected with the drain electrode of the thin film transistor.

专利名称(译)	制造液晶显示装置的方法		
公开(公告)号	US20060209235A1	公开(公告)日	2006-09-21
申请号	US11/384108	申请日	2006-03-17
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG 飞利浦LCD CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KIM MIN JOO		
发明人	KIM, MIN JOO		
IPC分类号	G02F1/1333		
CPC分类号	G02F1/133512 G02F1/13392		
优先权	1020050022705 2005-03-18 KR		
其他公开文献	US7683985		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种制造液晶显示 (LCD) 装置的方法和相应的LCD装置。喷墨装置具有含有黑色基质树脂和球状间隔物的溶液。然后通过喷墨装置将溶液涂覆在基板的预定部分上。这允许同时形成黑色矩阵层和球间隔物，其中球间隔物仅设置在基板的非像素区域中。

