




US 20080088754A1

(19) **United States**(12) **Patent Application Publication**
Hu et al.(10) **Pub. No.: US 2008/0088754 A1**(43) **Pub. Date: Apr. 17, 2008**(54) **TRANSFLECTIVE LIQUID CRYSTAL
DISPLAY****Publication Classification**(76) Inventors: **Chih-Jen Hu**, Hsin-Chu (TW);
Chih-Ming Chang, Hsin-Chu
(TW)(51) **Int. Cl.**
G02F 1/1335 (2006.01)
G02F 1/133 (2006.01)
G02F 1/1343 (2006.01)Correspondence Address:
**NORTH AMERICA INTELLECTUAL PROP-
ERTY CORPORATION**
P.O. BOX 506
MERRIFIELD, VA 22116(52) **U.S. Cl.** **349/33; 349/106; 349/114**(21) Appl. No.: **11/776,560**(22) Filed: **Jul. 12, 2007**(30) **Foreign Application Priority Data**

Oct. 16, 2006 (TW) 095138052

(57) **ABSTRACT**

A transfective LCD includes scan lines and data lines disposed on a substrate. The scan line and the data line forms a plurality of pixel regions. Each pixel region has a plurality of sub-pixel regions. At least three of the sub-pixel regions are as a color sub-pixel region and at least one of the sub-pixel regions is a fourth sub-pixel region. A plurality of switch devices is adapted to control the color sub-pixels and the fourth sub-pixel.

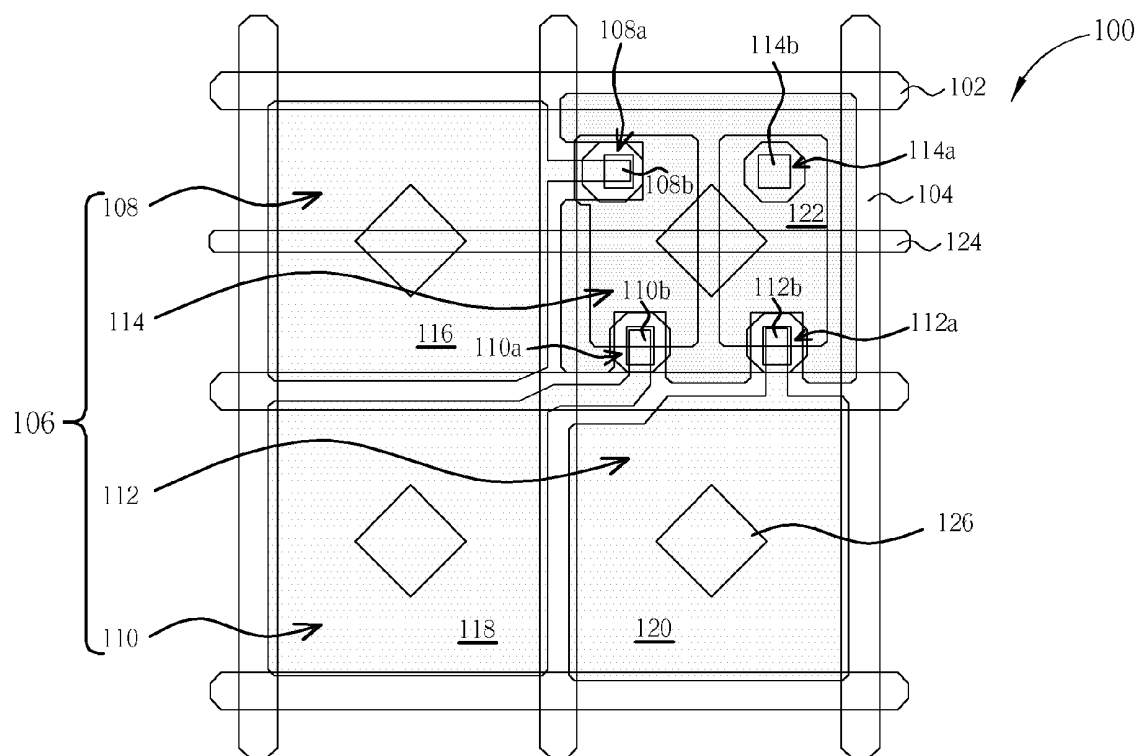

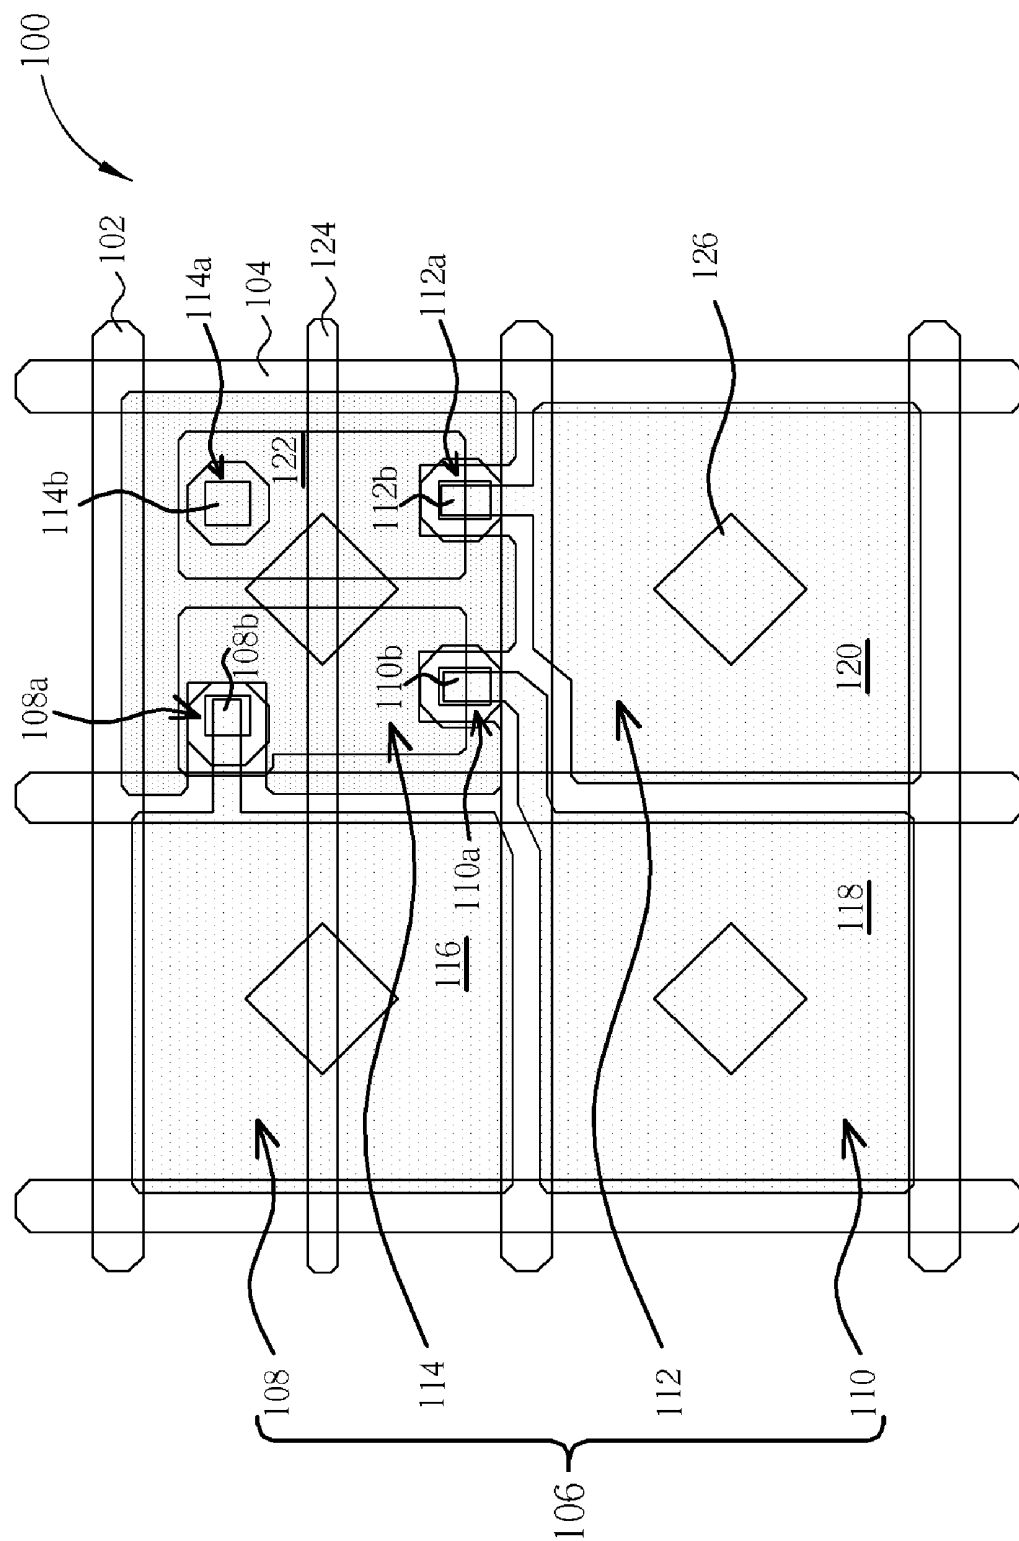


Fig. 1

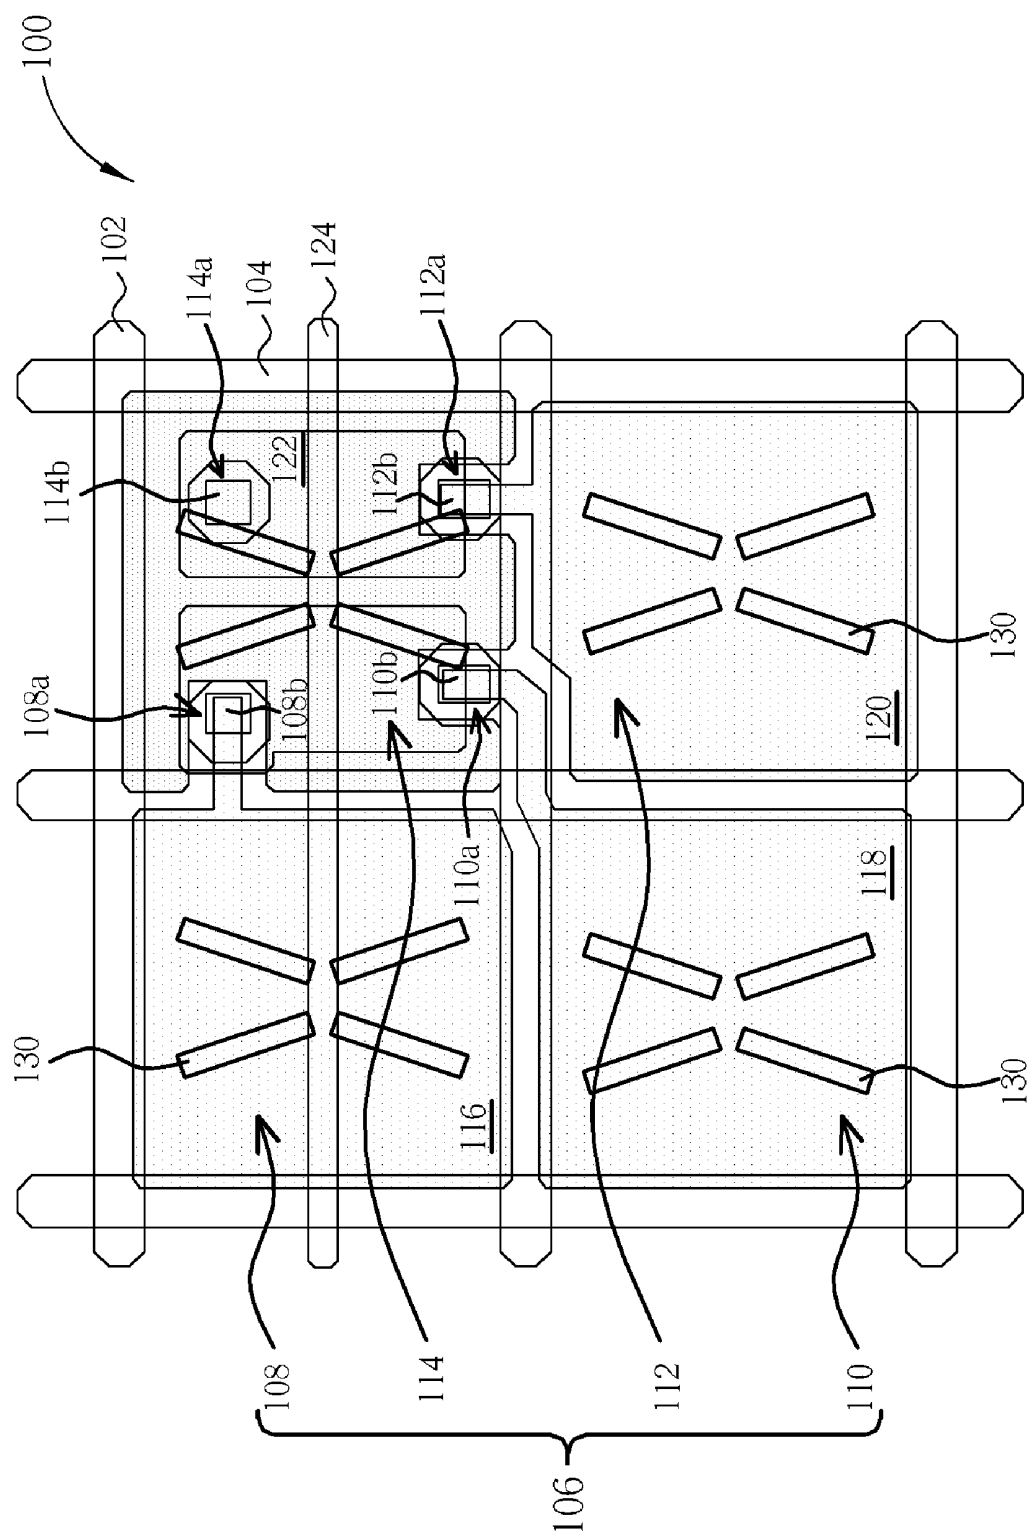


Fig. 2

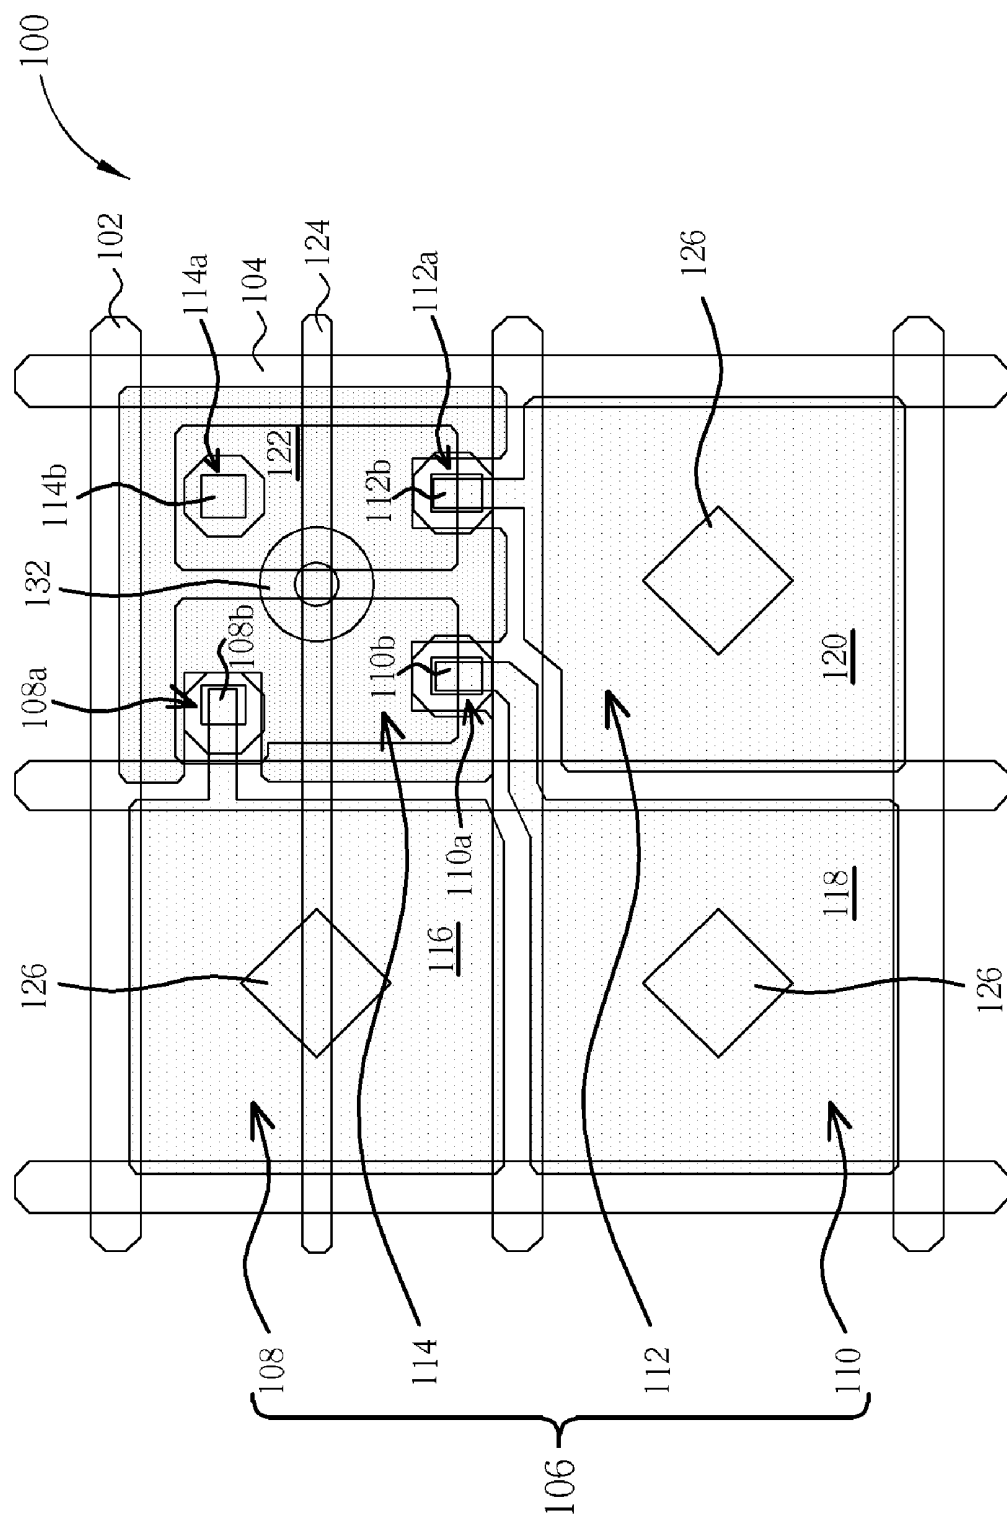


Fig. 3

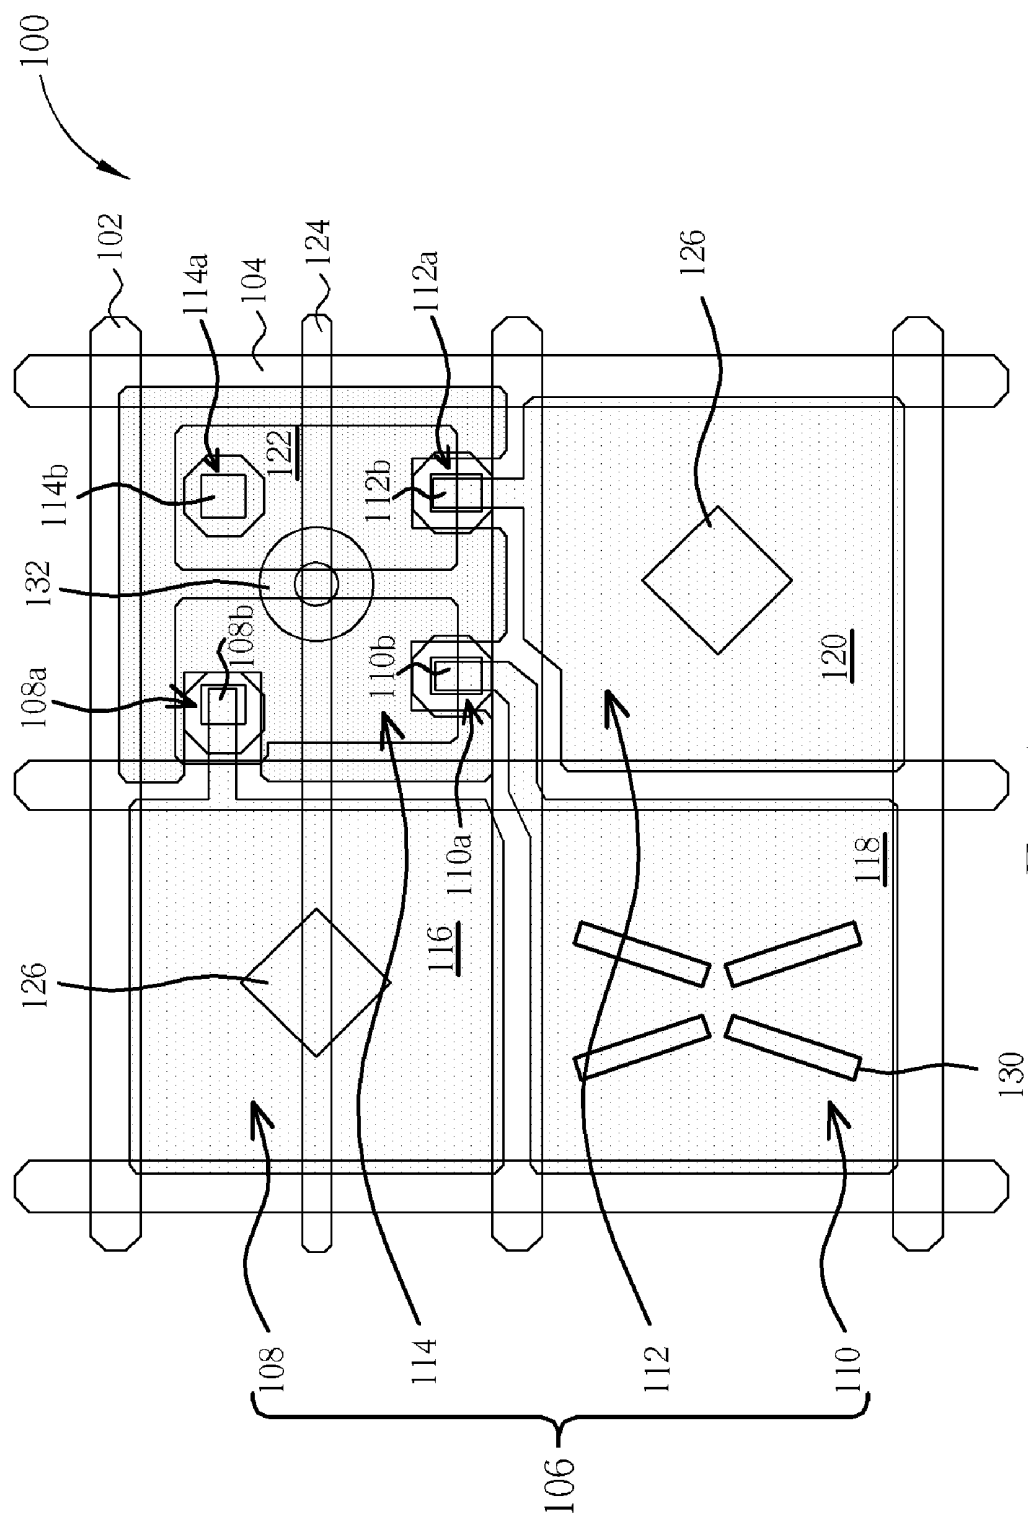


Fig. 4

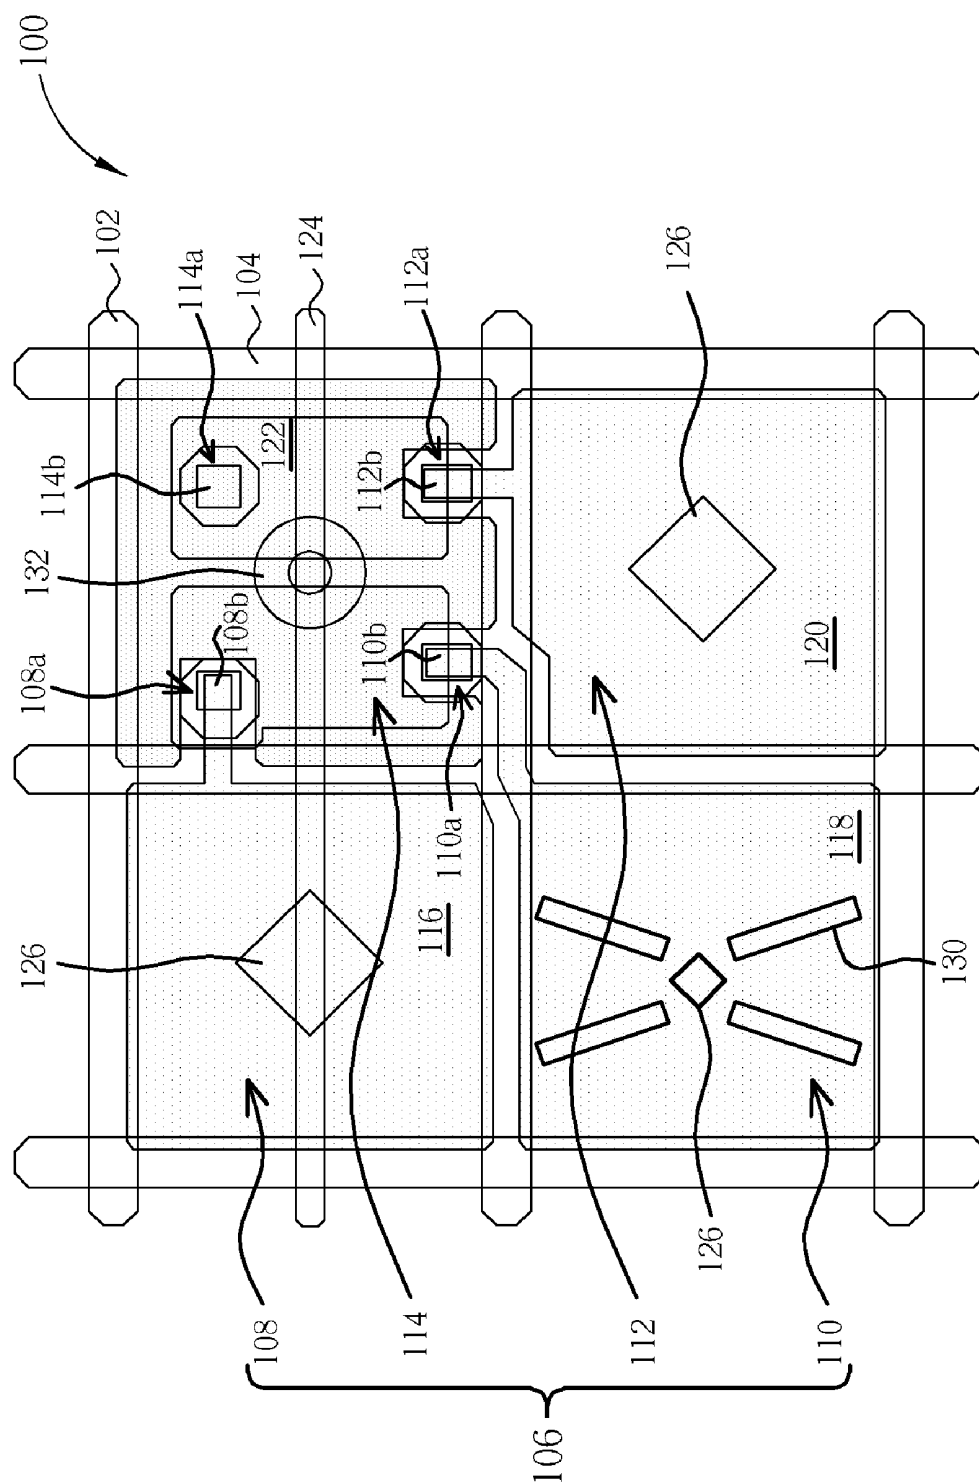


Fig. 5

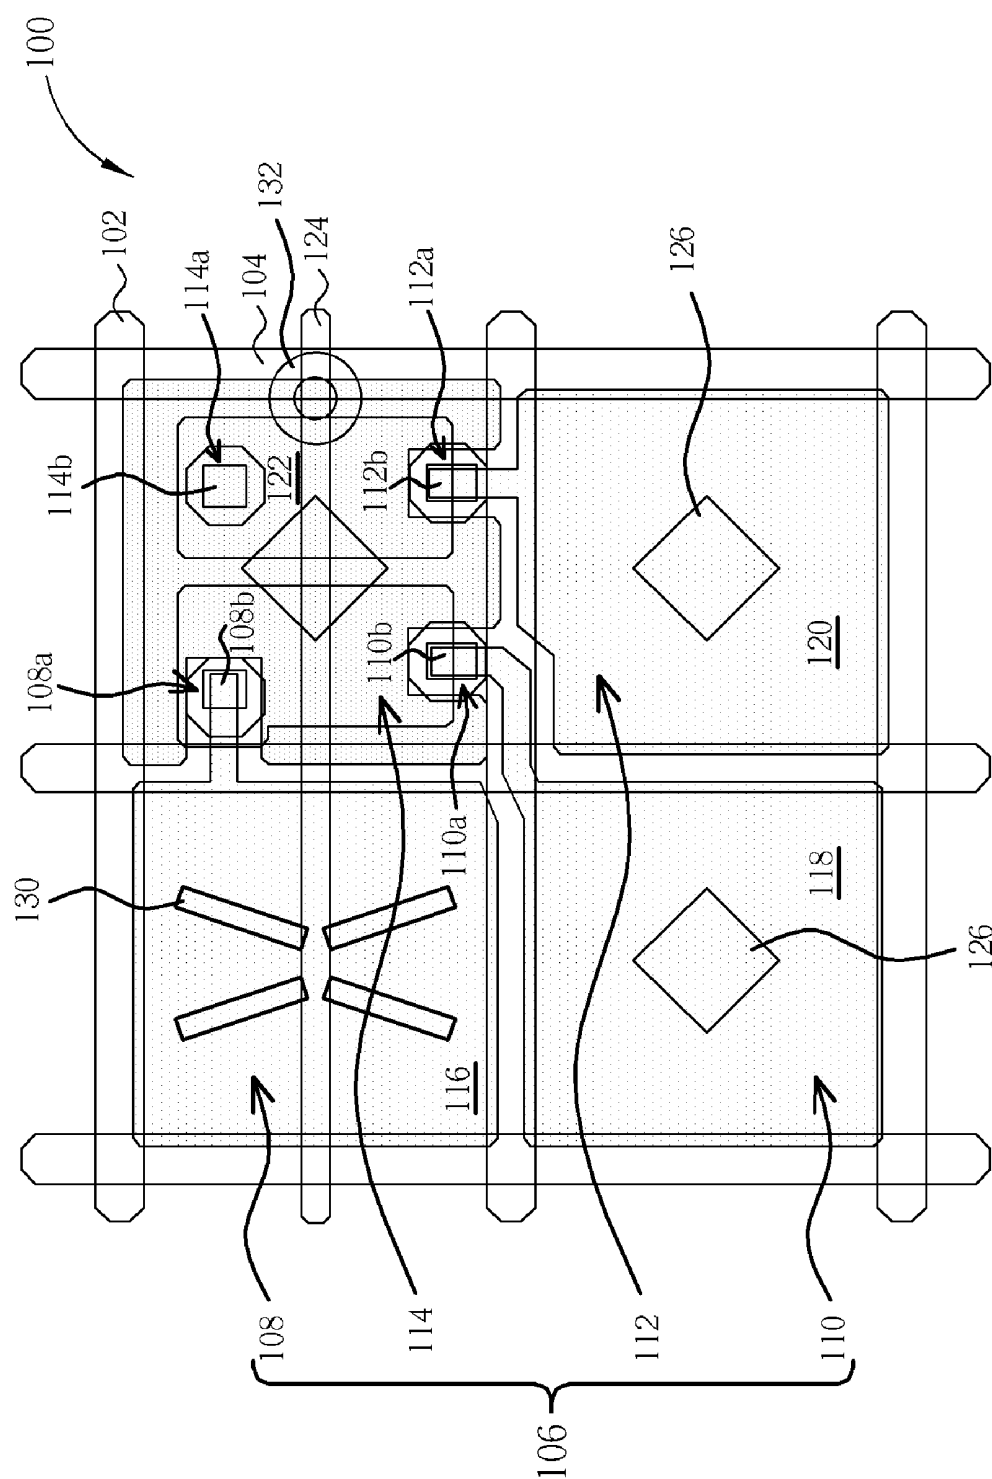


Fig. 6

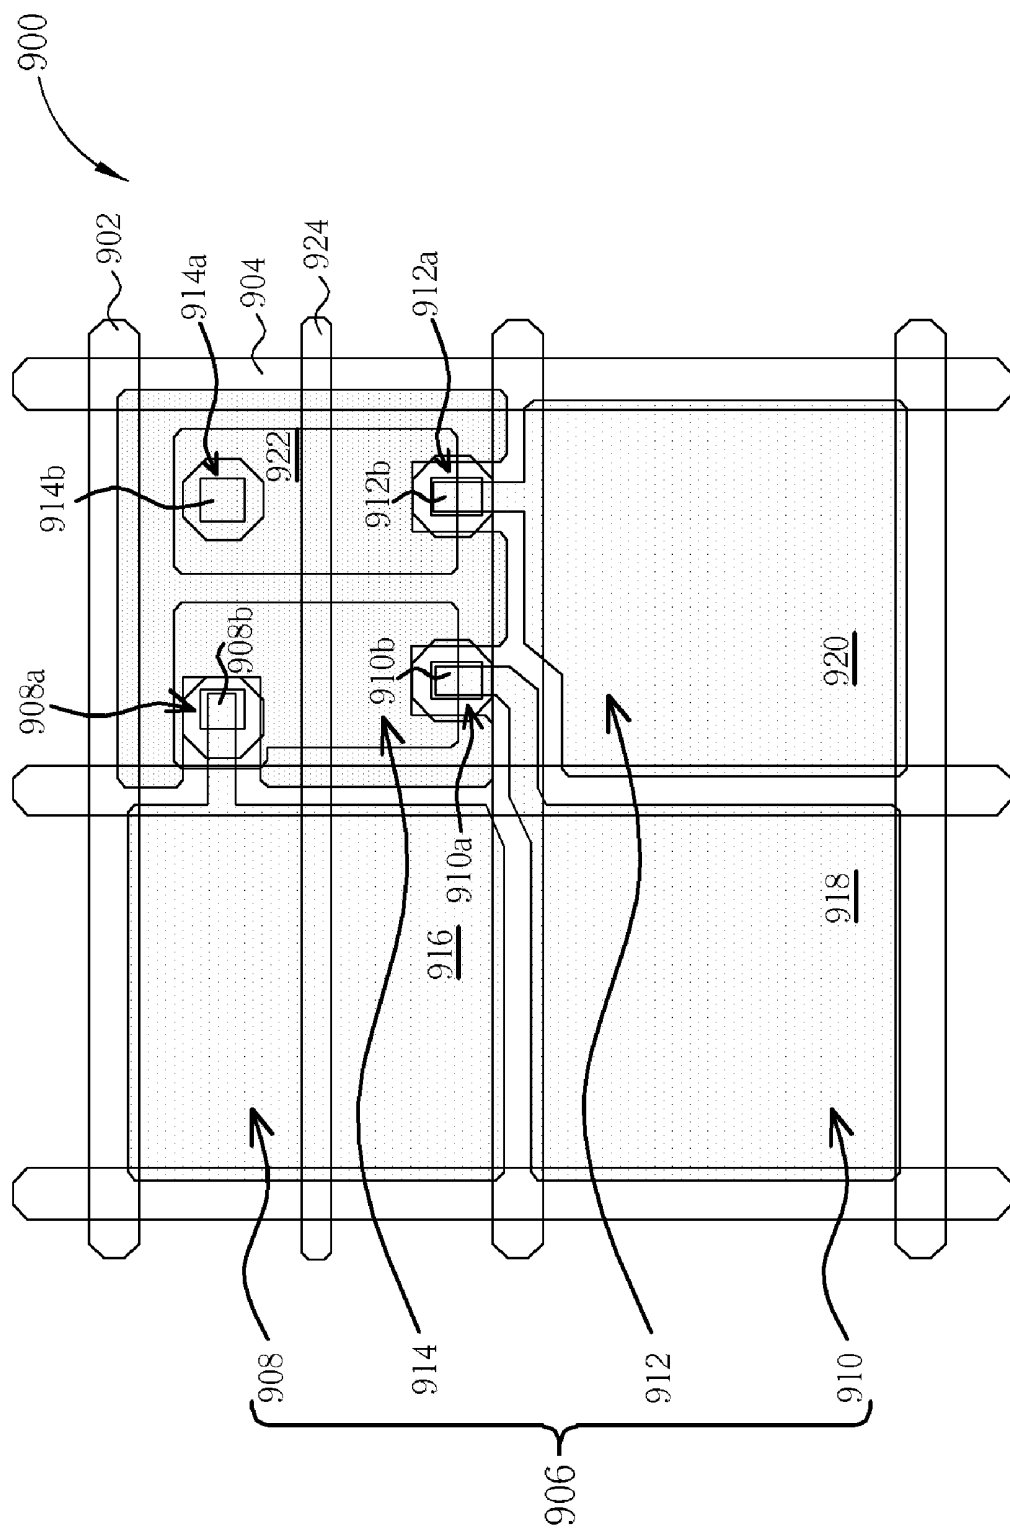


Fig. 7

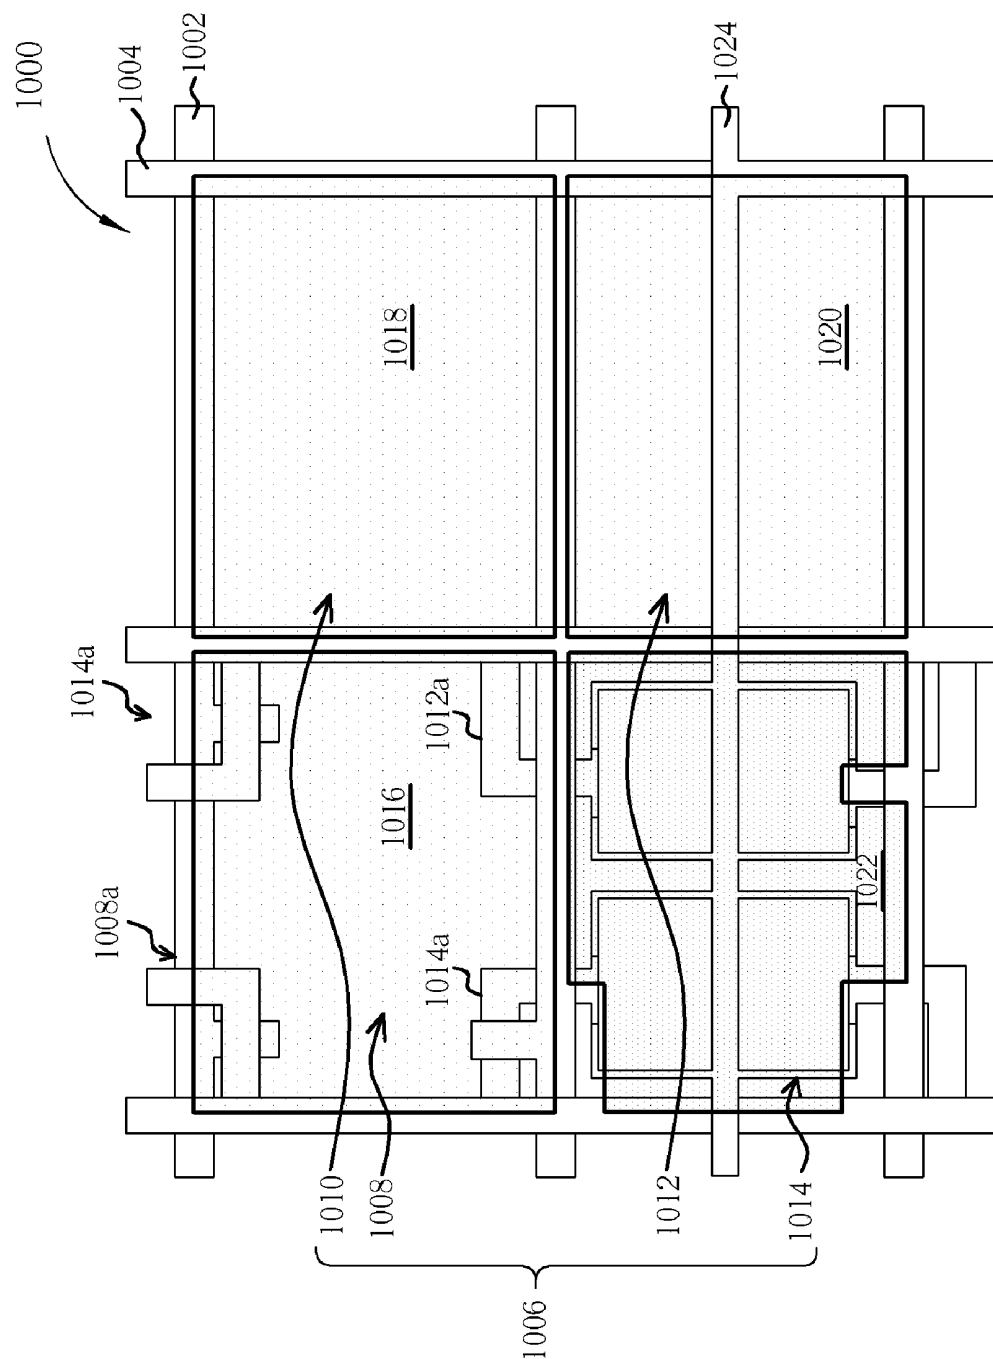


Fig. 8

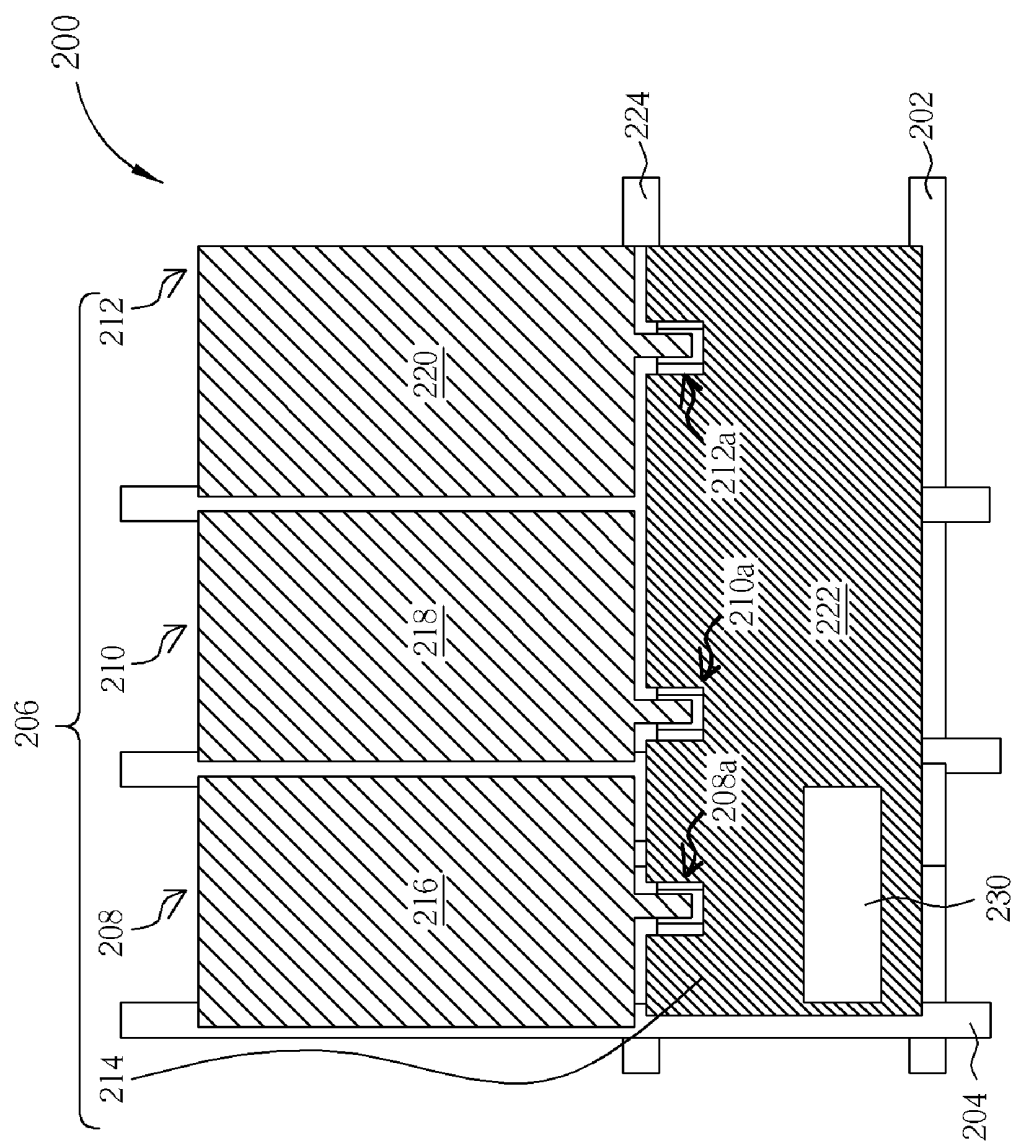


Fig. 9

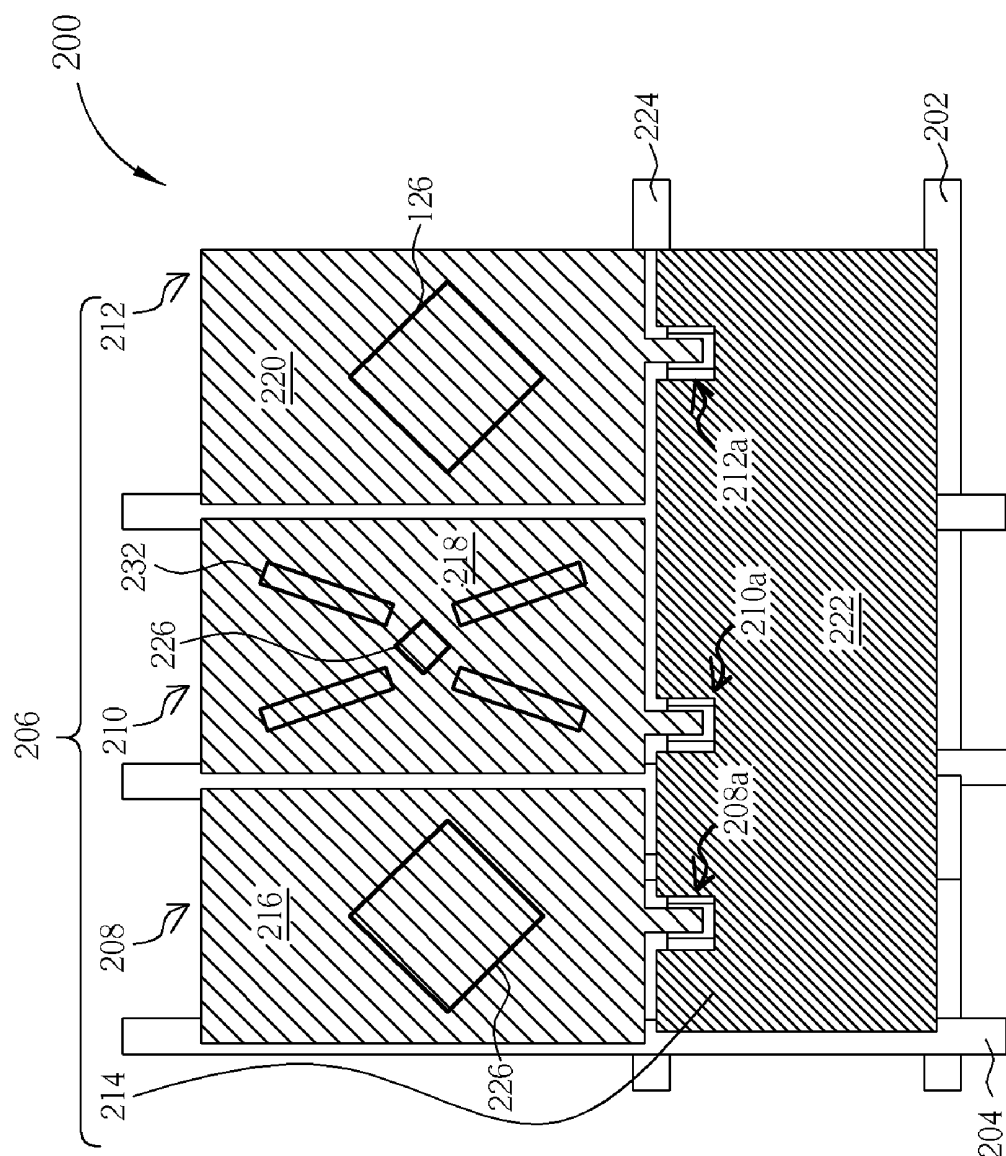


Fig. 10

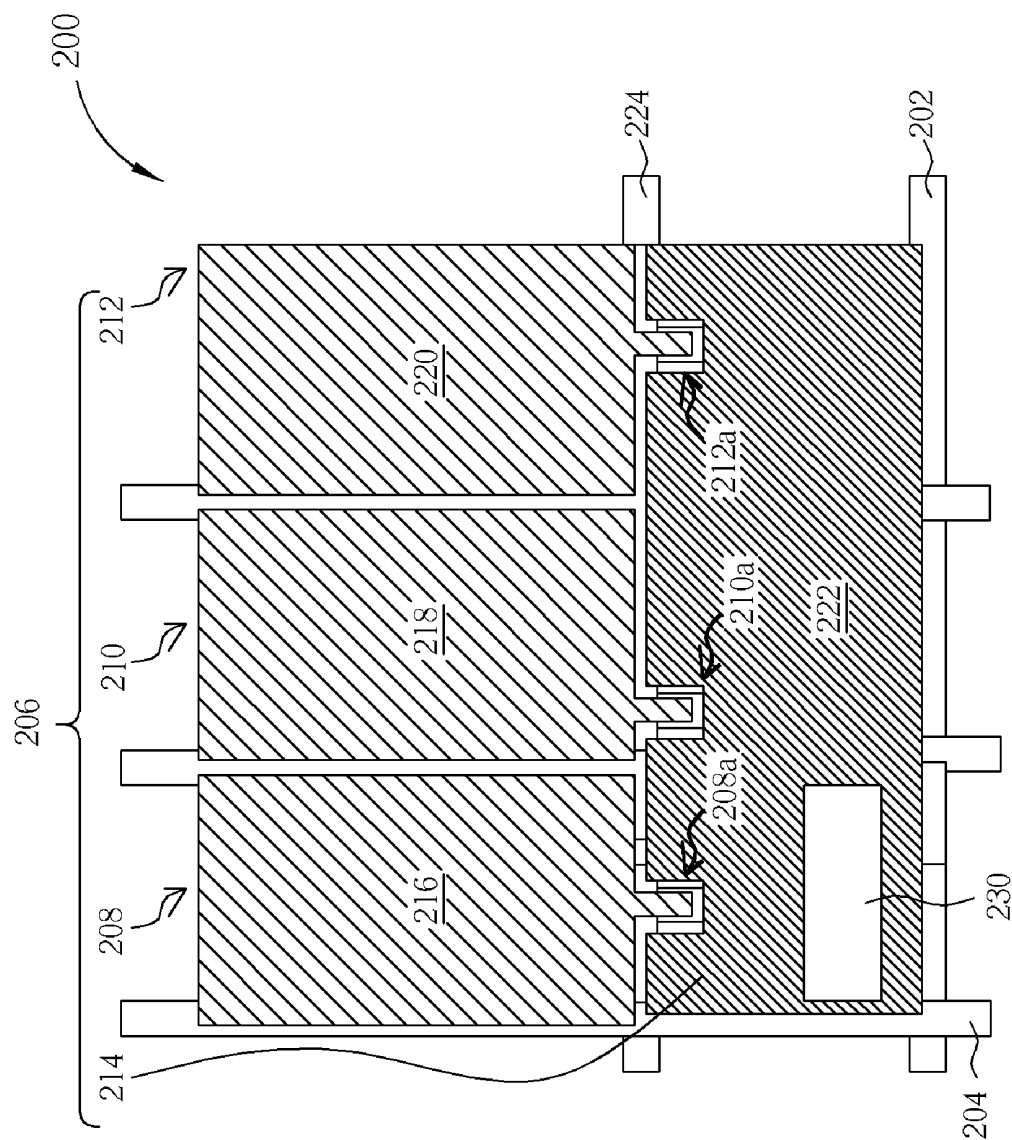


Fig. 11

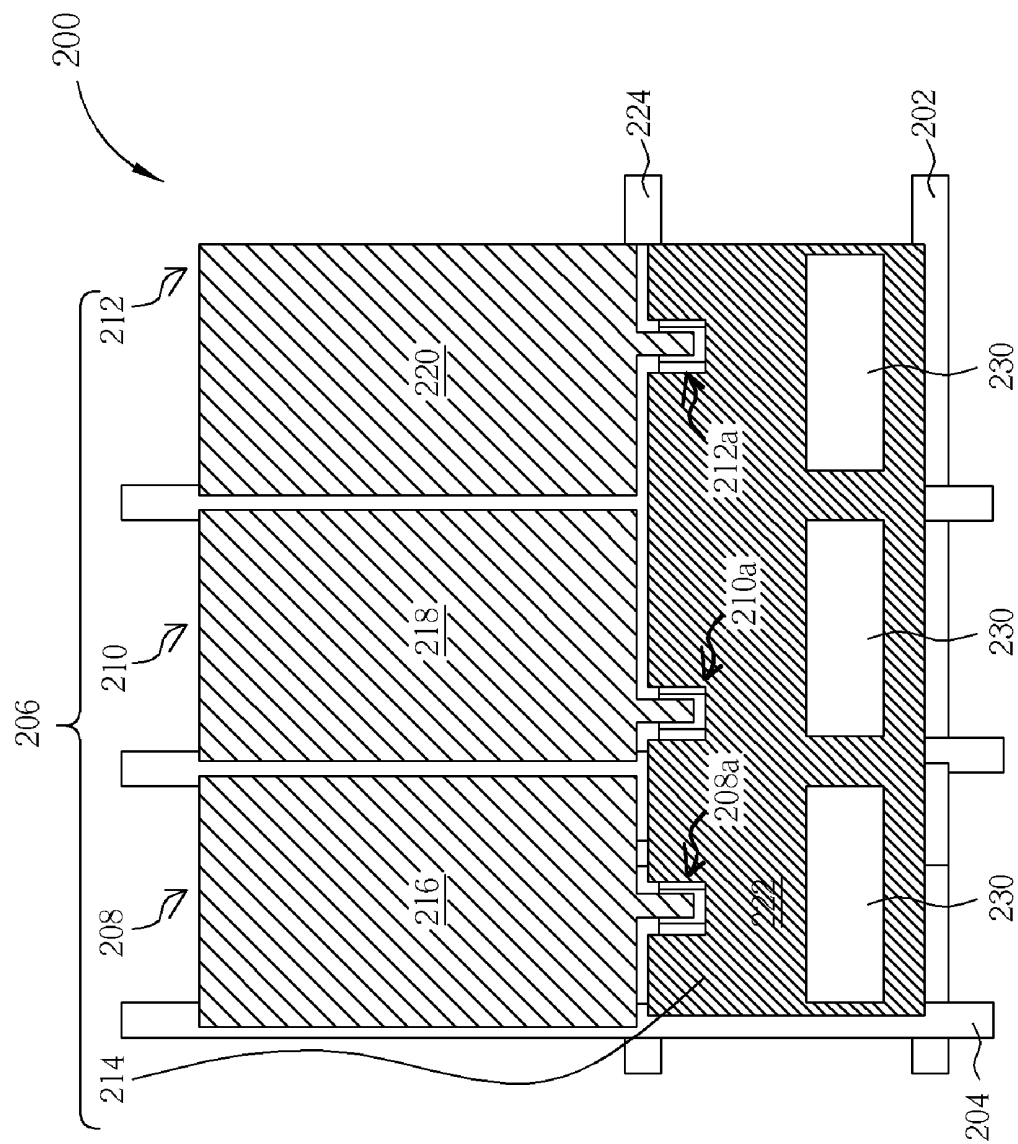


Fig. 12

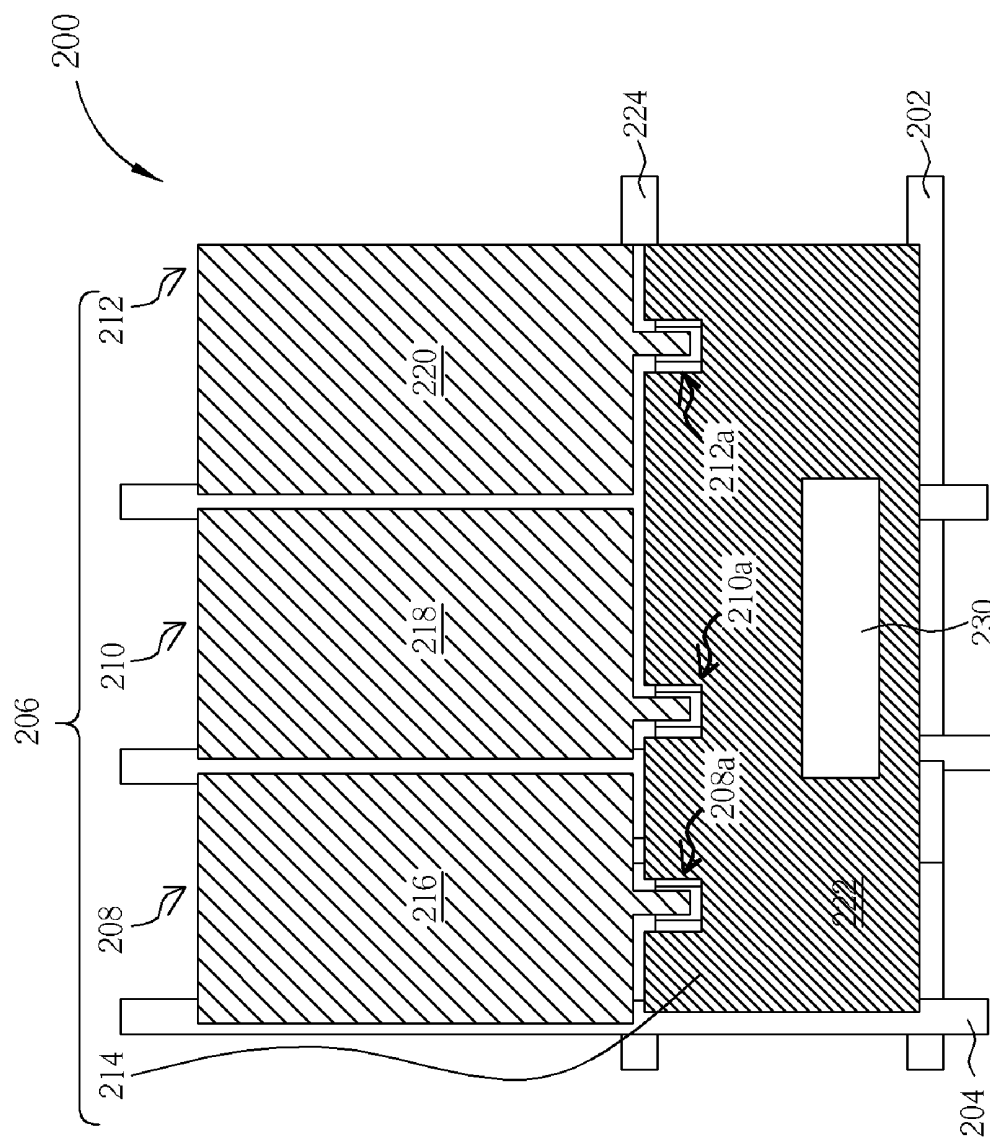


Fig. 13

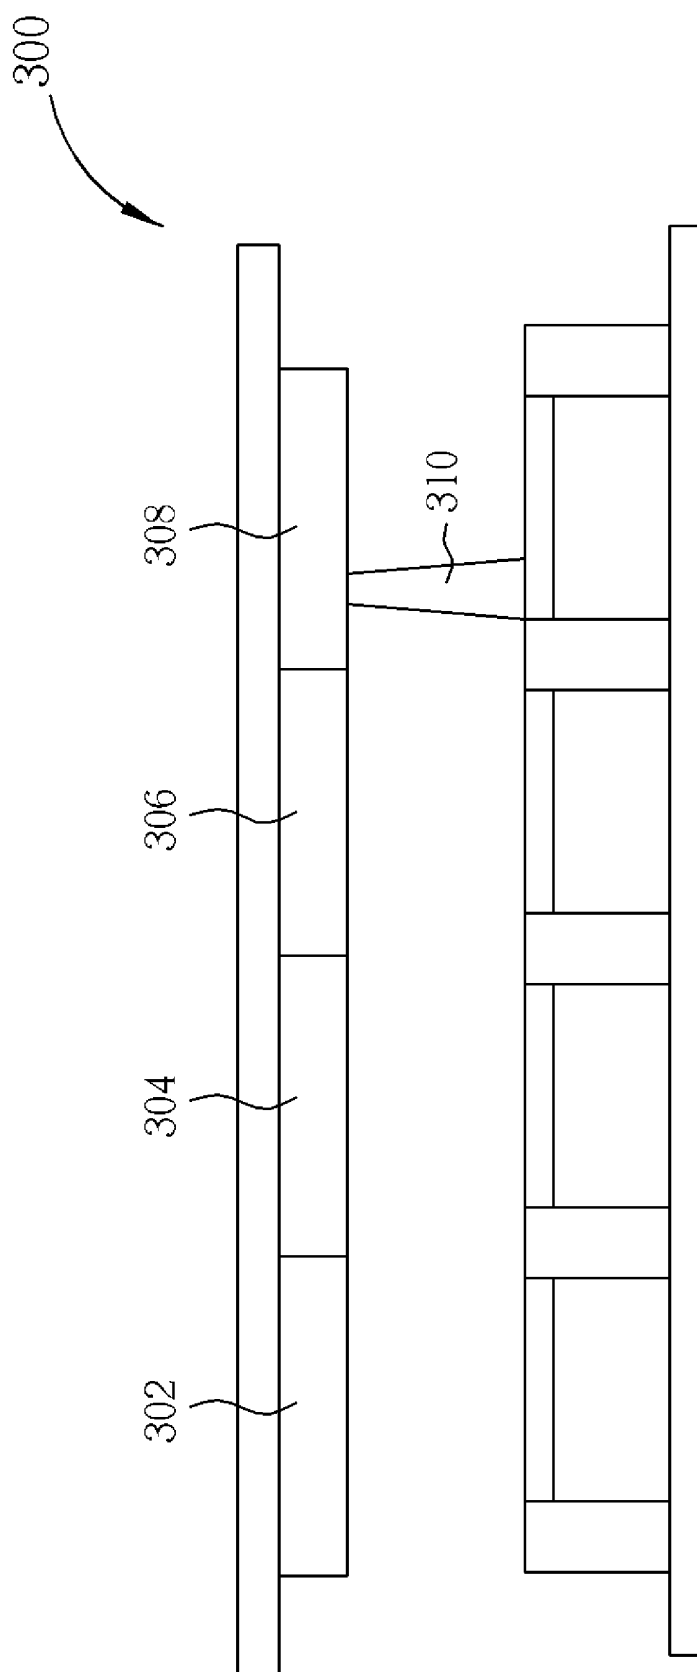


Fig. 14

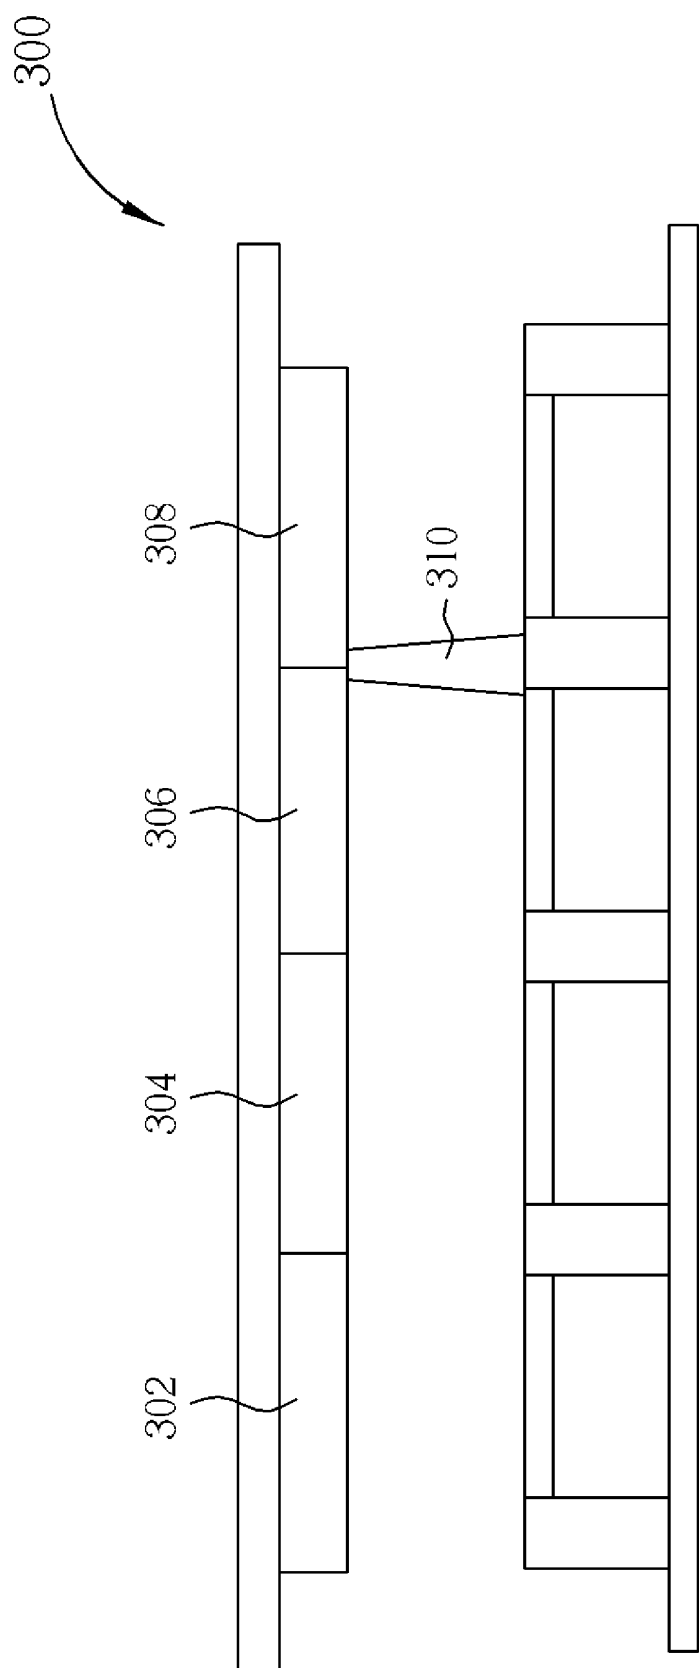


Fig. 15

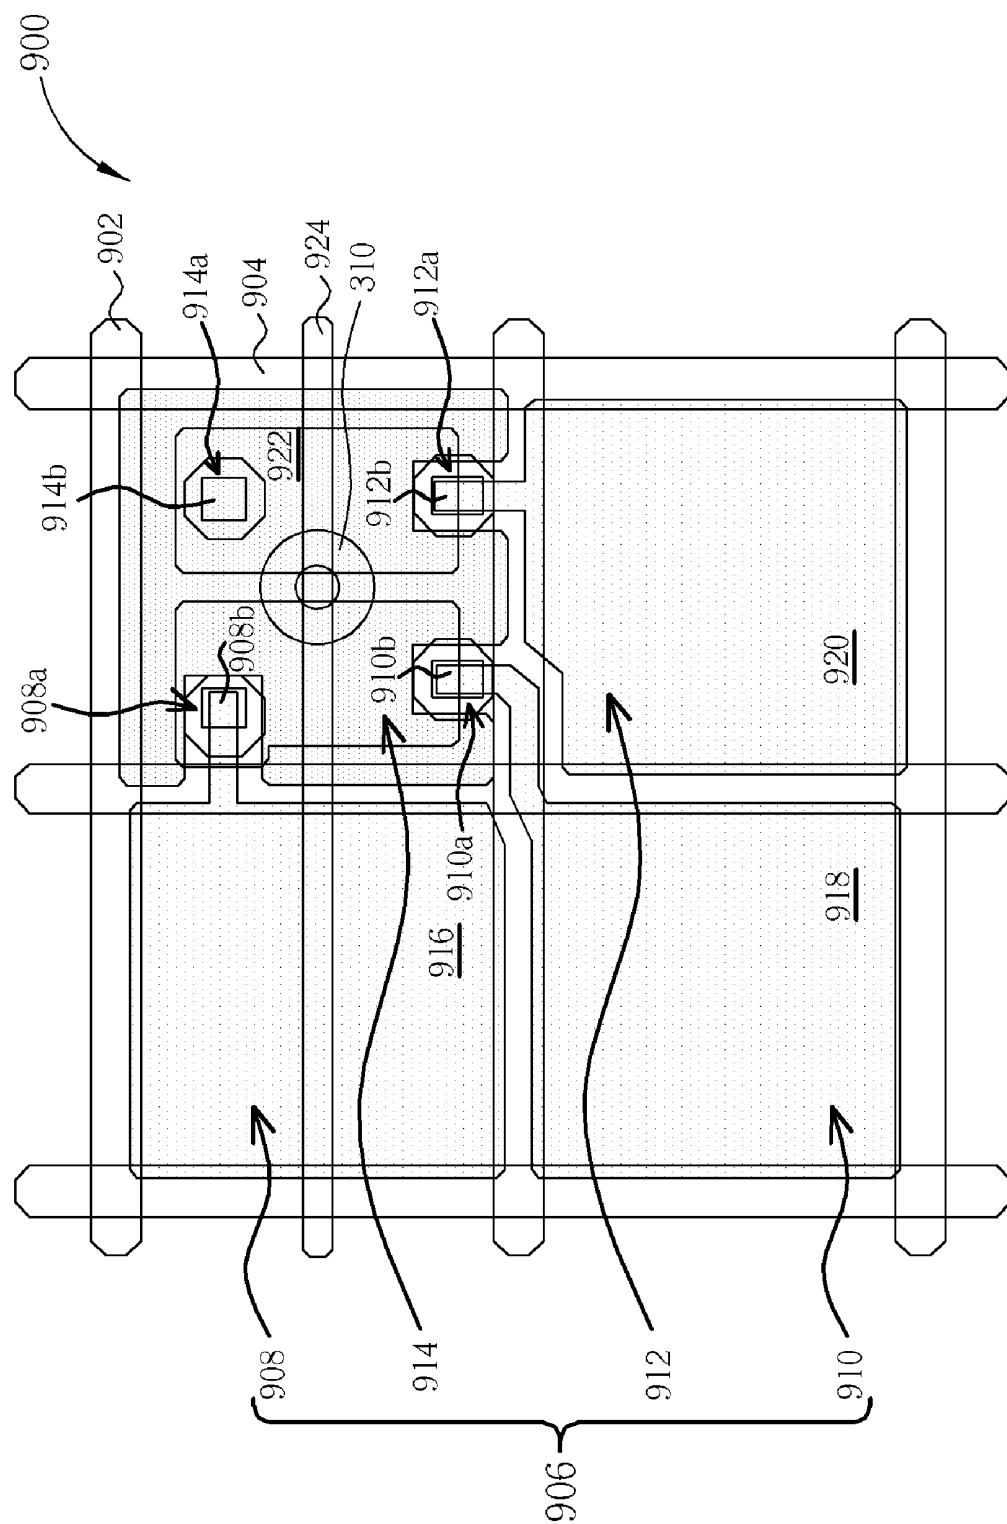


Fig. 16

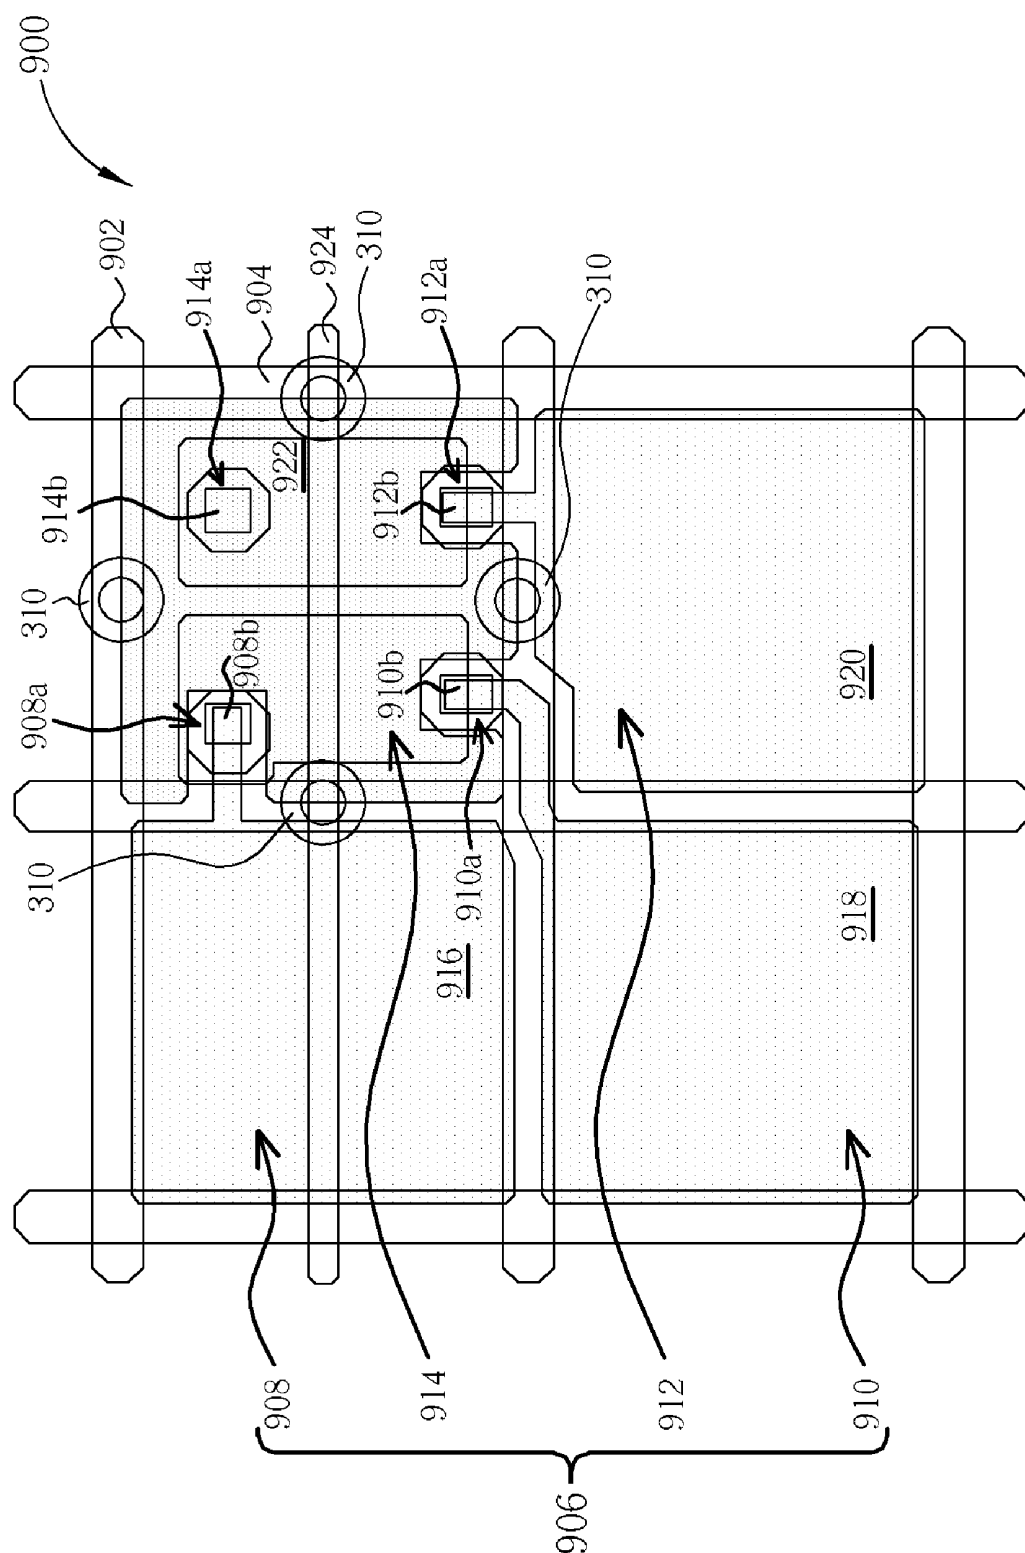


Fig. 17

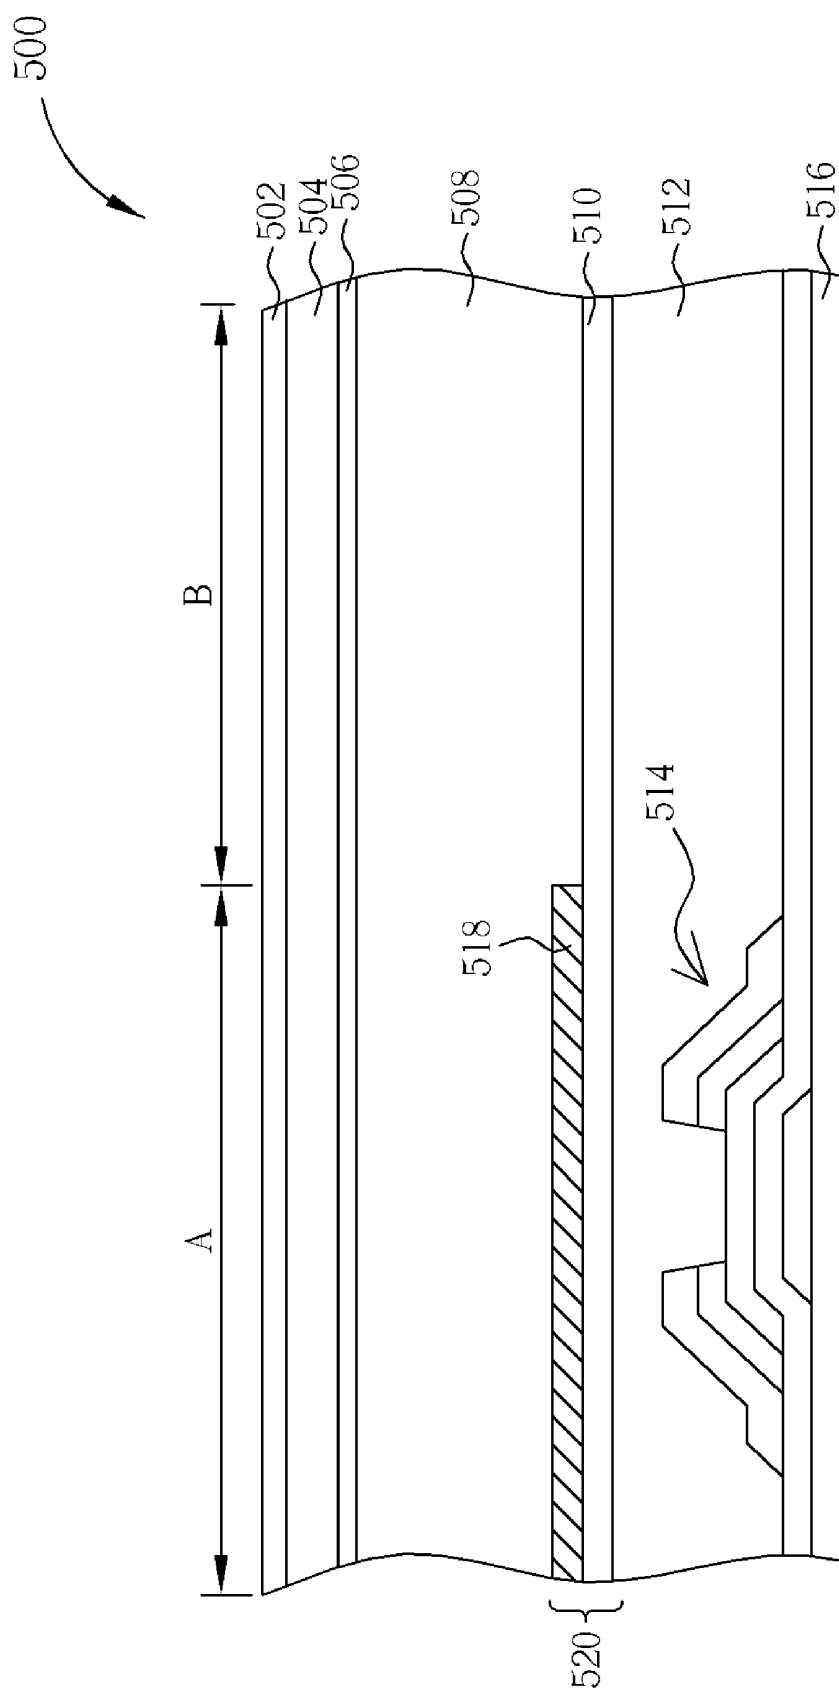


Fig. 18

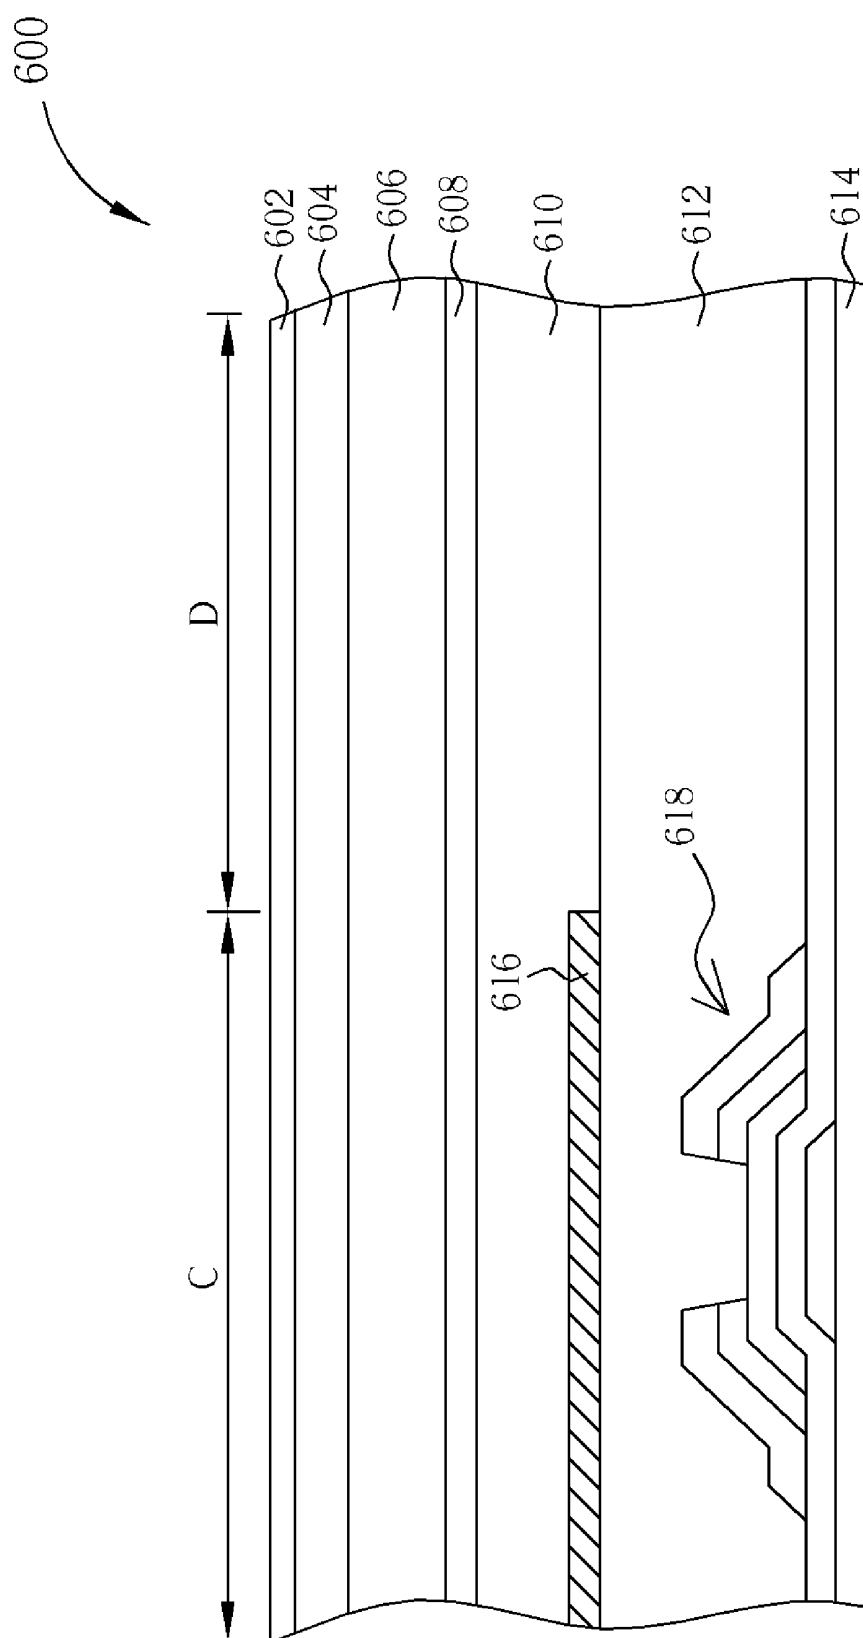


Fig. 19


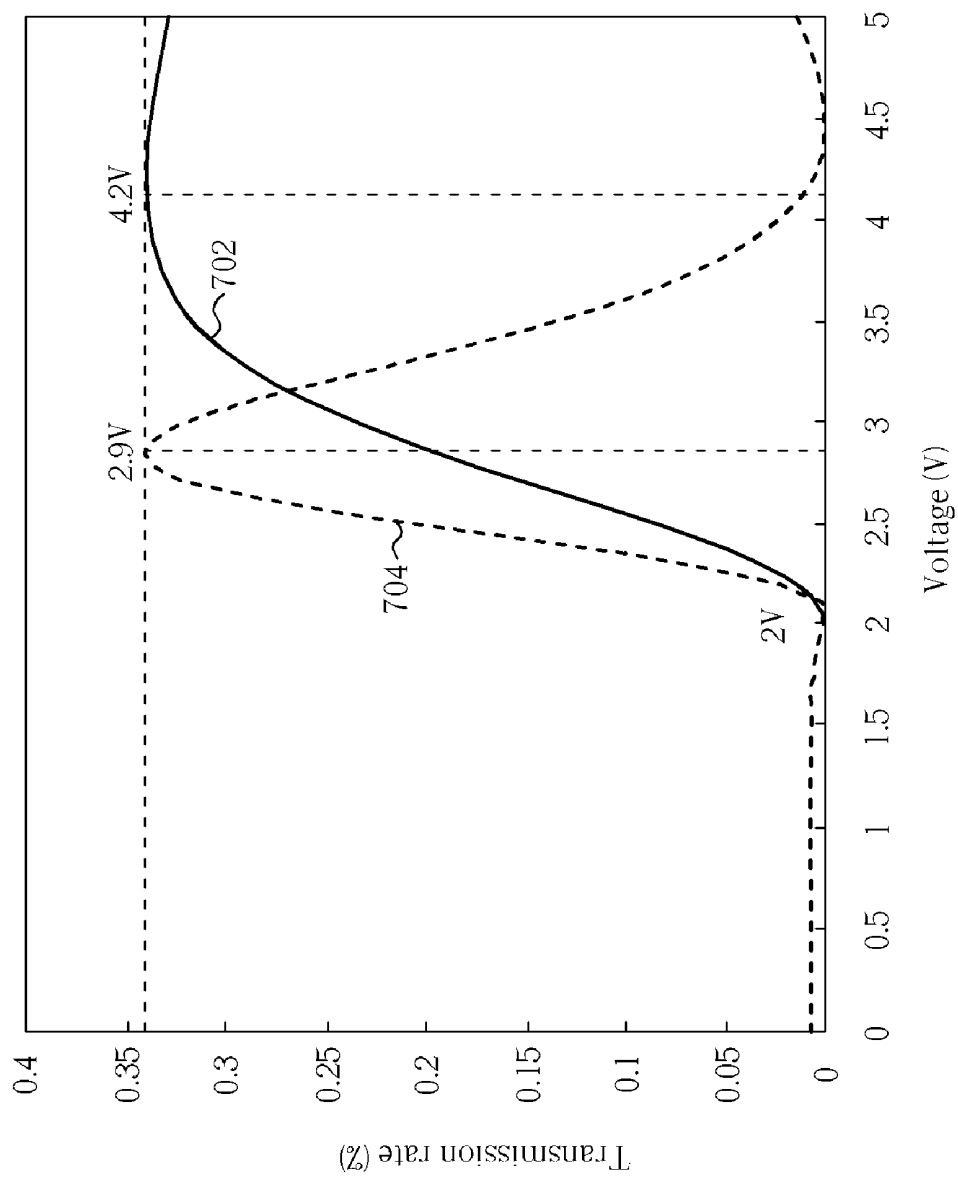


Fig. 20

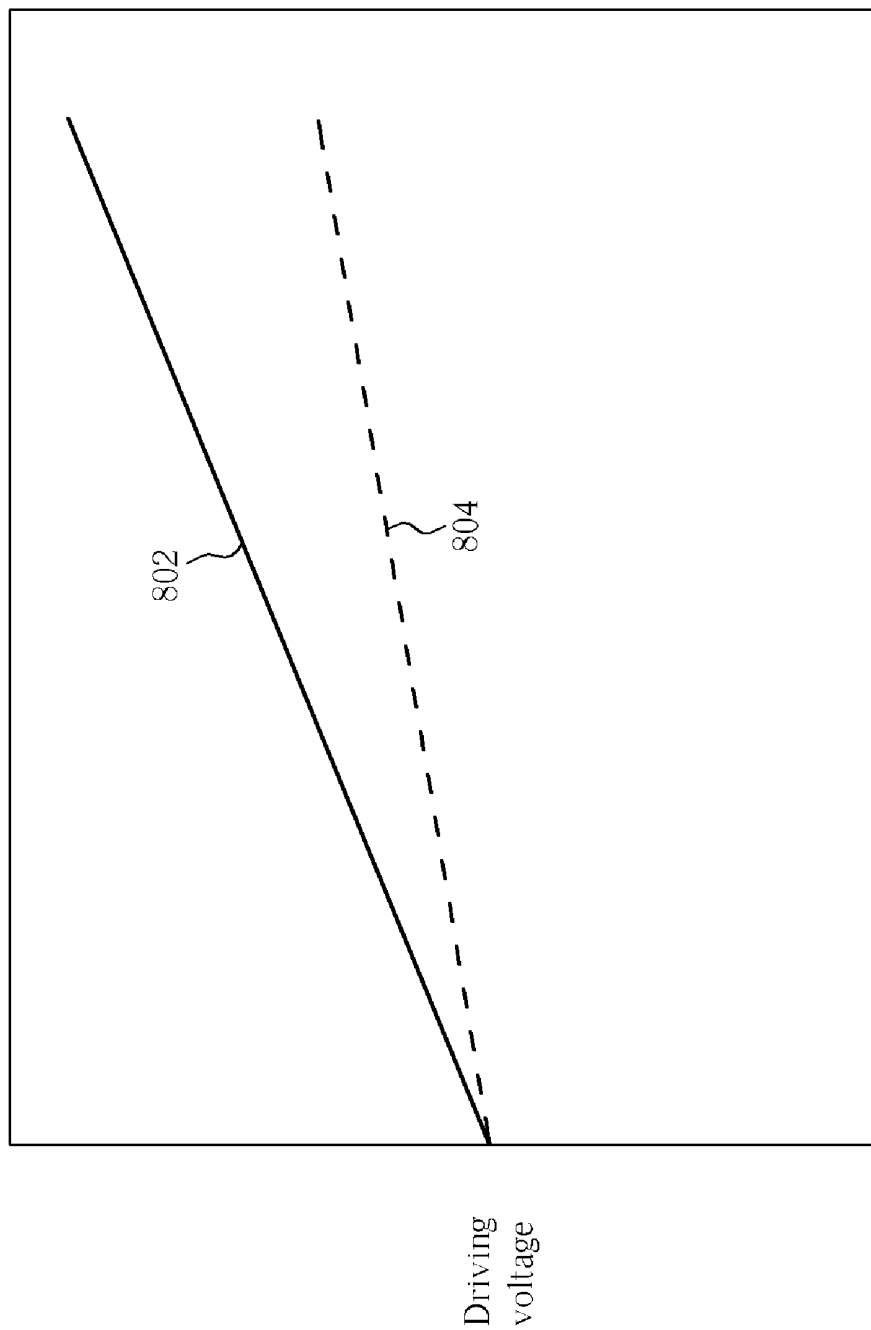

Gray-scale

Fig. 21

TRANSFLECTIVE LIQUID CRYSTAL DISPLAY

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a transfective liquid crystal display (LCD) and, more particularly, to a transfective LCD with at least three color sub-pixel regions and at least a fourth sub-pixel region in one pixel region.

[0003] 2. Description of the Prior Art

[0004] Thin film transistor (TFT) liquid crystal displays (LCD) are generally classified into reflective LCDs, transmissive LCDs, and transfective LCDs. In a reflective LCD, an ambient light in front of the panel into the panel, and is reflected by a reflective layer so that users can see what the LCD displays on the screen. In a transmissive LCD, a backlight module is installed below the panel for radiating light, and the radiated light will pass through the panel so that users can see what the LCD displays on the screen. In a transfective LCD, an ambient light and a backlight module are used simultaneously as light sources to illuminate the transfective LCD.

[0005] Generally speaking, only a little light formed by the backlight module really pass through the panel. Most of it is absorbed along the way including pass through an optical film and the panel. In addition, the transmissive LCD has a low contrast ratio under the light of the daytime or higher brightness light of the ambient. To solve the problem mentioned above, the LCDs on the market often have a transfective design.

[0006] The resolution of the LCD is increased, and the pixel is made smaller, but the size of the thin film transistors in the pixel cannot be decreased due to limitations of a fabrication process. So the ratio of pixels that the thin film transistors occupy is increased, and the open ratio of the LCD is decreased. To make a transfective LCD with a high open ratio is an important issue in the LCD field.

SUMMARY OF THE INVENTION

[0007] It is therefore one objective of the present invention to provide a transfective LCD to solve the above-mentioned problems.

[0008] According to the transfective LCD of the present invention, the transfective LCD comprises a plurality of scan lines disposed along a first direction on a substrate, a plurality of data lines disposed along a second direction on the substrate, so that a plurality of pixel regions comprising a plurality of sub-pixel regions defined by the data lines and the scan lines, and at least three of the sub-pixel regions as a color sub-pixel regions and at least one of the sub-pixel regions as a fourth sub-pixel region, wherein the color sub-pixel regions are a transmission region within a transmissive electrode; and a plurality of switch devices adapted to control the color sub-pixel regions and the fourth sub-pixel region.

[0009] According to another transfective LCD of the present invention, the transfective LCD comprises a plurality of scan lines disposed along a first direction on a substrate; a plurality of data lines, disposed along a second direction on the substrate, so that a plurality of pixel regions comprising a plurality of sub-pixel regions defined by the data line and the scan lines, and at least three of the sub-pixel regions as a color sub-pixel regions and at least one of the

sub-pixel regions corresponding to the color sub-pixel regions as a fourth sub-pixel region, wherein the color sub-pixel regions are a transmission region within a transmissive electrode; and a plurality of switch devices adapted to control the color sub-pixel regions and the fourth sub-pixel region.

[0010] The thin film transistors are adapted to control the sub-pixel regions are disposed in the reflection region, so the open ratio of the transmission region of the sub-pixel regions can be increased.

[0011] These and other objectives of the present invention will no doubt become obvious to those of ordinary skill in the art after reading the following detailed description of the preferred embodiment that is illustrated in the various figures and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIG. 1 is a schematic diagram of one embodiment of structure of transfective LCD in the present invention.

[0013] FIG. 2 to FIG. 6 are schematic diagrams of structures of varied types of photo-spacers and the alignment device (such as at least one of slits and protrusions) in FIG. 1

[0014] FIG. 7 is a schematic diagram of another embodiment of structure of transfective LCD in the present invention.

[0015] FIG. 8 is a schematic diagram of another embodiment of structure of transfective LCD in the present invention.

[0016] FIG. 9 to FIG. 10 are schematic diagrams of another embodiment of structure of transfective LCD in the present invention.

[0017] FIG. 11 to FIG. 13 depicts variation of structure related to FIG. 10.

[0018] FIG. 14 to FIG. 17 are schematic diagrams of structure of the photo-spacer in the present invention.

[0019] FIG. 18 to FIG. 19 are schematic diagrams of structure of color filter in the present invention.

[0020] FIG. 20 is diagram of voltage vs. transmittance of colorless and color sub-pixel regions in the present invention.

[0021] FIG. 21 is diagram of gray-scale of colorless and color sub-pixel regions vs. driving voltage of colorless and color sub-pixel regions in the present invention.

DETAILED DESCRIPTION

[0022] FIG. 1 is a schematic diagram of one embodiment of structure of a transfective LCD in the present invention. The transfective LCD 100 comprises: a plurality of scan lines 102 disposed along a first direction on a substrate, and a plurality of data lines 104 disposed along a second direction on the substrate. A plurality of pixel regions 106 are defined by the data line 106 and the scan lines 102, and each pixel region comprising a plurality of sub-pixel regions 108, 110, 112, 114. Each of the sub-pixel regions 108, 110, 112 is as a color sub-pixel region comprises red, green, blue, or other colors (such as yellow, brown, purple, and so on). The sub-pixel region 114 comprises a colorless pixel region, a color that is substantially equal to any one of the colors in the sub-pixel regions 108, 110, 112, or a color that is substantially different from one of the colors in the sub-pixel regions 108, 110, 112. For example, other than red, green and blue, which can be used, yellow, brown, purple, and so

on can also be used. In the embodiment of the present invention, for example, the sub-pixel regions **108**, **110**, **112** are red, green, and blue, respectively, and the sub-pixel region **114** is colorless. In addition, the sub-pixel regions **108**, **110**, **112** are as transmission regions, each transmission region comprising a transmissive electrode **116**, **118**, and **120** respectively, and the sub-pixel region **114** is as a reflective region comprising a reflective electrode **122**. Thin film transistors (TFTs) **108a**, **110a**, **112a**, **114a** are used as switch devices for the sub-pixel regions **108**, **110**, **112**, **114**, respectively. The thin film transistors **108a**, **110a**, **112a**, **114a** are disposed under a part of the reflective electrode **122** in the sub-pixel region **114**, the structures of the thin film transistors **108a**, **110a**, **112a**, **114a** comprise bottom-gate type (such as back-channel etched, etching stopper, or others) or top-gate type, and the implant types of the thin film transistors **108a**, **110a**, **112a**, **114a** comprise N-type, P-type, or combinations thereof. The fabrication process of the thin film transistors **108a**, **110a**, **112a**, **114a** comprises amorphous silicon processes, poly silicon processes, and single silicon processes, a microcrystalline silicon processes, or combinations thereof.

[0023] Taking the sub-pixel region **108** as an example, the transmissive electrode **116** in the sub-pixel region **108** crosses the data line **104** to the sub-pixel region **114**, and the transmissive electrode **116** is coupled to the thin film transistor **108a** by a contact hole **108b**. The transmissive electrodes **118**, **120** in the sub-pixel regions **110**, **112** also cross the scan line **102** and the data line **104** to couple the thin film transistors **110a**, **112a** by contact holes **110b**, **112b** which are in the sub-pixel region **114**. Preferably, the pixel region **106** comprises a common electrode **124** to form a capacitor, but not limited it, could be selectively to form a capacitor by used another method (such as capacitor on gate, capacitor on common, or combinations thereof). The common electrode **124** is substantially parallel to the scan line **102** and is disposed between the scan lines **102**. The common electrode **124** passes through the sub-pixel region **108** and the sub-pixel region **114** and is under the reflective electrode **122** of the sub-pixel region **114**. In this embodiment, the switch device, such as a thin film transistor, is disposed in the reflective region of the sub-pixel region **114** to increase the open ratio of the transmission of the sub-pixel regions **108**, **110**, **112**. In addition, the switch device, the capacitor, and the common electrode **124** of the colorless sub-pixel region **114** are under the reflective electrode **122** so the efficiency of the reflective region is kept. In this embodiment, each sub-pixel region has at least one alignment device (not shown), such as a protrusion **126** (which can be seen as a first alignment device) and/or a slit **130** (which can be seen as a second alignment device) to form a multi-domain view angle (MVA) LCD or an in-plane switch (IPS) LCD.

[0024] Referring to FIG. 2 to FIG. 6 are schematic diagrams of structures of varied types of the photo-spacers and the alignment device (such as at least one of slits and protrusions) in FIG. 1. FIG. 2 to FIG. 6 show various types in which the protrusions **126** of FIG. 1 are replaced by either the slits **130** or the photo-spacers **132**. Referring to FIG. 2, all of the protrusions **126** are replaced by the slits **130**. The slit **130** can be X-shaped, strip shaped, W-shaped, fish bone shaped, comb shaped, L-shaped, boomerang shaped, V-shaped, stellar shaped, or another shape, or combinations thereof. In FIG. 3, the protrusion **126** in the colorless sub-pixel region **114** is replaced by the photo-spacer **132**.

The photo-spacers **132** can maintain the height of the liquid crystal layer and can provide the function of the protrusions **126** so that the open ratio is increased. In FIG. 4, the color sub-pixel regions **108**, **112** comprise the protrusions **126**, the color sub-pixel region **110** comprises the slits **130**, and the colorless sub-pixel region **114** comprises the photo-spacer **132**. In FIG. 5, the color sub-pixel region **110** comprises both the slits **130** and the protrusion **126**. In the present invention, not only can one sub-pixel region have both the protrusion and the slits, but also more than one or the entire sub-pixel regions can also have both the protrusion and the slits.

[0025] In FIG. 6, the color sub-pixel regions **110**, **112** and the colorless sub-pixel region **114** have the protrusions **126**, and the color sub-pixel region **108** has the slits **130**. In addition, preferably, another photo-spacer **132** is disposed between the colorless sub-pixel region **114** and another sub-pixel region (not shown) is adjacent to the colorless sub-pixel region **114**, and the color of the another sub-pixel region (not shown) which is adjacent to the colorless sub-pixel region **114** comprises colorless, color that is substantially equal to one of the color sub-pixel regions **108**, **110**, **112**, or color that is substantially different from the color sub-pixel regions **108**, **110**, **112**, which means there are several possible variations, such as: all the color sub-pixel regions **108**, **110**, **112** and the colorless sub-pixel region **114** comprising the protrusions **126** or the slits **130**, or some color sub-pixel regions and the colorless sub-pixel region having protrusions **126** and some having the slits **130**. The photo-spacer **132** can also be disposed in the colorless sub-pixel region **114** or is disposed between the colorless sub-pixel region **114** and another sub-pixel region (not shown), which is adjacent to the colorless sub-pixel region **114**.

[0026] Referring to FIG. 7 is a schematic diagram of another embodiment of structure of transfective LCD in the present invention. The structure in FIG. 7 does not have protrusions, which is different from FIG. 1. The transfective LCD **900** comprises a plurality of scan lines **902** disposed along a first direction on a substrate, and a plurality of data lines **904** disposed along a second direction on the substrate. A plurality of pixel regions **906** are defined by the data lines **904** and the scan lines **902**, and each pixel region comprising a plurality of sub-pixel regions **908**, **910**, **912**, **914**. Each of The sub-pixel regions **908**, **910**, **912** is as a color sub-pixel region comprise red, green, and blue, other colors (such as yellow, brown, purple, and so on). The sub-pixel region **914** comprises the colorless pixel region, color that is substantially equal to any one of the colors in the sub-pixel regions **908**, **910**, **912**, or color that is substantially different from any one of the colors in the sub-pixel regions **908**, **910**, **912**. For example, other than using red, green, blue, yellow, brown, and purple can also be used. In the embodiment of the present invention, for example, the sub-pixel regions **908**, **910**, **912** are red, green, and blue, respectively, and the sub-pixel region **914** is colorless. In addition, each the sub-pixel regions **908**, **910**, **912** are as a transmission regions, each transmission region comprising transmissive electrode **916**, **918**, and **920**, and the sub-pixel region **914** is as a reflective region comprising a reflective electrode **922**. The thin film transistors **908a**, **910a**, **912a**, **914a** are used as switch devices for the sub-pixel regions **908**, **910**, **912**, **914**, respectively. The thin film transistors **908a**, **910a**, **912a**, **914a** are disposed under the reflective electrode **922** in the

sub-pixel region **914**, the structures of the thin film transistors **908a**, **910a**, **912a**, **914a** can be bottom-gate type (such as back-channel etched, etching stopper, or others) or top-gate type, and the implant types of the thin film transistors **908a**, **910a**, **912a**, **914a** can be N-type, P-type, or combinations thereof. The fabrication process of the thin film transistors **908a**, **910a**, **912a**, **914a** can be an amorphous silicon process, a poly silicon process, a single silicon process, microcrystalline silicon processes, or combinations thereof.

[0027] Taking the sub-pixel region **908** as an example, the transmissive electrode **916** in the sub-pixel region **908** crosses the data lines **904** to the sub-pixel region **914**, and the transmissive electrode **916** is coupled to the thin film transistor **908a** by a contact hole **908b**. The transmissive electrodes **918**, **920** in the sub-pixel regions **910**, **912** also cross the scan lines **902** and the data lines **904** to couple the thin film transistors **910a**, **912a** by the contact holes **910b**, **912b** which are in the sub-pixel region **914**. Preferably, the pixel region **906** comprises a common electrode **924** to form a capacitor, but not-limited it, could be selectively to form a capacitor by used another method (such as capacitor on gate, capacitor on common, or combinations thereof). The common electrode **924** is substantially parallel to the scan lines **902** and is disposed between the scan lines **902**. The common electrode **924** passes through the sub-pixel region **908** and the sub-pixel region **914**, and is under the reflective electrode **922** of the sub-pixel region **914**. In this embodiment, the switch device, such as a thin film transistor, is disposed in the colorless sub-pixel region **914** of the reflective region to increase the open ratio of the sub-pixel regions **908**, **910**, **912**. In addition, the switch device, the capacitor, and the common electrode **924** in the colorless sub-pixel region **914** are under a part of the reflective electrode **922**, so the efficiency of the reflective region is saved.

[0028] Referring to FIG. 8 is a schematic diagram of another embodiment of the structure of transfective LCD in the present invention. The structure of the thin film transistor in this embodiment is a top-gate structure formed by a low temperature poly silicon (LTPS) process. The transfective LCD **1000** comprises: a plurality of scan lines **1002** disposed along a first direction on a substrate, and a plurality of data lines **1004** disposed along a second direction on the substrate. A plurality of pixel regions **1006** are defined by the data lines **1004** and the scan lines **1002**, and each pixel region comprising a plurality of sub-pixel regions **1008**, **1010**, **1012**, **1014**. Each of the sub-pixel regions **1008**, **1010**, **1012** is as a color sub-pixel region comprises red, green, and blue, or other colors (such as yellow, brown, purple, and so on). The sub-pixel region **1014** comprises the colorless pixel region, color which is substantially equal to any one of the colors in the sub-pixel regions **1008**, **1010**, **1012** or color which is substantially different from any one of the colors in the sub-pixel regions **1008**, **1010**, **1012**. For example, other than red, green and blue, which can be used, yellow, brown, and purple can also be used. In the embodiment of the present invention, for example, the sub-pixel regions **1008**, **1010**, and **1012** are red, green, and blue, respectively, and the sub-pixel region **1014** is colorless. In addition, the sub-pixel regions **1008**, **1010**, and **1012** are as transmission regions, each transmission region comprising a transmissive electrode **1016**, **1018**, and **1020**, and the sub-pixel region **1014** is as a reflective region comprising a reflective electrode **1022**. The thin film transistors **1008a**, **1010a**, **1012a**,

1014a are used as switch devices of the sub-pixel regions **1008**, **1010**, **1012**, **1014**, respectively, and the thin film transistors **1008a**, **1010a**, **1012a**, **1014a** are disposed in the sub-pixel regions **1008**, **1014**. In other words, a part of the thin film transistors **1008a**, **1010a**, **1012a**, **1014a** can be in the colorless sub-pixel region **1014**, and another part can be in any one of the color sub-pixel regions **1008**, **1010**, and **1012** which is adjacent to the colorless sub-pixel region **1014**. Preferably, the pixel region **1006** comprises a common electrode **1024** to form a capacitor, but not-limited it, could be selectively to form a capacitor by used another method (such as capacitor on gate, capacitor on common, or combinations thereof). The common electrode **1024** is substantially parallel to the scan line **1002** and is disposed between the scan lines **1002**. The common electrode **1024** passes through the sub-pixel region **1012** and the sub-pixel region **1014**.

[0029] Referring to FIG. 9 to FIG. 10 are schematic diagrams of another embodiment of structure of transfective LCD in the present invention. The transfective LCD **200** comprises a plurality of scan lines **202** disposed along a first direction on a substrate, and a plurality of data lines **204** disposed along a second direction on the substrate. A plurality of pixel regions **206** are defined by the data lines **204** and the scan lines **202**, and each pixel region comprising a plurality of sub-pixel regions **208**, **210**, **212**, **214**. Each of the sub-pixel regions **208**, **210**, **212** is as a color sub-pixel region comprises red, green, and blue, or other colors (such as yellow, brown, purple, and so on). The sub-pixel region **214** comprises the colorless pixel region, color which is substantially equal to any one of the colors in the sub-pixel regions **208**, **210**, **212**, or color which is substantially different from one of the colors in the sub-pixel regions **208**, **210**, **212**. For example, other than red, green, which can be used, blue, yellow, brown, and purple can also be used. In the embodiment of the present invention, for example, the sub-pixel regions **208**, **210**, **212** are red, green, and blue, respectively, and the sub-pixel region **214** is colorless. In addition, the sub-pixel regions **208**, **210**, **212** are as transmission regions, each transmission region comprising a transmissive electrode **216**, **218**, and **220** and the sub-pixel region **214** is as a reflective region comprising a reflective electrode **222**. The thin film transistors **208a**, **210a**, **212a** are used as switch devices of the sub-pixel regions **208**, **210**, **212**, respectively. The thin film transistors **208a**, **210a**, **212a** are disposed under a part of the reflective electrode **222** and a thin film transistor (not shown) is adapted to control the sub-pixel region **214** is disposed under the reflective electrode **222**. The structures of the thin film transistors **208a**, **210a**, **212a** can be bottom-gate type (such as back-channel etched, etching stopper, or others) or top-gate type, and the implant type of the thin film transistors **208a**, **210a**, **212a** comprise N-type, P-type, or combinations thereof. The fabrication process of the thin film transistor **208a**, **210a**, **212a** can be an amorphous silicon process, a poly silicon process, a single silicon process, a microcrystalline silicon processes, or combinations thereof. Preferably, the pixel region **206** comprise the common electrode **224** is substantially parallel to the scan lines **202**, and the common electrode **224** is disposed between the sub-pixel regions **208**, **210**, **212** and the colorless sub-pixel region **214** and is under the reflective electrode **222**. The colorless sub-pixel region **214** corresponds to the color sub-pixel regions **208**, **210**, **212**, which is different from FIG. 1. In other words, each sub-pixel

region has at least one transmission region within a transmissive electrode and at least one reflective region within a reflective electrode, each reflective electrode in the different sub-pixels of each pixel region is connected each other, and the reflective electrode is controlled by one TFT (not shown) which is disposed under any one of the reflective region of one pixel.

[0030] In the transfective LCD 200 in the present invention, the color sub-pixel regions 216, 218, 220 can be controlled to turned on or off by the thin film transistors 208a, 210a, 212a which receive signals from the data lines 204 and the scan lines 202. For one preferred embodiment in the present invention, the colorless sub-pixel region 214 can be electrically connected to any one of the color sub-pixel regions 216, 218, 220 so that the sub-pixel region 214 can be turn on or off with any one of the color sub-pixel regions 216, 218, 220. For example, if the colorless sub-pixel region 214 is coupled to the blue sub-pixel region 220, when the blue sub-pixel region 220 is turn on, the colorless sub-pixel region 214 is turned on in the same time. In other words, the blue sub-pixel region 220 and the colorless sub-pixel region 214 receive the signal from identical data line and scan line. For another preferred embodiment in the present invention, the sub-pixel regions 216, 218, 220, 214 can be turned on or off respectively by disposing another data line is adapted to transmit signal to the colorless sub-pixel region 214. As shown in FIG. 9, the colorless sub-pixel region 214 is under the color sub-pixel regions 208, 210, 212. FIG. 10 is a variation of FIG. 9. The color sub-pixel regions 208, 212 comprise protrusions 226, and the color sub-pixel region 210 comprises both the protrusion 226 and slits 232. In this embodiment, one or more sub-pixel regions can have both the protrusions and the slits.

[0031] Note that the pixel region formed by four sub-pixel regions in the present invention can also be formed by six sub-pixel regions, eight sub-pixel regions, but not limited its number, and the areas of each the sub-pixel region can be substantially different from each other, substantially equal to each other, or partially different from thereof. Moreover, the colorless sub-pixel region covered by the reflective electrode either entire covered by reflective electrode or covered partly by the reflective electrode and partly by the transmissive electrode.

[0032] FIG. 11 to FIG. 13 show a variation of the structure related to FIG. 10. Referring to FIG. 11 show a transmission region 230 is disposed in the reflective electrode 222. The transmission region 230 is in a place where saturation is substantially lower to the human eye, such as a blue color red color, or others. In FIG. 12, a plurality of transmission regions 230 are disposed in the reflective electrode 222 and are under the reflective electrodes 216, 218, 220, respectively. Generally, the area of each the transmission region 230 can be substantially equal to each other, but at least one of the area of the transmission region 230 is substantially different from the other transmission regions. In FIG. 13, the transmission region 230 is at the substantially center of the reflective electrode 222, and has an area is substantially greater than the area of transmission regions 230 in FIG. 11 and FIG. 12. The transmission region 230 in FIG. 13 crosses any two of the adjacent the data line. The shape of the transmission region 230 in the above-mentioned figures can be a substantially rectangle, a substantially circle, a substantially triangle, a substantially ellipse, a substantially semi-circle, a substantially rhombus, a substantially trapezium, a

substantially stellar shape, a substantially boomerang shape, or another substantially polygonal shape.

[0033] Referring to FIG. 14 to FIG. 17 are schematic diagrams of structure of the photo-spacer in the present invention. As shown in FIG. 14, the transfective LCD 300 comprises a plurality of sub-pixel regions 302, 304, 306, 308, in which the sub-pixel regions 302, 304, 306 are the transmission regions as the color sub-pixel regions, and the sub-pixel region 308 is the reflective region as the colorless sub-pixel region. In the present invention, the photo-spacer 310 is disposed in the sub-pixel region 308 shown in FIG. 5. The photo-spacer 310 can be disposed in the substantially center of the sub-pixel region 308, disposed between the sub-pixel region 306 and the sub-pixel region 308, as shown FIG. 15, or in the sub-pixel region 308 and adjacent to the sub-pixel region 306, as shown in FIG. 14. In additional, the photo-spacer 308 can also be disposed between the sub-pixel region 308 and any one of the sub-pixel regions adjacent to the sub-pixel region 308. The shape of the photo-spacer 308 can be substantially columnar, a substantially cone shaped, or another substantially shape, but not limited in the shape of the FIG. 14 and FIG. 15. Referring to FIG. 16 and FIG. 17 shows the top view of the embodiment of FIG. 6 with the photo-spacer 310. In FIG. 16, the photo-spacer 310 is disposed in the substantially center of the colorless sub-pixel region 914. In FIG. 17, a plurality of photo-spacers 310 are disposed between the colorless sub-pixel region 914 and any one of the sub-pixel regions adjacent to the colorless sub-pixel region 914.

[0034] It is noteworthy that the photo-spacer 310 in the present invention is disposed in the colorless sub-pixel region 308 or between the color sub-pixel region 306 and the colorless sub-pixel region 308. Thus, the open ratio and the performance of the color sub-pixel region will be maintained. In the traditional technology, the photo-spacer is disposed in any color sub-pixel region. If the photo-spacer is in the red sub-pixel region, in order to display white light with, a covered areas by other's cover must in the green and blue sub-pixel regions equal to the area of the photo-spacer covers in the red sub-pixel region, so as to obtain the transmittance $R:G:B=1:1:1$. But, in this way, the open ratio of the panel is decreased. In contrast, the photo-spacer in the present invention is disposed in the colorless sub-pixel region, or between the color sub-pixel region and the colorless sub-pixel region, such that the open ratio and the performance of the color sub-pixel regions are maintained.

[0035] Moreover, based on different places where the color filter is disposed, more variations are possible for the present invention. FIG. 18 to FIG. 19 are schematic diagrams of structure in FIG. 10 with a color filter applied. As shown in FIG. 18, taking one sub-pixel region of the pixel region 206 as an example, the transfective LCD 500 comprises a first substrate 502, a color filter 504, a common electrode 506, a crystal liquid (LC) layer 508 with a plurality of LC molecules, a pixel electrode 510, a dielectric layer 512, and a second substrate 516. One of the sub-pixel regions of the pixel region 206 is separated into a reflective region A and a transmission region B. The reflective region A comprises a colorless sub-pixel region, and the transmission region B comprises a color sub-pixel region. In addition, the reflective region A comprises a reflective electrode 520 comprising a metal material of a reflective layer 518 and a transparent material of the pixel electrode 510. A thin film transistor is under the reflective electrode 520. Furthermore,

the present invention can be applied to a substrate having color filters integrated with a thin film transistor array, e.g. a color filter-on-array (COA) structure or an array-on-color filter (AOC) structure. FIG. 19 is a schematic diagram of the structure in FIG. 10 with the COA structure in the present invention. As shown in FIG. 19, taking one sub-pixel region of the pixel region 206 as an example, the transfective LCD 600 comprises a first substrate 602, a color filter 604, a common electrode 606, a crystal liquid layer 608 with a plurality of molecules, a pixel electrode 610, a dielectric layer 612, and a second substrate 614. One of the sub-pixel regions of the pixel region 206 is separated into a reflective region C and a transmission region D. The reflective region C comprises a colorless sub-pixel region, and the transmission region D comprises a color sub-pixel region. In addition, the reflective region C comprises a metal material of the reflective layer 616 as a part of the reflective electrode. A thin film transistor 618 is under the reflective layer 616. Furthermore, the first substrate 502, 602 and the second substrate 516, 614 comprise transparent materials, semi-transparent materials, and opaque materials.

[0036] Referring to FIG. 20 is a diagram of voltage vs. transmittance also known as voltage vs. transmittance of the colorless and color sub-pixel regions in the present invention. The colorless and color sub-pixel regions in the present invention can be driven by substantially different voltages, and the voltage-transmittance (VT) curve of the colorless sub-pixel region is substantially different from the VT curve of the color sub-pixel region. As shown in FIG. 20, the color sub-pixel 702 reaches an optimum transmittance at about 4.2V, whereas the colorless sub-pixel 704 reaches its optimum transmittance at about 2.9V. Referring to FIG. 21 is a diagram of a gray-scale of the colorless and color sub-pixel regions vs. driving voltage of the colorless and color sub-pixel regions in the present invention. Because the VT curve is substantially different for the colorless and color sub-pixel regions, when the gray-scale is high, the difference in driving voltage between the colorless sub-pixel region 802 and the color sub-pixel region 804 will be large. In the present invention, the colorless sub-pixel region and the color sub-pixel region can be driven by substantially different voltages, so the colorless sub-pixel region and the color sub-pixel region can be controlled independently to improve display quality.

[0037] In the transfective LCD, light from the transmission region only passes through the liquid crystal layer once, but the light from the reflective region passes through the liquid crystal layer twice. In order to reach the optimum transmittance in both the transmission region and the reflective region, substantially different driving voltages are applied, respectively. In the traditional technology, a dual gap is fabricated between the liquid crystal layer in the transmission region and the reflective region, and the same voltage is applied to drive the transmission region and the reflective region to achieve better performance, but the way is complicated processes, higher cost, lower yield, and so on. In contrast, in the present invention, preferred, the liquid crystal layer has the same height in the transmission region and the reflective region (such as single gap), and a substantially different driving voltage is applied to make the transmission region and the reflection region can to improve the traditional technology problem that the gamma curve in the transmission region and the reflection region is not match and to achieve higher performance, to reach the

optimum transmittance in both the transmission region and the reflective region, simple processes, and so on, but not limited the single gap, maybe can to apply in the dual gap structure to achieve display quality is substantially equal to the display quality of the single gap structure.

[0038] The transfective display of the present invention either can be applied to liquid crystal displays (LCDs) or can be applied to electro-luminescence displays (such as organic light emitting displays (OLED), inorganic light emitting displays, polymer light emitting diodes (PLED), inorganic light emitting displays). The different of the LCDs and electro-luminescence displays is whether applied process comprising the liquid crystal layer with a plurality of liquid crystal molecules or a light source (not shown). When applied to electro-luminescence displays (ELDs), most of the design of the present invention does not change, but an illuminant layer (not shown) needs to be placed on the pixel regions.

[0039] Moreover, the above-mentioned embodiment of the present invention of the photo-spacer and alignment devices (such as slits, protrusions, or combinations), can be disposed on one of the first substrate and the second substrate. In other words, if the alignment device comprises protrusions, it can be disposed on either the first substrate or the second substrate, and the photo-spacer can be disposed on either the first substrate or the second substrate. If the alignment device comprises protrusions and slits, the protrusions are disposed on the first substrate and the slits are disposed on the second substrate, and the photo-spacer can be disposed on either the first substrate or the second substrate. If the alignment device comprises slits, the slits can be disposed on either the first substrate or the second substrate, and the photo-spacer can be disposed on either the first substrate or the second substrate.

[0040] The thin film transistors controlling the color and colorless sub-pixel regions are disposed in the reflective region of the colorless sub-pixel region so the open ratio of transmission regions of the color sub-pixel regions can be increased. Further, preferred, the photo-spacer is disposed in the colorless sub-pixel region, so the open ratio of the sub-pixel regions can be increased. In addition, preferred, the transmission region and the reflective region are driven by substantially different voltage, so both of them can reach the best transmittance. So, the above-mentioned embodiments of the present invention can improve the open ratio of the pixel region in the display and achieve the preferred display quality.

[0041] Those skilled in the art will readily observe that numerous modifications and alterations of the device and method may be made while retaining the teachings of the invention.

What is claimed is:

1. A transfective liquid crystal display (LCD), comprising:

- a plurality of scan lines disposed along a first direction on a substrate;
- a plurality of data lines, disposed along a second direction on the substrate, so that a plurality of pixel regions comprising a plurality of sub-pixel regions defined by the data lines and the scan lines, and at least three of the sub-pixel regions are as a color sub-pixel regions and at least one of the sub-pixel regions is as a fourth sub-

- pixel region, wherein the color sub-pixel regions are a transmission region within a transmissive electrode; and
- a plurality of switch devices adapted to control the color sub-pixel regions and the fourth sub-pixel region.
2. The LCD of claim 1, wherein the switch devices are disposed in the fourth sub-pixel region.
3. The LCD of claim 1, wherein a part of the switch devices are disposed in the fourth sub-pixel region and in one of the color sub-pixel regions which are adjacent to the fourth sub-pixel region.
4. The LCD of claim 1, wherein the fourth sub-pixel region comprises a reflective region with a reflective electrode.
5. The LCD of claim 1, wherein the fourth sub-pixel region comprises a transmissive region with a transmission electrode and a reflective region with a reflective electrode.
6. The LCD of claim 1, further comprising a plurality of common electrodes, disposed along the second direction on the substrate, and substantially parallel to the scan lines.
7. The LCD of claim 6, wherein at least one of the common electrodes, is disposed between the scan lines, and passes one of the color sub-pixel regions and the fourth sub-pixel region.
8. The LCD of claim 1, further comprising at least one photo-spacer disposed in the fourth sub-pixel region.
9. The LCD of claim 8, wherein the photo-spacer is disposed in the substantially center of the fourth sub-pixel region.
10. The LCD of claim 1, further comprising at least one photo-spacer disposed between the fourth sub-pixel region and one of the color sub-pixel regions.
11. The LCD of claim 1, further comprising at least one first alignment device disposed in one of the color sub-pixel regions.
12. The LCD of claim 11, further comprising at least one second alignment device disposed in one of the color sub-pixel regions.
13. The LCD of claim 1, further comprising at least one second alignment device disposed in one of the color sub-pixel regions.
14. The LCD of claim 1, further comprising a color filter corresponding to the substrate comprising a plurality of regions with a plurality of sub-regions, wherein at least three of the sub-regions are as a color sub-regions corresponding to the color sub-pixel regions on the substrate, and at least one of the sub-regions is as a fourth sub-region corresponding to the fourth sub-pixel region on the substrate.
15. The LCD of claim 1, further comprising a color filter disposed on the substrate comprising a plurality of regions with a plurality of sub-regions, wherein at least three of the sub-regions are as a color sub-regions corresponding to the color sub-pixel regions on the substrate, and at least one of the sub-regions is as a fourth sub-region corresponding to the fourth sub-pixel region on the substrate.
16. The LCD of claim 1, wherein voltages are applied to the sub-pixel regions, and the voltage of the fourth sub-pixel region is substantially different from the voltage of the color sub-pixel regions.
17. The LCD of claim 1, wherein a voltage-transmission (VT) curve of the fourth sub-pixel region transferred by the data lines is substantially different from an VT curve of the color sub-pixel regions transferred by the data lines.

18. The LCD of claim 1, wherein the transmissive electrode of the color sub-pixel regions, crosses at least one of any one of the data lines or any one of the scan lines, and electrically coupled to the switch devices.

19. A transmissive liquid crystal display (LCD), comprising:

- a substrate;
 - a plurality of scanlines disposed along a first direction on the substrate;
 - a plurality of data lines, disposed along a second direction on the substrate, so that a plurality of pixel regions comprising a plurality of sub-pixel regions are defined by the data line and the scan lines, and at least three of the sub-pixel regions are as a color sub-pixel regions and at least one of the sub-pixel regions corresponding to the color sub-pixel regions is as a fourth sub-pixel region, wherein the color sub-pixel regions are a transmission region within a transmissive electrode; and
 - a plurality of switch devices adapted to control the color sub-pixel regions and the fourth sub-pixel region.
20. The LCD of claim 19, wherein the switch devices are disposed in the fourth sub-pixel region.
21. The LCD of claim 19, wherein a part of the switch devices are disposed in the fourth sub-pixel region and in any one the color sub-pixel regions which are adjacent to the fourth sub-pixel region.
22. The LCD of claim 19, wherein the fourth sub-pixel region comprises a reflective region with a reflective electrode.
23. The LCD of claim 19, wherein the fourth sub-pixel region comprises a transmissive region with a transmission electrode and a reflective region with a reflective electrode.
24. The LCD of claim 19, further comprising a plurality of common electrodes, disposed along the second direction on the substrate, and substantially parallel to the scan lines.
25. The LCD of claim 19, wherein at least one of the common electrode, is disposed between the scan lines, and passes the fourth sub-pixel region.
26. The LCD of claim 19, further comprising at least one photo-spacer disposed in the fourth sub-pixel region.
27. The LCD of claim 26, wherein the photo-spacer is disposed in the substantially center of the fourth sub-pixel region.
28. The LCD of claim 19, further comprising at least one photo-spacer disposed between one of the transmission region of the color sub-pixel regions and the fourth sub-pixel region corresponding to any one of the color sub-pixel regions.
29. The LCD of claim 19, further comprising at least one first alignment device disposed in one of the color sub-pixel regions.
30. The LCD of claim 29, further comprising at least one second alignment device disposed in one of the color sub-pixel regions.
31. The LCD of claim 19, further comprising at least one second alignment device disposed in one of the color sub-pixel regions.
32. The LCD of claim 19, further comprising a color filter corresponding to the substrate comprising a plurality of regions with a plurality of sub-regions, wherein at least three of the sub-regions are as a color sub-regions corresponding to the color sub-pixel regions on the substrate, and at least one of the sub-regions is as a fourth sub-region corresponding to the fourth sub-pixel region on the substrate.

33. The LCD of claim **19**, further comprising a color filter disposed on the substrate comprising a plurality of regions with a plurality of sub-regions, wherein at least three of the sub-regions are as a color sub-regions corresponding to the color sub-pixel regions on the substrate, and at least one of the sub-regions is as a fourth sub-region corresponding to the fourth sub-pixel region on the substrate.

34. The LCD of claim **19**, wherein voltages are applied to the sub-pixel regions, and the voltage of the fourth sub-pixel region is substantially different from the voltages of the transmission region of the color sub-pixel regions.

35. The LCD of claim **1**, wherein a voltage-transmission (VT) curve of the fourth sub-pixel region transferred by the data lines is substantially different from an VT curve of the transmission region of the color sub-pixel regions transferred by the data lines.

36. The LCD of claim **19**, wherein the transmissive electrode of the color sub-pixel regions, crosses at least one of any one of the data lines and any one of the scan lines, and electrically coupled to the switch devices.

* * * * *

专利名称(译)	透反液晶显示器		
公开(公告)号	US20080088754A1	公开(公告)日	2008-04-17
申请号	US11/776560	申请日	2007-07-12
[标]申请(专利权)人(译)	胡CHIH JEN 张之明		
申请(专利权)人(译)	胡CHIH-JEN 张之洞MING		
当前申请(专利权)人(译)	胡CHIH-JEN 张之洞MING		
[标]发明人	HU CHIH JEN CHANG CHIH MING		
发明人	HU, CHIH-JEN CHANG, CHIH-MING		
IPC分类号	G02F1/1335 G02F1/133 G02F1/1343		
CPC分类号	G02F1/133555 G02F1/133707 G02F2201/52 G02F2001/134345 G02F1/134363		
优先权	095138052 2006-10-16 TW		
其他公开文献	US7728944		
外部链接	Espacenet USPTO		

摘要(译)

透射反射型LCD包括设置在基板上的扫描线 and 数据线。扫描线和数据线形成多个像素区域。每个像素区域具有多个子像素区域。至少三个子像素区域作为彩色子像素区域，并且至少一个子像素区域是第四子像素区域。多个开关装置适于控制彩色子像素和第四子像素。

