



US007847891B2

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 7,847,891 B2**
(45) **Date of Patent:** **Dec. 7, 2010**

(54) **LIQUID CRYSTAL DISPLAY**

(58) **Field of Classification Search** None
See application file for complete search history.

(75) Inventors: **Sun-mi Kim**, Icheon (KR); **Ji-voung Jeong**, Cheonan-si (KR); **Yun-seok Lee**, Cheonan-si (KR); **Seok-voon Yang**, Cheonan-si (KR)

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,470,667 A * 9/1984 Okubo et al. 349/42
6,348,958 B1 2/2002 Matsuoka et al.
2003/0160916 A1 * 8/2003 Nakagawa et al. 349/106
2004/0126678 A1 7/2004 Baek et al.
2004/0130253 A1 * 7/2004 Ohsaki et al. 313/110
2004/0135957 A1 7/2004 Arai
2004/0233375 A1 11/2004 Chung et al.

(73) Assignee: **Samsung Electronics Co., Ltd.**, Suwon-Si (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 4 days.

FOREIGN PATENT DOCUMENTS

JP 11-2718 A * 1/1999
JP 11-64837 A * 3/1999
JP 2004-246189 A * 9/2004
KR 1020030057144 7/2003
KR 1020040003095 1/2004

* cited by examiner

Primary Examiner—Mike Stahl

(74) *Attorney, Agent, or Firm*—F. Chau & Associates, LLC

(21) Appl. No.: **11/989,898**

(22) PCT Filed: **Aug. 1, 2006**

(86) PCT No.: **PCT/KR2006/003020**

§ 371 (c)(1),
(2), (4) Date: **Feb. 1, 2008**

(87) PCT Pub. No.: **WO2007/015621**

PCT Pub. Date: **Feb. 8, 2007**

(65) **Prior Publication Data**

US 2009/0284695 A1 Nov. 19, 2009

(30) **Foreign Application Priority Data**

Aug. 1, 2005 (KR) 10-2005-0070394


(51) **Int. Cl.**
G02F 1/1333 (2006.01)

(52) **U.S. Cl.** 349/106


(57) **ABSTRACT**

A liquid crystal display is provided. The liquid crystal display includes a first substrate and a second substrate facing and spaced apart from each other in a predetermined distance, in which the second substrate has a first area in which color filters are formed over a plurality of pixel regions and a second area in which the color filters are formed at each of the plurality of pixel regions.


11 Claims, 11 Drawing Sheets

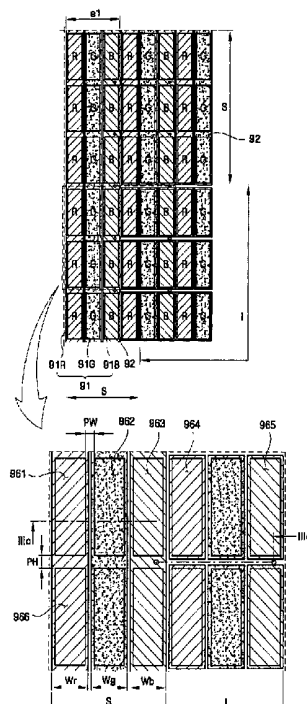


[Fig. 1]

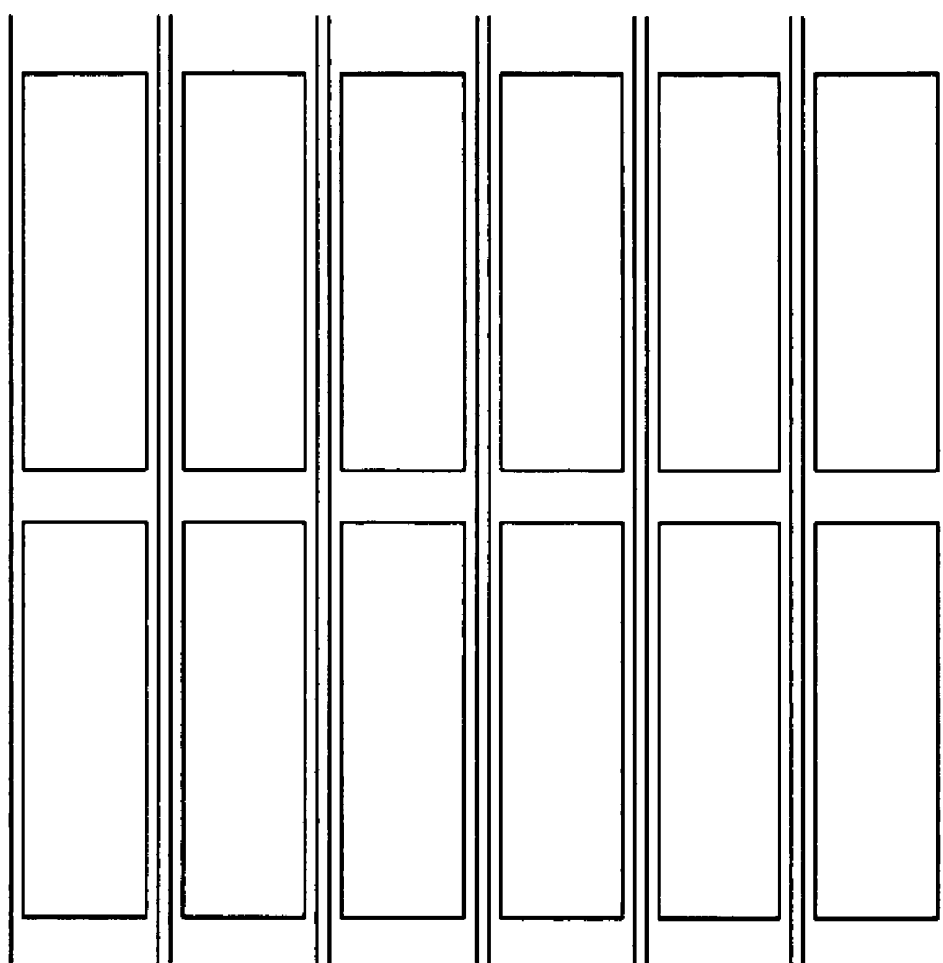


[Fig. 2]

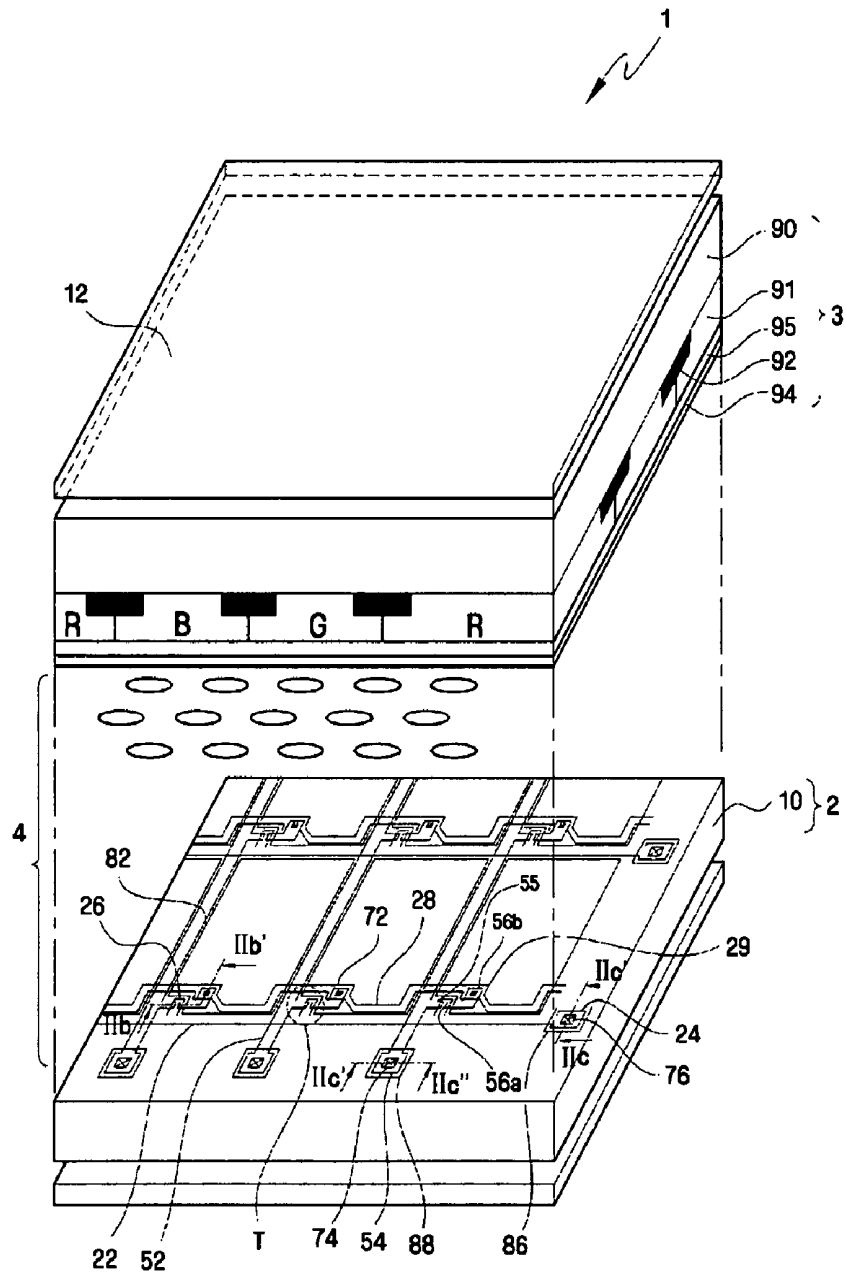


[Fig. 3]

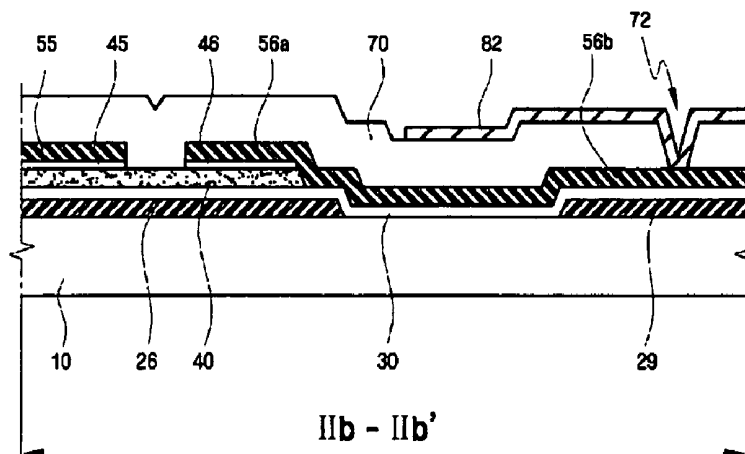



[Fig. 4]

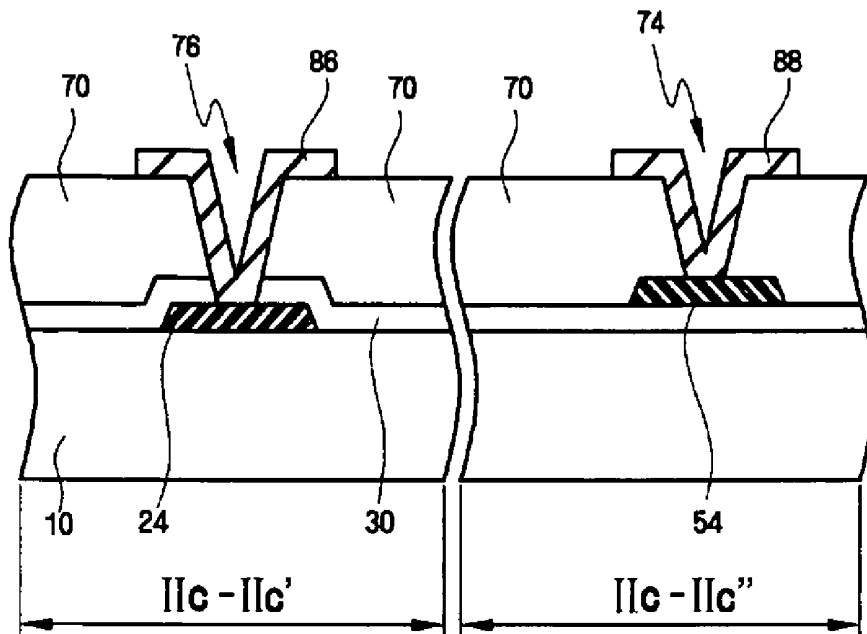


[Fig. 5]

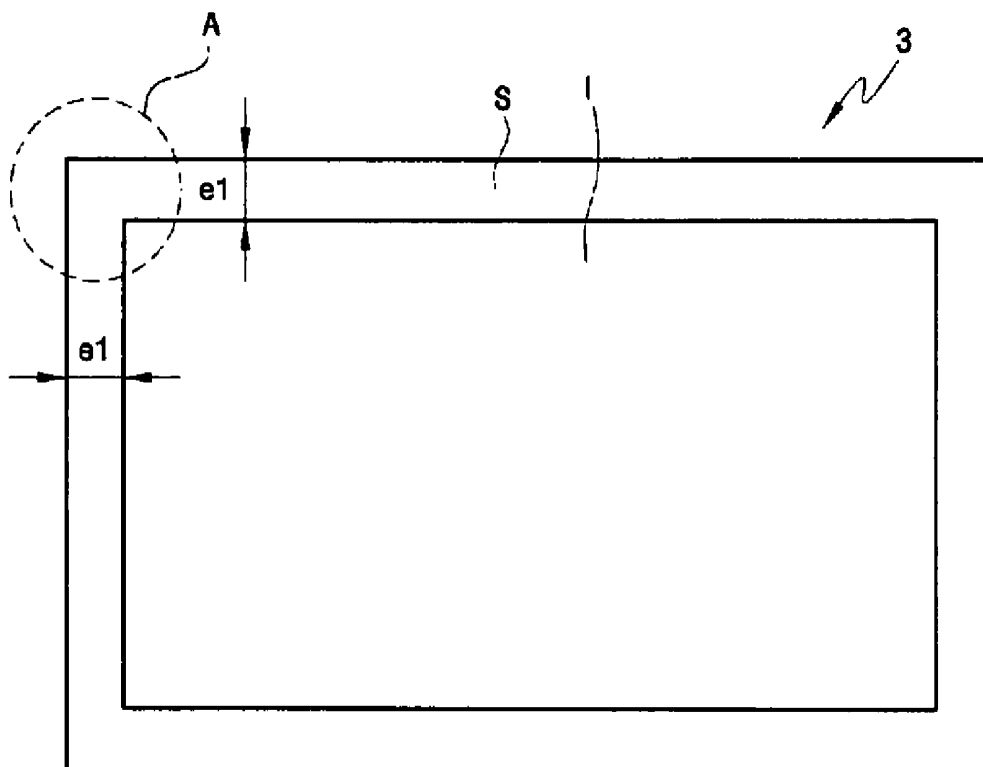


[Fig. 6]

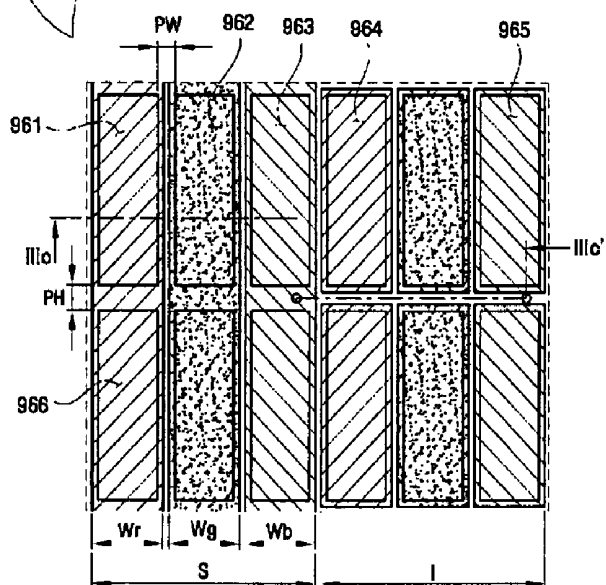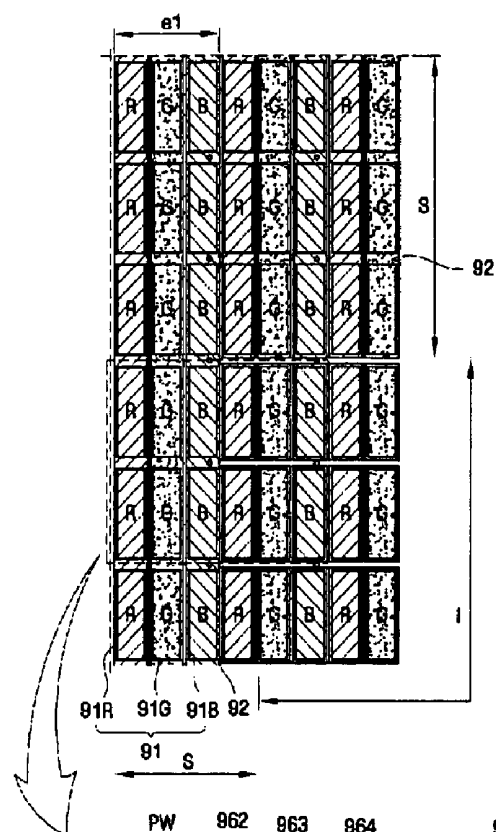


[Fig. 7]

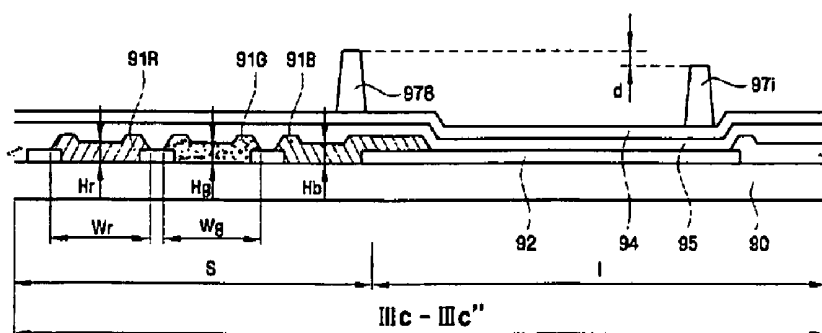


[Fig. 8]

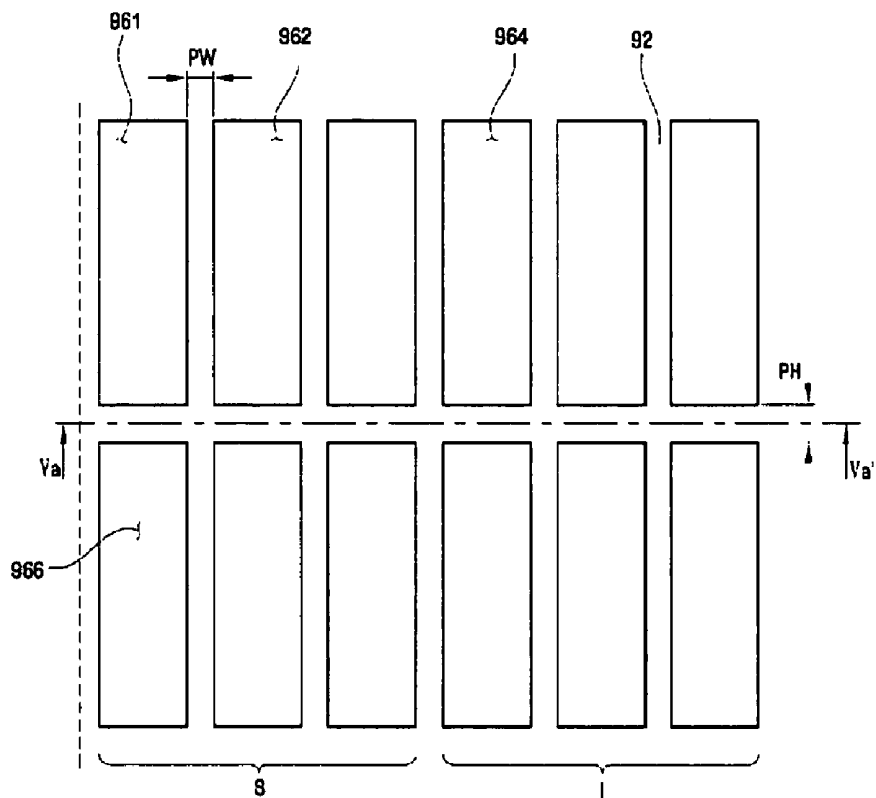


[Fig. 9]

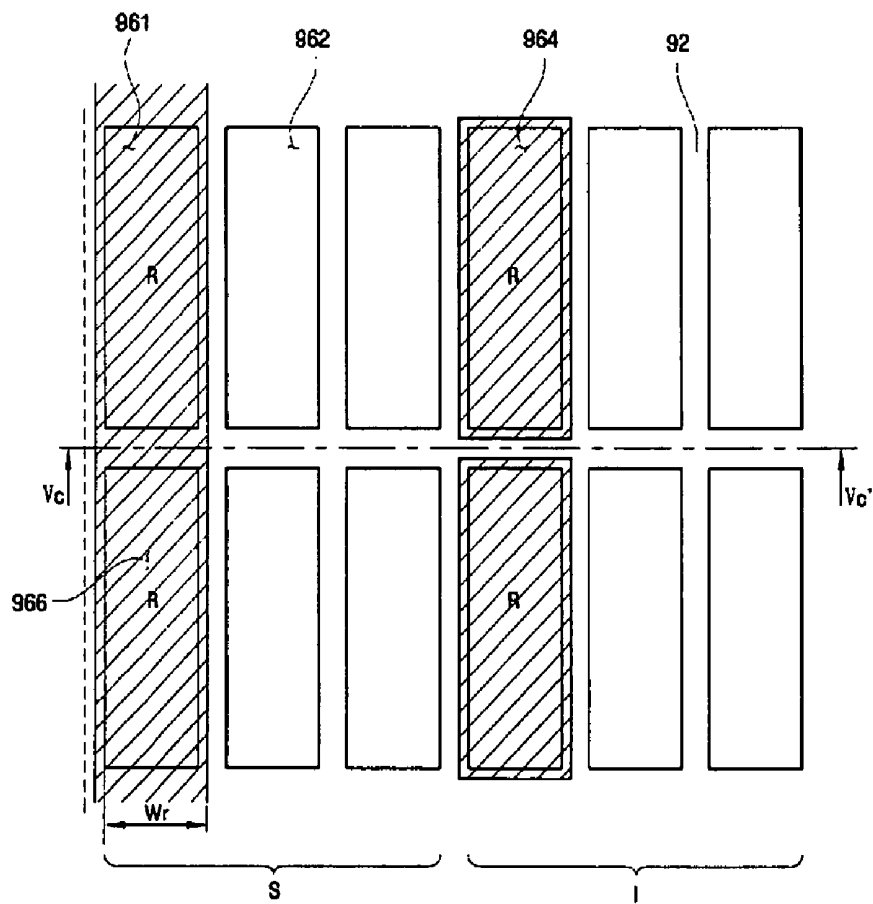


[Fig. 10]

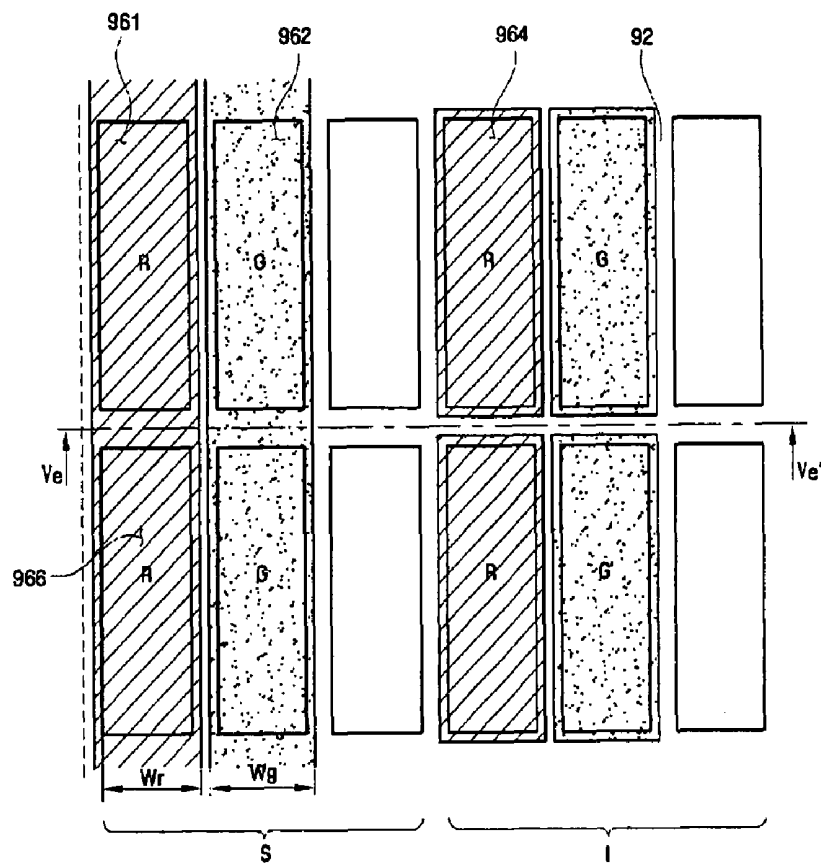


[Fig. 11]

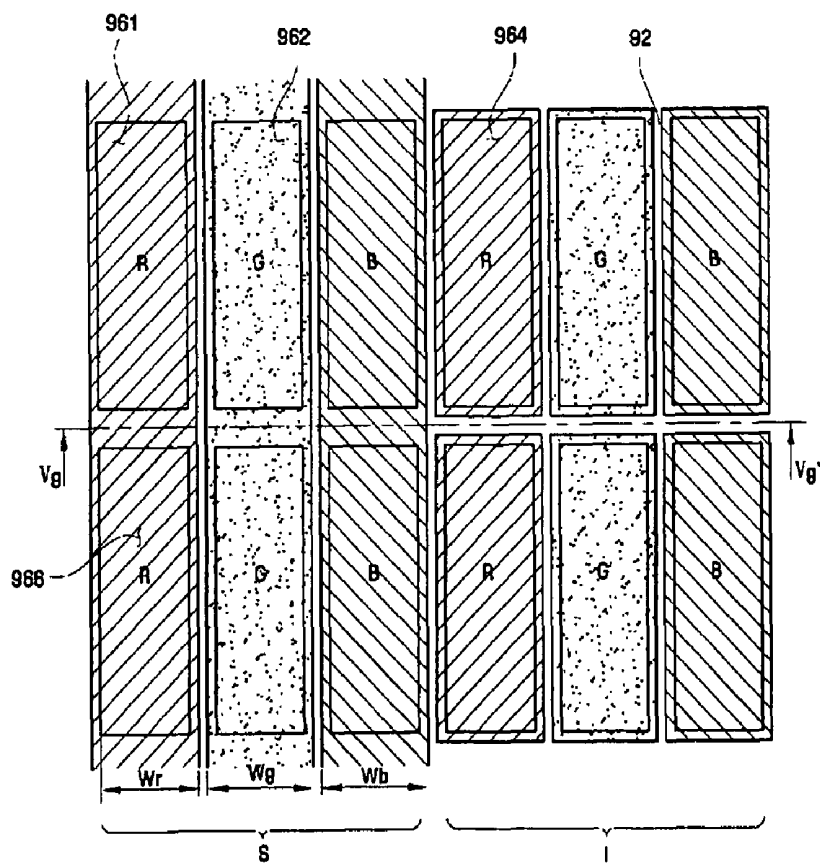


[Fig. 12]

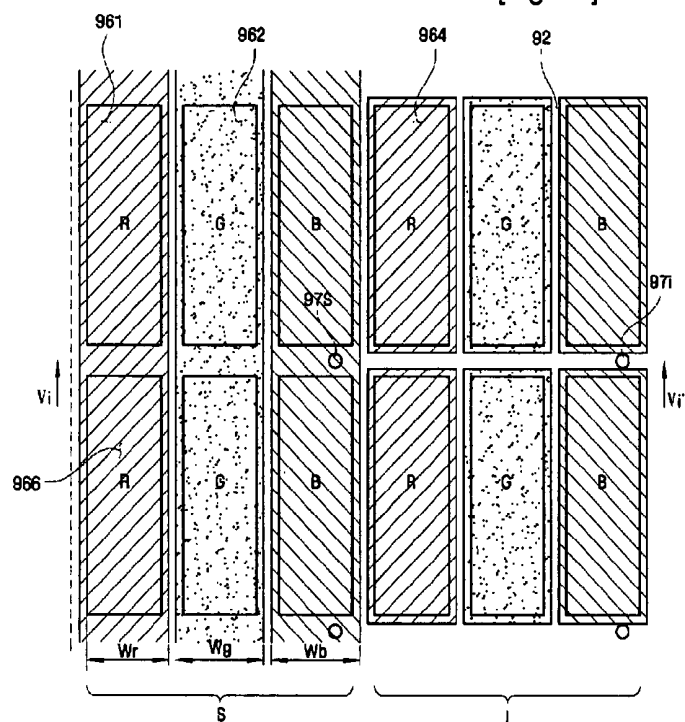


[Fig. 13]

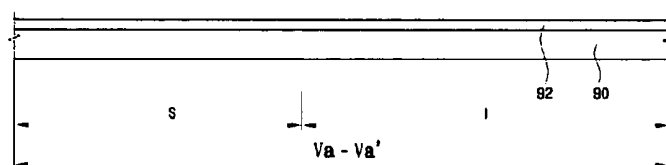


[Fig. 14]

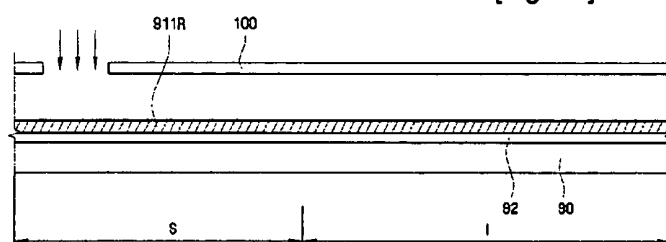


[Fig. 15]

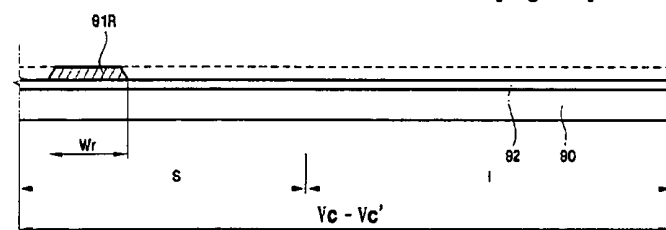


[Fig. 16]

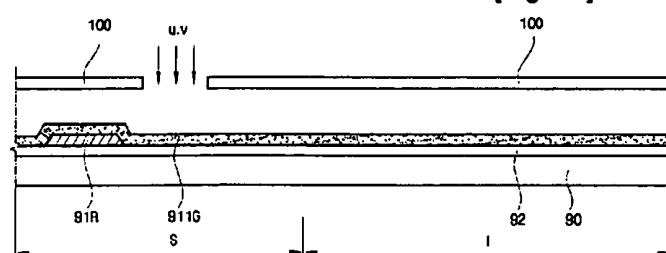


[Fig. 17]

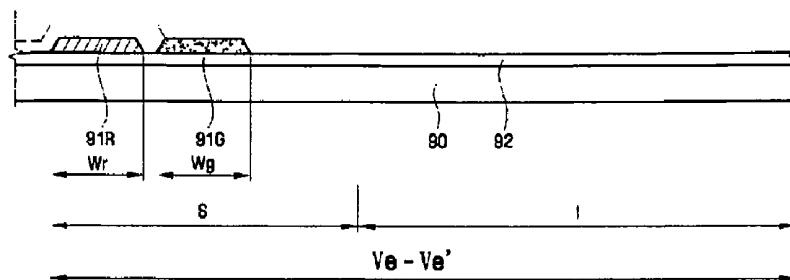


[Fig. 18]

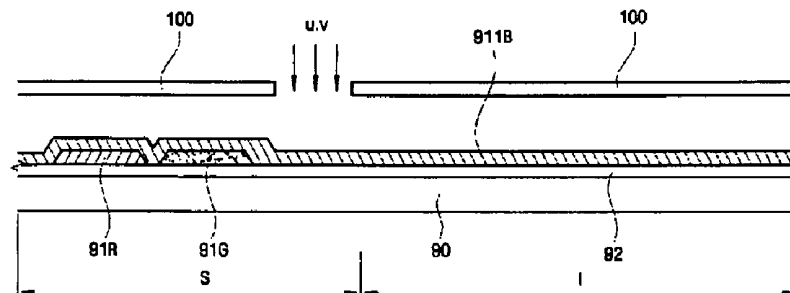


[Fig. 19]

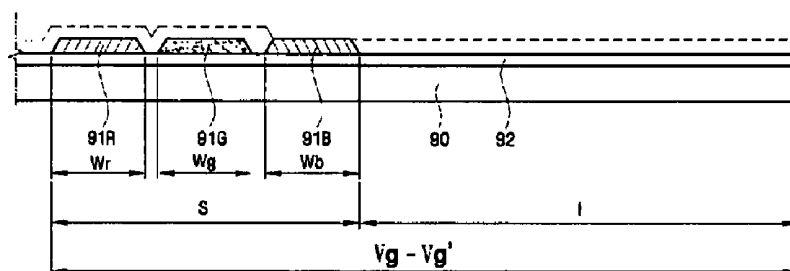


[Fig. 20]

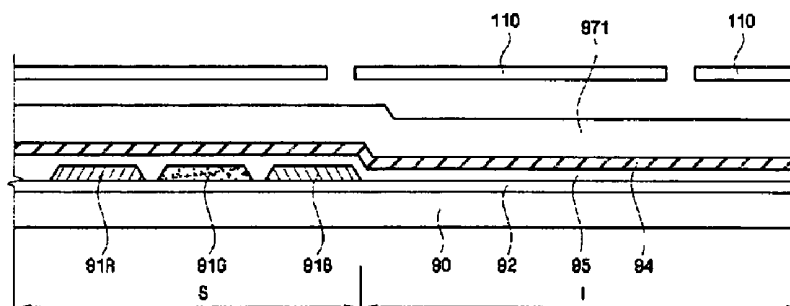


[Fig. 21]

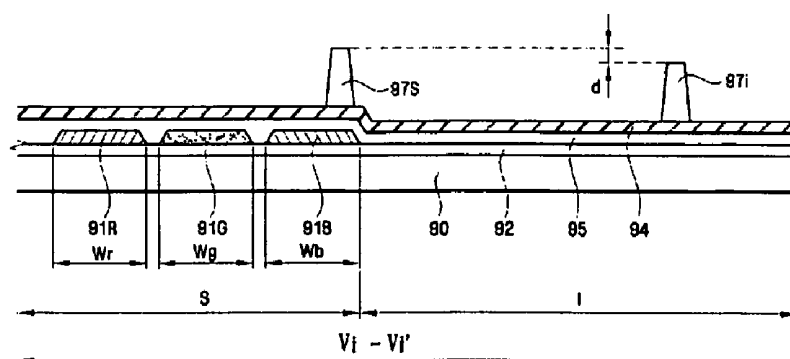


[Fig. 22]

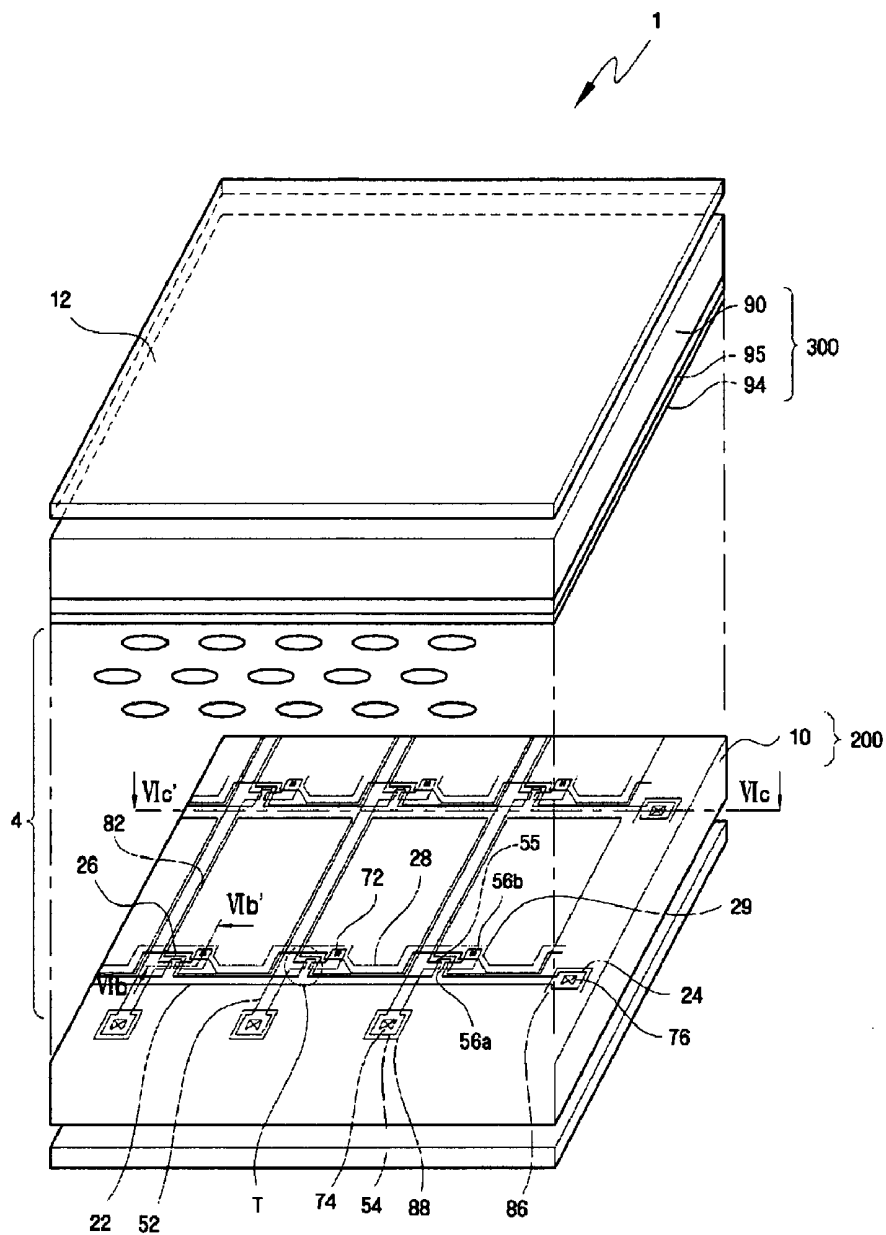


[Fig. 23]

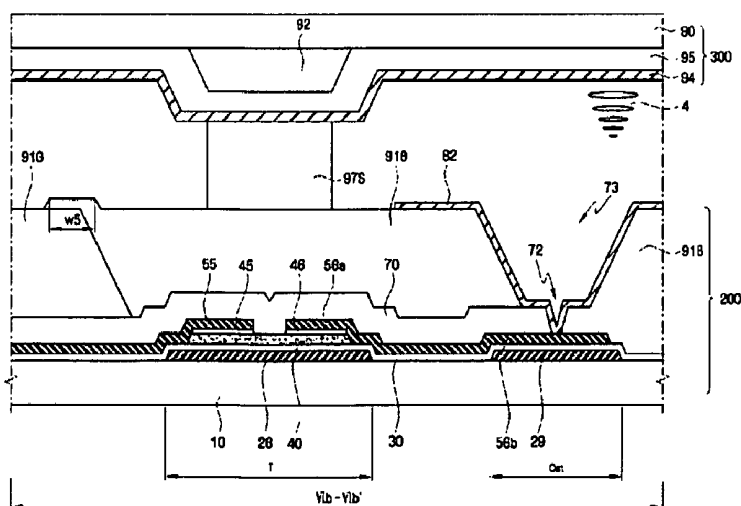


[Fig. 24]

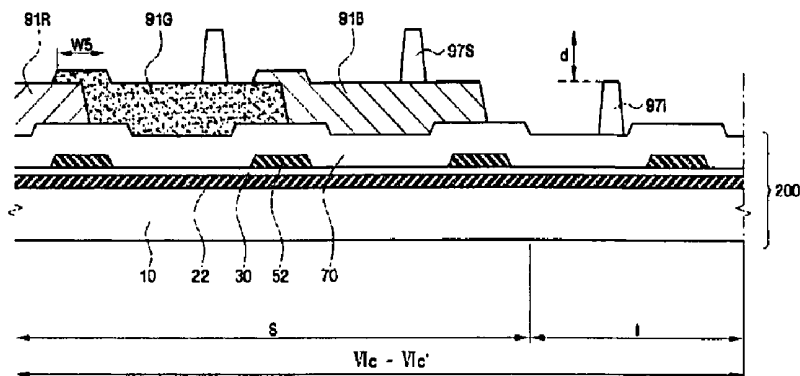

[Fig. 25]

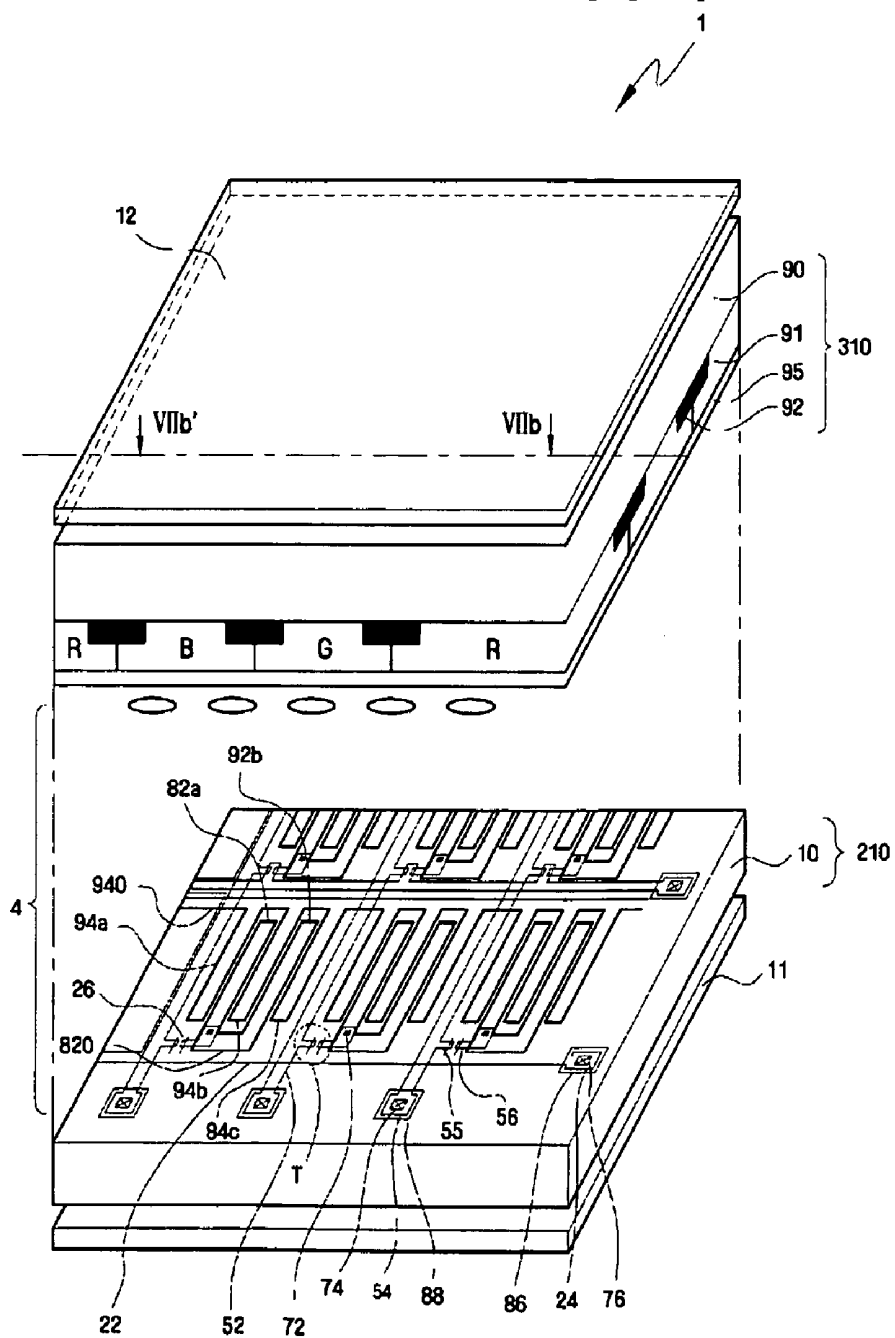

[Fig. 26]

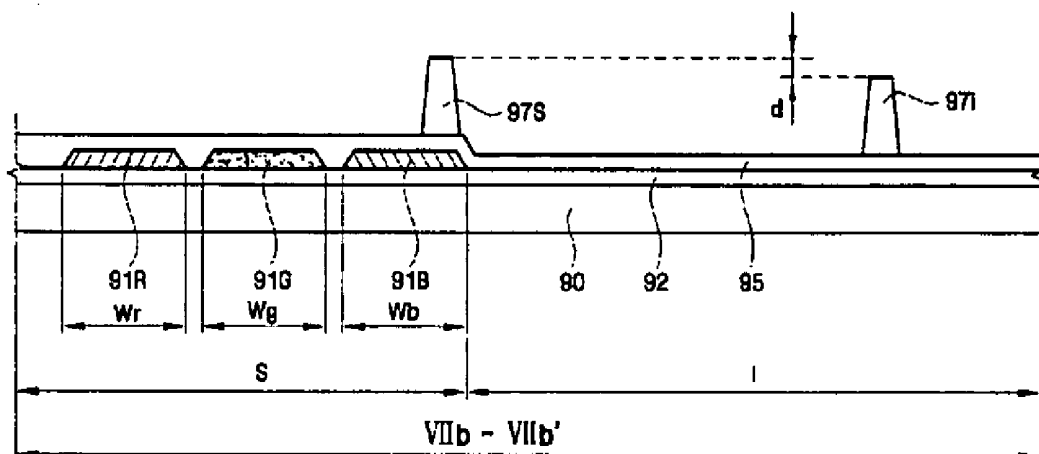

LIQUID CRYSTAL DISPLAY

TECHNICAL FIELD

The present invention relates to a liquid crystal display, and more particularly, to a liquid crystal display that can prevent edge failures of a liquid crystal panel.

BACKGROUND ART

A liquid crystal display (LCD) displays information using electrical and optical properties of liquid crystals injected into a liquid crystal panel. Compared to CRTs, LCDs have notable advantages in that they are smaller and lighter, and in addition to having low power consumption, they require low driving voltages. Due to such advantages, LCDs have wide applications in portable computers, desktop computer monitors, monitors of high-quality image display devices.

Generally, LCDs include a liquid crystal panel assembly and a backlight assembly. The liquid crystal panel assembly has a liquid crystal panel formed by injecting liquid crystals having dielectric anisotropy into a space between a first substrate and a second substrate, a driving integrated circuit (IC) mounted on the liquid crystal panel by a chip-on-glass (COG) and supplying corresponding driving signals to gate lines and data lines arranged on the liquid crystal panel, a printed circuit board transmitting pre-determined data and control signals to the driving IC, and a flexible printed circuit board connecting the printed circuit board to the driving IC. The liquid crystal panel assembly is combined with the backlight assembly which has a lamp assembly and various optical sheets, thus completing the LCD.

In conventional LCDs, a black matrix, color filters, an overcoat layer for planarizing a surface of the color filters, and a common electrode are sequentially formed on an insulating substrate provided on a second substrate, the common electrode on the insulating substrate provided on the second substrate changing the orientation of molecules in a liquid crystal layer by a potential difference from a pixel electrode provided on a first substrate. Here, the color filters may be arranged in a stripe shape, a mosaic shape, a delta shape, a square shape, or the like. In the case of forming color filters in a stripe shape, the respective color filters are formed at openings present in the same line. Alternatively, the respective color filters may be formed at openings on the black matrix in an island shape.

FIG. 1 is a layout view of a portion of a second substrate of a conventional liquid crystal display (LCD) illustrating an exemplary embodiment of color filters formed in a stripe shape.

An overcoat layer and a common electrode are sequentially formed on the color filters, or island arrangement, and column spacers are formed on the common electrode for maintaining a uniform cell gap between the first substrate and the second substrate. As described above, after forming the column spacers, the first substrate and the second substrate are combined, thus completing the liquid crystal panel.

When combining the first substrate and the second substrate, a sealant is applied to the edge of the first substrate, a liquid crystal material is dispensed into an edge portion, and the first and second substrates are aligned to then be combined.

In the course of dispensing liquid crystal into the first substrate, an excessive amount of liquid crystal may be dispensed. In such a case, excess liquid crystal may move toward the edge of the liquid crystal panel, resulting in an increase of a cell gap between the two substrates along the edge of the liquid crystal panel. That is, the column spacers are over-

lapped with the black matrix, the color filter layer, the overcoat layer and the common electrode on the second substrate. In addition, the column spacers are formed to a uniform height. In the case where the first and second plate are combined, an excessive amount of liquid crystal moves toward the edge of the liquid crystal panel, increasing a cell gap at edge portions of the liquid crystal panel, which eventually results in having a liquid crystal layer with uneven thickness.

As described above, if the thickness of the liquid crystal layer is not uniform, light is non-uniformly transmitted through the liquid crystal layer, which results in decreasing the manufacturing yield.

Thus, there is a need to prevent the change in the cell gap at the edge portion of a liquid crystal panel when excessive liquid crystal is dispensed into the liquid crystal panel.

DISCLOSURE OF INVENTION

Technical Problem

To solve the above problems, it is an object of the present invention to provide a liquid crystal display that can prevent the edge failure in a liquid crystal panel, which is generated when excessive liquid crystal is dispensed between a first substrate and a second substrate of a liquid crystal panel.

The above and other objects, features and advantages, of the present invention will become clear to those skilled in the art upon review of the following description, the attached drawings and appended claims.

Technical Solution

To accomplish the above object of the present invention, there is provided a liquid crystal display device including a first substrate and a second substrate facing and spaced apart from each other in a predetermined distance, in which the second substrate has a first area in which color filters are formed over a plurality of pixel regions and a second area in which the color filters are formed at each of the plurality of pixel regions.

Additional advantages and features of the present invention and methods of accomplishing the same may be understood more readily by reference to the following detailed description of preferred embodiments and the accompanying drawings. The present invention may, however, be embodied in many different forms and should not be construed as being limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete and will fully convey the concept of the invention to those skilled in the art, and the present invention will only be defined by the appended claims. Like reference numerals refer to like elements throughout the specification.

Advantageous Effects

The liquid crystal display (LCD) according to an embodiment of the present invention, color filters in the first area of the second substrate are formed over a plurality of pixel regions and color filters in the second area of the second area are formed separately at each pixel region, so as to secure more liquid crystal margin in the first area than liquid crystal margin in the second area. Accordingly, in a step of combining the first substrate with the second substrate, the thickness of the liquid crystal layer can be prevented from increasing at edge portions of the first substrate with the second substrate even when excessive liquid crystal is dispensed into the liquid crystal panel.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a layout view of a portion of a second substrate of a conventional liquid crystal display (LCD);

FIG. 2 is a partial perspective view of an LCD of a first embodiment of the present invention;

FIG. 3 is a cross-sectional view taken along a line IIb-IIb' of FIG. 2;

FIG. 4 is a cross-sectional view taken along lines IIc-IIc' and IIc'-IIc'' of FIG. 2;

FIG. 5 is a plan view showing a second substrate of the LCD shown in FIG. 2;

FIG. 6 is an enlarged view showing a portion "A" of FIG. 5;

FIG. 7 is a cross-sectional view taken along a line IIIc-IIIc' of FIG. 6;

FIGS. 8 through 12 are plan views showing processing steps of the second substrate shown in FIG. 5;

FIGS. 13 through 21 are cross-sectional view showing processing steps of the second substrate shown in FIG. 5, taken along the lines of FIGS. 8 through 12;

FIG. 22 is a partial perspective view of an LCD according to a second embodiment of the present invention;

FIG. 23 is a cross-sectional view taken along line VIb-VIb' of FIG. 22;

FIG. 24 is a cross-sectional view taken along line VIc-VIc' of FIG. 22;

FIG. 25 is a partial perspective view of an LCD according to a third embodiment of the present invention; and

FIG. 26 is a cross-sectional view taken along line VIIb-VIIb' of FIG. 25.

DESCRIPTION OF THE REFERENCE
NUMERALS ABOUT MAIN ELEMENTS IN THE
DRAWINGS

1: a Liquid Crystal Display (LCD)

2, 210, 300: a first substrate

3, 310, 200: a second substrate

4: a liquid crystal layer

10, 90: a insulating substrate

22: a gate line

24: a gate line terminal

26: a gate electrode

28: a storage electrode line

29: a storage electrode

30: a gate insulating layer

40: a semiconductor layer

45, 46: a ohmic contact layer

52: a data line

54: a data line terminal

55: a source electrode

56: a drain electrode

70: a passivation layer

72: a first contact hole

73: a second contact hole

74, 76: a contact hole

82: a pixel electrode

91: a color filter

91R: a red sub color filter

91G: a green sub color filter

91B: a blue sub color filter

92: a black matrix

94: a common electrode

97S: a first column spacer

97i: a second column spacer

95: a overcoat layer

S: a first area

I: a second area

MODE FOR THE INVENTION

A liquid crystal display (LCD) 1 according to an embodiment of the present invention includes a first substrate, a second substrate, and a liquid crystal layer interposed between the first substrate and the second substrate. Here, the second substrate has a first area in which color filters are formed over a plurality of pixel regions and a second area in which color filters are formed at each pixel region. The second area is formed at display regions while the second area is formed at nondisplay regions other than the display regions, that is, image displaying regions, on the second substrate. The first area may be provided at a predetermined width, e.g., 7 m, along the peripheral area of the second substrate.

LCDs can be classified into a vertically aligned (VA) type LCD in which a TFT and a color filter are formed on the first substrate and the second substrate, respectively, an in-plane switching (IPS) type LCD, and the like according to the driving type. LCDs may also be classified into an LCD in which a TFT and a color filter are formed on the first substrate and the second substrate, respectively, and a color filter on thin film transistor (COT) type LCD in which a color filter and a TFT are formed on the same substrate, e.g., the first substrate, according to the configuration. The LCDs according to various embodiments of the present invention may embrace all of the types mentioned above. That is, the LCDs according to various embodiments of the present invention may include, for example, a VA type LCD in which a TFT and a color filter are formed on the first and second substrates, respectively, a COT VA type LCD in which a TFT and a color filter are formed on the second substrate, an IPS type LCD in which a TFT and a color filter are formed on the first and second substrates, respectively, an IPS type LCD in which a TFT and a color filter are formed on the second substrate, and the like.

Hereinafter, a VA type LCD in which a TFT and a color filter are formed on a first substrate and a second substrate, respectively, will be described as a first embodiment of the present invention. Then, a VA type LCD in which a TFT and a color filter are formed on a second substrate will be described as a second embodiment of the present invention. Next, an IPS type LCD in which a TFT and a color filter are formed on each of a first substrate and a second substrate will be described as a third embodiment of the present invention.

Various embodiments of the present invention will now be described with reference to the accompanying drawings. An LCD 1 according to the first embodiment of the present invention will now be described with reference to FIGS. 2 through 7.

FIG. 2 is a partial perspective view of an LCD according to a first embodiment of the present invention, FIG. 3 is a cross-sectional view taken along a line IIb-IIb' of FIG. 2, FIG. 4 is a cross-sectional view taken along lines IIc-IIc' and IIc'-IIc'' of FIG. 2, FIG. 5 is a plan view showing a second substrate of the LCD shown in FIG. 2, FIG. 6 is an enlarged view showing a portion "A" of FIG. 5, and FIG. 7 is a cross-sectional view taken along a line IIIc-IIIc' of FIG. 6.

Referring first to FIGS. 2 and 3, the LCD 1 according to the first embodiment of the present invention includes a first substrate 2, a second substrate 3 opposite to and spaced a predetermined distance apart from the first substrate 2, a liquid crystal layer 4 interposed between the first substrate 2 and the second substrate 3 and having liquid crystal molecules aligned in a predetermined direction.

The first substrate 2 has a plurality of gate lines 22 arranged in a transverse direction on an insulating substrate 10 and a plurality of data lines 52 insulated from and arranged perpendicular to the gate lines 22. A pixel region is defined at each of

intersecting regions of the plurality of gate lines **22** and the plurality of data lines **52**. Here, the pixel region indicates a region through which light is transmitted to display an image. A pixel electrode **82** is formed at each pixel over the gate line **22** and the data line **52**. Each pixel has a thin film transistor 'T' connected to the gate line **22**, the data line **52** and the pixel electrode **82**.

Meanwhile, a black matrix **92**, a color filter **91**, an overcoat layer **95** and a common electrode **94** are sequentially formed on one plane of the second substrate **3**. The black matrix **92** is positioned at a boundary area of the color filter **91** and prevents light leakage, regions where the orientation of the liquid crystal layer **4** is not controlled. The color filter **91**, which is composed of R, G, and B sub color filters **91R**, **91G**, and **91B**, each formed on the black matrix **92**, allows light of a predetermined wavelength to pass through the color filters. The overcoat layer **95** planarizes a surface of the color filter **91** to enhance adhesion between the color filter **91** and the common electrode **94**. The second substrate **3** will be described later in more detail with reference to FIGS. **5** and **6**.

A lower polarizing plate **11** and an upper polarizing plate **12** transmitting only light parallel with the polarizing axes are positioned to exterior surfaces of the first and second substrates **2** and **3**. Additionally, as a separate light source, a backlight (not shown) may be positioned below the lower polarizing plate **11**.

Now, the first substrate **2** is described in more detail with reference to FIGS. **2** and **3**. With regard to the first substrate **2**, the gate line **22** is formed on the insulating substrate **10** in a transverse direction, and a gate electrode **26** is connected to the gate line **22** in the form of a protrusion. A gate line terminal **24** for applying a gate signal from another layer or an external circuit and transmitting the received gate signal to the gate line **22** is formed at an end of the gate line **22**. The width of the gate line terminal **24** is expanded to be connected to an external circuit. The gate line **22**, the gate line terminal **24**, and the gate electrode **26** constitute a gate wire (**22**, **24**, **26**).

In addition, a storage electrode line **28** and a storage electrode **29** are formed on the insulating substrate **10**. The storage electrode line **28** extends substantially in a transverse direction across a pixel area. The storage electrode **29** is branched from the storage electrode line **28** and has a wider width than the storage electrode line **28**. The storage electrode line **28** and the storage electrode **29** constitute a storage electrode wire (**28**, **29**). The shapes and arrangements of the storage electrode **29** and the storage electrode line **28** may vary in various ways. A voltage that is the same as that applied to the common electrode **94** of the second substrate **3** is applied to the storage electrode wire (**28**, **29**).

The gate wire (**22**, **24**, **26**) and the storage electrode wire (**28**, **29**) are preferably made of Al containing metal such as Al and Al alloy, Ag containing metal such as Ag and Ag alloy, Cu containing metal such as Cu and Cu alloy, Mo containing metal such as Mo and Mo alloy, Cr, Ti or Ta.

In addition, the gate wire (**22**, **24**, **26**) and the storage electrode wire (**28**, **29**) may have a multi-layered structure including two conductive films (not shown) having different physical characteristics. One of the two films is preferably made of a low resistivity metal including Al containing metal, Ag containing metal, and Cu containing metal for reducing signal delay or voltage drop in the gate wire (**22**, **24**, **26**). The other film is preferably made of material such as a Mo containing metal, Cr, Ta or Ti, which have good physical, chemical, and electrical contact characteristics with other materials such as indium tin oxide (ITO) or indium zinc oxide (IZO). Examples of combinations of the two films are a lower Cr film and an upper Al (Al alloy) film and a lower Al (Al alloy) film

and an upper Mo (Mo alloy) film. However, the gate wire (**22**, **24**, **26**) may be made of various metals or conductors.

A gate insulating layer **30** is formed on the gate wire (**22**, **24**, **26**) and the storage electrode wire (**28**, **29**).

A semiconductor layer **40** made of hydrogenated amorphous silicon or poly-crystalline silicon is formed on the gate insulating layer **30**. The semiconductor layer **40** may be formed in various shapes such as an island shape or a stripe shape. Ohmic contact layers **45** and **46**, which are made of silicide or n+ amorphous silicon hydride in which an n-type impurity is highly doped, are formed on the semiconductor layer **40**. The ohmic contact layers **45** and **46** may have a variety of shapes, including an island shape, a stripe shape, and so on. When the ohmic contact layers **45** and **46** are formed in a stripe shape, they may extend below the data line **52**.

The data line **52** and the drain electrode **56** are formed on the ohmic contact layers **45** and **46** and the gate insulating layer **30**. The data line **52** extends lengthwise and intersects the gate line **22** to define a pixel.

A data line terminal **54** for applying a data signal from another layer or an external circuit and transmitting the received gate signal to the data line **52** is formed at an end of the data line **52**. The width of the data line terminal **54** is expanded to be connected to an external circuit.

The source electrode **55** protrudes from the data line **52** in the form of a protrusion appearing at every pixel and extends over the ohmic contact layer **45**. That is, the source electrode **55** is formed to partially intersect the gate electrode **26** and the semi-conductor layer **40**.

The drain electrode (**522**, **523**) is separated from the source electrode **55** and positioned on the ohmic contact layer **46** to be opposite to the source electrode **55** in view of the gate electrode **26**. The drain electrode (**522**, **523**) consists of an electrode portion **522** overlapping with the gate electrode **26** and the semiconductor layer **40** and a pad portion **523** extending from the electrode portion **522** having an expanded area. The drain electrode pad portion **523** is formed to overlap with the storage electrode **29** to form a storage capacitor with the gate insulating layer **30** interposed therebetween. The data line **52**, the data line terminal **54**, the source electrode **55**, and the drain electrode **56** constitute a data wire (**52**, **54**, **55**, **56**). The data line **52** may be formed in various shapes. For example, the data line **52** may be formed in a stripe shape extending in a longitudinal direction or in such a way that a bent portion and a vertically extending portion periodically appear in a cycle period corresponding to one pixel length. Accordingly, the pixel defined by the intersecting gate line **22** and data line **52** may be shaped of, but not limited to, a rectangle, a bent band, or the like, according to the shape of the data line **52**. In the following description, the invention will be explained with regard to a rectangular pixel by way of example.

The data line **52**, the source electrode **55**, and the drain electrode **56** are preferably formed of chromium (Cr), a molybdenum (Mo) containing metal, a refractory metal such as tantalum (Ta) or titanium (Ti). In addition, the data line **52**, the source electrode **55**, and the drain electrode **56** may be formed as a single layer or a multiple layer including a lower film (not shown) made of a refractory metal film and a low-resistivity upper film (not shown). Examples of the multiple layers include a double-layered structure having a lower Cr film and an upper Al (Al alloy) film, a double-layered structure having a lower Mo (Mo alloy) film and an upper Al (Al alloy) film, and a triple-layered structure having a lower Mo film, an intermediate Al film, and an upper Mo film.

The gate electrode **26**, the semiconductor layer **40**, the source electrode **55**, and the drain electrode **56** form a thin film transistor 'T', which serves as a switching element.

Meanwhile, a passivation layer **70** made of an organic insulating layer is formed on the data line **52**, the drain electrode **56** and the exposed semiconductor layer **40**. Here, the passivation layer **70** is preferably made of an inorganic material such as silicon nitride or silicon oxide, a photosensitive organic material having a good flatness characteristic, or a low dielectric insulating material such as a-Si:C:O and a-Si:O:F formed by plasma enhanced chemical vapor deposition (PECVD).

Contact holes **74** and **72** are formed on the passivation layer **70** to expose the data line terminal **54** and the pad portion **523** of the drain electrode **56**, respectively, and the contact hole **76** exposing the gate line terminal **24** is formed on the passivation layer **70** and the gate insulating layer **30**.

Here, the pixel electrode **82**, which is electrically connected to the pad portion **523** of the drain electrode **56**, is formed according to the shape of the pixel over the contact hole **72** exposing the pad portion **523** of the drain electrode **56**.

In addition, an auxiliary data line terminal **88** and an auxiliary gate line terminal **86** connected to the data line terminal **54** and the gate line terminal **24** via the contact hole **76** are also formed on the passivation layer **70**. Here, the pixel electrode **82**, the auxiliary gate line terminal **86** and the auxiliary data line terminal **88** are made of a transparent conductor such as ITO or IZO or a reflective conductor such as Al. The auxiliary gate line terminal **86** and the auxiliary data line terminal **88** complement adhesions of the gate line terminal **24** and the data line terminal **54** to external circuit devices.

The pixel electrode **82** is physically and electrically connected to the drain electrode **56** via the contact hole **76** and receives a data voltage from the source electrode **55**. The pixel electrode **82** supplied with the data voltage and a common electrode **94** of the second substrate **3** produce an electric field to determine the orientation of liquid crystal molecules of the liquid crystal layer **4** interposed between the pixel electrode **82** and the common electrode **94**.

Next, the second substrate **3** will be described in more detail with reference to FIGS. 5 through 7.

Referring to FIGS. 5 through 7, the second substrate **3** has a first area S where color filters are formed over a plurality of pixel regions, and a second area I where a color filter is formed at each pixel region. Here, the first area S is formed at a non-display region other than a display region while the second area I is formed at the display region, that is, an image displaying region, on the second substrate **3**. The first area S may be provided at a predetermined width, e.g., 3 cm, along the peripheral area of the second substrate **3**.

The second substrate **3** includes an insulating substrate **90**, a black matrix **92** formed on the insulating substrate **90**, a color filter **91** formed on the black matrix **92** formed on the first area S and the second area I, an overcoat layer **95** formed on the color filter **91**, a common electrode **94** formed on the overcoat layer **95**, a first column spacer **97S** formed on the first area S of the color filter **91** so as to overlap with the black matrix **92**, and a second column spacer **97i** formed on the second area I of the color filter **91**.

In more detail, the black matrix **92**, which is made of an opaque material, is formed on the insulating substrate **90** in a matrix arrangement. In order to allow light having transmitted through the first substrate **2** to transmit through an upper portion of the second substrate **3**, an opening **961** is formed at a portion of the black matrix **92**. The opening **961** is generally formed at a region corresponding to the pixel of the first

substrate **2**. For example, In the case of a rectangular pixel, the opening **961** of the black matrix **92** is formed in a rectangular shape in conformity of the shape of the pixel. As an alternative example, In the case of a bent-band shaped pixel, the opening **961** of the black matrix **92** is also formed in a bent band shape. In the following description, the invention will be explained with regard to a rectangular opening (**961**) by way of example.

In the case where the opening **961** is rectangular, the opening **961** is preferably formed such that a ratio of a transverse length to a longitudinal length is 1:3. For example, if the transverse length of the opening **961** is 100 μ m, the longitudinal length of the opening **961** is preferably 300 μ m.

In the case of a large-size liquid crystal display apparatus, such as a digital TV, an opening may be formed to have transverse and longitudinal lengths of 200 μ m and 600 μ m, respectively.

The black matrix **92** is composed of a plurality of transverse lines and a plurality of longitudinal lines intersecting each other. Preferably, the width of the black matrix **92** in the longitudinal direction, that is, the pixel width (PW), may be in the range of, for example, 15 μ m to 35 μ m, and the width of the black matrix **92** in the transverse direction, that is, the pixel height (PH), may be in the range of, for example, 30 μ m to 40 μ m. The black matrix **92** may be made of chrome (Cr), chrome oxide (CrOx), or a polymeric resin.

The color filter **91**, including red, green and blue sub color filters **91R**, **91G** and **91B**, is formed on the black matrix **92**. The red, green, and blue sub color filters **91R**, **91G** and **91B** form a unit pixel.

In the first area S, red, green, and blue sub color filters **91R**, **91G** and **91B** are preferably formed over a plurality of pixel regions. That is, in the first area S, the red, green, and blue sub color filters **91R**, **91G** and **91B** are preferably formed over a plurality of openings on the black matrix **92**. For example, the red sub color filter **91R** is preferably formed straight over openings **961** and **966** existing on the same perpendicular line.

By contrast, in the second area I, red, green, and blue sub color filters **91R**, **91G** and **91B** are preferably formed separately at a plurality of pixel regions. That is, in the second area I, the red, green, and blue sub color filters **91R**, **91G** and **91B** are preferably formed separately at the respective openings on the black matrix **92**. For example, the red sub color filter **91R** is preferably formed at each of openings **964** existing on the black matrix **92**.

In order to improve driving characteristics depending on transmittance of light, the respective sub color filters **91R**, **91G** and **91B** may have different heights. For example, the red sub color filter **91R** may have a height (Hr) of 1.6 μ m, the green sub color filter **91G** may have a height (Hg) of 1.7 μ m, and the blue sub color filter **91B** may have a height (Hb) of 1.8 μ m. The overcoat layer **95** is formed on the color filter **91**. The overcoat layer **95** planarizes a surface of the color filter **91** and enhances adhesion with the common electrode **94** to be described later. The overcoat layer **95** may be made of a transparent material, and may optionally be omitted.

On the overcoat layer **95** is formed the common electrode **94** for applying an electric field to the liquid crystal layer **4** by forming a potential difference from the pixel electrode **82** of the first substrate **2**. The common electrode **94** may be made of a transparent conductive material such as indium tin oxide (ITO) or indium zinc oxide (IZO).

Pillar-shaped column spacers **97S** and **97i** for maintaining a cell gap of the liquid crystal panel are formed on the first area S and the second area I, respectively. Here, the column spacers **97S** and **97i** preferably have a height of approxi-

mately 3.3 μm . In addition, the column spacers **97S** and **97i** may be formed on non-transmissive regions, e.g., at least one among regions of the first substrate **2** corresponding to the gate electrode **26**, the storage electrode line **28** and the thin film transistor T. For example, the column spacers **97S** and **97i** may be positioned on the transverse line PH of the black matrix **92** of each pixel. The column spacers **97S** and **97i** may be formed in various densities per area according to the size of the liquid crystal panel manufactured. For example, as shown in FIG. 5, the column spacers **97S** and **97i** may be formed at each pixel (unit pixel) having the blue sub color pixel **91B**.

The formation of the column spacers **97S** and **97i** on the common electrode **94** in the above-described manner creates a predetermined height difference "d" between a top end of the column spacer **97S** formed on the first area S and a top end of the column spacer **97i** formed on the second area I. That is, the column spacer **97S** formed on the first area S overlaps with the black matrix **92**, the blue sub color filter **91B**, the overcoat layer **95** and the common electrode **94** while the column spacer **97i** formed on the second area I overlaps with the black matrix **92**, the overcoat layer **95** and the common electrode **94**. Here, the height difference "d" which is 60% the thickness of each of the sub color filters **91R**, **91G** and **91B**, is created between the top end of the column spacer **97S** formed on the first area S and the top end of the column spacer **97i** formed on the second area I. That is, the overcoat layer **95** planarizes an uneven surface of the color filter **91**.

In the case where the overcoat layer **95** is not formed, the height difference "d" between the top end of the column spacer **97S** formed on the first area S and the top end of the column spacer **97i** formed on the second area I becomes substantially the same with the thickness of the color filter **91**.

As described above, if there is the height difference "d" between the top end of the column spacer **97S** formed on the first area S and the top end of the column spacer **97i** formed on the second area I, a space in which liquid crystal can be spread, that is, a liquid crystal margin, is secured in the first area S, unlike in the second area I, of the second substrate **3**. Accordingly, in a subsequent step of combining the first substrate **2** with the second substrate **3**, the thickness of the liquid crystal layer **4** can be prevented from increasing at edge portions of the first substrate **2** with the second substrate **3** even when excessive liquid crystal is dispensed into the liquid crystal panel resulting from the combining of the first substrate **2** and the second substrate **3**.

Although not shown in the drawing, an alignment film for initial alignment of the liquid crystal layer **4** is formed on the column spacers **97S** and **97i**. That is, the column spacers **97S** and **97i** contact the first substrate **2** in a state in which the alignment film is interposed between the column spacers **97S** and **97i**.

The method of manufacturing the second substrate **3** will now be described with reference to FIGS. 8 through 21.

FIGS. 8 through 12 are plan views showing processing steps of the second substrate (**3**) shown in FIG. 5, and FIGS. 13 through 21 are cross-sectional view showing processing steps of the second substrate (**3**) shown in FIG. 5, taken along lines of FIGS. 8 through 12.

First, as shown in FIGS. 8 through 12, a black matrix **92** is formed on an insulating substrate **90** using a metal such as chrome (Cr) or chrome oxide (CrOx). An opening **961** is formed on the black matrix **92** through photolithography using a mask (not shown) having a pattern for the opening **961**. In this case, the opening **961** is preferably formed at a pixel region. In addition, the opening **961** is preferably formed such that a ratio of a transverse length to a longitudinal length is 1:3. For example, if the transverse length of the

opening **961** is 100 μm , the longitudinal length of the opening **961** is preferably 300 μm . Further, the length of the black matrix **92** in the longitudinal direction, that is, the pixel width (PW), is preferably in the range of, for example, 1.5 μm to 35 μm , and the length of the black matrix **92** in the transverse direction, that is, the pixel height (PH), is preferably in the range of, for example, 30 μm to 40 μm . If the black matrix **92** is formed of a photosensitive organic film made of carbon black resin, the opening **961** is formed on the black matrix **92** through exposing, developing, and others, using the mask having the pattern for the opening **961**.

After the opening **961** is completed in the described-mentioned manner, the color filter **91** is formed. The color filter **91** is composed of R, G, and B sub color filters **91R**, **91G**, and **91B**, which form a unit pixel. Here, presently used methods for the manufacturing of the color filter **91** include a dyeing method, an electrodeposition method, a pigment dispersion method, a printing method, and the like.

In the following description of the present invention, the method of manufacturing the color filter **91** will be described with regard to a pigment dispersion method.

As shown in FIG. 14, a red colored resin **911R** is coated on the entire surface of an insulating substrate **90** having a black matrix **92**. Then, the patterned mask **100** is applied to the black matrix **92** to then selectively expose the red color resin **911R** to form a red sub color filter **91R**, as shown in FIGS. 9 and 15. Here, the red sub color filter **91R** preferably has a height of 1.6 μm . In the first region S, the red sub color filter **91R** is preferably formed over a plurality of pixel regions. That is, the red sub color filter **91R** is preferably formed over a plurality of openings **961** and **966**. In the second area I, the red sub color filter **91R** is preferably formed at each of openings **964**.

Next, as shown in FIG. 16, a green colored resin **911G** is coated on the insulating substrate **90** having the red sub color filter **91R**. Then, the patterned mask **100** is applied to the resultant product to then selectively expose the green color resin **911G** to form a green sub color filter **91G**, as shown in FIGS. 10 and 17. Here, the green sub color filter **91G** preferably has a height of 1.7 μm . In the first region S, the green sub color filter **91G** is preferably formed over a plurality of pixel regions, while in the second area I, the green sub color filter **91G** is preferably formed at each of pixel regions.

Next, as shown in FIG. 18, a blue colored resin **911B** is coated on the insulating substrate **90** having the green sub color filter **91G**. Then, the patterned mask **100** is applied to the resultant product to then selectively expose the blue color resin **911B** to form a blue sub color filter **91B**, as shown in FIGS. 11 and 19. Here, the blue sub color filter **91B** preferably has a height of 1.8 μm . In the first region S, the blue sub color filter **91B** is preferably formed over a plurality of pixel regions, while in the second area I, the blue sub color filter **91B** is preferably formed at each of pixel regions.

After the color filter **91** is formed on the insulating substrate **90** through the above-described processes, an overcoat layer **95** made of a transparent material is formed on the color filter **91** to planarize a surface of the color filter **91**. Here, the step of forming the overcoat layer **95** may be optionally omitted.

Thereafter, a common electrode **94** is formed on the overcoat layer **95**. Here, the common electrode **94** applies an electric field to the liquid crystal layer **4** by creating a potential difference from a pixel electrode **82** provided on the first substrate **2**. The common electrode **94** is formed of a transparent material such as indium tin oxide (ITO) or indium zinc oxide (IZO). Here, the common electrode **94** may be formed

in a TN (Twisted Nematic) mode LCD. In contrast, the common electrode **94** may not be formed in an In-Plane Switching (IPS) mode LCD.

Next, as shown in FIG. **20**, a photosensitive organic insulating layer **97i** for forming column spacers **97S** and **97i** is formed on the common electrode **94**. A mask **110** having a pattern used to form the column spacers **97S** and **97i** is applied to the resultant photosensitive organic insulating layer **97i**, followed by subjecting to UV irradiation. Here, either a negative photosensitive resin, an exposed portion of which is hardened upon being subjected to UV irradiation, or a positive photosensitive resin, an unexposed portion of which reacts with a developing solution to then be removed, can be employed as the photosensitive organic insulating layer **97i**.

After the photosensitive organic insulating layer **97i** is exposed, the photosensitive organic insulating layer **97i** is developed and washed, thereby forming the column spacers **97S** and **97i** in the first area **S** and the second area **I**, respectively, as shown in FIGS. **12** and **21**. Here, each of the column spacers **97S** and **97i** preferably has a height of 3.3 μm . The column spacers **97S** and **97i** may be positioned in non-transmissive areas, for example, on the length of the black matrix **92** in the transverse direction, that is, the pixel height (PH). In addition, the density of the column spacers **97S** and **97i** can vary according to the kind of LCD. For example, one or more column spacers may be provided at each unit pixel.

If the column spacers **97S** and **97i** are formed in the above-described manner, a predetermined height difference “d” which is 60% the thickness of the color filter **91**, is created between a top end of the column spacer **97S** and a top end of the column spacer **97i**. Here, the height difference “d” is substantially smaller than thickness of the column spacer **97S**, which is because the overcoat layer **95** planarizes an uneven surface of the color filter **91**.

In the case where the overcoat layer **95** is not formed, the height difference “d” between the top end of the column spacer **97S** formed on the first area **S** and the top end of the column spacer **97i** formed on the second area **I** becomes substantially the same with the thickness of the color filter **91**.

As described above, if there is the height difference “d” between the top end of the column spacer **97S** formed on the first area **S** and the top end of the column spacer **97i** formed on the second area **I**, a space in which liquid crystal can be spread, that is, a liquid crystal margin, is secured in the first area **S**, unlike in the second area **I**, of the second substrate **3**. Accordingly, in a subsequent step of combining the first substrate **2** with the second substrate **3**, the thickness of the liquid crystal layer **4** can be prevented from increasing at edge portions of the first substrate **2** with the second substrate **3** even when excessive liquid crystal is dispensed into the liquid crystal panel resulting from the combining of the first substrate **2** and the second substrate **3**.

An alignment film (not shown) for initial alignment of the liquid crystal layer **4** is formed on the column spacers **97S** and **97i**. Here, the alignment film may be made of a polyimide-based resin material.

Next, an LCD **1** according to a second embodiment of the present invention will be described with reference to FIGS. **22** and **23**.

FIG. **22** is a partial perspective view of an LCD (**1**) according to a second embodiment of the present invention, FIG. **23** is a cross-sectional view taken along a line VIb-IIb' of FIG. **22**. For explanatory convenience, components each having the same function for describing the first embodiment are respectively identified by the same reference numerals, and their repetitive description will be omitted.

The LCD **1** according to the current embodiment of the present invention has substantially the same configuration as the LCD according to the first embodiment of the present invention, as shown in FIGS. **2** and **3**, except for the followings. That is, as shown in FIG. **22**, a first substrate **200** includes a thin film transistor **T**, a color filter **91**, and a pixel electrode **82** sequentially formed thereon.

In detail, a black matrix **92**, an overcoat layer **95** and a common electrode **94** are sequentially formed on one plane of an insulating substrate **90** of a second substrate **300**. Here, the black matrix **92** is positioned at an area corresponding to the thin film transistor ‘T’ of the first substrate **200** in an island shape.

Next, like in the previous embodiment, the second substrate **300** has a first area **S** and a second area **I**. Here, the first area **S** is formed at a non-display region other than a display region while the second area **I** is formed at the display region, that is, an image displaying region, on the second substrate **300**. Here, the first area **S** may be provided at a predetermined width, e.g., 3 cm, along the peripheral area of the second substrate **300**.

With regard to the first substrate **200**, a gate line **22**, semiconductor layers **45** and **46**, and a data line **52** are formed on an insulating substrate **10**. A passivation layer **70** made of an organic insulating layer is formed on drain electrodes **522** and **523** and the exposed semiconductor layer **40**. Here, a contact hole **72** is formed on the passivation layer **70** to expose a drain electrode pad portion **523** at each pixel.

The color filter **91** including a second contact hole **73** extending from the first contact hole **72** overlaps with the data line **52** on the passivation layer **70**, thereby shielding light by means of the data line **52**.

The color filter **91** includes red, green and blue sub color filters **91R**, **91G** and **91B** and the respective red, green, and blue sub color filters **91R**, **91G** and **91B** form a unit pixel. The color filter **91** may be arranged in a stripe shape, a mosaic shape, a delta shape, a square arrangement shape, or the like according to the arrangement method. In addition, the respective color filters **91R**, **91G** and **91B** may be formed over a plurality of pixel regions in a stripe type, or at each pixel region in an island type.

In addition, a sub color filter may overlap with a sub color filter of an adjacent pixel by a predetermined width **w5** at an area in which the data line **52** is formed. For example, a blue sub color filter **91B** may overlap with a green sub color filter **91G** of an adjacent pixel by a predetermined width **w5**, e.g., 3 μm .

Further, in the first area **S**, the color filter **91** is preferably formed over a plurality of pixel regions. By contrast, in the second area **I**, the color filter **91** is preferably formed separately at a plurality of pixel regions.

Meanwhile, column spacers are formed to overlap with non-transmissive areas, for example, the gate line **22** of the first substrate **200**. In this case, a predetermined height difference “d” is created between a top end of the column spacer **97S** and a top end of the column spacer **97i**, as shown in FIG. **24**. This is because the column spacer **97S** formed on the first area **S** is formed to overlap with the gate line, the passivation layer **70** and the color filter **91** while the column spacer **97i** formed on the second area **I** is formed to overlap with the gate line and the passivation layer **70**. That is, the height difference “d” created between the top end of the column spacer **97S** and the top end of the column spacer **97i** is substantially the same with the thickness of the color filter **91**.

In this case, a space in which liquid crystal can be spread, that is, a liquid crystal margin, is secured in the first area **S**, unlike in the second area **I**, of the second substrate **300**.

13

Accordingly, in a subsequent step of combining the first substrate **200** with the second substrate **300**, the thickness of the liquid crystal layer **4** can be prevented from increasing at edge portions of the first substrate **200** with the second substrate **300** even when excessive liquid crystal is dispensed into the liquid crystal panel resulting from the combining of the first substrate **200** and the second substrate **300**.

Next, an LCD according to a third embodiment of the present invention will be described with reference to FIGS. **25** and **26**.

FIG. **25** is a partial perspective view of an LCD (**1**) according to a third embodiment of the present invention, and FIG. **26** is a cross-sectional view taken along a line VIIb-VIIb' of FIG. **25**. For explanatory convenience, components having the same function are respectively identified by the same reference numerals, and a repeated description thereof will be omitted.

The LCD **1** according to the current embodiment of the present invention has substantially the same configuration as the LCD according to the first embodiment of the present invention, as shown in FIGS. **2** and **3**, except for the followings. That is, as shown in FIG. **25**, a first substrate **210** includes a thin film transistor 'T', pixel electrodes **82** and **83** and common electrodes **98**, **99** and **910** sequentially formed thereon.

In detail, a gate line **22** and a data line **52** are formed to intersect each other on the first substrate **210**, and the thin film transistor T is formed at an intersection of the gate line **22** and the data line **52**. The intersection of the gate line **22** and the data line **52** is defined as a pixel region. Each pixel includes a plurality of common electrodes **98**, **99** and **910** and a plurality of pixel electrodes **82** and **83**.

In more detail, a lead wire **820** is connected to the thin film transistor T. The plurality of pixel electrodes **82** and **83** are branched from the lead wire **820** in the same direction as the data line **52**. In addition, a common wire **940** is separated at predetermined interval from the lead wire **820** in the same direction as the gate line **22**. The plurality of common electrodes **98**, **99** and **910** are formed at the common wire **940** so as to alternate with the pixel electrodes **82** and **83**.

Here, the plurality of pixel electrodes **82** and **83** and the plurality of common electrodes **98**, **99** and **910** are formed in various shapes. For example, the pixel electrodes **82** and **83** and the common electrodes **98**, **99** and **910** may be bent several times in a zigzag fashion. In such a case, molecules in a liquid crystal layer **4** present in a space between the pixel electrodes **82** and **83** and the common electrodes **98**, **99** and **910** are arranged different directions at respective bent portions of the pixel electrodes **82** and **83** and the common electrodes **98**, **99** and **910**, thereby establishing a multi-domain structure. As a result, compared to the conventional linear electrode structure, the multi-domain structure of the present invention has an improved viewing angle.

In the above-described LCD **1**, a substantial opening area is an area in which the horizontal arrangement of liquid crystal is adjusted by a lateral electric field between the pixel electrodes **82** and **83** and the common electrodes **98**, **99** and **910**. FIG. **25** shows a structure of an LCD having 4 opening areas.

Meanwhile, like in the previous embodiment, the second substrate **310** has a first area S formed over a plurality of pixel regions and a second area I formed separately at each of the plurality of pixel regions.

With the second substrate **310**, a black matrix **92**, a color filter **91**, an overcoat layer **95**, a first column spacer **97S**, and a second column spacer **97i** are sequentially formed on the insulating substrate **90**. Here, the overcoat layer **95** may optionally be omitted.

14

On the overcoat layer **95**, the first column spacer **97S** and the second column spacer **97i** are formed on the first area S and the second area I, respectively. Here, the first column spacer **97S** is formed to overlap with the black matrix **92** on the color filter **91** in the first area S, while the second column spacer **97i** is formed to overlap with the black matrix **92** on the color filter **91**.

The formation of the column spacers **97S** and **97i** on the common electrode **94** in the above-described manner creates a predetermined height difference "d" which is 60% a thickness of each of sub color filters **91R**, **91G** and **91B**, between a top end of the column spacer **97S** formed on the first area S and a top end of the column spacer **97i** formed on the second area I. That is, the height difference "d" is smaller than the thickness of each of sub color filters **91R**, **91G** and **91B** because the overcoat layer **95** planarizes an uneven surface of the color filter **91**.

In the case where the overcoat layer **95** is not formed, the height difference "d" between the top end of the column spacer **97S** formed on the first area S and the top end of the column spacer **97i** formed on the second area I becomes substantially the same with the thickness of the color filter **91**.

As described above, if there is the height difference "d" between the top end of the column spacer **97S** formed on the first area S and the top end of the column spacer **97i** formed on the second area I, a space in which liquid crystal can be spread, that is, a liquid crystal margin, is secured in the first area S, unlike in the second area I, of the second substrate **310**. Accordingly, in a subsequent step of combining the first substrate **210** with the second substrate **310**, the thickness of the liquid crystal layer **4** can be prevented from increasing at edge portions of the first substrate **210** with the second substrate **310** even when excessive liquid crystal is dispensed into the liquid crystal panel resulting from the combining of the first substrate **210** and the second substrate **310**.

In conclusion, those skilled in the art will appreciate that many variations and modifications can be made to the preferred embodiments without substantially departing from the principles of the present invention. Therefore, the disclosed preferred embodiments of the invention are used in a generic and descriptive sense only and not for purposes of limitation.

INDUSTRIAL APPLICABILITY

A liquid crystal display (LCD) according to the present invention can be used in a portable multimedia player (PMP), personal digital assistant (PDA), portable digital versatile disk (DVD) player, cellular phone, notebook computer, digital TV, and others. For explanatory convenience, the LCD according to the present invention has been described as being used a computer monitor. However, the present invention is not limited to this and includes the above-mentioned LCDs.

The invention claimed is:

1. A liquid crystal display comprising:

a first substrate; and

a second substrate facing and spaced apart from the first substrate at a predetermined distance,

wherein the second substrate comprises:

an insulating substrate;

a black matrix formed on the insulating substrate;

a first area in which color filters are formed over a plurality of pixel regions, the first area being formed at non-display regions other than display regions where images are displayed;

15

- a second area in which the color filters are formed at each of the plurality of pixel regions, the second area being formed at the display regions;
- a first column spacer formed on a color filter in the first area so as to overlap with the black matrix and the color filter; 5 and
- a second column spacer formed on the black matrix in the second area.
2. The liquid crystal display of claim 1, wherein a predetermined height difference is created between a top end of the first column spacer and a top end of the second column spacer. 10
3. The liquid crystal display of claim 2, wherein the predetermined height difference is substantially the same as a thickness of the color filter.
4. The liquid crystal display of claim 1, further comprising an overcoat layer between the color filter and the column spacers. 15
5. The liquid crystal display of claim 4, wherein a predetermined height difference is created between a top end of the first column spacer and a top end of the second column spacer. 20
6. The liquid crystal display of claim 5, wherein the predetermined height difference is approximately 60% of the thickness of the color filter.
7. The liquid crystal display of claim 4, further comprising a common electrode between the overcoat layer and the column spacers. 25
8. A liquid crystal display comprising:
- a first substrate; and
 - a second substrate facing and spaced apart from the first substrate at a predetermined distance, 30
- wherein the second substrate comprises:

16

- an insulating substrate;
 - a gate line formed on the insulating substrate in a transverse direction;
 - a data line insulated from the gate line and extending in a longitudinal direction to intersect the gate line;
 - a pixel electrode formed at each pixel defined at an intersection of the gate line and the data line;
 - a thin film transistor connected to the gate line, the data line and the pixel electrode;
 - a first area in which color filters are formed over a plurality of pixel regions, the first area being formed at non-display regions other than display regions where images are displayed;
 - a first column spacer formed on a color filter in the first area so as to overlap with the gate line;
 - a second area in which the color filters are formed at each of the plurality of pixel regions, the second area being formed at the display regions; and
 - a second column spacer formed to overlap with the gate line in the second area.
9. The liquid crystal display of claim 8, wherein a predetermined height difference is created between a top end of the first column spacer and a top end of the second column spacer.
10. The liquid crystal display of claim 9, wherein the predetermined height difference is substantially the same as a thickness of the color filter.
11. The liquid crystal display of claim 8, further comprising a common electrode producing a lateral electric field together with the pixel electrode.

* * * * *

专利名称(译)	液晶显示器		
公开(公告)号	US7847891	公开(公告)日	2010-12-07
申请号	US11/989898	申请日	2006-08-01
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	KIM SUN MI JEONG JI VOUNG LEE YUN SEOK YANG SEOK VOON		
发明人	KIM, SUN-MI JEONG, JI-VOUNG LEE, YUN-SEOK YANG, SEOK-VOON		
IPC分类号	G02F1/1333		
CPC分类号	G02F1/133514 G02F2001/133388 G02F2001/136222		
优先权	1020050070394 2005-08-01 KR		
其他公开文献	US20090284695A1		
外部链接	Espacenet USPTO		

摘要(译)

提供一种液晶显示器。液晶显示器包括第一基板和第二基板，第一基板和第二基板以预定距离彼此面对并且彼此间隔开，其中第二基板具有第一区域，其中滤色器形成在多个像素区域和第二区域中。在多个像素区域中的每个像素区域处形成滤色器。

