



US009480403B2

(12) **United States Patent**
Perrey et al.

(10) **Patent No.:** **US 9,480,403 B2**
(45) **Date of Patent:** **Nov. 1, 2016**

(54) **MEDICAL IMAGING SYSTEM AND
METHOD FOR GENERATING A BLENDED
CINE LOOP**

(2013.01); *A61B 5/7425* (2013.01); *A61B*
6/032 (2013.01); *A61B 6/503* (2013.01); *A61B*
8/481 (2013.01)

(71) Applicants: **General Electric Company**,
Schenectady, NY (US); **n22 e.U.**,
Wiener Neustadt (AT)

(58) **Field of Classification Search**

CPC .. *A61B 5/0044*; *A61B 8/0866*; *A61B 8/463*;
A61B 8/5284; *A61B 6/463*; *A61B 8/481*;
A61B 5/055; *A61B 6/032*; *A61B 6/503*;
A61B 5/0402; *A61B 5/7425*

See application file for complete search history.

(72) Inventors: **Christian Perrey**, Mondsee (AT);
Daniel Buckton, Salzburg (AT); **Dieter**
Hoeningmann, Wiener Neustadt (AT)

(56) **References Cited**

U.S. PATENT DOCUMENTS

(73) Assignees: **General Electric Company**,
Schenectady, NY (US); **E.U., N22**,
Wiener Neustadt (AT)

6,224,552 B1 * 5/2001 Jago *A61B 8/00*
600/437

6,447,450 B1 9/2002 Olstad

6,641,536 B2 11/2003 Hossack et al.

8,131,041 B2 3/2012 Ter Mors

8,364,244 B2 1/2013 Angelos et al.

2007/0127797 A1 * 6/2007 Angelos *A61B 6/032*

382/128

2009/0180555 A1 * 7/2009 Sun *H04N 7/26058*

375/240.29

2012/0314945 A1 * 12/2012 Cha *G06T 3/4038*

382/167

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 356 days.

(21) Appl. No.: **14/107,895**

(22) Filed: **Dec. 16, 2013**

(65) **Prior Publication Data**

US 2015/0164330 A1 Jun. 18, 2015

* cited by examiner

Primary Examiner — Jonathan Cwern

(51) **Int. Cl.**

A61B 8/00 (2006.01)

A61B 5/00 (2006.01)

A61B 8/08 (2006.01)

A61B 5/0402 (2006.01)

A61B 6/03 (2006.01)

A61B 6/00 (2006.01)

A61B 5/055 (2006.01)

(52) **U.S. Cl.**


CPC *A61B 5/0044* (2013.01); *A61B 6/463*
(2013.01); *A61B 8/0866* (2013.01); *A61B*
8/463 (2013.01); *A61B 8/5284* (2013.01);
A61B 5/0402 (2013.01); *A61B 5/055*

(57)

ABSTRACT

An medical imaging system and method for generating and displaying a blended cine loop. The system and method include acquiring image data and identifying a base image sequence in the image data. The system and method include identifying at least one non-base image in the image data acquired from outside of the base image sequence and generating a blended image sequence from the base image sequence and the at least one non-base image. The system and method include displaying the blended image sequence as a blended cine loop on a display device.

24 Claims, 7 Drawing Sheets

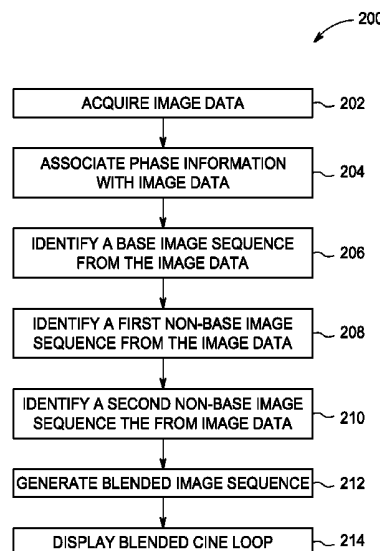

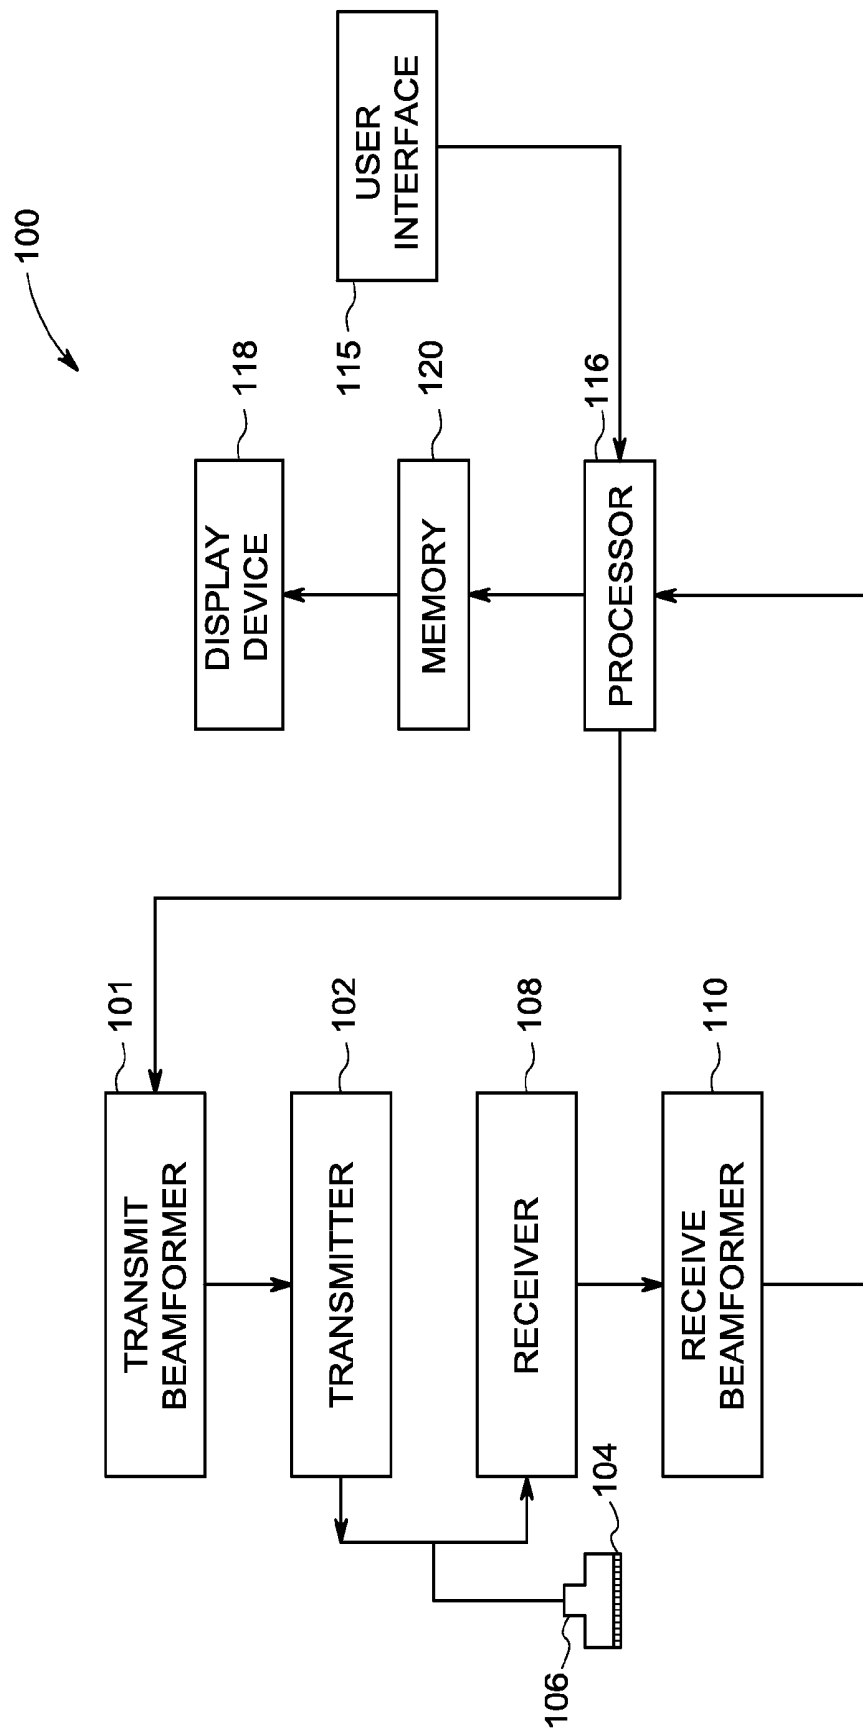


FIG. 1

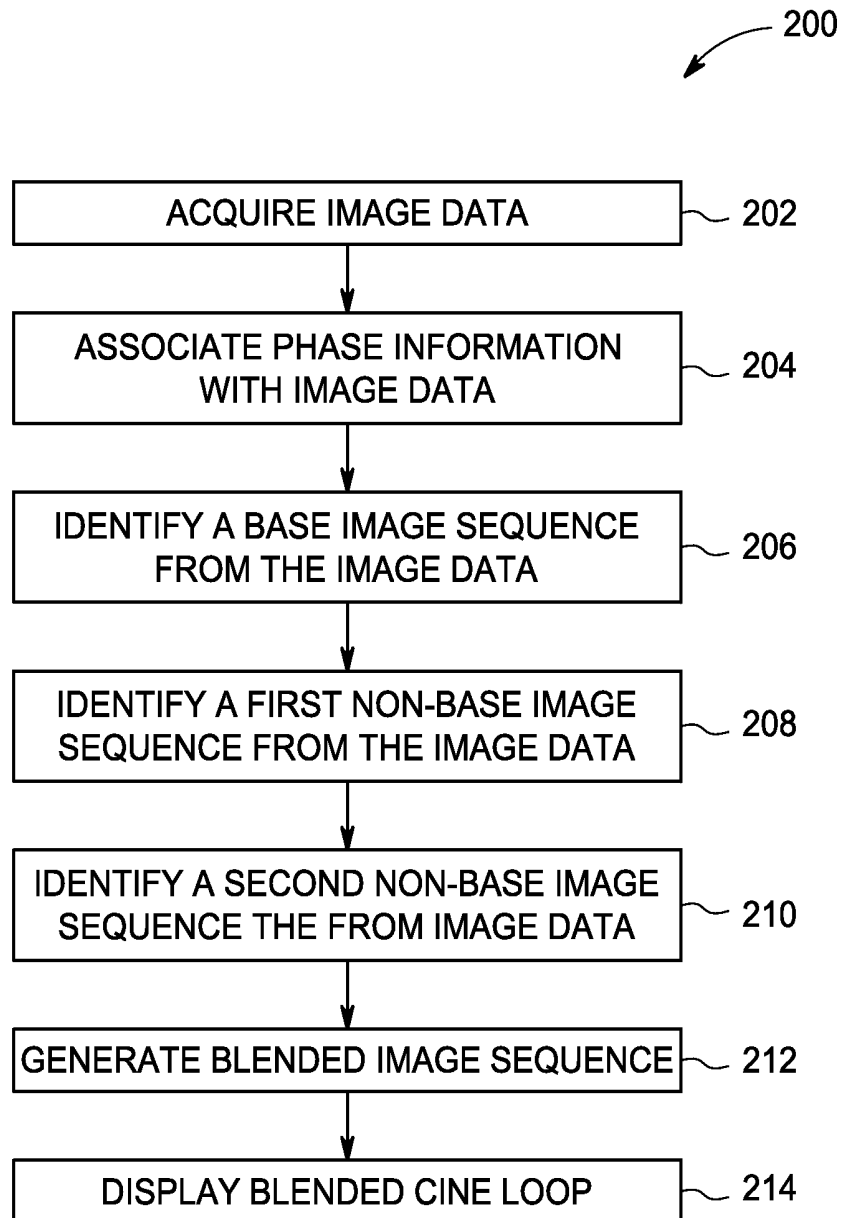


FIG. 2

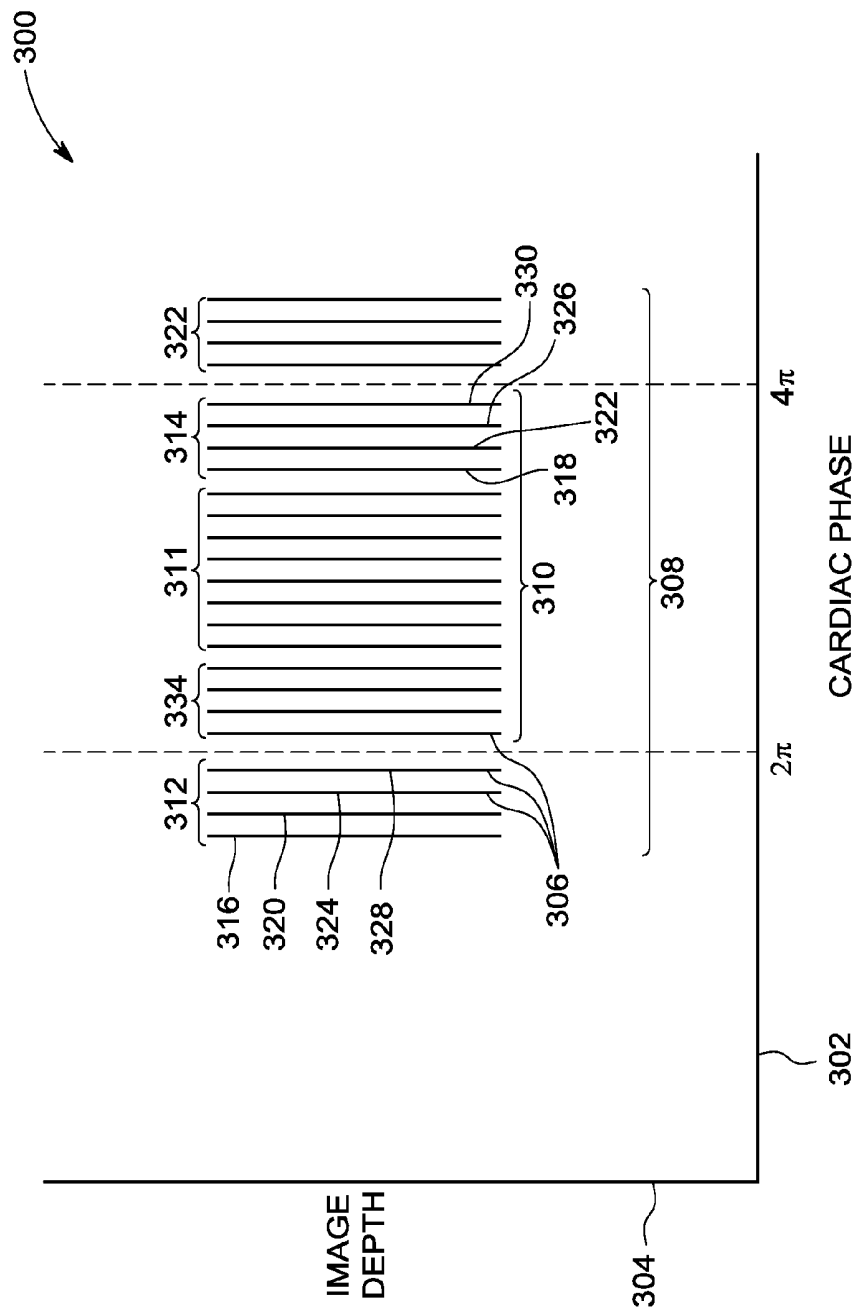


FIG. 3

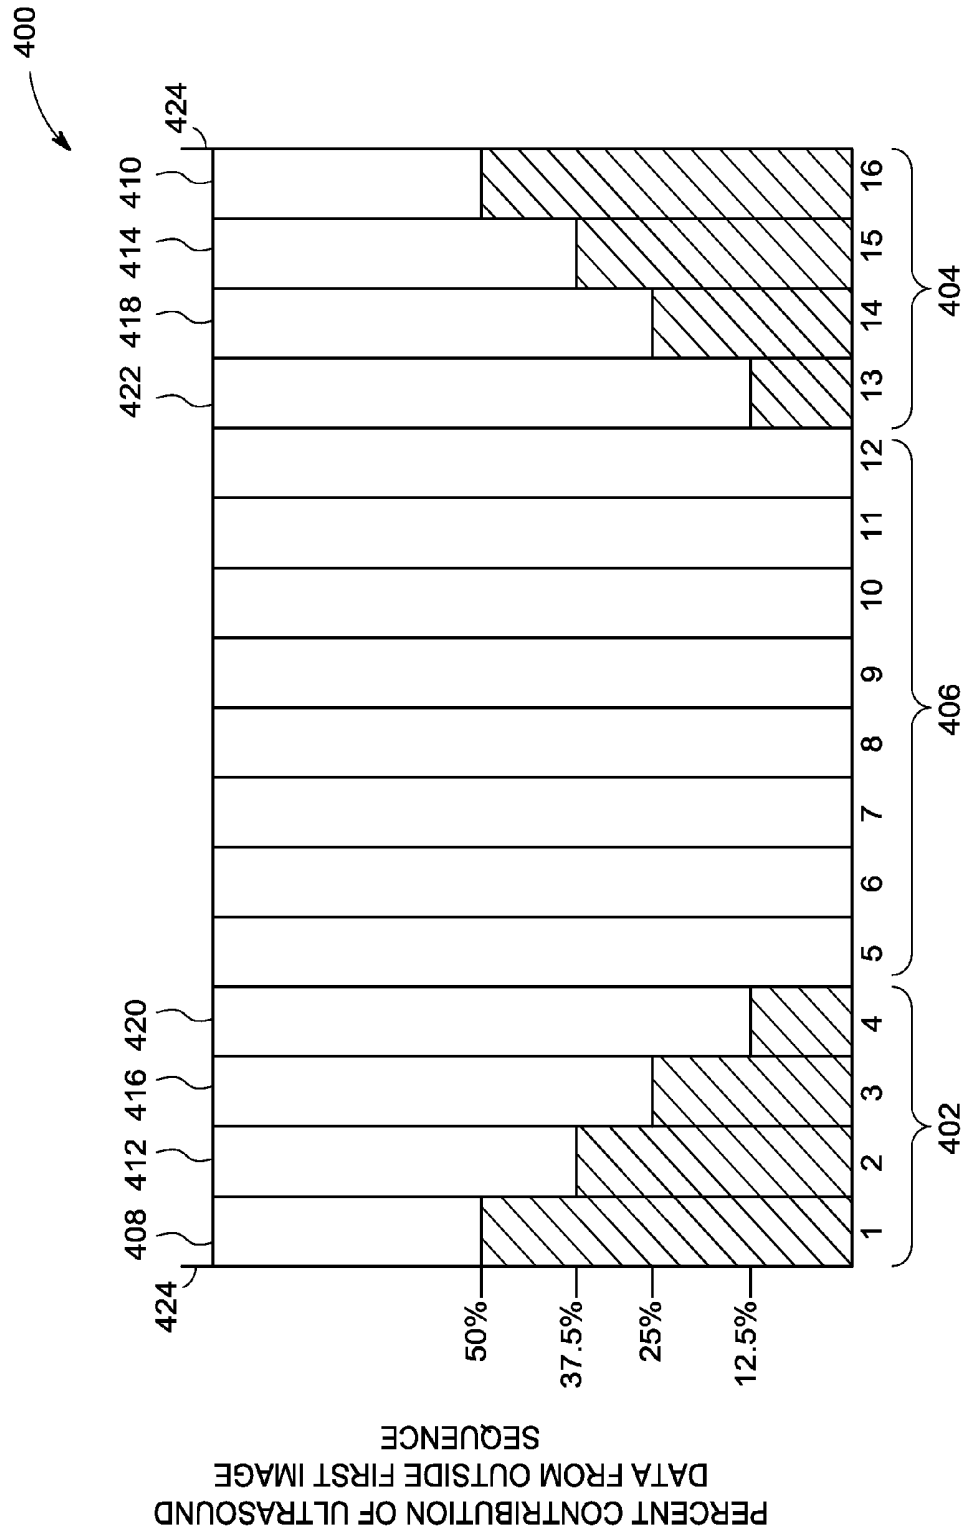


FIG. 4

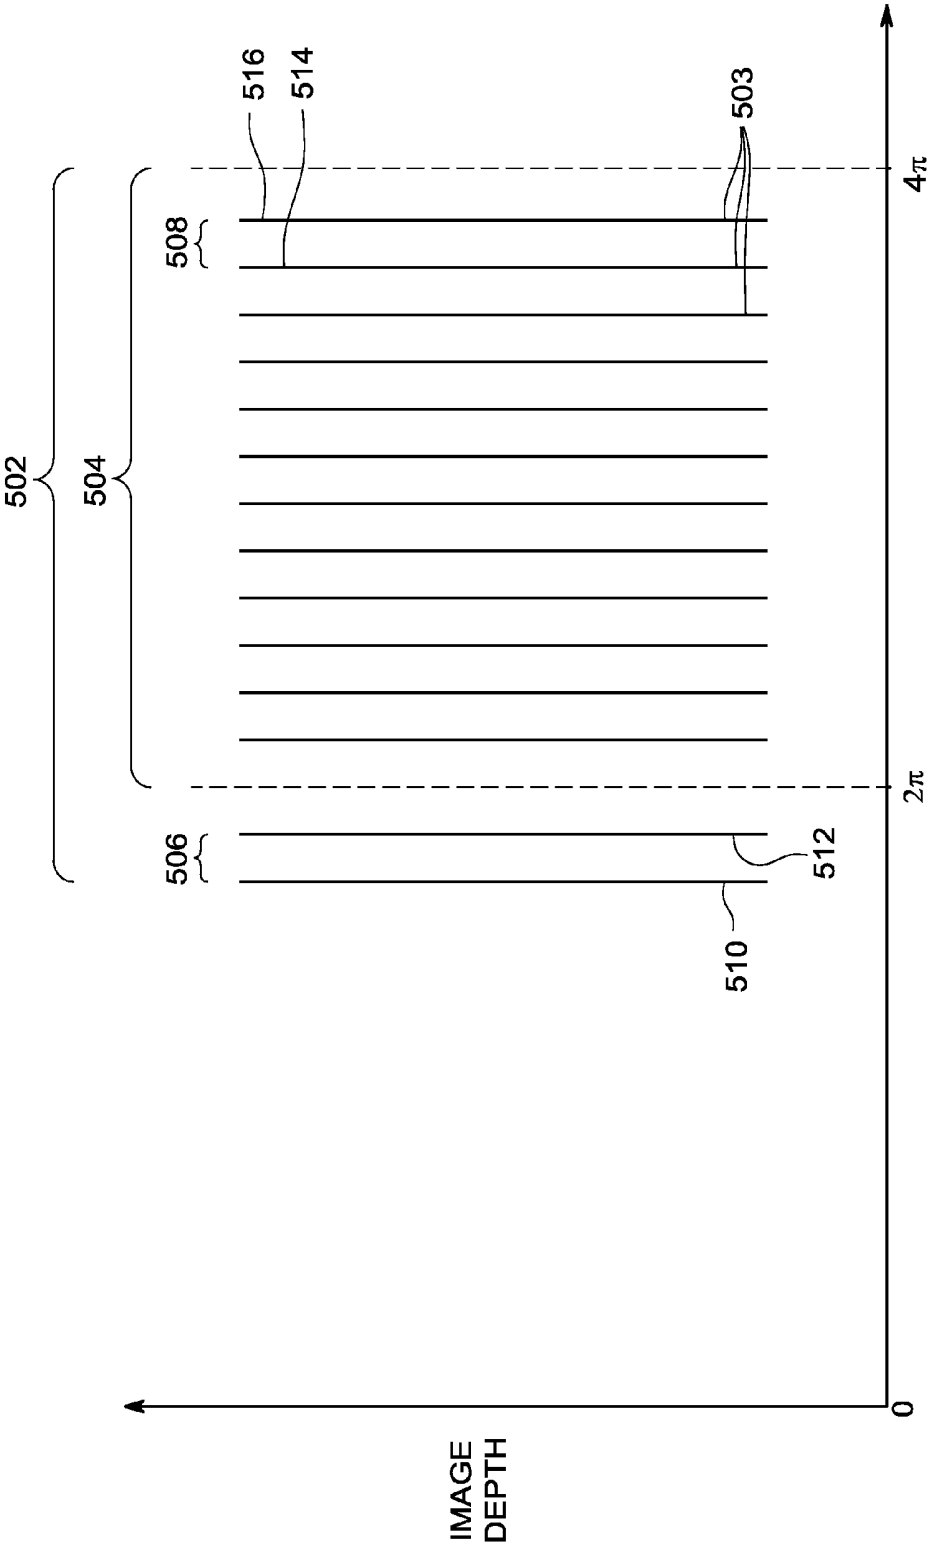


FIG. 5

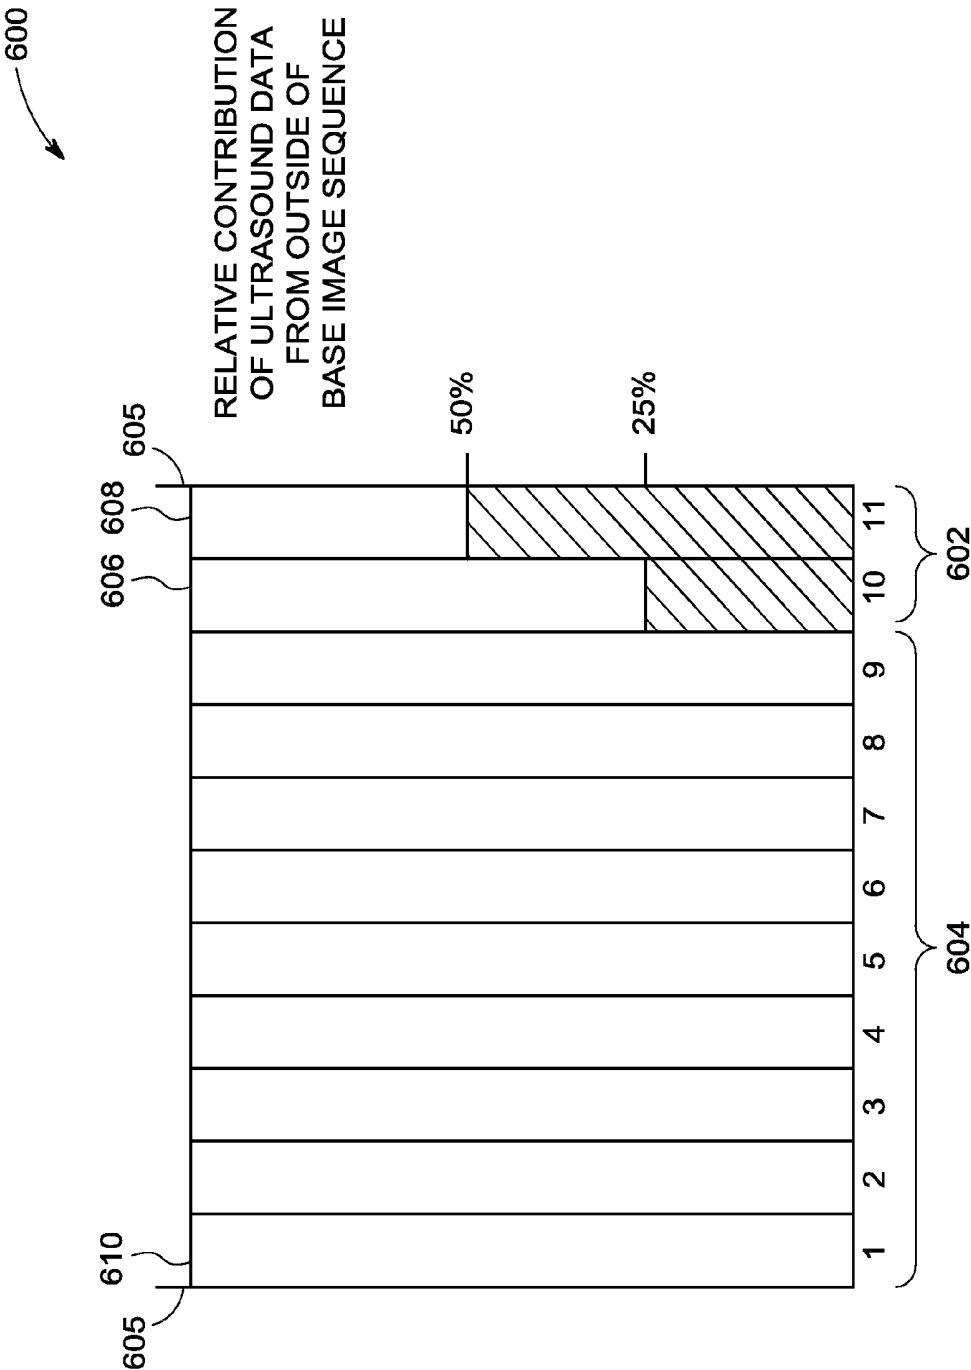


FIG. 6

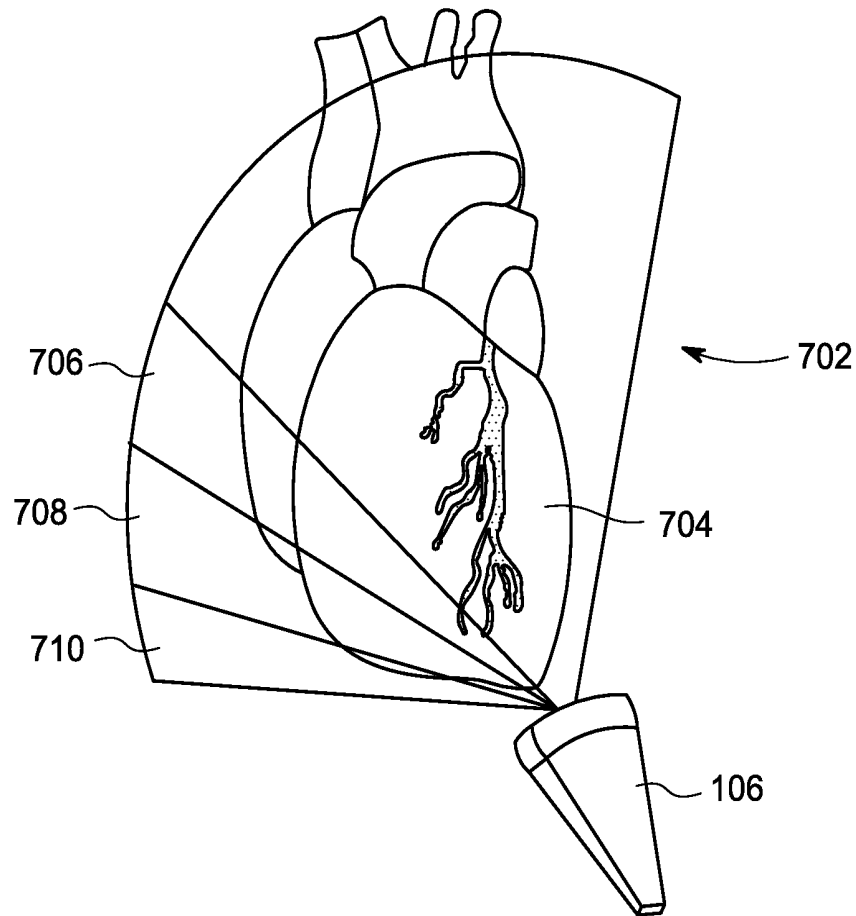


FIG. 7

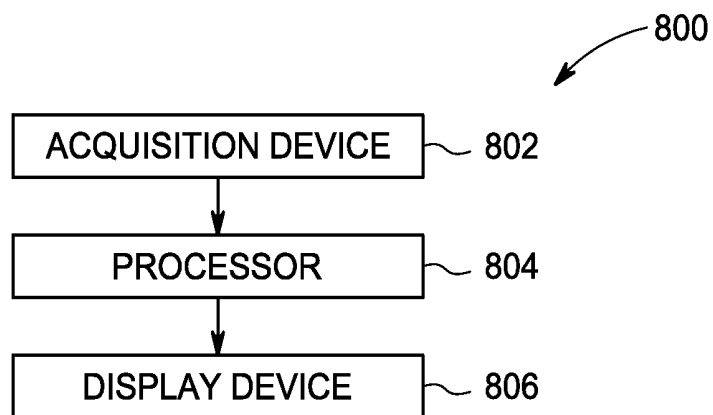


FIG. 8

1

MEDICAL IMAGING SYSTEM AND METHOD FOR GENERATING A BLENDED CINE LOOP

FIELD OF THE INVENTION

This disclosure relates generally to a medical imaging system and a method for generating and displaying a blended cine loop with reduced artifacts.

BACKGROUND OF THE INVENTION

In clinical settings, it is known to display medical imaging data as a cine loop. For example, it is common to acquire and display ultrasound data as 2D or 3D cine loops. The cine loops are typically used to show the motion of a periodically moving object such as an adult or fetal heart. Cine loops are typically played back as “endless loops.” It is extremely common for cine loops to include at least one of a spatial discontinuity or a phase discontinuity at a seam in the cine loop where cine loop transitions from an end of an image sequence to a beginning of the image sequence. These discontinuities originate from a variety of causes including irregular periodic motion of the structure being imaged, patient motion during the acquisition of the data, and any mismatch between the intended phase and the phase that was actually acquired.

Any discontinuities in the cine loop will result in an artifact that is visible to a clinician viewing the cine loop. These artifacts are distracting to the clinician and, in severe cases, could even lead to an improper diagnosis. For these and other reasons an improved method and medical imaging system for generating and displaying cine loops with reduced artifacts is desired.

BRIEF DESCRIPTION OF THE INVENTION

The above-mentioned shortcomings, disadvantages and problems are addressed herein which will be understood by reading and understanding the following specification.

In an embodiment, a method of medical imaging includes acquiring image data of a periodically moving structure over more than a single physiological cycle. The image data includes a plurality of images. The method includes associating phase information from the physiological cycle with the image data. The method includes identifying a base image sequence from the image data based on the phase information, where the base image sequence corresponds to an integral number of cycles. The method includes identifying at least one non-base image in the image data acquired from outside the base image sequence. The method includes generating a blended image sequence from the base image sequence and the at least one non-base image. The blended image sequence corresponds to the integral number of physiological cycles. The blended image sequence exhibits at least one of a reduced phase discontinuity and a reduced spatial discontinuity when displayed as a blended cine loop compared to a non-blended cine loop based on only the base image sequence. The method includes displaying the blended image sequence as a blended cine loop on a display device.

In an embodiment, a method of medical imaging includes acquiring image data of a periodically moving structure over more than a single physiological cycle, the image data including a plurality of images. The method includes associating phase information from the physiological cycle with the image data and identifying a base image sequence from

2

the image data corresponding to an integral number of physiological cycles. The base image sequence includes first and second base images with associated first and second phases. The method includes identifying first and second non-base images acquired from outside the base image sequence in the image data. The first non-base image represents the first phase and the second non-base image represents the second phase. The method includes blending the first and second non-base images with the base image sequence using a first weighting function for combining the first base image with the first non-base image and a second weighting function for combining the second base image with the second non-base image in order to generate a blended image sequence corresponding to the integral number of cycles. The method also includes displaying the blended image sequence as a blended cine loop on a display device.

In another embodiment, a medical imaging system includes an acquisition device, a display device, and a processor in electronic communication with the acquisition device and the display device. The processor is configured to control the acquisition device to acquire image data of a periodically moving structure over more than a single physiological cycle. The processor is configured to associate phase information from the physiological cycle with the image data. The processor is configured to identify a base image sequence from the image data based on the phase information, where the base image sequence corresponds to an integral number of cycles. The processor is configured to identify at least one non-base image in the image data acquired from outside the base image sequence. The processor is configured to generate a blended image sequence corresponding to the integral number of physiological cycles from the base image sequence and the at least one non-base image. Wherein the blended image sequence exhibits at least one of a reduced phase discontinuity and a reduced spatial discontinuity when displayed as a blended cine loop compared to a non-blended cine loop based on only the base image sequence. The processor is configured to display the blended image sequence as a blended cine loop on the display device.

Various other features, objects, and advantages of the invention will be made apparent to those skilled in the art from the accompanying drawings and detailed description thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram of an ultrasound imaging system in accordance with an embodiment;

FIG. 2 is a flow chart of a method in accordance with an embodiment;

FIG. 3 is a schematic representation of an acquisition of ultrasound data in accordance with an exemplary embodiment;

FIG. 4 is a schematic representation of a blended image sequence generated in accordance with an embodiment;

FIG. 5 is a schematic representation of an acquisition of ultrasound data in accordance with an exemplary embodiment;

FIG. 6 is a schematic representation of a blended image sequence generated in accordance with an embodiment;

FIG. 7 is a schematic representation of a partial volume acquisition in accordance with an exemplary embodiment; and

FIG. 8 is a schematic representation of a medical imaging system in accordance with an exemplary embodiment.

DETAILED DESCRIPTION OF THE INVENTION

In the following detailed description, reference is made to the accompanying drawings that form a part hereof, and in which is shown by way of illustration specific embodiments that may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the embodiments, and it is to be understood that other embodiments may be utilized and that logical, mechanical, electrical and other changes may be made without departing from the scope of the embodiments. The following detailed description is, therefore, not to be taken as limiting the scope of the invention.

FIG. 1 is a schematic diagram of an ultrasound imaging system **100** in accordance with an embodiment. The ultrasound imaging system **100** includes a transmit beamformer **101** and a transmitter **102** that drive elements **104** within a probe **106** to emit pulsed ultrasonic signals into a body (not shown). The probe **106** may be an 2D array probe according to an embodiment. However, any other type of probe may be used according to other embodiments. The pulsed ultrasonic signals are back-scattered from structures in the body, like blood cells or muscular tissue, to produce echoes that return to the elements **104**. The echoes are converted into electrical signals, or ultrasound data, by the elements **104** and the electrical signals are received by a receiver **108**. The electrical signals representing the received echoes are passed through a receive beamformer **110** that outputs ultrasound data. According to some embodiments, the probe **106** may contain electronic circuitry to do all or part of the transmit and/or the receive beamforming. For example, all or part of the transmit beamformer **101**, the transmitter **102**, the receiver **108** and the receive beamformer **110** may be situated within the probe **106**. The terms “scan” or “scanning” may also be used in this disclosure to refer to acquiring data through the process of transmitting and receiving ultrasonic signals. The terms “data” or “ultrasound data” may be used in this disclosure to refer to either one or more datasets acquired with an ultrasound imaging system. A user interface **115** may be used to control operation of the ultrasound imaging system **100**, including the input of patient data and/or the selection of scanning or display parameters.

The ultrasound imaging system **100** also includes a processor **116** to control the transmit beamformer **101**, the transmitter **102**, the receiver **108** and the receive beamformer **110**. The processor **116** is in electronic communication with the probe **106**. The processor **116** may control the probe **106** to acquire data. The processor **116** controls which of the elements **104** are active and the shape of a beam emitted from the probe **106**. The processor **116** is also in electronic communication with a display device **118**, and the processor **116** may process the data into images for display on the display device **118**. For purposes of this disclosure, the term “electronic communication” may be defined to include both wired and wireless connections. The processor **116** may include a central processor (CPU) according to an embodiment. According to other embodiments, the processor **116** may include other electronic components capable of carrying out processing functions, such as a digital signal processor, a field-programmable gate array (FPGA) or a graphic board. According to other embodiments, the processor **116** may include multiple electronic components

capable of carrying out processing functions. For example, the processor **116** may include two or more electronic components selected from a list of electronic components including: a central processor, a digital signal processor, a field-programmable gate array, and a graphic board. According to another embodiment, the processor **116** may also include a complex demodulator (not shown) that demodulates the RF data and generates raw data. In another embodiment the demodulation may be carried out earlier in the processing chain. The processor **116** may be adapted to perform one or more processing operations on the data according to a plurality of selectable ultrasound modalities. The data may be processed in real-time during a scanning session as the echo signals are received. For the purposes of this disclosure, the term “real-time” is defined to include a procedure that is performed without any intentional delay. For example, an embodiment may acquire and display data a real-time frame-rate of 7-50 frames/sec. For purposes of this disclosure, the term “frame-rate” may be applied to either 2D or 3D frames of ultrasound data. Additionally, the term “volume-rate” may be used to refer to the frame-rate when applied to 4D ultrasound data. It should be understood that the real-time frame rate may be dependent on the length of time that it takes to acquire each volume of data. For a volume acquisition, frame rate depends on the length of time required to acquire each volume of data. Accordingly, when acquiring a relatively large volume of data, the real-time volume-rate may be slower. Thus, some embodiments may have real-time volume-rates that are considerably faster than 50 volumes/sec while other embodiments may have real-time volume-rates slower than 7 volumes/sec. The data may be stored temporarily in a buffer (not shown) during a scanning session and processed in less than real-time in a live or off-line operation. Some embodiments of the invention may include multiple processors (not shown) to handle the processing tasks. For example, a first processor may be utilized to demodulate and decimate the RF signal while a second processor may be used to further process the data prior to displaying an image. It should be appreciated that other embodiments may use a different arrangement of processors.

The ultrasound imaging system **100** may continuously acquire data at a volume-rate of, for example, 10 Hz to 30 Hz. Images generated from the data may be refreshed at a similar volume-rate. Other embodiments may acquire and display data at different rates. For example, some embodiments may acquire data at a volume-rate of less than 10 Hz or greater than 30 Hz depending on the size of the volume and the intended application. A memory **120** is included for storing processed frames of acquired data. In an exemplary embodiment, the memory **120** is of sufficient capacity to store at least several seconds worth of frames of ultrasound data. The frames of data are stored in a manner to facilitate retrieval thereof according to its order or time of acquisition. The memory **120** may comprise any known data storage medium.

Optionally, embodiments of the present invention may be implemented utilizing contrast agents. Contrast imaging generates enhanced images of anatomical structures and blood flow in a body when using ultrasound contrast agents including microbubbles. After acquiring data while using a contrast agent, the image analysis includes separating harmonic and linear components, enhancing the harmonic component and generating an ultrasound image by utilizing the enhanced harmonic component. Separation of harmonic components from the received signals is performed using suitable filters. The use of contrast agents for ultrasound

imaging is well-known by those skilled in the art and will therefore not be described in further detail.

In various embodiments of the present invention, data may be processed by other or different mode-related modules by the processor **116** (e.g., B-mode, Color Doppler, M-mode, Color M-mode, spectral Doppler, Elastography, TVI, strain, strain rate, and the like) to form 2D or 3D data. For example, one or more modules may generate B-mode, color Doppler, M-mode, color M-mode, spectral Doppler, Elastography, TVI, strain, strain rate and combinations thereof, and the like. The image beams and/or frames are stored and timing information indicating a time at which the data was acquired in memory may be recorded. The modules may include, for example, a scan conversion module to perform scan conversion operations to convert the image frames from beam space coordinates to display space coordinates. A video processor module may be provided that reads the image frames from a memory and displays the image frames in real-time while a procedure is being carried out on a patient. A video processor module may store the image frames in an image memory, from which the images are read and displayed.

FIG. 2 is a flow chart of a method in accordance with an exemplary embodiment. The individual blocks of the flow chart represent steps that may be performed in accordance with the method **200**. Additional embodiments may perform the steps shown in a different sequence and/or additional embodiments may include additional steps not shown in FIG. 2. The technical effect of the method **200** is the display of a blended cine loop. The method **200** will be described according to an exemplary embodiment where the method **200** is implemented with the ultrasound imaging system **100** of FIG. 1 and the image data comprises ultrasound data. However, it should be appreciated that, according to other embodiments, the method **200** may be implemented with medical imaging systems from different modalities including X-ray imaging systems, computed tomography (CT) imaging systems, magnetic resonance imaging (MRI) systems, or any other imaging system capable of acquiring image data that could be displayed as a cine loop. Since the method **200** will be described according to an embodiment where the imaging system is an ultrasound imaging system, the image data will comprise ultrasound data. Additionally, the method **200** will be described according to an embodiment where 4D ultrasound data of a fetal heart is acquired. It should be appreciated that according to other embodiments, the method **200** may be used to display 2D or 4D ultrasound data acquired from other structures including some or all of an adult heart and/or a carotid artery.

Referring to FIGS. 1 and 2, at step **202** the processor **116** controls the transmit beamformer **101**, the transmitter **102**, the probe **106**, the receiver **108**, and the receive beamformer **110** to acquire ultrasound data. The processor **116** controls the components of the ultrasound imaging system **100** to acquire ultrasound data for longer than a complete physiological cycle. The method **200** will be described according to an exemplary embodiment where the ultrasound data comprises data of a heart and the physiological cycle comprises a cardiac cycle, but it should be appreciated that other embodiments may acquire ultrasound data of different periodically moving structures. Additionally, the periodically moving structures may move according to a different physiological cycle such as a respiratory cycle. A clinician may determine the length of the acquisition of ultrasound data at step **202**, or the processor **116** may determine the duration of the acquisition data based on data from a device connected to the patient and adapted to determine phase information

about the patient's physiological cycle. According to an exemplary embodiment, an ECG machine (not shown) may be connected to the patient and ECG data may be provided to the processor **116**.

According to an embodiment, ultrasound data may be acquired for just slightly longer than a cardiac cycle. For example, the acquisition may be longer than the cardiac cycle by just a single image, or the acquisition of ultrasound data at step **202** may exceed the length of the cardiac cycle by multiple images. According to an exemplary embodiment, the acquisition of ultrasound data at step **202** may exceed the length of the cardiac cycle by two or more images.

FIG. 3 is a schematic representation of an acquisition **300** of image data according to an embodiment. The image data in FIG. 3 will be described according to an exemplary embodiment where the image data is ultrasound data, but image data from other modalities may be used according to other embodiments. Axis **302** represents cardiac phase, while axis **304** represent image depth. Each vertical line **306** represents an image. Ultrasound data **308** includes a plurality of images acquired over longer than a cardiac cycle as illustrated by the heart phase information on axis **302**. FIG. 3 illustrates that the acquisition of ultrasound data **308** was started before a cardiac phase of 2π and extends until a cardiac phase after 4π , which is longer than one complete cardiac cycle.

Referring to FIGS. 1, 2, and 3, at step **204**, the processor **116** associates phase information with the ultrasound data **308**. As discussed previously, the phase information may be acquired at the same time that the ultrasound data is acquired. That is, phase information from an external device such as an ECG machine may be acquired from the patient at the same time as the ultrasound data is acquired during step **202**. According to other embodiments, image processing techniques may be applied to the ultrasound data **308** in order to detect the phase of each image **306** in the ultrasound data. For example, the image processing technique may focus on a portion of the heart where movements correspond to phase, such as one or more heart valves. According to other embodiments, a Fourier analysis may be applied to the ultrasound data **308** in order to estimate the phase of each image **306** in the ultrasound data **308**. According to yet another embodiment, one or more M-mode lines (not shown) may be interleaved with the acquisition of the ultrasound data **308**. The M-mode lines may intersect a portion of a structure such as a valve that clearly exhibits periodic motion. The phase of each image **306** may then be determined based on the M-mode data. The above examples represent only a limited number of all the techniques that may be used to determine phase. It should be appreciated that additional techniques of determining or estimating the phases of images within the ultrasound data may also be used.

Still referring to FIGS. 1, 2, and 3, at step **206** of the method **200** a base image sequence **310** is identified from the ultrasound data **308**. The base image sequence **310** may be identified based on operator input, or the base image sequence **310** may be automatically identified by the processor **116** based on the phase information associated with the ultrasound data **308** at step **204**. The base image sequence **310** represents an integral number of cardiac cycles according to an exemplary embodiment. The base image sequences may represent other physiological cycles according to other embodiments. In FIG. 3, the base image sequence **310** starts at 2π and extends to 4π , making it exactly one heart cycle in length. According to other

embodiments, a base image sequence may be selected that does not start exactly at the start of a physiological cycle. For example, in other embodiments, the base image sequence may start at any phase of the physiological cycle as long as the base image sequence represents an integral number of cardiac cycles. The base image sequence may represent any integral number of cardiac cycles in other embodiments.

At step 208, the processor 116 identifies a first non-base image sequence 312 from the ultrasound data 308. The first non-base image sequence 312 is less than a complete cardiac cycle in length. The first non-base image sequence 312 was acquired before the base image sequence 310. However, according to other embodiments, a non-base image sequence may be acquired after the base image sequence 310. The images in the first non-base image sequence 312 correspond to the images in a first subset 314 of the base image sequence 310. For example: non-base image 316 is the same phase as base image 318; non-base image 320 is the same phase as base image 322; non-base image 324 is the same phase as base image 326; and non-base image 328 is the same phase as base image 330.

At step 210, a second non-base image sequence 322 is identified by the processor 116. The second non-base image sequence 322 is identified from the ultrasound data 308 and was acquired after the base image sequence 310. According to other embodiments, the second non-base image sequence 322 may be acquired before the base image sequence 310. The second non-base image sequence 322 corresponds to a second subset 334 of the base image sequence 310. Both the second non-base image sequence 322 and the second subset 334 include the same number of images, and the images in the second non-base image sequence 322 are phase-matched to the second subset 334. The term "phase-matched" is defined to include a pair of images acquired from different physiological cycles that both represent the same physiological phase. In the exemplary embodiment shown in FIG. 3, the first subset 314, the second subset 334, the first non-base image sequence 312 and the second non-base image sequence 322 are each comprised of four images. However, it should be appreciated that any pair of corresponding image sequences may include a different number of images. For example, a first pair of corresponding image sequences, namely the first non-base image sequence 312 and the first base image sequence 314, could include either more than four images or fewer than four images. According to another embodiment where the base image sequence 310 is more than one physiological cycle, additional data from within the base image sequence may be used to generate the blended image sequence. For example, one or more images in the base image sequence near the start or end of the base image sequence may be blended with one or more images from a different physiological cycle within the base image sequence in order to generate a blended image sequence.

At step 212 of the method 200, the processor 116 generates a blended cine loop from the base image sequence 310, the first non-base image sequence 312 and the second non-base image sequence 322. The processor 116 blends the data from the base image sequence 310 with the first subset 314, and the processor 116 blends the data from the second non-base image sequence 322 with the second subset 334. The ultrasound data is blended based on phase. For example: non-base image 316 and base image 318 have common phases; non-base image 320 and base image 322 both have common phases; images non-base image 324 and base image 326 have common phases; and non-base image 328 and base image 330 have common phases. As such, images 316 and 318 are blended together, images 320 and 322 are

blended together, and images 328 and 330 are blended together. The second non-base image sequence 322 may also be blended with the base image sequence 310. According to the embodiment shown in FIG. 3, the second non-base image sequence 322 may be blended with the second subset 334.

On or more weighting functions may be used to control the relative contribution of the base image and the corresponding non-base image towards the resulting blended image. An exemplary weighting function is listed below:

$$\text{Image}_{\text{Blended}} = W_1 * \text{Image}_{\text{Base}} + W_2 * \text{Image}_{\text{Non-base}}$$

Where $\text{Image}_{\text{Blended}}$ is a blended image, W_1 is a first weight, $\text{Image}_{\text{Base}}$ is a base image, W_2 is a second weight, and $\text{Image}_{\text{Non-base}}$ is a non-base image. The values assigned to W_1 and W_2 may be adjusted to control the relative contribution of the base image and the non-base image to the resulting blended image. For purposes of this disclosure two weighting functions with at least one different value for either the first weight or the second weight will be considered to be different weighting functions since they will results different relative contributions of the base image and the non-base image. Other embodiments may use different weighting functions.

FIG. 4 is a schematic representation of a blended image sequence 400 that, according to an exemplary embodiment, is generated according to the method 200 described with respect to FIGS. 2 and 3. The blended image sequence 400 may be based on image data from any imaging modality according to other embodiments. The blended image sequence 400 may be displayed as a blended cine loop by repeatedly displaying the images in the blended image sequence 400. There are 16 numbered columns in FIG. 4. Each column represents an image in the blended image sequence 400. The blended image sequence 400 is an example of a blended image sequence 400 that would be generated at step 212 of the method 200. The blended image sequence includes a first set of blended images 402 at the start of the blended image sequence 400 and a second set of blended images 404 at the end of the blended image sequence 400. The blended image sequence 400 includes a seam 424. The seam 424 is the location in the blended image sequence 400 where the blended image sequence 400 transitions from the end to the start when displayed as a blended cine loop. In other words, when displayed as a blended cine loop, the image sequence 400 progresses from image 16 to image 1 at the seam 424. So, the seam 424 represents the location where the blended cine loop transitions from image 410, which is at the end of the blended image sequence 400, to image 408, which is at the start of the blended image sequence 400. The start is defined to be the portion of the blended image sequence 400 that is displayed immediately after the seam 424, while the end is the portion of the blended image sequence 400 that is displayed immediately before the seam 424. The blended image sequence 400 includes an unblended portion 406 as well. It should be appreciated that according to other embodiments, the blended images may only be at one of the start and the end of the blended image sequence 400. Embodiments may include a different number of blended images. For example, embodiments may blend either more than four images in an image sequence together or less than four images in an image sequence together. Some embodiments may include blending only a two images together to generate a single blended image that is part of a blended images sequence.

Referring to FIG. 4, each column represents an image in the blended image sequence 400. The relative contribution

of the base images and the corresponding non-base images to the blended cine loop is also represented in FIG. 4. Images 408 and 410 are generated using the first weighting function. The base image contributes 50% to the blended image and the non-base image contributes 50% to the blended image according to an exemplary first weighting function below:

$$\text{Image}_{\text{Blended}} = 0.5 * \text{Image}_{\text{Base}} + 0.5 * \text{Image}_{\text{Non-base}}$$

Blended images 412 and 414 are both generated with a weighting function emphasizing the base image more strongly than the non-base image. Images 412 and 414 are generated using a second weighting function. The base image contributes 62.5% to the blended image and the non-base image contributes 37.5% to the blended image according to an exemplary second weighting function below:

$$\text{Image}_{\text{Blended}} = 0.625 * \text{Image}_{\text{Base}} + 0.375 * \text{Image}_{\text{Non-base}}$$

Blended images 416 and 418 are both generated with an embodiment emphasizing the base image more strongly than the non-base image. Images 416 and 418 are generated using the third weighting function. The base image contributes 75% to the blended image and the non-base image contributes 25% to the blended image according to an exemplary third weighting function below:

$$\text{Image}_{\text{Blended}} = 0.75 * \text{Image}_{\text{Base}} + 0.25 * \text{Image}_{\text{Non-base}}$$

Blended images 420 and 422 are both generated with an embodiment emphasizing the base image more strongly than the non-base image. Images 420 and 422 are generated using the fourth weighting function. The base image contributes 87.5% to the blended image and the non-base image contributes 12.5% to the blended image according to an exemplary fourth weighting function below:

$$\text{Image}_{\text{Blended}} = 0.875 * \text{Image}_{\text{Base}} + 0.125 * \text{Image}_{\text{Non-base}}$$

The first weight and the second weight add up to 1 for each of the weighting functions described hereinabove. It should be appreciated that different weighting functions may be used for other embodiments. The blended image sequence 400 shown in FIG. 4 depicts that the weighting functions vary in a linear manner based on the distance of the blended image from the seam 424. While the concept of the seam makes the most sense with respect to a blended cine loop, it is displayed on the blended image sequence since the blended cine loop involves repeatedly playing the blended image sequence 400. The concept and location of the seam may be used with respect to either a blended image sequence or a blended cine loop in this disclosure.

In the exemplary blended image sequence 400 the weighting functions applied to the blended image sequences 402 and 404 vary based on distance of the blended image from the seam 424. Blended images close to the seam 424, like 408 and 410, may emphasize the non-base image more strongly. Meanwhile, images further from the seam 424, such as 420 and 422, may emphasize the non-base image less strongly than the base image. In FIG. 4, the weighting functions vary in a linear manner based on distance from the seam 424. However, it should be appreciated that the weighting functions may be adjusted in a different manner in other embodiments. Different weighting functions may be used based on the position of the blended images with respect to the seam 424 in order to generate a smoother transition when displayed as a blended cine loop. Blended images close to the seam, like 408 and 410 may emphasize the non-base image more strongly in order to increase the likelihood of a smooth transition between the last image 410

in the blended image sequence 400 and the first image 408 in the blended image sequence 400. It may be advantageous to decrease the contribution of the non-base images to the blended images further from the seam 424 in order to more smoothly transition to the unblended portion 406 of the blended image sequence 400. If there is too abrupt of a transition from an image with a strong contribution from the non-base image to an image with a strong contribution from the base-image, there is a risk of adding an additional artifact due to this transition. Additional, the weighting functions may be selected to result in different types of transitions. As discussed previously, the weighting functions adjust the relative contribution of the base image and the non-base in a linear transition in the blended image sequence base on distance from the seam 424. Other embodiments may select the weighting functions differently in order to result in different types of transitions including exponential or quadratic transitions based on distance from the seam 424.

Referring back to FIG. 2, an additional step may be performed before generating the blended image sequence between step 210 and 212. The processor 116 (shown in FIG. 1) may calculate a correlation between a base image and a corresponding non-base image. The processor 116 may select the weighting function used to blend individual images together based on a correlation of a base image selected from the base image sequence 310 (shown in FIG. 3) to a non-base image, selected from either the first non-base image sequence 312 (shown in FIG. 3) or the second non-base image sequence 322 (shown in FIG. 3). The processor 116 may then select the weighting function based on the correlation of the corresponding images. If the corresponding images are strongly correlated, then the processor 116 may assign a weighting function that emphasizes the non-base image relatively strongly in the blended image. However, if the corresponding images are not strongly correlated, it would tend to indicate that the structure of interest had moved from one physiological cycle to the next. This could be due to either patient motion or an irregularity in the patient's physiological cycle. If the corresponding images are not strongly correlated, it would not be beneficial to emphasize the non-base image as strongly in a blended image. As such, the processor 116 may assign a weighting function where the non-base image is not strongly emphasized or where the non-base image is completely excluded from the final cine loop. The processor 116 may calculate a correlation for each pair of corresponding images and select the most appropriate weighting function based on the strength of the correlation. The processor 116 may also select the weighting function for each pair of corresponding images based on multiple factors. For example, the processor 116 may rely on both the position of the blended image from the seam 424 (shown in FIG. 4) and the strength of the correlation. These are just two exemplary variables that could be analyzed by the processor 116 when selecting weighting functions. It should be appreciated that the processor 116 may use additional variables when selecting the weighting function used to generate each blended image in the blended cine loop.

Referring back FIG. 2, at step 214 the processor 116 displays the blended image sequence 400 as a blended cine loop. As discussed previously, the blended cine loop may be generated by displaying the blended image sequence 400 as a loop joined at the seam 424. The blended cine loop will continuously cycle through the images in the blended image sequence 400 for either a present number of cycles or until the clinician decides to stop the displaying of the blended cine loop.

By basing the blended cine loop on the blended image sequence **400** instead of on just the base image sequence **310** (shown in FIG. 3), the blended cine loop has a smoother transition at the seam **424**. Blending additional images from outside the base image sequence **310** make the images close to the seam **424** of sequence **400** more representative of a structure during an average physiological cycle. Blending reduces the effects of any irregularities or unwanted patient motion that occurred during the base image sequence **308**. Additionally, in the embodiment shown in FIG. 3, the non-base ultrasound images were acquired right before and after the base image sequence **308**. A blended cine loop based on data blended in the manner described hereinabove will minimize the effects of any differences between the end of the base image sequence **310** and the start of the base image sequence **310**.

FIG. 5 is a schematic representation of an acquisition of ultrasound data in accordance with an exemplary embodiment. Ultrasound data **502** is represented by a plurality of vertical lines **503**. Each vertical line represents an image just like in previously described FIG. 3. A base image sequence **504** extends from 2π to 4π and represents images acquired during a complete cardiac cycle. A non-base image sequence **506** includes two images that were acquired before the first image sequence **504**. The first non-base image sequence **506** includes a first non-base image **510** and a second non-base image **512**. The first image sequence **506** includes a first base image **514** and a second base image **516**. The first non-base image **510** corresponds to the first base image **514** and the second non-base image **512** corresponds to the second base image **516**. Each corresponding pair of images represents the same cardiac phase. The processor **116** (shown in FIG. 1) may blend the first non-base image **510** with the first base image **514** and the second non-base image **512** with the second base image **516** in accordance with an embodiment. The processor **116** may apply a different weighting function when combining the first non-base image **510** with the first base image **514** and the second non-base image **512** with the second base image **516** to generate a blended cine loop. According to another embodiment (not shown), the processor **116** may blend a single non-base image with a corresponding base image to generate a blended image sequence. The blended image sequence may be displayed as a blended cine loop on a display device such as the display device **118** shown in FIG. 1.

FIG. 6 is a schematic representation of a blended image sequence **600** that is generated according to an exemplary embodiment described with respect to FIG. 5. The blended image sequence **600** may be displayed as a blended cine loop by repeatedly displaying the images in the blended image sequence **600**. There are 11 numbered columns in FIG. 6. Each column represents an image in the blended image sequence **600**. The blended image sequence **600** includes a set of blended images **602** and an unblended portion **604**. The blended image sequence **600** includes a seam **605**. The seam **605** is the location in the blended image sequence **600** where the blended image sequence **600** transitions from the end to the start when displayed as a blended cine loop. In other words, when displayed as a blended cine loop, the image sequence **600** progresses from image **11** to image **1** at the seam **605**. So, the seam **605** represents the location where the blended cine loop transitions from the image **608**, which is at the end of the blended image sequence **600**, to image **610**, which is at the start of the blended image sequence **400**.

Still referring to FIG. 6, each column represents an image in the blended image sequence. The relative contribution of

the base images and the corresponding non-base images to the blended cine loop is also represented in FIG. 6. Blended image **608** is generated according to a weighting function where the base image contributes 50% to the blended image and the non-base image contributes 50% to the blended image according to an exemplary first weighting function below:

$$\text{Image}_{\text{Blended}} = 0.5 * \text{Image}_{\text{Base}} + 0.5 * \text{Image}_{\text{Non-base}}$$

Blended image **606** is generated according to a weighting function where the base image is weighted more strongly than the non-base image. Image **606** is generated using a second weighting function. The base image contributes 75% and the non-base image contributes 25% according to an exemplary second weighting function below:

$$\text{Image}_{\text{Blended}} = 0.75 * \text{Image}_{\text{Base}} + 0.25 * \text{Image}_{\text{Non-base}}$$

Different weighting functions may be applied to generate the blended images according to other embodiments. Additionally, other embodiments may have a different number of blended images.

FIG. 7 is a schematic representation of a partial volume acquisition **702** in accordance with an exemplary embodiment. FIG. 6 includes the probe **106** and a heart **704**. The partial volume acquisition **702** is divided into three sub-volumes: a first sub-volume **706**, a second sub-volume **708**, and a third sub-volume **610**. According to an exemplary embodiment, the processor **116** controls the probe **106** to acquire an image sequence of each of the sub-volumes **706**, **708**, and **610** for longer than a cardiac cycle. The processor may use the method previously described with respect to FIGS. 2, 3, and 4 in order to individually acquire data for the first sub-volume **706**, the second sub-volume **708**, and the third sub-volume **610**. This results in the generation of a blended image sequence for each of the sub-volumes. As previously described, the blended image sequence reduces spatial and phase discontinuities present compared to the base image sequence **310**. The processor **116** then stitches the data together from the three sub-volumes to generate a single blended volume. The processor **116** combines each image based on both cardiac phase and location. The processor **116** matches images showing a common phase from the first sub-volume **706** with corresponding images from the second sub-volume **708** and the third sub-volume **610**. When the processor **116** generates the blended image sequence of the whole volume **702**, the processor **116** combines images both spatially and temporally. Partial volume acquisitions are particularly sensitive to image artifacts since any spatial discontinuities are readily visible at the interfaces between each of the partial volumes. Additionally, a cine loop of the final volume may have a slightly different artifact present for each of the sub-volumes when displayed as a cine loop. Therefore, using blended image sequences for each of the sub-volumes in a partial volume acquisition can significantly reduce artifacts due to spatial discontinuities between the various sub-volumes, and artifacts due to spatial and/or phase discontinuities due to seams in a cine loop.

FIG. 8 is a schematic representation of a medical imaging system **800** in accordance with an embodiment. The medical imaging system includes an acquisition device **802**, a processor **804**, and a display device **806**. The acquisition device **802** and the display device **806** are both in electronic communication with the processor **804**. The acquisition device **802** can be a probe for embodiments where the medical imaging system **800** comprises an ultrasound imaging system. The acquisition device **802** can be an X-ray tube and an X-ray detector according to an embodiment where

13

the medical imaging system **800** comprises an X-ray imaging system. The acquisition device **802** can be an X-ray tube and a detector array according to an embodiment where the medical imaging system **800** comprises a computed tomography imaging system. It should be appreciated by those skilled in the art that the acquisition device **802** can include other components according to additional embodiments where the medical imaging system **800** comprises a different imaging modality.

The processor **804** may be configured to control the medical imaging system **800** in a method similar to the method **200** (shown in FIG. 2). The method **200** was described hereinabove with respect to an ultrasound imaging system and ultrasound data. The processor **804** may include any processor-based or microprocessor-based system. The processor may include ASICs, microcontrollers, logic circuits, or any other circuit or processor capable of executing a set of commands or instructions. It should be appreciated that the processor **804** may be configured to perform the method **200** using data from a modality other than ultrasound. For example, the processor **804** may be configured to implement the method **200** using CT data for embodiments where the medical imaging system is a CT imaging system; the processor **804** may be configured to implement the method **200** using MRI data for embodiments where the medical imaging system is a MRI system; and the processor **804** may be configured to implement the method **200** using X-ray data for embodiments where the medical imaging system is a X-ray imaging system. The display device **806** may include a monitor, a display, an LED flat screen, an OLED screen, a projector, or any other device capable of displaying an image.

This written description uses examples to disclose the invention, including the best mode, and also to enable any person skilled in the art to practice the invention, including making and using any devices or systems and performing any incorporated methods. The patentable scope of the invention is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they have structural elements that do not differ from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal language of the claims.

We claim:

1. A method of medical imaging comprising:

acquiring image data of a periodically moving structure over more than a single physiological cycle, the image data comprising a plurality of images representing the structure at different phases of a physiological cycle; associating phase information from the physiological cycle with the image data;

identifying a base image sequence from the image data based on the phase information, the base image sequence corresponding to an integral number of physiological cycles;

identifying a plurality of non-base images in the image data, where the plurality of non-base images were acquired either before or after the base image sequence during the process of said acquiring the image data of the periodically moving structure;

generating a blended image sequence, the blended image sequence comprising a start, an end, a set of blended images, an unblended portion, and a seam indicating a location in the blended image sequence where the blended image sequence transitions from the end to the start when the blended image sequence is displayed as

14

a blended cine loop, where the set of blended images is generated by blending each of the plurality of non-base images with a corresponding one of the base images according to one of a plurality of weighting functions, where the weighting function used to control the blending is selected based on a distance of the blended image from the seam, where the set of blended images reduces the appearance of the seam when the blended image sequence is displayed as the blended cine loop; and displaying the blended image sequence as the blended cine loop on a display device.

2. The method of claim 1, wherein the image data comprises ultrasound data.

3. The method of claim 1, wherein the image data comprises X-ray data or computed tomography data.

4. The method of claim 1, wherein the image data comprises magnetic resonance imaging data.

5. The method of claim 1, wherein the structure comprises either at least a portion of a heart or a carotid artery.

6. The method of claim 5, wherein the physiological cycle comprises a cardiac cycle and the phase information comprises cardiac phase information.

7. The method of claim 6, further comprising acquiring the cardiac phase information with an ECG machine during the process of said acquiring the image data.

8. The method of claim 1, wherein identifying the plurality of non-base images comprises identifying a non-base image sequence acquired before the base image sequence.

9. The method of claim 8, further comprising identifying a second non-base image sequence acquired after the base image, where the second non-base image sequence is identified from the acquired image data of the periodically moving structure, and wherein generating the blended image sequence further comprises blending the base image sequence with both the first non-base image sequence and the second non-base image sequence.

10. The method of claim 1, where the weighting functions are selected to vary in a linear manner based on distance of the blended image from the seam.

11. The method of claim 1, where the weighting functions are selected to emphasize the non-base image more strongly at a first location compared to a second location, where the first location is closer to the seam than the second location.

12. The method of claim 11, where the weighting functions are selected to emphasize the non-base image more strongly than the base image at the first location and to emphasize the base image more strongly than the non-base image at the second location.

13. A method of medical imaging comprising:

acquiring image data of a periodically moving structure over more than a single physiological cycle, the image data comprising a plurality of images representing the structure at different phases of the physiological cycle; associating phase information from the physiological cycle with the image data;

identifying a base image sequence from the image data corresponding to an integral number of physiological cycles, the base image sequence including first and second base images with associated first and second phases;

identifying first and second non-base images in the image data, the first non-base image representing the first phase and the second non-base image representing the second phase, where the first and second non-base images were acquired either before or after the base image sequence during the process of said acquiring the image data;

15

generating a blended image sequence, the blended image sequence comprising a start, an end, a set of blended images, an unblended portion, and a seam indicating a location in the blended image sequence where the blended image sequence transitions from the end to the start when the blended image sequence is displayed as a blended cine loop, where generating the blended image sequence comprises blending the first non-base image with a first corresponding base image in the base image sequence according to a first weighting function to generate a first blended image and blending the second non-base image with a second corresponding base image in the base image sequence according to a second weighting function to generate a second blended image, where the set of blended images reduces the appearance of the seam when the blended image sequence is displayed as the blended cine loop, where the second weighting function is different than the first weighting function, and where at least one of the first blended image and the second blended image is adjacent to the seam; and displaying the blended image sequence as the blended cine loop on a display device.

14. The method of claim 13, wherein the weighting functions are selected based on a distance of a resulting blended image from the seam in the blended cine loop.

15. The method of claim 14, wherein the first blended image is closer to the seam in the blended cine loop than the second blended image, and wherein the first weighting function emphasizes the first non-base image more strongly than the second weighting function emphasizes the second non-base image.

16. The method of claim 13, further comprising selecting a value for the first weighting function based on a level of similarity between the first non-base image and the first base image.

17. The method of claim 16, wherein selecting the value for the first weighting function comprises selecting the value that emphasizes the base image more strongly if the level of similarity between the first non-base image and the first base image is high.

18. An medical imaging system comprising:
an acquisition device;
a display device; and

a processor in electronic communication with the acquisition device and the display device, wherein the processor is configured to:
control the acquisition device to acquire image data of a periodically moving structure over more than a single physiological cycle, the image data comprising a plurality of images representing the structure at different phases of a physiological cycle;

16

associate phase information from the physiological cycle with the image data;

identify a base image sequence from the image data based on the phase information, the base image sequence corresponding to an integral number of physiological cycles;

identify a plurality of non-base images in the image data, where the plurality of non-base images were acquired either before or after the base image sequence during the process of said acquiring the image data of the periodically moving structure;

generate a blended image sequence, the blended image sequence comprising a start, an end, a set of blended images, an unblended portion, and a seam indicating a location in the blended image sequence where the blended image sequence transitions from the end to the start when the blended image sequence is displayed as a blended cine loop, where the blended portion of the blended image sequence is generated by blending each of the plurality of non-base images with a corresponding one of the base images according to one of a plurality of weighting functions, where the weighting function used to control the blending is selected based on a distance of the blended image from the seam, where the set of blended images reduces the appearance of the seam when the blended image sequence is displayed as the blended cine loop; and

display the blended image sequence as the blended cine loop on the display device.

19. The medical imaging system of claim 18, wherein the processor is configured to automatically identify the base image sequence.

20. The medical imaging system of claim 18, wherein the processor is configured to acquire the image data as part of a partial volume acquisition.

21. The medical imaging system of claim 18, wherein the plurality of non-base images are part of a non-base image sequence.

22. The medical imaging system of claim 21, wherein the processor is configured to use a different weighting function for blending each image of the non-base image sequence with the corresponding image from the base image sequence.

23. The medical imaging system of claim 22, wherein the processor is configured to select the different weighting function based on a distance of a corresponding image pair from a seam in the blended cine loop.

24. The medical imaging system of claim 18, wherein the medical imaging system is an ultrasound imaging system, and wherein the acquisition device comprises a probe.

* * * * *

专利名称(译)	医学成像系统和用于产生混合电影回路的方法		
公开(公告)号	US9480403	公开(公告)日	2016-11-01
申请号	US14/107895	申请日	2013-12-16
[标]申请(专利权)人(译)	N22 E.U. 通用电气公司		
申请(专利权)人(译)	N22 E.U. 通用电气公司		
当前申请(专利权)人(译)	通用电气公司 N22 E.U.		
[标]发明人	PERREY CHRISTIAN BUCKTON DANIEL HOENIGMANN DIETER		
发明人	PERREY, CHRISTIAN BUCKTON, DANIEL HOENIGMANN, DIETER		
IPC分类号	A61B8/00 A61B5/00 A61B8/08 A61B5/0402 A61B6/03 A61B6/00 A61B5/055		
CPC分类号	A61B5/0044 A61B6/463 A61B8/0866 A61B8/463 A61B8/5284 A61B5/0402 A61B5/055 A61B5/7425 A61B6/032 A61B6/503 A61B8/481		
其他公开文献	US20150164330A1		
外部链接	Espacenet USPTO		

摘要(译)

一种用于产生和显示混合电影回路的医学成像系统和方法。该系统和方法包括获取图像数据和识别图像数据中的基本图像序列。该系统和方法包括识别从基础图像序列的外部获取的图像数据中的至少一个非基础图像，并且从基础图像序列和至少一个非基础图像生成混合图像序列。该系统和方法包括将混合图像序列显示为显示设备上的混合电影回路。

