

(19)



(11)

**EP 1 534 140 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**02.01.2019 Bulletin 2019/01**

(51) Int Cl.:  
**A61B 8/14** (2006.01) **B06B 1/06** (2006.01)  
**G10K 11/00** (2006.01)

(21) Application number: **03764617.1**

(86) International application number:  
**PCT/US2003/021964**

(22) Date of filing: **16.07.2003**

(87) International publication number:  
**WO 2004/006775 (22.01.2004 Gazette 2004/04)**

### (54) **ULTRASOUND ARRAY TRANSDUCER FOR CATHETER USE**

ULTRASCHALLWANDLER FÜR DEN KATHETERGEBRAUCH

RESEAU DE TRANSDUCTEURS ULTRASONORES UTILISE PAR UN CATHETER

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **17.07.2002 US 196561**

(43) Date of publication of application:  
**01.06.2005 Bulletin 2005/22**

(73) Proprietor: **Vernon**  
**37038 Tours Cedex 1 (FR)**

(72) Inventors:  
• **FLESCH, Aimé**  
**78570 Andrésy (FR)**  
• **LACAZE, Elisabeth**  
**31170 Tournefeuille (FR)**  
• **NGUYEN-DINH, An**  
**37520 La Riche (FR)**  
• **AUCLAIR, Philippe**  
**37100 Tours (FR)**

• **DUFAIT, Rémi**  
**37000 Tours (FR)**  
• **MAUCHAMP, Pascal**  
**37230 Fondettes (FR)**

(74) Representative: **Addiss, John William et al**  
**Mewburn Ellis LLP**  
**City Tower**  
**40 Basinghall Street**  
**London EC2V 5DE (GB)**

(56) References cited:  
**EP-A- 0 782 125 WO-A-01/45550**  
**WO-A-88/09150 US-A- 5 054 492**  
**US-A- 5 054 492 US-A- 5 297 553**  
**US-A- 5 297 553 US-A- 5 735 282**  
**US-A- 5 735 282 US-A- 5 795 299**  
**US-A- 5 844 349 US-A- 6 078 831**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 1 534 140 B1**

## Description

### Background of the invention

#### 1. Field of the Invention

**[0001]** The invention relates to an ultrasonic linear array transducer for utilization in catheter instruments and to methods of manufacturing curved linear array transducers for catheter-mounted applications so as to comply with acoustic and surgical specifications relating to such products.

#### 2. Related Art

**[0002]** Intraluminal catheter-mounted ultrasonic transducers of several different kinds and forms have been widely discussed in the literature. Usually, the transducing device is attached at, or in the vicinity of, the tip end of the catheter, and wave radiation is then directed outwardly from the catheter either in a transverse radial mode, longitudinal radial mode, forwardly directed mode, circular radial mode or a combination thereof. The catheter instrument is basically comprised of an elongated tube having, at one end thereof, an insertion tip wherein the transducer is mounted and terminated at the other end by a handle wherein are gathered the bending controls for the instrument. Catheters designed for use in cardiac examinations commonly have a diameter ranging from 3 to 10 French catheter scale, meaning that the external diameter of the inserting tube does not exceed a value of, respectively, 1 to 3.3 mm. The tube is approximately of 1 to 2 meters long and is connected to the imaging transducer of the system by a flexible coupler which is capable of causing bending of the transducer tip in two or four directions.

**[0003]** An example of an imaging catheter is disclosed by US Patent No. 3,938,502 to Bom, wherein the catheter is a circular radially emitting device. The elements of the transducer array are disposed around the catheter circumference to form a circular scanning image. Such product is particularly well suited to arterial applications and more specifically, to examining for arteriosclerosis in plaque wherein a sectional view of the artery is required.

**[0004]** In US Patent No. 4,605,009 to Pourcelot, there is disclosed an endoscope probe for imaging an internal wall of human body. In order to widen the angle of view of the instrument, a curved linear array transducer is associated with optical visualization means. Assembly of the transducer includes the provision of a wire interconnection between the transducer piezoelectric member and a rigid printed circuit board (PCB) located at the bottom side of the transducer, and soldering of coaxial cables to the PCB to complete the interconnection. Such a construction is voluminous and prohibitive of any miniaturization of transducer for implementation thereof in intraluminal probes.

**[0005]** Another endoscopic ultrasonic instrument of interest is disclosed in US Patent No. 5,291,893 to Slayton wherein a linear array transducer is provided at the distal end of an endoscope or catheter. The transducer array is mounted in a tip housing that is capable of rotating around its longitudinal axis thereby providing rotation of the scanning plane without moving the catheter. However, the transducer array construction method includes the provision of an interconnection PCB located beneath the transducer assembly where coaxial cables and piezoelectric contact wires are soldered. Making the interconnection in this way wastes the considerable space behind the array so miniaturization of transducer tip diameter is difficult and the result unreliable. Furthermore, the rotation of the transducer tip with regard to the rest of the catheter requires a dynamic seal at the junction between the two moving parts. This junction is a collection site for dust accumulation and biological contamination so the device can not be reused in surgical operations. Further, with regard to the manufacturing cost of the device, there is no corresponding disposable diagnostic instrument available on the market.

**[0006]** PCT Patent WO92/03972 to Crowley relates to an imaging system combined with an insonifier for detecting the position and orientation of the associated catheter device. The insonifier utilizes ultrasound with a frequency that can be detected by the catheter sensor. The energy transferred between the insonifier and the catheter is maximized when the two devices face each other, so that by identifying the orientation of one of the devices, the position of either can be determined. Because the frequency of transmit energy from the insonifier should be at least in the bandwidth of catheter device, the separation distance between the two devices is limited. The external insonifier, when used as described in the patent, is difficult to control and in actual practice, the alignment of the insonifier relative to the catheter remains approximate.

**[0007]** In PCT Patent WO98/33430 to Curley, there is disclosed a catheter-mounted transducer array for ultrasonic imaging. The transducer includes an end portion surrounding the array and providing a speed of sound therein greater than or equal to  $1250\text{ms}^{-1}$ . The transducer azimuth axis is parallel to the longitudinal axis of the catheter and is molded or sheathed to have an elongated cylindrical tip portion having the same proportions as those of the catheter. The Curley patent discloses two alternative methods of making surrounding material for the array transducer, viz., a molding method and a pre-formed thermoplastic material. The surrounding material is characterized by its cylindrical cross-section without regard to the elevation focus of the array. Accordingly, the speed of sound in the surrounding material must be close to that of the propagation medium so as not to modify the focus of transducer. Otherwise, no details as to the placement of the transducer in molding method are provided. The pre-formed sheathing method provides for the assembly of the transducer array into the pre-formed

sheath using a glass tube associated with a mandrel and subsequent heating to eliminate air gaps between the transducer array and the polymer sheath. One of the important drawbacks of this method concerns the difficulty of the insertion of the transducer array into the polymer sheath without causing damage to the array due to pressure exerted thereon. Further, the heat applied to the polymer sheath to shrink the sheath onto the array will inherently transfer heat to the transducer array and this heat can depolarize the piezoelectric structure thereof. Another aspect of the Curley patent that is not clearly described concerns the angular orientation of the array in the case where the polymer sheath is provided with an acoustic window which is designed with a particular radius (concave or convex). It is evident, that with this arrangement, the position of the elevation plane of the array with regard to the geometry of lens is of critical importance.

**[0008]** WO-A-88/09150 discloses an ultrasonic transducer array assembly for catheter based use, to which an array of miniature ultra sound crystals is mounted on a sub assembly which itself is mounted on a small linear catheter. The array has a plurality of transducers, each of which has a backing, a classic transducer chip, a quarter wavelength matching layer and a ribbon connector.

#### Summary of the Invention

**[0009]** According to the present invention, ultrasonic imaging transducer arrays for catheter use may be produced which enables implementation of curved or linear array shapes as well as provides for detection of the array orientation by a radio-opacity method described below. The invention is also compatible with low cost fabrication requirements and thus finds application in the high volume disposable catheter market.

**[0010]** According to the present invention there is provided a catheter-based ultrasonic transducer array assembly, said assembly comprising:

- at least one matching layer;
- a backing member;
- a piezoelectric member having elementary transducers aligned in one direction in azimuth and also having electrodes, the piezoelectric member being sandwiched between the at least one matching layer and the backing member;
- at least one stiffening element disposed rearwardly of said piezoelectric member so as to provide stiffening of said assembly;
- a flexible circuit for providing connection between the electrodes of the piezoelectric member and at least one external cable; and
- a surrounding protective cover of a circular cross section to match a diameter of the catheter;
- wherein the transducer assembly has an azimuthal axis and has, in use, an angular position, wherein an image of the transducer assembly is derived using

imaging energy of predetermined wavelengths, and wherein said at least one stiffening element of said assembly comprises at least one element opaque to said predetermined wavelengths and oriented along the azimuthal axis of the transducer assembly to enable a user to view the at least one element in an image of the transducer assembly derived from an output of the transducer assembly and thus determine the angular position of the transducer assembly.

**[0011]** Further features and advantages of the present invention will be set forth in, or apparent from, the detailed description of preferred embodiments thereof which follows.

#### Brief Description of the Drawings

##### **[0012]**

Figure 1 is a schematic plan view of an ultrasonic catheter system including a perspective view, partially in cross section, of a curved linear transducer array of the catheter system;

Figure 2 is a perspective view, partially in cross section, of a linear transducer array for catheter use;

Figure 3 is a more detailed cross sectional view of the transducer array of the catheter system of Figures 1 and 2;

Figure 4 is a perspective view of the transducer array of Figure 3, as equipped with a flexible interconnection assembly;

Figure 5 is a front view of the flexible interconnection assembly of Figure 4, in accordance with a preferred embodiment;

Figure 6 is a perspective view of a preferred method of folding the flexible interconnection assembly of Figures 4 and 5 so as to achieve a compact device;

Figure 7 is a perspective view of a step in a method of pre-formed fabrication of the dorsal element reinforced backing device of the array of Figure 3;

Figure 8 is a perspective view of a tooling apparatus or molding tool for molding of the transducer tip of Figure 3;

Figure 9 is a cross sectional view of the molding tool of Figure 8, as equipped with flat lateral "cheeks" for a lens molding operation;

Figure 10 is a cross sectional view of the molding tool of Figure 8, as equipped with "dig cheeks" for a protective cover molding operation.;

Figures 11(a) to 11 (c) are top plan views used in explanation of a method for detecting the position of a curved array transducer in the body of a patient through the use of angiography visualization;

Figures 12(a) to 12(e) are top plan views (angiographic views) of a transducer tip as equipped in accordance with a further embodiment so as to enable angular position detection;

Figures 13(a) to 13(e) are top plan views (angiographic views) of a transducer tip as equipped in accordance with yet another embodiment so as to enable angular position detection;

Figures 14(a) and 14(b) are perspective views of a profiled protective tube or protective cover showing a transducer assembly inserted therein and showing tube and assembly prior to such insertion, respectively;

Figure 15 is a perspective view of a step in a molding operation for the transducer end-tip; and

Figure 16 is a perspective view of an inserting tool for the protective cover assembly, in accordance with a further embodiment.

#### Detailed Description of the Preferred Embodiments

**[0013]** Referring to Figure 1, there is shown an ultrasonic transducer array **2** for catheter applications. The transducer array is particularly designed to match the diameter of the cardiac 9-10 French catheter scale (FCS). However, the device can be adapted for use with other diameters, even a 1 mm catheter (FCS 3).

**[0014]** In accordance with common practice, an imaging cardiac catheter is generally comprised of a flexible tube or tubing **6** of about 1-2 meters in length. Tube **6** is terminated by a transducer tip **1** which is attached to the distal end of the tube **6** by the intermediate of a bendable coupler **5**, although coupler **5** is optional. Unlike the bendable couplers designed for reusable endoscopes, bendable couplers for catheters are of a very simple design to strictly limit the features thereof to the essential functionality, viz., bending. In most cases, the bendable coupler **5** would simply comprise a flexible tube portion equipped with one or two pairs of command cables which are adapted to slide along lumens disposed on the periphery of the flexible tube portion. This sliding action of one of the command cables will result in bending of the tube portion on the side thereon where the corresponding cable is located.

**[0015]** At the distal extremity of the bendable coupler **5**, a transducer tip **1** is mounted. The interconnection means for the associated imaging transducer **2** pass through the central hollow space within the bendable coupler **5** so as to extend to the main tube of catheter and are then connected to an external coaxial cable **8** adapted to be plugged into an imaging system **7**. All of the interconnection means for the external cables and command cables are commonly gathered together in a handle **9** of the probe device which is usually a separation point between disposable and reusable parts of the device. A more specific description of endoscope constructions of this type can be found, for example, in US Patent No. 5,681,263 to Flesch.

**[0016]** Figures 1 and 2 respectively show curved and linear array transducer shapes suited for catheter applications. However, the description of a preferred embodiment here will focus on the curved array ultrasonic trans-

ducer shown in Figure 1. The transducer tip **1** is preferably of an elongated shape with a curvature in the azimuthal plan of the transducer **2**. Because the transducer array **2** is driven by electronic phase shift beamformer (not shown) and is based on the curvature of the emitting surface, the insonified paths will define a sector angle indicated at **4** which represents the scanning area of the probe.

**[0017]** Referring to Figure 2, in a similar manner, the scanning area **4** of the probe of Figure 2 is generally in the shape of a rectangular section as shown in solid lines. However, sophisticated electronic beamformer techniques can be used to produce a sector shape scanning area **41**, even if a linear array is used, by steering the acoustic beam with a predetermined angle when arriving at the extremity of array. It is noted that the image quality is somewhat deteriorated in this area but the user is still provided with specific features that only a curved or phased array can provide.

**[0018]** Returning to Figure 1, the catheter assembly also comprises a shoulder portion **12** which is designed to interfit with the associated mounting part located at the distal end of bendable coupler **5**.

**[0019]** As will be understood by those skilled in the art, the term transducer array is used here to designate all types of transducer arrays that comprise elementary transducers aligned in one direction in azimuth, and thus this term includes linear, curved and phased arrays.

**[0020]** Figure 3 shows a cross sectional view of a transducer tip according to a preferred embodiment. As illustrated, the transducer assembly **2** is disposed in the top portion of the transducer tip **1** and comprises a piezoelectric member **22** sandwiched between one or more matching layers **23** and a backing member **21**. The front face of the transducer **2** is preferably covered by an acoustic focusing lens **13** which is advantageously made of an elastomeric rubber providing a sound velocity therein lower than that of the propagation medium, such as the silicon rubbers TSE 3331 from GE Silicones, NY, USA. The backing member **21** includes a set of parallel spring elements or sticks **10** that are disposed alongside each other and located at or near the rear or bottom side of the backing member **21**.

**[0021]** A flexible printed circuit **11** is bonded to the rear electrode (not shown) of the piezoelectric member **22** through connecting portion as described below and folded to assume a longitudinal shape as shown in Figure 4.

**[0022]** The transducer assembly **2** is embedded in a protective covering or molding **3** which is made of a suitable resin or polymer material and which is of a circular cross section to match the diameter of the catheter. Polymers that are compatible with the use thereof as the embedding molding **3** may be selected from the group consisting of polyurethanes, silicones, and polyether block amides resins (such as Pebax, Registered Trademark) and flexible epoxies. The molding method of mounting transducer assembly **2** is desirable in order to obtain a reliable and cosmetically finished device. How-

ever, other methods for obtaining an embedded transducer tip include, for example, a bonding of a finished transducer assembly into a pre-formed protective tip cover.

**[0023]** To provide a better understanding of the method of manufacturing of an imaging catheter transducer tip according to the preferred embodiment of the invention, reference will now be made to Figures 4 to 10. The method of manufacturing disclosed herein is particularly adapted to a small cross section transducer array and affords low cost fabrication.

**[0024]** In the embodiment shown in Figures 4, 5 and 6, a particular aspect of the management of the flexible circuit **11** is provided. The flexible circuit **11**, which is shown in planar shape in Figure 5, is preferably of a single face design wherein conductive traces **113** are plated on a polyamide film of a thickness of 5 to 25  $\mu\text{m}$ . The opposite face or surface of the film can be covered by a metal sheet or layer (not shown) in order to control the characteristic impedance of the conductive traces **113**. Further, this metal layer provides interference protection with respect to electrical signals travelling through the conductive traces **113**.

**[0025]** In this embodiment, the flexible circuit **11** is of a rectangular shape and has a first top or upper portion **110** which includes regularly spaced traces **113** having a pitch equal to that of the array of transducer. The conductive traces **113** of this first portion **110** are free of a cover layer or protective layer. The width of the portion **110** is equal to or smaller than that of the transducer elevation.

**[0026]** A second portion **111** of the flexible circuit **11** is located at the middle area of the circuit **11** and may be protected by cover layer if desired. The rest of the flexible circuit **11** constitutes a third portion **112** of the circuit **11**. The third portion **112** of circuit **11** is divided longitudinally into strips **112a** to **112d** of equivalent length. It is noted that although four strips are illustrated, there is no limitation on the number of strips comprising the third portion **112**. In general, the number of strips is governed by the ratio of length to elevation of the array. The strips **112a** to **112d** are obtained by spaced cuts through the third portion **112** of the flexible circuit **11**. The cutting operation is advantageously performed by laser cutting or by a die-cutting process. The distal extremities of strips **112a** to **112d** are terminated in non-protected, metal plated traces in a manner such as to receive, or to be assembled to, optionally provided extending cables.

**[0027]** In an alternative embodiment of flexible circuit **11**, the flexible circuit **11** is provided with a single central portion **110**, surrounded by opposed portions corresponding to portions **111** which are, in turn terminated by portions corresponding to portions **112** at which strips **112a** to **112d** are defined.

Figure 6 is a perspective view of the flexible circuit **11** after being partially folded prior to being assembled to the transducer assembly (not shown in Figure 6). Although for clarity of the illustration, the transducer as-

sembly is not shown in Figure 6, it will be understood that the folding of the circuit **11** illustrated creates a generally rectangular void formed by the portions **110** and **111** of the flexible circuit **11** in which the transducer assembly is received. Figure 6 shows the first portion **110** positioned so as to be bonded to the rear surface of the piezoelectric member of the transducer assembly, and folded perpendicularly to the portion **111**. Portion **112** is then folded the same way with regard to the portion **111** so as to be in parallel with the portion **110**. Strip **112a** is then folded at an angle of 45 degrees with respect to the orientation of traces **113** (not shown in Figure 6) so the strip **112a** is disposed along the azimuthal axis of the array. Next, the second strip **112b** is similarly folded so as to be superimposed on first strip **112a** and so on. At the completion of this operation, the transducer assembly will exhibit a longitudinal shape wherein the flexible circuit **11** occupies a minimum of space and is properly arranged on the rear face of transducer as shown in Figure 4.

**[0028]** Referring again to Figures 1 and 3, as previously described, the piezoelectric member **22** is sandwiched between backing member **21** and matching layer **23**. The piezoelectric member **22** can be a PZT ceramic, a relaxor based single crystal or a composite comprising a blend of piezoelectric and passive materials. The piezoelectric member **22** has electrodes (not shown) plated on its major opposite surfaces and one of the electrodes is divided into a plurality of individual electrodes corresponding to the transducer elements. For interference protection reasons, it is desirable to direct the ground electrode of the piezoelectric member **22** toward the propagation medium so that the spaced electrodes are positioned at the rear face of the transducer and then bonded to the flexible circuit **11**. The bonding operation between the piezoelectric **22** and the flexible circuit **11** is carried out under pressure to avoid the formation of excessive leftover adhesive. This method also maintains the flexibility of the transducer assembly. Adhesives or glues of the families of epoxies or urethanes are suitable candidates for this operation.

**[0029]** To ensure maximizing of the transducer energy transfer function, the front face of the piezoelectric member **22** must be matched to the propagation medium through the addition of one or more matching layers **23** (as described above in connection with Figure 3) having a suitable thickness defined by the following relation:  $t = \lambda/4$ . Another method for optimizing transmission lines employs a transformer as described by B. Bramham "A convenient transformer for matching coaxial lines" in Electronic Engineering (January, 1961) and D. Emerson in QST (1997). Further, the acoustic impedance of such a device is determined with respect to either standard transmission lines or using a polynomial formula proposed by Desilets. In accordance with the usual requirements, when two matching layers are employed, the first matching layer has an impedance higher than that of the second layer assembled thereto so as to be disposed outermost of the transducer assembly. Methods for man-

ufacturing and designing matching layers are widely described in the literature and are disclosed, for example, in Kino "Acoustic Waves" or Anderson "Acoustic Transducer." Matching layers are advantageously obtained by the molding or mechanical grinding of resins or polymers. The piezoelectric **22** is then pressure bonded to the matching layer or layers **23** and the flexible circuit **11** to form an intermediate transducer assembly.

**[0030]** The backing member **21** of the transducer assembly **2**, according to a preferred embodiment thereof, comprises a stiffening or reinforcing arrangement provided by a pair of parallel elongated elements or "sticks" **10** embedded in the thickness of backing member **21**. As indicated above, Figure 3 shows a cross sectional view of the transducer assembly **2** wherein the parallel elements **10** are located symmetrically with regard to the central longitudinal axis of the transducer. The parallel elements **10** are also referred to as "dorsal stiffening sticks."

**[0031]** Referring to Figure 7, a step in a preferred method of manufacturing of the backing member **21** is shown. As illustrated, a rectangular shaped mold **14** is provided having two sets of openings **15a** and **15b**. The diameters of the openings **15a** and **15b** correspond to the diameters of the stiffening elements **10a** and **10b**. Stiffening elements or sticks **10a** and **10b** are preferably made of a spring material in order to provide flexibility to the backing member **21** if the latter is subjected to flexional forces but capable of recovering the initial shape or curvature thereof after removal of the force. Alloys such as NivaFlex® or Stainless steels (PrEN 10270-3) are suitable for this application.

It will be appreciated that in curved transducer array constructions, the mold for backing member **14** is curved as well, and the stiffening elements **10a** and **10b** will have the same curvature.

**[0032]** As shown in Figure 7, resin **210** is poured from a pourer **P** into the mold **14** and hardening thereof ensues. In a "slim line" transducer construction according to the present invention, the backing material for backing member **21** is preferably selected from particle-filled attenuating resins such as Eccogel from Emerson&Cumings, and soft polyurethanes. Methods for obtaining highly attenuating materials are well known in the art and particles such as air filled plastic bubbles or air bubbles are used to provide the backing material with strong back-scattering of incident wave propagation. Additionally, in case of linear or phased array transducers, the stiffening element backing member **21** can be made from a single long base member and individual backing members obtained by cutting the base member to desired lengths.

**[0033]** Figures 8 and 9 depict a tooling apparatus for molding the transducer tip. Once the transducer assembly operation is complete, the transducer assembly **2** is disposed in a molding tool or mold **19**. The mold **19** includes a dorsal carrier or member **16** which is designed to have a curvature corresponding to the curvature of the transducer assembly **2**, if the assembly is curved. The

dorsal carrier **16** is bounded at each extremity by plates **18a** and **18b** which are secured to the dorsal carrier **16** by a screw system, i.e., a plurality of screws. Care must be taken with respect to the geometry of the plate-dorsal carrier assembly in order to provide placement of the tooling apparatus within precise tolerances.

**[0034]** In this embodiment, the molding tool **19** is completed by adding two flat lateral cheeks or side members **17c** and **17d** to allow the molding of the focusing lens **13** described above in connection with Figure 3. Because the carrier **16** has the same width as the transducer assembly, there should be no occurrence of excessive lens resin.

**[0035]** Once the lens material is cured, the lateral cheeks or side members **17c** and **17d** are then removed from tool **19** and will be replaced by further side mold members or "dig cheeks" **17a** and **17b** as shown in Figure 10. As illustrated, cheeks **17a** and **17b** of Figure 10 form a cylindrical hollow section with circular opening when cheeks **17a** and **17b** are coupled together. The hollow space formed is then filled with resin to obtain the protective cover **3** for the transducer **2**, and thus, in doing so, determining the final diameter of the transducer tip **1**. It is to be noted that the resin material used for lens **13** normally differs from that of protective cover **3**. However, in a case where there is no particular specification with respect to transducer focus, the same resin can be used for both and so that only the step described in connection with Figure 10 need be performed.

**[0036]** Another aspect of the cardiac catheter provided in accordance with the preferred embodiment of the invention concerns the ability to detect the orientation of the imaging transducer array **2** once inserted into an organ of the patient being treated. In practice, the catheter device is tracked and monitored using angiography X-ray imaging. During the insertion and use, the user is able to visualize the catheter tip in the body of the patient under X-ray ionization. However, when the transducer is of a linear elongate shape as opposed to a linear curved shape, no information is provided regarding the angular position of the transducer scanning plane, so that manual searching by the user of the image is required. When the transducer tip **1** is of a curved shape as shown, e.g., in Figure 1, the X-ray images can provide a user with information regarding the transducer orientation by comparing the curvature of the transducer tip **1** with the images obtained. This is shown in Figures 11(a) to 11(c). For example, if the image is of a linear appearance as shown in Figure 11(b), this means that that transducer scanning plane is aligned with ionizing source. On the other hand, an image having maximum curvature is obtained when the transducer scanning plane is rotated by 90° with respect to the ionizing source. Of course, the direction of the aligned scanning plane (0°) can only be specifically identified with rotation of the probe so that, for example, a left rotation of the catheter accompanied with appearance of a left convexity (-90°) as shown in Figure 11(a) (i.e., a leftward facing convex curvature as viewed in the

drawings) indicates that the front surface of the transducer is facing the ionizing source (oriented toward the ionizing source), whereas in the case of a left concavity (+90°) as shown in Figure 11(c), the transducer is facing away from, and emitting in the same direction as, the ionizing source.

**[0037]** An alternative method for detecting the angular position of transducer tip is based on observation of the dorsal sticks or elements **10a**, **10b** embedded in the backing member **21** of the transducer assembly **2**. Referring to Figures 12(a) to 12(e), in this embodiment, the transducer tip is provided with dorsal elements **10a** and **10b** of unequal length. As illustrated, element **10a** is shorter than element **10b** so that each cardinal (90°, 180°) angular position of the transducer array **2** can be recognized by observation of the appearance of the two elements **10a**, **10b**. Figures 12(a) to 12(e) show the relative positioning of the elements **10a**, **10b** for angular orientations of -180°, -90°, 0°, +90° and +180°, respectively. With this approach, a precise angular position adjustment can be facilitated.

**[0038]** Yet another method for determining or recognizing the angular position of the transducer tip is implemented with a set of dorsal elements **10a**, **10b** which are of same length but are of different diameters as shown in Figures 13(a) to 13(e). More specifically, in this embodiment, the set of elements or sticks comprises a first stick **10a** having a first diameter and a second stick **10b** having a second diameter significantly larger than the first diameter. When the transducer tip **1** is facing the ionizing source (0°), the two diameters are clearly distinguishable from the monitoring images and, moreover, at each cardinal position of the tip (90°, 180°), a particular image is obtained which differs from the others as shown in Figures 13(a) to 13(e), for the angles -180°, -90°, 0°, +90° and +180°, respectively. Accordingly, angular position can be determined in basically the same manner as previously described. Similarly, a hollow element or stick can be used, together with a standard element or stick, or a twisted stick together with a standard stick, can be also used, to provide similar positional information.

**[0039]** In a second example the basic transducer assembly remains unchanged. However, in order to reduce manufacturing cost of the device, the protective cover molding operation described above is omitted and replaced by the use of a pre-formed hollow tube having a hollow or internal cross section which corresponds to the cross section of the transducer assembly. In Figures 14(a) and 14(b), a portion of such a pre-formed profiled tube **20** is shown. Tube **20** can be obtained by cutting the tube from a continuously extruded or injection molded base tube. Suitable materials for tube **20** include materials selected from the group consisting of elastomeric rubbers such as Pebax, PU and the like. It is desirable to select materials having a sound velocity similar than that of biologic tissue in order to not disturb the focal geometry of the transducer. However, where there is a

significant sound velocity difference, suitable compensation can be provided by adjustment of the radius of curvature of the lens **13**.

**[0040]** The portion of tube **20** used to form cover **3**, is cut to a length equal to that of the transducer assembly **2**. As the base tube is obtained from extrusion molding process, the dimensions of a hollow section **23** are made to be somewhat smaller than those of the transducer assembly **2** so that once assembled together, the tube **20** will slightly bear on the external surface of assembly **2** so as to assure that perfect contact is provided between the covering tube **20** and the external surface of the transducer member **2**.

**[0041]** As shown in Figure 16, the insertion operation wherein transducer assembly **2** is inserted into tube **20** is advantageously achieved using a vacuum cylinder **25** that causes expanding of the diameter of tube **20** in such proportion as to permit the transducer assembly **2** to be inserted into tube **20** without the generation of excessive friction. As illustrated, the vacuum cylinder **25** is constructed with an internal volume **26** which communicates with a vacuum pump **VP** via an input conduit **28**. The internal surface **251** of cylinder **25** is provided with a plurality of randomly distributed through holes **29** (shown in dashed lines) and cylinder **25** preferably has a diameter of 5% greater to that of the profiled tube **20**. The cylinder **25** is closed at its two extremities by two end plates or lids (not shown) which thus define a central hollow space slightly smaller than the diameter of the profiled tube **20**. In operation, the profiled tube **20** is placed in the cylinder **25** and the lids (not shown) are mounted at the extremities of cylinder, vacuum is then provided to the cylinder **25** from pump **VP** and the external surface of the profiled tube **20** is drawn outwardly so as to contact the surface **251**. The hollow section or opening **23** of tube **20** is inherently caused to expand in size so that the transducer assembly **2** can then be inserted therein. Prior to inserting the transducer assembly **2**, an adhesive, such as a suitable glue, is applied, preferably to the entire surface of the transducer assembly **2**, in order to provide an air gap free assembly.

**[0042]** Figure 15 shows an end-tip molding operation where the transducer tip **1** is placed into mold **22** which has a hemispherically shaped opening **30** therein. Liquid resin **21** is injected into the opening **24** to fill the space between the transducer assembly **2** and the mold **22** to form the tip extremity of the transducer probe. This tip molding method is more suitable for high quantity production where the fabrication of profiled tube is contemplated. It is important to note that this method of making transducer protection cover is only feasible when applied to a transducer assembly with a perfectly constant cross section. Otherwise, the final product will exhibit an irregular external surface due to the constant thickness and flexibility of the protective cover portion.

**[0043]** The invention is as defined by the appended claims.

**Claims**

1. A catheter-based ultrasonic transducer array assembly (2), said assembly (2) comprising:

at least one matching layer (23);  
 a backing member (21);  
 a piezoelectric member (22) having elementary transducers aligned in one direction in azimuth and also having electrodes, the piezoelectric member (22) being sandwiched between the at least one matching layer (23) and the backing member (21);  
 at least one stiffening element (10) disposed rearwardly of said piezoelectric member (22) so as to provide stiffening of said assembly (2);  
 a flexible circuit (11) for providing connection between the electrodes of the piezoelectric member (22) and at least one external cable (8); and  
 a surrounding protective cover (3) of a circular cross section to match a diameter of the catheter;  
 wherein the transducer assembly (2) has an azimuthal axis and has, in use, an angular position, wherein an image of the transducer assembly (2) is derived using imaging energy of predetermined wavelengths, and wherein said at least one stiffening element (10) of said assembly (2) comprises at least one element opaque to said predetermined wavelengths and oriented along the azimuthal axis of the transducer assembly (2) to enable a user to view the at least one element in an image of the transducer assembly (2) derived from an output of the transducer assembly and thus determine the angular position of the transducer assembly.

2. A transducer array assembly as claimed in claim 1 wherein the at least one matching layer (23) has a front face, said assembly further comprising a focusing lens (13) attached to the front face of the at least one matching layer (23).
3. A transducer array assembly as claimed in claim 1 wherein said stiffening elements (10) are of different lengths.
4. A transducer array assembly as claimed in claim 1 wherein said stiffening elements (10) are of different thicknesses.
5. A transducer array assembly as claimed in claim 1 wherein said at least one element comprises a pair of elongate elements disposed in side by side relation.
6. A transducer array assembly as claimed in claim 5 wherein said elements are of different lengths.

7. A transducer array assembly as claimed in claim 5 wherein said elements are of different thicknesses.

8. A transducer array assembly as claimed in claim 1 wherein said at least one matching layer (23), said backing member (21), and said piezoelectric member (22) form a transducer having a cross section, and said assembly (2) further comprises an elastomeric tube (20), having an internal hollow space therein of a cross section corresponding to the cross section of the transducer, in which said transducer is disposed so as to form a transducer tip, one end of said transducer tip comprising a smooth tip extremity molded from a flexible resin.

9. A transducer array assembly as claimed in claim 1 wherein said electrodes include front and rear electrodes and said flexible circuit (11) is assembled to the rear electrodes of the piezoelectric member (22), said flexible circuit (11) being folded along a lateral side of the backing member and said flexible circuit (11) including flexible strips (112a to 112d) folded so as to provide superposition of the strips on a rear surface of the backing member (21).

10. An ultrasonic catheter device comprising:

an elongate tubular member (6) having a distal end; and  
 a transducer tip (1) located at the distal end of the tubular member (6), said transducer tip (1) undergoing different positioning in use and comprising a transducer array assembly according to any one of the preceding claims.

**Patentansprüche**

1. Katheterbasierte Ultraschallwandlergruppenanordnung (2), wobei die Anordnung Folgendes umfasst:

mindestens eine Anpassschicht (23);  
 ein Stützelement (21);  
 ein piezoelektrisches Element (22), das Elementarwandler aufweist, die in eine Azimut-Richtung fluchtend ausgerichtet sind, und auch Elektroden aufweist, wobei das piezoelektrische Element (22) zwischen der mindestens einen Anpassschicht (23) und dem Stützelement (21) sandwichartig angeordnet ist;  
 mindestens ein Versteifungselement (10), das hinter dem piezoelektrischen Element (22) angeordnet ist, um so eine Versteifung der Anordnung (2) bereitzustellen;  
 eine flexible Schaltung (11), um eine Verbindung zwischen den Elektroden des piezoelektrischen Elements (22) und mindestens einem externen Kabel (8) bereitzustellen; und



- eine umschließende Schutzabdeckung (3) mit kreisförmigem Querschnitt, um zu einem Katheterdurchmesser zu passen;  
wobei die Wandleranordnung (2) eine Azimutachse aufweist und in Verwendung eine Winkelposition aufweist, wobei ein Bild der Wandleranordnung (2) unter Verwendung von bildgebender Energie von vorbestimmten Wellenlängen abgeleitet wird, und wobei das mindestens eine Versteifungselement (10) der Anordnung (2) mindestens ein Element umfasst, das für die vorbestimmten Wellenlängen undurchlässig ist und entlang der Azimutachse der Wandleranordnung (2) ausgerichtet ist, um es einem Anwender zu ermöglichen, das mindestens eine Element in einem Bild der Wandleranordnung (2) zu sehen, das von einer Ausgabe der Wandleranordnung ausgegeben worden ist, und somit die Winkelposition der Wandleranordnung zu bestimmen.
2. Wandlergruppenanordnung nach Anspruch 1, wobei die mindestens eine Anpassschicht (23) eine Vorderseite aufweist, wobei die Anordnung ferner eine Fokussierlinse (13) umfasst, die an der Vorderseite der mindestens einen Anpassschicht (23) angebracht ist.
  3. Wandlergruppenanordnung nach Anspruch 1, wobei die Versteifungselemente (10) unterschiedliche Längen aufweisen.
  4. Wandlergruppenanordnung nach Anspruch 1, wobei die Versteifungselemente (10) unterschiedliche Dicken aufweisen.
  5. Wandlergruppenanordnung nach Anspruch 1, wobei das mindestens eine Element ein Paar von länglichen Elementen umfasst, die in einem Seite-an-Seite-Verhältnis angeordnet sind.
  6. Wandlergruppenanordnung nach Anspruch 5, wobei die Elemente unterschiedliche Längen aufweisen.
  7. Wandlergruppenanordnung nach Anspruch 5, wobei die Elemente unterschiedliche Dicken aufweisen.
  8. Wandlergruppenanordnung nach Anspruch 1, wobei die mindestens eine Anpassschicht (23), das Stützelement (21) und das piezoelektrische Element (22) einen Wandler mit einem Querschnitt bilden, und die Anordnung (2) ferner ein elastomeres Rohr (20), das darin einen Innenhohlraum mit einem Querschnitt, der dem Querschnitt des Wandlers entspricht, aufweist, in dem der Wandler angeordnet ist, um so eine Wandlerspitze zu bilden, wobei ein

Ende der Wandlerspitze ein aus einem flexiblen Harz geformtes, äußerstes Ende mit einer gleichmäßig verlaufenden Spitze umfasst.

9. Wandlergruppenanordnung nach Anspruch 1, wobei die Elektroden vordere und hintere Elektroden umfasst, und die flexible Schaltung (11) an den hinteren Elektroden des piezoelektrischen Elements (22) angebracht ist, wobei die flexible Schaltung (11) entlang einer lateralen Seite des Stützelements gefaltet ist, und die flexible Schaltung (11) flexible Streifen (112a bis 112d) umfasst, die so gefaltet sind, dass sie eine Überlagerung der Streifen auf einer Rückseite des Stützelements (21) bereitstellen.
10. Ultraschallkathetervorrichtung, umfassend:
  - ein längliches rohrförmiges Element (6) mit einem distalen Ende; und
  - eine Wandlerspitze (1), die an dem distalen Ende des rohrförmigen Elements (6) angeordnet ist, wobei die Wandlerspitze (1) in Verwendung einer unterschiedlichen Positionierung unterzogen wird und eine Wandlergruppenanordnung gemäß einem der vorangegangenen Ansprüche umfasst.

## Revendications

1. Ensemble réseau de transducteurs ultrasonores basé sur cathéter (2), ledit ensemble (2) comprenant ;  
au moins une couche d'adaptation (23) ;  
un élément de renfort (21) ;  
un élément piézoélectrique (22) comportant des transducteurs élémentaires alignés dans une direction azimutale et ayant également des électrodes, l'élément piézoélectrique (22) étant pris en sandwich entre l'au moins une couche d'adaptation (23) et l'élément de renfort (21) ;  
au moins un élément raidisseur (10) disposé à l'arrière dudit élément piézoélectrique (22) de sorte à assurer le raidissement dudit ensemble (2) ;  
un circuit souple (11) pour assurer la connexion entre les électrodes de l'élément piézoélectrique (22) et au moins un câble externe (8) ; et  
un couvercle de protection enveloppant (3) d'une section transversale circulaire pour s'adapter à un diamètre du cathéter ;  
dans lequel l'ensemble transducteur (2) a un axe azimutal et présente, en utilisation, une position angulaire, dans lequel une image de l'ensemble transducteur (2) est obtenue en utilisant une énergie d'imagerie de longueurs d'ondes prédéterminées, et dans lequel ledit au moins un élément raidisseur (10) dudit ensemble (2) comprend au moins un élément opaque auxdites longueurs d'ondes prédéterminées et orienté le long de l'axe azimutal de l'ensemble

- transducteur (2) pour permettre à un utilisateur de voir l'au moins un élément sur une image de l'ensemble transducteur (2) obtenue à partir d'une sortie de l'ensemble transducteur et déterminer ainsi la position angulaire de l'ensemble transducteur. 5
2. Ensemble réseau de transducteurs selon la revendication 1, dans lequel l'au moins une couche d'adaptation (23) a une face avant, ledit ensemble comprenant en outre une lentille de focalisation (13) fixée sur la face avant de l'au moins une couche d'adaptation (23). 10
  3. Ensemble réseau de transducteurs selon la revendication 1, dans lequel lesdits éléments raidisseurs (10) sont de longueurs différentes. 15
  4. Ensemble réseau de transducteurs selon la revendication 1, dans lequel lesdits éléments raidisseurs (10) sont d'épaisseurs différentes. 20
  5. Ensemble réseau de transducteurs selon la revendication 1, dans lequel ledit au moins un élément comprend une paire d'éléments allongés disposés côte à côte. 25
  6. Ensemble réseau de transducteurs selon la revendication 5, dans lequel lesdits éléments sont de longueurs différentes. 30
  7. Ensemble réseau de transducteurs selon la revendication 5, dans lequel lesdits éléments sont d'épaisseurs différentes.
  8. Ensemble réseau de transducteurs selon la revendication 1, dans lequel ladite au moins une couche d'adaptation (23), ledit élément de renfort (21) et ledit élément piézoélectrique (22) forment un transducteur ayant une section transversale, et ledit ensemble (2) comprend en outre un tube élastomère (20), ayant un espace creux interne à l'intérieur de celui-ci d'une section transversale correspondant à la section transversale du transducteur, dans laquelle ledit transducteur est disposé de sorte à former un embout de transducteur, une extrémité dudit embout de transducteur comprenant une extrémité d'embout lisse moulée dans une résine souple. 45
  9. Ensemble réseau de transducteurs selon la revendication 1, dans lequel lesdites électrodes incluent des électrodes avant et arrière et ledit circuit souple (11) est assemblé sur les électrodes arrière de l'élément piézoélectrique (22), ledit circuit souple (11) étant plié le long d'un côté latéral de l'élément de renfort et ledit circuit souple (11) comportant des bandes souples (112a à 112d) pliées de sorte à permettre la superposition des bandes sur une surface arrière de l'élément de renfort (21). 50 55

#### 10. Dispositif de cathéter ultrasonore comprenant :

un élément tubulaire allongé (6) ayant une extrémité distale ; et  
 un embout de transducteur (1) situé au niveau de l'extrémité distale de l'élément tubulaire (6), ledit embout de transducteur (1) faisant l'objet d'un positionnement différent en utilisation et comprenant un ensemble réseau de transducteurs selon l'une quelconque des revendications précédentes.

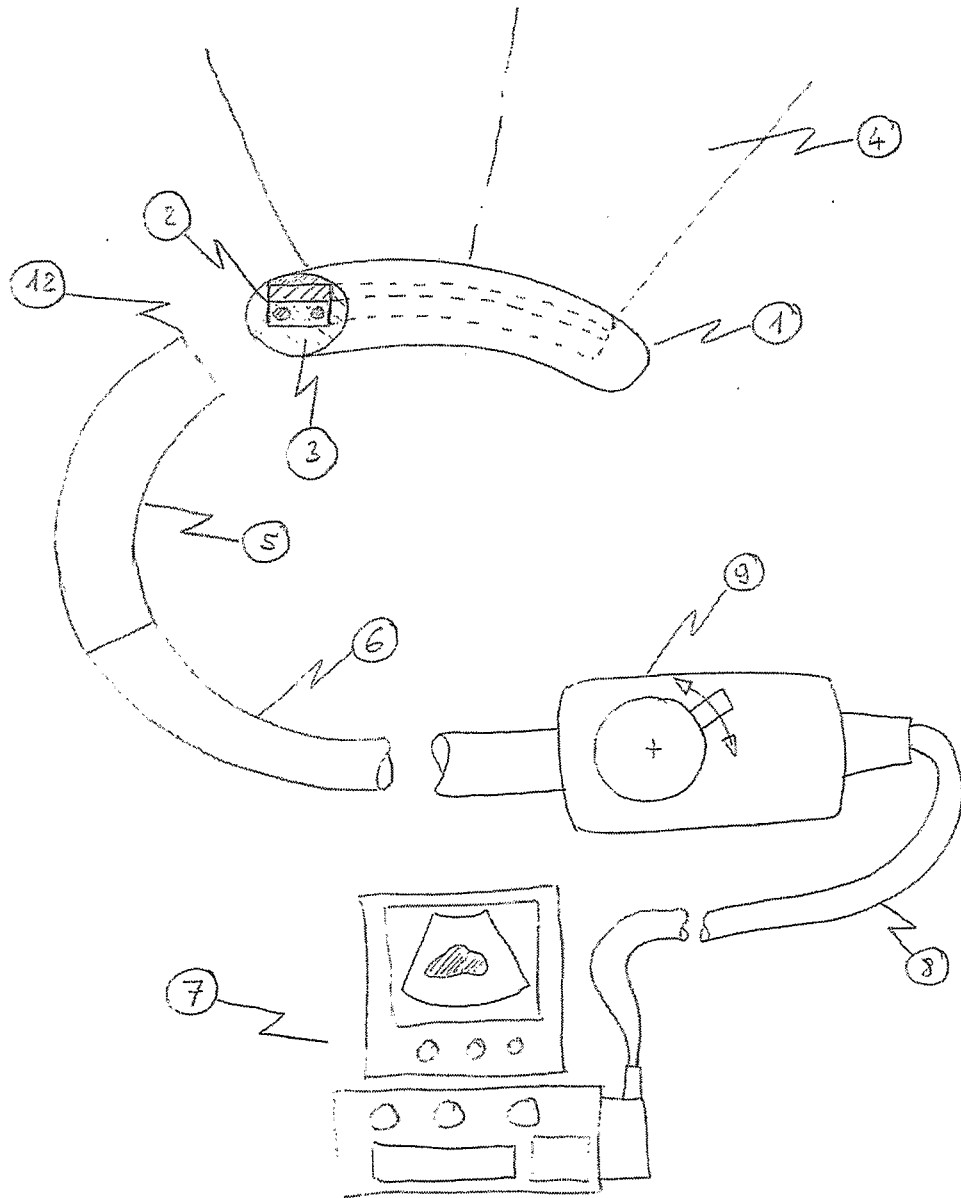
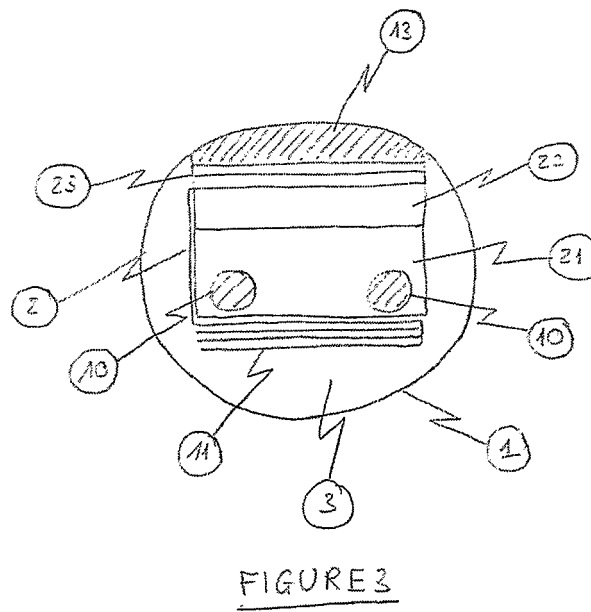
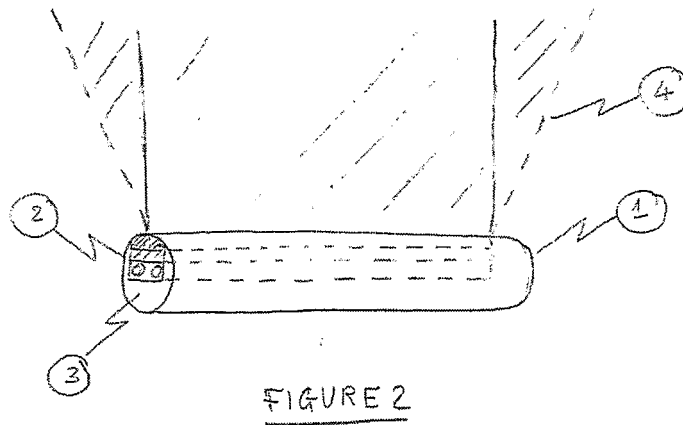


FIGURE 1



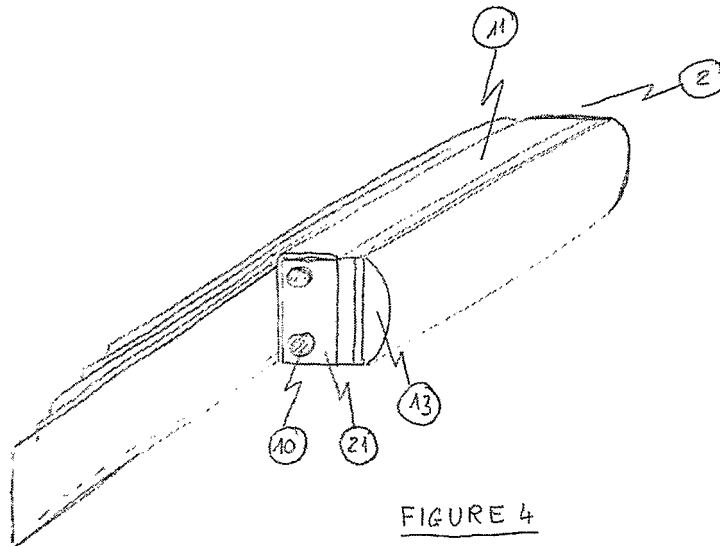


FIGURE 4

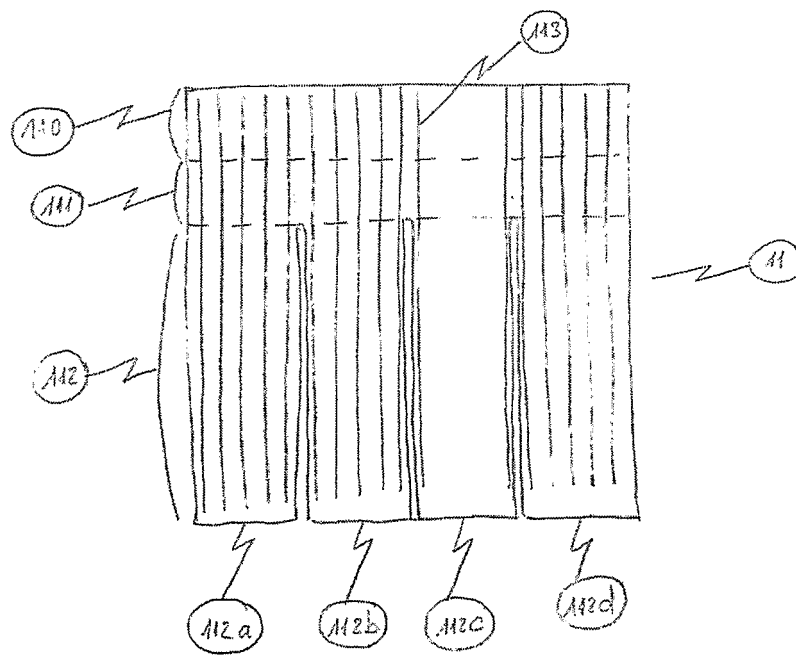


FIGURE 5

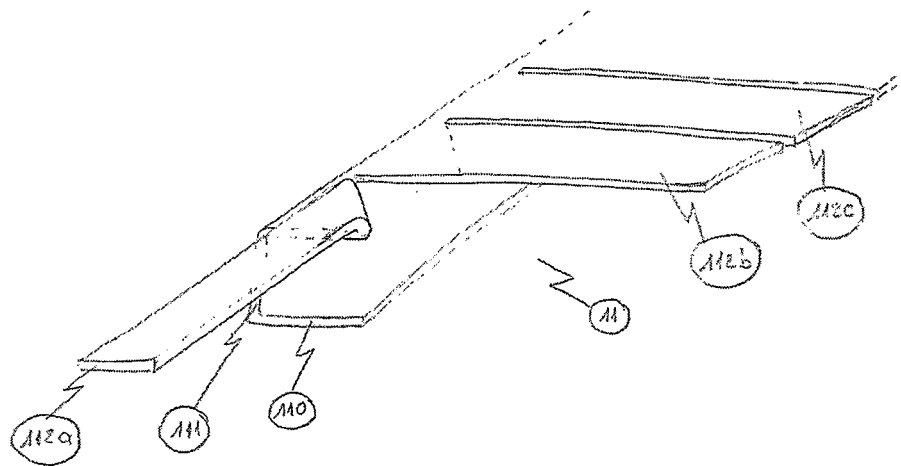


FIGURE 6

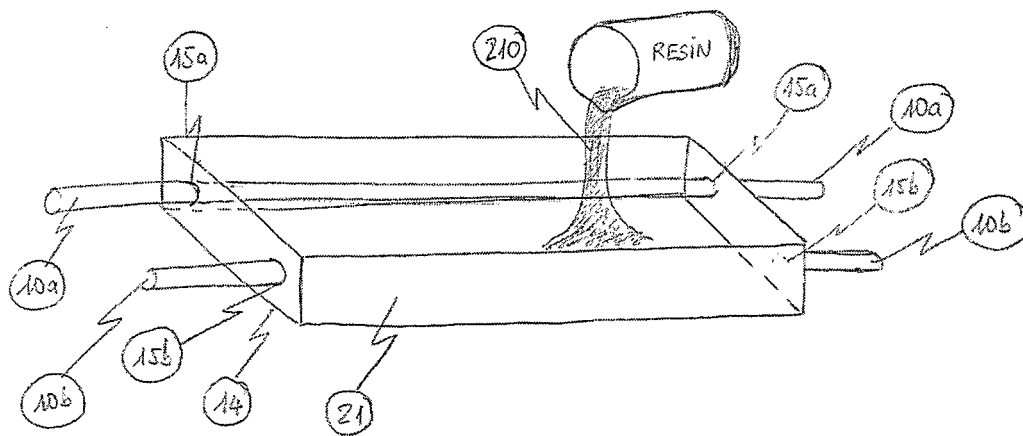


FIGURE 7

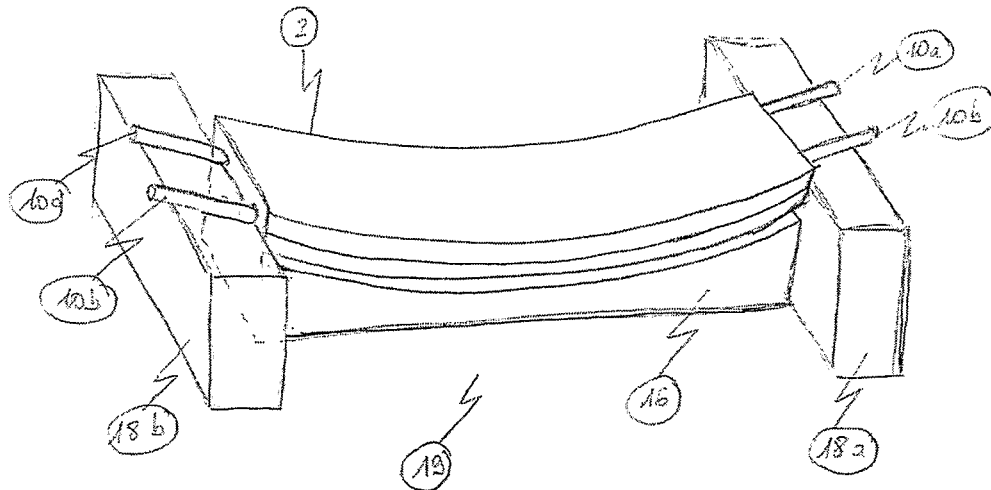


FIGURE 8

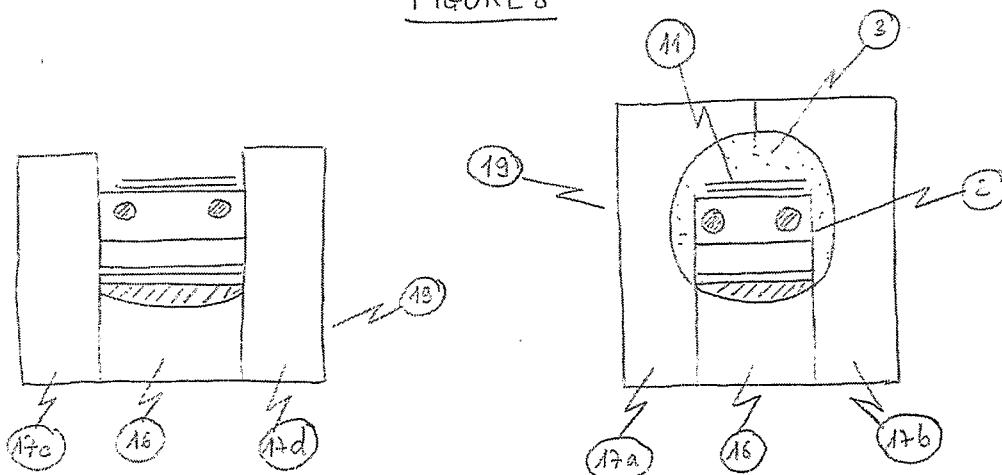


FIGURE 9

FIGURE 10

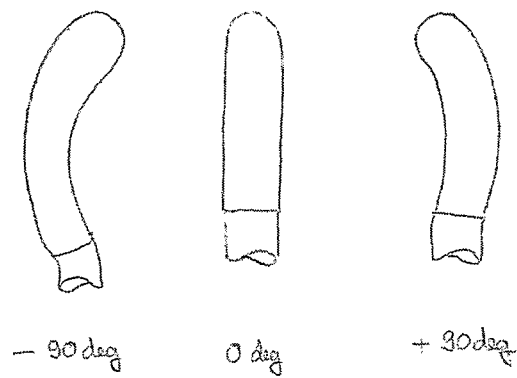


FIGURE 11

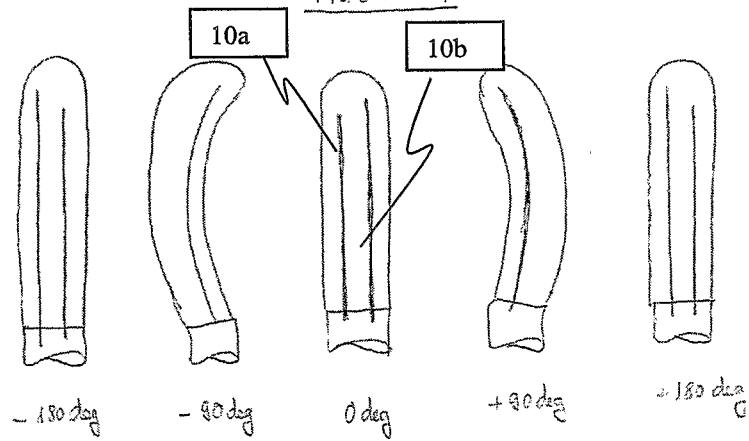


FIGURE 12

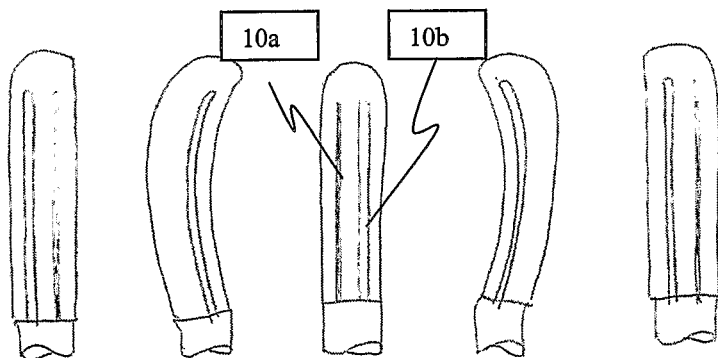
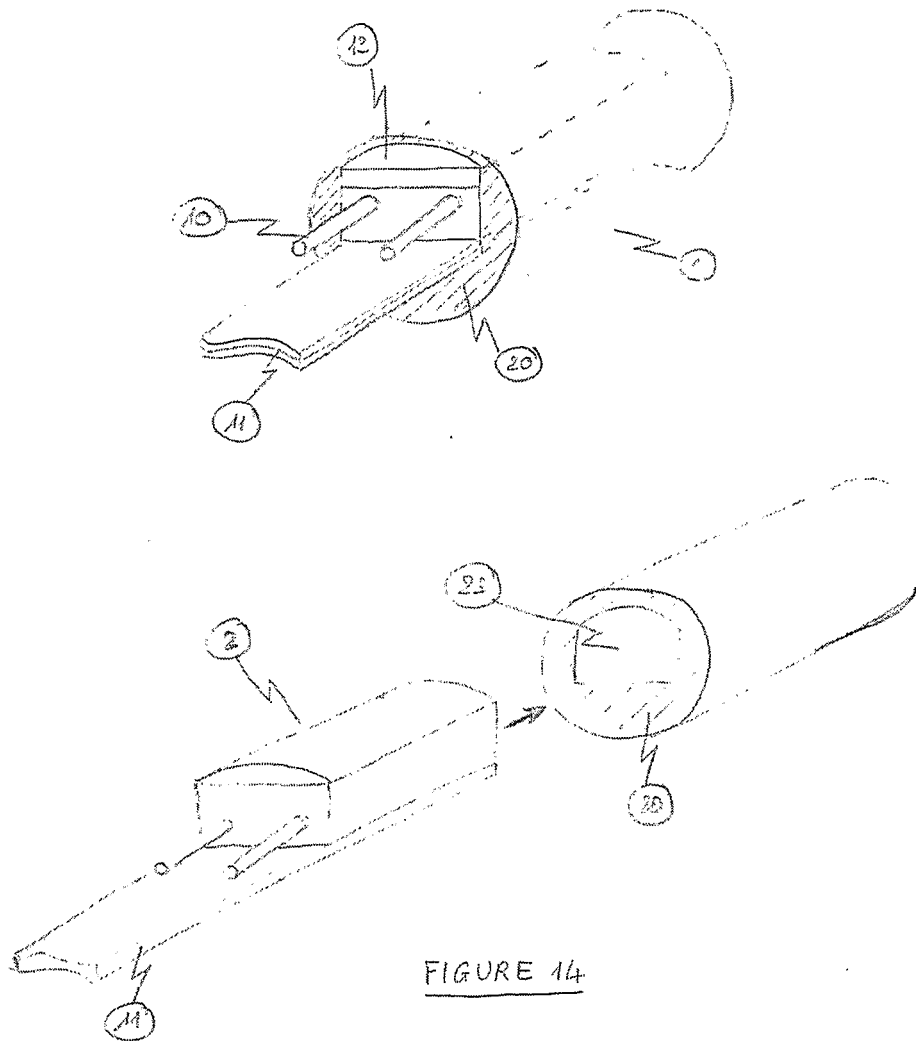


FIGURE 13





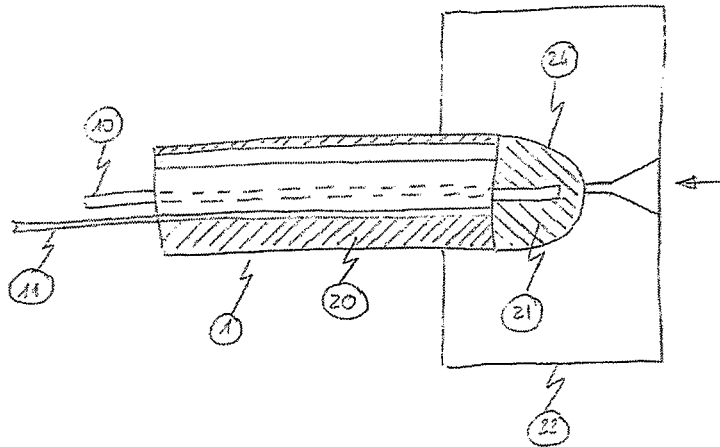


FIGURE 15

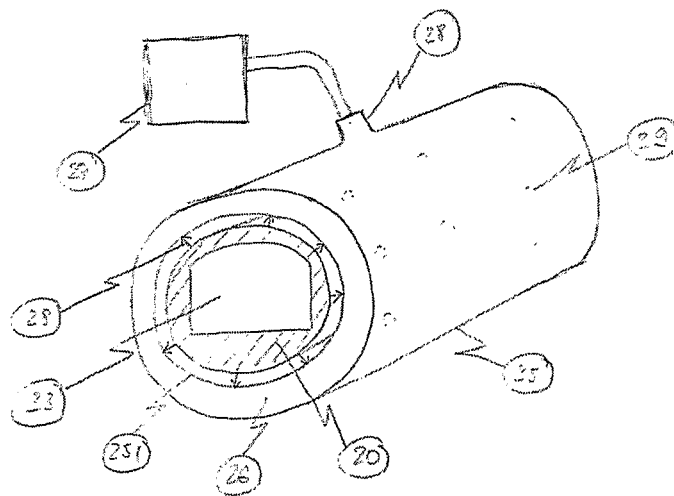


FIGURE 16

## REFERENCES CITED IN THE DESCRIPTION

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

### Patent documents cited in the description

- US 3938502 A, Bom [0003]
- US 4605009 A, Pourcelot [0004]
- US 5291893 A, Slayton [0005]
- WO 9203972 A, Crowley [0006]
- WO 9833430 A, Curley [0007]
- WO 8809150 A [0008]
- US 5681263 A, Flesch [0015]

### Non-patent literature cited in the description

- **B. BRAMHAM.** A convenient transformer for matching coaxial lines. *Electronic Engineering*, January 1961 [0029]
- **D. EMERSON.** QST, 1997 [0029]

专利名称(译)	用于导管的超声阵列换能器		
公开(公告)号	<a href="#">EP1534140A1</a>	公开(公告)日	2005-06-01
申请号	EP2003764617	申请日	2003-07-16
[标]申请(专利权)人(译)	VERMON		
申请(专利权)人(译)	VERMON		
当前申请(专利权)人(译)	VERMON		
[标]发明人	FLESCH AIME LACAZE ELISABETH NGUYEN DINH AN AUCLAIR PHILIPPE MAUCHAMP PASCAL		
发明人	FLESCH, AIMÉ LACAZE, ELISABETH NGUYEN-DINH, AN AUCLAIR, PHILIPPE DUFAIT, RÉMI MAUCHAMP, PASCAL		
IPC分类号	A61B8/14 A61B8/12 B06B1/06 G10K11/00		
CPC分类号	B06B1/0677 A61B8/12 A61B8/445 A61B8/4483 A61B8/4488 A61B2562/12 Y10S128/916 Y10T29/42		
优先权	10/196561 2002-07-17 US		
其他公开文献	EP1534140A4 EP1534140B1		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

提供了一种基于导管的超声换能器阵列，其包括夹在匹配层和背衬构件之间的压电构件。一个或多个柔性加强元件嵌入背衬构件中。该元件对射频是不透明的并且沿阵列的方位角轴集成，以使用户能够观察从阵列输出导出的阵列图像中的元素，从而确定阵列的角位置。柔性互连组件在压电构件的电极和外部电缆之间提供电连接。提供了不同的方法来为阵列添加周围的保护盖。