



US006621543B2

(12) **United States Patent**
Moon

(10) **Patent No.:** **US 6,621,543 B2**
(45) **Date of Patent:** **Sep. 16, 2003**

(54) **TRANSFLECTIVE LIQUID CRYSTAL
DISPLAY DEVICE**

(75) Inventor: **Jong-Weon Moon**, Anyang-shi (KR)

(73) Assignee: **LG.Philips LCD Co., Ltd.**, Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 159 days.

(21) Appl. No.: **09/755,097**

(22) Filed: **Jan. 8, 2001**

(65) **Prior Publication Data**

US 2001/0020990 A1 Sep. 13, 2001

(30) **Foreign Application Priority Data**

Jan. 6, 2000 (KR) 2000-398

(51) **Int. Cl.**⁷ **G02F 1/1335**

(52) **U.S. Cl.** **349/115; 349/117; 349/114**

(58) **Field of Search** 349/115, 117,
349/105, 113, 114

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,555,114 A * 9/1996 Narita et al. 359/65

5,805,250 A * 9/1998 Hatano et al. 349/96
5,956,001 A * 9/1999 Sumida et al. 345/55
6,295,109 B1 * 9/2001 Kobo et al. 349/119
6,333,773 B1 * 12/2001 Faris 349/176
6,537,837 B2 * 3/2003 Lee 438/16

* cited by examiner

Primary Examiner—Robert H. Kim

Assistant Examiner—Hoan Nguyen

(74) *Attorney, Agent, or Firm*—McKenna Long & Aldridge LLP

(57) **ABSTRACT**

A transflective liquid crystal display device that can selectively be used in the transmissive mode or the reflective mode. The transflective liquid crystal panel includes a reflective electrode having a transparent portion, a CLC color filter and a CLC polarizer. Light from a backlight device can pass through the transparent portion of the reflective electrode and into the liquid crystal. Moreover, light from the backlight device that is reflected by the reflective electrode can also pass through the transparent portion and into the liquid crystal without being absorbed by the CLC polarizer. The brightness of the transflective LCD device is thus improved.

18 Claims, 7 Drawing Sheets

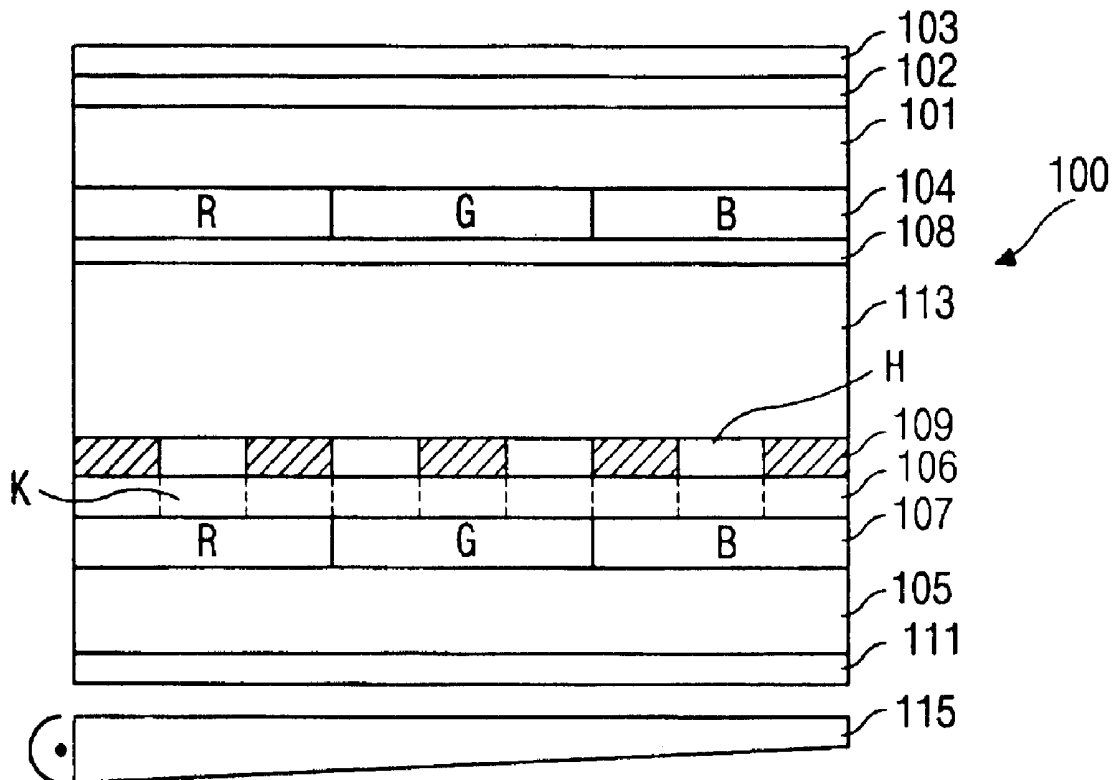


Fig.3
(Related Art)

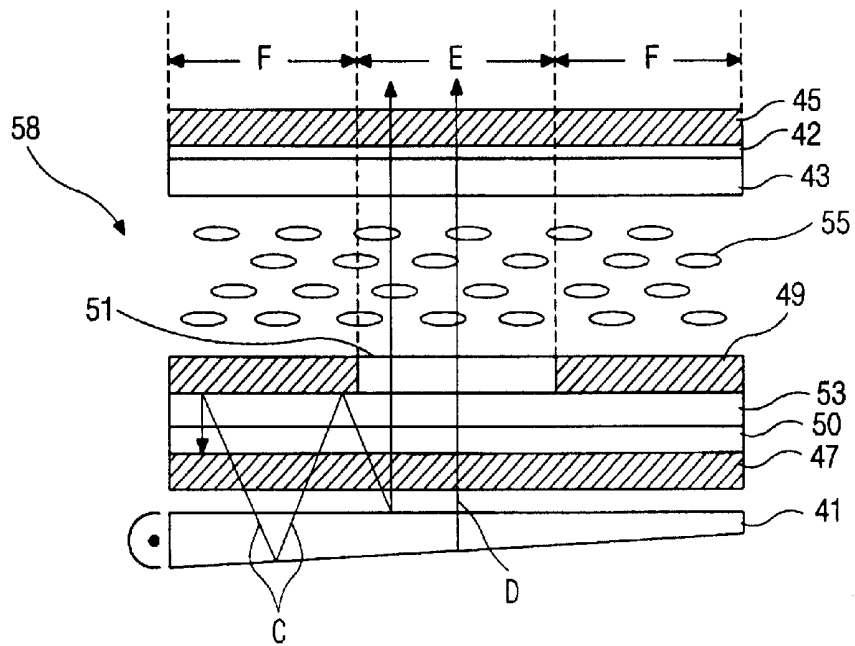


Fig.4
(Related Art)

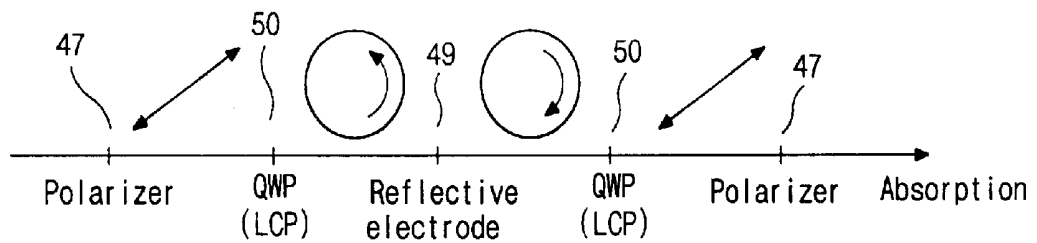


Fig.5

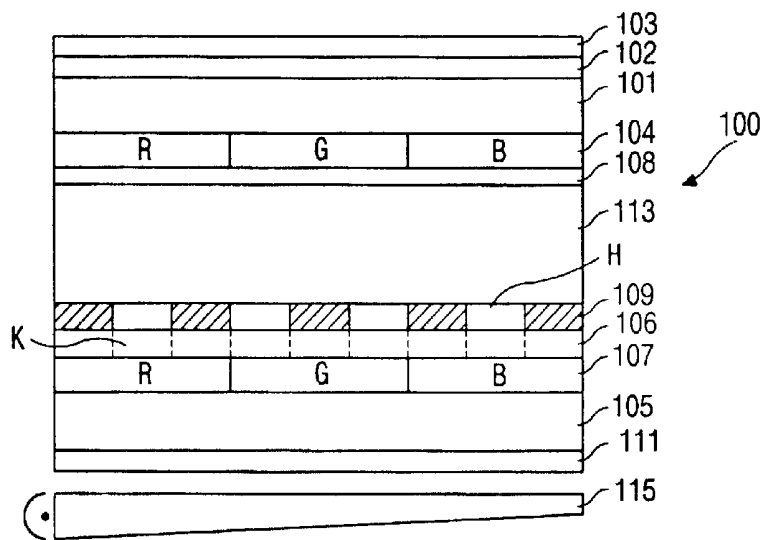


Fig. 6a

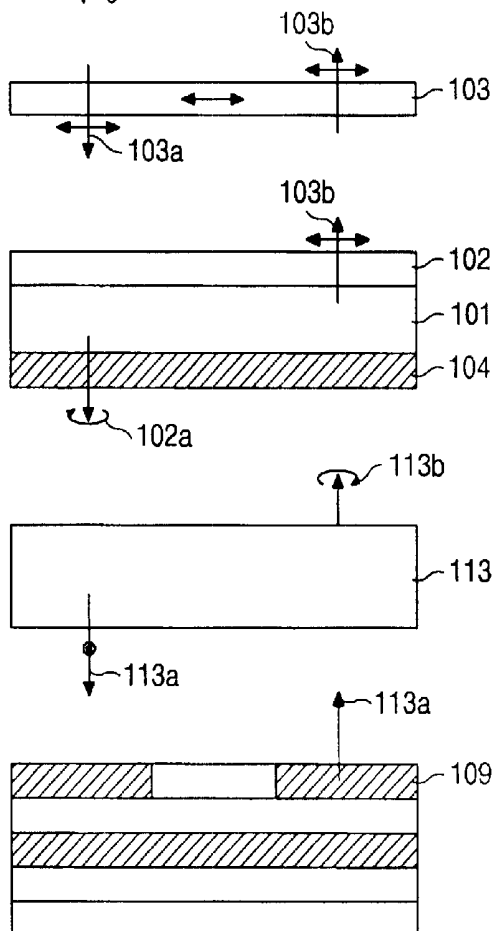
$$V=0$$


Fig. 6b

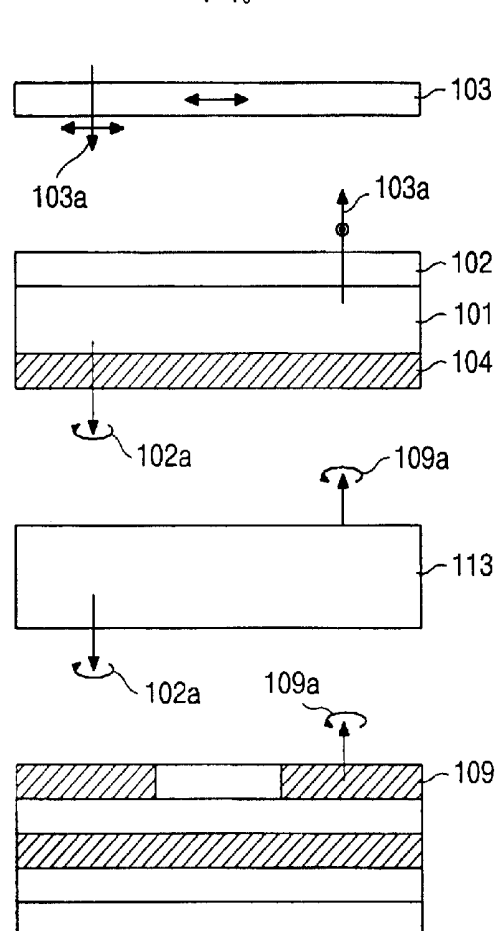
$$V=V_0$$


Fig.7a

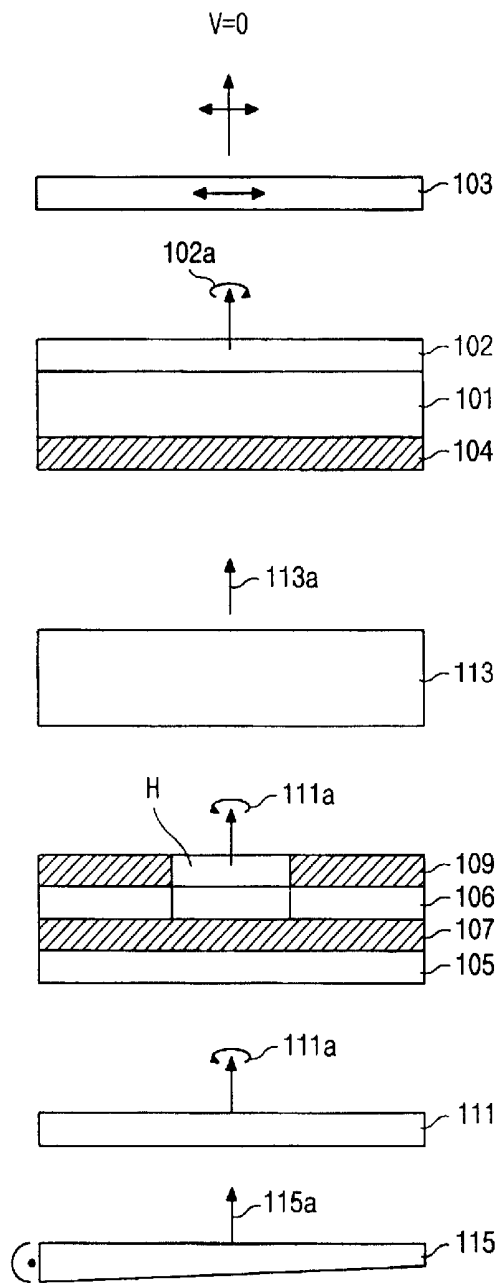


Fig.7b

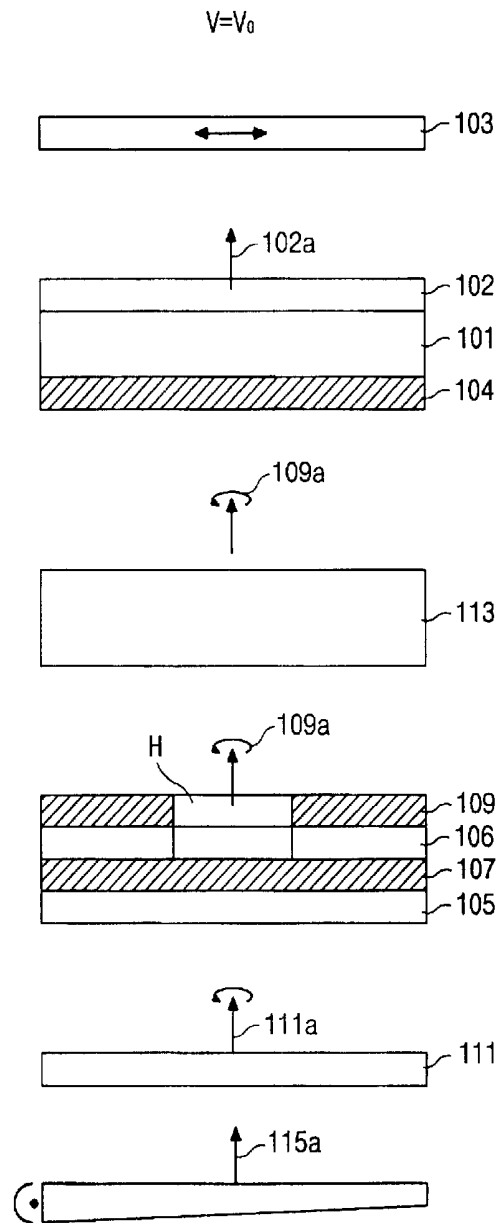


Fig.8

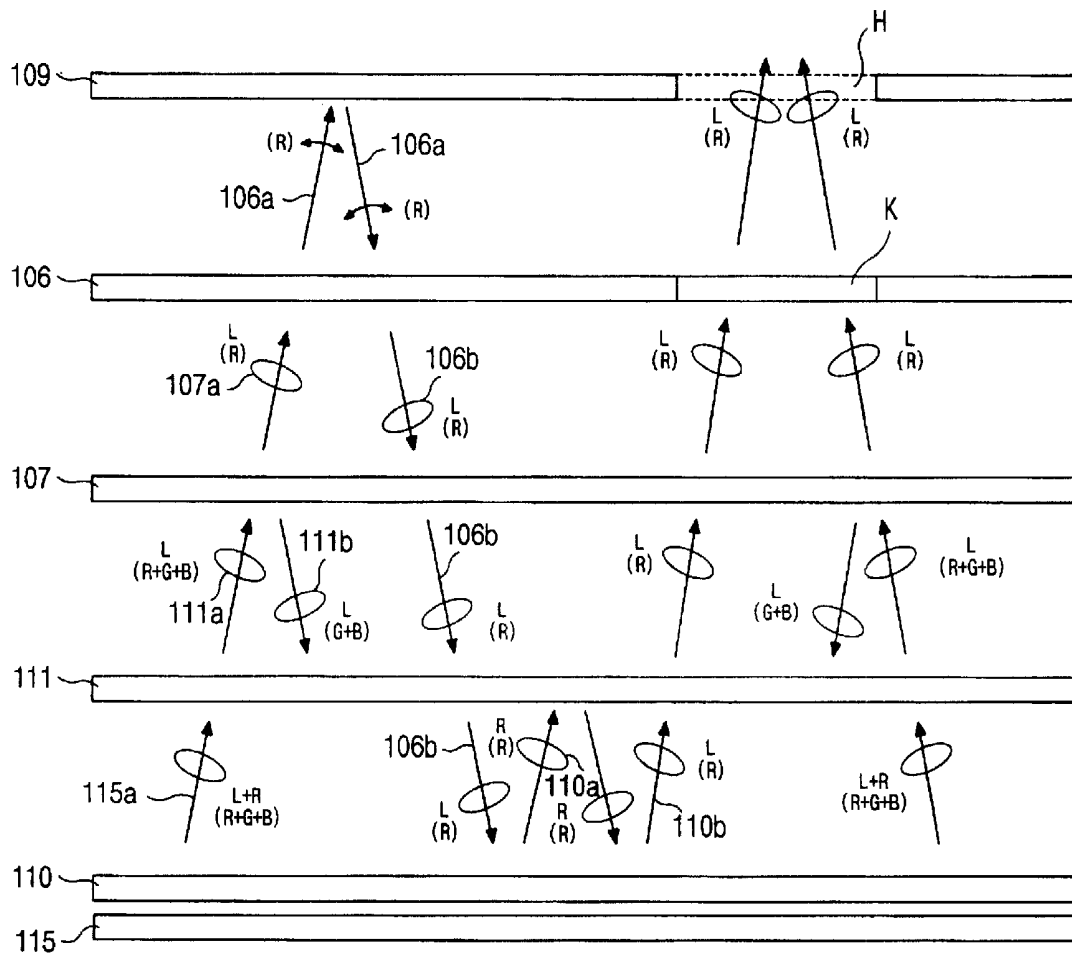


Fig.9

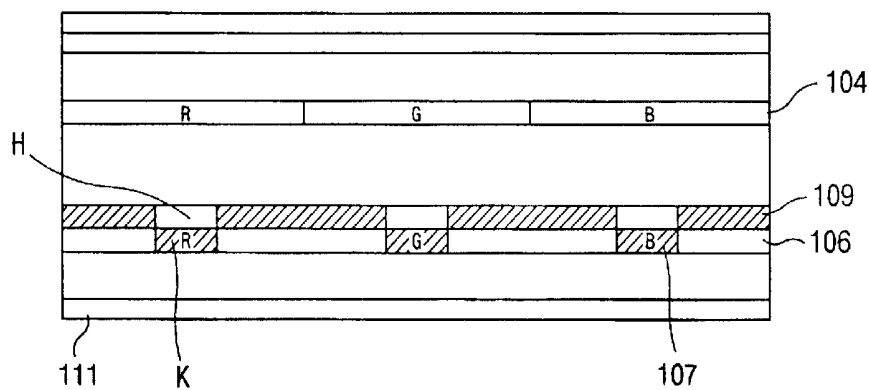


Fig.10

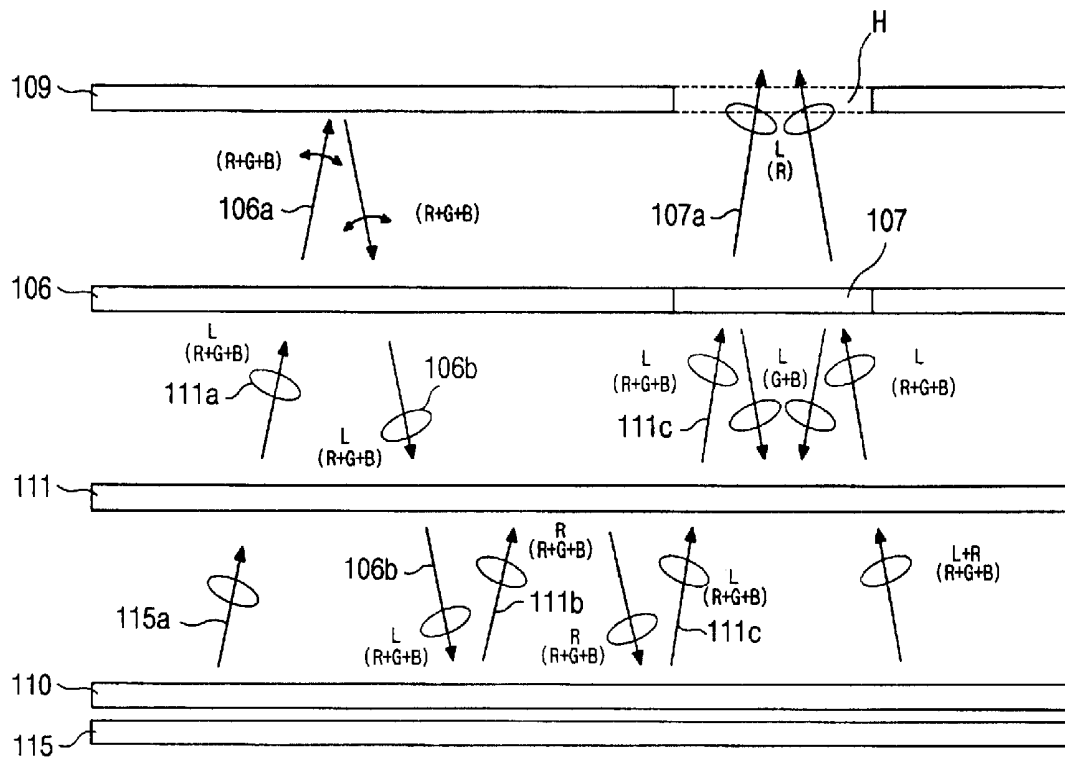


Fig.11

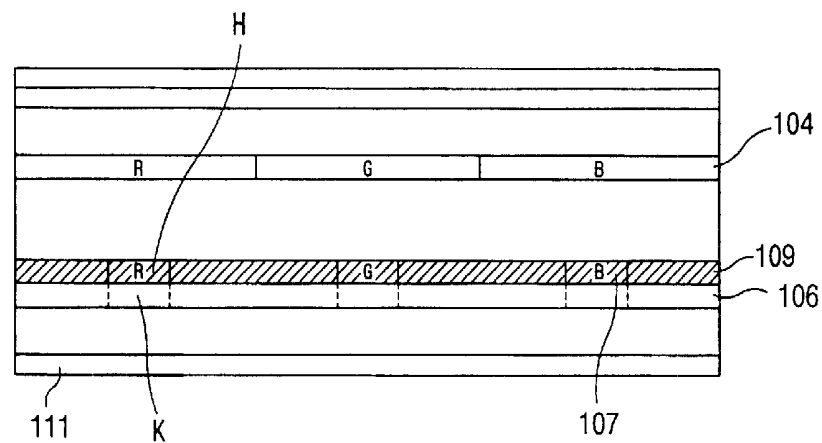


Fig.12


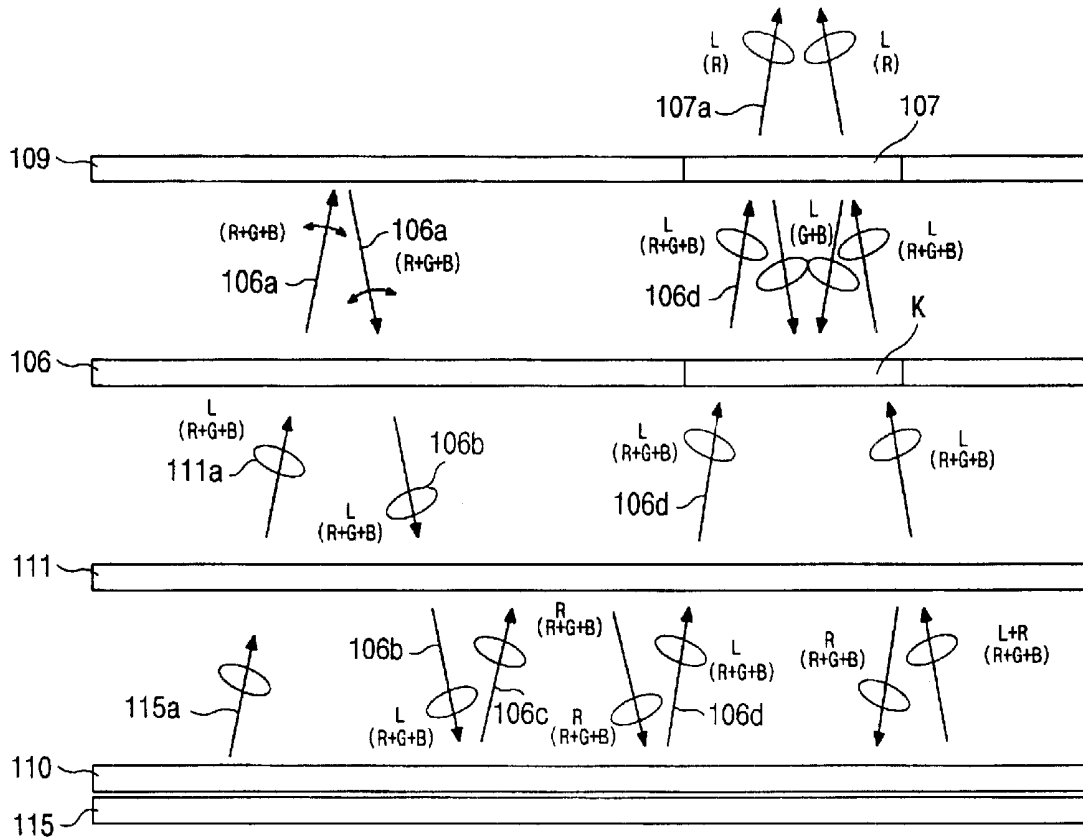


Fig.13

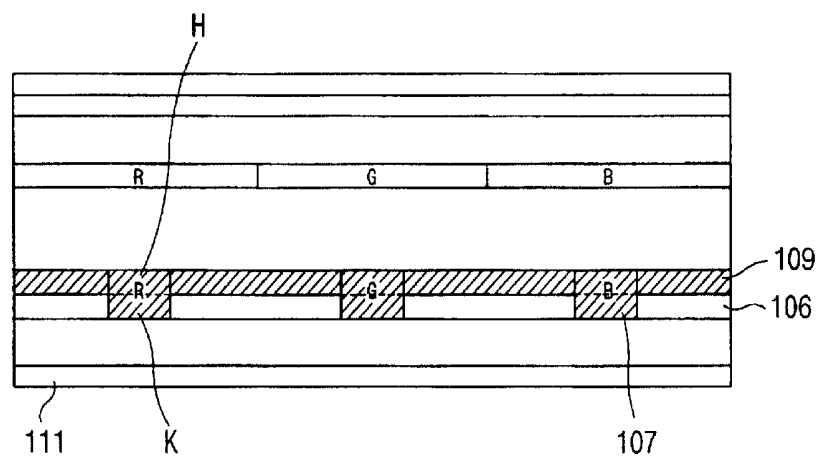

TRANSFLECTIVE LIQUID CRYSTAL DISPLAY DEVICE

This application claims the benefit of Korean Patent Application No. 2000-00398, filed on Jan. 6, 2000, under 35 U.S.C. §119, the entirety of which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a liquid crystal display (LCD) device, and more particularly, to a transfective LCD device.

2. Description of the Related Art

In general, a transfective liquid crystal display (LCD) device selectively acts as a transmissive LCD device and as a reflective LCD device. Due to the fact that a transfective LCD device can make use of both internal and external light sources, it can operate in bright ambient light and with low power consumption.

FIG. 1 shows a typical thin film transistor liquid crystal display (TFT-LCD) device 11. The TFT-LCD device 11 includes upper and lower substrates 15 and 21 with an interposed liquid crystal 23. The upper and lower substrates 15 and 21 are sometimes respectively referred to as a color filter substrate and an array substrate.

On a surface facing the lower substrate 21, the upper substrate 15 includes a black matrix 16 and a color filter layer 17. The color filter layer 17 includes a matrix array of red (R), green (G), and blue (B) color filters that are formed such that each color filter is bordered by the black matrix 16. The upper substrate 15 also includes a common electrode 13 over the color filter layer 17 and over the black matrix 16.

On a surface facing the upper substrate 21, the lower substrate 21 includes an array of thin film transistors (one being designated as TFT "T" in FIG. 1) that act as switching devices. The array of thin film transistors is formed to correspond with the matrix of color filters. A plurality of crossing gate and data lines 25 and 27 are positioned such that a TFT is located near each crossing of the gate and data lines 25 and 27. The lower substrate 21 also includes a plurality of pixel electrodes 19, each in an area defined between the gate and data lines 25 and 27. Such areas are often referred to as pixel regions "P."

Each pixel electrode 19 includes a transparent portion 19a and a reflective portion 19b. The transparent portion 19a is usually formed from a transparent conductive material having good light transmissivity, for example, indium-tin-oxide (ITO). Alternatively, the transparent portion 19a can be a hole. However, in FIG. 1 a transparent conductive material is employed for the transparent portion 19a. Moreover, a conductive metallic material having a superior light reflectivity is used for the reflective portion 19b.

FIG. 2, a cross-sectional depiction of a transfective LCD device 57, helps illustrate the operation of such devices. As shown in FIG. 2, the transfective LCD device 57 includes lower and upper substrates 53 and 43 and an interposed liquid crystal layer 56. The upper substrate 43 includes a common electrode 33. The lower substrate 53 includes transparent and reflective electrodes 51 and 49 that act as a pixel electrode. The transfective LCD device 57 also includes a backlight device 41.

The reflective electrode 49, made of a conductive material having a good reflectivity, surrounds the transparent electrode 51. The transparent electrode 51 transmits light "A"

irradiated from the backlight device 41, while the reflective electrode 49 reflects the ambient light "B."

The transfective LCD device 57 is operable in both a reflective mode and a transmissive mode. In the reflective mode, the ambient light "B" passes through the upper substrate 43 and reflects from the reflective electrode 49 back toward the upper substrate 43. With an electrical signal applied between the common electrode 33 and the pixel electrode (reflective electrode 49 and transparent electrode 51) by the switching element "T" (see FIG. 1), the phase of the liquid crystal layer 56 changes. Thus, the light "B" passing through the liquid crystal layer 56 is colored by the color filter 17 (see FIG. 1) and is displayed as a colored pixel.

In the transmissive mode, light "A" from the backlight device 41 passes through the transparent electrode 51. With an electrical signal applied between the common electrode 33 and to the pixel electrode (reflective electrode 49 and transparent electrode 51) by the switching element "T" (see FIG. 1), the phase of the liquid crystal layer 56 changes. Thus, the light "A" passing through the liquid crystal layer 56 is colored by the color filter 17 (see FIG. 1) and is displayed as a colored pixel.

As described above, since the transfective LCD device 57 has both a transmissive mode and a reflective mode, the transfective LCD device can be used anytime, day or night. It also has the advantage of being battery operable for a long time because of its low power drain. However, a significant amount of light from the backlight device is lost in the transmissive mode.

FIG. 3 is a cross-sectional depiction of another conventional transfective LCD device 58. As shown, an upper retardation film 42 and an upper polarizer 45 are formed on an upper substrate 43. A lower retardation film 50 and a lower polarizer 47 are formed under a lower substrate 53. Moreover, a liquid crystal 55 is interposed between the upper substrate 43 and the lower substrate 53. On the inner surface of the lower substrate 53 are reflective electrodes 49 and transparent electrodes 51 (only one of each is shown in FIG. 3). The lower substrate 53 also includes gate and data lines 25 and 27 that define pixel regions "P" (reference FIG. 1). The transparent electrode 51 and the reflective electrode 49 that form the pixel electrode are in a pixel region "P."

The LCD panel 58 is divided into an open region "E" and a closed region "F," depending on whether light "C" and "D" from a backlight device 41 passes through the LCD panel 58. The closed region "F" is associated with an opaque metallic material, including the reflective electrode 49 and the gate lines 25 and data lines 27 (see FIG. 1). The open region "E" is associated with the transparent electrode 51.

In the transmissive mode of the LCD panel 58, the light "D" passes through the transparent electrode 51 into the liquid crystal layer 55. Most of the light "C" is absorbed by the lower polarizer 47 after being reflected by the reflective electrode 49. However, a small amount of the light "C" does pass through the liquid crystal 55.

FIG. 4 shows the states of the light from the backlight device as that light passes through the LCD panel 58. The light from the lower polarizer 47 is linearly polarized. The lower polarizer 47 absorbs much of its incident light, except that part that is parallel with the transmitting axis of the lower polarizer 47. Therefore, lower polarizer 47 significantly reduces the light density of its incident light.

The linearly polarized light that passes through the lower polarizer 47 is then changed into left-circularly polarized light by the retardation film 50, which has a phase difference

of $\lambda/4$. Some of the left-circularly polarized light passes through the liquid crystal **55** associated with the open portion "E" (see FIG. **3**). The remainder of the left-circularly polarized light is reflected by the reflective electrode **49** (see FIG. **3**) and is changed into right-circularly polarized light due to a mirror effect. The right-circularly polarized light then enters into the retardation film **50** again, where it is converted into linearly polarized light having a phase difference angle of $\lambda/4$.

Moreover, when the linearly polarized light from the retardation film **50** enters the lower polarizer **47**, the phase of the linearly polarized light is perpendicular to the transmitting axis of the lower polarizer **47**. Therefore, the lower polarizer **47** absorbs most of that light.

As a result, the conventional transreflective LCD device suffers a serious decrease in brightness because the closed portion "F" (see FIG. **3**) associated with the reflective electrode **49** and with the gate and data lines causes a significant amount of light absorption.

SUMMARY OF THE INVENTION

Accordingly, the present invention is directed to a transreflective liquid crystal display device that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

An object of the invention is to provide a method of fabricating a transreflective LCD device (as well as the transreflective LCD device itself) that increases the brightness by reducing or preventing light from being absorbed by a lower polarizer.

Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, a transreflective liquid crystal display device includes a first polarizer on a first retardation film, which itself is on a first substrate. A color filter is under the first substrate, and a transparent common electrode is below the color filter. A lower substrate assembly is located below the transparent common electrode. A liquid crystal layer is interposed between the transparent common electrode and the lower substrate assembly.

The lower substrate assembly includes a reflective electrode having a light passing portion. The reflective electrode is adjacent a second polarizer made of a cholesteric liquid crystal. A second retardation film is disposed between the reflective electrode and the second polarizer. The second retardation film includes a first portion, which corresponds in size to the light passing portion of the reflective electrode, that transmits light without a polarization change, and a second portion that transmits light with a phase difference of $\lambda/4$. A CLC color filter is disposed between the second polarizer and the liquid crystal layer. The lower substrate assembly further includes a backlight device having a reflective surface. The second polarizer is disposed between the backlight device and the reflective electrode. The lower substrate assembly also beneficially includes a transparent substrate.

Beneficially, the CLC color filter can be a CLC color filter layer that is disposed between the CLC polarizer and the second retardation film. Another beneficial location for the

CLC color filter is in the light passing portion of the reflective electrode. Another beneficial location for the CLC color filter is in the first portion of the second retardation film. Alternatively, the CLC color filter can be located both in the first portion of the second retardation film and in the light passing portion of the reflective electrode.

In accordance with the purpose of the invention, in another aspect the principles of the present invention provide for a transreflective liquid crystal display device, including: a first polarizer; a first retardation film under the first polarizer; a first substrate under the first retardation film; a color filter under the first substrate; a reflective electrode having a transparent portion, wherein the transparent portion is filled up with a CLC color filter; a liquid crystal layer interposed between the color filter and the reflective electrode; a second retardation film formed under the reflective electrode, wherein the second retardation film has a first portion that is filled up with the CLC color filter and corresponds in size to the transparent portion of the reflective electrode, also wherein the second retardation film has a second portion that transmits the light with a phase difference $\lambda/4$; a second polarizer made of a cholesteric liquid crystal and formed below the second retardation film; a second substrate formed between the second polarizer and the reflective electrode; and a backlight device arranged below the second substrate and irradiating the light to the second polarizer.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

In the drawings:

FIG. **1** illustrates a typical liquid crystal display panel;

FIG. **2** is a cross-sectional view illustrating a typical transreflective LCD device;

FIG. **3** is a cross-sectional view illustrating another conventional transreflective LCD device;

FIG. **4** is a schematic view illustrating light from a backlight device passing through components of the conventional transreflective LCD device of FIG. **3**;

FIG. **5** is a cross-sectional view illustrating a transreflective LCD device according to a first embodiment of the present invention;

FIGS. **6a** and **6b** are cross-sectional views illustrating ambient light passing through components of the transreflective LCD device of FIG. **5** when it is operating in a reflective mode;

FIGS. **7a** and **7b** are cross-sectional views illustrating light from a backlight device passing through components of the transreflective LCD device of FIG. **5** when it is operating in a transmissive mode;

FIG. **8** is a more detailed schematic view of light from a backlight device passing through selected components of the transreflective LCD device of FIG. **5** when it is operating in a transmissive mode;

FIG. **9** is a cross-sectional view illustrating a transreflective LCD device according to a second embodiment of the present invention;

FIG. 10 is a schematic view illustrating light from a backlight device passing through selected components of the transfective LCD device of FIG. 9 when it is operating in a transmissive mode;

FIG. 11 is a cross-sectional view illustrating a transfective LCD device according to a third embodiment of the present invention;

FIG. 12 is a schematic view illustrating light from a backlight device passing through selected components of the transfective LCD device of FIG. 11 when it is operating in a transmissive mode; and

FIG. 13 is a cross-sectional view illustrating a transfective LCD device according to a fourth embodiment of the present invention.

DETAILED DESCRIPTION OF ILLUSTRATED EMBODIMENTS

Reference will now be made in detail to illustrated embodiments of the present invention, examples of which are shown in the accompanying drawings.

FIG. 5 is a cross-sectional view illustrating a transfective LCD device according to an embodiment of the present invention. As shown, the transfective LCD device 100 includes an upper substrate 101 (a color filter substrate) and a lower substrate 105 (an array substrate). A liquid crystal layer 113 is interposed between the upper substrate 101 and the lower substrate 105.

On one surface of the upper substrate 101 is an upper retardation film 102. On the upper retardation film 102 is an upper linear polarizer 103. Color filters 104 are on the other surface of the upper substrate 101. A common electrode 108 is under the color filters 104.

On the surface of the lower substrate 105 that faces the upper substrate 101 is a cholesteric liquid crystal color filter (referred to hereinafter as a CLC color filter) 107. On that CLC color filter is a lower retardation film 106. A reflective electrode 109 is on the lower retardation film 106. The reflective electrode 109 (a pixel electrode) includes transparent portions "H." On the other surface of the lower substrate 105 is a cholesteric liquid crystal polarizer (referred to hereinafter as a CLC polarizer) 111. A backlight device 115 is adjacent the lower substrate 105.

The CLC color filter 107 is a color filter made of a cholesteric liquid crystal (CLC). It selectively reflects or transmits incident light. For example, if the molecular structure of the CLC is twisted in the right direction, the color filter 107 transmits only right-handed circularly polarized light. The CLC color filter 107 covers a plurality of pixels, and each pixel has three sub-pixels colored red (R), green (G) and blue (B).

Objects have an intrinsic wavelength. The color that an observer sees when looking at an object is the wavelength of the light reflected from or transmitted through the object. The wavelength range of visible light is from about 400 nm to 700 nm. Visible light can be broadly divided into red, green, and blue regions. The wavelength of the red light region is about 660 nm, that of green is about 530 nm, and that of blue is about 470 nm. The pitch of a liquid crystal is controllable and, therefore it is possible that a CLC color filter can selectively transmit light having the intrinsic wavelength of the color corresponding to a pixel. This enables a pixel to displaying red (R), green (G) or blue (B) with a high purity.

To implement a precise color, a plurality of the CLC color filters can be selectively arranged. Therefore, a CLC color

filter can display a selected color better than a conventional reflective color filter. Moreover, the manufacturing process of CLC color filters can be relatively simple.

Referring again to FIG. 5, the CLC polarizer 111 is a polarizer made of a cholesteric liquid crystal that selectively reflects or transmits right- or left-handed circularly polarized light. Thus, it can transmit more light than a linear polarizer that transmits light polarized only in one linear direction.

Still referring to FIG. 5, the portions "K" of the retardation film 106, which correspond in size to the transparent portion "H," has an isotropic phase. Thus, light that is transmitted through a portion "K" can pass into the liquid crystal layer 113 without any phase change (in a transmissive mode). The isotropic phase portion "K" of the retardation film 106 is beneficially formed as follows. First, a UV hardening liquid crystal is first deposited and hardened. Then, the portions "K" (which correspond in size to the transparent portion "H" of the reflective electrode 109) are heated to an isotropic phase. The liquid crystal is then re-hardened by ultraviolet rays. Another method of forming the isotropic phase portion "K" is to first eliminate the portions "K" from a retardation film 106. The retardation film can then be coated with an isotropic material.

The operation of the transfective LCD device 100 when in the reflective mode is explained hereinafter with reference to FIGS. 6A and 6B, and when in the transmissive mode with reference to FIGS. 7A and 7B.

Referring now to FIGS. 6A and 6B, an electrically controlled birefringence cell (ECB) is employed in the present invention (i.e., $V=0$, $\delta=\pi/2$ and $V=V_0$, $\delta=0$). FIG. 6A shows a reflective mode using ambient light when a signal voltage is not applied between the pixel electrode 109 and the common electrode 108 (see FIG. 5). The ambient light illuminates the upper linear polarizer 103. Only the portion of the ambient light that is parallel with the optical axis of the upper polarizer 103 passes through the upper polarizer as linearly polarized light 103a. The linearly polarized light 103a is changed into right-handed circularly polarized light 102a by the retardation film 102, which has a phase difference of $\lambda/4$. The right-handed circularly polarized light 102a passes through the upper substrate 101 and the color filter 104 and enters the liquid crystal layer 113. The right-handed circularly polarized light 102a is converted into linearly polarized light 113a as it passes through the liquid crystal layer 113. The linearly polarized light 113a is then reflected by the reflective electrode 109. The reflected linearly polarized light 113a is converted back into a right-handed circularly polarized light 113b as it passes through the liquid crystal layer 113. The right-handed circularly polarized light 113b is then converted into a linearly polarized light 103b as it passes through the upper polarizer 102. The linearly polarized light 103b is parallel to the optical axis of the upper polarizer 103, and thus passes through the upper linear polarizer 103. Thus, the LCD panel produces a white pixel.

FIG. 6B shows the reflective mode using ambient light when a signal voltage is applied between the pixel electrode 109 and the common electrode 108 (see FIG. 5). The liquid crystal molecules of the liquid crystal layer 113 are then aligned in one direction, i.e., an isotropic phase. Liquid crystal molecules in an isotropic phase do not affect the phase of the incident light. Thus, incident light passes through the liquid crystal layer without a polarization change.

Accordingly, the ambient light that passes through the upper polarizer 103 as linearly polarized light 103a is converted into right-handed circularly polarized light 102a

by the upper retardation film **102**. The right-handed circularly polarized light **102a** passes through the upper substrate **101**, the color filter **104**, and the isotropic liquid crystal layer **113**. The right-handed circularly polarized light **102a** is then reflected by the reflective electrode **109**, which causes the right-handed circularly polarized light **102a** to convert into left-handed circularly polarized light **109a** via a mirror effect. The left-handed circularly polarized light **109a** then passes through the isotropic liquid crystal layer **113**, through the color filter **104**, and through the upper substrate **101**. The left-handed circularly polarized light **109a** is converted into linearly polarized light **103a** as it passes through the upper retardation film **102**. The linearly polarized light **103a** is perpendicular to the optical axis of the upper polarizer **103**, and as such does not pass through the upper linear polarizer **103**. Thus, the LCD panel results in a dark pixel.

FIG. 7A is a cross-sectional view of the transfective LCD device **100** operating in a transmissive mode using light from the backlight device **115** when a signal voltage is not applied between the pixel electrode **109** and the common electrode **108** (reference FIG. 5). The light **115a** from the backlight device **115** enters the CLC polarizer **111**. Only the left-handed circularly polarized light **111a** portion of the light **115a** can pass through the CLC polarizer **111**. That left-handed circularly polarized light **111a** then passes through the lower substrate **105**; through the CLC color filter **107**, which transmits a dominant wavelength such as Red, Green or Blue; through the lower retardation film **106**; and through the transparent portion "H" of the reflective electrode **109** (i.e. the pixel electrode). Then, the left-handed circularly polarized light **111a** is converted into linearly polarized light **113a** as it passes through the liquid crystal layer **113**, this being due to birefringence. The linearly polarized light **113a** then passes through the color filter **104** and through the upper substrate **101**. As the linearly polarized light **113a** passes through the upper retardation film **102** the linearly polarized light **113a** is converted into right-handed circularly polarized light **102a**. Only the portion of the right-handed circularly polarized light **102a** that is parallel with the optical axis of the upper polarizer **103** passes through the upper polarizer **103**. Thus, the LCD panel produces a light gray pixel.

FIG. 7B is a cross-sectional view of the transfective LCD device **100** operating in a transmissive mode using light from the backlight device **115** when a signal voltage is applied between the pixel electrode **109** and the common electrode **108** (reference FIG. 5). The liquid crystal molecules of the liquid crystal layer **113** are then aligned in one direction, i.e., in an isotropic phase. Liquid crystal molecules having an isotropic phase do not affect the incident light. Thus, the incident light passes through the liquid crystal layer **113** without any polarization shift. As depicted in FIG. 7B, the light **115a** from the backlight device **115** enters the CLC polarizer **111**. Only the left-handed circularly polarized light **111a** of the light **115a** can pass through the CLC polarizer **111**. The left-handed circularly polarized light **111a** then passes through the lower substrate **105**; through the CLC color filter **107**, which transmits a dominant wavelength such as Red, Green or Blue; through the lower retardation film **106**; and through the transparent portion "H" of the reflective electrode **109** (i.e. the pixel electrode). The left-handed circularly polarized light **111a** leaves the transparent portion "H" as left-handed circularly polarized light **109a**. The left-handed circularly polarized light **109a** passes through the liquid crystal layer **113** without any polarization change. The left-handed circularly polarized light **109a** then passes through the color filter **104**

and through the upper substrate **101**. The left-handed circularly polarized light **109a** is then converted into linearly polarized light by the upper polarizer **102**. The linearly polarized light **102a** is polarized perpendicular to the optical axis of the upper polarizer **103**, and thus does not pass through the upper linear polarizer **103**. Thus, the LCD panel produces a dark pixel.

FIG. 8 depicts the passage of light from the backlight device **115** through selected components of the transfective LCD device **100** of FIG. 5 when operating in a transmissive mode. While not specifically shown in FIG. 8, that light eventually enters into the liquid crystal layer **113** via the transparent portion "H" of the reflective electrode **109** (i.e. the pixel electrode). Let us suppose that the CLC color filter **107** only passes red-light, and that the color filter **104** on the upper substrate **101** (see FIG. 5) is red. In other words the CLC color filter **107** and the filter of the color filter **104** are color aligned. Operation using green and blue light is similar.

Only the left-handed circularly polarized light **111a** component of the light **115a** from the backlight device **115** (see FIG. 5) passes through the CLC polarizer **111**. When the left-handed circularly polarized light **111a** reaches the CLC color filter **107**, only the red portion passes through the CLC color filter. The green- and blue-light of the left-handed circularly polarized light **111b** are reflected by the CLC polarizer **107**. The red portion leaves the CLC color filter **107** as red left-handed circularly polarized light **107a**. The red left-handed circularly polarized light **107a** is converted as it passes through the lower retardation film **106** into red linearly polarized light **106a**. The red linearly polarized light **106a** is then reflected by the reflective electrode **109**. The red reflected red linearly polarized light **106a** then re-enters the lower retardation **106** and emerges as red left-handed circularly polarized light **106b**. The red left-handed circularly polarized light **106b** then passes through the CLC color filter **107** and the CLC polarizer **111** without any polarization shift. The red left-handed circularly polarized light **106b** is then reflected by a reflective plate **110** of the backlight device **115**. The red left-handed circularly polarized light **106b** is reflected as red right-handed circularly polarized light **110a** via the mirror effect. The red right-handed circularly polarized light **110a** is then reflected by the CLC polarizer **111** and advances toward the transparent portion "H."

The red right-handed circularly polarized light **110a** is reflected by the reflective plate **110** into red left-handed circularly polarized light **110b**. Still referring to FIG. 8, the red left-handed circularly polarized light **110b** passes through the CLC polarizer **111**, through the CLC color filter **107**, through the isotropic phase portion "K" of the lower retardation film **106**, and through the transparent portion "H" of the reflective electrode **109**. The action of the CLC color filter **107** and the CLC polarizer **111** leads to light from the backlight device **115** passing through the transparent portion "H" of the reflective electrode **109**. Thus, a transfective LCD device having a high brightness can be achieved. Although not specifically shown in FIG. 8, the lower substrate **105** (see FIG. 5) can be located in any position on a lower substrate assembly (comprised of the reflective electrode **109**, the retardation film **106**, the CLC color filter **107**, and the CLC polarizer **111**).

FIG. 9 is a cross-sectional view illustrating a transfective LCD device according to a second embodiment of the present invention. As shown in FIG. 9, a lower retardation film **106** has isotropic phase portions "K" comprised of CLC color filters **107**. The CLC color filters correspond in size

with the transparent portions "H" of the reflective electrode **109**. Each CLC color filter **107** transmits a dominant wavelength (color) that can pass through an associated color of the color filter **104**. The remainder of the transfective LCD device is generally as depicted in FIG. 5.

FIG. 10 depicts the passage of light from the backlight device **115** through selected components of the transfective LCD device of FIG. 9 when it is operating in a transmissive mode. Only the left-handed circularly polarized light **111a** component of the light **115a** from the backlight device **115** (see FIG. 5) passes through the CLC polarizer **111**. The left-handed circularly polarized light **111a** includes red-, green- and blue-light wavelengths. The left-handed circularly polarized light **111a** is converted into linearly polarized light **106a** as the left-handed circularly polarized light **111a** passes through the lower retardation film **106**. The linearly polarized light **106a** is reflected by the reflective electrode **109** and re-enters the lower retardation film **106**. The linearly polarized light **106a** is then converted into left-handed circularly polarized light **106b** as the linearly polarized light **106a** passes through the lower retardation film **106**. The left-handed circularly polarized light **106b** passes through the CLC polarizer **11** without polarization change. Then, the left-handed circularly polarized light **106b** is reflected by a reflective plate **110** of the backlight device **115**. The reflection causes the left-handed circularly polarized light **106b** to become right-handed circularly polarized light **111b** via the mirror effect. The right-handed circularly polarized light **111b** is then reflected by the CLC polarizer **111**. The right-handed circularly polarized light **111b** is then reflected by the reflective plate **110** and converted into left-handed circularly polarized light **111c**. Thus, the reflected light advance toward the transparent portion "H." The left-handed circularly polarized light **111c** then passes through the CLC polarizer **111** and to the CLC color filter **107** in the lower retardation film **106**. With the left-handed circularly polarized light **111c** applied to the CLC color filter **107**, only the portion (say red) of the light having the wavelength of the CLC color filter **107** can pass through that color filter. Thus, a red, left-handed circularly polarized light **107a** passes through the CLC color filter **107**, through the transparent portion "H," and into the liquid crystal layer (not shown in FIG. 9).

As described above, the CLC color filter **107** and the lower retardation film **106** are formed in the same layer, in contrast to the embodiment illustrated in FIG. 5. Thus, the resulting transfective LCD device can be thinner, yet still have a high brightness.

FIG. 11 is a cross-sectional view illustrating a third embodiment transfective LCD device according to the principles of the present invention. As shown in FIG. 11, a CLC color filter **107** is located in what was the transparent portion "H" of the reflective electrode **109**. Again, the CLC color filter **107** transmits the dominant wavelength that can pass through the associated filter of the color filter **104**. In this embodiment, the portion "K" of the lower retardation film **106**, which corresponds in size to the CLC color filter **107** has an isotropic phase. The remainder of the transfective LCD device is generally as depicted in FIG. 5.

FIG. 12 depicts the passage of light from the backlight device **115** through selected components of the transfective LCD device of FIG. 11 when it is operating in a transmissive mode. Only the left-handed circularly polarized light **111a** component of the light **115a** from the backlight device **115** passes through the CLC polarizer **111**. The left-handed circularly polarized light **111a** has red-, green- and blue-light wavelengths. The left-handed circularly polarized light **111a**

is then converted into linearly polarized light **106a** by the lower retardation film **106**. The linearly polarized light **106a** is reflected by the reflective electrode **109** and re-enters the lower retardation film **106**. The reflected linearly polarized light **106a** is converted into left-handed circularly polarized light **106b** by the lower retardation film **106**. The left-handed circularly polarized light **106b** passes through the CLC polarizer **111** without any polarization change. Then, the left-handed circularly polarized light **106b** is reflected by a reflective plate **110** of the backlight device **115**. The left-handed circularly polarized light **106b** is then reflected as a right-handed circularly polarized light **106c** via the mirror effect. The right-handed circularly polarized light **106c** is then reflected by the CLC polarizer **111**. The reflected, right-handed circularly polarized light **106c** is then reflected by the reflective plate **110** as a left-handed circularly polarized light **106d** via the mirror effect. Thus, the light advances toward the isotropic phase portion "K." The left-handed circularly polarized light **106d** from the reflective plate **110** passes through the CLC polarizer **111** and through the isotropic phase portion "K." The left-handed circularly light **106d** then illuminates the CLC color filter **107**. When the left-handed circularly polarized light **106d** illuminates the CLC color filter **107** only light having the wavelength of the CLC color filter **107** (say red) can pass. Thus, only red, left-handed circularly polarized light **107a** enters the liquid crystal layer.

The above-mentioned structure has a CLC color filter **107** and a reflective electrode **109** formed in the same layer, contrary to the first and second embodiments of the present invention described above.

FIG. 13 is a cross-sectional view illustrating another embodiment transfective LCD device according to the principles of the present invention. As shown in FIG. 13, a CLC color filter **107** is formed in the transmissive portion "H" of the reflective electrode **109**, and in the portion "K" of the lower retardation film **106**. Therefore, this structure leads to particularly high color purity. The light from the backlight device **115** as it passes through components of the array substrate according to FIG. 13 is the same as depicted in FIG. 10.

As described herein, a transfective LCD device according to the principles of the present invention includes a CLC color filter and a CLC polarizer that are arranged on the lower substrate of the transfective LCD panel (i.e., an array substrate). The light from the backlight device is not absorbed in the lower polarizer, but passes through the array substrate into the liquid crystal. Therefore, relatively good brightness can be achieved.

It will be apparent to those skilled in the art that various modifications and variation can be made in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A transfective liquid crystal display device, comprising:
 - a first polarizer;
 - a first retardation film under the first polarizer;
 - a first substrate under the first retardation film;
 - a color filter under the first substrate;
 - a reflective electrode having a light transmitting portion below the color filter;
 - a liquid crystal layer interposed between the color filter and the reflective electrode;

11

- a second retardation film under the reflective electrode, wherein the second retardation film has a first portion that transmits light without polarization change and a second portion that transmits light with a phase difference of $\lambda/4$;
- a CLC color filter below the liquid crystal layer;
- a second polarizer made of a cholesteric liquid crystal and formed below the second retardation film; and
- a backlight device arranged below the second polarizer for irradiating light toward the second polarizer.
2. The transfective liquid crystal display device according to claim 1, wherein the CLC color filter is formed in the light transmitting portion of the reflective electrode.
3. The transfective liquid crystal display device according to claim 1, wherein the CLC color filter is formed in the first portion of the second retardation film.
4. The transfective liquid crystal display device according to claim 1, wherein the CLC color filter is a color filter layer disposed between the second retardation film and the second polarizer.
5. The transfective liquid crystal display device according to claim 1, wherein the first portion of the second retardation film corresponds in size to the light transmitting portion of the reflective electrode.
6. The transfective liquid crystal display device according to claim 1, wherein the reflective electrode includes a metal.
7. The transfective liquid crystal display device according to claim 1, wherein the light transmitting portion of the reflective electrode is a transparent conductor.
8. The transfective liquid crystal display device according to claim 7, wherein the transparent conductor includes Indium.
9. The transfective liquid crystal display device according to claim 1, wherein the second polarizer passes circularly polarized light.
10. The transfective liquid crystal display device according to claim 1, wherein the second retardation film converts circularly polarized light into linearly polarized light.
11. The transfective liquid crystal display device according to claim 1, further including a second substrate between the backlight device and the liquid crystal layer.

12

12. A transfective liquid crystal display device, comprising:
- a first polarizer;
- a first retardation film under the first polarizer;
- a first substrate under the first retardation film;
- a color filter under the first substrate;
- a reflective electrode having a light transmitting portion, wherein the light transmitting portion is filled with a CLC color filter;
- a liquid crystal layer interposed between the color filter and the reflective electrode;
- a second retardation film formed under the reflective electrode, wherein the second retardation film has a first portion that is filled with a CLC color filter, and a second portion that transmits light with a phase difference $\lambda/4$;
- a second polarizer made of a cholesteric liquid crystal below the second retardation film; and
- a backlight device below the second polarizer for irradiating light onto the second polarizer.
13. The transfective liquid crystal display device according to claim 12, wherein the first portion of the second retardation film corresponds in size to the light transmitting portion of the reflective electrode.
14. The transfective liquid crystal display device according to claim 12, wherein the reflective electrode includes a metal.
15. The transfective liquid crystal display device according to claim 12, wherein the second polarizer passes circularly polarized light.
16. The transfective liquid crystal display device according to claim 12, wherein the second retardation film converts circularly polarized light into linearly polarized light.
17. The transfective liquid crystal display device according to claim 12, further including a second substrate between the backlight device and the liquid crystal layer.
18. The transfective liquid crystal display device according to claim 12, wherein said CLC color filter filters a primary color.

* * * * *

专利名称(译)	透反液晶显示装置		
公开(公告)号	US6621543	公开(公告)日	2003-09-16
申请号	US09/755097	申请日	2001-01-08
[标]申请(专利权)人(译)	MOON JONG WEON		
申请(专利权)人(译)	MOON JONG-WEON		
当前申请(专利权)人(译)	LG.PHILIPS LCD CO. , LTD.		
[标]发明人	MOON JONG WEON		
发明人	MOON, JONG-WEON		
IPC分类号	G02F1/13 G02F1/1335 G02F1/13363 G02F1/133		
CPC分类号	G02F1/133514 G02F1/133536 G02F1/133555 G02F1/13363 G02F2001/133565 G02F2001/133633 G02F2001/133638 G02F2413/02 G02F2413/09 G02F2413/15		
审查员(译)	KIM , 罗伯特H.		
助理审查员(译)	阮HOAN		
优先权	1020000000398 2000-01-06 KR		
其他公开文献	US20010020990A1		
外部链接	Espacenet USPTO		

摘要(译)

一种透反液晶显示装置，可选择性地用于透射模式或反射模式。透反液晶面板包括具有透明部分的反射电极，CLC滤色器和CLC偏振器。来自背光装置的光可以穿过反射电极的透明部分并进入液晶。此外，来自背光装置的被反射电极反射的光也可以穿过透明部分进入液晶而不被CLC偏振器吸收。因此改善了透反射LCD装置的亮度。

