



US 20150250454A1

(19) **United States**(12) **Patent Application Publication**
LEE(10) **Pub. No.: US 2015/0250454 A1**(43) **Pub. Date: Sep. 10, 2015**(54) **METHOD AND APPARATUS FOR
GENERATING ULTRASOUND IMAGE
HAVING ENHANCED QUALITY****Publication Classification**(71) Applicant: **SAMSUNG MEDISON CO., LTD.**,
Gangwon-do (KR)(72) Inventor: **Jae-Sung LEE**, Gangwon-do (KR)(51) **Int. Cl.**
A61B 8/08 (2006.01)
A61B 8/00 (2006.01)
A61B 8/14 (2006.01)(52) **U.S. Cl.**
CPC *A61B 8/5207* (2013.01); *A61B 8/14*
(2013.01); *A61B 8/467* (2013.01)(21) Appl. No.: **14/591,815**(22) Filed: **Jan. 7, 2015**(30) **Foreign Application Priority Data**

Mar. 6, 2014 (KR) 10-2014-0026814

(57) **ABSTRACT**

A method of generating an ultrasound image includes acquiring a response signal to an ultrasound wave transmitted to an object, changing a level of the acquired response signal depending on a position and an amplitude of the acquired response signal on a scan line, performing logarithmic compression on the level-changed response signal, and generating an ultrasound image based on the compressed signal.

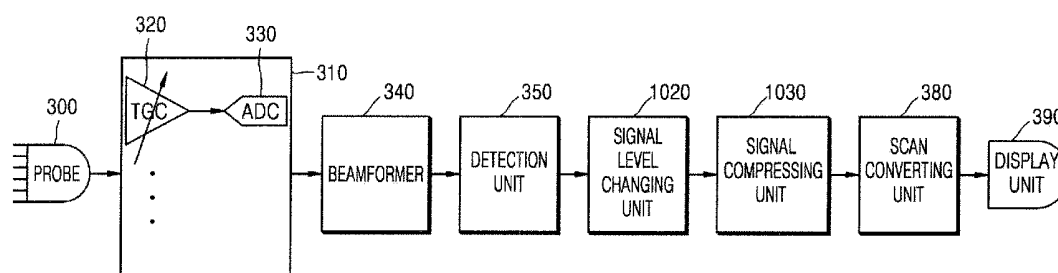


FIG. 1A

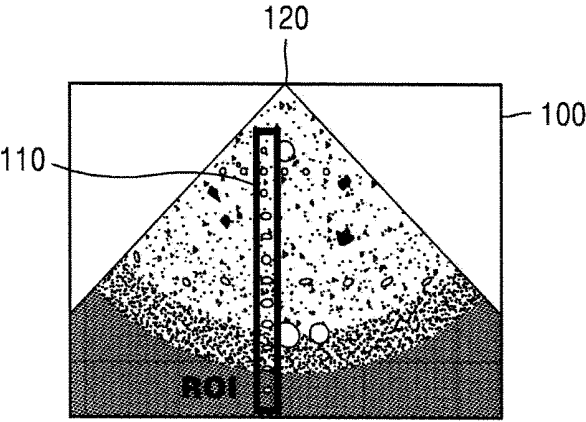


FIG. 1B

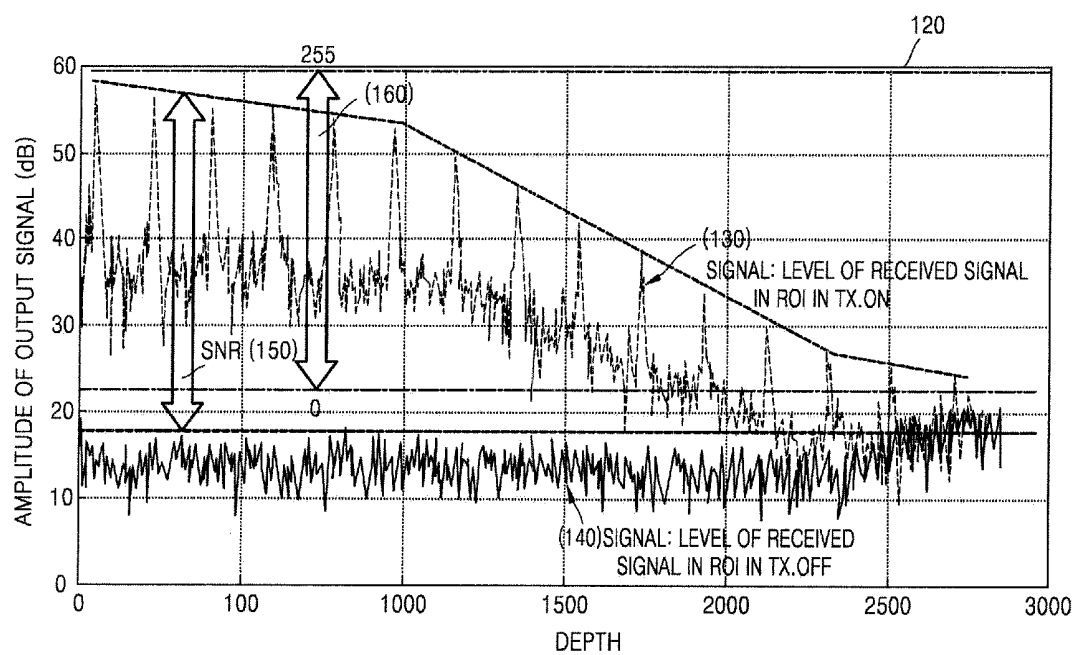


FIG. 1C

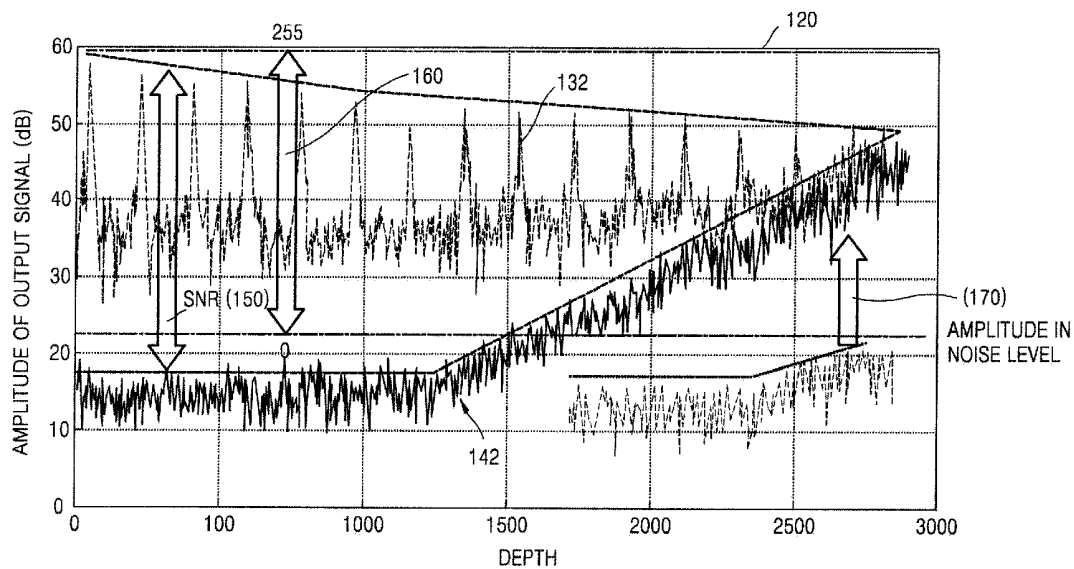


FIG. 1D

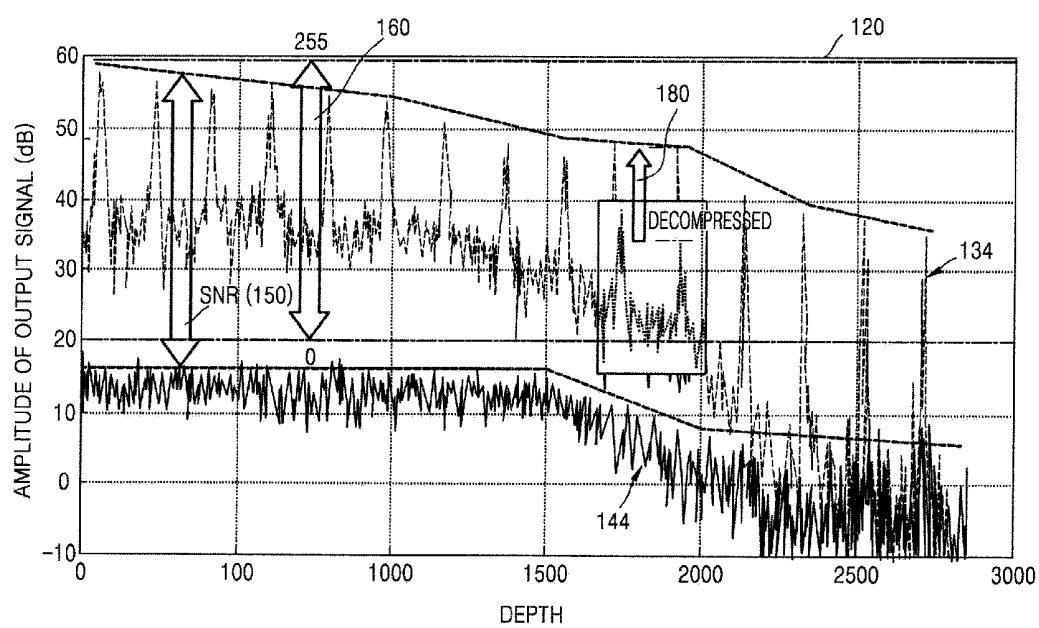


FIG. 2

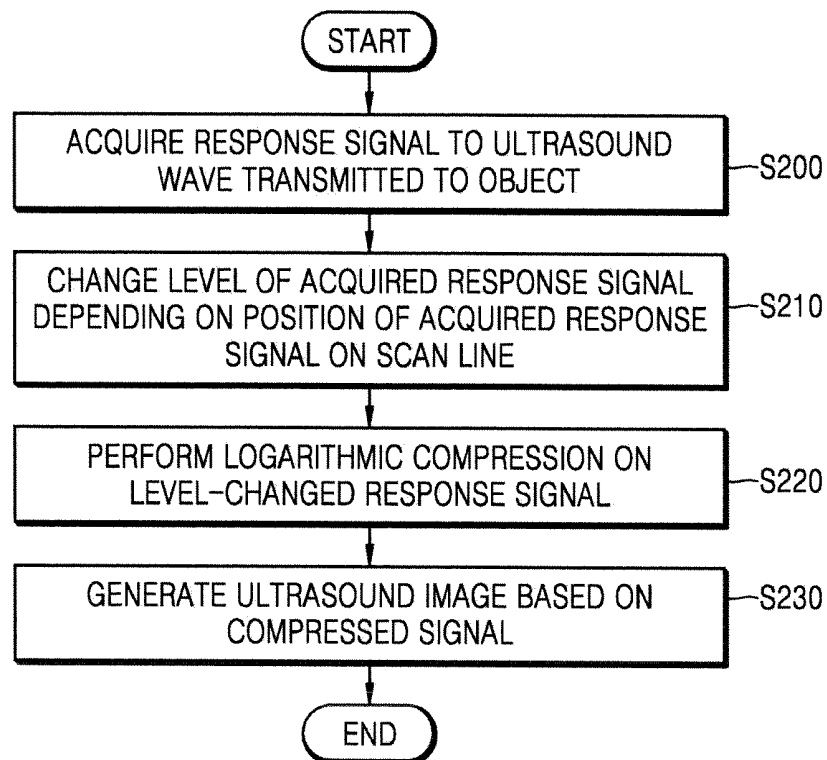


FIG. 3

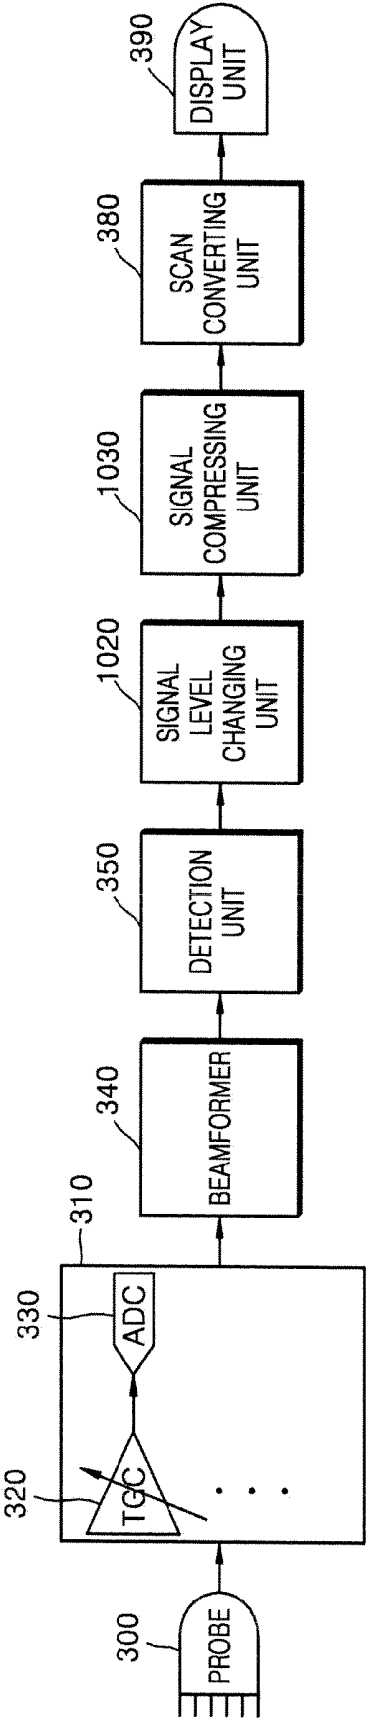


FIG. 4

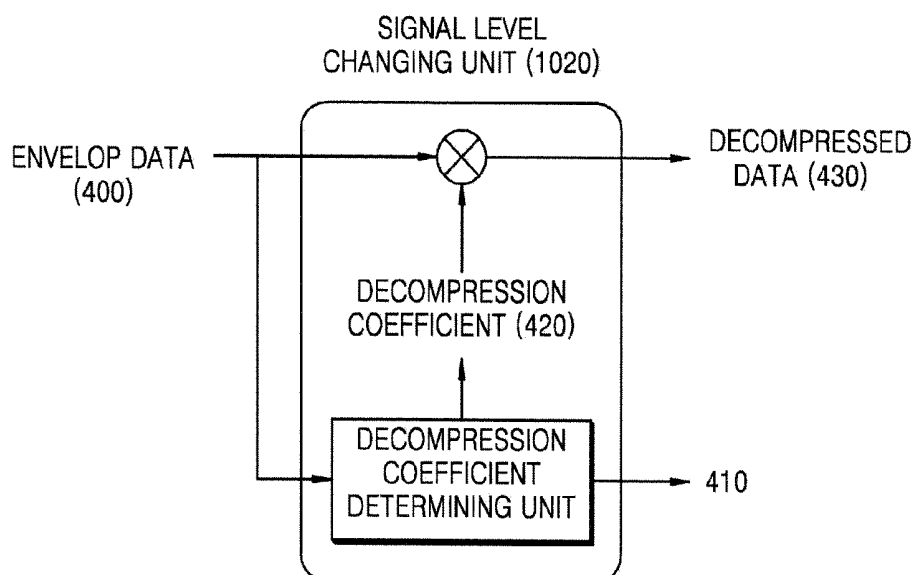


FIG. 5

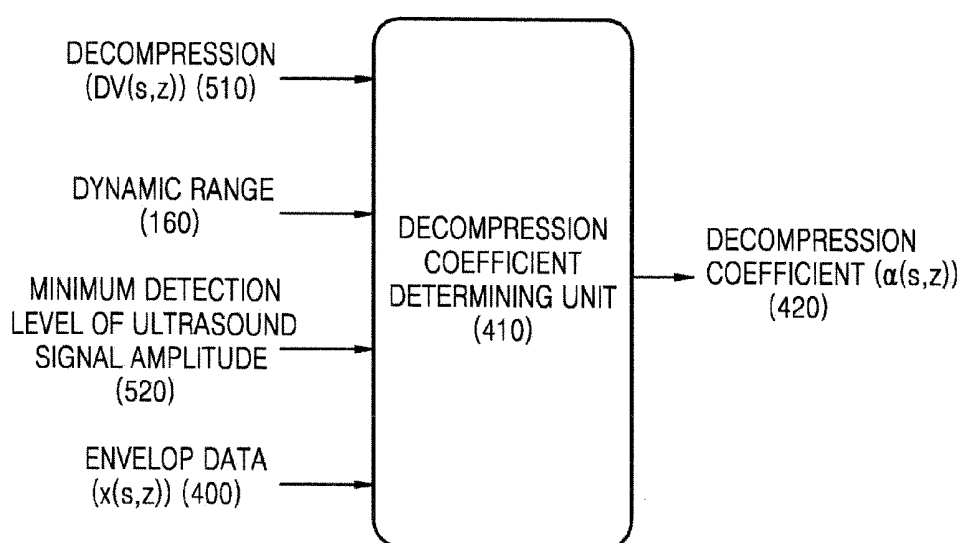


FIG. 6A

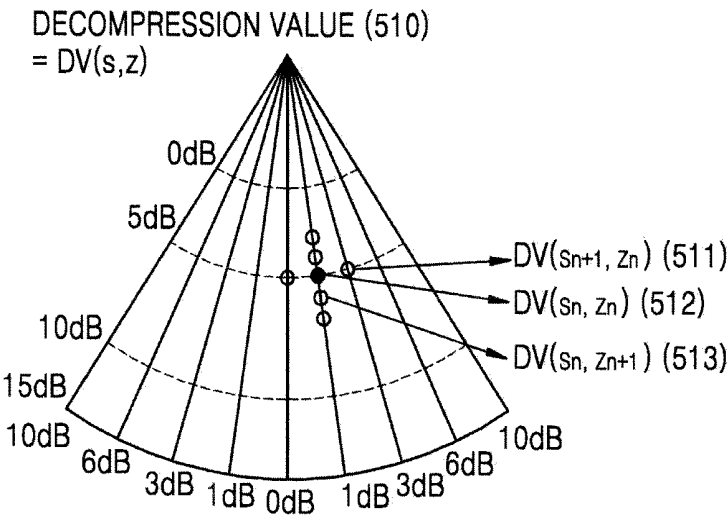


FIG. 6B

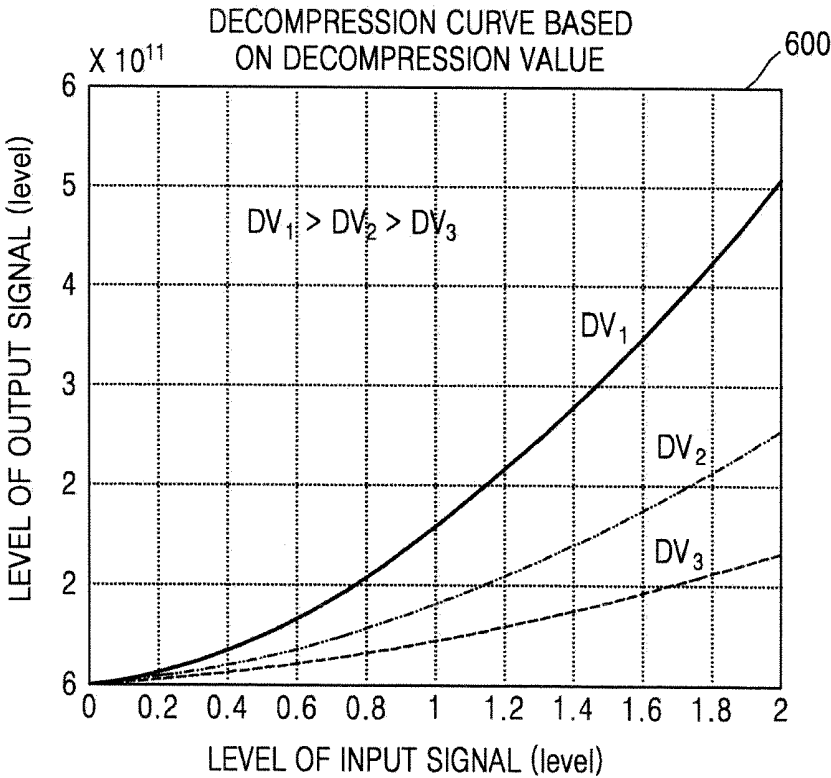


FIG. 7A

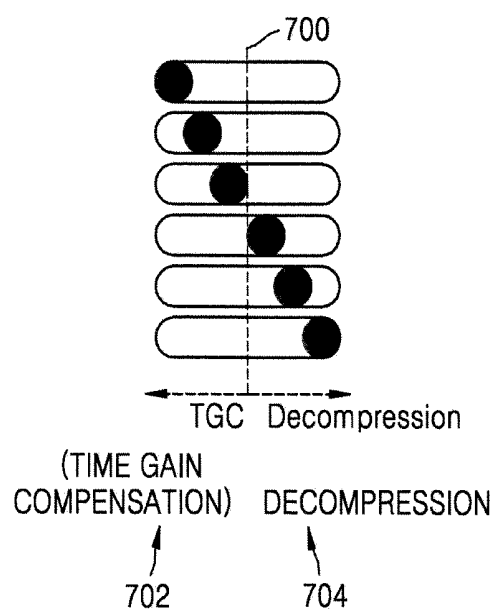


FIG. 7B

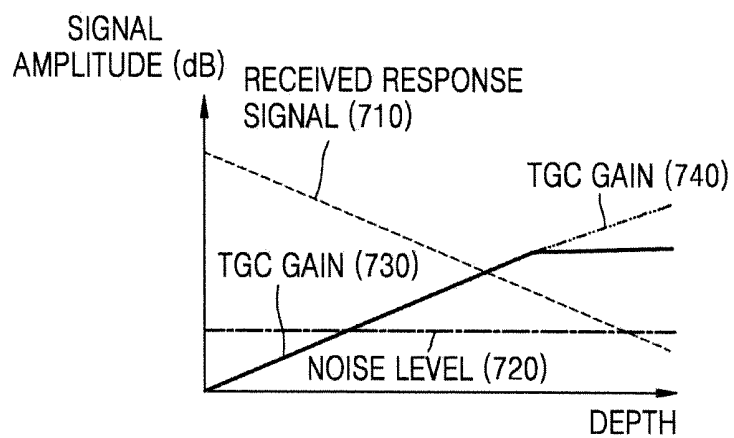


FIG. 8

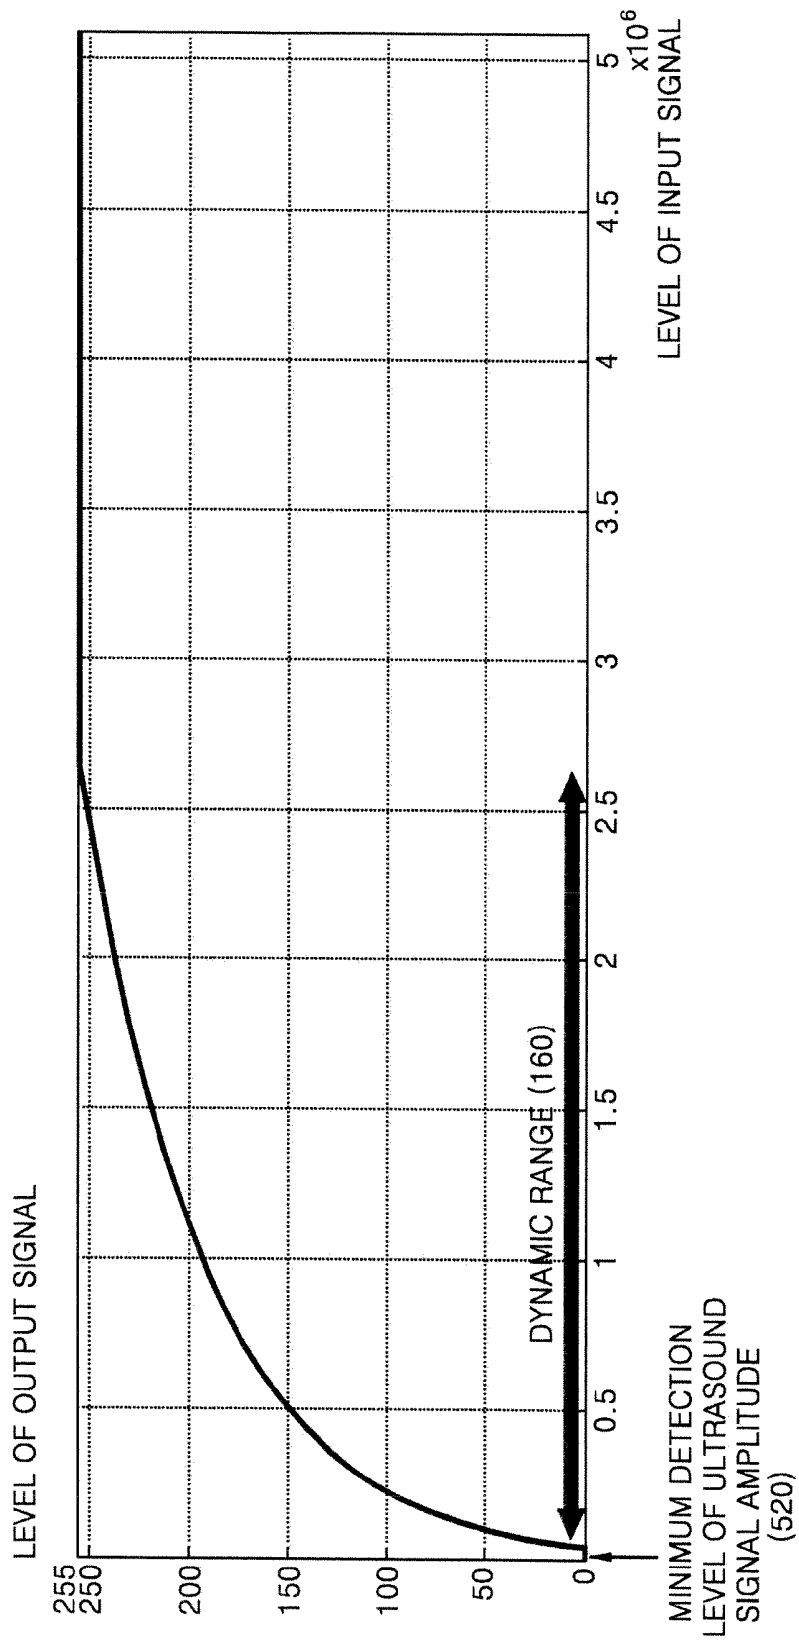


FIG. 9

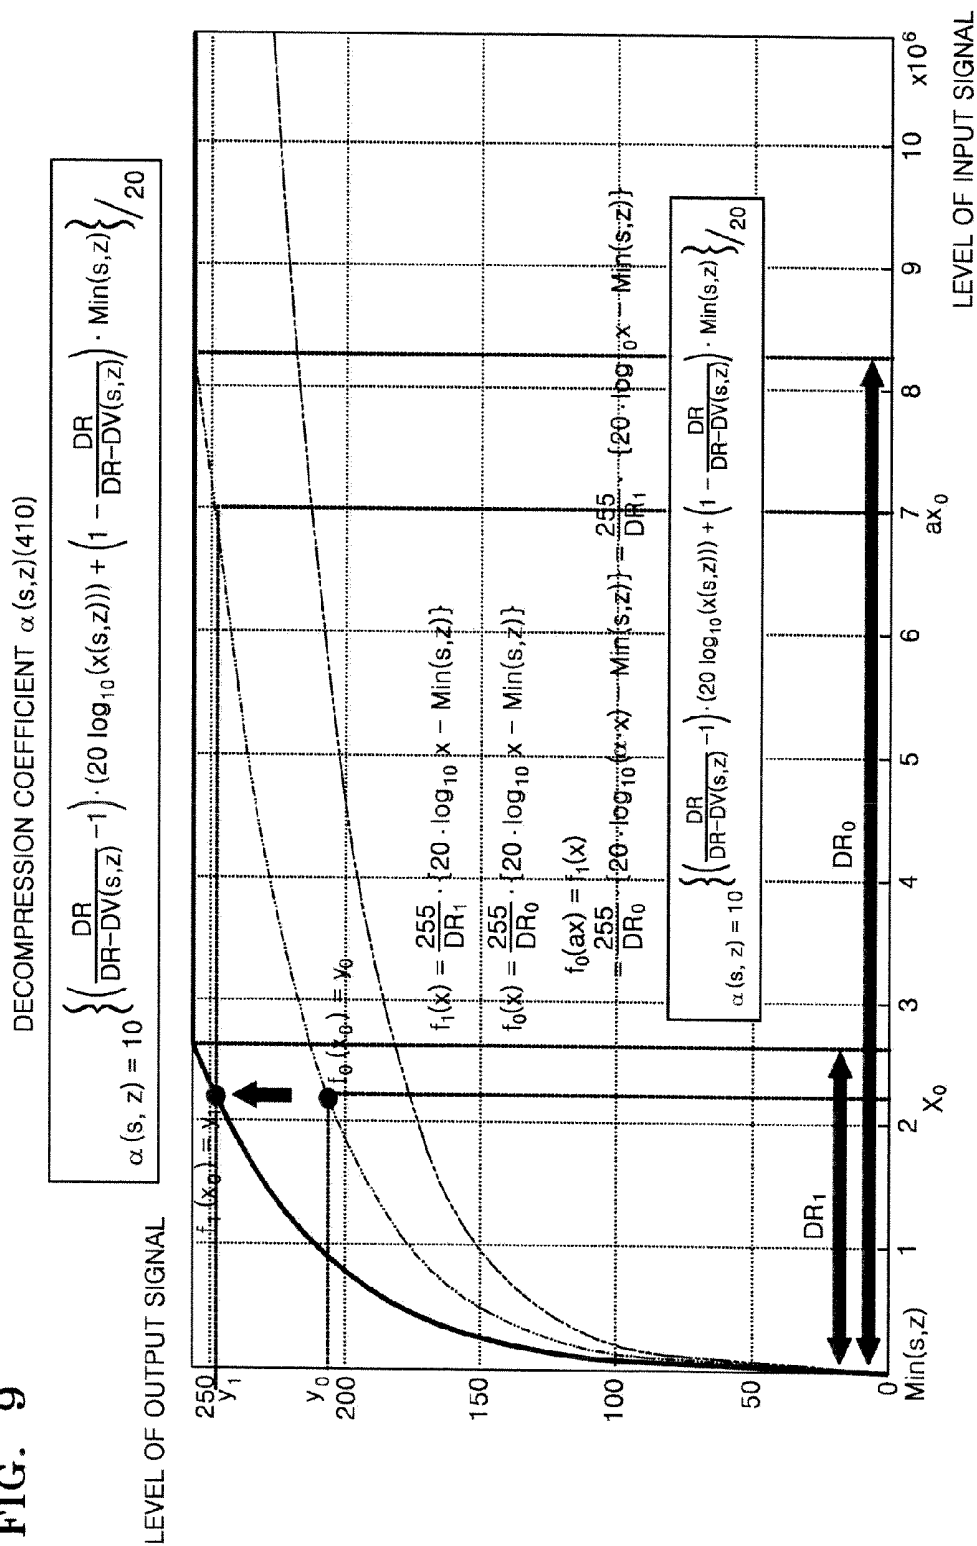
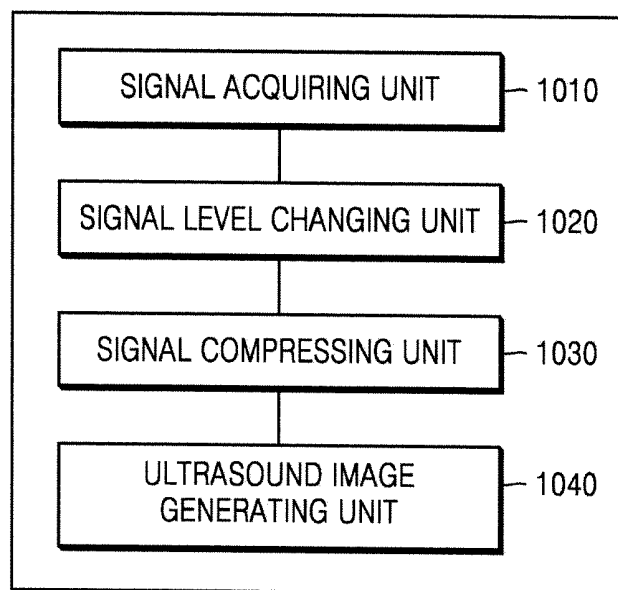


FIG. 10

1000

METHOD AND APPARATUS FOR GENERATING ULTRASOUND IMAGE HAVING ENHANCED QUALITY

RELATED APPLICATION

[0001] This application claims the benefit of Korean Patent Application No. 10-2014-0026814, filed on Mar. 6, 2014, in the Korean Intellectual Property Office, the disclosure of which is incorporated herein in its entirety by reference.

BACKGROUND

[0002] 1. Field

[0003] One or more embodiments of the present invention relate to a method and apparatus for generating an ultrasound image having enhanced quality.

[0004] 2. Description of the Related Art

[0005] Ultrasound diagnostic apparatuses irradiate an ultrasound signal, generated from a transducer of a probe, onto an object and receive an echo signal reflected from the object, thereby obtaining an image of an internal part of the object. In particular, ultrasound diagnostic apparatuses are used for medical purposes such as observing the inside of an object, detecting a foreign material, and assessing an injury. Ultrasound diagnostic apparatuses have higher stability than diagnostic apparatuses using X-rays, display an image in real time, and are safe because there is no exposure to radioactivity. Thus, they may be widely used along with other image diagnostic apparatuses.

[0006] When a related art ultrasound diagnostic apparatus is used, it is necessary to acquire an optimal ultrasound image of a body part to be examined. The ultrasound image should have appropriate sharpness for accurately analyzing the body part. Thus, a user has to finely adjust an image parameter (for example, a time gain compensation (TGC) parameter, a gain parameter, a reject parameter, and a dynamic range (DR) parameter) corresponding to the brightness and contrast of an image to be displayed in order to acquire an optimal ultrasound image. The fine adjustment of the image parameter is not automatically performed by the ultrasound diagnostic apparatus but is manually performed by the user. That is, when the related art ultrasound diagnostic apparatus is used, the user should manually and finely adjust the image parameter through a complicated process in order to improve the quality of a displayed ultrasound image. For this reason, a diagnosis time increases.

SUMMARY

[0007] One or more embodiments of the present invention comprises a method and apparatus for generating an ultrasound image having enhanced quality, whereby noise is clearly distinguished from an ultrasound signal for an object through a decompression operation that changes a size of a the ultrasound signal according to an ultrasound response signal and an acquired position on a scan line, thereby generating an ultrasound image having enhanced quality.

[0008] Additional aspects will be set forth in part in the description which follows and, in part, will be apparent from the description, or may be learned by practice of the presented embodiments.

[0009] According to one or more embodiments of the present invention, a method of generating an ultrasound image by changing a level of a signal on a scan line acquired position and amplitude of an ultrasound response signal

depending on an acquired position and amplitude of an ultrasound response signal comprises: acquiring a response signal to an ultrasound wave transmitted to an object; changing a level of the acquired response signal depending on a position and an amplitude of the acquired response signal on a scan line; performing logarithmic compression on the level-changed response signal; and generating an ultrasound image based on the compressed signal.

[0010] The changing of the level may be performed by multiplying an amplitude of envelop data, included in the response signal, by a decompression coefficient.

[0011] The decompression coefficient may be determined based on at least one of a decompression value, a dynamic range, a minimum detection level of ultrasound signal intensity, and an amplitude of envelop data.

[0012] The decompression value may be determined depending on a position of each pixel indicating the ultrasound image.

[0013] The decompression value may be preset according to a predetermined reference, or may be set in real time according to a user input.

[0014] The decompression coefficient may be determined via the equation below:

$$\alpha(s, z) = 10^{\left(\left(\frac{DR}{DR - DV(s, z)} - 1 \right) (20 \log_{10}(x(s, z))) + \left(1 - \frac{DR}{DR - DV(s, z)} \right) \cdot \text{Min}(s, z) \right) / 20}$$

where S denotes a scan line position value, z denotes a depth position value, $\alpha(s, z)$ is a decompression coefficient at coordinates (s, z), DR denotes a dynamic range, DV(s, z) denotes a decompression value at coordinates (s, z), MIN(s, z) denotes a minimum detection level of ultrasound signal amplitude at coordinates (s, z), and $x(s, z)$ denotes an amplitude of envelop data at coordinates (s, z).

[0015] According to one or more embodiments of the present invention, an apparatus for generating an ultrasound image by changing a level of a signal on a scan line acquired position and amplitude of an ultrasound response signal comprising: a signal acquiring unit that acquires a response signal to an ultrasound wave transmitted to an object; a signal level changing unit that changes a level of the acquired response signal depending on a position and an amplitude of the acquired response signal on a scan line; a signal compressing unit that performs logarithmic compression on the level-changed response signal; and an ultrasound image generating unit that generate an ultrasound image based on the compressed signal.

[0016] The signal level changing unit may change the level of the response signal by multiplying an amplitude of envelop data included in the response signal by a decompression coefficient.

[0017] The decompression coefficient may be determined based on at least one of a decompression value, a dynamic range, a minimum detection level of ultrasound signal intensity, and an amplitude of envelop data.

[0018] The decompression value may be determined depending on a position of each pixel indicating the ultrasound image.

[0019] The decompression value may be preset according to a predetermined reference, or is set in real time according to a user input.

[0020] The decompression coefficient may be determined via the equation below:

$$\alpha(s, z) = 10^{\left\{ \left(\frac{DR}{DR-DV(s,z)} - 1 \right) \cdot (20 \log_{10}(x(s,z))) + \left(1 - \frac{DR}{DR-DV(s,z)} \right) \cdot \text{Min}(s,z) \right\} / 20}$$

where S denotes a scan line position value, z denotes a depth position value, $\alpha(s, z)$ is a decompression coefficient at coordinates (s, z), DR denotes a dynamic range, DV(s, z) denotes a decompression value at coordinates (s, z), MIN(s, z) denotes a minimum detection level of ultrasound signal amplitude at coordinates (s, z) coordinates, and $x(s, z)$ denotes an amplitude of envelop data at coordinates (s, z).

[0021] According to one or more embodiments of the present invention, provided is a non-transitory computer-readable storage medium storing a program for executing the above method in a computer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] These and/or other aspects will become apparent and more readily appreciated from the following description of the embodiments, taken in conjunction with the accompanying drawings in which:

[0023] FIG. 1A is a diagram illustrating an ultrasound image generated in the related art;

[0024] FIG. 1B is a diagram illustrating an ultrasound signal generated by using an analog time gain compensation (ATGC) method;

[0025] FIG. 10 is a diagram illustrating an ultrasound signal generated by using a digital time gain compensation (DTGC) method;

[0026] FIG. 1D is a diagram illustrating an ultrasound signal generated according to an embodiment of the present invention;

[0027] FIG. 2 is a flowchart illustrating an ultrasound image generating method according to an embodiment of the present invention;

[0028] FIG. 3 is a conceptual diagram schematically illustrating an ultrasound image generating apparatus according to an embodiment of the present invention;

[0029] FIG. 4 is a diagram for describing a signal level changing unit according to an embodiment of the present invention;

[0030] FIG. 5 is a diagram for describing a decompression coefficient determining unit according to an embodiment of the present invention;

[0031] FIGS. 6A and 6B are diagrams for describing an influence of a change in a decompression value according to an embodiment of the present invention;

[0032] FIGS. 7A and 7B are diagrams for describing a method of generating an ultrasound image by changing a decompression value according to an embodiment of the present invention;

[0033] FIG. 8 is a diagram for describing a decompression coefficient determining method according to an embodiment of the present invention;

[0034] FIG. 9 is a diagram for describing a decompression coefficient determining method according to another embodiment of the present invention; and

[0035] FIG. 10 is a block diagram illustrating an ultrasound image generating apparatus according to an embodiment of the present invention.

DETAILED DESCRIPTION

[0036] Reference will now be made in detail to embodiments, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to like elements throughout. In this regard, the present embodiments may have different forms and should not be construed as being limited to the descriptions set forth herein. Accordingly, the embodiments are merely described below, by referring to the figures, to explain aspects of the present description. Expressions such as “at least one of,” when preceding a list of elements, modify the entire list of elements and do not modify the individual elements of the list.

[0037] The advantages, features, and aspects of the present invention will become apparent from the following description of the embodiments with reference to the accompanying drawings, which is set forth hereinafter. The present invention may, however, be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the present invention to those of ordinary skill in the art. Like reference numerals refer to like elements throughout.

[0038] In this disclosure below, when it is described that one component comprises (or includes or has) some elements, it should be understood that the component may comprise (or include or has) only those elements or may comprise (or include or have) other elements if there is no specific limitation. The term “module”, as used herein, means, but is not limited to, a software or hardware component, such as a Field Programmable Gate Array (FPGA) or an Application Specific Integrated Circuit (ASIC), which performs certain tasks. A module may advantageously be configured to reside in the addressable storage medium and configured to execute on one or more processors. Thus, a module may include, by way of example, components, such as software components, object-oriented software components, class components and task components, processes, functions, attributes, procedures, subroutines, segments of program code, drivers, firmware, microcode, circuitry, data, databases, data structures, tables, arrays, and variables. The functionality provided for in the components and modules may be combined into fewer components and modules or further separated into additional components and modules.

[0039] Exemplary embodiments of the present invention capable of being easily embodied by those of ordinary skill in the art will now be described in detail with reference to the accompanying drawings. The present invention may, however, be embodied in many different forms and should not be construed as being limited to the embodiments set forth herein. In the accompanying drawings, a portion irrelevant to a description of the present invention will be omitted for clarity.

[0040] Terms used in the present invention have been selected as general terms which are widely used at present, in consideration of the functions of the present invention, but may be altered according to the intent of an operator of ordinary skill in the art, conventional practice, or introduction of new technology. Also, if there is a term which is arbitrarily selected by the applicant in a specific case, a meaning of the term will be described in detail in a corresponding description portion of the present invention. Therefore, the terms should be defined on the basis of the entire content of this specification instead of a simple name of each of the terms.

[0041] Terms used herein will be briefly described, and the present invention will be described in detail.

[0042] The term “ultrasound image” used herein denotes an image of an object acquired by using an ultrasound wave. Also, the term “object” used herein may include a person, an animal, a part of the person, or a part of the animal. For example, an object may include an organ such as a liver, a heart, a womb, a brain, breasts, an abdomen, or the like, or a blood vessel. Also, the term “object” may include a phantom. The phantom denotes a material having a volume that is very close to a density and effective atomic number of an organism, and may be a spherical phantom having a characteristic similar to a physical body.

[0043] Moreover, the term “user” used herein is a medical expert, and may be a medical doctor, a nurse, a medical technologist, a medical image expert, or the like, or may be an engineer who repairs medical apparatuses. However, the user is not limited thereto.

[0044] Hereinafter, embodiments of the present invention will be described in detail with reference to the accompanying drawings.

[0045] FIG. 1A is a diagram illustrating an ultrasound image 100. Referring to FIG. 1A, a user's region of interest (ROI) 110 may be set in the ultrasound image 100. In the ultrasound image 100, a vertex 120 of a fan-shaped area is a portion where an ultrasound probe is located. At the vertex 120 of the ultrasound image 100, a depth with respect to the ultrasound probe is 0, and the depth becomes deeper progressively farther away from the vertex 120. A level of an ultrasound signal reflected at a faraway position from the vertex 120 is less than that of an ultrasound signal reflected at a relatively close position from the vertex 120. An ultrasound signal at a deeper depth is an ultrasound signal reflected from a faraway position, and thus, a level of the ultrasound signal is gradually reduced.

[0046] FIG. 1B is a diagram illustrating an ultrasound signal generated by using an analog time gain compensation (ATGC) method. FIG. 1B is a graph 120 for comparing an amplitude of an ultrasound output signal 130 based on a depth in the user's ROI 110 of the ultrasound image 100 of FIG. 1A. Referring to the graph 120, the amplitude of the ultrasound output signal 130 is reduced as a depth becomes deeper from 0. The amplitude of the ultrasound output signal 120 is classified into 256 levels from 0 to 255. A level 0 is a level where the amplitude of the ultrasound output signal 120 is the lowest, and a level 225 is a level where the amplitude of the ultrasound output signal 120 is the highest. A dynamic range (DR) 160 may include a level 0 to a level 255 for classifying the 255 of the ultrasound output signal 120.

[0047] Noise 140 may include white noise which is generated in an ultrasound diagnostic apparatus. A signal-to-noise ratio (SNR) 150 denotes a decibel count when signal power exceeds noise power. The SNR 150 denotes an energy ratio of a signal and noise. The SNR 150 of FIG. 1B denotes an energy ratio of power of the ultrasound output signal 130 and power of the noise 140. When a value of the SNR 150 is large, a level of the ultrasound output signal 130 is higher than that of the noise 140, and thus, the ultrasound output signal 130 is clearly distinguished. However, when the value of the SNR 150 is small, it is difficult to distinguish the noise 140 and the ultrasound output signal 130. Therefore, an ultrasound image generated based on the ultrasound output signal 130 is not shown with proper sharpness. Since the amplitude of the ultrasound output signal 130 is inversely proportional to

depth, the amplitude of the ultrasound output signal 130 is reduced as the depth increases. However, since noise generally occurs in an apparatus, there is approximately no correlation between a depth of the ultrasound probe and the amplitude of the noise. In a section where the depth is shallow, since the amplitude of the ultrasound output signal 130 is large, the SNR 150 is high, but as the depth increases, the SNR 150 becomes lower, and thus, it is not possible to distinguish the ultrasound output signal 130 and the noise 140. Referring to FIG. 1B, the ultrasound output signal 130 and the noise 140 are compensated for through an ATGC operation in order to enlarge a portion where the ultrasound output signal 130 and the noise 140 are not distinguished at a large depth. However, as the depth increases, the SNR 150 is rapidly reduced, an attenuation of the ultrasound output signal 130 exceeds a compensation range based on the ATGC operation, and thus, in a section where the depth is large (for example, a section in which a sample value of the depth is 2,500 to 3,000 units), it is difficult to distinguish the ultrasound output signal 130 because the amplitude of the ultrasound output signal 130 is similar to that of the noise 140.

[0048] FIG. 1C is a diagram illustrating an ultrasound signal which is generated by using a digital time gain compensation (DTGC) method. FIG. 1C is a graph 120 for comparing an amplitude of an ultrasound output signal 132 based on a depth in the user's ROI 110 of the ultrasound image 100 of FIG. 1A. Referring to FIG. 1C, the ultrasound output signal 132 and noise 142 are compensated for through a DTGC in order to enlarge a portion where the ultrasound output signal 132 and the noise 142 are not distinguished at a large depth. A degree of attenuation of the ultrasound output signal 132 which is obtained through the DTGC operation is reduced, but all signals including the noise 142 are compensated for. Therefore, a noise level also increases (as shown by 170), and thus, a difference between the ultrasound output signal 132 and noise 142 is reduced.

[0049] FIG. 1D is a diagram illustrating an ultrasound signal generated according to an embodiment of the present invention. FIG. 1D is a graph 120 that shows an amplitude of an ultrasound output signal 134 based on a depth in the user's ROI 110 of the ultrasound image 100 of FIG. 1A. Referring to the graph 120, the amplitude of the ultrasound output signal 134 is reduced as a depth increases from 0. Referring to FIG. 1D, an operation of changing a level of the ultrasound output signal 134 may be performed for supplementing that it is difficult to distinguish the ultrasound output signal 134 and noise 144 as the depth increases. The level changing operation may be referred to as a decompression operation 180. Comparing a signal obtained through the decompression operation 180 of FIG. 1D with the signal 130 obtained through the ATGC operation of FIG. 1B and the signal 132 obtained through the DTGC operation of FIG. 1C, it may be seen that although the ultrasound output signal 134 becomes deeper through the decompression operation 180, it is difficult to distinguish the noise 144 and the ultrasound output signal 134 in a corresponding portion, and the amplitude of the ultrasound output signal is large.

[0050] FIG. 10 is a block diagram illustrating an ultrasound image generating apparatus 1000 according to an embodiment of the present invention. The ultrasound image generating apparatus 1000 according to an embodiment of the present invention may include a signal acquiring unit 1010, a signal level changing unit 1020, a signal compressing unit 1030, and an ultrasound image generating unit 1040. Opera-

tions of the components **1010**, **1020**, **1030** and **1040** of the ultrasound image generating apparatus **1000** will be described in detail with reference to FIG. 2.

[0051] FIG. 2 is a flowchart illustrating an ultrasound image generating method according to an embodiment of the present invention.

[0052] In operation **S200**, the signal acquiring unit **1010** may acquire a response signal to an ultrasound wave which is transmitted to an object.

[0053] In operation **S210**, the signal level changing unit **1020** may change a level of the acquired response signal depending on a position and an amplitude of the acquired response signal on a scan line. The level of the response signal may be changed by multiplying an amplitude of envelop data included in the response signal by a decompression coefficient. The decompression coefficient may be determined based on at least one of a decompression value “DR”, as dynamic range “DR”, a minimum detection level “MIN(s, z)” of ultrasound signal amplitude, and an amplitude of envelop data. The decompression value “DR” and the minimum detection level “MIN(s, z)” of the ultrasound signal amplitude may be determined depending on a position of each pixel indicating an ultrasound image. The decompression value “DR” may be preset based on a predetermined reference, or may be set in real time according to a user input. The decompression value “DR” may be determined via the following Equation (1):

$$\alpha(s, z) = 10^{\left\{ \left(\frac{DR}{DR - DV(s, z)} - 1 \right) \cdot (20 \cdot \log_{10}(x(s, z))) + \left(1 - \frac{DR}{DR - DV(s, z)} \right) \cdot \text{Min}(s, z) \right\} / 20} \quad (1)$$

where S denotes a scan line position value, z denotes a depth position value, $\alpha(s, z)$ is a decompression coefficient at coordinates (s, z), DR denotes a dynamic range, DV(s, z) denotes a decompression value at coordinates (s, z), MIN(s, z) denotes a minimum detection level of ultrasound signal intensity at coordinates (s, z) coordinates, and x(s, z) denotes an amplitude of envelop data at coordinates (s, z).

[0054] In operation **S220**, the signal compressing unit **1030** may perform logarithmic compression on the level-changed response signal. The ultrasound image generating apparatus **1000** may perform the logarithmic compression of the response signal to convert the response signal into data which is used to generate an ultrasound image.

[0055] In operation **S230**, the ultrasound image generating unit **1040** may generate the ultrasound image on the basis of the compressed signal.

[0056] FIG. 3 is a conceptual diagram schematically illustrating an ultrasound image generating apparatus **1000** according to an embodiment of the present invention.

[0057] The ultrasound image generating apparatus **1000** according to an embodiment of the present invention may include a probe **300**, a signal converting unit **310**, a beamformer **340**, a detection unit **350**, a signal level changing unit **1020**, a signal compressing unit **1030**, a scan converting unit **380**, and a display unit **390**.

[0058] The probe **300** may transmit an ultrasound signal to an object, and receive an echo signal reflected from the object. The probe **300** may include a plurality of transducers, and each of the plurality of transducers may vibrate according to an electrical signal applied thereto to generate an ultrasound wave that is sound energy. Also, the probe **300** may be wiredly or wirelessly connected to a body of the ultrasound image

generating apparatus **1000**, which may include a plurality of the probes **300** depending on an implementation type.

[0059] The signal converting unit **310** may logarithmically amplify the echo signal, which is received by the probe **300** through a time gain compensation (TGC) unit **320**, to enhance an amplitude of the echo signal. The signal converting unit **310** may convert the echo signal, which is an analog signal, into a digital signal by using an analog-to-digital converter (ADC) **330**.

[0060] The beamformer **340** may perform beamforming of the echo signal. The beamforming denotes an operation of electronically focusing an ultrasound wave. For example, when focusing delay varies with time, the beamformer **340** may gradually move a focusing point for all points on a scan line and focus the echo signal.

[0061] The detection unit **350** may detect and acquire the beamformed echo signal by using an ultrasound sensor. In the present specification, for convenience of description, the acquired echo signal is a response signal.

[0062] The signal level changing unit **1020** may change a level of the acquired response signal depending on a position and an amplitude of the acquired response signal on the scan line. The signal level changing unit **1020** may perform an operation including the operation which has been described above in operation **S210** of FIG. 2.

[0063] The signal compressing unit **1030** may perform logarithmic compression of the size-changed response signal. The signal compressing unit **1030** may perform an operation including the operation which has been described above in operation **S220** of FIG. 2.

[0064] The scan converting unit **380** may perform scan conversion of the compressed response signal. The scan conversion may be referred to as rasterization, and may include an operation in which a graphics object to be displayed is expressed as a set of discrete pixel values. The scan conversion may include an operation in which the graphics object is displayed as pixel information having a two-dimensional (2D) matrix type having X and Y coordinate values. In the present specification, the scan conversion may include an operation of converting the compressed response signal into an ultrasound image.

[0065] The display unit **390** may display the converted ultrasound image.

[0066] FIG. 4 is a diagram for describing the signal level changing unit **1020** according to an embodiment of the present invention.

[0067] Referring to FIG. 4, amplitude of envelop data **400** may include the response signal which is acquired by using the detection unit **350** of FIG. 3. In other words, the signal level changing unit **1020** may receive the amplitude of envelop data **400**. The signal level changing unit **1020** may include a decompression coefficient determining unit **410**. In the signal level changing unit **1020**, the decompression coefficient determining unit **410** may determine a decompression coefficient **420** by using the received amplitude of envelop data **400**. The signal level changing unit **1020** may multiply the received amplitude of envelop data **400** and the determined decompression coefficient **420** to output size-changed data, for example, decompressed data **430**.

[0068] FIG. 5 is a diagram for describing a decompression coefficient determining unit **410** according to an embodiment of the present invention.

[0069] Referring to FIG. 5, the decompression coefficient determining unit **410** may be included in the signal level

changing unit **1020** of FIG. 4. The decompression coefficient determining unit **410** may receive a decompression value “DV” **510**, a dynamic range “DR” **160**, a minimum detection level “MIN(s, z)” **520** of ultrasound signal intensity, and an amplitude of envelop data “X(s, z)” **400** to determine a decompression coefficient “a(s, z)”.

[0070] The decompression value **510** may include a value indicating a degree of decompression which is performed a scan line and a depth on the scan line. The dynamic range **160** denotes a range in which an ultrasound signal can be acquired and is determined by using a compression curve. The minimum detection level **520** of the ultrasound signal amplitude may include a 0 level, which is the lowest level among all levels of an ultrasound signal for classifying ultrasound signals. The amplitude of envelop data **400** may include a response signal acquired by the detection unit **350**. An embodiment of a method of determining a decompression coefficient will be described below with reference to FIG. 9.

[0071] FIGS. 6A and 6B are diagrams for describing an influence of a change in a decompression value according to an embodiment of the present invention.

[0072] Referring to FIG. 6A, the decompression value **510** may have different coordinate values depending on a scan line and a depth on the scan line. For example, points P1 and P2 are points which have the same depth but have different scan lines, and may have different decompression values “DV(Sn+1, Zn)” **511** and “DV(Sn, Zn)” **512**. Also, the point P2 and a point P3 are points which have the same scan line but have different depths, and may have different decompression values “DV(Sn, Zn)” **512** and “DV(Sn, Zn+1)” **513**. The decompression value **510** based on each scan line and a depth may be preset according to a reference (for example, a higher decompression value than a decompression value based on a different depth is applied in a section where a sample value of a depth is 1,500 to 2,000 units), and may be arbitrarily changed by a user.

[0073] Referring to FIG. 6B, it may be seen that levels of a plurality of the decompression values **510** differ “DV1>DV2>DV3”. In a decompression curve **600** based on the decompression values **510**, it may be seen that as a decompression value increases, a level of an output signal based on a level of an input signal becomes higher.

[0074] FIGS. 7A and 7B are diagrams for describing a method of generating an ultrasound image by changing a decompression value according to an embodiment of the present invention.

[0075] Referring to FIG. 7A, an ultrasound image may be generated by changing a decompression value by using a switch **700**. The decompression value **510** may be preset according to a predetermined reference, or may be set in real time according to a user input. For example, a depth of the ultrasound image may be divided into six sections so as to change the decompression value, and the decompression value **510** in each of the six sections may be set previously or in real time. When a user moves six switches in each section to the right by using the switch **700** or a virtual switch so as to change the decompression value as illustrated in FIG. 7A, a time gain value increases in a time gain compensation **702** section, and a decompression **704** value is fixed. Also, when the user moves the six switches in each section to the right above the time gain compensation section and a decompression region so as to change the decompression value, the time gain compensation **702** is fixed to the maximum value, and

since the decompression **704** increases, the decompression value **510** may be set to a high value.

[0076] The above-described switch **700** may be included in a control panel of an ultrasound diagnostic apparatus. Also, the above-described virtual switch may be displayed as a graphics user interface (GUI) on a display unit, and may be manipulated by the user.

[0077] A relationship between a TGC gain **730** and a decompression gain **740** will now be described for a received response signal **710** and a noise level **720** with reference to FIG. 7B.

[0078] The received response signal **710** may have lower amplitude as a depth increases. The noise level **720** denotes an amplitude of noise which occurs in an apparatus and may have certain intensity irrespective of a depth. In the TGC gain **730**, as a depth becomes deeper, a higher gain is given to the received response signal **710**, but in a certain depth or more, a constant gain may be given to the received response signal **710**. In the decompression gain **740**, as a depth becomes deeper, a higher gain may be given to the received response signal **710**, even in a case of a certain depth or more in which a constant gain is given in the TGC gain **730**. Therefore, a user compensates for the received response signal **710** by further using the decompression gain **740** instead of using only the TGC gain **730**, and thus, it is easy to distinguish the received response signal **710** from noise.

[0079] FIG. 8 is a diagram for describing a decompression coefficient determining method according to an embodiment of the present invention. FIG. 8 shows a compression curve, and the ultrasound image generating apparatus **1000** may calculate a dynamic range **160** and a minimum detection level **520** of ultrasound signal intensity by using information which is shown in the compression curve. The ultrasound detection range **160** may include a range in which the ultrasound image generating apparatus **1000** is capable of acquiring an ultrasound signal. The ultrasound image generating apparatus **1000** may classify the ultrasound signal by level when acquiring the ultrasound signal, and the minimum detection level **520** of the ultrasound signal intensity may include a 0 level that is the lowest level. The ultrasound image generating apparatus **1000** may use, as inputs of the decompression coefficient determining unit **410**, the ultrasound detection range **160** and the minimum detection level **520** of the ultrasound signal intensity by using the compression curve.

[0080] FIG. 9 is a diagram for describing a decompression coefficient determining method according to another embodiment of the present invention.

[0081] FIG. 9 is a diagram illustrating an operation of determining a decompression coefficient by using input values input to the decompression coefficient determining unit **410**. The decompression coefficient may be determined via Equation (1).

[0082] Referring to FIG. 9, the decompression coefficient may be determined by using a relationship between $f_0(x)$ and $f_1(x)$. Thus, the decompression coefficient is calculated by using the following equations.

$$f_1(x) = \frac{255}{DR_1} \cdot \{20 \cdot \log_{10} x - \text{MIN}(s, z)\}$$

$$f_0(x) = \frac{255}{DR_0} \cdot \{20 \cdot \log_{10} x - \text{MIN}(s, z)\}$$

-continued

$$f_0(ax) = f_1(x)$$

$$\frac{255}{DR_0} \cdot \{20 \cdot \log_{10}(a \cdot x) - \text{MIN}(s, z)\} = \frac{255}{DR_1} \cdot \{20 \cdot \log_{10}x - \text{MIN}(s, z)\}$$

$$\alpha(s, z) = 10^{\left\{ \left(\frac{DR}{DR-DV(s,z)} - 1 \right) \cdot (20 \log_{10}(x(s,z))) + \left(1 - \frac{DR}{DR-DV(s,z)} \right) \cdot \text{Min}(s,z) \right\} / 20}$$

[0083] where DR0-DR1 denotes DV(s, z), that is, a decompression value, DR in the calculated decompression coefficient is equal to DR0. DR-DV(s, z) is DR0-DV(s, z), and is equal to DR1.

[0084] In the above equations, S denotes a scan line position value, z denotes a depth position value, a(s, z) is a decompression coefficient at coordinates (s, z), DR denotes a dynamic range, DV(s, z) denotes a decompression value at coordinates (s, z), MIN(s, z) denotes a minimum detection level of ultrasound signal amplitude at coordinates (s, z), and x(s, z) denotes an amplitude of envelop data at coordinates (s, z).

[0085] FIG. 10 is a block diagram illustrating the ultrasound image generating apparatus 1000 according to an embodiment of the present invention. The ultrasound image generating apparatus 1000 according to an embodiment of the present invention may include the signal acquiring unit 1010, the signal level changing unit 1020, the signal compressing unit 1030, and the ultrasound image generating unit 1040.

[0086] The signal acquiring unit 1010 may acquire a response signal to an ultrasound wave which is transmitted to an object. The signal acquiring unit 1010 may include the probe 300, signal converting unit 310, beamformer 340, and detection unit 350 of FIG. 3.

[0087] The signal level changing unit 1020 may change a level of the acquired response signal depending on a position and an amplitude of the acquired response signal on a scan line. The signal level changing unit 1020 may be change the level of the response signal multiplying an amplitude of envelop data, included in the response signal, by a decompression coefficient. The decompression coefficient may be determined based on at least one of a decompression value "DV", a dynamic range "DR", a minimum detection level "MIN(s, z)" of ultrasound signal intensity, and an amplitude of envelop data. The decompression value "DR" and the minimum detection level "MIN(s, z)" of the ultrasound signal intensity may be determined depending on a position of each pixel indicating an ultrasound image. The decompression value "DR" may be preset based on a predetermined reference, or may be set in real time according to a user input. The decompression value "DR" may be determined as expressed in the following Equation:

$$\alpha(s, z) = 10^{\left\{ \left(\frac{DR}{DR-DV(s,z)} - 1 \right) \cdot (20 \log_{10}(x(s,z))) + \left(1 - \frac{DR}{DR-DV(s,z)} \right) \cdot \text{Min}(s,z) \right\} / 20}$$

where S denotes a scan line position value, z denotes a depth position value, a(s, z) is a decompression coefficient by (s, z) coordinates, DR denotes a dynamic range, DV(s, z) denotes a decompression value by (s, z) coordinates, MIN(s, z) denotes a minimum detection level of ultrasound signal intensity by (s, z) coordinates, and x(s, z) denotes an amplitude of envelop data by (s, z) coordinates.

[0088] The signal compressing unit 1030 may perform logarithmic compression of the size-changed response signal.

[0089] The ultrasound image generating unit 1040 may generate an ultrasound image on the basis of a compressed signal. The ultrasound image generating unit 1040 may include the scan converting unit 380 and display unit 390 of FIG. 3. The scan converting unit 380 may generate the ultrasound image through a scan conversion operation. The display unit 390 may display the generated ultrasound image. The ultrasound image may include a Doppler image which expresses a moving object by using the Doppler effect, in addition to a grayscale image which is acquired by scanning an object in an amplitude (A) mode, a brightness (B) mode, and a motion (M) mode. The Doppler image may include a blood Doppler image (or called a color Doppler image) indicating a flow of blood, a tissue Doppler image indicating a motion of a tissue, and a spectral Doppler image that displays a moving speed of the target object as a waveform.

[0090] The ultrasound image generating apparatus 1000 may extract a B mode component from ultrasound data, and process the B mode component. The ultrasound image generating apparatus 1000 may generate an ultrasound image in which intensity of a signal is expressed as brightness, based on the extracted B mode component.

[0091] The ultrasound image generating apparatus 1000 may perform a volume rendering operation on volume data to generate a three-dimensional (3D) ultrasound image, and generate an elastic image in which a degree of change of an object due to a pressure is expressed as an image. The ultrasound image generating apparatus 1000 may express, as a text and graphics, various pieces of additional information on the ultrasound image. The generated ultrasound image may be stored in a memory.

[0092] The display unit 390 may display the generated ultrasound image. The display unit 390 may display various pieces of information associated with an ultrasound diagnosis, in addition to the ultrasound image, on a screen through a graphics user interface (GUI). The ultrasound image generating apparatus 1000 may include two or more the display units 390 depending on an implementation type.

[0093] The embodiments of the present invention may be written as computer programs and may be implemented in general-use digital computers that execute the programs using a computer readable recording medium.

[0094] Examples of the computer readable recording medium include magnetic storage media (e.g., ROM, floppy disks, hard disks, etc.) and optical recording media (e.g., CD-ROMs, or DVDs).

[0095] It should be understood that the exemplary embodiments described herein should be considered in a descriptive sense only and not for purposes of limitation. Descriptions of features or aspects within each embodiment should typically be considered as available for other similar features or aspects in other embodiments.

[0096] While one or more embodiments of the present invention have been described with reference to the figures, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention as defined by the following claims.

What is claimed is:

1. A method of generating an ultrasound image by changing a level of a signal on a scan line depending on an acquired position and amplitude of an ultrasound response signal, the method comprising:

acquiring a response signal to an ultrasound wave transmitted to an object;
 changing a level of the acquired response signal depending on a position and an amplitude of the acquired response signal on a scan line;
 performing logarithmic compression on the level-changed response signal; and
 generating an ultrasound image based on the compressed signal.

2. The method of claim 1, wherein the changing of the level is performed by multiplying an amplitude of envelop data included in the response signal by a decompression coefficient.

3. The method of claim 2, wherein the decompression coefficient is determined based on at least one of a decompression value, a dynamic range, a minimum detection level of ultrasound signal amplitude, and an amplitude of envelop data.

4. The method of claim 3, wherein the decompression value is determined depending on a position of each pixel indicating the ultrasound image.

5. The method of claim 3, wherein the decompression value is preset according to a predetermined reference or is set in real time according to a user input.

6. The method of claim 2, wherein the decompression coefficient is determined via the equation below:

$$\alpha(s, z) = 10^{\left\{ \left(\frac{DR}{DR-DV(s,z)} - 1 \right) \cdot (20 \log_{10}(x(s,z))) + \left(1 - \frac{DR}{DR-DV(s,z)} \right) \cdot \text{Min}(s,z) \right\} / 20}$$

where S denotes a scan line position value, z denotes a depth position value, $a(s, z)$ is a decompression coefficient at coordinates (s, z), DR denotes a dynamic range, DV(s, z) denotes a decompression value at coordinates (s, z), MIN(s, z) denotes a minimum detection level of ultrasound signal amplitude at coordinates (s, z), and $x(s, z)$ denotes an amplitude of envelop data at coordinates (s, z).

7. An apparatus for generating an ultrasound image by changing a level of a signal on a scan line depending on an

acquired position and amplitude of an ultrasound response signal, the apparatus comprising:

a signal acquiring unit that acquires a response signal to an ultrasound wave transmitted to an object;

a signal level changing unit that changes a level of the acquired response signal depending on a position and amplitude of the acquired response signal on a scan line;

a signal compressing unit that performs logarithmic compression on the level-changed response signal; and
 an ultrasound image generating unit that generate an ultrasound image based on the compressed signal.

8. The apparatus of claim 7, wherein the signal level changing unit changes the level of the response signal by multiplying an amplitude of envelop data included in the response signal by a decompression coefficient.

9. The apparatus of claim 8, wherein the decompression coefficient is determined based on at least one of a decompression value, a dynamic range, a minimum detection level of ultrasound signal amplitude, and an amplitude of envelop data.

10. The apparatus of claim 9, wherein the decompression value is determined depending on a position of each pixel indicating the ultrasound image.

11. The apparatus of claim 9, wherein the decompression value is preset according to a predetermined reference or is set in real time according to a user input.

12. The apparatus of claim 8, wherein the decompression coefficient is determined via the equation below:

$$\alpha(s, z) = 10^{\left\{ \left(\frac{DR}{DR-DV(s,z)} - 1 \right) \cdot (20 \log_{10}(x(s,z))) + \left(1 - \frac{DR}{DR-DV(s,z)} \right) \cdot \text{Min}(s,z) \right\} / 20}$$

where S denotes a scan line position value, z denotes a depth position value, $a(s, z)$ is a decompression coefficient at coordinates (s, z), DR denotes a dynamic range, DV(s, z) denotes a decompression value at coordinates (s, z), MIN(s, z) denotes a minimum detection level of ultrasound signal intensity at coordinates (s, z), and $x(s, z)$ denotes an amplitude of envelop data at coordinates (s, z).

* * * * *

专利名称(译)	用于生成具有增强质量的超声图像的方法和设备		
公开(公告)号	US20150250454A1	公开(公告)日	2015-09-10
申请号	US14/591815	申请日	2015-01-07
[标]申请(专利权)人(译)	三星麦迪森株式会社		
申请(专利权)人(译)	三星MEDISON CO. , LTD.		
当前申请(专利权)人(译)	三星MEDISON CO. , LTD.		
[标]发明人	LEE JAE SUNG		
发明人	LEE, JAE-SUNG		
IPC分类号	A61B8/08 A61B8/00 A61B8/14		
CPC分类号	A61B8/5207 A61B8/467 A61B8/14 G01S7/52033 G01S7/52046 G01S7/52077		
优先权	1020140026814 2014-03-06 KR		
其他公开文献	US10123779		
外部链接	Espacenet USPTO		

摘要(译)

产生超声图像的方法包括获取对发送到对象的超声波的响应信号，根据所获取的响应信号在扫描线上的位置和幅度来改变所获取的响应信号的电平，对其执行对数压缩。水平改变的响应信号，并基于压缩信号产生超声图像。

