



US008111226B2

(12) **United States Patent**
Tsai et al.

(10) **Patent No.:** **US 8,111,226 B2**
(45) **Date of Patent:** **Feb. 7, 2012**

(54) **LIQUID CRYSTAL DISPLAY DEVICE**

(75) Inventors: **Yi-Cheng Tsai**, Taoyuan County (TW);
Kuei-Wei Huang, Taipei (TW)

(73) Assignee: **Chunghwa Picture Tubes, Ltd.**, Bade,
Taoyuan (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 503 days.

(21) Appl. No.: **12/465,641**

(22) Filed: **May 13, 2009**

(65) **Prior Publication Data**

US 2010/0231494 A1 Sep. 16, 2010

(30) **Foreign Application Priority Data**

Mar. 16, 2009 (TW) 98204043 U

(51) **Int. Cl.**
G02F 1/133 (2006.01)
G09G 3/36 (2006.01)

(52) **U.S. Cl.** **345/90**; 345/92; 345/94; 345/204;
349/48; 349/139; 349/144

(58) **Field of Classification Search** 345/87-104,
345/204; 349/48, 129, 144, 139
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2005/0036091	A1	2/2005	Song	
2007/0018927	A1	1/2007	Kim	
2009/0122214	A1 *	5/2009	Yoon et al.	349/48
2009/0135323	A1 *	5/2009	Yang et al.	349/37

* cited by examiner

Primary Examiner — Lun-Yi Lao


Assistant Examiner — MD Saiful A Siddiqui

(74) *Attorney, Agent, or Firm* — Winston Hsu; Scott Margo

(57) **ABSTRACT**

A multi-domain vertical alignment liquid crystal display device includes a data line, a first gate line, a second gate line, a first sub-pixel unit, and a second sub-pixel unit. The first sub-pixel unit includes a first switch, a first liquid-crystal capacitor and a first storage capacitor. The first switch functions to control writing the data signal of the data line into the first liquid-crystal and storage capacitors based on the first gate signal of the first gate line. The second sub-pixel unit includes a second switch, a second liquid-crystal capacitor, an auxiliary switch, a second storage capacitor and a third storage capacitor. The second and auxiliary switches are employed to control writing the data signal into the second liquid-crystal capacitor, the second storage capacitor and the third storage capacitor based on the first gate signal and the second gate signal of the second gate line respectively.

13 Claims, 11 Drawing Sheets

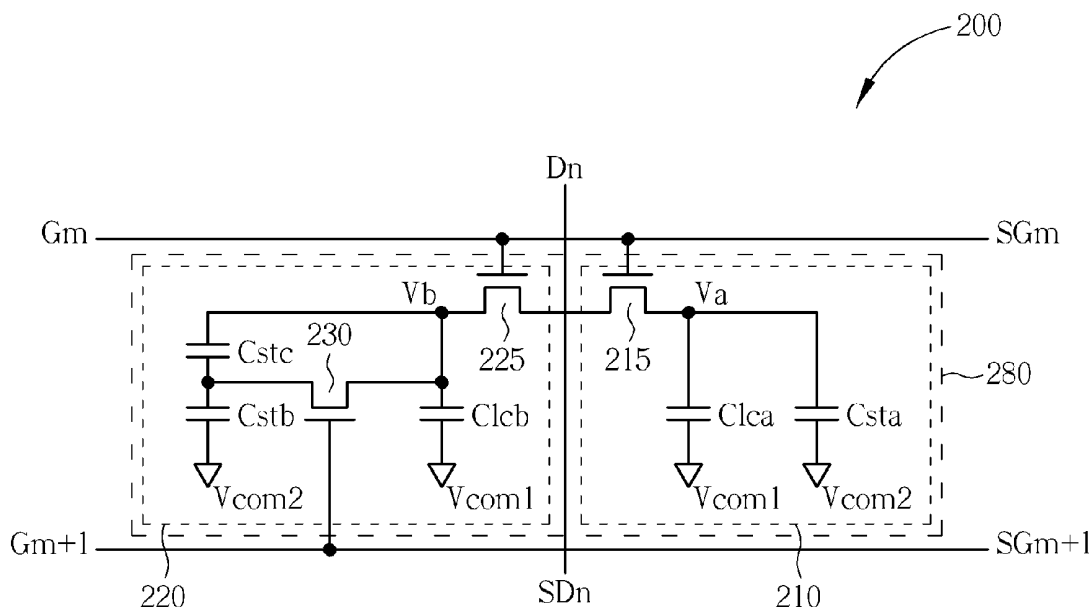

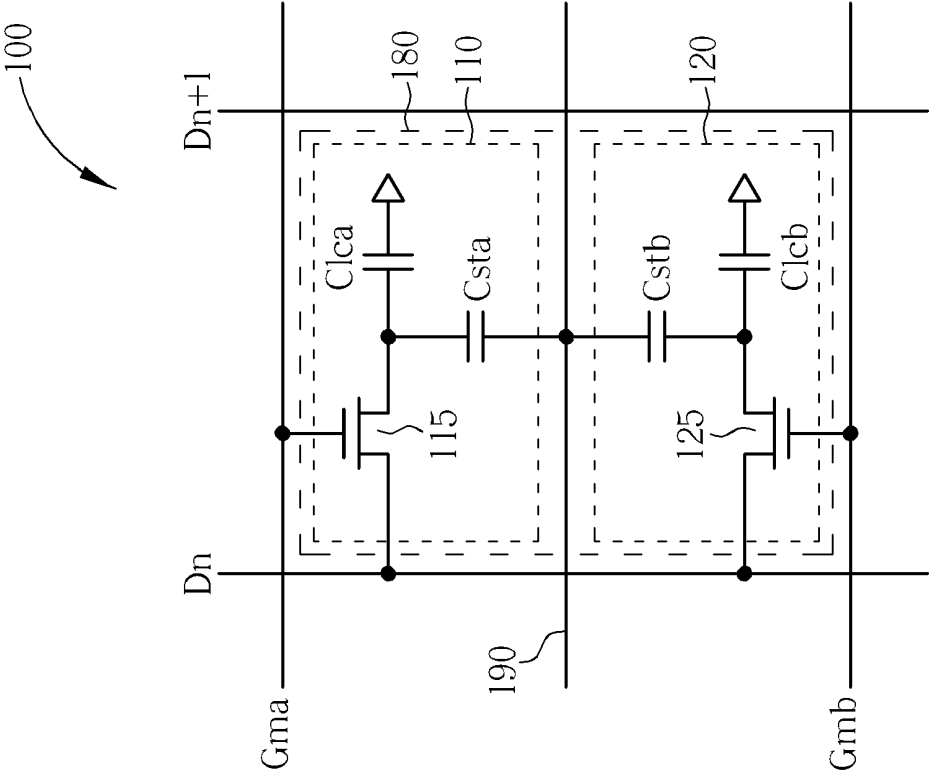


FIG. 1 PRIOR ART

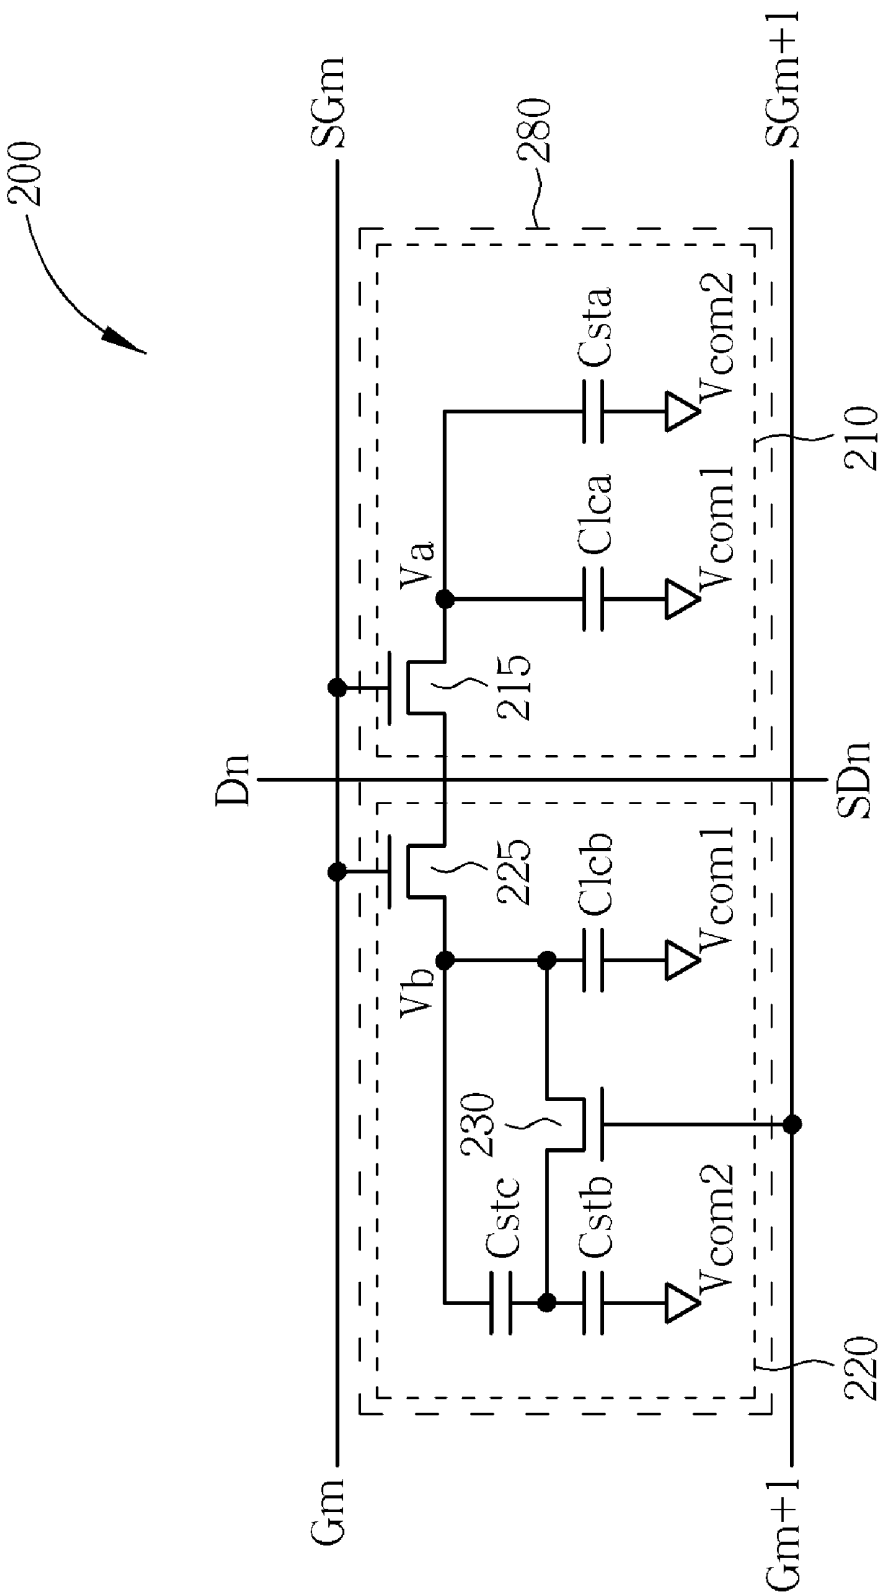


FIG. 2

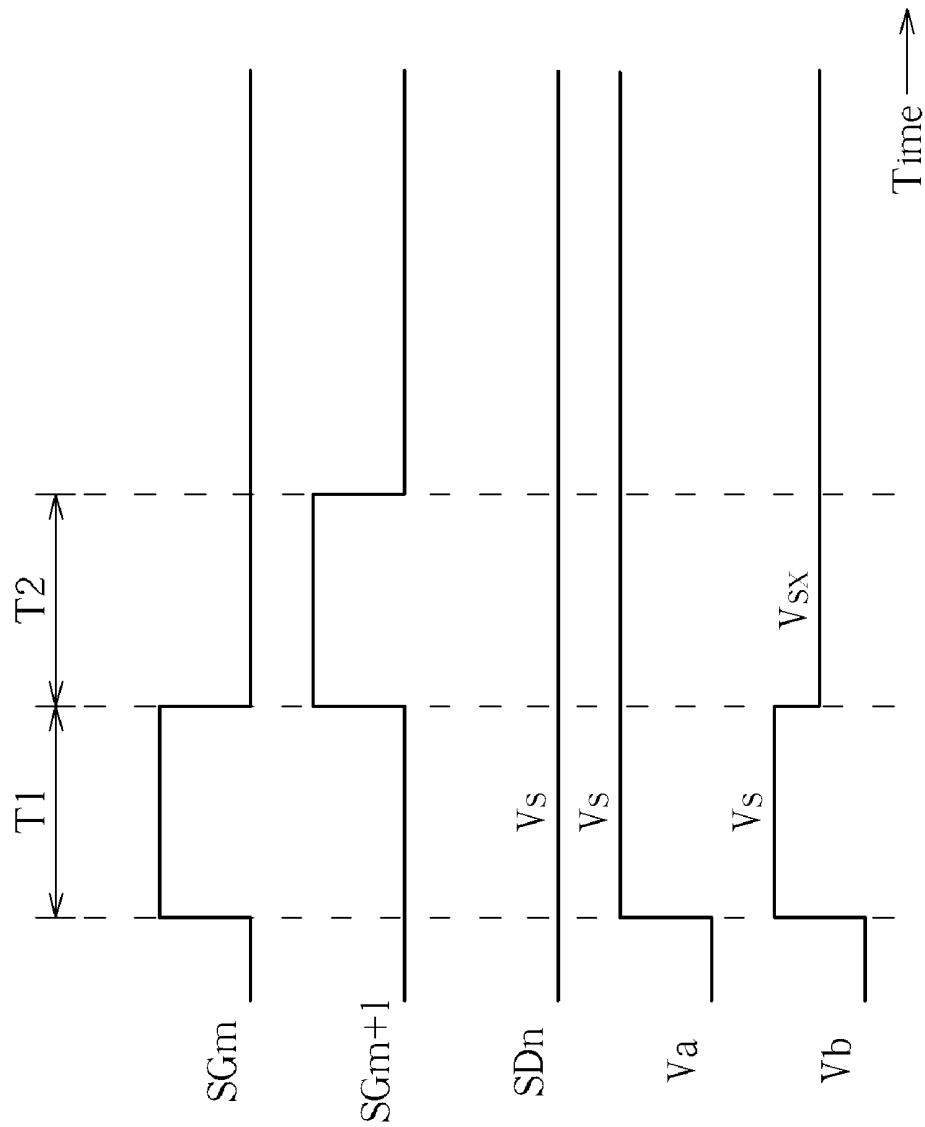


FIG. 3

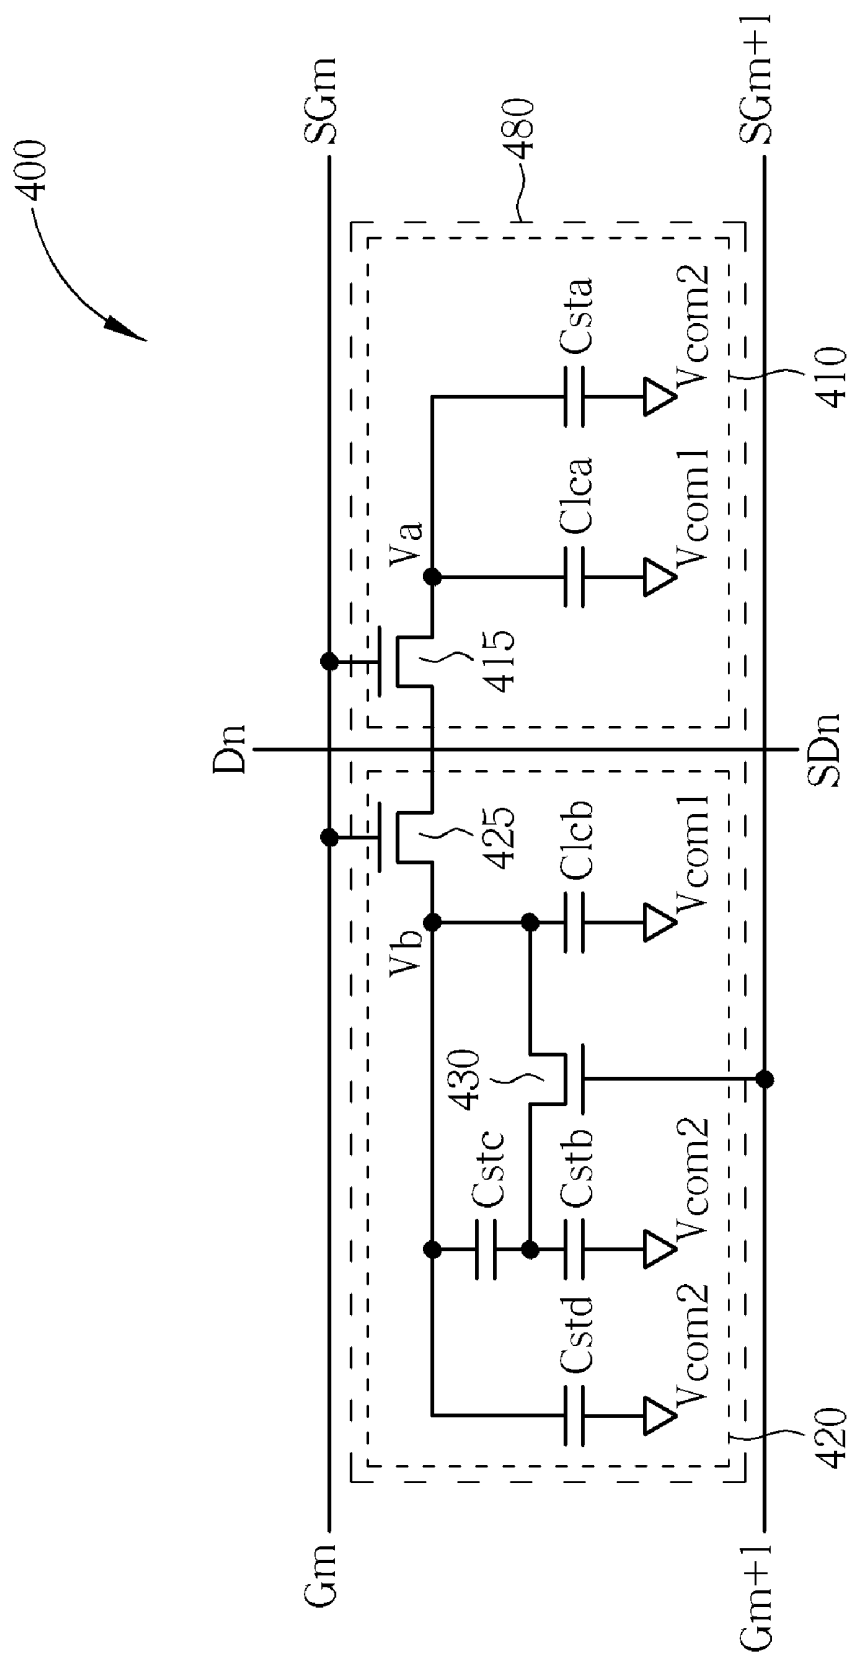


FIG. 4

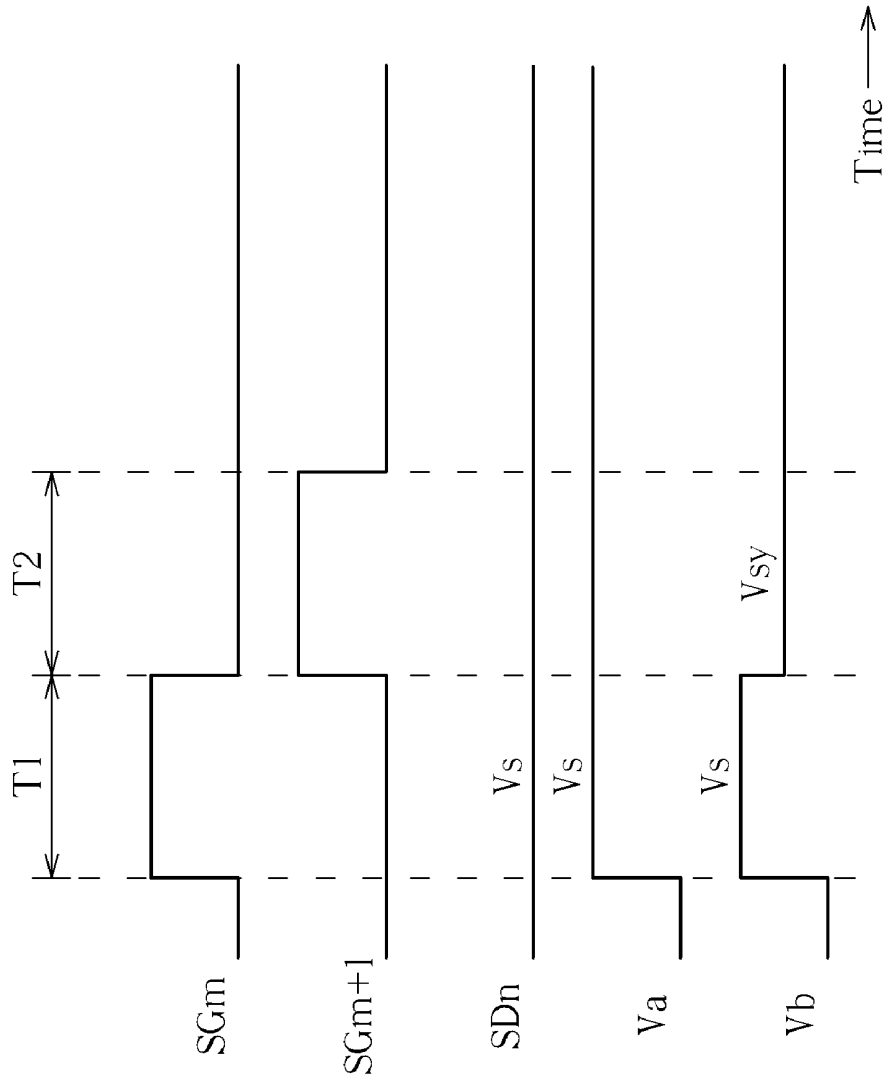


FIG. 5

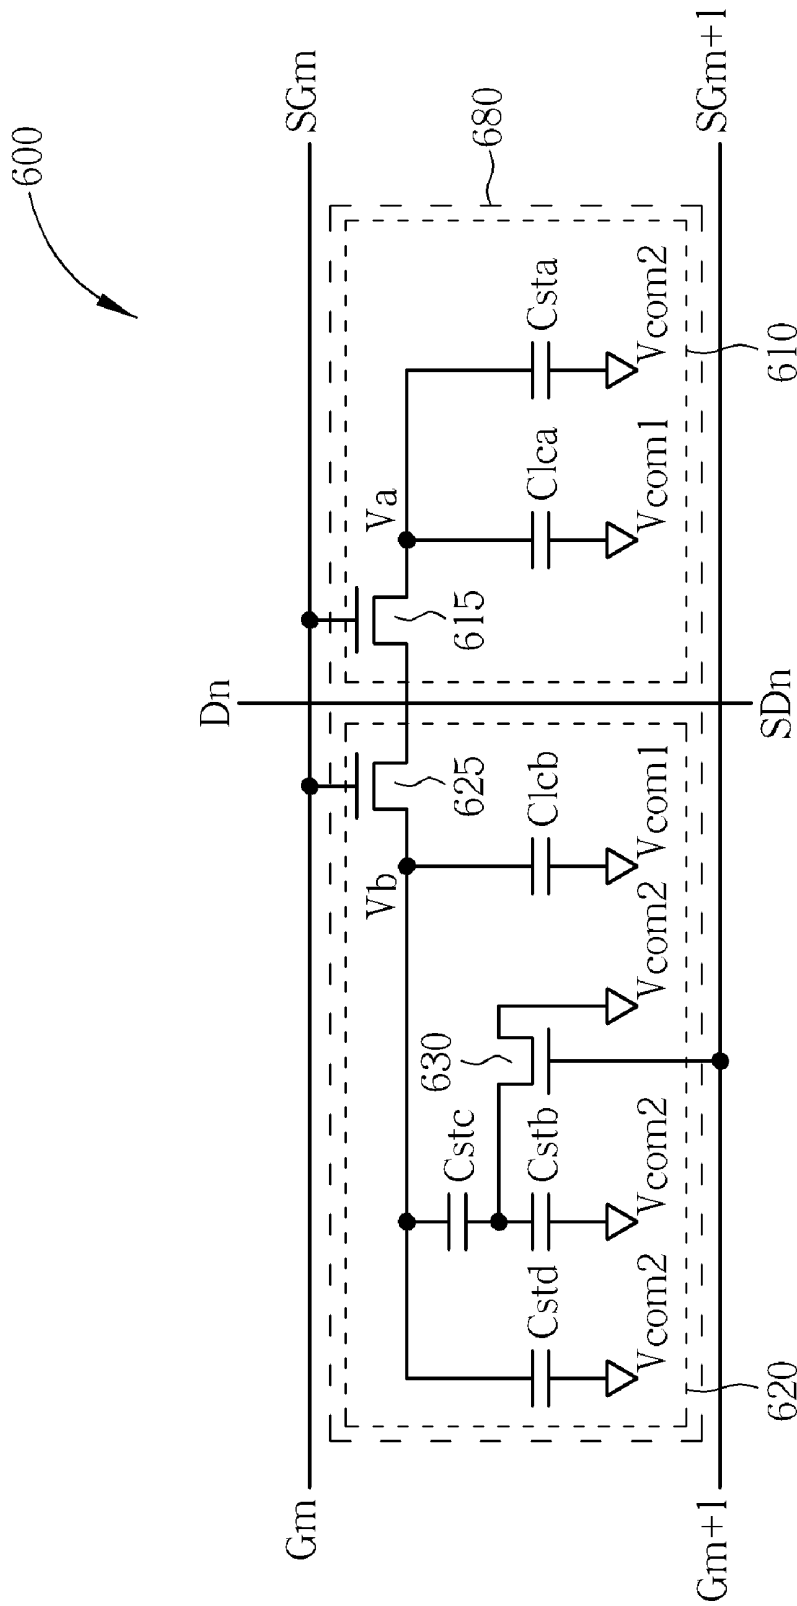


FIG. 6

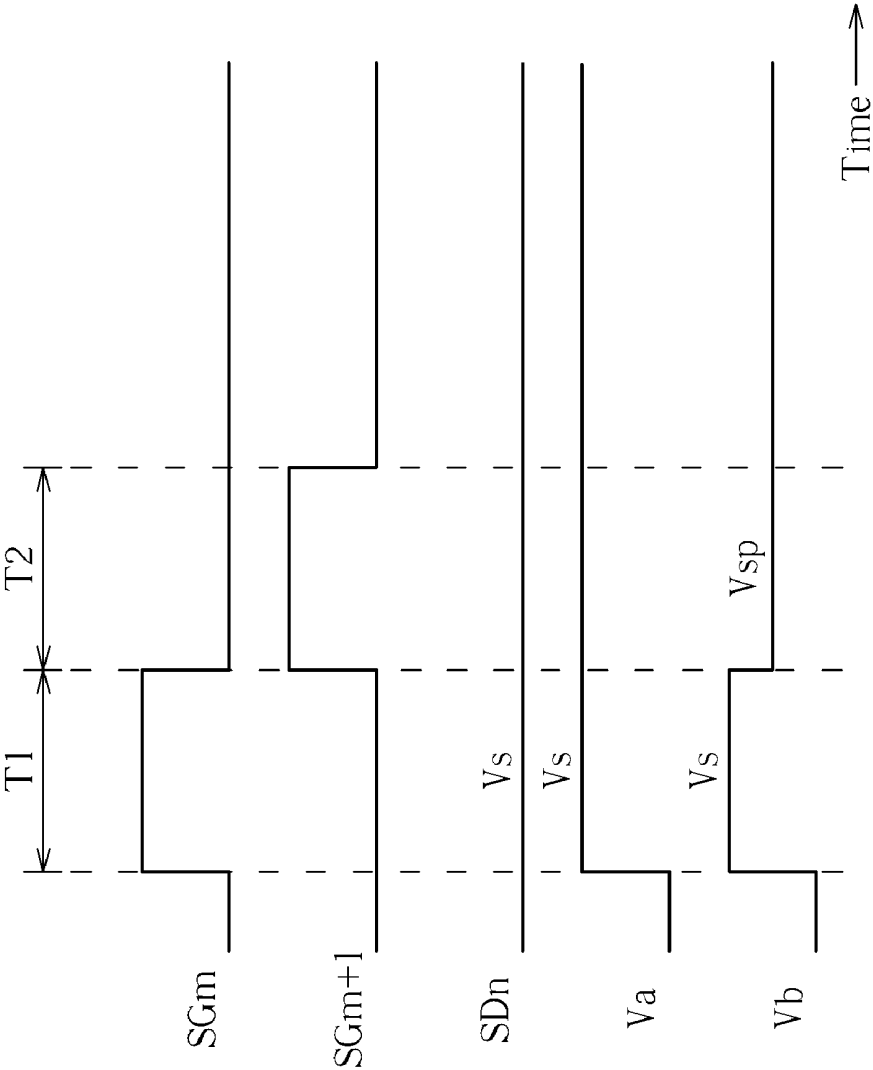


FIG. 7

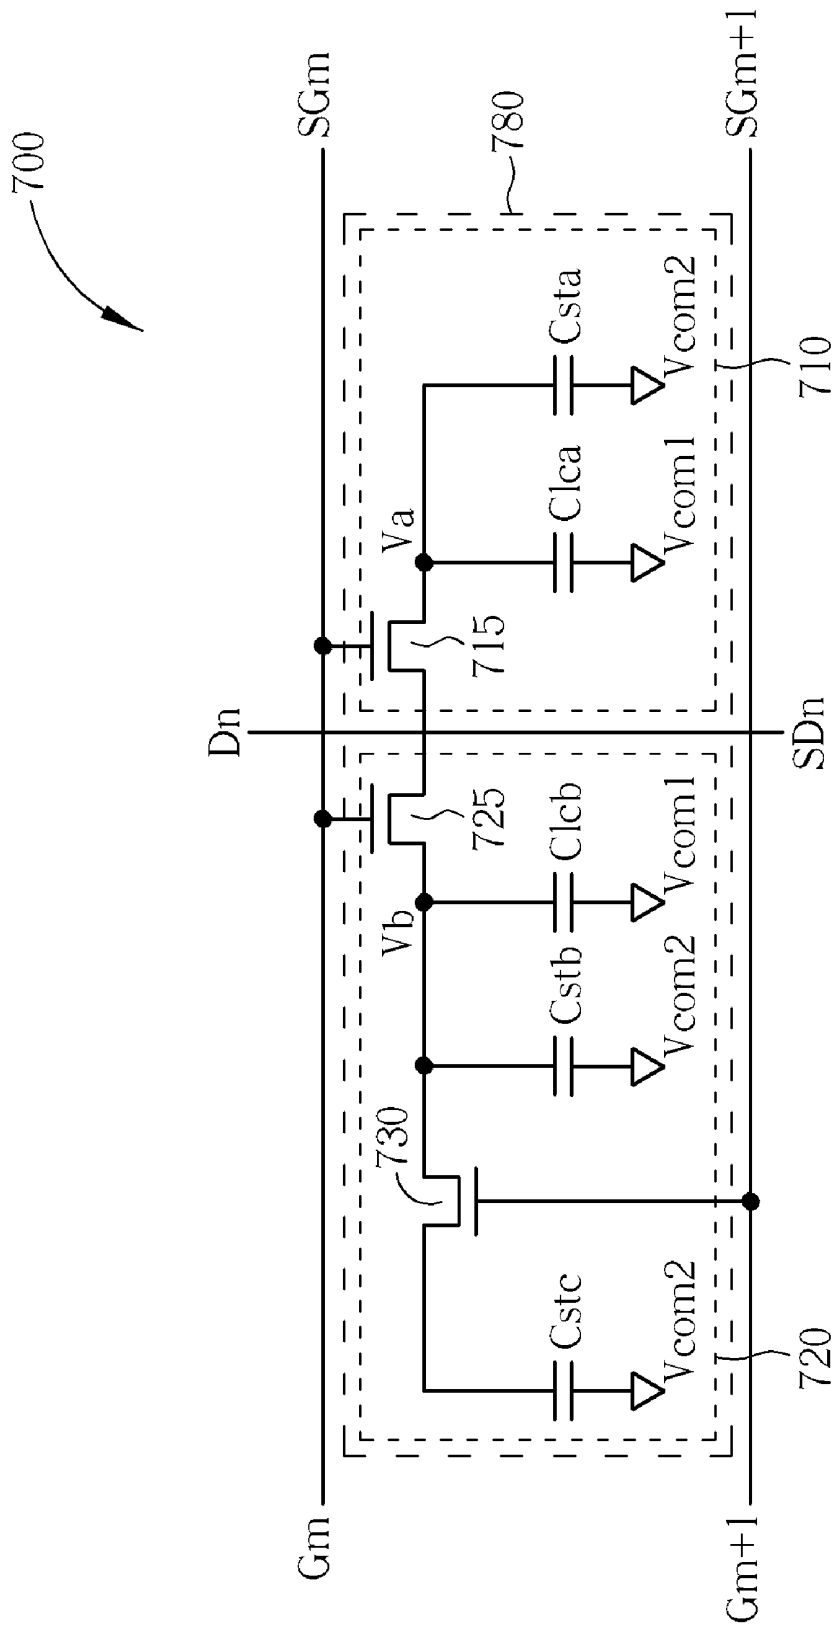


FIG. 8

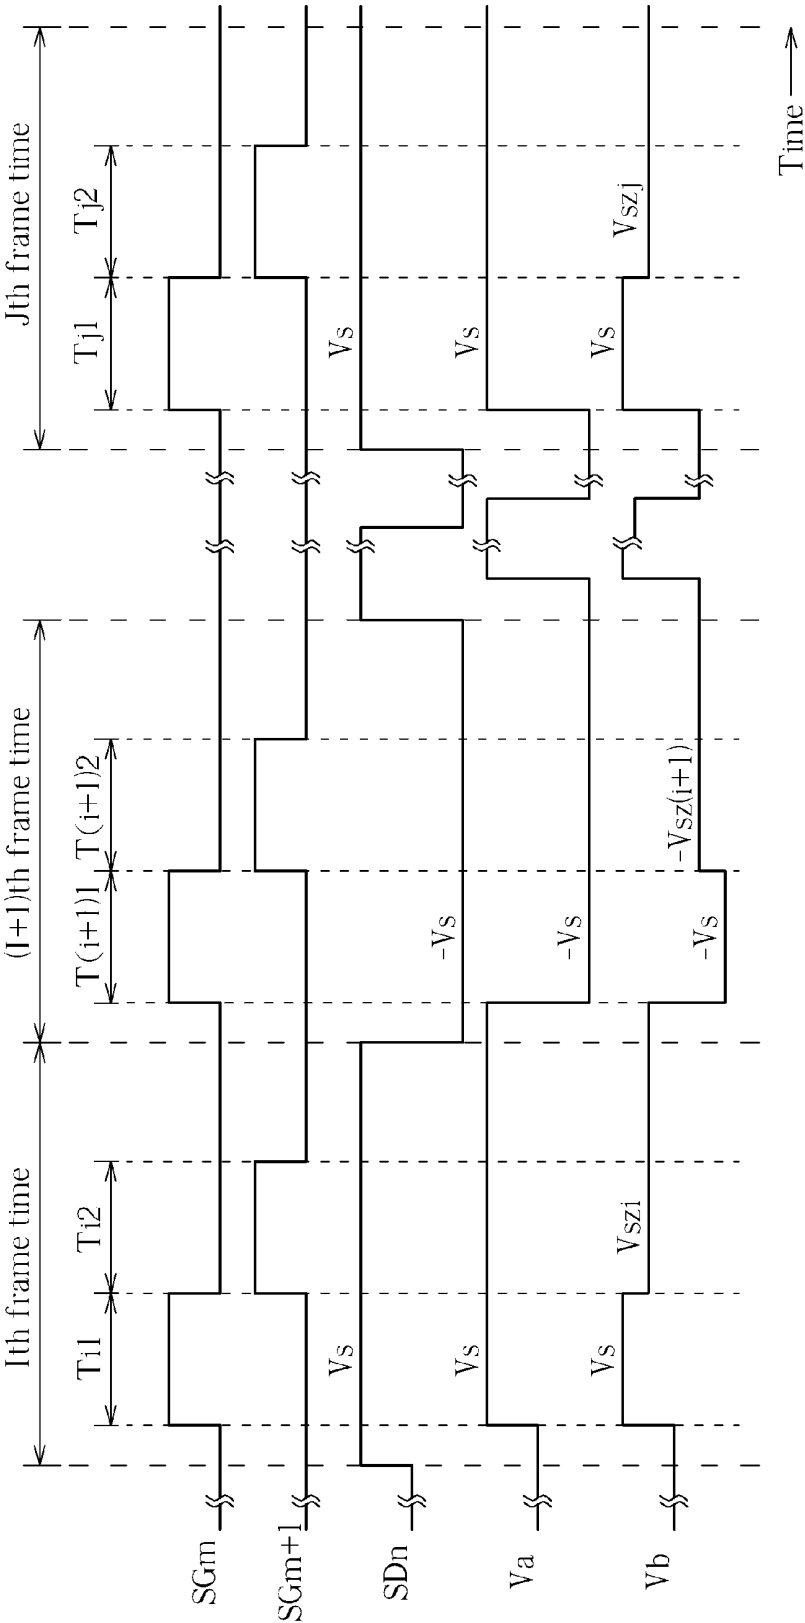


FIG. 9

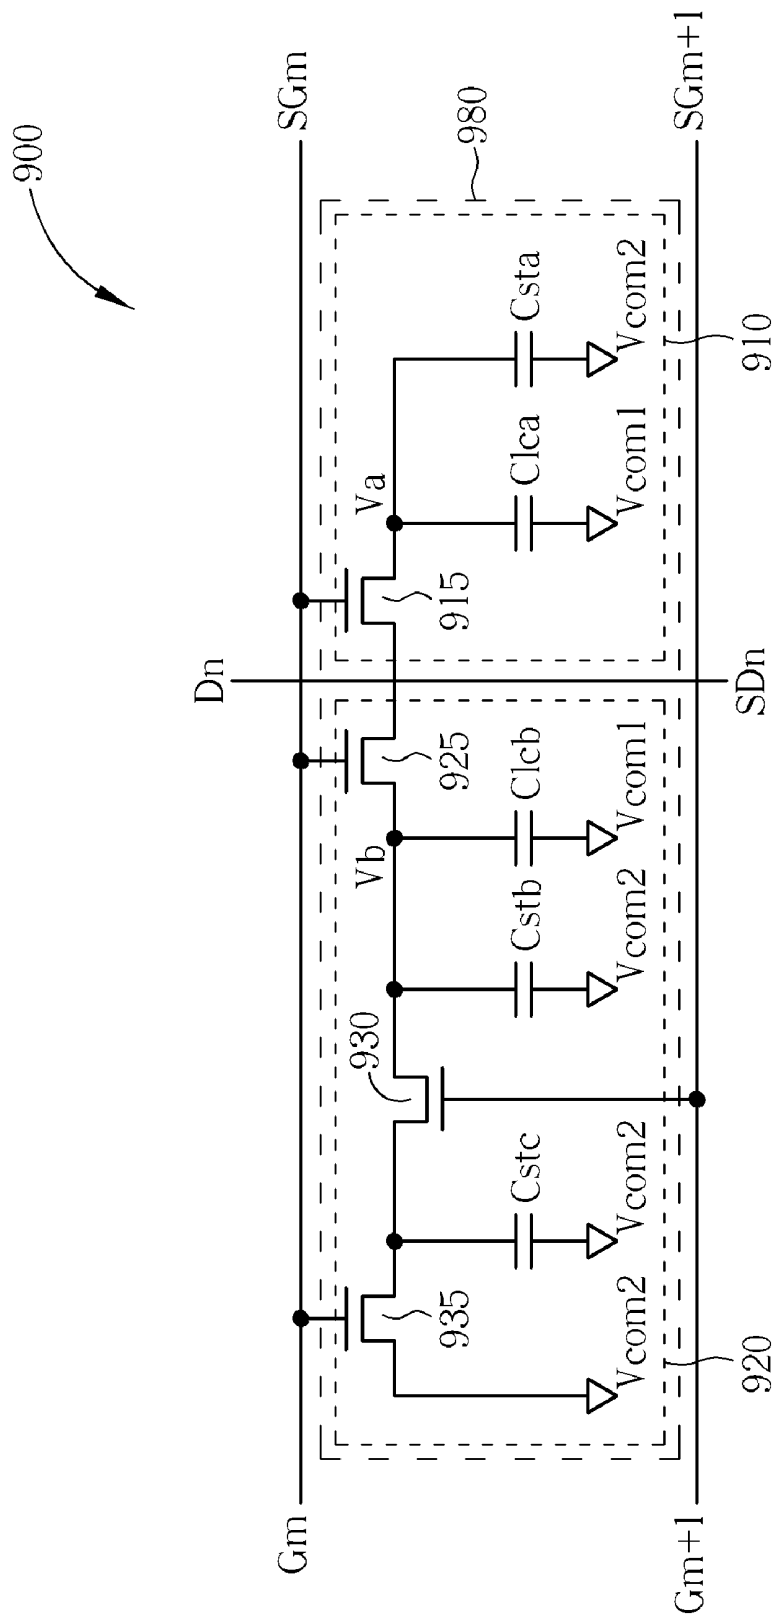


FIG. 10

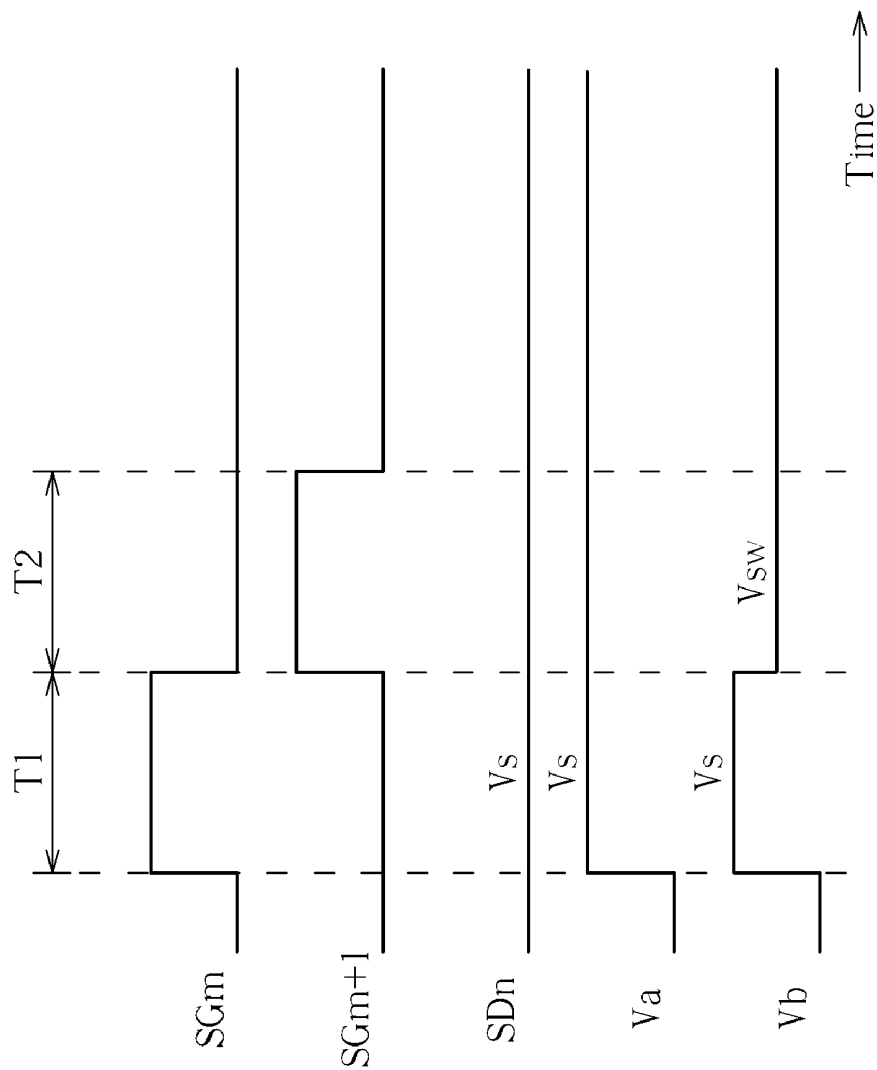


FIG. 11

LIQUID CRYSTAL DISPLAY DEVICE

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a liquid crystal display device, and more particularly, to a multi-domain vertical alignment (MVA) liquid crystal display device.

2. Description of the Prior Art

Because the liquid crystal display (LCD) device has advantages of thin appearance, low power consumption, and low radiation, the LCD device has been widely applied in various electronic products such as computer monitors, mobile phones, personal digital assistants (PDAs), and flat panel televisions, etc. In general, the LCD device comprises a liquid crystal layer encapsulated by two substrates. The operation of an LCD device is featured by varying voltage drops between opposite sides of the liquid crystal layer for twisting the angles of the liquid crystal molecules in the liquid crystal layer so that the transmittance of the liquid crystal layer can be controlled for illustrating images with the aid of the light source provided by a backlight module.

However, the viewing angle of a conventional LCD device is not sufficiently wide to ensure high display quality, therefore limiting the development of LCDs. For that reason, a multi-domain vertical alignment (MVA) LCD device is made to increase the viewing angle. A 4-domain vertical alignment LCD device was initially developed for achieving a wide viewing angle image display. In the structure of the 4-domain vertical alignment LCD device, each pixel unit has only one sub-pixel unit, which results in a color washout phenomenon occurring to an oblique viewing angle of the 4-domain vertical alignment LCD device. For that reason, an 8-domain vertical alignment LCD device is developed for solving the color washout problem. In the structure of the 8-domain vertical alignment LCD device, each pixel unit includes two sub-pixel units for achieving a feature of wide viewing angle without an occurrence of the color washout phenomenon. That is, based on gray level averaging effect of two gamma curves corresponding to the two sub-pixel units, optimal visual experience can be realized in different viewing angles, for achieving a high-quality wide viewing angle image display.

FIG. 1 is a circuit diagram schematically showing a prior MVA liquid crystal display device. As shown in FIG. 1, the liquid crystal display device **100** comprises a pixel unit **180**, a data line Dn, a data line Dn+1, a gate line Gma, a gate line Gmb, and a storage capacitor line (also termed as a common line) **190**. The pixel unit **180** comprises a first sub-pixel unit **110** and a second sub-pixel unit **120**. The first sub-pixel unit **110** includes a thin film transistor (TFT) **115**, a liquid crystal capacitor C_{lca}, and a storage capacitor C_{sta}. The second sub-pixel unit **120** includes a thin film transistor **125**, a liquid crystal capacitor C_{lcb}, and a storage capacitor C_{stb}. The thin film transistor **115** is electrically connected to the data line Dn and the gate line Gma. The thin film transistor **125** is electrically connected to the data line Dn and the gate line Gmb. Although the LCD device **100** is able to achieve an MVA wide viewing angle image display by controlling the transmittances of the first sub-pixel unit **110** and the second sub-pixel unit **120** through making use of the data signals delivered by the data line Dn, the pixel unit **180** requires two gate lines Gma and Gmb for providing two gate signals so as to control two thin film transistor **115** and **125**. That is, the number of gate lines required by the LCD device **100** is twice the number of gate lines required by a conventional LCD device, and therefore the aperture ratio of each pixel unit in the LCD

device **100** is significantly reduced. Furthermore, the frequency of driving clock used in the LCD device **100** is also twice the frequency of driving clock used in a conventional LCD device. For that reason, compared with a conventional LCD device, the LCD device **100** is rather costly, and the operation power consumption is increased significantly.

There is another prior-art MVA liquid crystal display device having each pixel unit electrically connected to just one gate line. However, regarding this prior-art MVA liquid crystal display device, one of two sub-pixel units in each pixel unit has a floating electrode, and therefore a phenomenon of static charge accumulation is likely to occur during a long-term operation, which in turn causes an occurrence of permanent image sticking effect and the image display quality is then degraded significantly.

SUMMARY OF THE INVENTION

In accordance with an embodiment of the present invention, a liquid crystal display device capable of achieving an MVA wide viewing angle image display based on simplified structure is provided. The liquid crystal display device comprises a data line, a first gate line, a second gate line, a first sub-pixel unit, and a second sub-pixel unit. The data line is employed to deliver a data signal. The first gate line is employed to deliver a first gate signal. The second gate line is employed to deliver a second gate signal. The first sub-pixel unit comprises a first data switch, a first liquid crystal capacitor, and a first storage capacitor. The first data switch comprises a first end electrically connected to the data line for receiving the data signal, a gate end electrically connected to the first gate line for receiving the first gate signal, and a second end. The first liquid crystal capacitor comprises a first end electrically connected to the second end of the first data switch and a second end for receiving a first common voltage. The first storage capacitor comprises a first end electrically connected to the second end of the first data switch and a second end for receiving a second common voltage. The second sub-pixel unit comprises a second data switch, a second liquid crystal capacitor, an auxiliary switch, a second storage capacitor, and a third storage capacitor. The second data switch comprises a first end electrically connected to the data line for receiving the data signal, a gate end electrically connected to the first gate line for receiving the first gate signal, and a second end. The second liquid crystal capacitor comprises a first end electrically connected to the second end of the second data switch and a second end for receiving the first common voltage. The auxiliary switch comprises a first end electrically connected to the second end of the second data switch, a gate end electrically connected to the second gate line for receiving the second gate signal, and a second end. The second storage capacitor comprises a first end electrically connected to the second end of the second data switch and a second end for receiving the second common voltage. The third storage capacitor comprises a first end electrically connected to the second end of the second data switch and a second end electrically connected to the second end of the auxiliary switch.

In accordance with another embodiment of the present invention, a liquid crystal display device capable of achieving an MVA wide viewing angle image display based on simplified structure is provided. The liquid crystal display device comprises a data line, a first gate line, a second gate line, a first sub-pixel unit, and a second sub-pixel unit. The data line is employed to deliver a data signal. The first gate line is employed to deliver a first gate signal. The second gate line is employed to deliver a second gate signal. The first sub-pixel

unit comprises a first data switch, a first liquid crystal capacitor, and a first storage capacitor. The first data switch comprises a first end electrically connected to the data line for receiving the data signal, a gate end electrically connected to the first gate line for receiving the first gate signal, and a second end. The first liquid crystal capacitor comprises a first end electrically connected to the second end of the first data switch and a second end for receiving a first common voltage. The first storage capacitor comprises a first end electrically connected to the second end of the first data switch and a second end for receiving a second common voltage. The second sub-pixel unit comprises a second data switch, a second liquid crystal capacitor, an auxiliary switch, a second storage capacitor, a third storage capacitor, and a fourth storage capacitor. The second data switch comprises a first end electrically connected to the data line for receiving the data signal, a gate end electrically connected to the first gate line for receiving the first gate signal, and a second end. The second liquid crystal capacitor comprises a first end electrically connected to the second end of the second data switch and a second end for receiving the first common voltage. The auxiliary switch comprises a first end for receiving the second common voltage, a gate end electrically connected to the second gate line for receiving the second gate signal, and a second end. The second storage capacitor comprises a first end electrically connected to the second end of the auxiliary switch and a second end for receiving the second common voltage. The third storage capacitor comprises a first end electrically connected to the second end of the second data switch and a second end electrically connected to the second end of the auxiliary switch. The fourth storage capacitor comprises a first end electrically connected to the second end of the second data switch and a second end for receiving the second common voltage.

In accordance with another embodiment of the present invention, a liquid crystal display device capable of achieving an MVA wide viewing angle image display based on simplified structure is provided. The liquid crystal display device comprises a data line, a first gate line, a second gate line, a first sub-pixel unit, and a second sub-pixel unit. The data line is employed to deliver a data signal. The first gate line is employed to deliver a first gate signal. The second gate line is employed to deliver a second gate signal. The first sub-pixel unit comprises a first data switch, a first liquid crystal capacitor, and a first storage capacitor. The first data switch comprises a first end electrically connected to the data line for receiving the data signal, a gate end electrically connected to the first gate line for receiving the first gate signal, and a second end. The first liquid crystal capacitor comprises a first end electrically connected to the second end of the first data switch and a second end for receiving a first common voltage. The first storage capacitor comprises a first end electrically connected to the second end of the first data switch and a second end for receiving a second common voltage. The second sub-pixel unit comprises a second data switch, a second liquid crystal capacitor, a second storage capacitor, an auxiliary switch, and a third storage capacitor. The second data switch comprises a first end electrically connected to the data line for receiving the data signal, a gate end electrically connected to the first gate line for receiving the first gate signal, and a second end. The second liquid crystal capacitor comprises a first end electrically connected to the second end of the second data switch and a second end for receiving the first common voltage. The second storage capacitor comprises a first end electrically connected to the second end of the second data switch and a second end for receiving the second common voltage. The auxiliary switch comprises a

first end electrically connected to the second end of the second data switch, a gate end electrically connected to the second gate line for receiving the second gate signal, and a second end. The third storage capacitor comprises a first end electrically connected to the second end of the auxiliary switch and a second end for receiving the second common voltage.

These and other objectives of the present invention will no doubt become obvious to those of ordinary skill in the art after reading the following detailed description of the preferred embodiment that is illustrated in the various figures and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a circuit diagram schematically showing a prior MVA liquid crystal display device.

FIG. 2 is a circuit diagram schematically showing an MVA liquid crystal display device in accordance with a first embodiment of the present invention.

FIG. 3 shows related signal waveforms regarding operations of the LCD device in FIG. 2, having time along the abscissa.

FIG. 4 is a circuit diagram schematically showing an MVA liquid crystal display device in accordance with a second embodiment of the present invention.

FIG. 5 shows related signal waveforms regarding operations of the LCD device in FIG. 4, having time along the abscissa.

FIG. 6 is a circuit diagram schematically showing an MVA liquid crystal display device in accordance with a third embodiment of the present invention.

FIG. 7 shows related signal waveforms regarding operations of the LCD device in FIG. 6, having time along the abscissa.

FIG. 8 is a circuit diagram schematically showing an MVA liquid crystal display device in accordance with a fourth embodiment of the present invention.

FIG. 9 shows related signal waveforms regarding operations of the LCD device in FIG. 8, having time along the abscissa.

FIG. 10 is a circuit diagram schematically showing an MVA liquid crystal display device in accordance with a fifth embodiment of the present invention.

FIG. 11 shows related signal waveforms regarding operations of the LCD device in FIG. 10, having time along the abscissa.

DETAILED DESCRIPTION

Hereinafter, preferred embodiments of the present invention will be described in detail with reference to the accompanying drawings. Here, it is to be noted that the present invention is not limited thereto.

FIG. 2 is a circuit diagram schematically showing an MVA liquid crystal display device in accordance with a first embodiment of the present invention. As shown in FIG. 2, the LCD device 200 comprises a pixel unit 280, a data line Dn, a gate line Gm, and a gate line Gm+1. The gate line Gm+1 is adjacent to the gate line Gm. The pixel unit 280 comprises a first sub-pixel unit 210 and a second sub-pixel unit 220. The first sub-pixel unit 210 includes a data switch 215, a liquid crystal capacitor Clca, and a storage capacitor Csta. The second sub-pixel unit 220 includes a data switch 225, an auxiliary switch 230, a liquid crystal capacitor Clcb, a storage capacitor Cstb, and a storage capacitor Cstc. The data

switches **215**, **225** and the auxiliary switch **230** are thin film transistors or metal oxide semiconductor (MOS) field effect transistors.

The data switch **215** comprises a first end electrically connected to the data line Dn for receiving a data signal SDn, a gate end electrically connected to the gate line Gm for receiving a gate signal SGm, and a second end for outputting a first voltage Va. The liquid crystal capacitor Clca comprises a first end electrically connected to the second end of the data switch **215** and a second end for receiving a first common voltage Vcom1. The storage capacitor Csta comprises a first end electrically connected to the second end of the data switch **215** and a second end for receiving a second common voltage Vcom2. The capacitance of the liquid crystal capacitor Clca is identical to or different from the capacitance of the liquid crystal capacitor Clcb. The capacitances of the storage capacitors Csta, Cstb and Cstc are identical or different. The second common voltage Vcom2 is identical to or different from the first common voltage Vcom1.

The data switch **225** comprises a first end electrically connected to the data line Dn for receiving the data signal SDn, a gate end electrically connected to the gate line Gm for receiving the gate signal SGm, and a second end for outputting a second voltage Vb. The liquid crystal capacitor Clcb comprises a first end electrically connected to the second end of the data switch **225** and a second end for receiving the first common voltage Vcom1. The auxiliary switch **230** comprises a first end electrically connected to the second end of the data switch **225**, a gate end electrically connected to the gate line Gm+1 for receiving a gate signal SGm+1, and a second end. The storage capacitor Cstb comprises a first end electrically connected to the second end of the auxiliary switch **230** and a second end for receiving the second common voltage Vcom2. The storage capacitor Cstc comprises a first end electrically connected to the second end of the data switch **225** and a second end electrically connected to the second end of the auxiliary switch **230**.

FIG. 3 shows related signal waveforms regarding operations of the LCD device **200** in FIG. 2, having time along the abscissa. The signal waveforms in FIG. 3, from top to bottom, are the gate signal SGm, the gate signal SGm+1, the data signal SDn, the first voltage Va, and the second voltage Vb. The data signal SDn is assumed to retain a voltage Vs in a short time including intervals T1 and T2. As shown in FIG. 3, the gate signal SGm has high voltage level and the gate signal SGm+1 has low voltage level during the interval T1, therefore the data switches **215**, **225** are turned on and the auxiliary switch **230** is turned off. Accordingly, both the first voltage Va and the second voltage Vb become the voltage Vs. In the meantime, the second end of the data switch **225** stores a charge amount Qb1 of an equivalent capacitor corresponding to the second sub-pixel unit **220**. The charge amount Qb1 can be expressed as Formula (1) listed below.

$$Qb1 = \left[Clcbv + \frac{Cstbv}{1 + \frac{Cstbv}{Cstcv}} \right] Vs \quad \text{Formula (1)}$$

In Formula (1), Clcbv, Cstbv, and Cstcv represent the capacitances of the liquid crystal capacitor Clcb and the storage capacitors Cstb, Cstc respectively. During the interval T2, the gate signal SGm is switching to low voltage level and the gate signal SGm+1 is switching to high voltage level, therefore the data switches **215**, **225** are turned off and the auxiliary switch **230** is turned on. For that reason, the first voltage Va holds the voltage Vs; however, the second voltage Vb is switching to become a voltage Vsx following an occurrence of short-circuit between the first and second ends of the stor-

age capacitor Cstc caused by turning on the auxiliary switch **230**. The voltage Vsx can be deduced based on a conservation rule of the charge amount Qb1 and is expressed as Formula (2) listed below.

$$Vsx = \frac{\left[Clcbv + \frac{Cstbv}{1 + \frac{Cstbv}{Cstcv}} \right] Vs}{(Clcbv + Cstbv)} \quad \text{Formula (2)}$$

In Formula (2), a is a predetermined proportional constant. After the interval T2, the first sub-pixel unit **210** and the second sub-pixel unit **220** are operative to achieve an MVA wide viewing angle image display based on the first voltage Va and the second voltage Vb having a predetermined proportional relationship. If the electrode areas of the capacitors in the pixel unit **280** are well adjusted, the image quality of the LCD device **200** can be optimized. In summary, since the LCD device **200** of the present invention provides different sub-pixel voltages by making use of conventional driving feature corresponding to gate signals of two adjacent gate lines, the number of gate lines required by the LCD device **200** is substantially the same as the number of gate lines required by a conventional LCD device. Therefore, the aperture ratio of each pixel unit in the LCD device **200** is not reduced and the frequency of driving clock used in the LCD device **200** is the same as the frequency of driving clock used in the conventional LCD device. That is, the LCD device **200** is capable of achieving an MVA wide viewing angle image display based on a cost-effective simplified structure. In one embodiment, the LCD device **200** is employed to realize high image display quality having wide viewing angle based on 8-domain vertical alignment design. Besides, the LCD device **200** has no floating electrode and is able to maintain high image display quality during a long-term operation.

FIG. 4 is a circuit diagram schematically showing an MVA liquid crystal display device in accordance with a second embodiment of the present invention. As shown in FIG. 4, the LCD device **400** comprises a pixel unit **480**, a data line Dn, a gate line Gm, and a gate line Gm+1. The gate line Gm+1 is adjacent to the gate line Gm. The pixel unit **480** comprises a first sub-pixel unit **410** and a second sub-pixel unit **420**. The first sub-pixel unit **410** includes a data switch **415**, a liquid crystal capacitor Clca, and a storage capacitor Csta. The second sub-pixel unit **420** includes a data switch **425**, an auxiliary switch **430**, a liquid crystal capacitor Clcb, a storage capacitor Cstb, a storage capacitor Cstc, and a storage capacitor Cstd. The data switches **415**, **425** and the auxiliary switch **430** are thin film transistors or MOS field effect transistors.

The data switch **415** comprises a first end electrically connected to the data line Dn for receiving a data signal SDn, a gate end electrically connected to the gate line Gm for receiving a gate signal SGm, and a second end for outputting a first voltage Va. The liquid crystal capacitor Clca comprises a first end electrically connected to the second end of the data switch **415** and a second end for receiving a first common voltage Vcom1. The storage capacitor Csta comprises a first end electrically connected to the second end of the data switch **415** and a second end for receiving a second common voltage Vcom2. The capacitance of the liquid crystal capacitor Clca is identical to or different from the capacitance of the liquid crystal capacitor Clcb. The capacitances of the storage capacitors Csta, Cstb, Cstc and Cstd are identical or different. The second common voltage Vcom2 is identical to or different from the first common voltage Vcom1.

The data switch **425** comprises a first end electrically connected to the data line Dn for receiving the data signal SDn, a gate end electrically connected to the gate line Gm for receiving

ing the gate signal SGm, and a second end for outputting a second voltage Vb. The liquid crystal capacitor Clcb comprises a first end electrically connected to the second end of the data switch 425 and a second end for receiving the first common voltage Vcom1. The auxiliary switch 430 comprises a first end electrically connected to the second end of the data switch 425, a gate end electrically connected to the gate line Gm+1 for receiving a gate signal SGm+1, and a second end. The storage capacitor Cstb comprises a first end electrically connected to the second end of the auxiliary switch 430 and a second end for receiving the second common voltage Vcom2. The storage capacitor Cstc comprises a first end electrically connected to the second end of the data switch 425 and a second end electrically connected to the second end of the auxiliary switch 430. The storage capacitor Cstd comprises a first end electrically connected to the second end of the data switch 425 and a second end for receiving the second common voltage Vcom2.

FIG. 5 shows related signal waveforms regarding operations of the LCD device 400 in FIG. 4, having time along the abscissa. The signal waveforms in FIG. 5, from top to bottom, are the gate signal SGm, the gate signal SGm+1, the data signal SDn, the first voltage Va, and the second voltage Vb. The data signal SDn is assumed to retain a voltage Vs in a short time including intervals T1 and T2. As shown in FIG. 5, the gate signal SGm has high voltage level and the gate signal SGm+1 has low voltage level during the interval T1, therefore the data switches 415, 425 are turned on and the auxiliary switch 430 is turned off. Accordingly, both the first voltage Va and the second voltage Vb become the voltage Vs. In the meantime, the second end of the data switch 425 stores a charge amount Qb2 of an equivalent capacitor corresponding to the second sub-pixel unit 420. The charge amount Qb2 can be expressed as Formula (3) listed below.

$$Qb2 = \left[Clcbv + \frac{Cstbv}{1 + \frac{Cstbv}{Cstcv}} + Cstdv \right] Vs \quad \text{Formula (3)}$$

In Formula (3), Clcbv, Cstbv, Cstcv, and Cstdv represent the capacitances of the liquid crystal capacitor Clcb and the storage capacitors Cstb, Cstc, Cstd respectively. During the interval T2, the gate signal SGm is switching to low voltage level and the gate signal SGm+1 is switching to high voltage level, therefore the data switches 415, 425 are turned off and the auxiliary switch 430 is turned on. For that reason, the first voltage Va holds the voltage Vs; however, the second voltage Vb is switching to become a voltage Vsy following an occurrence of short-circuit between the first and second ends of the storage capacitor Cstc caused by turning on the auxiliary switch 430. The voltage Vsy can be deduced based on a conservation rule of the charge amount Qb2 and is expressed as Formula (4) listed below.

$$Vsy = \frac{\left[Clcbv + \frac{Cstbv}{1 + \frac{Cstbv}{Cstcv}} + Cstdv \right] Vs}{(Clcbv + Cstbv + Cstdv)} Vs = \beta Vs \quad \text{Formula (4)}$$

In Formula (4), β is a predetermined proportional constant. After the interval T2, the first sub-pixel unit 410 and the second sub-pixel unit 420 are operative to achieve an MVA wide viewing angle image display based on the first voltage Va and the second voltage Vb having a predetermined pro-

portional relationship. If the electrode areas of the capacitors in the pixel unit 480 are well adjusted, the image quality of the LCD device 400 can be optimized. In summary, since the LCD device 400 of the present invention provides different sub-pixel voltages by making use of conventional driving feature corresponding to gate signals of two adjacent gate lines, the number of gate lines required by the LCD device 400 is substantially the same as the number of gate lines required by a conventional LCD device. Therefore, the aperture ratio of each pixel unit in the LCD device 400 is not reduced and the frequency of driving clock used in the LCD device 400 is the same as the frequency of driving clock used in the conventional LCD device. That is, the LCD device 400 is capable of achieving an MVA wide viewing angle image display based on a cost-effective simplified structure. In one embodiment, the LCD device 400 is employed to realize high image display quality having wide viewing angle based on 8-domain vertical alignment design. Besides, the LCD device 400 has no floating electrode and is able to maintain high image display quality during a long-term operation.

FIG. 6 is a circuit diagram schematically showing an MVA liquid crystal display device in accordance with a third embodiment of the present invention. As shown in FIG. 6, the LCD device 600 comprises a pixel unit 680, a data line Dn, a gate line Gm, and a gate line Gm+1. The gate line Gm+1 is adjacent to the gate line Gm. The pixel unit 680 comprises a first sub-pixel unit 610 and a second sub-pixel unit 620. The first sub-pixel unit 610 includes a data switch 615, a liquid crystal capacitor Clca, and a storage capacitor Csta. The second sub-pixel unit 620 includes a data switch 625, an auxiliary switch 630, a liquid crystal capacitor Clcb, a storage capacitor Cstb, a storage capacitor Cstc, and a storage capacitor Cstd. The data switches 615, 625 and the auxiliary switch 630 are thin film transistors or MOS field effect transistors.

The data switch 615 comprises a first end electrically connected to the data line Dn for receiving a data signal SDn, a gate end electrically connected to the gate line Gm for receiving a gate signal SGm, and a second end for outputting a first voltage Va. The liquid crystal capacitor Clca comprises a first end electrically connected to the second end of the data switch 615 and a second end for receiving a first common voltage Vcom1. The storage capacitor Csta comprises a first end electrically connected to the second end of the data switch 615 and a second end for receiving a second common voltage Vcom2. The capacitance of the liquid crystal capacitor Clca is identical to or different from the capacitance of the liquid crystal capacitor Clcb. The capacitances of the storage capacitors Csta, Cstb, Cstc and Cstd are identical or different. The second common voltage Vcom2 is identical to or different from the first common voltage Vcom1.

The data switch 625 comprises a first end electrically connected to the data line Dn for receiving the data signal SDn, a gate end electrically connected to the gate line Gm for receiving the gate signal SGm, and a second end for outputting a second voltage Vb. The liquid crystal capacitor Clcb comprises a first end electrically connected to the second end of the data switch 625 and a second end for receiving the first common voltage Vcom1. The auxiliary switch 630 comprises a first end for receiving the second common voltage Vcom2, a gate end electrically connected to the gate line Gm+1 for receiving a gate signal SGm+1, and a second end. The storage capacitor Cstb comprises a first end electrically connected to the second end of the auxiliary switch 630 and a second end for receiving the second common voltage Vcom2. The storage capacitor Cstc comprises a first end electrically connected to the second end of the data switch 625 and a second end electrically connected to the second end of the auxiliary

switch **630**. The storage capacitor Cstd comprises a first end electrically connected to the second end of the data switch **625** and a second end for receiving the second common voltage Vcom2.

FIG. 7 shows related signal waveforms regarding operations of the LCD device **600** in FIG. 6, having time along the abscissa. The signal waveforms in FIG. 7, from top to bottom, are the gate signal SGm, the gate signal SGm+1, the data signal SDn, the first voltage Va, and the second voltage Vb. The data signal SDn is assumed to retain a voltage Vs in a short time including intervals T1 and T2. As shown in FIG. 7, the gate signal SGm has high voltage level and the gate signal SGm+1 has low voltage level during the interval T1, therefore the data switches **615**, **625** are turned on and the auxiliary switch **630** is turned off. Accordingly, both the first voltage Va and the second voltage Vb become the voltage Vs. In the meantime, the equivalent capacitor of the second sub-pixel unit **620** stores a charge amount Qb3 at the second end of the data switch **625**. The charge amount Qb3 can be expressed as Formula (5) listed below.

$$Qb3 = \left[Clcbv + \frac{Cstcv}{1 + \frac{Cstcv}{Cstbv}} + Cstdv \right] Vs \quad \text{Formula (5)}$$

In Formula (5), Clcbv, Cstbv, Cstcv, and Cstdv represent the capacitances of the liquid crystal capacitor Clcb and the storage capacitors Cstb, Cstc, Cstd respectively. During the interval T2, the gate signal SGm is switching to low voltage level and the gate signal SGm+1 is switching to high voltage level, therefore the data switches **615**, **625** are turned off and the auxiliary switch **630** is turned on. For that reason, the first voltage Va holds the voltage Vs; however, the second voltage Vb is switching to become a voltage Vsp following an occurrence of short-circuit between the first and second ends of the storage capacitor Cstb caused by turning on the auxiliary switch **630**. The voltage Vsp can be deduced based on a conservation rule of the charge amount Qb3 and is expressed as Formula (6) listed below.

$$Vsp = \frac{\left[Clcbv + \frac{Cstcv}{1 + \frac{Cstcv}{Cstbv}} + Cstdv \right]}{(Clcbv + Cstcv + Cstdv)} Vs = \gamma Vs \quad \text{Formula (6)}$$

In Formula (6), γ is a predetermined proportional constant. After the interval T2, the first sub-pixel unit **610** and the second sub-pixel unit **620** are operative to achieve an MVA wide viewing angle image display based on the first voltage Va and the second voltage Vb having a predetermined proportional relationship. If the electrode areas of the capacitors in the pixel unit **680** are well adjusted, the image quality of the LCD device **600** can be optimized. In summary, since the LCD device **600** of the present invention provides different sub-pixel voltages by making use of conventional driving feature corresponding to gate signals of two adjacent gate lines, the number of gate lines required by the LCD device **600** is substantially the same as the number of gate lines required by a conventional LCD device. Therefore, the aperture ratio of each pixel unit in the LCD device **600** is not reduced and the frequency of driving clock used in the LCD device **600** is the same as the frequency of driving clock used in the conventional LCD device. That is, the LCD device **600** is capable of achieving an MVA wide viewing angle image display based

on a cost-effective simplified structure. In one embodiment, the LCD device **600** is employed to realize high image display quality having wide viewing angle based on 8-domain vertical alignment design. Besides, the LCD device **600** has no floating electrode and is able to maintain high image display quality during a long-term operation.

FIG. 8 is a circuit diagram schematically showing an MVA liquid crystal display device in accordance with a fourth embodiment of the present invention. As shown in FIG. 8, the LCD device **700** comprises a pixel unit **780**, a data line Dn, a gate line Gm, and a gate line Gm+1. The gate line Gm+1 is adjacent to the gate line Gm. The pixel unit **780** comprises a first sub-pixel unit **710** and a second sub-pixel unit **720**. The first sub-pixel unit **710** includes a data switch **715**, a liquid crystal capacitor Clca, and a storage capacitor Csta. The second sub-pixel unit **720** includes a data switch **725**, an auxiliary switch **730**, a liquid crystal capacitor Clcb, a storage capacitor Cstb, and a storage capacitor Cstc. The data switches **715**, **725** and the auxiliary switch **730** are thin film transistors or MOS field effect transistors.

The data switch **715** comprises a first end electrically connected to the data line Dn for receiving a data signal SDn, a gate end electrically connected to the gate line Gm for receiving a gate signal SGm, and a second end for outputting a first voltage Va. The liquid crystal capacitor Clca comprises a first end electrically connected to the second end of the data switch **715** and a second end for receiving a first common voltage Vcom1. The storage capacitor Csta comprises a first end electrically connected to the second end of the data switch **715** and a second end for receiving a second common voltage Vcom2. The capacitance of the liquid crystal capacitor Clca is identical to or different from the capacitance of the liquid crystal capacitor Clcb. The capacitances of the storage capacitors Csta, Cstb and Cstc are identical or different. The second common voltage Vcom2 is identical to or different from the first common voltage Vcom1.

The data switch **725** comprises a first end electrically connected to the data line Dn for receiving the data signal SDn, a gate end electrically connected to the gate line Gm for receiving the gate signal SGm, and a second end for outputting a second voltage Vb. The liquid crystal capacitor Clcb comprises a first end electrically connected to the second end of the data switch **725** and a second end for receiving the first common voltage Vcom1. The storage capacitor Cstb comprises a first end electrically connected to the second end of the data switch **725** and a second end for receiving the second common voltage Vcom2. The auxiliary switch **730** comprises a first end electrically connected to the second end of the data switch **725**, a gate end electrically connected to the gate line Gm+1 for receiving a gate signal SGm+1, and a second end. The storage capacitor Cstc comprises a first end electrically connected to the second end of the auxiliary switch **730** and a second end for receiving the second common voltage Vcom2.

FIG. 9 shows related signal waveforms regarding operations of the LCD device **700** in FIG. 8, having time along the abscissa. The signal waveforms in FIG. 9, from top to bottom, are the gate signal SGm, the gate signal SGm+1, the data signal SDn, the first voltage Va, and the second voltage Vb. The data signal SDn is assumed to hold a voltage Vs or -Vs in a short time including an Ith frame time, a (I+1)th frame time through a Jth frame time. For instance, the data signal SDn holds a voltage Vs during the Ith frame time; the data signal SDn holds a voltage -Vs during the (I+1)th frame time; and the data signal SDn holds a voltage Vs during the Jth frame time. As shown in FIG. 9, the gate signal SGm has high voltage level and the gate signal SGm+1 has low voltage level during an interval Ti1 of the Ith frame time, therefore the data

switches **715**, **725** are turned on and the auxiliary switch **730** is turned off. Accordingly, both the first voltage V_a and the second voltage V_b become the voltage V_s . In the meantime, the second end of the data switch **725** stores a charge amount Q_{b4} of an equivalent capacitor corresponding to the liquid crystal capacitor Cl_{cb} and the storage capacitor C_{stb} connected in parallel. The charge amount Q_{b4} can be expressed as Formula (7) listed below.

$$Q_{b4} = [Cl_{cbv} + C_{stb}]V_s \quad \text{Formula (7)}$$

In Formula (7), Cl_{cbv} and C_{stbv} represent the capacitances of the liquid crystal capacitor Cl_{cb} and the storage capacitors C_{stb} respectively. During an interval T_{i2} of the i th frame time, the gate signal SG_m is switching to low voltage level and the gate signal SG_{m+1} is switching to high voltage level, therefore the data switches **715**, **725** are turned off and the auxiliary switch **730** is turned on. For that reason, the first voltage V_a holds the voltage V_s ; however, the second voltage V_b is switching to become a voltage V_{sz} because of turning on the auxiliary switch **730**. The voltage V_{sz} can be deduced based on a conservation rule of the charge amount Q_{b4} and is expressed as Formula (8) listed below.

$$V_{sz} = \frac{(Cl_{cbv} + C_{stbv})}{(Cl_{cbv} + C_{stbv} + C_{stcv})} V_s \quad \text{Formula (8)}$$

In Formula (8), C_{stcv} represents the capacitance of the storage capacitors C_{stc} . At this time, the first end of the storage capacitors C_{stc} stores a charge amount Q_{c1} . The charge amount Q_{c1} can be expressed as Formula (9) listed below.

$$Q_{c1} = V_{sz} \times C_{stcv} = \frac{(Cl_{cbv} + C_{stbv})C_{stcv}}{(Cl_{cbv} + C_{stbv} + C_{stcv})} V_s \quad \text{Formula (9)}$$

During an interval $T_{(i+1)1}$ of the $(i+1)$ th frame time, the gate signal SG_m has high voltage level and the gate signal SG_{m+1} has low voltage level, therefore the data switches **715**, **725** are turned on and the auxiliary switch **730** is turned off. Accordingly, both the first voltage V_a and the second voltage V_b become the voltage $-V_s$. In the meantime, the second end of the data switch **725** stores a charge amount $-Q_{b4}$ of the equivalent capacitor corresponding to the liquid crystal capacitor Cl_{cb} and the storage capacitor C_{stb} connected in parallel.

During an interval $T_{(i+1)2}$ of the $(i+1)$ th frame time, the gate signal SG_m is switching to low voltage level and the gate signal SG_{m+1} is switching to high voltage level, therefore the data switches **715**, **725** are turned off and the auxiliary switch **730** is turned on. For that reason, the first voltage V_a holds the voltage $-V_s$; however, the second voltage V_b is switching to become a voltage $-V_{sz(i+1)}$ because of turning on the auxiliary switch **730**. The voltage $V_{sz(i+1)}$ can be deduced based on a conservation rule of the charge amount $(Q_{b4} - Q_{c1})$ and is expressed as Formula (10) listed below.

$$V_{sz(i+1)} = \frac{(Cl_{cbv} + C_{stbv})}{(Cl_{cbv} + C_{stbv} + C_{stcv})} \left[1 - \frac{C_{stcv}}{Cl_{cbv} + C_{stbv} + C_{stcv}} \right] V_s \quad \text{Formula (10)}$$

When the second voltage V_b reaches steady state at the j th frame time after several frame times subsequent to the $(i+1)$ th

frame time, the second voltage V_b becomes a voltage V_{szj} . Based on the aforementioned Formula (7) through Formula (10), the voltage V_{szj} can be deduced and is expressed as Formula (11) listed below.

$$\begin{aligned} V_{szj} &= \frac{Cl_{cbv} + C_{stbv}}{Cl_{cbv} + C_{stbv} + C_{stcv}} \quad \text{Formula (11)} \\ &\left[1 - \frac{C_{stcv}}{Cl_{cbv} + C_{stbv} + C_{stcv}} + \left(\frac{C_{stcv}}{Cl_{cbv} + C_{stbv} + C_{stcv}} \right)^2 - \dots \right] V_s \\ &= \frac{(Cl_{cbv} + C_{stbv})}{(Cl_{cbv} + C_{stbv} + 2C_{stcv})} V_s \\ &= \lambda V_s \end{aligned}$$

In Formula (11), λ is a predetermined proportional constant. After the interval T_{j2} , the first sub-pixel unit **710** and the second sub-pixel unit **720** are operative to achieve an MVA wide viewing angle image display based on the first voltage V_a and the second voltage V_b having a predetermined proportional relationship. In the operation of the LCD device **700**, the second voltage V_b may be sort of unstable under high frame variation rate. However, under general operation situation, an occurrence of serious image flickering phenomena can be avoided and the LCD device **700** is still able to maintain high display quality.

In summary, since the LCD device **700** of the present invention provides different sub-pixel voltages by making use of conventional driving feature corresponding to gate signals of two adjacent gate lines, the number of gate lines required by the LCD device **700** is substantially the same as the number of gate lines required by a conventional LCD device. Therefore, the aperture ratio of each pixel unit in the LCD device **700** is not reduced and the frequency of driving clock used in the LCD device **700** is the same as the frequency of driving clock used in the conventional LCD device. That is, the LCD device **700** is capable of achieving an MVA wide viewing angle image display based on a cost-effective simplified structure. In one embodiment, the LCD device **700** is employed to realize high image display quality having wide viewing angle based on 8-domain vertical alignment design. Besides, the LCD device **700** has no floating electrode and is able to maintain high image display quality during a long-term operation.

FIG. 10 is a circuit diagram schematically showing an MVA liquid crystal display device in accordance with a fifth embodiment of the present invention. As shown in FIG. 10, the LCD device **900** comprises a pixel unit **980**, a data line D_n , a gate line G_m , and a gate line G_{m+1} . The gate line G_{m+1} is adjacent to the gate line G_m . The pixel unit **980** comprises a first sub-pixel unit **910** and a second sub-pixel unit **920**. The first sub-pixel unit **910** includes a data switch **915**, a liquid crystal capacitor Cl_{ca} , and a storage capacitor C_{sta} . The second sub-pixel unit **920** includes a data switch **925**, an auxiliary switch **930**, an auxiliary switch **935**, a liquid crystal capacitor Cl_{cb} , a storage capacitor C_{stb} , and a storage capacitor C_{stc} . The data switches **915**, **925** and the auxiliary switches **930**, **935** are thin film transistors or MOS field effect transistors.

The data switch **915** comprises a first end electrically connected to the data line D_n for receiving a data signal SD_n , a gate end electrically connected to the gate line G_m for receiving a gate signal SG_m , and a second end for outputting a first voltage V_a . The liquid crystal capacitor Cl_{ca} comprises a first

end electrically connected to the second end of the data switch 915 and a second end for receiving a first common voltage Vcom1. The storage capacitor Csta comprises a first end electrically connected to the second end of the data switch 915 and a second end for receiving a second common voltage Vcom2. The capacitance of the liquid crystal capacitor Clca is identical to or different from the capacitance of the liquid crystal capacitor Clcb. The capacitances of the storage capacitors Csta, Cstb and Cstc are identical or different. The second common voltage Vcom2 is identical to or different from the first common voltage Vcom1.

The data switch 925 comprises a first end electrically connected to the data line Dn for receiving the data signal SDn, a gate end electrically connected to the gate line Gm for receiving the gate signal SGm, and a second end for outputting a second voltage Vb. The liquid crystal capacitor Clcb comprises a first end electrically connected to the second end of the data switch 925 and a second end for receiving the first common voltage Vcom1. The storage capacitor Cstb comprises a first end electrically connected to the second end of the data switch 925 and a second end for receiving the second common voltage Vcom2. The auxiliary switch 930 comprises a first end electrically connected to the second end of the data switch 925, a gate end electrically connected to the gate line Gm+1 for receiving a gate signal SGm+1, and a second end. The storage capacitor Cstc comprises a first end electrically connected to the second end of the auxiliary switch 930 and a second end for receiving the second common voltage Vcom2. The auxiliary switch 935 comprises a first end electrically connected to the first end of the storage capacitor Cstc, a gate end electrically connected to the gate line Gm for receiving the gate signal SGm, and a second end for receiving the second common voltage Vcom2.

FIG. 11 shows related signal waveforms regarding operations of the LCD device 900 in FIG. 10, having time along the abscissa. The signal waveforms in FIG. 11, from top to bottom, are the gate signal SGm, the gate signal SGm+1, the data signal SDn, the first voltage Va, and the second voltage Vb. The data signal SDn is assumed to retain a voltage Vs in a short time including intervals T1 and T2. As shown in FIG. 11, the gate signal SGm has high voltage level and the gate signal SGm+1 has low voltage level during the interval T1, therefore the data switches 915, 925 and the auxiliary switch 935 are turned on and the auxiliary switch 930 is turned off. Accordingly, both the first voltage Va and the second voltage Vb become the voltage Vs, and the electric charges accumulated in the storage capacitor Cstc can be released via the auxiliary switch 935. In the meantime, the second end of the data switch 925 stores a charge amount Qb5 of the equivalent capacitor corresponding to the liquid crystal capacitor Clcb and the storage capacitor Cstb connected in parallel. The charge amount Qb5 can be expressed as Formula (12) listed below.

$$Qb5 = [Clcbv + Cstbv]Vs \quad \text{Formula (12)}$$

In Formula (12), Clcbv and Cstbv represent the capacitances of the liquid crystal capacitor Clcb and the storage capacitor Cstb respectively. During the interval T2, the gate signal SGm is switching to low voltage level and the gate signal SGm+1 is switching to high voltage level, therefore the data switches 915, 925 and the auxiliary switch 935 are turned off and the auxiliary switch 930 is turned on. For that reason, the first voltage Va holds the voltage Vs; however, the second voltage Vb is switching to become a voltage Vsw because of turning on the auxiliary switch 930. The voltage Vsw can be

deduced based on a conservation rule of the charge amount Qb5 and is expressed as Formula (13) listed below.

$$V_{sw} = \frac{(Clcbv + Cstbv)}{(Clcbv + Cstbv + Cstcv)} V_s = \sigma V_s \quad \text{Formula (13)}$$

In Formula (13), Cstcv represent the capacitance of the storage capacitor Cstc and σ is a predetermined proportional constant. After the interval T2, the first sub-pixel unit 910 and the second sub-pixel unit 920 are operative to achieve an MVA wide viewing angle image display based on the first voltage Va and the second voltage Vb having a predetermined proportional relationship. If the electrode areas of the capacitors in the pixel unit 980 are well adjusted, the image quality of the LCD device 900 can be optimized. In summary, since the LCD device 900 of the present invention provides different sub-pixel voltages by making use of conventional driving feature corresponding to gate signals of two adjacent gate lines, the number of gate lines required by the LCD device 900 is substantially the same as the number of gate lines required by a conventional LCD device. Therefore, the aperture ratio of each pixel unit in the LCD device 900 is not reduced and the frequency of driving clock used in the LCD device 900 is the same as the frequency of driving clock used in the conventional LCD device. That is, the LCD device 900 is capable of achieving an MVA wide viewing angle image display based on a cost-effective simplified structure. In one embodiment, the LCD device 900 is employed to realize high image display quality having wide viewing angle based on 8-domain vertical alignment design. Besides, the LCD device 900 has no floating electrode and is able to maintain high image display quality during a long-term operation.

The present invention is by no means limited to the embodiments as described above by referring to the accompanying drawings, which may be modified and altered in a variety of different ways without departing from the scope of the present invention. Thus, it should be understood by those skilled in the art that various modifications, combinations, sub-combinations and alternations might occur depending on design requirements and other factors insofar as they are within the scope of the appended claims or the equivalents thereof.

What is claimed is:

1. A liquid crystal display device comprising:
 - a data line for delivering a data signal;
 - a first gate line for delivering a first gate signal;
 - a second gate line for delivering a second gate signal;
 - a first sub-pixel unit comprising:
 - a first data switch comprising:
 - a first end electrically connected to the data line for receiving the data signal;
 - a gate end electrically connected to the first gate line for receiving the first gate signal; and
 - a second end;
 - a first liquid crystal capacitor comprising:
 - a first end electrically connected to the second end of the first data switch; and
 - a second end for receiving a first common voltage; and
 - a first storage capacitor comprising:
 - a first end electrically connected to the second end of the first data switch; and
 - a second end for receiving a second common voltage; and

15

- a second sub-pixel unit comprising:
 a second data switch comprising:
 a first end electrically connected to the data line for receiving the data signal;
 a gate end electrically connected to the first gate line for receiving the first gate signal; and
 a second end;
 a second liquid crystal capacitor comprising:
 a first end electrically connected to the second end of the second data switch; and
 a second end for receiving the first common voltage;
 an auxiliary switch comprising:
 a first end electrically connected to the second end of the second data switch;
 a gate end electrically connected to the second gate line for receiving the second gate signal; and
 a second end;
 a second storage capacitor comprising:
 a first end directly connected to the second end of the auxiliary switch; and
 a second end for receiving the second common voltage; and
 a third storage capacitor comprising:
 a first end electrically connected to the second end of the second data switch; and
 a second end electrically connected to the second end of the auxiliary switch.
2. The liquid crystal display device of claim 1, wherein the second gate line is adjacent to the first gate line.
3. The liquid crystal display device of claim 1, wherein the first data switch and the second data switch are thin film transistors or metal oxide semiconductor (MOS) field effect transistors.
4. The liquid crystal display device of claim 1, wherein the auxiliary switch is a thin film transistor or a MOS field effect transistor.
5. The liquid crystal display device of claim 1, wherein the first sub-pixel unit and the second sub-pixel unit belong to a pixel unit.
6. The liquid crystal display device of claim 1, wherein the second sub-pixel unit further comprises:
 a fourth storage capacitor comprising:
 a first end electrically connected to the second end of the second data switch; and
 a second end for receiving the second common voltage.
7. The liquid crystal display device of claim 1, wherein second common voltage is identical to or different from the first common voltage.
8. A liquid crystal display device comprising:
 a data line for delivering a data signal;
 a first gate line for delivering a first gate signal;
 a second gate line for delivering a second gate signal;
 a first sub-pixel unit comprising:
 a first data switch comprising:
 a first end electrically connected to the data line for receiving the data signal;
 a gate end electrically connected to the first gate line for receiving the first gate signal; and
 a second end;

16

- a first liquid crystal capacitor comprising:
 a first end electrically connected to the second end of the first data switch; and
 a second end for receiving a first common voltage; and
 a first storage capacitor comprising:
 a first end electrically connected to the second end of the first data switch; and
 a second end for receiving a second common voltage; and
 a second sub-pixel unit comprising:
 a second data switch comprising:
 a first end electrically connected to the data line for receiving the data signal;
 a gate end electrically connected to the first gate line for receiving the first gate signal; and
 a second end;
 a second liquid crystal capacitor comprising:
 a first end electrically connected to the second end of the second data switch; and
 a second end for receiving the first common voltage;
 an auxiliary switch comprising:
 a first end for receiving the second common voltage;
 a gate end electrically connected to the second gate line for receiving the second gate signal; and
 a second end;
 a second storage capacitor comprising:
 a first end directly connected to the second end of the auxiliary switch; and
 a second end for receiving the second common voltage;
 a third storage capacitor comprising:
 a first end directly connected to the second end of the second data switch; and
 a second end electrically connected to the second end of the auxiliary switch; and
 a fourth storage capacitor comprising:
 a first end directly connected to the second end of the second data switch; and
 a second end for receiving the second common voltage.
9. The liquid crystal display device of claim 8, wherein the second gate line is adjacent to the first gate line.
10. The liquid crystal display device of claim 8, wherein the first data switch and the second data switch are thin film transistors or MOS field effect transistors.
11. The liquid crystal display device of claim 8, wherein the auxiliary switch is a thin film transistor or a MOS field effect transistor.
12. The liquid crystal display device of claim 8, wherein second common voltage is identical to or different from the first common voltage.
13. The liquid crystal display device of claim 8, wherein the first sub-pixel unit and the second sub-pixel unit belong to a pixel unit.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US8111226	公开(公告)日	2012-02-07
申请号	US12/465641	申请日	2009-05-13
[标]申请(专利权)人(译)	TSAI一成 黄贵魏		
申请(专利权)人(译)	蔡易成 黄贵伟		
当前申请(专利权)人(译)	中华映管股份有限公司.		
[标]发明人	TSAI YI CHENG HUANG KUEI WEI		
发明人	TSAI, YI-CHENG HUANG, KUEI-WEI		
IPC分类号	G02F1/133 G09G3/36		
CPC分类号	G09G3/3648 G09G2300/0443 G09G2300/0447 G09G2300/0814 G09G2300/0852 G09G2310/0262		
优先权	098204043 2009-03-16 TW		
其他公开文献	US20100231494A1		
外部链接	Espacenet USPTO		

摘要(译)

一种多域垂直配向液晶显示装置，包括数据线，第一栅极线，第二栅极线，第一子像素单元和第二子像素单元。第一子像素单元包括第一开关，第一液晶电容器和第一存储电容器。第一开关用于基于第一栅极线的第一栅极信号控制将数据线的的数据信号写入第一液晶和存储电容器。第二子像素单元包括第二开关，第二液晶电容器，辅助开关，第二存储电容器和第三存储电容器。第二和辅助开关用于分别基于第二栅极线的第一栅极信号和第二栅极信号控制将数据信号写入第二液晶电容器，第二存储电容器和第三存储电容器。

