



US008455160B2

(12) **United States Patent**
Tu et al.

(10) **Patent No.:** **US 8,455,160 B2**
(45) **Date of Patent:** **Jun. 4, 2013**

(54) **COLOR FILTER OF LIQUID CRYSTAL ON SILICON DISPLAY DEVICE**

(75) Inventors: **Ho Tu**, Sinshih Township, Tainan County (TW); **Yi-Hua Wang**, Sinshih Township, Tainan County (TW)

(73) Assignee: **Himax Technologies Limited**, Sinshih Township, Tainan County (TW)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 333 days.

(21) Appl. No.: **12/963,972**

(22) Filed: **Dec. 9, 2010**

(65) **Prior Publication Data**

US 2012/0148946 A1 Jun. 14, 2012

(51) **Int. Cl.**
G02F 1/1335 (2006.01)

(52) **U.S. Cl.**
USPC **430/7**; 349/106; 349/113

(58) **Field of Classification Search**
None

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2006/0290830 A1 * 12/2006 Teramoto et al. 349/56
2009/0213315 A1 * 8/2009 Wang 349/123

FOREIGN PATENT DOCUMENTS

JP 8-286178 A * 11/1996

OTHER PUBLICATIONS

Computer-generated translation of JP '8-286178 (Nov. 1996).*

* cited by examiner


Primary Examiner — John A. McPherson

(74) *Attorney, Agent, or Firm* — McClure, Qualey & Rodack, LLP

(57) **ABSTRACT**

A color filter of a liquid crystal on silicon (LCOS) display device is disclosed, including a substrate including a plurality of pixel regions wherein each pixel region includes a first color dot, a second color dot and a third color dot; and a first color resist, a second color resist and a third color resist disposed in the first color dot, the second color dot and the third color dot on the substrate, wherein each of the first color resist, the second color resist and the third color resist includes at least one opening.

15 Claims, 11 Drawing Sheets

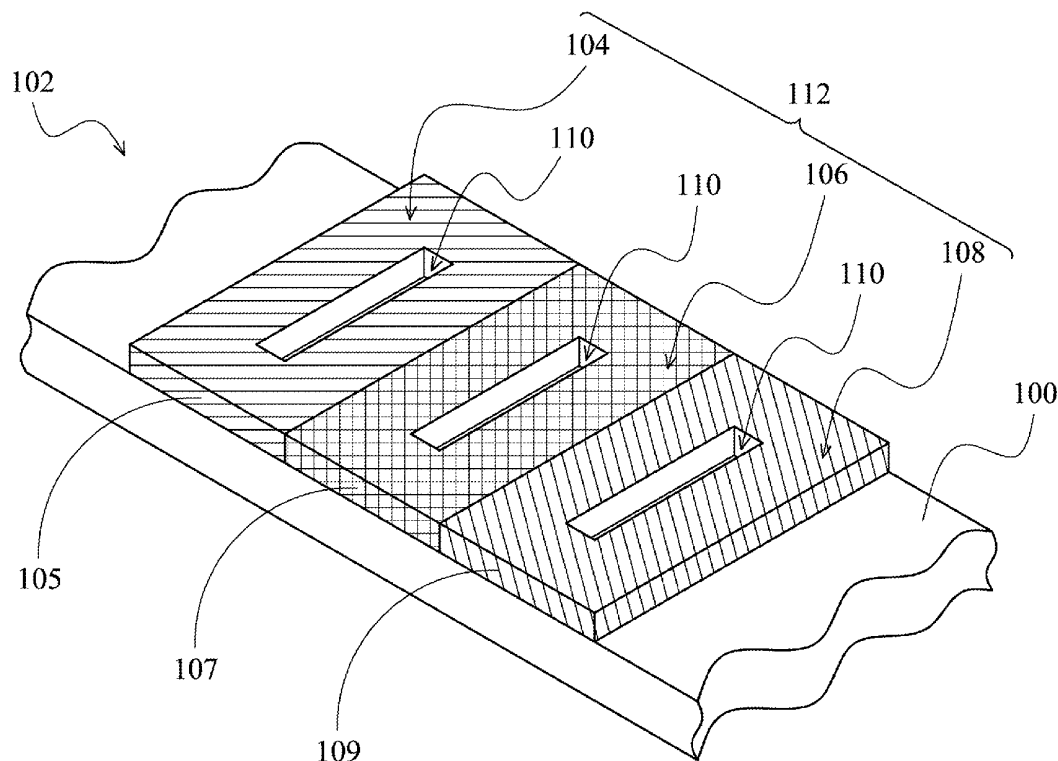

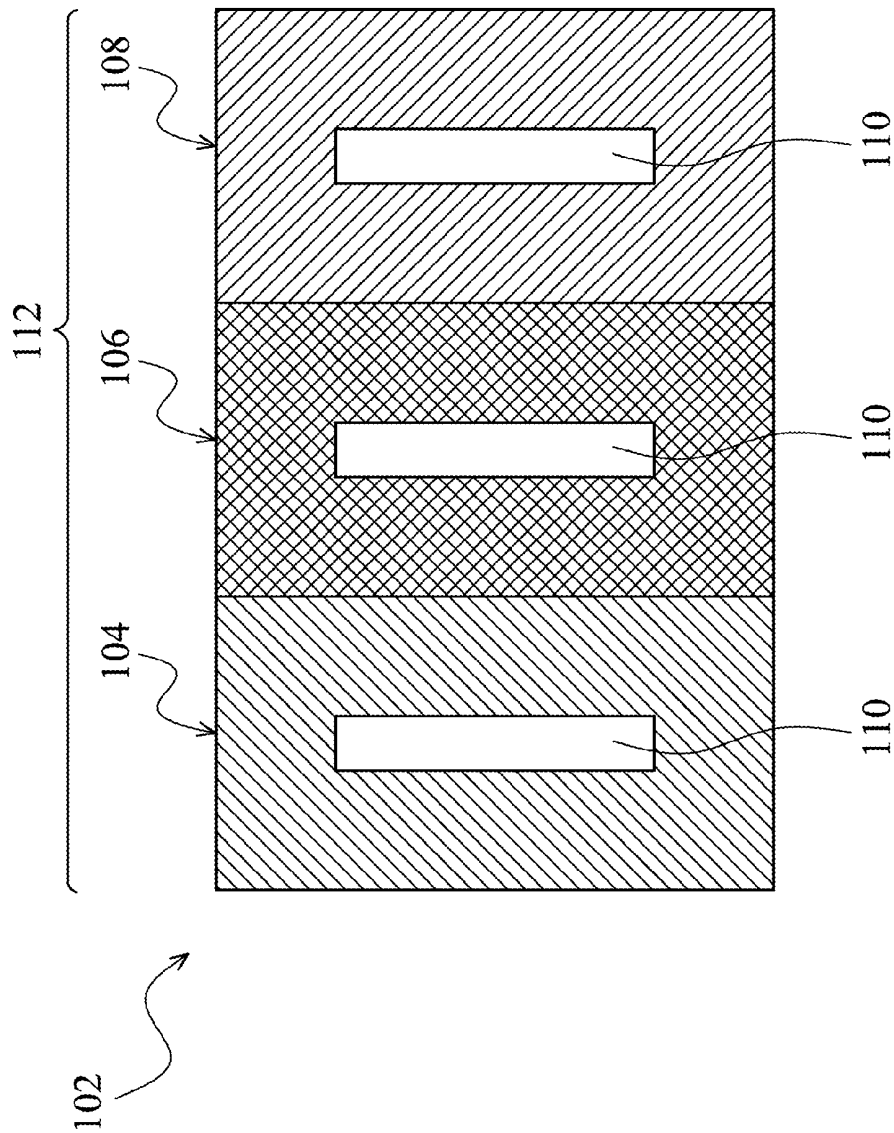


FIG. 1A

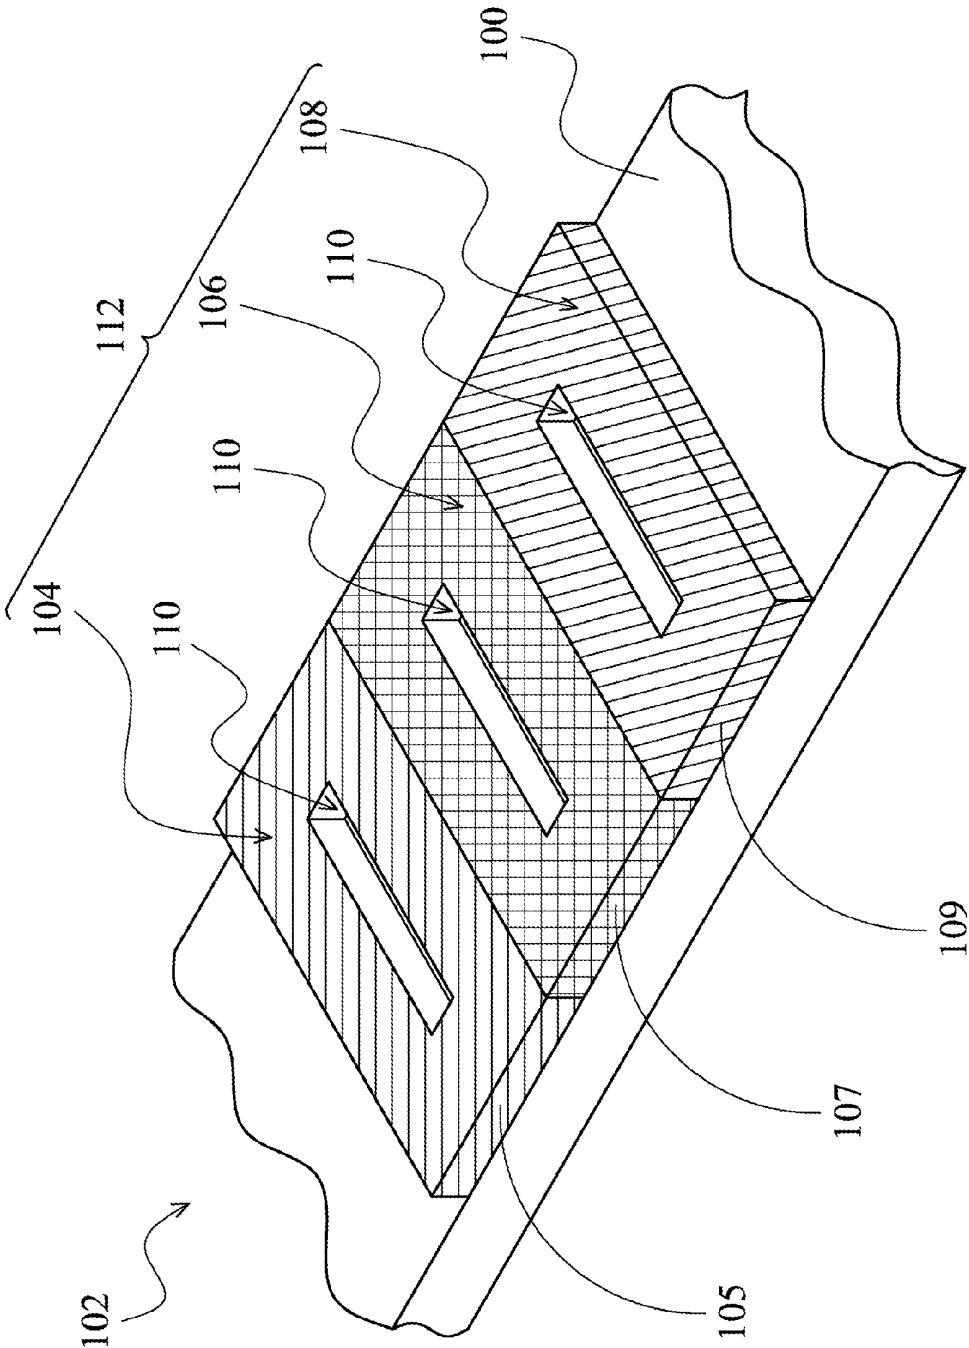


FIG. 1B

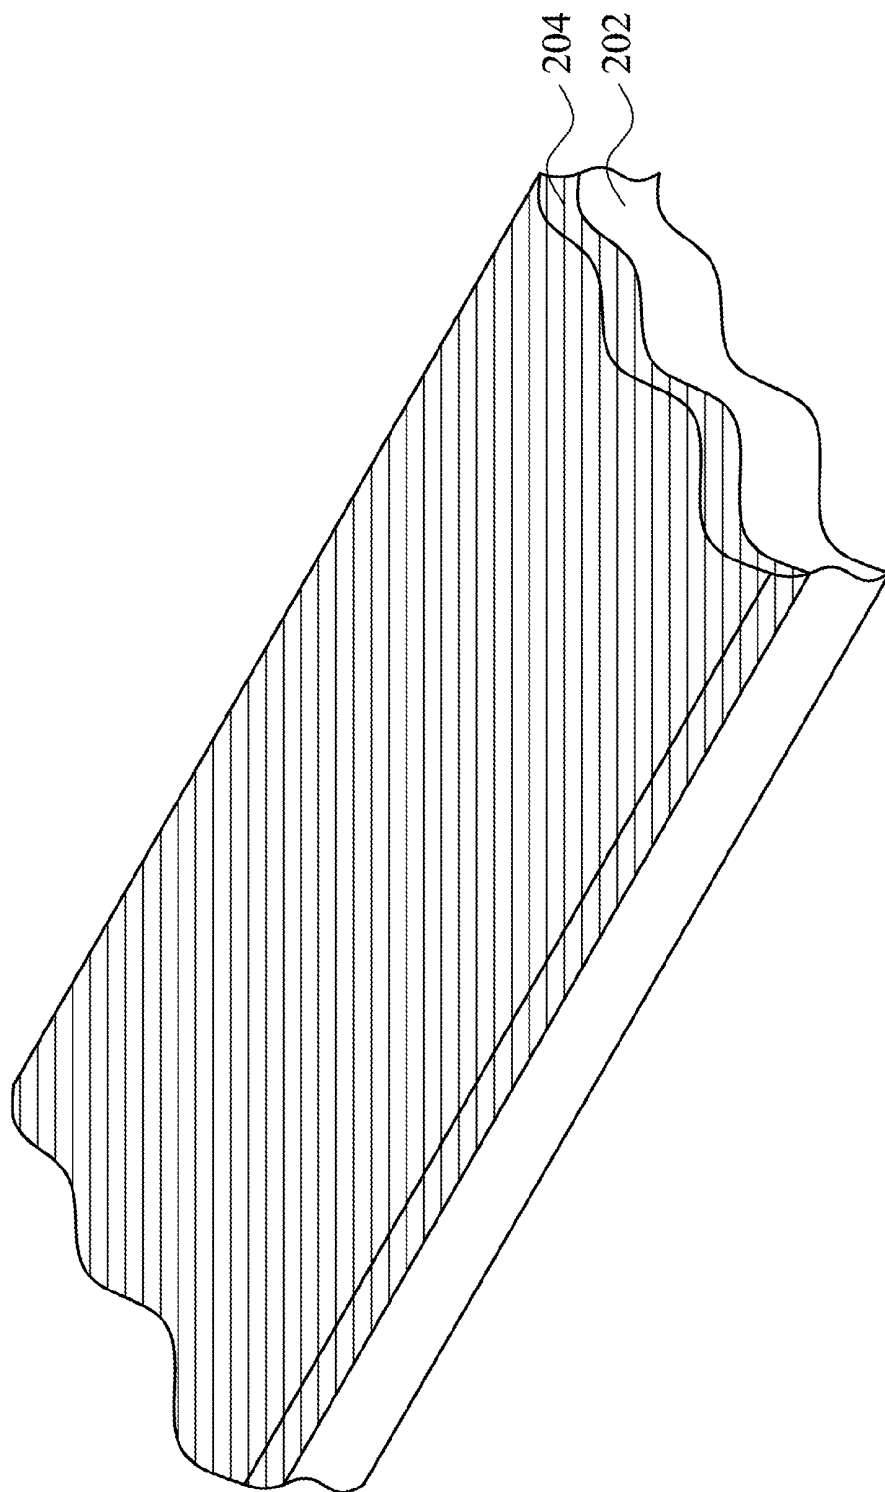


FIG. 2A

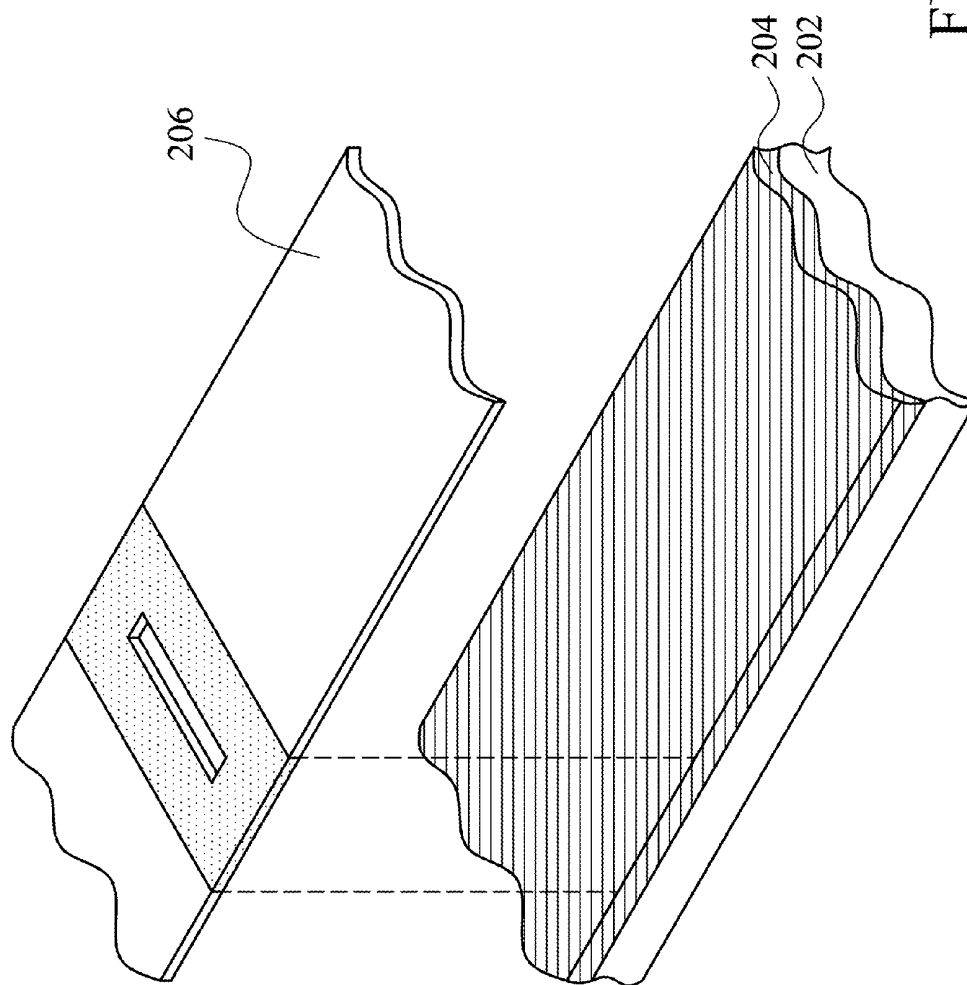


FIG. 2B

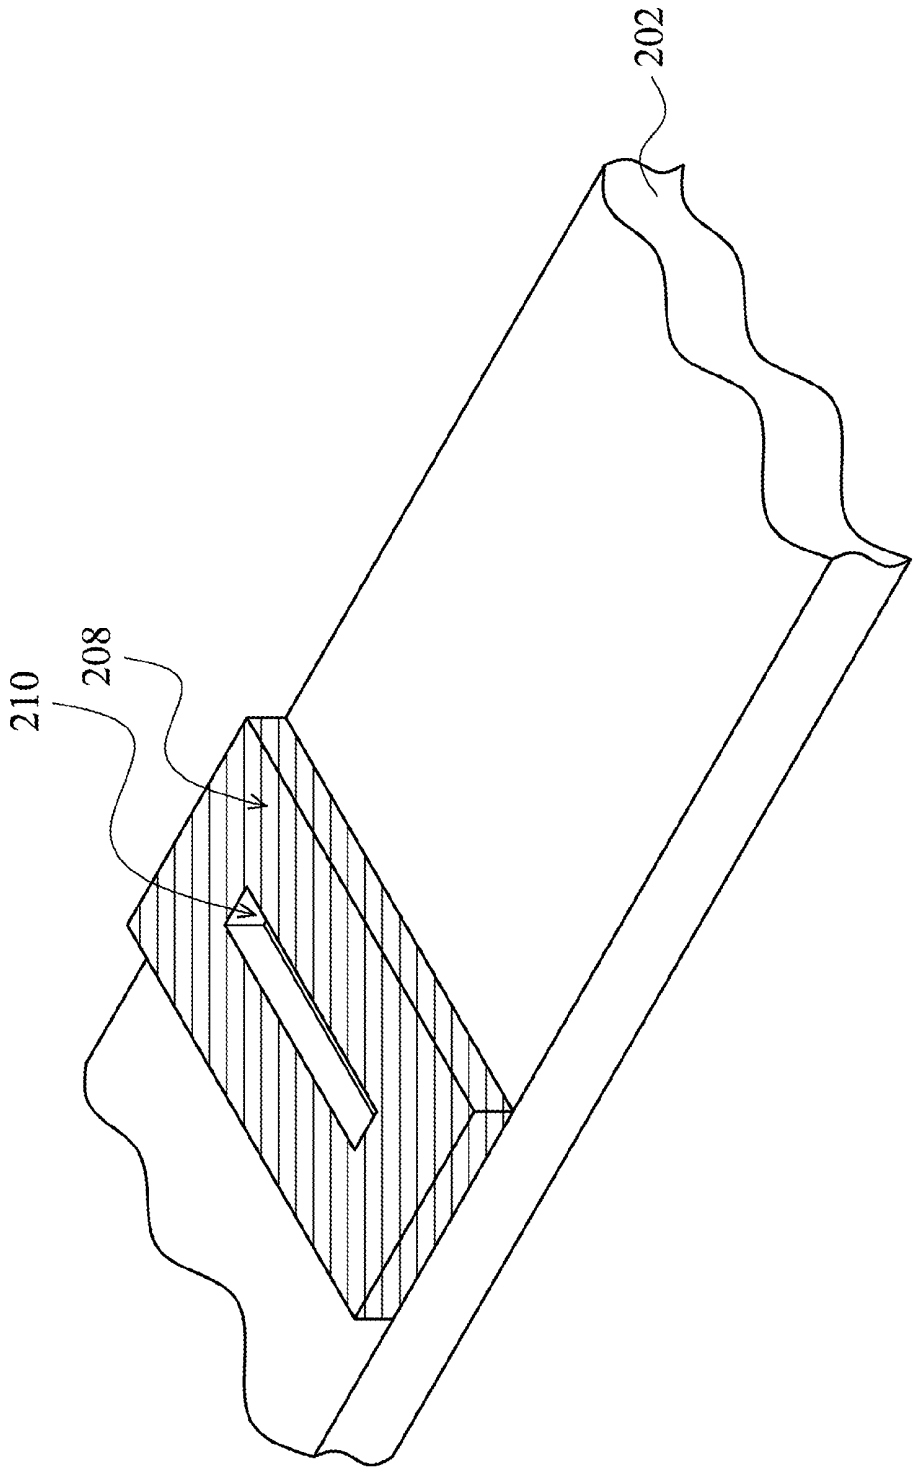


FIG. 2C

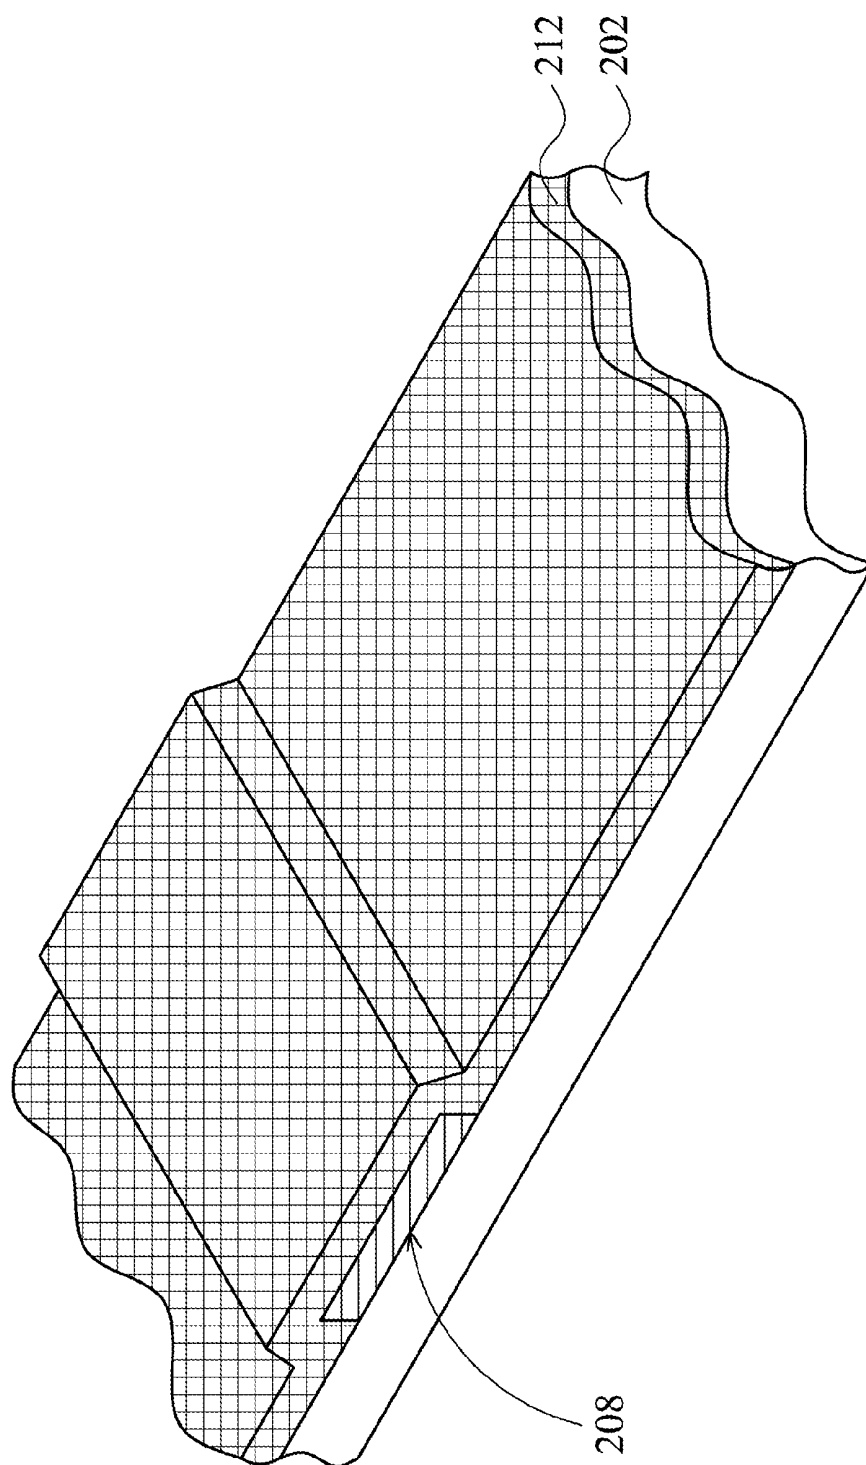


FIG. 2D

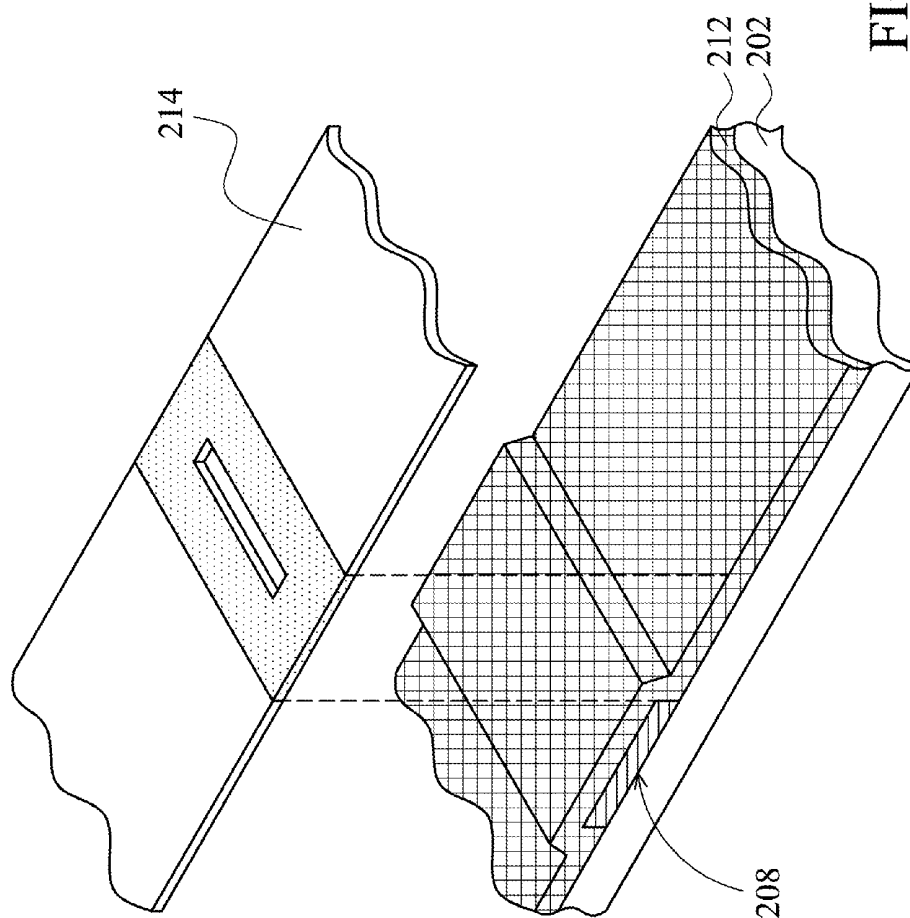


FIG. 2E

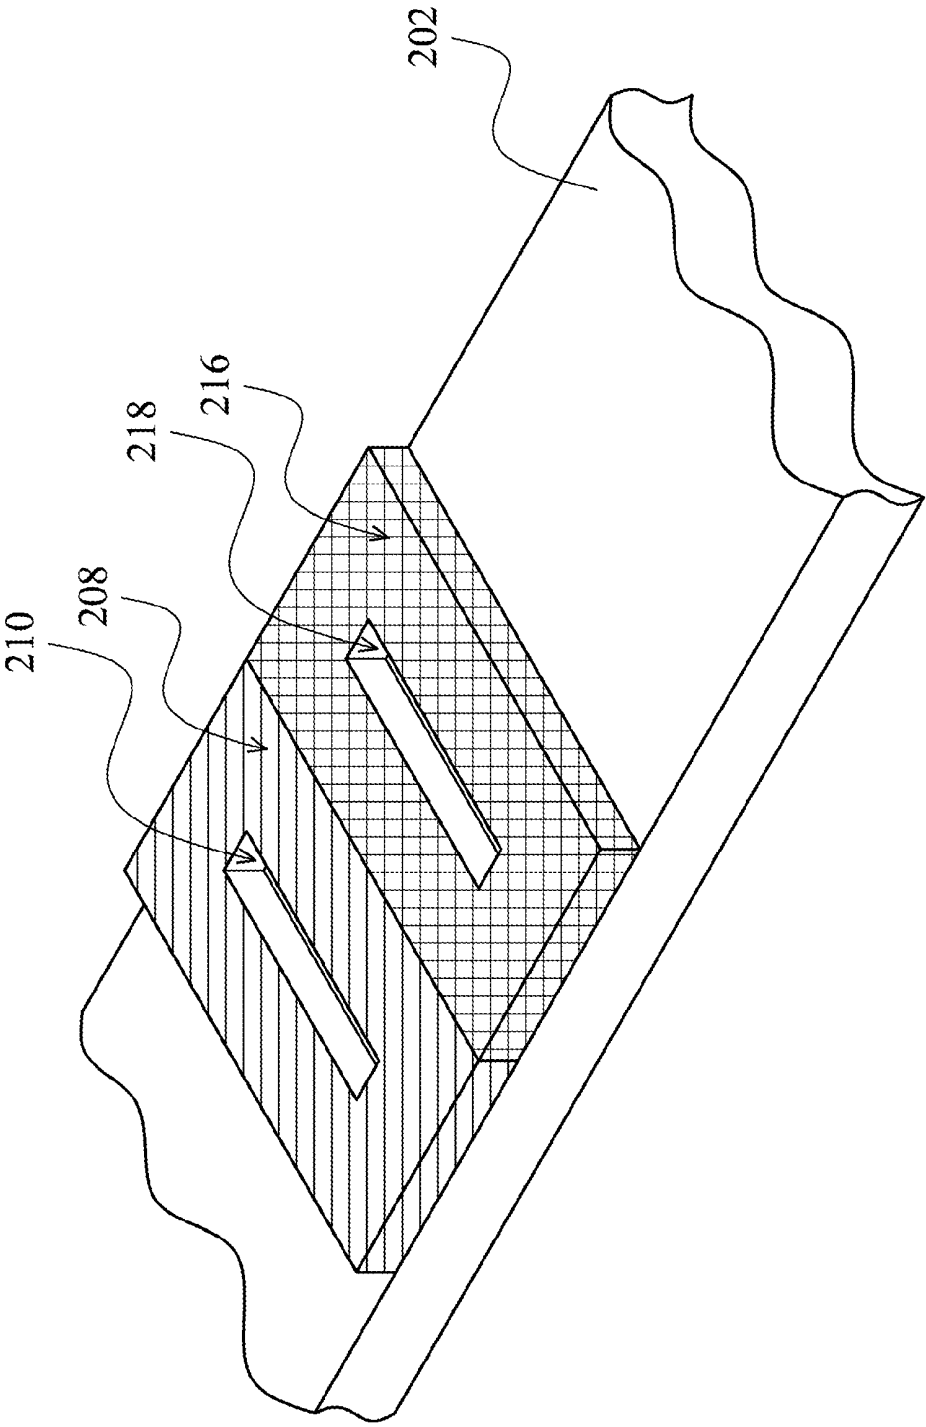


FIG. 2F

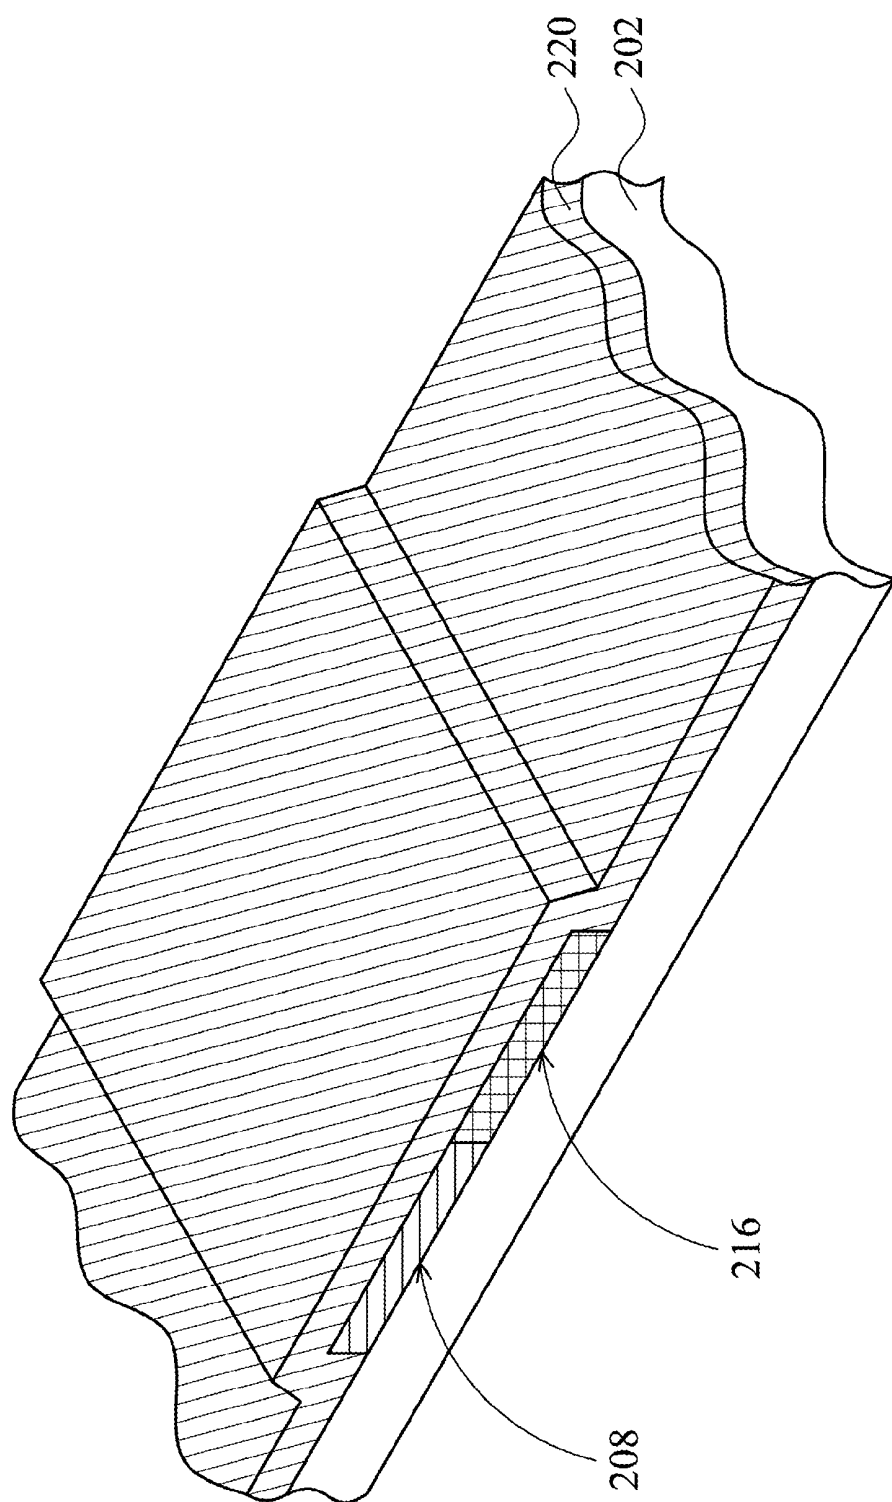


FIG. 2G

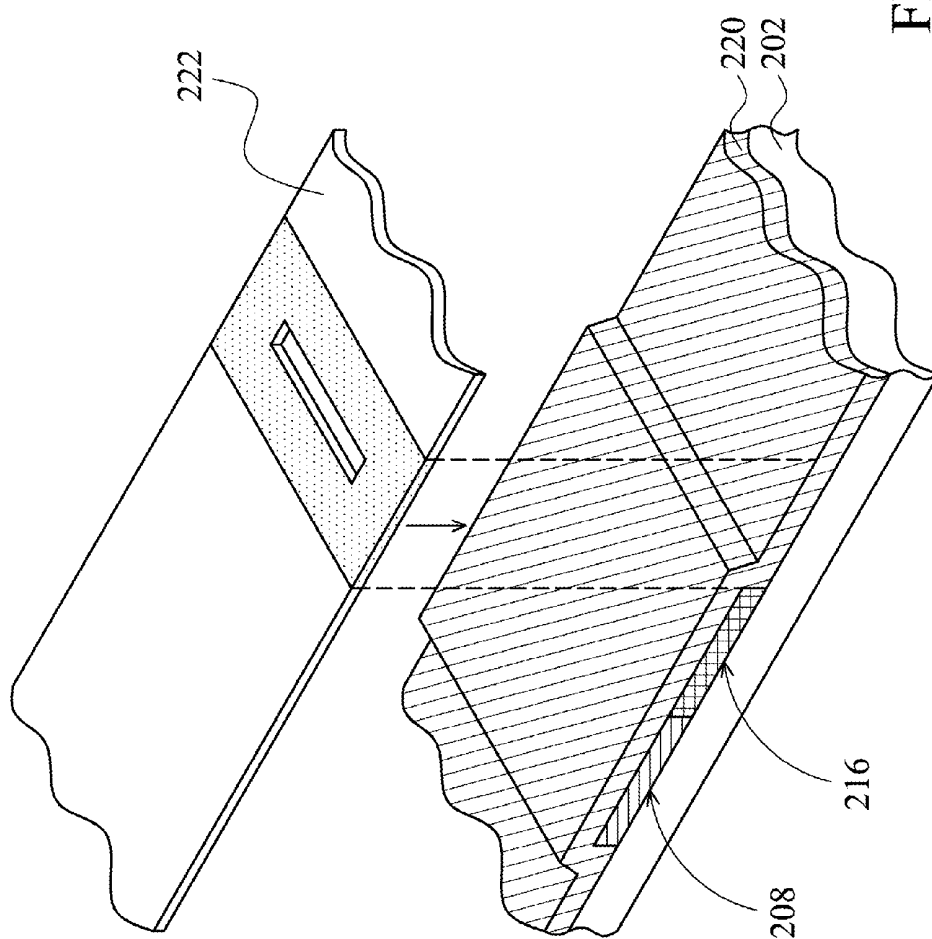


FIG. 2H

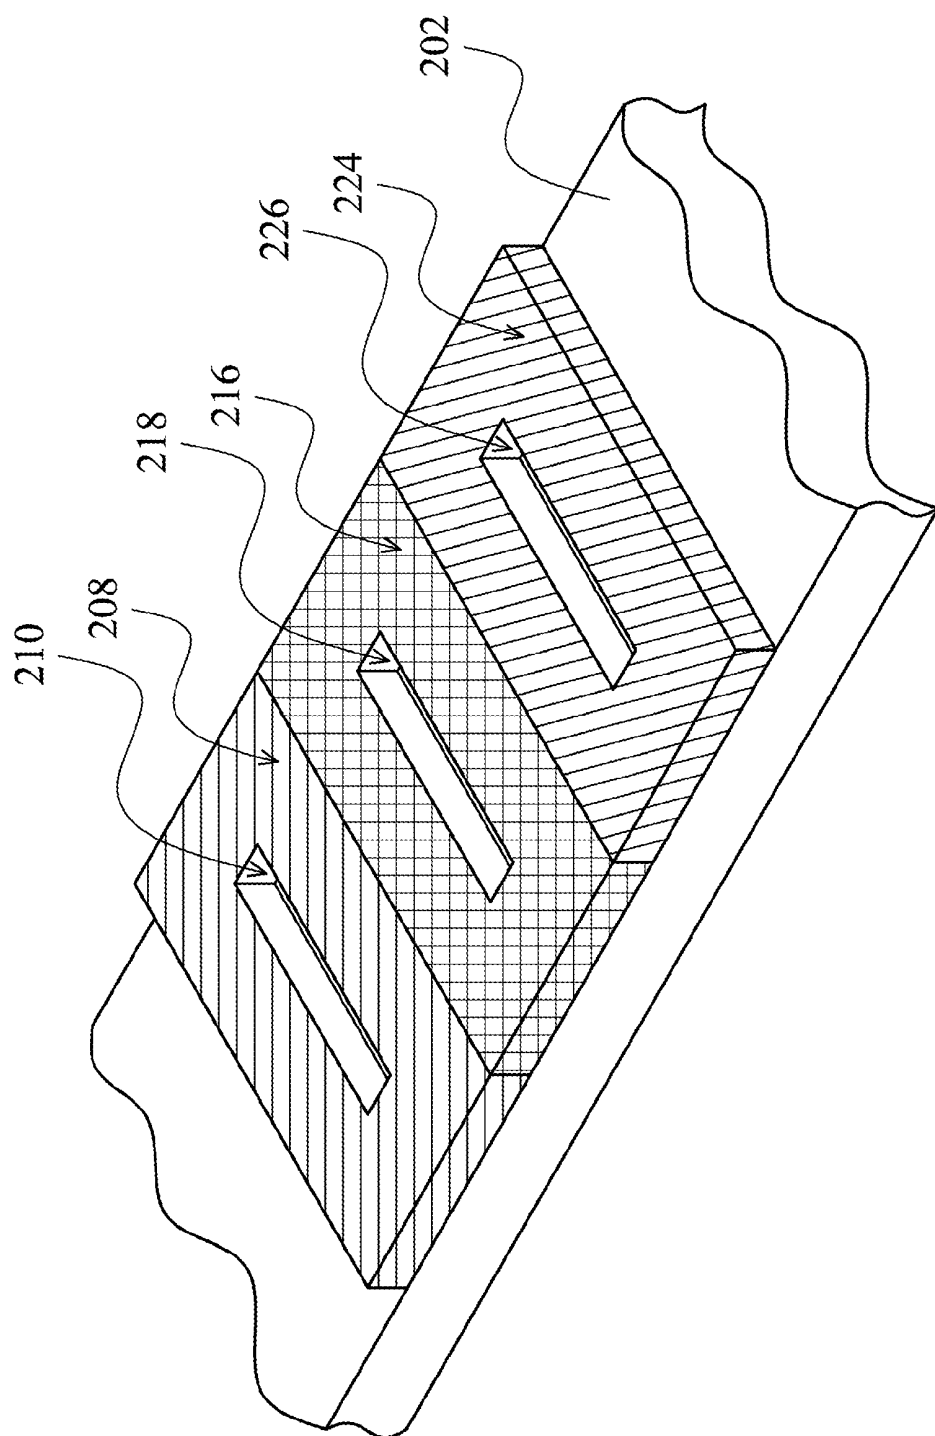


FIG. 21

COLOR FILTER OF LIQUID CRYSTAL ON SILICON DISPLAY DEVICE

BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates in general to a liquid crystal on silicon (LCOS) display device and more particularly to a color filter of a liquid crystal on silicon (LCOS) display device.

2. Description of the Related Art

As technology develops, electronic devices with display panels are widely applied in many fields. Important features that a customer especially looks for in an electronic device include color quality and resolution of the display panel attached thereto. Among different types of display panels, a liquid crystal on silicon (LCOS) display panel has good resolution and therefore is commonly used in many kinds of electronic devices.

Liquid crystal on silicon (LCOS) is a "micro-projection" or "micro-display" technology typically applied in projection apparatuses. It is a reflective technology similar to DLP projectors; however, it uses liquid crystals instead of individual mirrors. By way of comparison, LCD projectors use transmissive LCD chips, allowing light to pass through the liquid crystal. In LCOS, liquid crystals are applied directly to the surface of a silicon chip coated with an aluminized layer, with some type of passivation layer, which is highly reflective.

LCOS technology can typically produce higher resolution and higher contrast images than standard liquid crystal display and plasma display technologies, which makes it less expensive to implement in such devices as televisions.

In order to display colorful images, an LCOS display device usually includes a color filter layer disposed on the side of a silicon substrate. The color filter layer is between the alignment layer and the silicon substrate and includes color dots of different colors for displaying all kinds of colors. However, given conventional technology, transmittance of LCOS display devices is not fully maximized. A new LCOS display device which has high transmittance and meets national television standard committee (NTSC) specifications is required.

BRIEF SUMMARY OF INVENTION

The invention provides a color filter of a liquid crystal on silicon (LCOS) display device, comprising a substrate comprising a plurality of pixel regions wherein each pixel region comprises a first color dot, a second color dot and a third color dot and a first color resist, a second color resist and a third color resist disposed in the first color dot, the second color dot and the third color dot on the substrate, wherein each of the first color resist, the second color resist and the third color resist comprises at least one opening.

The invention provides a method for forming a color filter of a liquid crystal on silicon (LCOS) display device, comprising providing a substrate, forming a first color resist on the substrate, patterning the first color resist to form a first color dot, wherein the first color resist comprises an opening in the first color dot, forming a second color resist on the substrate and the first color resist, patterning the second color resist to form a second color dot, wherein the second color resist comprises an opening in the second color dot, forming a third color resist on the substrate and the first and the second color resists, and patterning the third color resist to form a third color dot, wherein the third color resist comprises an opening in the third color dot.

BRIEF DESCRIPTION OF DRAWINGS

The invention can be more fully understood by reading the subsequent detailed description and examples with references made to the accompanying drawings, wherein,

FIG. 1A shows a plan view of a color filter of a liquid crystal on silicon (LCOS) display device of an embodiment of the invention.

FIG. 1B shows a cross section of a color filter of a liquid crystal on silicon (LCOS) display device of an embodiment of the invention.

FIGS. 2A~2I show fabrications of a color filter of a liquid crystal on silicon (LCOS) display device of an embodiment of the invention.

DETAILED DESCRIPTION OF INVENTION

It is understood that specific embodiments are provided as examples to teach the broader inventive concept, and one of ordinary skill in the art can easily apply the teaching of the present disclosure to other methods or apparatus. In addition, it is understood that the methods and device discussed in the present disclosure include some conventional structures and/or processes. Since these structures and processes are well known in the art, they will only be discussed in a general level of detail. Furthermore, reference numbers are repeated throughout the drawings for sake of convenience and example, and such repetition does not indicate any required combination of features or steps throughout the drawings. Moreover, the formation of a first feature over and on a second feature in the description that follows may include embodiments in which the first and second features are formed in direct contact, and may also include embodiments in which additional features may be formed interposing the first and second features, such that the first and second features may not be in direct contact.

FIG. 1A shows a plan view of a color filter **102** of a liquid crystal on silicon (LCOS) display device of an embodiment of the invention. FIG. 1B shows a cross section of a color filter **102** of a liquid crystal on silicon (LCOS) display device of an embodiment of the invention. It is noted that FIGS. 1A and 1B only show one pixel region **112** for simplicity, and the color filter **102** can comprise a plurality of arranged pixel regions **112**. Referring to FIGS. 1A and 1B, a color filter **102** is provided, wherein a pixel region **112** of the color filter **102** comprises a first color dot **104**, a second color dot **106** and a third color dot **108** on a substrate **100**, made of material such as silicon. Many other active or passive devices, elements or layers may be formed on the substrate **100**. However, these devices, elements or layers are not shown for simplicity. In an embodiment, the first color is red, the second color is green and the third color is blue. Furthermore, the first, second and third color dots **104**, **106**, **108** comprise a first color resist **105**, a second color resist **107** and a third color resist **109**, respectively. In an important feature of the embodiment, each of the first color resist **105**, the second color resist **107** and the third color resist **109** in the first, second and third color dots **104**, **106**, **108** comprises an opening **110**, and transmittance of the color filter **102** of the embodiment can be increased due to the openings **110** in the dots. The openings **110** can be regarded as slits, wherein light passes the color filter **102** to generate diffraction and this diffraction can increase transmittance of the color filter **102**. As shown in FIG. 1A, the openings **110** are rectangular shaped in an embodiment of the invention. The invention, however, is not limited thereto. The openings **110** can be circular shaped, cross shaped or other suitable shapes. It is noted that the color filter **102** of a liquid crystal on

silicon (LCOS) display device of an embodiment of the invention has higher transmittance than prior art and meets national television standard committee (NTSC) specifications.

FIGS. 2A~2I show fabrication of a color filter of a liquid crystal on silicon (LCOS) display device of an embodiment of the invention. Referring to FIG. 2A, a substrate 202 is provided. In an embodiment of the invention, the substrate 202 is a semiconductor substrate, made up of material such as silicon. Next, a first color resist 204 is coated on the substrate 202. In an embodiment, the first color is red and the first color resist 204 is a positive resist. Alternatively, the first color can be another color and the first color resist 204 can be a negative resist. Next, referring to FIG. 2B, an exposure step is performed to the first color resist 204 with light passing through a first mask 206. Referring to FIG. 2C, a development step is performed to remove the exposed portions of the first color resist 204 and thus a first color dot 208 comprising an opening 210 is formed. Referring to FIG. 2D, a second color resist 212 is coated on the substrate 202. In an embodiment, the second color is green and the second color resist 212 is a positive resist. Alternatively, the second color can be another color and the second color resist 212 can be a negative resist. Next, referring to FIG. 2E, an exposure step is performed to the second color resist 212 with light passing through a second mask 214. Referring to FIG. 2F, a development step is performed to remove the exposed portions of the second color resist 212, and thus a second color dot 216 comprising an opening 218 is formed neighboring the first color dot 208. Referring to FIG. 2G, a third color resist 220 is coated on the substrate 202. In an embodiment, the third color is blue and the third color resist 220 is a positive resist. Alternatively, the third color can be another color and the third color resist 220 can be a negative resist. Next, referring to FIG. 2H, an exposure step is performed to the third color resist 220 with light passing through a third mask 222. Referring to FIG. 2I, a development step is performed to remove the exposed portions of the third color resist 220, and thus a third color dot 224 comprising an opening 226 is formed neighboring the second color dot 216.

According to the description above, the color filter of a liquid crystal on silicon (LCOS) display device of embodiments of the invention can provide advantages as follows. First, transmittance of the color filter of a liquid crystal on silicon (LCOS) display device provided by an embodiment of the invention can be increased 15%~30% and the LCOS display device meets NTSC specifications. Second, process for fabricating the color filter does not have to be changed, wherein only layout of patterns of the mask for defining the color resists have to be modified for the color dots to comprise openings.

While the invention has been described by way of example and in terms of the preferred embodiments, it is to be understood that the invention is not limited to the disclosed embodiments. It is intended to cover various modifications and similar arrangements (as would be apparent to those skilled in the art). Therefore, the scope of the appended claims should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements.

What is claimed is:

1. A color filter of a liquid crystal on silicon (LCOS) display device, comprising:
 - a silicon substrate comprising a plurality of pixel regions wherein each pixel region comprises a first color dot, a second color dot and a third color dot; and
 - a first color resist, a second color resist and a third color resist disposed in the first color dot, the second color dot

and the third color dot on the substrate, wherein each of the first color resist, the second color resist and the third color resist comprises at least one opening, wherein the openings have a size or are in a shape for light passing the openings generating diffraction to increase transmittance.

2. The color filter as claimed in claim 1, wherein the openings are cross shaped.

3. The color filter as claimed in claim 1, wherein the openings are rectangular shaped.

4. The color filter as claimed in claim 1, wherein the first color is red, the second color is green and the third color is blue.

5. The color filter as claimed in claim 1, wherein transmittance of the color filter is increased 15%~30% due to the openings.

6. The color filter as claimed in claim 1, wherein the liquid crystal on silicon (LCOS) display device meets national television standard committee (NTSC) specifications.

7. A method for forming a color filter of a liquid crystal on silicon (LCOS) display device, comprising the step of:

providing a substrate, wherein the substrate is a silicon substrate;

forming a first color resist on the substrate;

patterning the first color resist to form a first color dot, wherein the first color resist comprises an opening in the first color dot;

forming a second color resist on the substrate and the first color resist; and

patterning the second color resist to form a second color dot, wherein the second color resist comprises an opening in the second color dot, wherein each of the openings has a size or is in a shape for light passing the openings generating diffraction to increase transmittance.

8. The method for forming a color filter of a liquid crystal on silicon (LCOS) display device as claimed in claim 7, further comprising:

forming a third color resist on the substrate and the first and the second color resists; and

patterning the third color resist to form a third color dot, wherein the third color resist comprises an opening in the third color dot.

9. The method for forming a color filter of a liquid crystal on silicon (LCOS) display device as claimed in claim 8, wherein the first color is red, the second color is green and the third color is blue.

10. The method for forming a color filter of a liquid crystal on silicon (LCOS) display device as claimed in claim 7, wherein patterning the first color resist comprises:

exposing the first color resist with light passing through a first mask; and

performing a development step to the first color resist.

11. The method for forming a color filter of a liquid crystal on silicon (LCOS) display device as claimed in claim 7, wherein patterning the second color resist comprises:

exposing the second color resist with light passing through a second mask; and

performing a development step to the second color resist.

12. The method for forming a color filter of a liquid crystal on silicon (LCOS) display device as claimed in claim 7, wherein each of the openings is cross shaped.

13. The method for forming a color filter of a liquid crystal on silicon (LCOS) display device as claimed in claim 7, wherein transmittance of the color filter is increased 15%~30% due to the openings.

14. The method for forming a color filter of a liquid crystal on silicon (LCOS) display device as claimed in claim 13,

wherein the liquid crystal on silicon (LCOS) display device meets national television standard committee (NTSC) specifications.

15. The method for forming a color filter of a liquid crystal on silicon (LCOS) display device as claimed in claim 7, wherein the openings are rectangular shaped.

* * * * *

专利名称(译)	硅显示器件上的液晶滤色器		
公开(公告)号	US8455160	公开(公告)日	2013-06-04
申请号	US12/963972	申请日	2010-12-09
[标]申请(专利权)人(译)	奇景光电股份有限公司		
申请(专利权)人(译)	HIMAX TECHNOLOGIES LIMITED		
当前申请(专利权)人(译)	HIMAX TECHNOLOGIES LIMITED		
[标]发明人	TU HO WANG YI HUA		
发明人	TU, HO WANG, YI-HUA		
IPC分类号	G02F1/1335		
CPC分类号	G02B5/201 G02F1/133514 G03F7/0007 G02B5/223		
审查员(译)	MCIPHERSON , JOHN A.		
其他公开文献	US20120148946A1		
外部链接	Espacenet USPTO		

摘要(译)

本发明公开了一种硅基液晶 (LCOS) 显示装置的滤色器, 包括: 基板, 包括多个像素区域, 其中每个像素区域包括第一色点, 第二色点和第三色点; 第一彩色抗蚀剂, 第二彩色抗蚀剂和第三彩色抗蚀剂, 设置在基板上的第一彩色点, 第二彩色点和第三彩色点中, 其中第一彩色抗蚀剂, 第二彩色抗蚀剂和第三彩色抗蚀剂中的每一个彩色抗蚀剂包括至少一个开口。

