




US 20080180592A1

(19) **United States**(12) **Patent Application Publication**
Yu et al.(10) **Pub. No.: US 2008/0180592 A1**(43) **Pub. Date: Jul. 31, 2008**(54) **LIQUID CRYSTAL DISPLAY PANEL AND
TESTING SYSTEM AND METHOD THEREOF****Publication Classification**(75) Inventors: **Shan-Jen Yu**, Hsin-Chu (TW);
Chung-Chi Huang, Hsin-Chu
(TW); **Jing-Ru Chen**, Hsin-Chu
(TW)(51) **Int. Cl.**
G02F 1/1333 (2006.01)
G01R 31/44 (2006.01)(52) **U.S. Cl.** **349/54; 324/770**(57) **ABSTRACT**Correspondence Address:
BACON & THOMAS, PLLC
625 SLATERS LANE, FOURTH FLOOR
ALEXANDRIA, VA 22314(73) Assignee: **AU OPTRONICS CORP.**,
Hsin-Chu (TW)(21) Appl. No.: **12/005,315**(22) Filed: **Dec. 27, 2007**(30) **Foreign Application Priority Data**

Jan. 30, 2007 (TW) 96103426

A testing system of a liquid crystal display panel including a substrate, a driving circuit, a first testing pad, and a second testing pad is provided. The substrate includes a pixel array whose one side has a pixel testing area. The driving circuit is formed on the substrate and connected to the other side of the pixel testing area for providing a signal to the pixel array. The first testing pad is connected to the driving circuit. The second testing pad is connected to the pixel testing area. The testing method of the liquid crystal display panel includes: respectively testing whether the liquid crystal display panel and the pixel testing area have a defect and accordingly generating a first testing pattern and a second testing pattern; combining the first testing pattern and the second testing pattern to determine whether the defect occurs at the driving circuit or the pixel array.

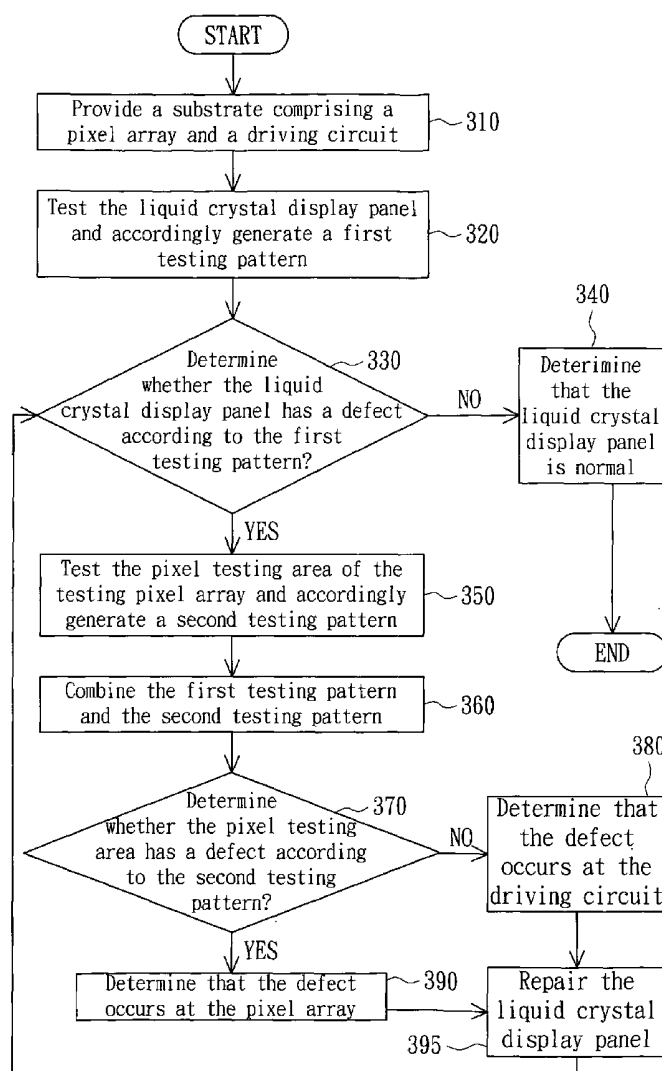

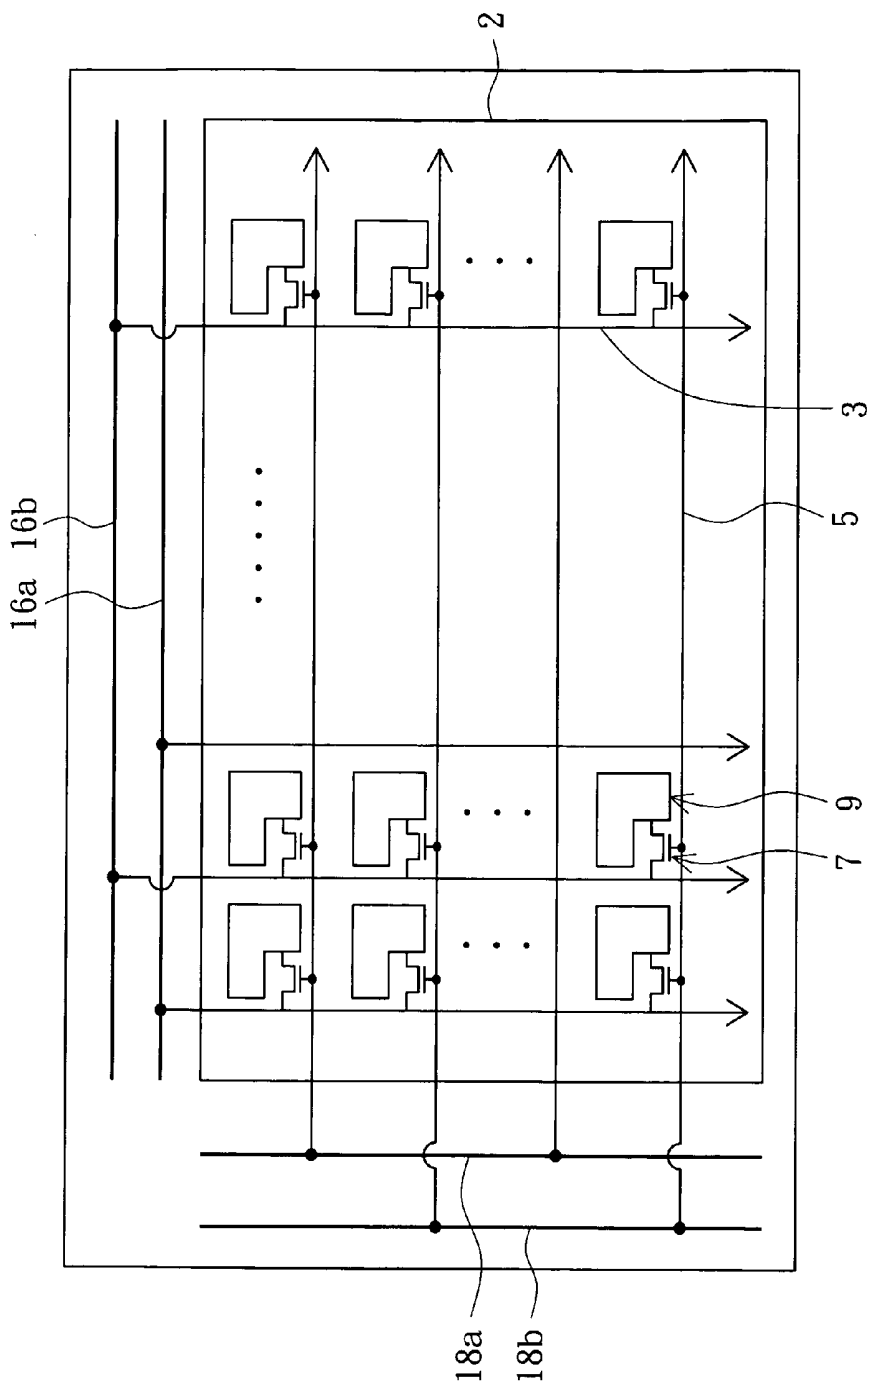


FIG. 1 (RELATED ART)

19

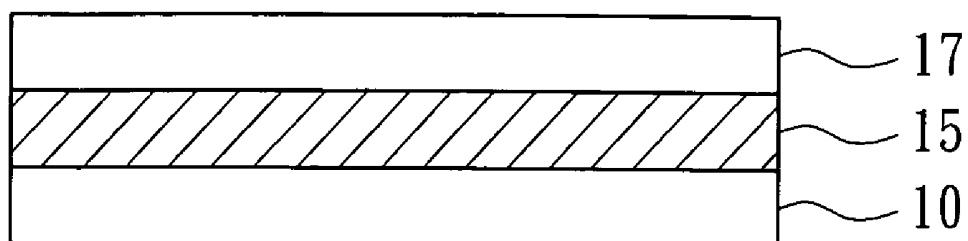
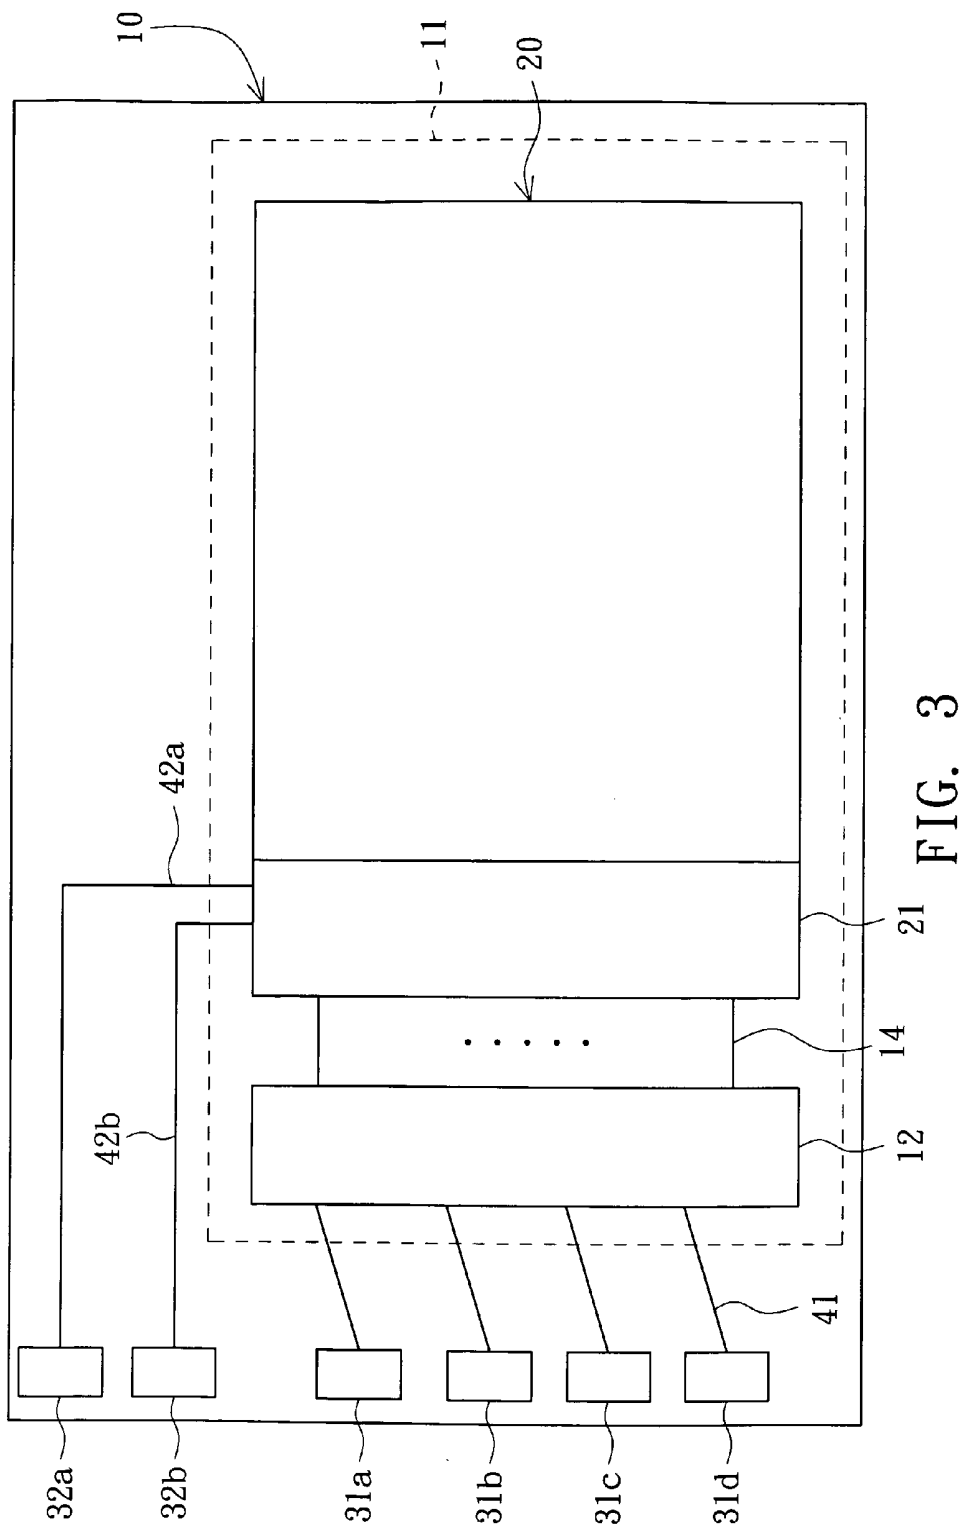


FIG. 2



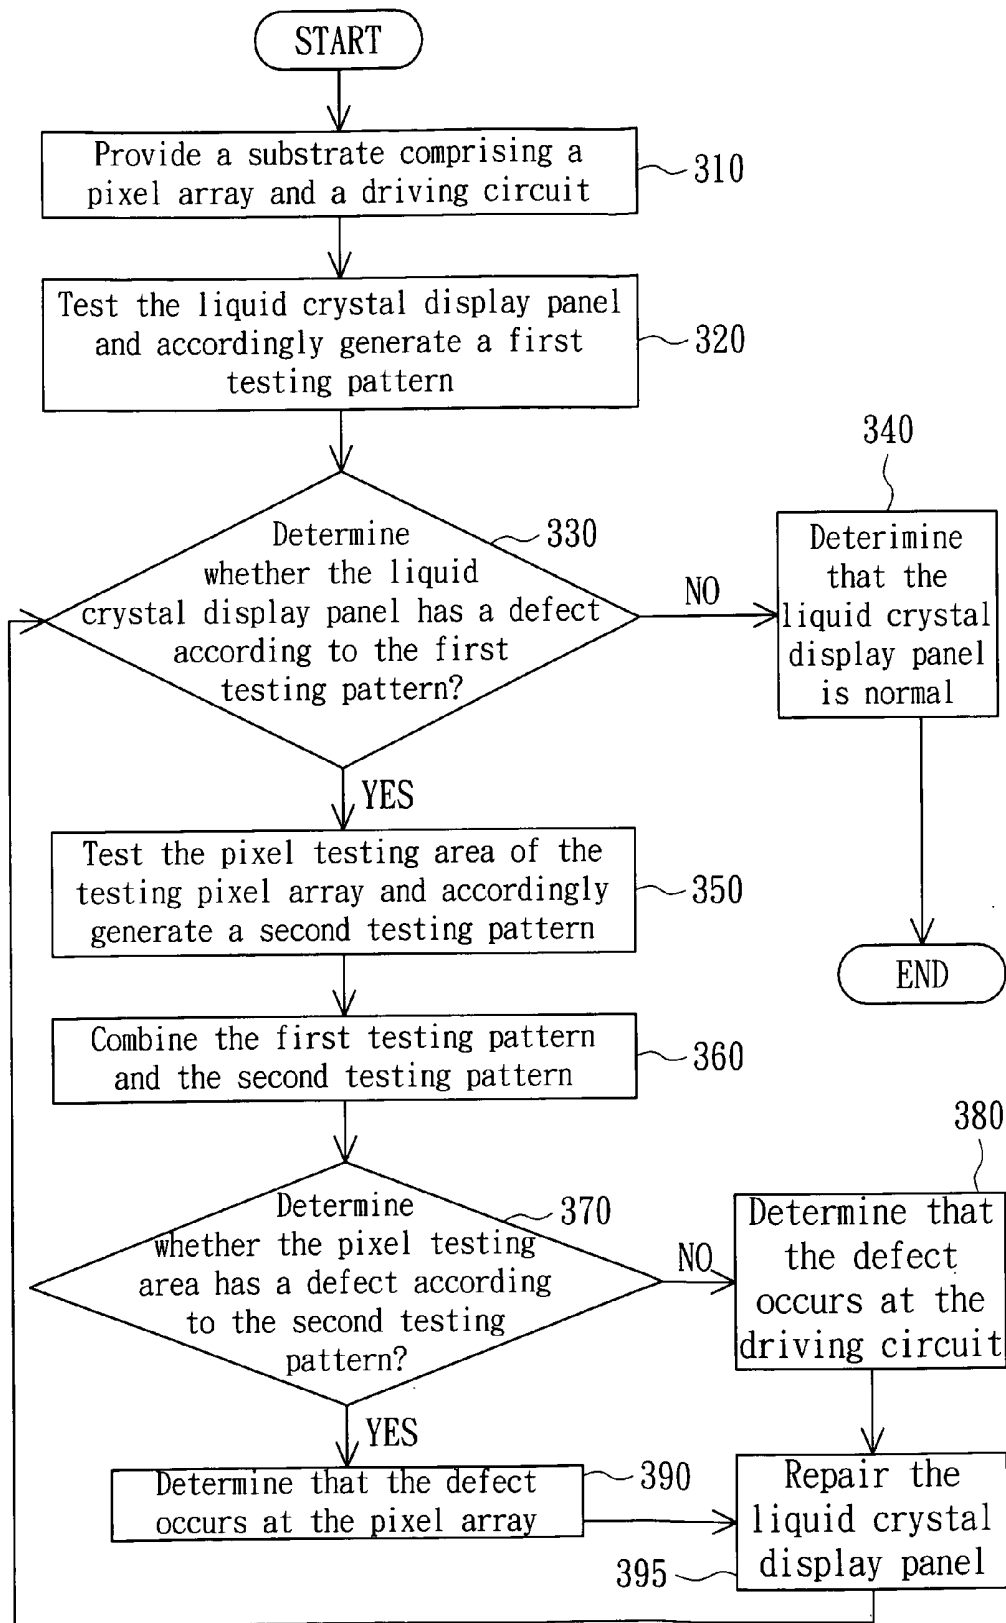


FIG. 4

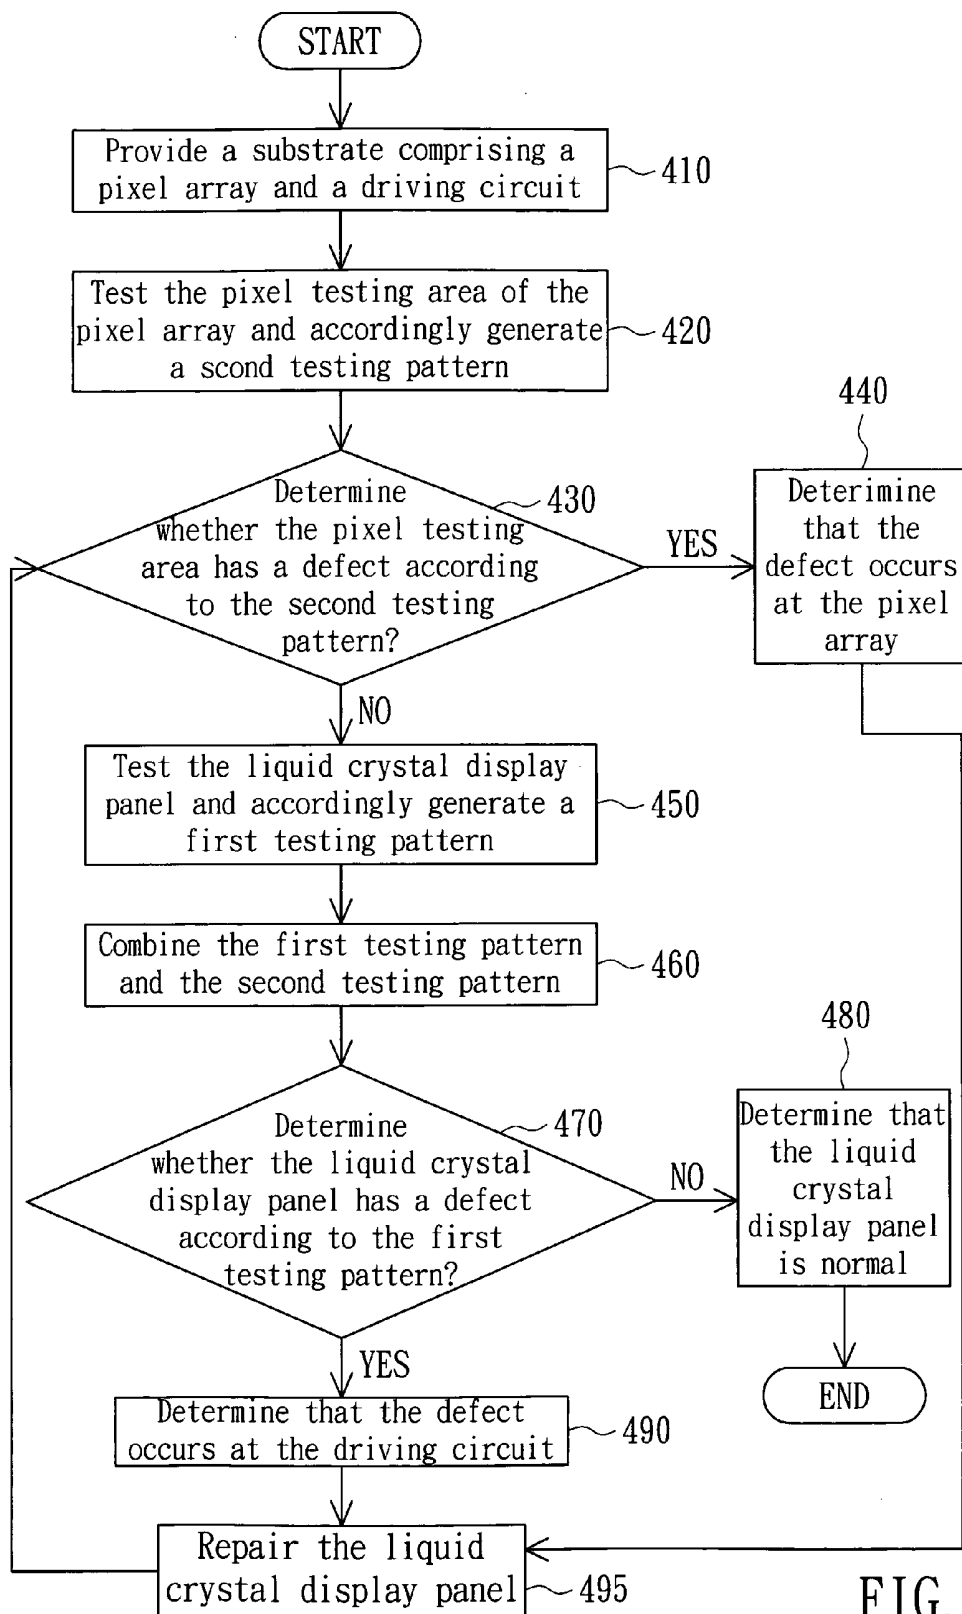


FIG. 5

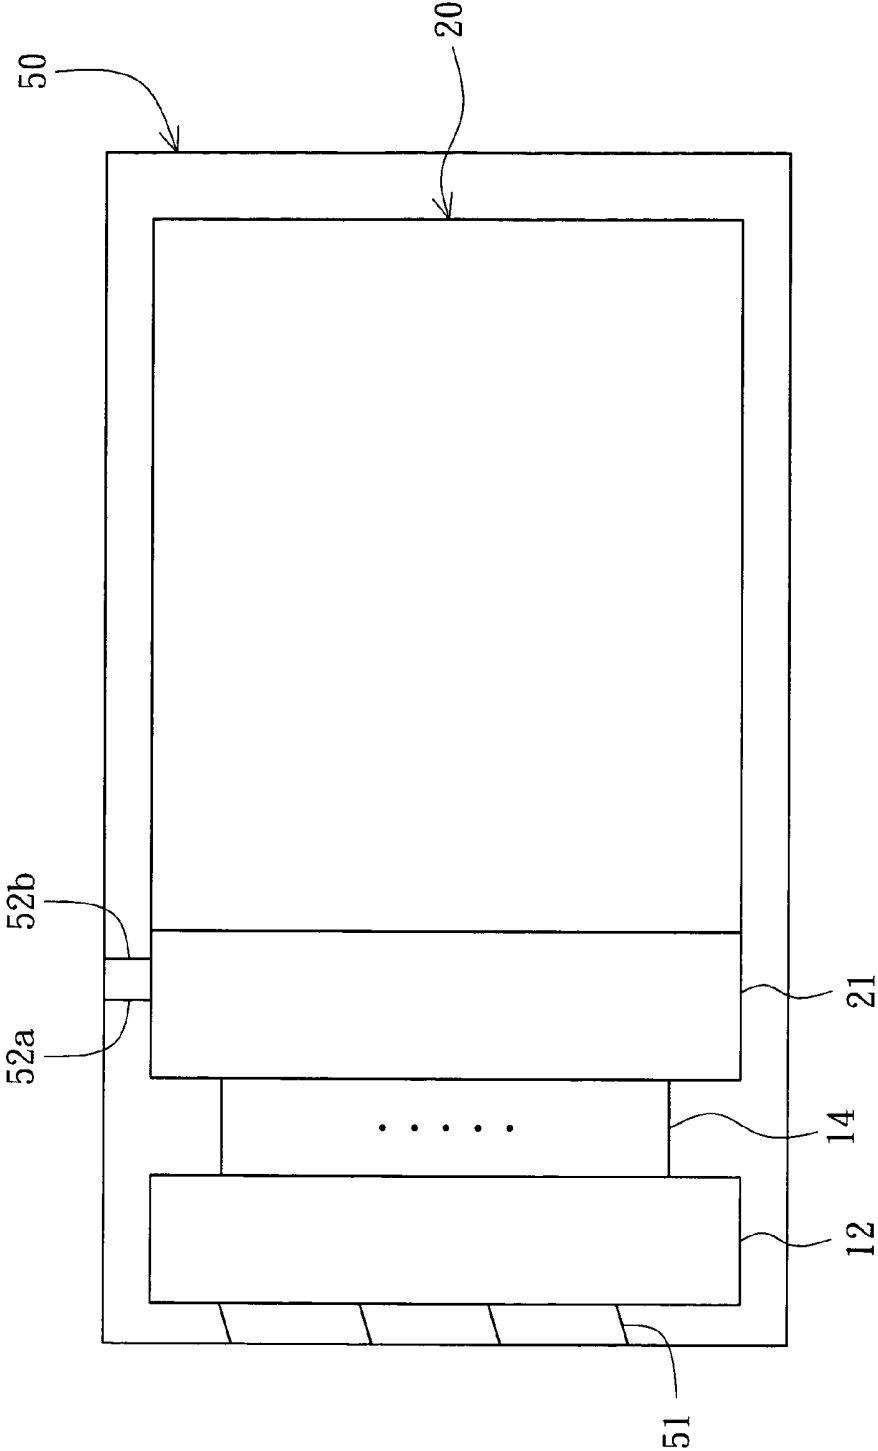


FIG. 6

LIQUID CRYSTAL DISPLAY PANEL AND TESTING SYSTEM AND METHOD THEREOF

[0001] This application claims the benefit of Taiwan application Serial No. 96103426, filed Jan. 30, 2007, the subject matter of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The invention relates in general to a testing system and method, and more particularly to a testing system of a liquid crystal display panel and method.

[0004] 2. Description of the Related Art

[0005] Liquid crystal displays are divided into two categories, namely passive matrix and active matrix, according to the driving method. However, as the demand for high-resolution and large-sized displays is ever increasing, active matrix liquid crystal display will become a main-stream product in the liquid crystal display market.

[0006] A liquid crystal display must pass the shorting bar test or the full contact test during the manufacturing process such that the functions of the liquid crystal display are assured. According to the full contact test, the function of each signal line is tested. However, due to the long testing time and the high testing cost involved, the full contact test is not suitable to large scale production.

[0007] Referring to FIG. 1, a perspective of a conventional thin film transistor-liquid crystal display (TFT-LCD) adopting shorting bar test is shown. As indicated in FIG. 1, the TFT-LCD liquid crystal display panel 1 includes a display area 2. A plurality of gate lines 5 and data lines 3 define a plurality of pixel areas on the display area 2, wherein each pixel area has a thin film transistor (TFT) 7 and a pixel electrode 9. Besides, four shorting bars 16a, 16b, 18a and 18b are disposed at the peripheral of the display area 2. The shorting bars 16a and 16b are electrically connected to the data line 3, and the shorting bars 18a and 18b are electrically connected to the gate line 5. During testing, the shorting bars 16a, 16b, 18a and 18b on the display 1 are externally connected to a testing pad (not illustrated), then the TFT-LCD is tested by a testing device via the testing pad.

[0008] Currently, most of the active matrix liquid crystal displays have a gate driver (not illustrated) and a source driver (not illustrated) on the panel for generating a gate pulse signal and a data signal respectively. As such testing method is expensive, other alternatives are thus provided. For example, the driving circuit is integrated with the substrate to form an integrated driving circuit. However, due to the difference in the design of driving circuit, the abovementioned shorting bar test and full contact test are not applicable to the testing of the integrated driving circuit.

SUMMARY OF THE INVENTION

[0009] The invention is directed to a liquid crystal display panel and a testing system and method thereof. The testing system and method are designed for the liquid crystal display panel adopting an integrated driving circuit.

[0010] According to a first aspect of the present invention, a testing system of a liquid crystal display panel is provided. The system includes a substrate, a driving circuit, a first testing pad, and a second testing pad. The substrate further includes a pixel array whose one side has a pixel testing area

connected thereto. The driving circuit is formed on the substrate and is connected to the other side of the pixel testing area opposite to the pixel array for providing a signal to the pixel array. The first testing pad is connected to the driving circuit. The second testing pad is connected to the pixel testing area.

[0011] According to a second aspect of the present invention, a testing method of the liquid crystal display panel is provided. The method includes the following steps. First, a substrate including a pixel array and a driving circuit is provided, wherein one side of the pixel array has a pixel testing area connected thereto, and the driving circuit is connected to the other side of the pixel testing area opposite to the pixel array for providing a signal to the pixel array. Next, the liquid crystal display panel is tested to determine whether the liquid crystal display panel has a defect and a first testing pattern is generated accordingly. Besides, the pixel testing area is tested to determine whether the pixel testing area has a defect and a second testing pattern is generated accordingly. Last, the first testing pattern and the second testing pattern are combined to determine whether defect occurs at the driving circuit or the pixel array.

[0012] According to a third aspect of the present invention, a liquid crystal display panel including a first substrate, a liquid crystal layer and a second substrate is provided. The second substrate contains the liquid crystal layer with the first substrate. The second substrate includes a pixel array, a driving circuit, a first shorting line section, and a second shorting line section. One side of the pixel array has the pixel testing area connected thereto. The driving circuit is connected to the other side of the pixel testing area opposite to the pixel array for providing a signal to the pixel array. The first shorting line is connected to the driving circuit. The second shorting line is connected to the pixel array.

[0013] The invention will become apparent from the following detailed description of the preferred but non-limiting embodiments. The following description is made with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] FIG. 1 (Prior Art) is a perspective of a conventional TFT-LCD display adopting shorting bar test;

[0015] FIG. 2 is a diagram of a liquid crystal display panel of a preferred embodiment of the invention;

[0016] FIG. 3 is a diagram of a testing system of a liquid crystal display panel according to a preferred embodiment of the invention;

[0017] FIG. 4 is a flowchart of a testing method using the testing system of the liquid crystal display panel of FIG. 3;

[0018] FIG. 5 is the other flowchart of a testing method using the testing system of the liquid crystal display panel of FIG. 3; and

[0019] FIG. 6 is a perspective of a liquid crystal display panel according to a preferred embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0020] Referring to FIG. 2, a diagram of a liquid crystal display panel of a preferred embodiment of the invention is shown. A liquid crystal display panel 19 includes a substrate 17, a substrate 10 and a liquid crystal layer 15, wherein the substrate 17 contains the liquid crystal layer 15 with the substrate 10. In the present embodiment of the invention, the

substrate 17 is exemplified by a color filter substrate, and the substrate 10 is exemplified by a thin film transistor substrate.

[0021] Referring to FIG. 3, a diagram of a testing system of a liquid crystal display panel according to a preferred embodiment of the invention is shown. The testing system of the liquid crystal display panel includes a substrate 10, a driving circuit 12, first testing pads 31a, 31b, 31c and 31d, and second testing pads 32a and 32b. The substrate 10 further includes a pixel array 20 whose one side has a pixel testing area 21 connected thereto. The driving circuit 12 is formed on the substrate 10 and is connected to the other side of the pixel testing area 21 opposite to the pixel array 20 for providing a signal to the pixel array 20 via a signal line 14. The first testing pads 31a, 31b, 31c and 31d are connected to the driving circuit 12. The second testing pads 32a and 32b are connected to the pixel testing area 21.

[0022] The driving circuit 12 can be a gate driver or a source driver. The pixel testing area 21 corresponds to at least one gate line or at least one data line for testing the pixel or the pixels corresponding to the pixel testing area 21. Preferably, in the present embodiment of the invention, the driving circuit 12 is a gate driver, and the second testing pads 32a and 32b are respectively a gate odd (GO) testing pad and a gate even (GE) testing pad, such that the pixel testing area 21 corresponds to at least one gate odd and at least one gate even 14. As indicated in FIG. 3, the first testing pads 31a, 31b, 31c and 31d and the second testing pads 32a and 32b are disposed outside the cutting line 11 on the substrate 10. The first testing pads 31a, 31b, 31c and 31d include a positive phase clock signal (CK) testing pad, a negative phase clock signal (XCK) testing pad, a start pulse (SP) testing pad, and a pull down (PD) testing pad. The gate driver of the present embodiment of the invention differs with the conventional gate driver additionally disposed on the panel in that the gate driver of the present embodiment of the invention is an integrated driving circuit. In practical application, a shift register whose circuiting function is equivalent to a gate driver is disposed on the substrate 10, and is called a gate driver on array (GOA) circuit.

[0023] As indicated in FIG. 3, the testing system of the liquid crystal display panel further include a first shorting line 41 and second shorting lines 42a and 42b. The first shorting line 41 is disposed on the substrate 10 for connecting the first testing pads 31a, 31b, 31c and 31d to the driving circuit 12. The second shorting lines 42a and 42b are disposed on the substrate 10 for connecting the second testing pads 32a and 32b to the pixel testing area 21.

[0024] Referring to FIG. 4, a flowchart of a testing method using the testing system of the liquid crystal display panel of FIG. 3 is shown. First, the method begins at step 310, a substrate 10 including a pixel array 20 and a driving circuit 12 is provided. One side of the pixel array 20 has a pixel testing area 21 connected thereto. The driving circuit 12 is disposed on the other side of the pixel testing area 21 opposite to the pixel array 20 for providing a signal to the pixel array 21. Next, the method proceeds to step 320, a first stage test is performed. In step 320, the liquid crystal display panel is tested to determine whether the liquid crystal display panel has a defect and a first testing pattern is generated accordingly. The testing of the liquid crystal display panel includes the sub-steps of providing four first testing pads 31a, 31b, 31c and 31d along with a first shorting line 41 for electrically connecting the first testing pads 31a, 31b, 31c and 31d with the driving circuit 12; and performing test via the first testing pads 31a, 31b, 31c and 31d and the first shorting line 41 by the

testing device to determine whether the liquid crystal display panel has a defect according to the first testing pattern. Then, the method proceeds to step 330, the liquid crystal display panel is tested via the first testing pad 31a, 31b, 31c and 31d to determine whether the liquid crystal display panel has a defect. If no defect is determined, the method proceeds to step 340, a determination that the driving circuit 12 and the pixel array 20 are normal is made, and the method is terminated. If the first testing pattern shows that the liquid crystal display panel has a defect, then the method proceeds to step 350, a second stage test in which the pixel testing area 21 is tested and a second testing pattern is generated accordingly. The testing of the pixel testing area 21 includes the sub-steps of providing the second testing pads 32a and 32b along with second shorting lines 42a and 42b for electrically connecting the second testing pads 32a and 32b with the pixel testing area 21 of the driving circuit 12; performing test via the second testing pads 32a and 32b and the second shorting lines 42a and 42b by the testing device to determine whether the pixel testing area has a defect. Next, the method proceeds to step 360, the first testing pattern and the second testing pattern are combined. In the first stage test, the liquid crystal display panel has been determined to have a defect according to the first testing pattern. Therefore, after the second stage test is completed, the testing device can combine the first testing pattern and the second testing pattern to determine whether the defect occurs at the driving circuit 12 or the pixel array 21. That is, in step 370, if the first testing pattern of the first stage test shows that the liquid crystal display panel has a defect but the second testing pattern shows that the pixel testing area 21 has no defect, then the method proceeds to step 380 and a determination that defect occurs at the driving circuit 12 is made. To the contrary, in step 370, if the first testing pattern of the first stage test shows that the liquid crystal display panel has a defect and the second testing pattern also shows that the pixel testing area 21 has defect, then the method proceeds to step 390, a determination that defect occurs at the pixel array 20 is made. Whether the defect is occurred at the driving circuit 12 in step 380 or at the pixel array 20 in step 390, the method proceeds to step 395 to have the liquid crystal display panel repaired. Then the method goes to step 330 to check if the liquid crystal display panel still has a defect and won't terminate until the liquid crystal display panel is confirmed to be normal. Besides, after the test of the liquid crystal display panel is completed, the first testing pads 31a, 31b, 31c and 31d and the second testing pads 32a and 32b together with a part of the first shorting line 41 and the second shorting lines 42a and 42b positioned outside the cutting line 11 of the substrate 10 are cut off along the cutting line 11.

[0025] Referring to FIG. 5, the other flowchart of a testing method using the testing system of the liquid crystal display panel of FIG. 3 is shown. The main differences between the testing method of FIG. 5 and the testing method of FIG. 4 are as follows. In the testing method of FIG. 4, the step of testing the pixel testing area comes after the step of testing the liquid crystal display panel; in the testing method of FIG. 5, the step 420 of testing whether the pixel testing area has a defect comes before the step 450 of testing whether the liquid crystal display panel has a defect. That is, what is tested in the first stage test according to one testing method is tested in the second stage test according to the other testing method, and what is tested in the second stage test according to one testing method is tested in the first stage test according to the other testing method.

[0026] As indicated in FIG. 5, first, the method begins at step 410, a substrate 10 including a pixel array 20 and a driving circuit 12 is provided. One side of the pixel array 20 has a pixel testing area 21 connected thereto. The driving circuit 12 is connected to the other side of the pixel testing area 21 opposite to the pixel array 20 for providing a signal to the pixel array 21. Next, the method proceeds to step 420, a first stage test is performed. In step 420, the pixel testing area is tested to determine whether the pixel testing area has a defect and a second testing pattern is generated accordingly. The testing of the pixel testing area 21 includes the following sub-steps of providing two second testing pads 32a and 32b along with two second shorting lines 42a and 42b for electrically connecting the second testing pads 32a and 32b with the driving circuit 12; and performing test via the second testing pads 32a and 32b and the second shorting lines 42a and 42b by the testing device to determine whether the pixel testing area has a defect. Then, the method proceeds to step 430, the pixel testing area is tested via the second testing pads 32a and 32b to determine whether the pixel testing area has a defect. If a defect is determined, the method proceeds to step 440, a determination that the defect occurs at the pixel array 20 is made. If the second testing pattern shows that the liquid crystal display panel has no defect, then the method proceeds to step 450. In step 450, a second stage test is performed, and the liquid crystal display panel is tested to determine whether the liquid crystal display panel has a defect and a first testing pattern is generated. The testing of the liquid crystal display panel includes the sub-steps of providing the first testing pads 31a, 31b, 31c and 31d along with a first shorting line 41 for electrically connecting the first testing pad 31a, 31b, 31c and 31d with the driving circuit 12; performing test via the first testing pad 31a, 31b, 31c and 31d and the first shorting line 41 by the testing device to determine whether the liquid crystal display panel has a defect according to the first testing pattern. Next, the method proceeds to step 460, the first testing pattern and the second testing pattern are combined. In the first stage test, the pixel testing area has been tested and determined to have no defect according to the second testing pattern. Therefore, after the second stage test is completed, the testing device can combine the second testing pattern and the first testing pattern and a determination that defect occurs at the driving circuit 12 or the pixel array 21 is made. That is, if the second testing pattern of the first stage test shows that the pixel testing area 21 has no defect, and the first testing pattern also shows that the liquid crystal display panel has no defect in step 470, then the method proceeds to step 480, a determination that both the pixel array 20 and the driving circuit 12 are normal is made and the method is terminated. To the contrary, if the second testing pattern of the first stage test shows that the pixel testing area 21 has no defect, but the first testing pattern of step 470 shows that the liquid crystal display panel has a defect, then the method proceeds to step 490 and a determination that the defect occurs at the driving circuit 12 is made. Likewise, Whether the defect is occurred at the driving circuit 12 in step 490 or at the pixel array 20 in step 440, the method proceeds to step 495 to have the liquid crystal display panel repaired. Then the method goes to step 430 to check if the liquid crystal display panel still has a defect and won't terminate until the liquid crystal display panel is confirmed to be normal. Likewise, after the test of the liquid crystal display panel is completed, the first testing pads 31a, 31b, 31c and 31d and the second testing pad 32a and 32b together with part of the first shorting

line 41 and the second shorting line 42a and 42b positioned outside the cutting line 11 of the substrate 10 are cut off along the cutting line 11.

[0027] Moreover, according to the testing method of the preferred embodiments of the invention, the step of testing the pixel testing area and the step of testing the liquid crystal display panel may be performed at the same time and two testing patterns may be combined to determine whether defect occurs at the driving circuit 12 or the pixel array 20, and are not repeated here.

[0028] Referring to FIG. 6, a perspective of a liquid crystal display panel according to a preferred embodiment of the invention is shown. The liquid crystal display panel 500 includes a pixel array 20, a driving circuit 12, a first shorting line section 51, and two second shorting line sections 52a and 52b. One side of the pixel array 20 has a pixel testing area 21 connected thereto. The driving circuit 12 is connected to the other side of the pixel testing area 21 for providing a signal to the pixel array 20. The first shorting line section 51 is connected to the driving circuit 12. The second shorting line sections 52a and 52b are connected to the pixel array 20. FIG. 6 illustrated a tested liquid crystal display panel 500 having a subscribed substrate 50. Therefore, the first shorting line section 51, and the second shorting line sections 52a and 52b are a part of the first shorting line 41 and the second shorting lines 42a and 42b of the testing system of FIG. 3 correspondingly disposed within the cutting line 11 of the substrate 10.

[0029] The liquid crystal display panel and testing system and method thereof disclosed in the above embodiments of the invention are particularly applicable to the testing of the liquid crystal display panel having an integrated driving circuit. During the manufacturing process in the above embodiments of the invention, two stage of tests are applied to the liquid crystal display panel and the pixel testing area, and whether the defect occurs at the driving circuit or the pixel array is determined according to the results of the two stage tests, such that the defect is repaired accordingly. Thus, the manufacturing costs of the liquid crystal display are largely reduced.

[0030] While the invention has been described by way of example and in terms of a preferred embodiment, it is to be understood that the invention is not limited thereto. On the contrary, it is intended to cover various modifications and similar arrangements and procedures, and the scope of the appended claims therefore should be accorded to the broadest interpretation so as to encompass all such modifications and similar arrangements and procedures.

What is claimed is:

1. A testing system of a liquid crystal display panel, comprising:

- a substrate comprising a pixel array whose one side has a pixel testing area connected thereto;
- a driving circuit formed on the substrate and connected to the other side of the pixel testing area opposite to the pixel array for providing a signal to the pixel array;
- a first testing pad connected to the driving circuit; and
- a second testing pad connected to the pixel testing area.

2. The testing system according to claim 1, wherein if the pixel testing area is tested and determined to have a defect via the second testing pad, then a determination that the defect occurs at the pixel array is made.

3. The testing system according to claim 1, wherein if the liquid crystal display panel is tested and determined to have a defect via the first testing pad but the pixel testing area is

tested and determined to have no defect via the second testing pad, then a determination that the defect occurs at the driving circuit is made.

4. The testing system according to claim 1, wherein if the liquid crystal display panel is tested and determined to have no defect via the first testing pad, then a determination that both the driving circuit and the pixel array are normal is made.

5. The testing system according to claim 1, wherein the system further comprising:

a first shorting line disposed on the substrate for electrically connecting the first testing pad with the driving circuit; and

a second shorting line disposed on the substrate for electrically connecting the second testing pad with the pixel testing area.

6. The testing system according to claim 1, wherein the driving circuit is a gate driver, and the pixel testing area corresponds to at least one gate line.

7. The testing system according to claim 6, wherein the second testing pad is a gate line testing pad.

8. The testing system according to claim 1, wherein the first testing pad comprises a positive phase clock signal (CK) testing pad, a negative phase clock signal (XCK) testing pad, a start pulse (SP) testing pad, and a pull down (PD) testing pad.

9. The testing system according to claim 1, wherein the second testing pad comprises a gate odd (GO) testing pad and a gate even (GE) testing pad.

10. The testing system according to claim 9, wherein the driving circuit is a gate driver, and the pixel testing area corresponds to at least one gate odd and at least one gate even.

11. The testing system according to claim 10, wherein the gate odd testing pad is electrically connected to the at least one gate odd, and the gate even testing pad is electrically connected to the at least one gate even.

12. A testing method of the liquid crystal display panel, comprising:

providing a substrate comprising a pixel array and a driving circuit, wherein one side of the pixel array has a pixel testing area connected thereto, the driving circuit is connected to the other side of the pixel testing area opposite to the pixel array for providing a signal to the pixel array; testing to determine whether the liquid crystal display panel has a defect and accordingly generating a first testing pattern;

testing to determine whether the pixel testing area has a defect and accordingly generating a second testing pattern; and

combining the first testing pattern and the second testing pattern and accordingly determining whether the defect occurs at the driving circuit or the pixel array.

13. The testing method according to claim 12, wherein if the first testing pattern shows that the liquid crystal display panel has a defect and the second testing pattern also shows that the pixel testing area has a defect, then a determination that the defect occurs at the pixel array is made.

14. The testing method according to claim 12, wherein in the combining step, if the first testing pattern shows that the liquid crystal display panel has a defect but the second testing pattern shows that the pixel testing area has no defect, then a determination that the defect occurs at the driving circuit is made.

15. The testing method according to claim 12, wherein in the combining step, if the liquid crystal display panel is tested

and determined to have no defect via the first testing pad, then a determination that both the driving circuit and the pixel array are normal is made.

16. The testing method according to claim 12, wherein the step of testing whether the pixel testing area has a defect comes after the step of testing whether the liquid crystal display panel has a defect.

17. The testing method according to claim 12, wherein the step of testing whether the pixel testing area has a defect comes before the step of testing whether the liquid crystal display panel has a defect.

18. The testing method according to claim 12, wherein the step of testing whether the liquid crystal display panel has a defect comprises:

providing a first testing pad;

providing a first shorting line connected the first testing pad and the driving circuit; and

determining whether the liquid crystal display panel has a defect via the first testing pad and the first shorting line.

19. The testing method according to claim 12, wherein the step of testing whether the pixel testing area has a defect comprises:

providing a second testing pad;

providing a second shorting line connecting the second testing pad and the pixel testing area; and

determining whether the pixel testing area has a defect via the second testing pad and the second shorting line.

20. A liquid crystal display panel, comprising:

a first substrate;

a liquid crystal layer; and

a second substrate containing the liquid crystal layer with the first substrate, comprising:

a pixel array whose one side has a pixel testing area connected thereto;

a driving circuit connected to the other side of the pixel testing area opposite to the pixel array for providing a signal to the pixel array;

a first shorting line section connected to the driving circuit; and

a second shorting line section connected to the pixel array.

21. The liquid crystal display panel according to claim 20, wherein the first shorting line section and the second shorting line section are a part of a first shorting line and a second shorting line respectively, the first shorting line and the second shorting line are used for connecting the driving circuit to a first testing pad and a second testing pad respectively, the liquid crystal display panel is tested via the first shorting line, the second shorting line, the first testing pad, and the second testing pad.

22. The liquid crystal display panel according to claim 21, wherein if the pixel testing area is tested and determined to have a defect via the second testing pad and the second shorting line, then a determination that the defect occurs at the pixel array is made.

23. The liquid crystal display panel according to claim 21, wherein if the liquid crystal display panel is tested and determined to have a defect via the first testing pad and the first shorting line but the pixel testing area is tested and determined to have no defect via the two testing pads and the second shorting line, then a determination that the defect occurs at the driving circuit is made.

24. The liquid crystal display panel according to claim 21, wherein if the liquid crystal display panel is tested and deter-

mined to have no defect via the first testing pad and the first shorting line, then a determination that both the driving circuit and the pixel array are normal is made.

25. The liquid crystal display panel according to claim **20**, wherein the driving circuit is a gate driver, and the pixel testing area corresponds to at least one gate line.

26. The liquid crystal display panel according to claim **25**, wherein the testing pad is a gate line testing pad.

27. The liquid crystal display panel according to claim **20**, wherein the driving circuit is a gate driver, and the pixel testing area corresponds to at least one gate odd (GO) and at least one gate even (GE).

28. The liquid crystal display panel according to claim **27**, wherein the testing pad comprises a gate odd testing pad and a gate even testing pad.

* * * * *

专利名称(译)	液晶显示面板及其测试系统和方法		
公开(公告)号	US20080180592A1	公开(公告)日	2008-07-31
申请号	US12/005315	申请日	2007-12-27
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电.		
当前申请(专利权)人(译)	友达光电.		
[标]发明人	YU SHAN JEN HUANG CHUNG CHI CHEN JING RU		
发明人	YU, SHAN-JEN HUANG, CHUNG-CHI CHEN, JING-RU		
IPC分类号	G02F1/1333 G01R31/44		
CPC分类号	G09G3/006 G09G2300/0408 G09G3/3677 G09G3/3648 Y10S345/904		
优先权	096103426 2007-01-30 TW		
其他公开文献	US8009131		
外部链接	Espacenet USPTO		

摘要(译)

提供一种液晶显示面板的测试系统，包括基板，驱动电路，第一测试垫和第二测试垫。基板包括像素阵列，其一侧具有像素测试区域。驱动电路形成在基板上并连接到像素测试区域的另一侧，用于向像素阵列提供信号。第一测试垫连接到驱动电路。第二测试垫连接到像素测试区域。液晶显示面板的测试方法包括：分别测试液晶显示面板和像素测试区域是否有缺陷，从而产生第一测试图案和第二测试图案；组合第一测试图案和第二测试图案以确定缺陷是否发生在驱动电路或像素阵列处。

