



US008400588B2

(12) **United States Patent**
Yang et al.

(10) **Patent No.:** **US 8,400,588 B2**
(45) **Date of Patent:** **Mar. 19, 2013**

(54) **LIQUID CRYSTAL DISPLAY**

(75) Inventors: **Byung-Duk Yang**, Yongin-si (KR);
Eun-Guk Lee, Seoul (KR); **Sang-Ki Kwak**, Asan-si (KR); **Dong-Yoon Kim**,
Seoul (KR); **Yun-Jong Yeo**, Seoul (KR)

(73) Assignee: **Samsung Display Co., Ltd.**, Yongin
(KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 288 days.

(21) Appl. No.: **12/900,433**

(22) Filed: **Oct. 7, 2010**

(65) **Prior Publication Data**

US 2011/0216276 A1 Sep. 8, 2011

(30) **Foreign Application Priority Data**

Mar. 5, 2010 (KR) 10-2010-0019885

(51) **Int. Cl.**
G02F 1/1335 (2006.01)

(52) **U.S. Cl.** 349/106

(58) **Field of Classification Search** 349/106
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,623,353 A * 4/1997 Kanemoto et al. 349/122
6,671,025 B1 * 12/2003 Ikeda et al. 349/156
2009/0167973 A1 * 7/2009 Chang et al. 349/43

FOREIGN PATENT DOCUMENTS

JP 2007-286384 11/2007
JP 2008-026812 2/2008
KR 10-2004-0061230 7/2004

* cited by examiner

Primary Examiner — James Dudek

(74) *Attorney, Agent, or Firm* — H.C. Park & Associates,
PLC

(57) **ABSTRACT**

A liquid crystal display according to an exemplary embodiment of the present invention includes: a first substrate; a first signal line disposed on the first substrate, a thin film transistor connected with the first signal line, a first color filter and a second color filter disposed on the first substrate; a colored member disposed on the first color filter and the second color filter; and a pixel electrode disposed on the first color filter and the second color filter and the colored member, wherein the first color filter and the second color filter are partially overlapped with each other and the height of the colored member disposed at the overlap between the first color filter and the second color filter is greater than the height of the colored member disposed not at the overlap.

27 Claims, 9 Drawing Sheets

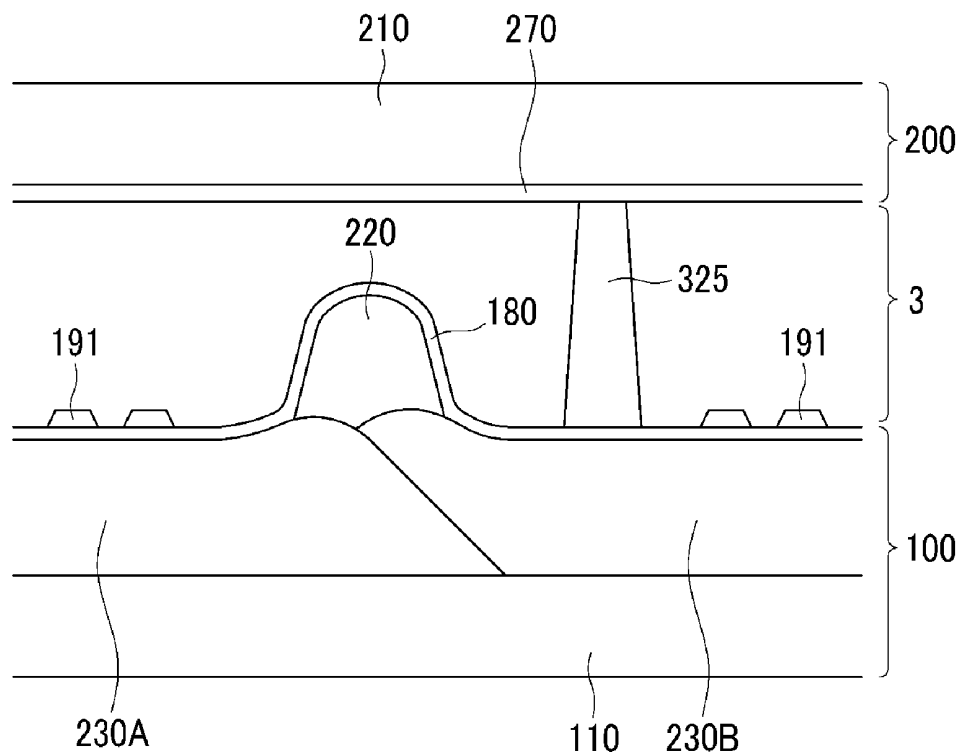


FIG. 1

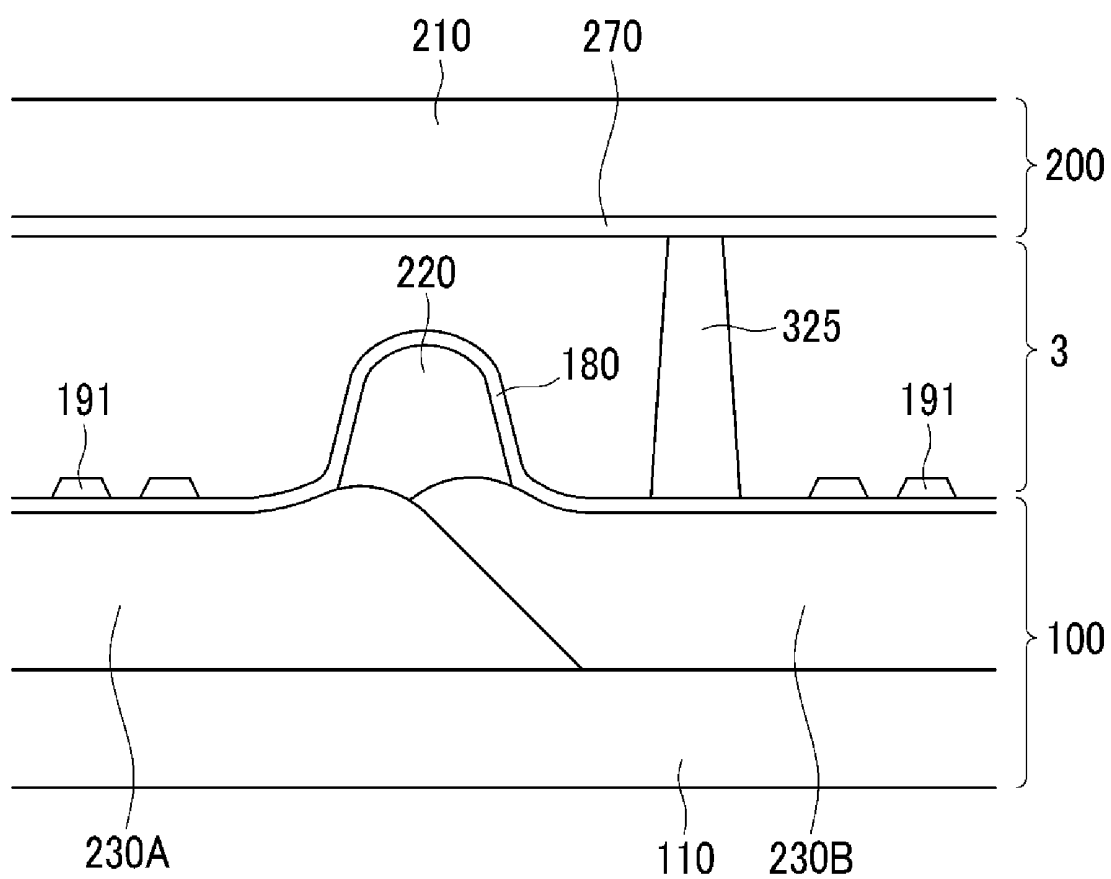


FIG. 2

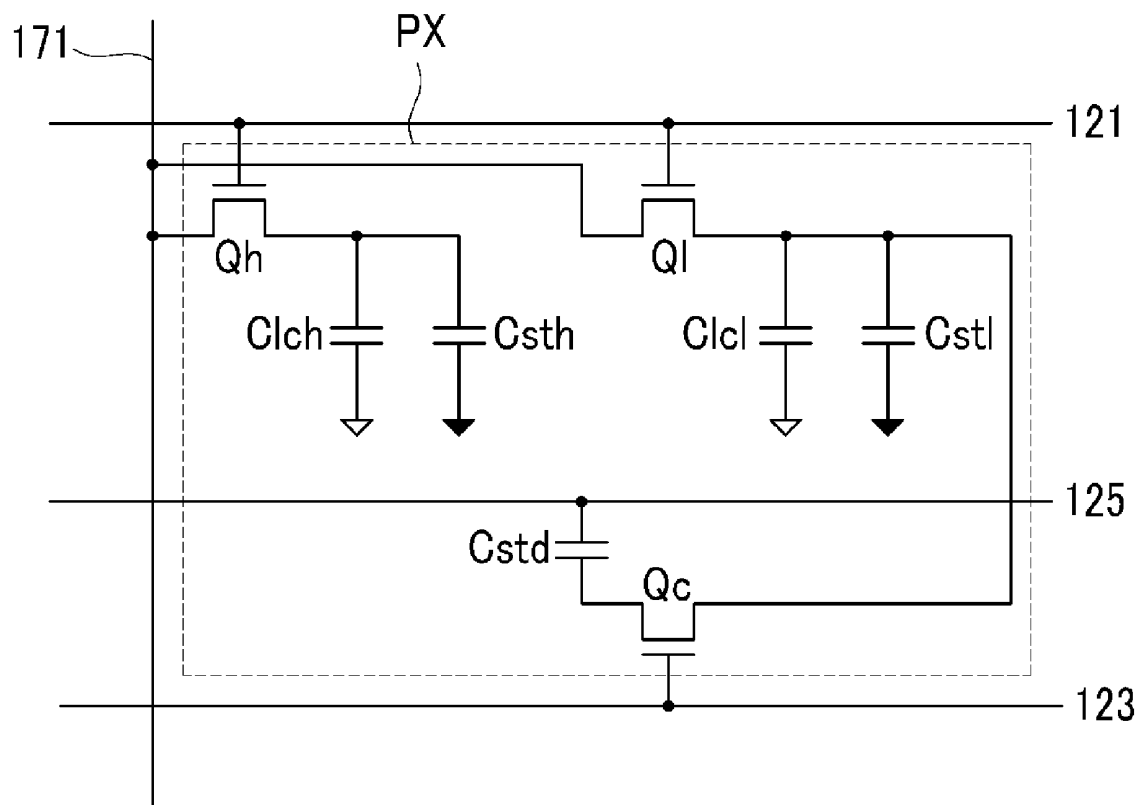


FIG. 3

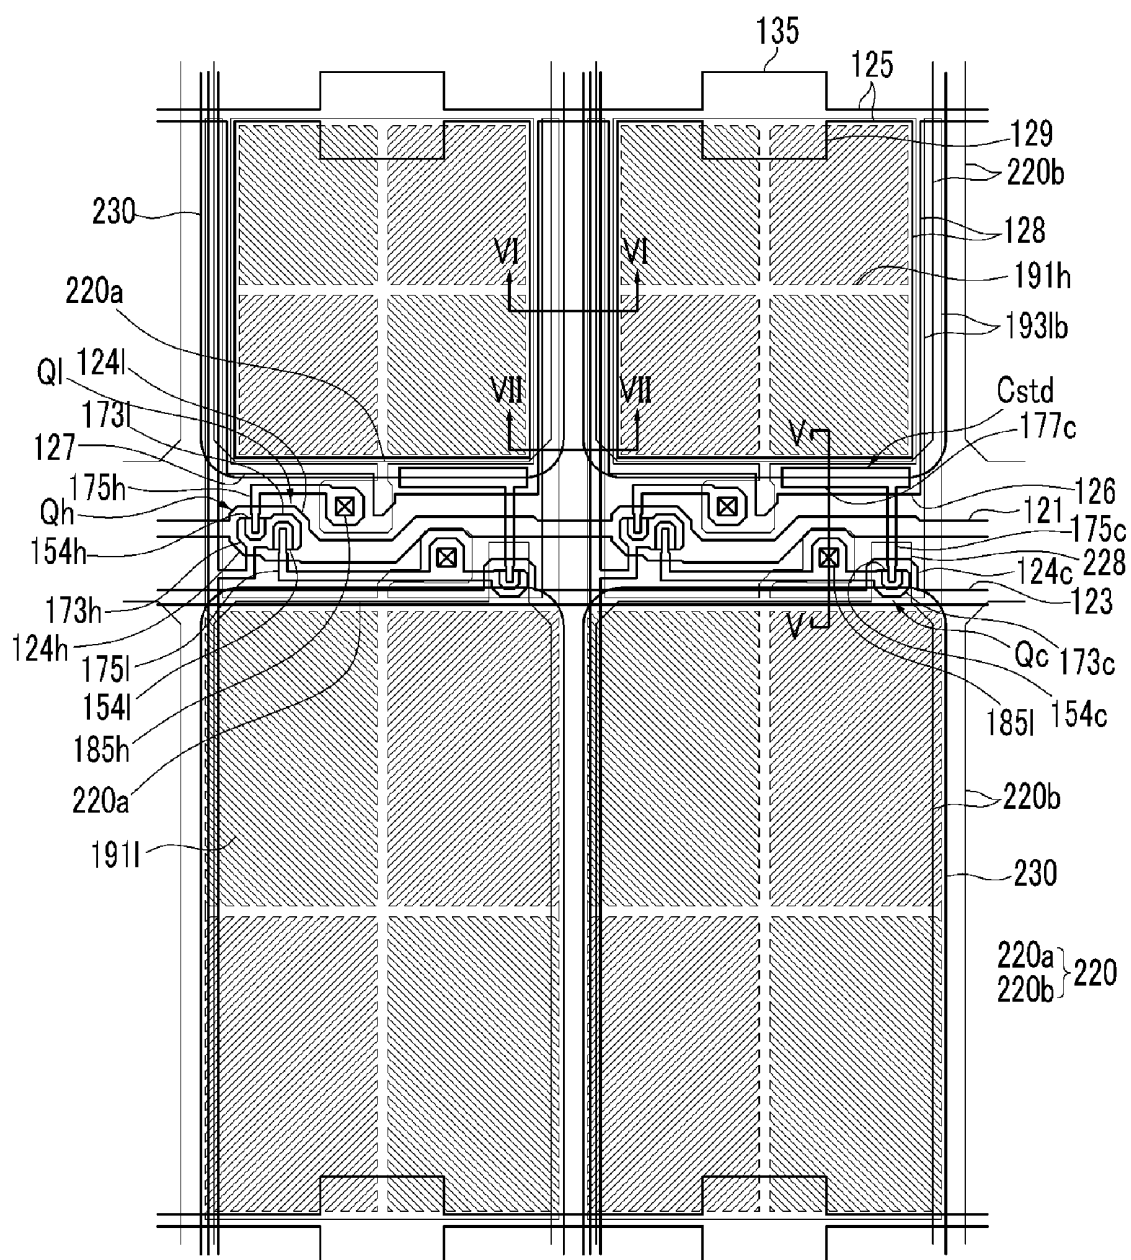


FIG. 4

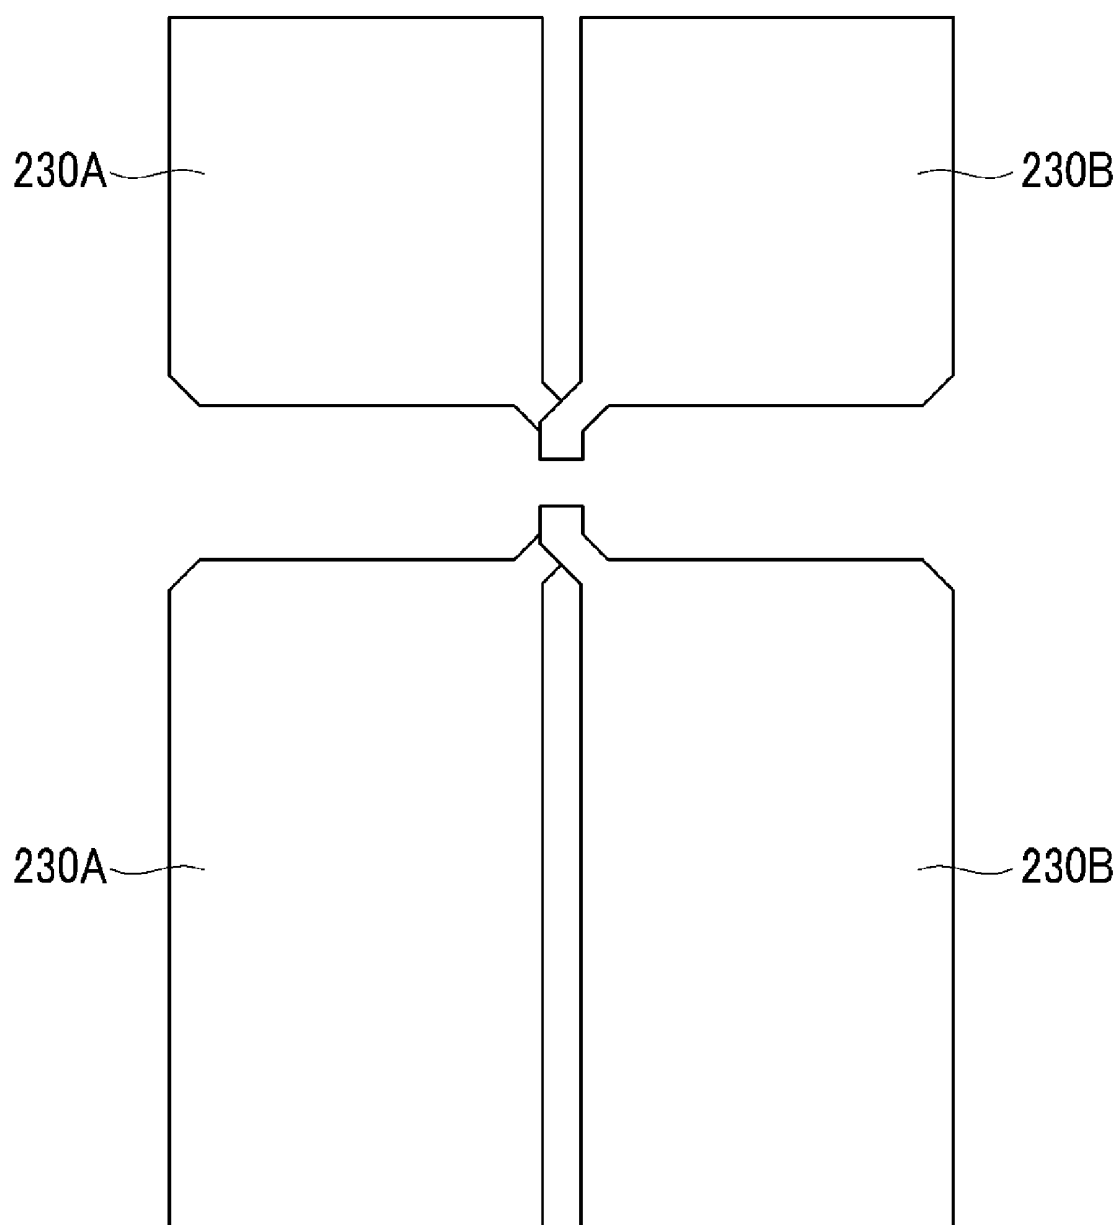


FIG. 6

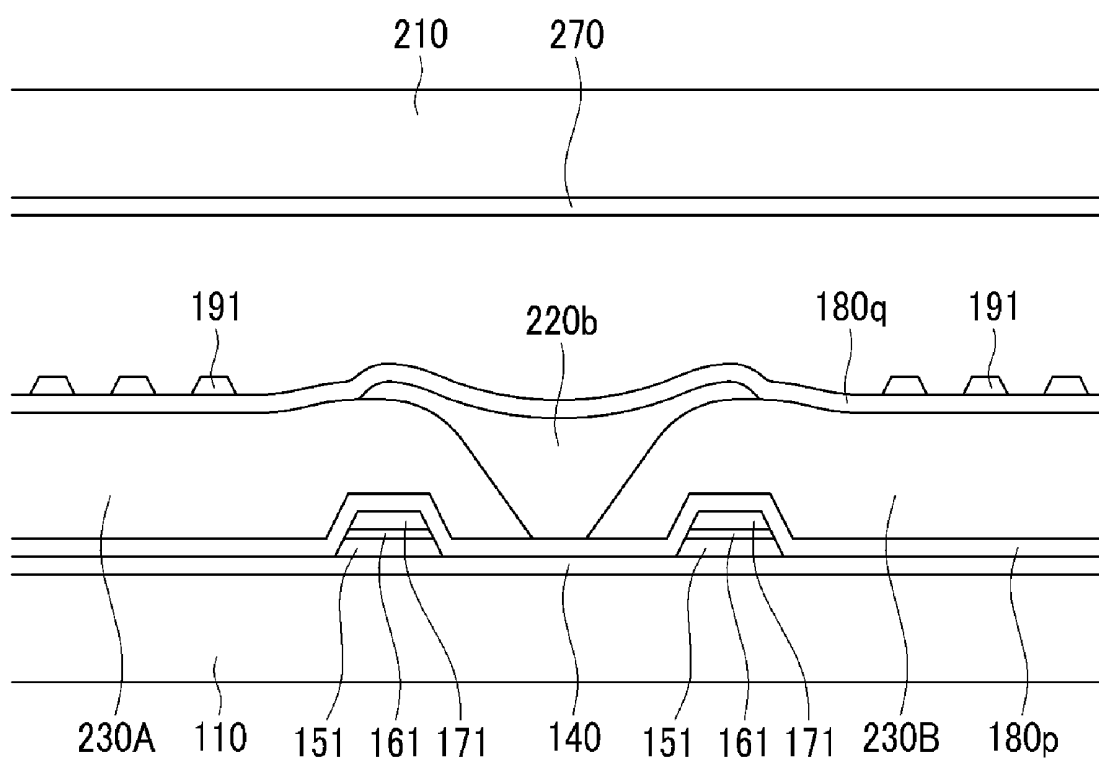


FIG. 7

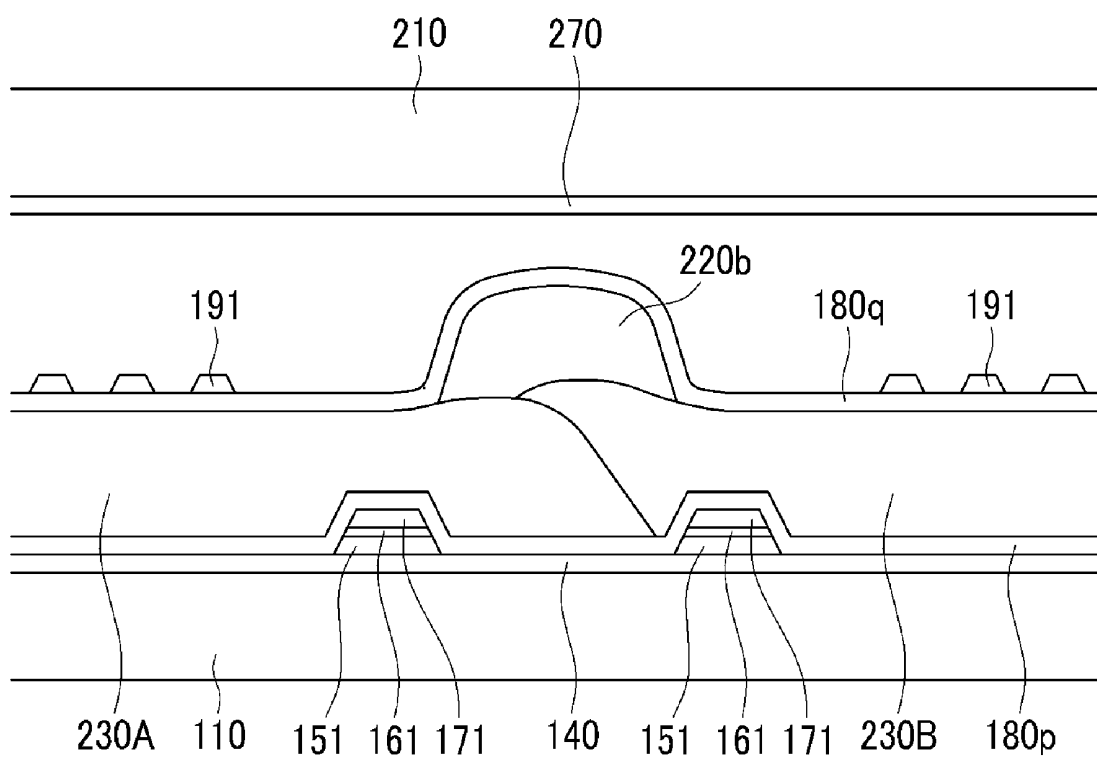


FIG. 8



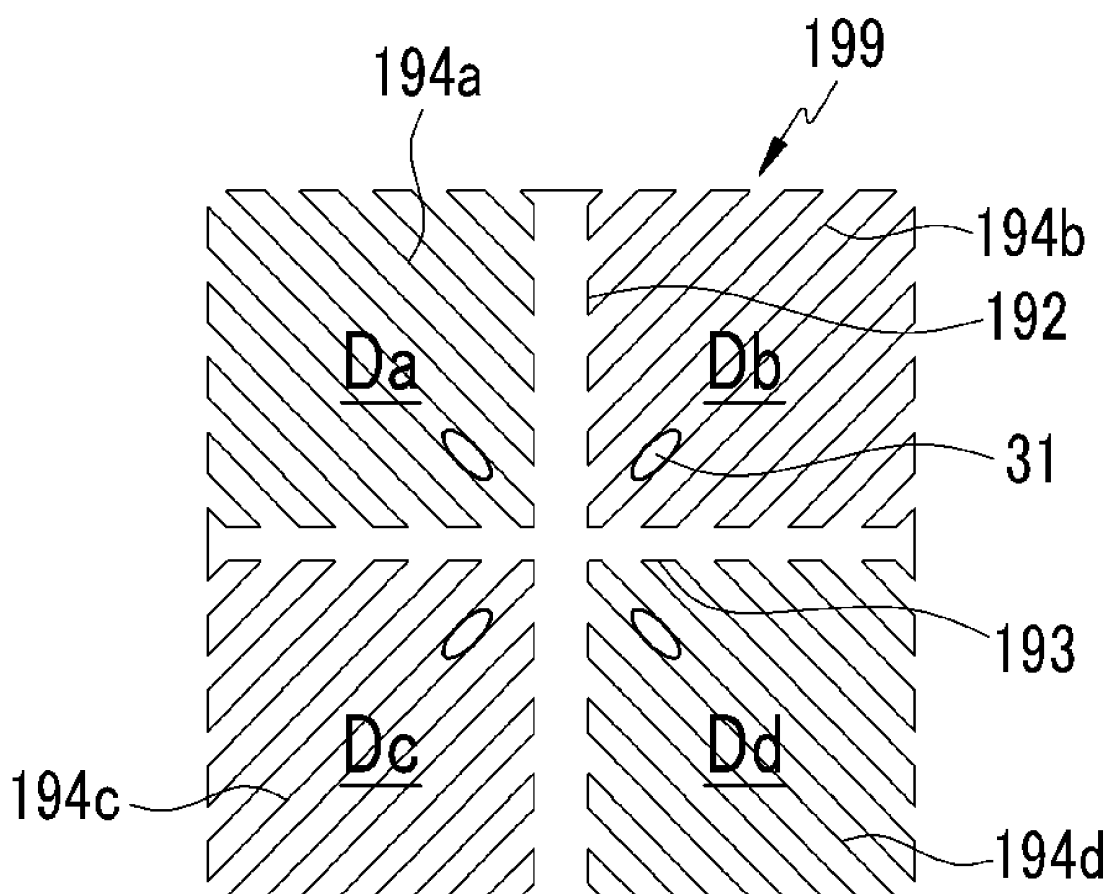


FIG. 9

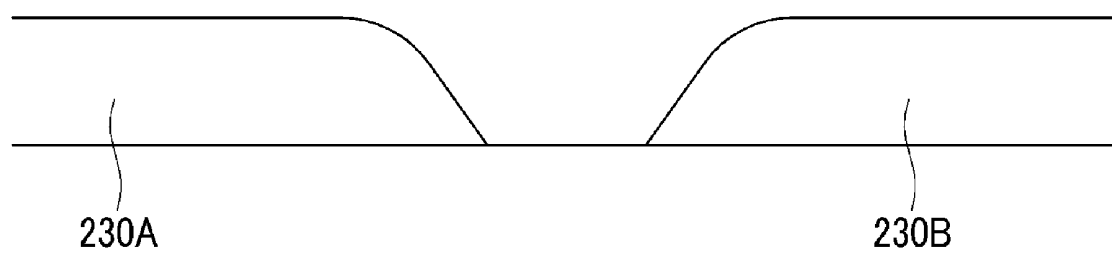

(a)

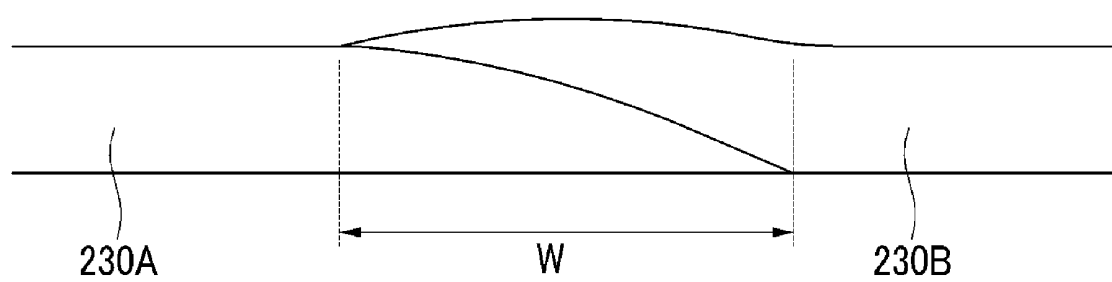

(b)

LIQUID CRYSTAL DISPLAY**CROSS REFERENCE TO RELATED APPLICATION**

This application claims priority from and the benefit of Korean Patent Application No. 10-2010-0019885, filed on Mar. 5, 2010, which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND OF THE INVENTION**1. Field of the Invention**

Exemplary embodiments of the present invention relate to a liquid crystal display.

2. Discussion of the Background

A liquid crystal display that includes two display panels with electrodes and a liquid crystal layer interposed therebetween is a type of flat panel display being widely used at present. The liquid crystal display rearranges liquid crystal molecules of the liquid crystal layer by applying voltage to the electrodes to control the intensity of transmitted light.

Among the types of liquid crystal displays, a liquid crystal display primarily used at present has a structure in which an electric field generation electrode is provided in each of the two display panels. Among these, a structure in which a plurality of thin film transistors and pixel electrodes are arranged in matrix on one display panel (hereinafter, referred to as 'thin film transistor display panel') and color filters of red, green, and blue are formed on the other display panel and a common electrode covers a full surface thereof (hereinafter, referred to as 'common electrode display panel') is the mainstream.

However, in the liquid crystal display, since the pixel electrode and the color filter are formed on different display panels, accurate alignment is difficult between the pixel electrode and the color filter, such that an alignment error may be generated.

In order to solve the problem, a color filter on array (CoA) structure in which the color filter and the pixel electrode are formed on the same display panel is proposed. At this time, a shield member is generally formed on the same display panel as the pixel electrode in addition to the color filter.

Meanwhile, a spacer may be formed in order to maintain a constant thickness of the liquid crystal layer of the liquid crystal display. The spacer may include a main spacer controlling the thickness of a liquid crystal cell of the liquid crystal display and a plurality of sub-spacers formed lower than the main spacer in order to prevent a smear defect, etc. The main spacer and the sub-spacer form various height differences to maintain a cell gap even under various external pressures.

However, an exposure amount or a cross section of the spacer is controlled using the same layer so that the main spacer and the sub-spacer are formed to have a desired step. Through this method, it may be difficult to acquire the desired step and a process for forming the spacer may become complicated.

The above information disclosed in this Background section is only for enhancement of understanding of the background of the invention and therefore it may contain information that does not form part of the prior art that was previously known to a person of ordinary skill in the art.

SUMMARY OF THE INVENTION

Exemplary embodiments of the present invention provide a liquid crystal display capable of preventing a smear defect

while maintaining a constant cell gap of the liquid crystal display without an additional process for forming a sub-spacer.

Additional features of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention.

An exemplary embodiment of the present invention discloses a liquid crystal display that includes: a first substrate; a first color filter and a second color filter disposed on the first substrate; a colored member disposed on the first color filter and the second color filter; and a pixel electrode disposed on the first color filter and the second color filter. The first color filter and the second color filter are partially overlapped with each other, and the thickness of the overlap between the first color filter and the second color filter is less than the thickness of an overlap between the color filters and the pixel electrode, and the height of the colored member disposed at the overlap between the first color filter and the second color filter is greater than the height of the colored member disposed at the rest of the parts.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention, and together with the description serve to explain the principles of the invention.

FIG. 1 is a cross-sectional view schematically showing the structure of a liquid crystal display according to an exemplary embodiment of the present invention.

FIG. 2 is an equivalent circuit diagram of one pixel in a liquid crystal display according to an exemplary embodiment of the present invention.

FIG. 3 is a layout view of a liquid crystal display according to an exemplary embodiment of the present invention.

FIG. 4 is a layout view of a color filter of a liquid crystal display according to an exemplary embodiment of the present invention.

FIG. 5 is a cross-sectional view of a liquid crystal display taken along line V-V of FIG. 3.

FIG. 6 is a cross-sectional view of a liquid crystal display taken along line VI-VI of FIG. 3.

FIG. 7 is a cross-sectional view of a liquid crystal display taken along line VII-VII of FIG. 3.

FIG. 8 is a layout view of a pixel electrode of a liquid crystal display of FIG. 3.

FIG. 9 is a cross-sectional view showing a part of a liquid crystal display according to another embodiment of the present invention.

DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

The present invention is described more fully hereinafter with reference to the accompanying drawings, in which exemplary embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure is thorough, and will fully convey the scope of the invention to those skilled in the art. As those

skilled in the art will realize, the described embodiments may be modified in various different ways, all without departing from the spirit or scope of the present invention.

In the drawings, the thickness of layers, films, panels, regions, etc., may be exaggerated for clarity. Like reference numerals designate like elements throughout the specification. It will be understood that when an element such as a layer, film, region, or substrate is referred to as being "on" or "connected to" another element, it can be directly on or directly connected to the other element or intervening elements may be present. In contrast, when an element is referred to as being "directly on" or "directly connected to" another element, there are no intervening elements present.

Hereinafter, a liquid crystal display according to an exemplary embodiment of the present invention will be described in brief with reference to FIG. 1.

FIG. 1 is a cross-sectional view schematically showing the structure of a liquid crystal display according to an exemplary embodiment of the present invention.

As shown in FIG. 1, the liquid crystal display according to the exemplary embodiment of the present invention includes a lower display panel 100 and an upper display panel 200 that face each other and a liquid crystal layer 3 interposed therebetween.

The lower display panel 100 includes a substrate 110, a first color filter 230A and a second color filter 230B that are formed on the substrate 110 and are overlapped on each other, a colored member 220 that is formed on the substrate 110 and disposed at an overlap of the first color filter and 230A and the second color filter 230B, an insulating layer 180 disposed on the first color filter 230A, the second color filter 230B and the colored member 220, and a pixel electrode 191 and a spacer 325 that are disposed on the insulating layer 180.

The thickness of a portion of the first color filter 230A that is overlapped with the pixel electrode 191 is greater than the thickness of a portion of the first color filter 230A that is overlapped with the second color filter 230B. Likewise, the thickness of a portion of the second color filter 230B that is overlapped with the pixel electrode 191 is greater than the thickness of a portion of the second color filter 230B that is overlapped with the first color filter 230A.

The upper display panel 200 includes a common electrode 270 formed on the substrate 210.

The height of the colored member 220 disposed on the overlap of the first color filter 230A and the second color filter 230B may be less than that of the spacer 325.

In another embodiment, the spacer 325 may be formed by the same layer as the colored member 220.

Hereinafter, referring to FIG. 2, FIG. 3, FIG. 4, FIG. 5, FIG. 6, FIG. 7, and FIG. 8, a liquid crystal display according to an exemplary embodiment of the present invention will be described in detail. FIG. 2 is an equivalent circuit diagram of one pixel in a liquid crystal display according to an exemplary embodiment of the present invention, FIG. 3 is a layout view of a liquid crystal display according to an exemplary embodiment of the present invention, FIG. 4 is a layout view of a color filter of a liquid crystal display according to an exemplary embodiment of the present invention, FIG. 5 is a cross-sectional view of a liquid crystal display taken along line V-V of FIG. 3, FIG. 6 is a cross-sectional view of a liquid crystal display taken along line VI-VI of FIG. 3, FIG. 7 is a cross-sectional view of a liquid crystal display taken along line VII-VII of FIG. 3, and FIG. 8 is a layout view of a pixel electrode of a liquid crystal display of FIG. 3.

Referring to FIG. 2, the liquid crystal display according to the exemplary embodiment of the present invention includes signal lines including a gate line 121, a sustaining electrode

line 125, a voltage drop gate line 123, and a data line 171 and a pixel PX connected with the signal lines.

The pixel PX includes first, second, and third switching elements Qh, Ql, and Qc, first and second liquid crystal capacitors Clch and Clcl, first and second sustaining capacitors Csth and Cstl, and a voltage drop capacitor Cstd. Herein, the first switching element Qh and a first thin film transistor Qh, the second switching element Ql and a second thin film transistor Ql, and the third switching element Qc and a third thin film transistor Qc are each represented by the same reference numeral.

The first switching element Qh and the second switching element Ql are connected to the gate line 121 and the data line 171, and the third switching element Qc is connected to the voltage drop gate line 123.

The first switching element Qh and the second switching element Ql are 3-terminal elements such as a thin film transistor, etc. provided on the lower display panel 100. Control terminals of the first switching element Qh and the second switching element Ql are connected with the gate line 121, input terminals of the first switching element Qh and the second switching element Ql are connected with the data line 171, and output terminals of the first switching element Qh and the second switching element Ql are connected with the first and second liquid crystal capacitors Clch and Clcl and the first and second sustaining capacitors Csth and Cstl, respectively.

The third switching element Qc is also a 3-terminal element such as a thin film transistor, etc. provided on the lower display panel 100 and a control terminal of the third switching element Qc is connected with the voltage drop gate line 123, an input terminal of the third switching element Qc is connected with the second liquid crystal capacitor Clcl, and an output terminal of the third switching element Qc is connected with the voltage drop capacitor Cstd.

Referring to FIG. 3, a first subpixel electrode 191h connected with the first switching element Qh and the common electrode 270 of the upper display panel 200 (FIG. 5) are overlapped with each other to form the first liquid crystal capacitor Clch. A second subpixel electrode 191l connected with the second switching element Ql and the common electrode 270 of the upper display panel 200 are overlapped with each other to form the second liquid crystal capacitor Clcl. The first and second sustaining capacitors Csth and Cstl are formed by overlapping the sustaining electrode line 125 including the sustaining electrode 129 with the first and second subpixel electrodes 191h and 191l.

The voltage drop capacitor Cstd is connected with the output terminal of the third switching element Qc and the sustaining electrode line 125 and is formed by overlapping the sustaining electrode line 125 and the output terminal of the third switching element Qc that are provided on the lower display panel 100 with each other with an insulator interposed therebetween.

Hereinafter, referring to FIG. 3, FIG. 4, FIG. 5, FIG. 6, FIG. 7 and FIG. 8, the liquid crystal display shown in FIG. 2 will be described in more detail.

The liquid crystal display according to the exemplary embodiment of the present invention includes the lower display panel 100 and the upper display panel 200 that face each other, the liquid crystal layer 3 interposed between the two display panels 100 and 200, and a pair of polarizers (not shown) attached to outer surfaces of the display panels 100 and 200.

First, the lower display panel 100 will be described.

A plurality of gate conductors including a plurality of gate lines **121**, a plurality of voltage drop gate lines **123**, and a plurality of sustaining electrode lines **125** are formed on an insulating substrate **110**.

The gate lines **121** and the voltage drop gate lines **123** primarily extend in a transverse direction and transmit a gate signal. The gate line **121** includes a first gate electrode **124h** and a second gate electrode **124l** that vertically protrude and the voltage drop gate line **123** includes a third gate electrode **124c** that protrudes upward. The first gate electrode **124h** and the second gate electrode **124l** are connected with each other to form one protrusion.

The sustaining electrode line **125** also extends primarily in the transverse direction and transmits predetermined voltage such as common voltage V_{com} , etc. The sustaining electrode line **125** includes a sustaining electrode **135** extending vertically, a pair of vertical portions **128** extending downward substantially in a vertical direction toward the gate line **121**, and a transverse portion **127** connecting ends of the pair of vertical portions **128** with each other. The transverse portion **127** includes a capacitive electrode **126** extending downward.

A gate insulating layer **140** is formed on the gate conductors **121**, **123**, **125**.

A plurality of linear semiconductors **151** that may be made of amorphous or crystalline silicon, etc. are formed on the gate insulating layer **140**. The linear semiconductor **151** extends primarily in the vertical direction and includes the first and second semiconductors **154h** and **154l** that extend toward the first and second gate electrodes **124h** and **124l** and are connected with each other and a third semiconductor **154c** connected with the second semiconductor **154l**. The third semiconductor **154c** extends to form a fourth semiconductor **157**.

A plurality of linear ohmic contacts (not shown) are formed on the linear semiconductor **151**, a first ohmic contact (not shown) is formed on the first semiconductor **154h**, and a second ohmic contact **164b** and a third ohmic contact (not shown) are formed evenly on the second semiconductor **154l** and the third semiconductor **154c**. The linear ohmic contact includes a first protrusion (not shown) disposed on a first protrusion of the semiconductor by forming a pair with a first island-type ohmic contact, a second protrusion (not shown) disposed on a second protrusion of the semiconductor by forming a pair with a second island-type ohmic contact, and a third protrusion (not shown) disposed on a third protrusion of the semiconductor by forming a pair with a third island-type ohmic contact. The third ohmic contact extends to form a fourth ohmic contact **167**.

A data conductor including the plurality of data lines **171**, a plurality of first drain electrodes **175h**, a plurality of second drain electrodes **175l**, and a plurality of third drain electrodes **175c** is formed on the ohmic contacts **164b** and **167**.

The data lines **171** transmit data signals and extend primarily in the vertical direction to cross the gate line **121** and the voltage drop gate line **123**. Each data line **171** includes a first source electrode **173h** and a second source electrode **173l** that extend toward the first gate electrode **124h** and the second gate electrode **124l** to form a 'un' shape together.

Each of the first drain electrode **175h**, the second drain electrode **175l**, and the third drain electrode **175c** includes one wide end and the other bar-type end. The bar-type end of each of the first drain electrode **175h** and the second drain electrode **175l** is partially surrounded by the first source electrode **173h** and the second source electrode **173l**. The wide end of the second drain electrode **175l** extends again to form the third source electrode **173c** bent in a 'U' shape. The wide end **177c** of the third drain electrode **175c** is overlapped with

the capacitive electrode **126** to form the voltage drop capacitor C_{std} and the bar-type end is partially surrounded by the third source electrode **173c**.

The first, second, and third gate electrodes **124h**, **124l**, and **124c**, the first, second, and third source electrodes **173h**, **173l**, and **173c**, and the first, second, and third drain electrodes **175h**, **175l**, and **175c** form the first, second, and third thin film transistors (TFTs) Q_h , Q_l , and Q_c together with the first, second, and third island-shape semiconductors **154h**, **154l**, and **154c**, respectively. A channel of the thin film transistor is formed in each of the semiconductors **154h**, **154l**, and **154c** between each of the source electrodes **173h**, **173l**, and **173c**, and each of the drain electrodes **175h**, **175l**, and **175c**.

The linear semiconductor **151** including the semiconductors **154h**, **154l**, and **154c** has substantially the same planar shape as the data conductors **171**, **175h**, **175l**, and **175c** and the ohmic contacts **164b** and **167** below the data conductors except for a channel area between the source electrodes **173h**, **173l**, and **173c** and the drain electrodes **175h**, **175l**, and **175c**. That is, an exposed part without being covered by the data conductors **171**, **175h**, **175l**, and **175c** is provided in addition to parts between the source electrodes **173h**, **173l**, and **173c** and the drain electrodes **175h**, **175l**, and **175c** in the linear semiconductor **151** including the semiconductors **154h**, **154l**, and **154c**.

A lower passivation layer **180p** that may be made of an inorganic insulating material such as silicon nitride or silicon oxide is formed on the data conductors **171**, **175h**, **175l**, and **175c** and the exposed part of the semiconductors **154h**, **154l**, and **154c**.

The first color filter **230A** and the second color filter **230B** are located on the lower passivation layer **180p**. As shown in FIG. 4, each of the color filters **230A** and **230B** is located in most of the area except for areas at which the first thin film transistor Q_h , the second thin film transistor Q_l , and the third transistor Q_c are located. Parts of the first color filter **230A** and the second color filter **230B**, which extend in the vertical direction between the adjacent data lines **171** are overlapped with each other. The part where the first color filter **230A** and the second color filter **230B** are overlapped with each other may be overlapped with at least a part of the data line **171**. Each of the color filters **230A** and the **230B** may display any one of primary colors including three primary colors such as red, green, and blue colors, etc. For each color filter **230A** and **230B**, the thickness of the overlapped part where the first color filter **230A** and the second color filter **230B** are overlapped with each other may be less than the thickness of the rest of the color filter part. The width of the part where the first color filter **230A** and the second color filter **230B** are overlapped with each other is preferably greater than or equal to approximately $7\ \mu\text{m}$.

The colored member **220** is located on an area where the color filters **230A** and **230B** are not located and the area where the first color filter **230A** and the second color filter **230B** are overlapped with each other. The colored member **220** extends vertically on the gate line **121** and the voltage drop gate line **123** and includes a first colored member **220a** covering an area where the first thin film transistor Q_h , the second thin film transistor Q_l , and the third thin film transistor Q_c are located and a second colored member **220b** extending on the data line **171**. The height of a part of the second colored member **220b**, which is disposed on the first color filter **230A** and the second color filter **230B** overlapped with each other is greater than those of the rest of the parts of the colored member **220**. This will be described in detail.

Referring to FIG. 6 and FIG. 7, the height of the second colored member **220b** disposed on the part between the first

color filter **230A** and the second color filter **230B**, which are not overlapped with each other is less than the height of the second colored member **220b** disposed on the first color filter **230A** and the second color filter **230B** there. That is, the second colored member **220b** disposed on the first color filter **230A** and the second color filter **230B** extending on two adjacent data lines **171** is higher than that of the colored member **220** disposed between the first color filter **230A** and the second color filter **230B** that are not overlapped with each other.

Since the width of the part where the first color filter **230A** and the second color filter **230B** are overlapped with each other should be approximately 7 μm or more, the colored member **220** may be stably disposed to have a predetermined height.

The colored member **220** may include a black pigment, etc. and prevents light leakage. The colored member **220** may be referred to as a black matrix.

An upper passivation layer **180q** is formed on the color filter **230** and the colored member **220**. The upper passivation layer **180q** prevents the color filter **230** and the colored member **220** from getting loose and suppresses contamination of the liquid crystal layer **3** due to an organic material such as a solvent introduced from the color filter **230** to prevent a defect such as an afterimage which may be caused in driving a screen.

A plurality of first contact holes **185h** and a plurality of second contact holes **185l** that expose the wide end of the first drain electrode **175h** and the wide end of the second drain electrode **175l**, respectively are formed in the lower passivation layer **180p**, the colored member **220**, and the upper passivation layer **180q**.

A plurality of pixel electrodes **191** are formed on the upper passivation layer **180q**.

Referring to FIG. 3, the pixel electrodes **191** include a first subpixel electrode **191h** and a second subpixel electrode **191l** that are separated from each other with two gate lines **121** and **123** interposed therebetween, are disposed at upper and lower portions of a pixel area around the gate lines **121** and **123** and are adjacent to each other in a column direction. Each of the first subpixel electrode **191h** and the second subpixel **191l** includes a basic electrode **199** shown in FIG. 8 or at least one modification thereof.

The thickness of the overlap between the color filters **230A** and **230B** is thicker than those of the parts where the color filters **230A** and the **230B** are overlapped with the pixel electrode **191**.

Hereinafter, referring to FIG. 8, the basic electrode **199** will be described in detail.

As shown in FIG. 8, the basic electrode **199** has an overall rectangular shape and includes a cross stem portion constituted by a transverse stem portion **193** and a vertical stem portion **192** orthogonal thereto. Further, the basic electrode **199** is divided into a first subarea Da, a second subarea Db, a third subarea Dc, and a fourth subarea Dd by the transverse stem portion **193** and the vertical stem portion **192** and each of the subareas Da, Db, Dc and Dd includes a plurality of first, second, third and fourth minute branch portions **194a**, **194b**, **194c**, and **194d**, respectively.

The first minute branch portion **194a** extends obliquely to an upper left direction from the transverse stem portion **193** or the vertical stem portion **192** and the second minute branch portion **194b** extends obliquely to an upper right direction from the transverse stem portion **193** or the vertical stem portion **192**. Further, the third minute branch portion **194c** extends obliquely to a lower left direction from the transverse stem portion **193** or the vertical stem portion **192** and the

fourth minute branch portion **194d** extends obliquely to a lower right direction from the transverse stem portion **193** or the vertical stem portion **192**.

The first to fourth minute branch portions **194a**, **194b**, **194c**, and **194d** form an angle of approximately 45 degrees or 135 degrees with the gate lines **121a** and the **121b** or the transverse stem portion **193**. Further, the minute branch portions **194a**, **194b**, **194c**, and **194d** of the adjacent four subareas Da, Db, Dc, and Dd may be orthogonal to each other.

The widths of the minute branch portions **194a**, **194b**, **194c**, and **194d** may be in the range of 2.5 to 5.0 μm and a gap between the adjacent minute branch portions **194a**, **194b**, **194c**, and **194d** in one subarea Da, Db, Dc, or Dd may be in the range of 2.5 to 5.0 μm .

According to another embodiment of the present invention, the widths of the minute branch portions **194a**, **194b**, **194c**, and **194d** may be wider as the minute branch portions are closer to the transverse stem portion **193** or the vertical stem portion **192**. Further, a difference between the widest portion and the narrowest portion in one minute branch portion **194a**, **194b**, **194c**, or **194d** may be in the range of 0.2 to 1.5 μm .

The first subpixel electrode **191h** and the second subpixel electrode **191l** include outer stem portions surrounding outer edges and vertical portions of the outer stem portions extend on the data line **171** to prevent capacitive coupling between the data line **171** and the first subpixel electrode **191h** and the second subpixel electrode **191l**.

The first subpixel electrode **191h** and the second subpixel electrode **191l** are applied with receive data voltage from the first drain electrode **175h** and the second drain electrode **175l** through the first contact hole **185h** and the second contact hole **185l**, respectively. The first subpixel electrode **191h** and the second subpixel electrode **191l** applied with the data voltage generate an electric field together with the common electrode of the common electrode display panel **200** so as to determine orientation of liquid crystal molecules of the liquid crystal layer **3** between two electrodes **191** and **270**. The luminance of light passing through the liquid crystal layer **3** depends on the orientation of the liquid crystal molecules determined as above.

Sides of the first to fourth minute branch portions **194a**, **194b**, **194c**, and **194d** distort the electric field to form horizontal components for determining inclined directions of the liquid crystal molecules **31**. The horizontal components of the electric field are substantially horizontal to the sides of the first to fourth minute branch portions **194a**, **194b**, **194c**, and **194d**. As a result, as shown in FIG. 8, the liquid crystal molecules **31** are inclined in a direction parallel to longitudinal directions of the minute branch portions **194a**, **194b**, **194c**, and **194d**. One pixel electrode **191** includes four subareas Da to Dd in which the longitudinal directions of the minute branch portions **194a**, **194b**, **194c**, and **194d** are different from each other. Therefore, the liquid crystal molecules **31** are inclined in four different directions and four domains of which the liquid crystal molecules **31** have different orientation directions are formed on the liquid crystal layer **3**. As such, when the liquid crystal molecules are inclined in various directions, a reference viewing angle of the liquid crystal display is increased.

The first subpixel electrode **191h** and the common electrode **270** form the first liquid crystal capacitor Clch together with the liquid crystal layer **3** interposed therebetween and the second subpixel electrode **191l** and the common electrode **270** form the second liquid crystal capacitor Clcl together with the liquid crystal layer **3** interposed therebetween to maintain applied voltage even after the first thin film transistor Qh and the second thin film transistor Ql are turned off.

The first and second subpixel electrodes **191h** and **191i** are overlapped with the sustaining electrode line **125** including the sustaining electrode **129** to form the first and second sustaining capacitors **Cst_h** and **Cst_i** and the first and second sustaining capacitors **Cst_h** and **Cst_i** strengthens voltage sustaining capacities of the first and second liquid crystal capacitors **Cl_{ch}** and **Cl_{cl}**, respectively.

The capacitive electrode **126** and an extension portion **177c** of the third drain electrode **175c** are overlapped with each other with the gate insulating layer **140** and the fourth semiconductor layer **157** and the fourth ohmic contact layer **167** interposed therebetween to form the voltage drop capacitor **Cstd**. In another embodiment of the present invention, the fourth semiconductor layer **157** and the fourth ohmic contact layer **167** may be removed, which are disposed between the capacitive electrode **126** and the extension portion **177c** of the third drain electrode **175c** forming the voltage drop capacitor **Cstd**.

The spacer **325** is formed on the upper passivation layer **180q**. The spacer **325** maintains a constant cell gap of the liquid crystal layer **3** disposed between the lower display panel **100** and the upper display panel **200**. In another embodiment, the spacer **325** may be formed by the same layer as the colored member **220**.

Although not shown, the spacer **325** may include a first spacer and a second spacer that have different heights. The heights of the first spacer and the second spacer are greater than that of the colored member **220**. The spacer having the greater height between the first spacer and the second spacer serves to maintain the cell gap and the second spacer serves to maintain the cell gap when elasticity of the first spacer is damaged due to external pressure.

The part of the colored member **220** disposed on the first color filter **230A** and the second color filter **230B** that are overlapped with each other among the above-mentioned colored member **220** parts may have a height less than the spacer **325** and a difference in height between the colored member **220** and the spacer **325** may be approximately 2.0 μm or less and more specifically, may be less than approximately 1.4 μm .

The part of the colored member **220** disposed on the first color filter **230A** and the second color filter **230B** that are overlapped with each other among the colored member **220** parts may have a height less than the spacer **325**, but greater than other thin film structures. Therefore, the colored member **220** may serve as a subspacer that prevents a smear defect from being generated due to a damage of the elasticity of the spacer **325**, which is caused by the external pressure by supporting two display panels when a user applies pressure to a local portion at the time of using the liquid crystal display.

Since the colored member **220** disposed on the first color filter **230A** and the second color filter **230B** that are overlapped with each other among the colored member **220** may have the height smaller than the first spacer and the second spacer, the colored member may serve to support the liquid crystal layer when pressure higher than pressure for the second spacer to sustain is applied to the second spacer and the liquid crystal cell gap becomes thus narrowed.

Likewise, three or more spacers having different heights which maintain the liquid crystal cell gap are formed to thereby stably maintain the liquid crystal cell even under the external pressure.

A lower orientation layer (not shown) is formed on the pixel electrode **191**, the exposed upper passivation layer **180q**, and the spacer **325**. The lower orientation layer may be a vertical orientation layer.

Hereinafter, the upper display panel **200** will be described.

The common electrode **270** is formed on the insulating substrate **210**. An upper orientation layer (not shown) is formed on the common electrode **270**. The upper orientation layer may be the vertical orientation layer.

A polarizer of a pair of polarizers (not shown) is provided on each outer surface of the two display panels **100** and **200**. It is preferable that transmission axes of the two polarizers are orthogonal to each other and any one transmission axis of them is parallel to the gate line **121**.

The liquid crystal layer **3** has negative permittivity anisotropy and the liquid crystal molecules of the liquid crystal layer **3** are oriented to have long axes vertical to the surfaces of the two display panels **100** and **200** under the condition of no electric field. Accordingly, incident light does not pass through the orthogonal polarizer and is blocked under the condition of no electric field.

As described above, the first subpixel electrode **191h** and the second subpixel electrode **191i** applied with the data voltage generate the electric field together with the common electrode **270** of the common electrode display panel **200**, such that the liquid crystal molecules of the liquid crystal layer **3** oriented to be vertical to the surfaces of the two electrodes **191** and **270** under the condition of no electric field lie in a direction horizontal to the surfaces of the two electrodes **191** and **270** and the luminance of the light passing through the liquid crystal layer **3** depends on the lying angles of the liquid crystal molecules.

Like this, in the liquid crystal display according to the exemplary embodiment of the present invention, a high step is formed by partially overlapping adjacent two color filters with each other and a colored member is formed on the step, such that the colored member may be used as a light shielding member for preventing light leakage and a subspacer for preventing a smear defect from being generated. Accordingly, it is possible to prevent the smear defect while constantly maintaining a cell gap of the liquid crystal display without an additional process for manufacturing the subspacer and in addition, it is possible to prevent light leakage between pixels.

Hereinafter, a liquid crystal display according to another embodiment of the present invention will be described with reference to FIG. 9. FIG. 9 is a cross-sectional view showing a part of a liquid crystal display according to another embodiment of the present invention. FIG. 9A is a cross-sectional view showing two color filters not overlapped with each other and FIG. 9B is a cross-sectional view showing two color filters overlapped with each other.

In the embodiment, when the color filters are formed, by exposing an edge of an overlap of the color filters with a halftone mask such as a slit mask, etc., the overlap may have an edge more gentle than an edge of portions of the color filters that are not overlapped with each other and the thicknesses of the color filters may be decreased. By this configuration, since a cross section **W** of the overlap of the color filters is increased and the surfaces of the color filters may be flattened, an area of a region in which a colored member used as a subspacer for preventing a smear defect may be disposed is increased and the colored member may be stably disposed. Accordingly, it is possible to prevent the position of the subspacer from being changed due to an alignment error, etc.

It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

11

What is claimed is:

1. A liquid crystal display, comprising:

a first substrate;

a first color filter and a second color filter disposed on the first substrate;

a colored member disposed on the first color filter and the second color filter; and

a pixel electrode disposed on the first color filter and the second color filter,

wherein the first color filter and the second color filter are partially overlapped with each other,

wherein the thickness of the first color filter and the thickness of the second color filter at an overlap between the first color filter and the second color filter are less than the thickness of the first color filter and the thickness of the second color filter at an overlap between the respective color filters and the pixel electrode, and

wherein a maximum height on the first substrate of a first portion of the colored member disposed at the overlap between the first color filter and the second color filter is greater than a maximum height on the first substrate of a second portion of the colored member disposed not at the overlap between the first color filter and the second color filter.

2. The liquid crystal display of claim 1, wherein:

the surface of the overlap where the first color filter and the second color filter are overlapped with each other is flat.

3. The liquid crystal display of claim 2, wherein:

the width of the overlap of the first color filter and the second color filter is greater than or equal to approximately 7 μm .

4. The liquid crystal display of claim 3, further comprising:

a spacer for maintaining a cell gap,

wherein the height of the colored member is less than the height of the spacer.

5. The liquid crystal display of claim 4, wherein:

a difference in height between the colored member and the spacer is less than or equal to approximately 2 μm .

6. The liquid crystal display of claim 5, wherein:

the difference in height between the colored member and the spacer is less than or equal to approximately 1.4 μm .

7. The liquid crystal display of claim 4, wherein:

the spacer and the colored member are formed of the same layer.

8. The liquid crystal display of claim 4, wherein:

the spacer comprises a first spacer and a second spacer that have different heights from each other, and the colored member has a height less than a height of the first spacer and a height of the second spacer.

9. The liquid crystal display of claim 4, further comprising:

a first signal line disposed on the first substrate, wherein the overlap of the first color filter and the second color filter is partially overlapped with the first signal line.

10. The liquid crystal display of claim 9, wherein:

the first signal line comprises a data line.

11. A liquid crystal display, comprising:

a first substrate;

a first color filter and a second color filter disposed on the first substrate;

a colored member disposed on the first color filter and the second color filter; and

a pixel electrode disposed on the first color filter and the second color filter,

wherein the first color filter and the second color filter are partially overlapped with each other

12

wherein the thickness of the first color filter and the thickness of the second color filter at an overlap between the first color filter and the second color filter are less than the thickness of the first color filter and the thickness of the second color filter at an overlap between the respective color filters and the pixel electrode,

wherein the height of the colored member disposed at the overlap between the first color filter and the second color filter is greater than the height of the colored member disposed not at the overlap between the first color filter and the second color filter; and

wherein the width of the overlap of the first color filter and the second color filter is greater than or equal to approximately 7 μm .

12. The liquid crystal display of claim 11, further comprising:

a spacer to maintain a cell gap,

wherein the height of the colored member is less than a height of the spacer.

13. The liquid crystal display of claim 12, wherein:

a difference in height between the colored member and the spacer is less than or equal to approximately 2 μm .

14. The liquid crystal display of claim 13, wherein:

the difference in height between the colored member and the spacer is less than or equal to approximately 1.4 μm .

15. The liquid crystal display of claim 12, wherein:

the spacer and the colored member are formed of the same layer.

16. The liquid crystal display of claim 12, wherein:

the spacer comprises a first spacer and a second spacer that have different heights from each other, and the colored member has a height less than a height of the first spacer and a height of the second spacer.

17. The liquid crystal display of claim 12, further comprising:

a first signal line disposed on the first substrate,

wherein the overlap of the first color filter and the second color filter is partially overlapped with the first signal line.

18. The liquid crystal display of claim 17, wherein:

the first signal line comprises a data line.

19. The liquid crystal display of claim 1, further comprising:

a spacer to maintain a cell gap,

wherein the height of the colored member is less than a height of the spacer.

20. A liquid crystal display, comprising:

a first substrate;

a first color filter and a second color filter disposed on the first substrate;

a colored member disposed on the first color filter and the second color filter;

a pixel electrode disposed on the first color filter and the second color filter; and

a spacer to maintain a cell gap,

wherein the height of the colored member is less than a height of the spacer,

wherein the first color filter and the second color filter are partially overlapped with each other

wherein the thickness of the first color filter and the thickness of the second color filter at an overlap between the first color filter and the second color filter are less than the thickness of the first color filter and the thickness of the second color filter at an overlap between the respective color filters and the pixel electrode,

wherein the height of the colored member disposed at the overlap between the first color filter and the second color

13

filter is greater than the height of the colored member disposed not at the overlap between the first color filter and the second color filter, and
 wherein a difference in height between the colored member and the spacer is less than or equal to approximately 2 μm .
21. The liquid crystal display of claim **20**, wherein: the difference in height between the colored member and the spacer is less than or equal to approximately 1.4 μm .
22. The liquid crystal display of claim **19**, wherein: the spacer and the colored member are formed of the same layer.
23. The liquid crystal display of claim **19**, wherein: the spacer comprises a first spacer and a second spacer that have different heights from each other, and the colored member has a height less than a height of the first spacer and a height of the second spacer.

14

24. The liquid crystal display of claim **19**, further comprising:
 a first signal line disposed on the first substrate, wherein the overlap of the first color filter and the second color filter is partially overlapped with the first signal line.
25. The liquid crystal display of claim **24**, wherein: the first signal line comprises a data line.
26. The liquid crystal display of claim **1**, further comprising:
 a first signal line disposed on the first substrate, wherein the overlap of the first color filter and the second color filter is partially overlapped with the first signal line.
27. The liquid crystal display of claim **26**, wherein: the first signal line comprises a data line.

* * * * *

专利名称(译)	液晶显示器		
公开(公告)号	US8400588	公开(公告)日	2013-03-19
申请号	US12/900433	申请日	2010-10-07
[标]申请(专利权)人(译)	杨BYUNG DUK 李恩GUK KWAK桑KI 金东YOON YEO YUN JONG		
申请(专利权)人(译)	杨，炳DUK LEE，EUN-GUK KWAK，SANG-KI KIM，DONG-YOON YEO，YUN-JONG		
当前申请(专利权)人(译)	三星DISPLAY CO.，LTD.		
[标]发明人	YANG BYUNG DUK LEE EUN GUK KWAK SANG KI KIM DONG YOON YEO YUN JONG		
发明人	YANG, BYUNG-DUK LEE, EUN-GUK KWAK, SANG-KI KIM, DONG-YOON YEO, YUN-JONG		
IPC分类号	G02F1/1335		
CPC分类号	G02F1/1335		
优先权	1020100019885 2010-03-05 KR		
其他公开文献	US20110216276A1		
外部链接	Espacenet USPTO		

摘要(译)

根据本发明示例性实施例的液晶显示器包括：第一基板；设置在第一基板上的第一信号线，与第一信号线连接的薄膜晶体管，设置在第一基板上的第一滤色器和第二滤色器；设置在第一滤色器和第二滤色器上的着色构件；像素电极，设置在第一滤色器和第二滤色器以及着色构件上，其中第一滤色器和第二滤色器彼此部分重叠，并且着色构件的高度设置在第一滤色器和第二滤色器之间的重叠部分上滤色器和第二滤色器大于不在重叠处设置的着色构件的高度。

