



US 20040008302A1

(19) **United States**

(12) **Patent Application Publication**
Moon

(10) **Pub. No.: US 2004/0008302 A1**

(43) **Pub. Date: Jan. 15, 2004**

(54) **LIQUID CRYSTAL DISPLAY DEVICE USING CHOLESTERIC LIQUID CRYSTAL**

(52) **U.S. Cl. 349/115**

(76) **Inventor: Jong-Weon Moon, Annyang-si (KR)**

(57) **ABSTRACT**

Correspondence Address:

MCKENNA LONG & ALDRIDGE LLP
Rebecca Goldman Rudich
1900 K Street, N.W.
Washington, DC 20006 (US)

(21) **Appl. No.: 10/614,293**

(22) **Filed: Jul. 8, 2003**



(30) **Foreign Application Priority Data**


Jul. 9, 2002 (KR) 2002-39609

Publication Classification


(51) **Int. Cl.⁷ G02F 1/1335**

A liquid crystal display device includes: first and second substrates facing and spaced apart from each other; a retardation layer on an outer surface of the first substrate; a linear polarizing layer on the retardation layer; a cholesteric liquid crystal color filter (CCF) layer on an inner surface of the second substrate; a liquid crystal layer between the first substrate and the CCF layer; a first cholesteric liquid crystal (CLC) polarizing layer on an outer surface of the second substrate, the first CLC polarizing layer having a first helical pitch of a first circular polarization direction; a second cholesteric liquid crystal (CLC) polarizing layer on the first CLC layer, the second CLC polarizing layer having a second helical pitch of a second circular polarization direction opposite to the first circular polarization direction; and a backlight unit outside the second CLC layer.

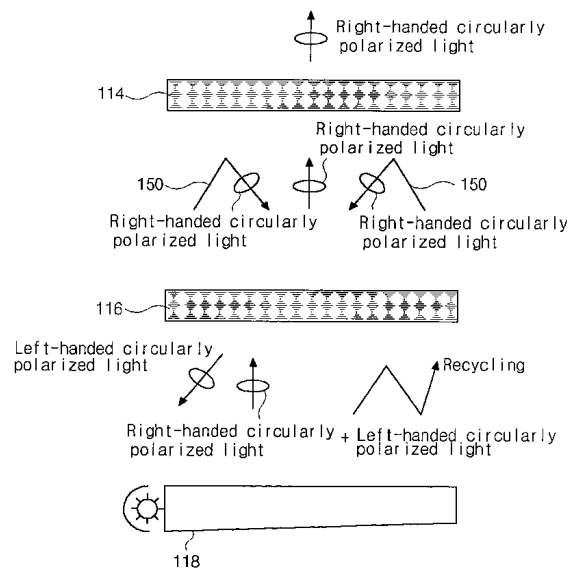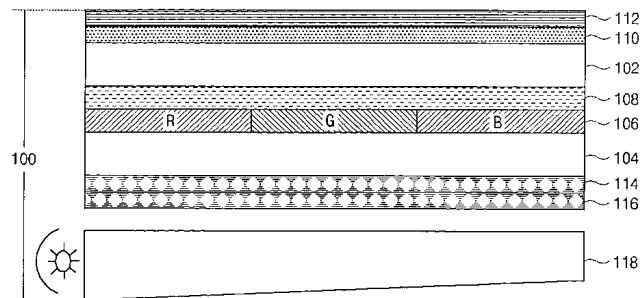


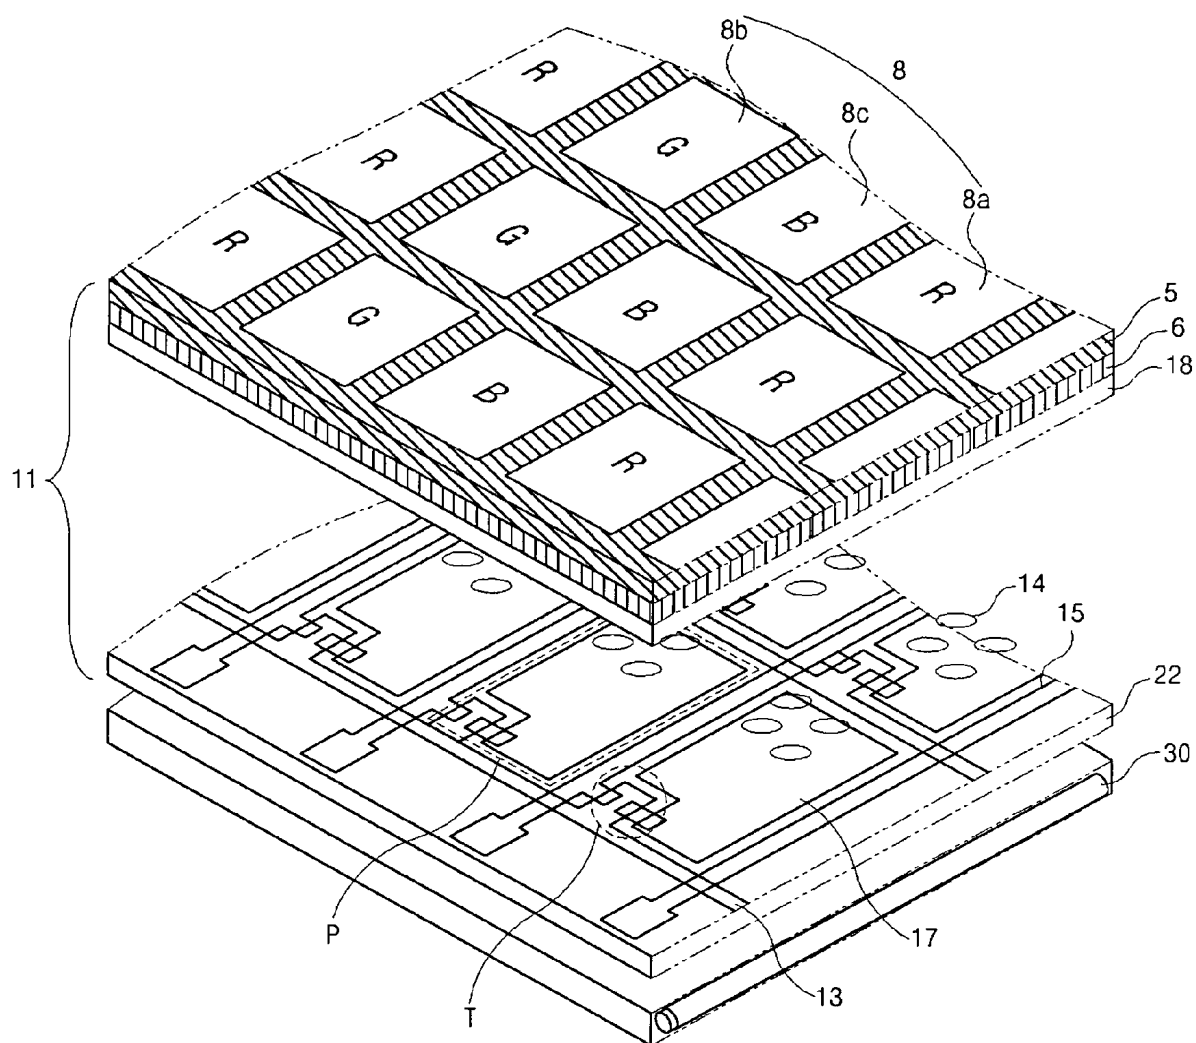

(related art)
FIG. 1

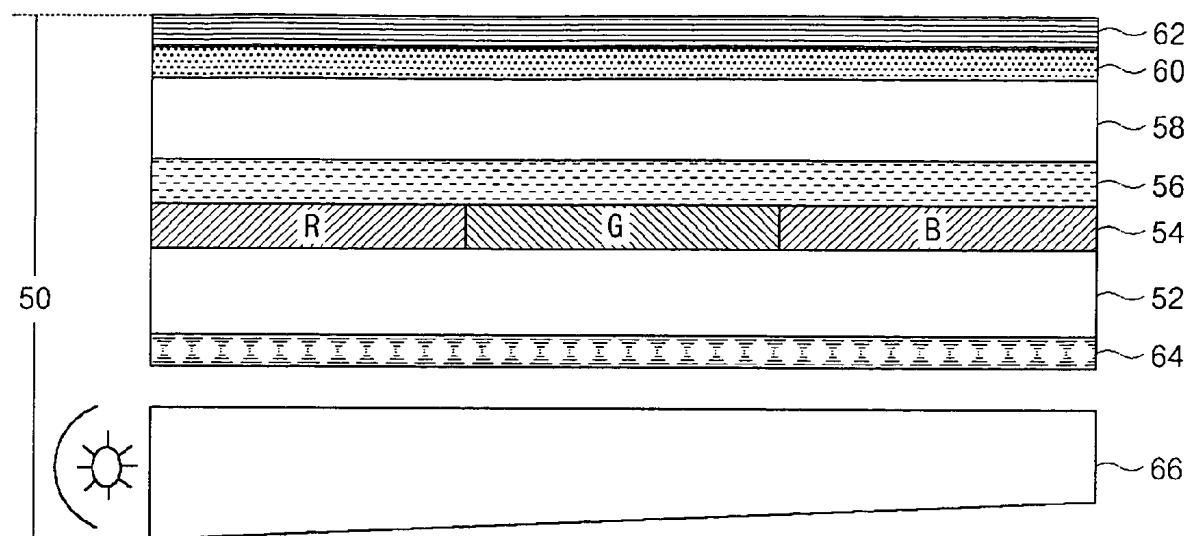

(related art)
FIG. 2

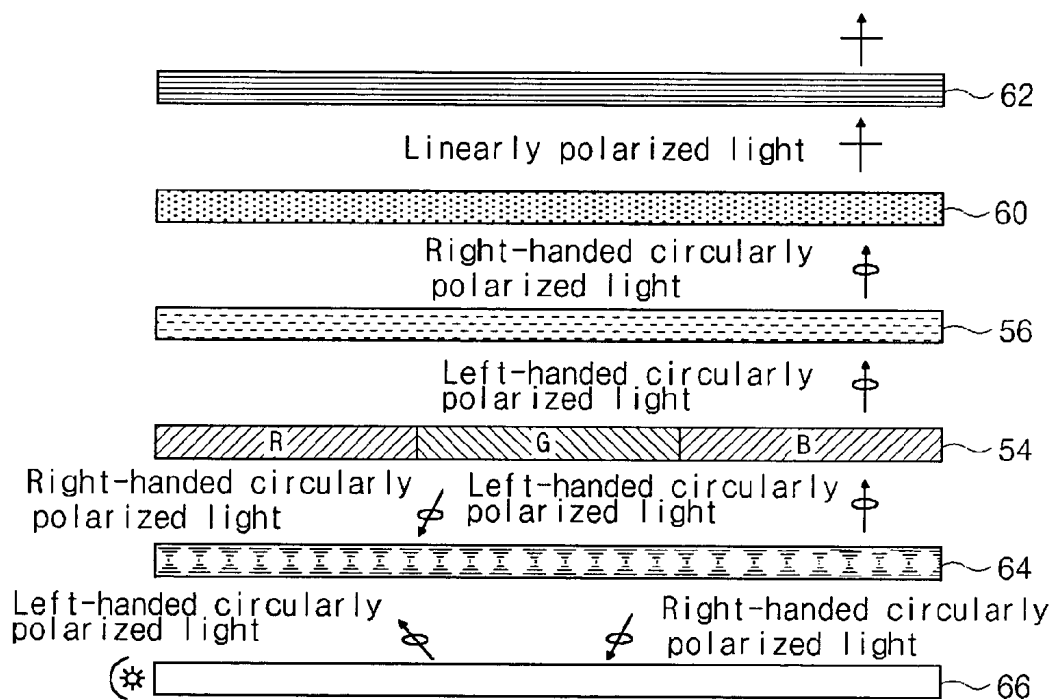

(related art)
FIG. 3

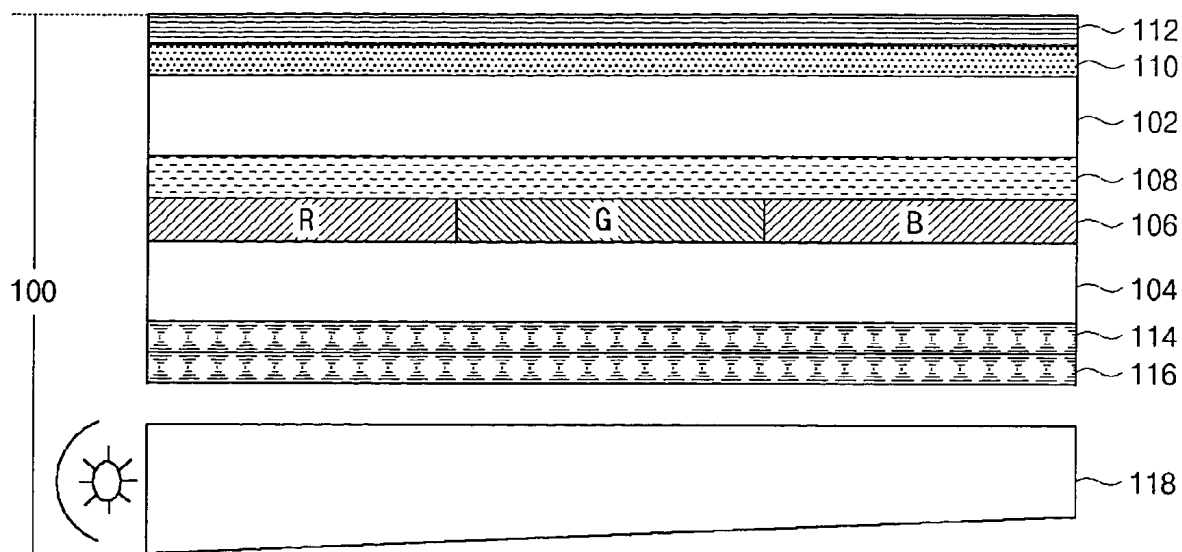


FIG. 4

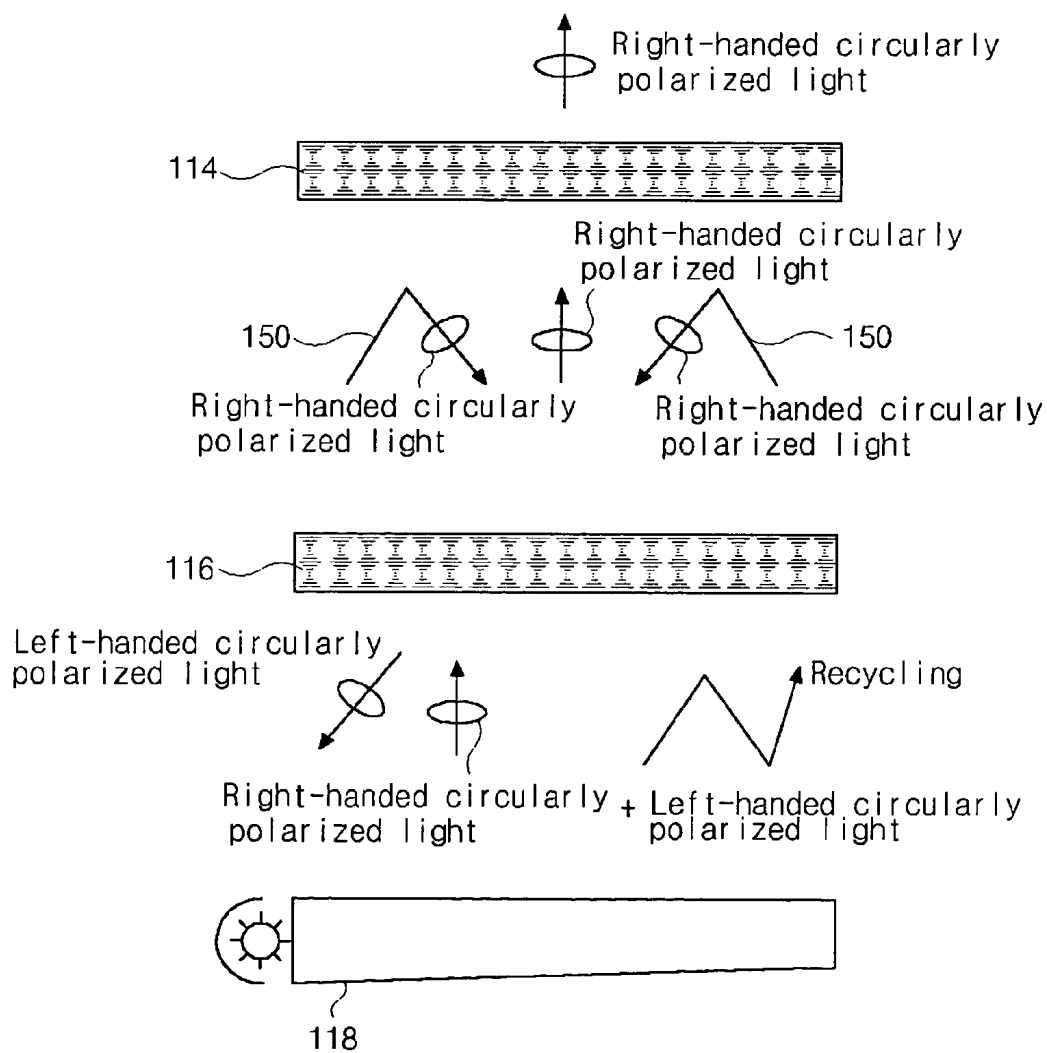


FIG. 5

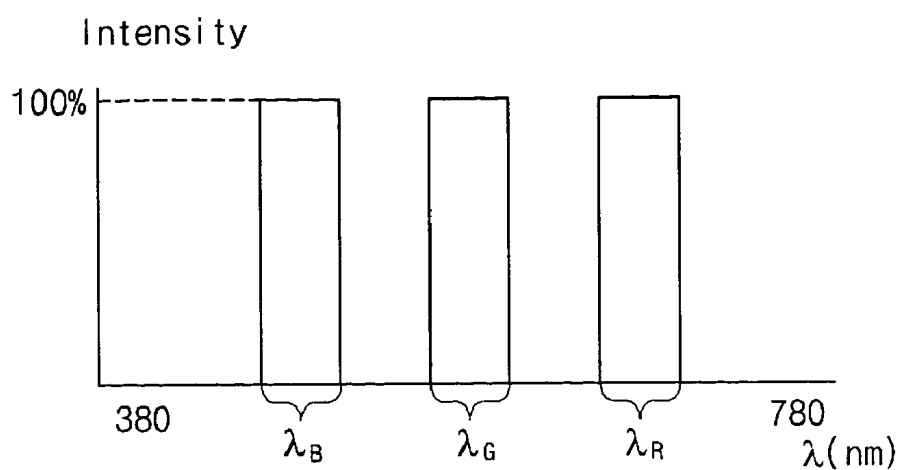


FIG. 6A

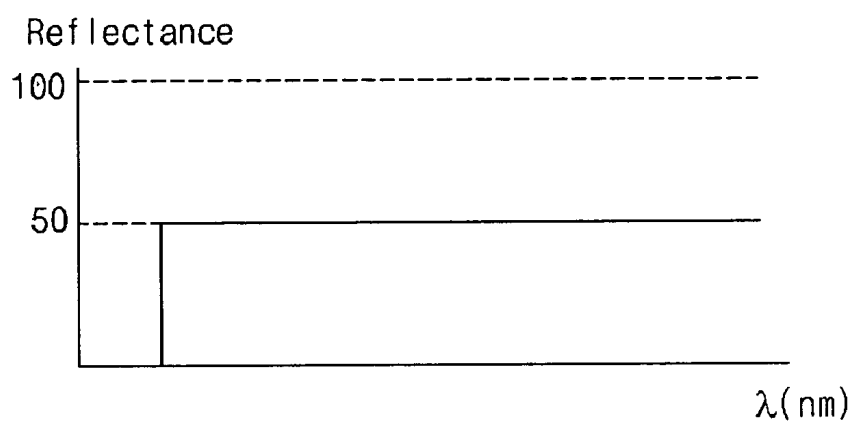


FIG. 6B

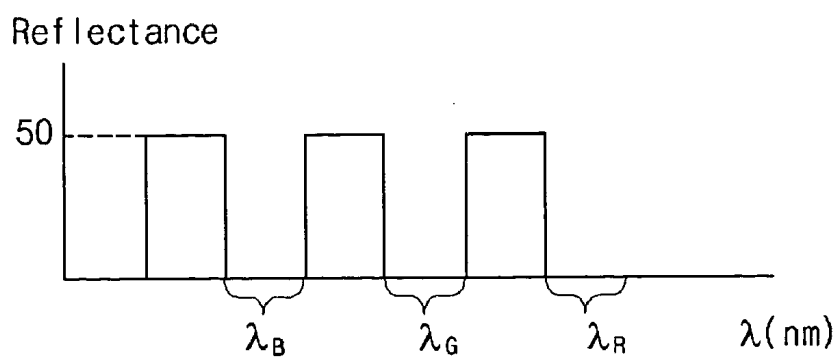


FIG. 6C

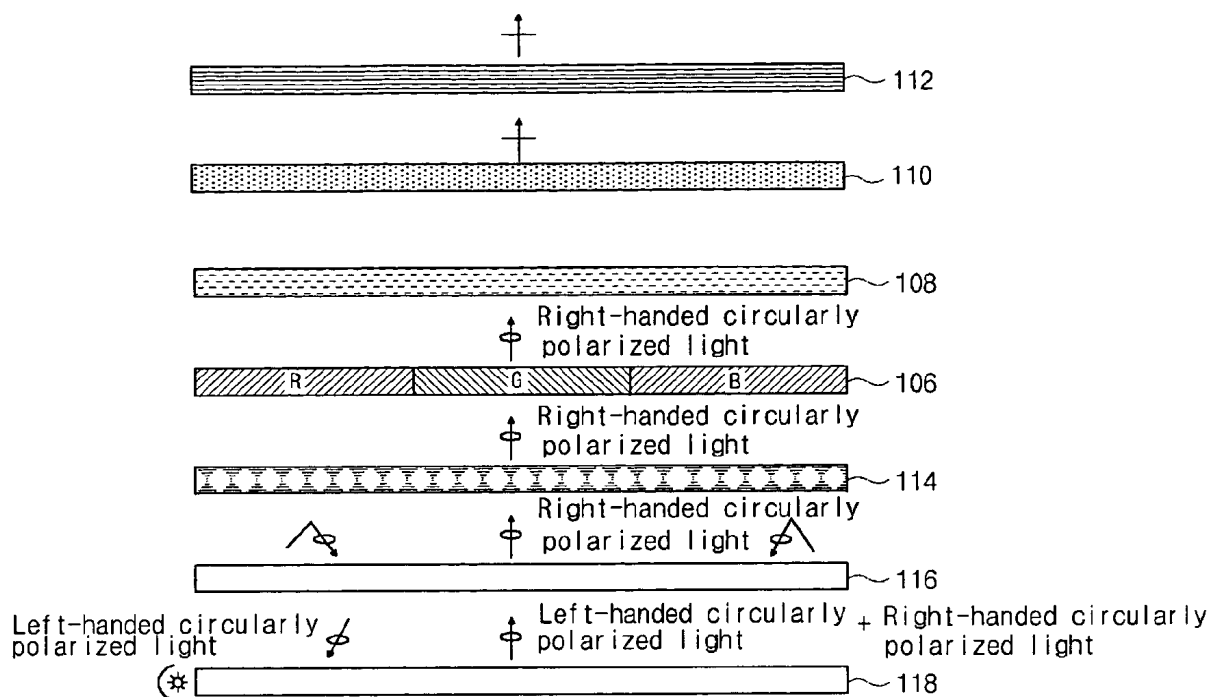


FIG. 7

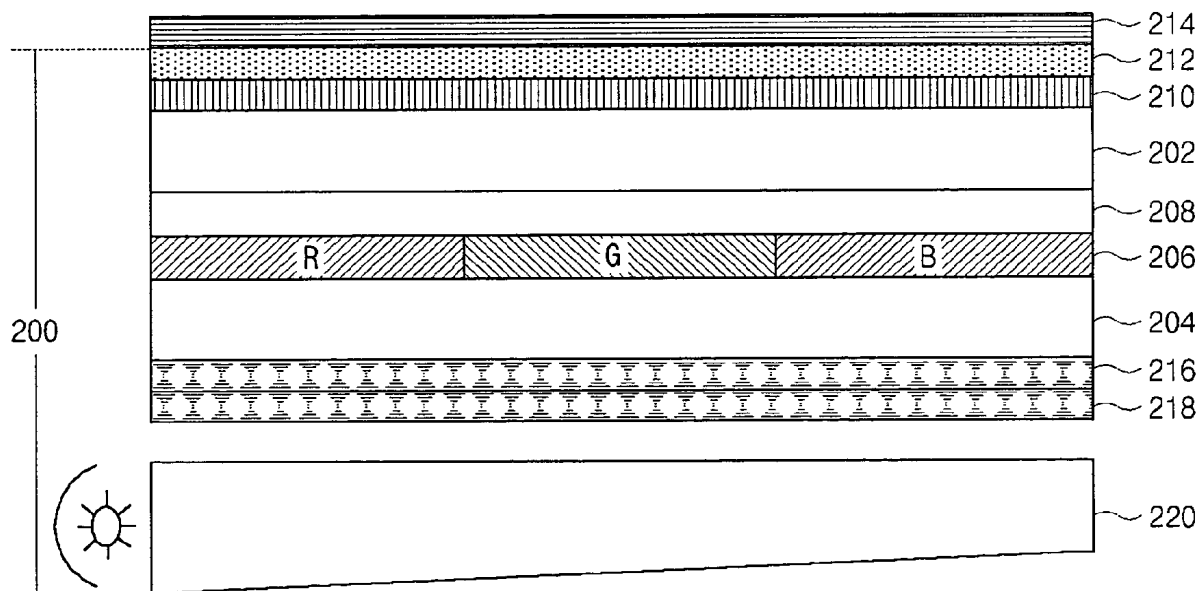


FIG. 8

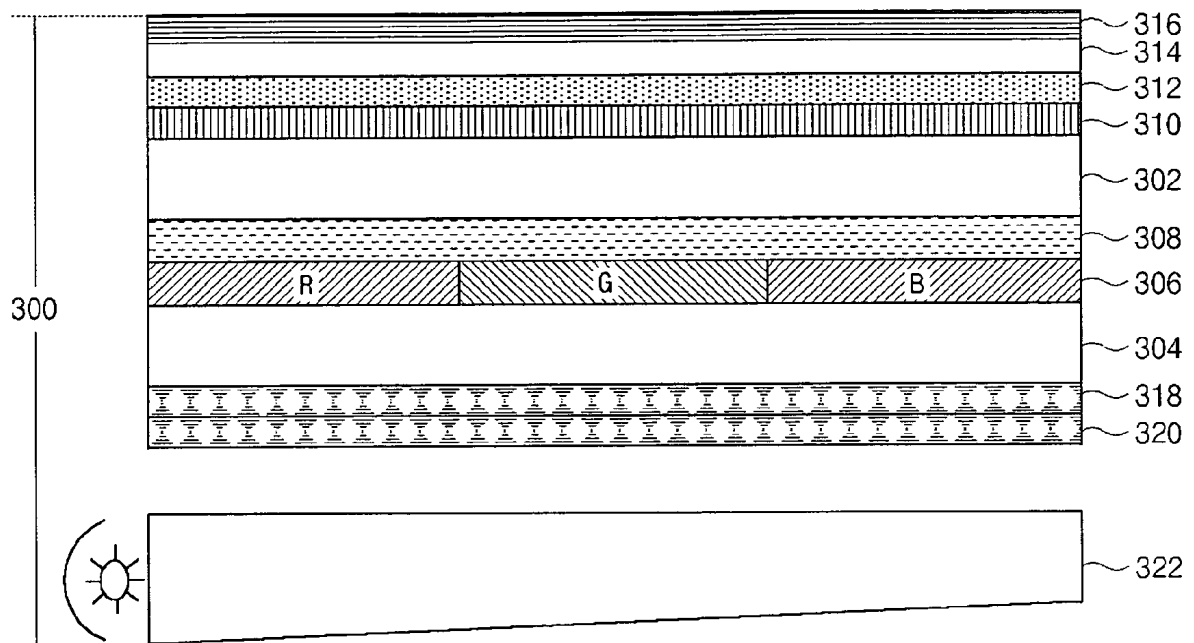


FIG. 9

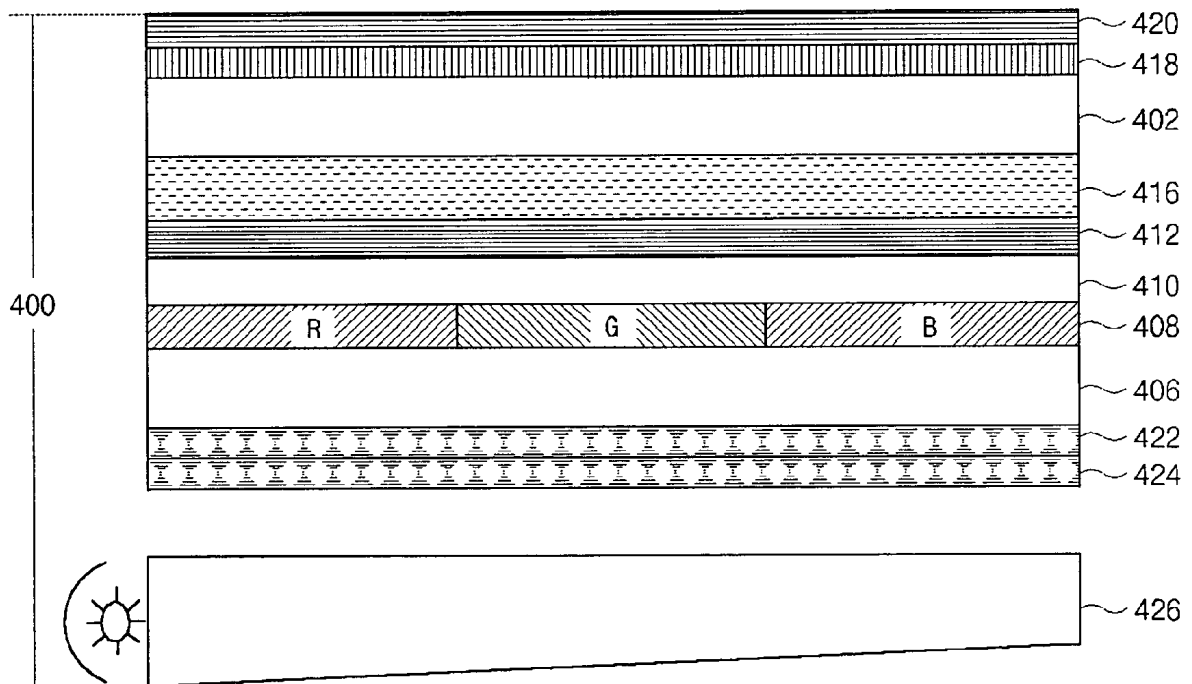


FIG. 10

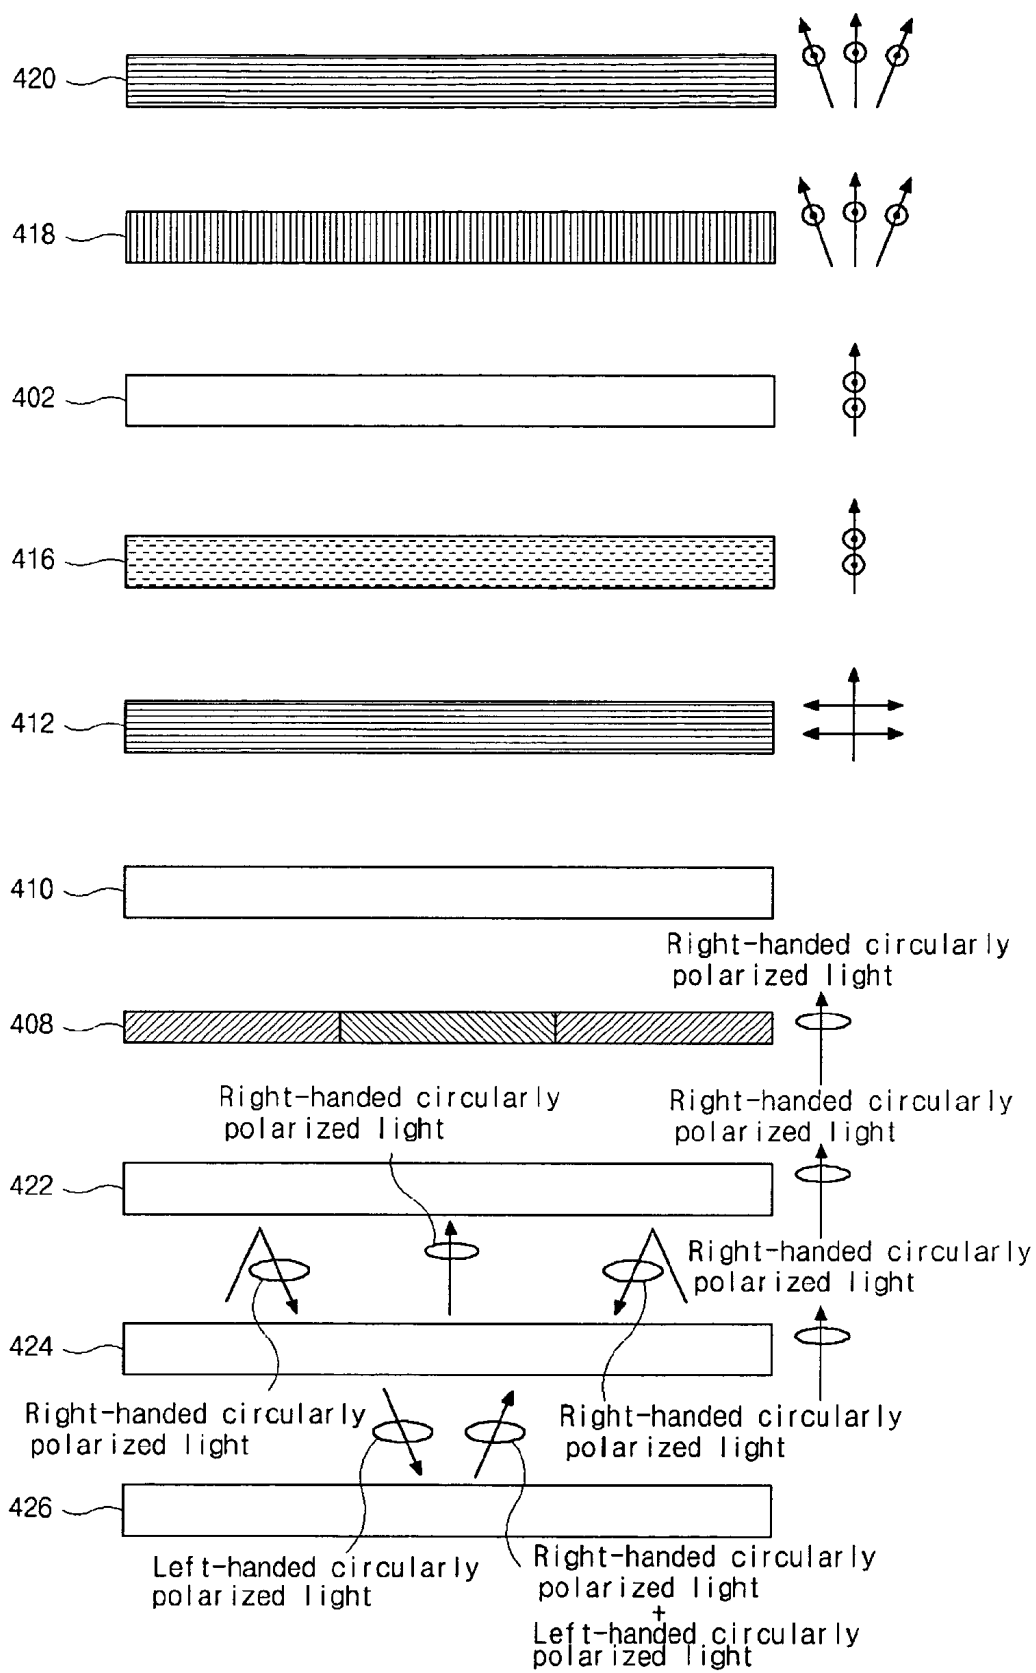


FIG. 11

LIQUID CRYSTAL DISPLAY DEVICE USING CHOLESTERIC LIQUID CRYSTAL

[0001] This application claims the benefit of Korean Patent Application No. 2002-39609, filed on Jul. 9, 2002, which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to liquid crystal display devices, and more particularly to transmissive liquid crystal display devices using a cholesteric liquid crystal polarizing plate and a cholesteric liquid crystal color filter layer.

[0004] 2. Discussion of the Related Art

[0005] In general, a liquid crystal display (LCD) device makes use of optical anisotropy and polarization properties of liquid crystal molecules. The liquid crystal molecules have a definite orientational alignment that results from their thin and long shape. The alignment direction of the liquid crystal molecules can be controlled by application of an electric field to the liquid crystal molecules. Accordingly, as an intensity of the applied electric field changes, the alignment orientation of the liquid crystal molecules also changes. Since incident light through a liquid crystal material is refracted due to an orientation of the liquid crystal molecules resulting from the optical anisotropy of the aligned liquid crystal molecules, an intensity of the incident light can be controlled and images can be displayed.

[0006] Among the various types of LCD devices commonly used, active matrix LCD (AM-LCD) devices, in which thin film transistors (TFTs) and pixel electrodes connected to the TFTs are disposed in matrix, have been developed because of their high resolution and superior display of moving images.

[0007] FIG. 1 is a schematic perspective view of a liquid crystal display device according to the related art.

[0008] In FIG. 1, the liquid crystal display (LCD) device 11 includes upper and lower substrates 5 and 22, and a liquid crystal layer 14 interposed therebetween. A black matrix 6 and a color filter layer 8 including red, green and blue sub color filters 8a, 8b and 8c are formed on the upper substrate 5. A transparent common electrode 18 is formed on the color filter layer 8 and the black matrix 6. The upper substrate 5 is referred to as a color filter substrate. A pixel electrode 17 of a pixel region "P," a switching element "T" and array lines including a gate line 13 and a data line 15 are formed on the lower substrate 22. The lower substrate 22 is referred to as an array substrate. The switching element "T" is disposed in matrix and connected to the gate line 13 and the data line 15. The pixel region "P" is defined by crossing of the gate lines 13 and the data lines 15. The pixel electrode 17 at the pixel region "P" is made of transparent conductive material such as indium-tin-oxide (ITO) or indium-zinc-oxide (IZO) having high transmittance. A backlight unit 30 is disposed under the LCD device 11 as a light source.

[0009] When a gate signal is applied to the switching element "T," a data signal is applied to the pixel electrode 17. When a gate signal is not applied to the switching element "T," a data signal cannot be applied to the pixel

electrode 17. That is, the LCD device 11 is a kind of light modulating device using light emitted from the backlight unit 30. Since the light from the backlight unit 30 passes through a plurality of optical films to display images, the LCD device 11 has a poor light efficiency. The plurality of optical films include a pair of linear polarizing plates (not shown) and a color filter layer 8. The pair of linear polarizing plates transmits only linear components of the light from the backlight unit 30. That is, the pair of polarizing plates transmits only linearly polarized light along a specific direction. Accordingly, only a portion less than about half of the light emitted from the backlight unit 30 passes through the pair of linear polarizing plates. The backlight unit 30 is not efficiently used, thereby a brightness of the LCD device reduced. Moreover, the color filter layer 8 of an absorption type causes heavy losses of the light from the backlight unit 30 and reduction of brightness. To solve the problem of brightness reduction, the color filter layer 30 should be formed to have high transmittance. However, high transmittance of the color filter layer 30 is obtained with reduction of color purity. Accordingly, there is a limitation to increase transmittance of the absorption type color filter layer 30.

[0010] To solve the brightness problem of LCD devices using an absorption type color filter layer, LCD devices using a cholesteric liquid crystal color filter (CCF) layer have been researched and developed. The CCF layer uses a selective reflection property of cholesteric liquid crystal (CLC). Since a wavelength band of transmitted or reflected light is determined according to a helical pitch of the CLC, a CCF layer can be obtained by forming a CLC to have a different helical pitch according to a pixel region. Contrary to an absorption type color filter layer, the CCF layer uses a selective reflection property. Accordingly, a light efficiency is improved by reducing losses of the light from the backlight unit.

[0011] FIG. 2 is a schematic cross-sectional view of a transmissive liquid crystal display device using a cholesteric liquid crystal color filter layer according to the related art.

[0012] In FIG. 2, a transmissive liquid crystal display (LCD) device 50 includes first and second substrates 52 and 58 facing into and spaced apart from each other. A cholesteric liquid crystal color filter (CCF) layer 54 is formed on an inner surface of the first substrate 52 and a cholesteric liquid crystal (CLC) polarizing layer 64 is formed on an outer surface of the first substrate 52. A retardation layer 60 such as a quarter wave plate (QWP: $\lambda/4$ plate) and a linear polarizing layer 62 are sequentially formed on an outer surface of the second substrate 58. A liquid crystal layer 56 is formed between the CCF layer 54 and an inner surface of the second substrate 58. A backlight unit 66 is formed outside the CLC polarizing layer 64.

[0013] In cholesteric liquid crystal (CLC) used for the CCF layer 54 and the CLC polarizing layer 64, alignment vectors of CLC molecules form a helical structure. The CLC molecules twisted with a right-handed helical direction reflect only right-handed circularly polarized light, while the CLC molecules twisted with a left-handed helical direction reflect only left-handed circularly polarized light. When incident light has a polarization state such that the circular polarization direction is the same as the helical direction and satisfies a Bragg's reflection condition, the incident light is reflected. For example, the CCF layer 54 has a left-handed

helical direction and the CLC polarizing layer 64 has a right-handed helical direction. Accordingly, only left-handed circularly polarized light of incident light passes through the CLC polarizing layer 64. The left-handed circularly polarized light also passes through the CCF layer 54 and reaches the liquid crystal layer 56. The CCF layer 54 is formed to display one of red (R), green (G) and blue (B) colors in each pixel region. For example, in a pixel region for red color, the CCF layer 54 is formed to have helical pitches corresponding to green and blue colors. Thus, left-handed circularly polarized light corresponding to green and blue colors is reflected at the CCF layer 54 and only left-handed circularly polarized light corresponding to red color passes through the CCF layer 54. Similar formation of the CCF layer 54 can be applied to pixel regions for green and blue colors.

[0014] FIG. 3 is a schematic cross-sectional view illustrating polarization state of light passing through a transmissive liquid crystal display device according to the related art.

[0015] In FIG. 3, non-polarized light emitted from a backlight unit 66 includes nearly all wavelengths to have a broadband of wavelength. Among the non-polarized light, right-handed circularly polarized light reflects from a CLC polarizing layer 64 to the backlight unit 66 and only left-handed circularly polarized light passes through the CLC polarizing layer 64 according to characteristics of the CLC polarizing layer 64. When the right-handed circularly polarized light reflecting from the CLC polarizing layer 64 again reflects from the backlight unit 66, the circular polarization direction is inverted such that the right-handed circularly polarized light becomes left-handed circularly polarized light. Accordingly, the left-handed circularly polarized light reflecting from the backlight unit 66 can pass through the CLC polarizing layer 64. Therefore, most circularly polarized light finally has left-handedness during a recycling process of light and passes through the CLC polarizing layer 64.

[0016] When the left-handed circularly polarized light having a broadband of wavelength meets a CCF layer 54 of one pixel region, left-handed circularly polarized light having a wavelength corresponding to one of red, green and blue colors passes through the CCF layer 54. For example, in a pixel region for red color, the CCF layer 54 is formed to have a first CLC layer (not shown) reflecting only left-handed circularly polarized light having a wavelength corresponding to green color and a second CLC layer (not shown) reflecting only left-handed circularly polarized light having a wavelength corresponding to blue color. Accordingly, left-handed circularly polarized light having a wavelength corresponding to red color can pass through the CCF layer 54 in a pixel region for red color. When the left-handed circularly polarized light reflecting from the CCF layer 54 again reflects from the CLC polarizing layer 64, the circular polarization direction is inverted such that the left-handed circularly polarized light becomes right-handed circularly polarized light. Accordingly, the right-handed circularly polarized light reflecting from the CLC polarizing layer 64 can pass through the CCF layer 54. By repetition of the aforementioned process, most light having a wavelength corresponding to a specific color can pass the CCF layer 54 without loss.

[0017] While the circularly polarized light that has passed through the CCF layer 54 passes a liquid crystal layer 56 and a retardation layer 60, the circularly polarized light is retarded to be a linearly polarized light having a polarization direction parallel to an optical axis of a linear polarizing layer 62 and then emitted to the outside.

[0018] Since the CLC molecules have a property of recycling light, the CLC polarizing layer and the CCF layer have higher transmittance than a conventional linear polarizing layer and an absorption type color filter layer. Accordingly, high brightness can be obtained. However, reflected light for an obliquely incident light has a shorter wavelength than that for a perpendicularly incident light. As a result, light obliquely emitted from an LCD panel has different color (i.e. wavelength) from light perpendicularly emitted from the LCD panel. This difference causes a color inversion and a narrow viewing angle.

SUMMARY OF THE INVENTION

[0019] Accordingly, the present invention is directed to a transmissive liquid crystal display device that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

[0020] An advantage of the present invention is to provide a transmissive liquid crystal display device including a cholesteric liquid crystal color filter layer and first and second cholesteric liquid crystal polarizing films.

[0021] An advantage of the present invention is to provide a transmissive liquid crystal display device having a wide viewing angle and a high brightness.

[0022] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. These and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0023] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, a liquid crystal display device includes: first and second substrates facing and spaced apart from each other; a retardation layer on an outer surface of the first substrate; a linear polarizing layer on the retardation layer; a cholesteric liquid crystal color filter (CCF) layer on an inner surface of the second substrate; a liquid crystal layer between the first substrate and the CCF layer; a first cholesteric liquid crystal (CLC) polarizing layer on an outer surface of the second substrate, the first CLC polarizing layer having a first helical pitch of a first circular polarization direction; a second cholesteric liquid crystal (CLC) polarizing layer on the first CLC polarizing layer, the second CLC polarizing layer having a second helical pitch of a second circular polarization direction opposite to the first circular polarization direction; and a backlight unit outside the second CLC polarizing layer.

[0024] In another aspect of the present invention, a liquid crystal display device includes: first and second substrates facing and spaced apart from each other; a diffusing layer on an outer surface of the first substrate; a first linear polarizing layer on the diffusing layer; a cholesteric liquid crystal color filter (CCF) layer on an inner surface of the second substrate;

a retardation layer on the CCF layer; a second linear polarizing layer on the retardation layer; a liquid crystal layer between the first substrate and the second linear polarizing layer; a first cholesteric liquid crystal (CLC) polarizing layer on an outer surface of the second substrate, the first CLC polarizing layer having a first helical pitch of a first circular polarization direction; a second cholesteric liquid crystal (CLC) polarizing layer on the first CLC polarizing layer, the second CLC polarizing layer having a second helical pitch of a second circular polarization direction opposite to the first circular polarization direction; and a backlight unit outside the second CLC polarizing layer.

[0025] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0027] In the drawings:

[0028] FIG. 1 is a schematic perspective view of a liquid crystal display device according to the related art;

[0029] FIG. 2 is a schematic cross-sectional view of a transmissive liquid crystal display device using a cholesteric liquid crystal color filter layer according to the related art;

[0030] FIG. 3 is a schematic cross-sectional view illustrating polarization state of light passing through a transmissive liquid crystal display device according to the related art;

[0031] FIG. 4 is a schematic cross-sectional view of a transmissive liquid crystal display device according to a first embodiment of the present invention;

[0032] FIG. 5 is a schematic cross-sectional view illustrating polarization state of light passing through first and second cholesteric liquid crystal polarizing layers for a transmissive liquid crystal display device according to a first embodiment of the present invention;

[0033] FIGS. 6A to 6C are spectrums of a backlight unit, a second cholesteric liquid crystal polarizing layer and a first cholesteric liquid crystal polarizing layer according to a first embodiment of the present invention, respectively;

[0034] FIG. 7 is a schematic cross-sectional view illustrating polarization state of light passing through a transmissive liquid crystal display device according to a first embodiment of the present invention;

[0035] FIG. 8 is a schematic cross-sectional view of a transmissive liquid crystal display device according to a second embodiment of the present invention;

[0036] FIG. 9 is a schematic cross-sectional view of a transmissive liquid crystal display device according to a third embodiment of the present invention;

[0037] FIG. 10 is a schematic cross-sectional view of a transmissive liquid crystal device according to a fourth embodiment of the present invention; and

[0038] FIG. 11 is a schematic cross-sectional view illustrating polarization state of light passing through a transmissive liquid crystal display device according to a fourth embodiment of the present invention.

DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0039] Reference will now be made in detail to embodiments of the present invention, example of which is illustrated in the accompanying drawings. Wherever possible, similar reference numbers will be used throughout the drawings to refer to the same or like parts.

[0040] FIG. 4 is a schematic cross-sectional view of a transmissive liquid crystal display device according to a first embodiment of the present invention.

[0041] In FIG. 4, a transmissive liquid crystal display (LCD) device 100 includes first and second substrates 102 and 104 facing and spaced apart from each other, and a liquid crystal layer 108 interposed therebetween. A retardation layer 110 such as quarter wave plate (QWP) and a linear polarizing layer 112 are sequentially formed on an outer surface of the first substrate 102. A cholesteric liquid crystal color filter (CCF) layer 106 including red, green and blue sub CCFs is formed on an inner surface of the second substrate 104. First and second cholesteric liquid crystal (CLC) polarizing layers 114 and 116 are sequentially formed on an outer surface of the second substrate 104. A backlight unit 118 is disposed outside the second CLC polarizing layer 116.

[0042] The backlight unit 118 emits light of a spectrum that has peaks at wavelength bands corresponding to red, green and blue colors. The second CLC polarizing layer 116 has left-handed or right-handed helical pitch corresponding to a broadband of wavelength. The first CLC polarizing layer 114 does not have a continuous pitch but a discrete pitch of left-handedness or right-handedness to collect the light having wavelengths corresponding to red, green and blue colors. The pitch of the first CLC polarizing layer 114 is adjusted to correspond not to all wavelengths in a visible light range but to a wavelength in a specific light range. In addition, the first CLC polarizing layer 114 has a circular polarization direction opposite to the second CLC polarizing layer 116, while the CCF layer 106 has the same circular polarization direction as the first CLC polarizing layer 114.

[0043] FIG. 5 is a schematic cross-sectional view illustrating polarization state of light passing through first and second cholesteric liquid crystal polarizing layers for a transmissive liquid crystal display device according to a first embodiment of the present invention, and FIGS. 6A to 6C are spectrums of a backlight unit, a second cholesteric liquid crystal polarizing layer and a first cholesteric liquid crystal polarizing layer according to a first embodiment of the present invention, respectively.

[0044] In FIGS. 5 and 6A, a backlight unit 118 emits light of a spectrum having peaks at first wavelength bands " λ_R ", " λ_G " and " λ_B " corresponding to red, green and blue colors toward a second cholesteric liquid crystal (CLC) polarizing layer 116. Even though the light includes almost all wavelengths, dominant peaks of intensity are shown at specific wavelength bands " λ_R ", " λ_G " and " λ_B ".

[0045] In FIGS. 5 and 6B, the second CLC polarizing layer 116 has a left-handed helical pitch of a broadband

wavelength. Since left-handed circularly polarized light reflects from the second CLC polarizing layer **116**, about 50% of light emitted from the backlight unit **118** reflects from the second CLC polarizing layer **116**. However, the left-handed circularly polarized light reflecting from the second CLC polarizing layer **116** is inverted into right-handed circularly polarized light through a recycling process between the backlight unit **118** and the second CLC polarizing layer **116**, thereby passing through the second CLC polarizing layer **116**.

[0046] In FIGS. 5 and 6C, a first CLC polarizing layer **114** over the second CLC polarizing layer **116** has a right-handed helical pitch of second wavelength bands except for wavelengths corresponding to the red, green and blue colors. Accordingly, a spectrum of the first CLC polarizing layer **114** has peaks at the second wavelength bands between the first wavelength bands " λ_R ", " λ_G " and " λ_B " of FIG. 6A. For light obliquely incident to the first CLC polarizing layer **114**, since light having a shorter wavelength reflects, light having the first wavelength bands " λ_R ", " λ_G " and " λ_B " (of FIG. 6A) reflects from the first CLC polarizing layer **114**. The reflected right-handed circularly polarized light having the first wavelength bands " λ_R ", " λ_G " and " λ_B " (of FIG. 6A) passes through the first CLC polarizing layer **114** by the recycling process between the second CLC polarizing layer **116** and the backlight unit **118**.

[0047] The light emitted from the backlight unit **118** and corresponding to red, green and blue colors is collected toward a front direction by using the first and second CLC polarizing layers **114** and **116**. Therefore, high brightness is obtained. In FIG. 5, the first and second CLC polarizing layers **114** and **116** have right-handed and left-handed helical pitches, respectively. In another embodiment, the first and second CLC polarizing layers **114** and **116** can be formed to have left-handed and right-handed helical pitches, respectively. When the first and second CLC polarizing layers **114** and **116** have helical pitches of opposite direction, the light emitted from the backlight unit **118** can be collected.

[0048] FIG. 7 is a schematic cross-sectional view illustrating polarization state of light passing through a transmissive liquid crystal display device according to a first embodiment of the present invention.

[0049] In FIG. 7, light of a spectrum having peaks at first wavelength bands corresponding to red, green and blue colors is emitted from a backlight unit **118** toward a second cholesteric liquid crystal (CLC) polarizing layer **116** having left-handed helical pitch of a broadband wavelength. Among the light emitted from the backlight unit **118**, left-handed circularly polarized light reflects from the second CLC polarizing layer **116** and right-handed circularly polarized light passes through the second CLC polarizing layer **116**. The reflected left-handed circularly polarized light is inverted into right-handed circularly polarized light through a recycling process between the backlight unit **118** and the second CLC polarizing layer **116**, thereby passing through the second CLC polarizing layer **116**. Since a first CLC polarizing layer **114** has a right-handed helical pitch of wavelength bands except for wavelengths corresponding to the red, green and blue colors, right-handed circularly polarized light having wavelengths corresponding to red, green and blue colors passes through the first CLC polarizing layer **114**. In addition, for obliquely incident light, light having a

shorter wavelength reflects from the first CLC polarizing layer. Accordingly, obliquely incident light having wavelengths corresponding to red, green and blue colors reflects from the first CLC polarizing layer **114**. As a result, most of right-handed circularly polarized light having wavelengths corresponding to red, green and blue colors perpendicularly passes through the first CLC polarizing layer **114**. The right-handed circularly polarized light passing through the first CLC polarizing layer **114** is inverted into linearly polarized light having a polarization direction parallel to an optical axis of a linear polarizing layer **112** while passing through a CCF layer **106** having the same circular polarization direction as the first CLC polarizing layer **114**, a liquid crystal layer **108** and a retardation layer **110**, thereby passing through the linear polarizing layer **112**.

[0050] As illustrated in FIG. 7, most of light having wavelengths corresponding to red, green and blue colors is perpendicularly emitted by the first CLC polarizing layer **114** reflecting only right-handed circularly polarized light having specific wavelengths and the second CLC polarizing layer **116** only left-handed circularly polarized light having broadband of wavelength. Accordingly, little amount of light is obliquely emitted from the LCD panel and problems such as color inversion are prevented. However, as deviated from a center of the LCD panel, brightness decreases. To solve these problems, other embodiments are suggested.

[0051] FIG. 8 is a schematic cross-sectional view of a transmissive liquid crystal display device according to a second embodiment of the present invention.

[0052] In FIG. 8, a transmissive liquid crystal display (LCD) device **200** includes first and second substrates **202** and **204** facing and spaced apart from each other. A diffusing layer **210**, a retardation layer **212** such as quarter wave plate (QWP) and a linear polarizing layer **214** are sequentially formed on an outer surface of the first substrate **202**. A cholesteric liquid crystal color filter (CCF) layer **206** is formed on an inner surface of the second substrate **204**, and a liquid crystal layer **208** is formed between the first substrate **202** and the CCF layer **206**. A first cholesteric liquid crystal (CLC) polarizing layer **216** having right-handed helical pitch and a second CLC polarizing layer **218** having left-handed helical pitch are sequentially formed on an outer surface of the second substrate **204**. A backlight unit **220** is disposed outside the second CLC polarizing layer **218**.

[0053] The first CLC polarizing layer **216** does not have a continuous pitch but a discrete pitch of right-handedness to collect light from the backlight unit **220** having wavelengths corresponding to red, green and blue colors, while the second CLC polarizing layer **218** has a continuous pitch corresponding to a broadband of wavelength. The pitch of the first CLC polarizing layer **216** is adjusted to correspond not to all wavelengths in a visible light range but to a wavelength in a specific range. In addition, the first CLC polarizing layer **216** has a circular polarization direction opposite to the second CLC polarizing layer **218**, while the CCF layer **206** has the same circular polarization direction as the first CLC polarizing layer **216**.

[0054] Since light perpendicularly passing through the second and first CLC polarizing layers **218** and **216** and the liquid crystal layer **208** is diffused through the diffusing layer **210**, a wide viewing angle is obtained. A hologram diffuser or a conventional diffuser in a backlight unit can be

used as the diffusing layer **210**. Even though the diffusing layer **210** is formed on the outer surface of the first substrate **202** in **FIG. 8**, the diffusing layer **210** can be formed on an inner surface of the first substrate **202** in another embodiment. In particular, the diffusing layer **210** can be formed inside or outside the LCD panel according to characteristics of display quality.

[0055] **FIG. 9** is a schematic cross-sectional view of a transmissive liquid crystal display device according to a third embodiment of the present invention.

[0056] In **FIG. 9**, a transmissive liquid crystal display (LCD) device **300** includes first and second substrates **302** and **304** facing and spaced apart from each other. A diffusing layer **310**, a retardation layer **312** such as quarter wave plate (QWP), a compensation layer **314** for viewing angle and a linear polarizing layer **316** are sequentially formed on an outer surface of the first substrate **302**. A cholesteric liquid crystal color filter (CCF) layer **306** is formed on an inner surface of the second substrate **304**, and a liquid crystal layer **308** is formed between the first substrate **302** and the CCF layer **306**. A first cholesteric liquid crystal (CLC) polarizing layer **318** having right-handed helical pitch and a second CLC polarizing layer **320** having left-handed helical pitch are sequentially formed on an outer surface of the second substrate **304**. A backlight unit **322** is disposed outside the second CLC polarizing layer **320**.

[0057] The first CLC polarizing layer **318** does not have a continuous pitch but a discrete pitch of right-handedness to collect light from the backlight unit **322** having wavelengths corresponding to red, green and blue colors, while the second CLC polarizing layer **320** has a continuous pitch corresponding to a broadband of wavelength. The pitch of the first CLC polarizing layer **318** is adjusted to correspond not to all wavelengths in a visible light range but to a wavelength in a specific range. In addition, the first CLC polarizing layer **318** has a circular polarization direction opposite to the second CLC polarizing layer **320**, while the CCF layer **306** has the same circular polarization direction as the first CLC polarizing layer **318**.

[0058] When light perpendicularly passing through the second and first CLC polarizing layers **320** and **318** and the liquid crystal layer **308** is diffused along a direction oblique to a perpendicular direction through the diffusing layer **310**, the diffused light has a different retardation value from light perpendicularly emitted from the diffusing layer **310**. This difference for the oblique light causes reduction of contrast ratio in a side view. The compensation layer **314** compensates the retardation value difference through the retardation layer **312**. Since a color difference between front and side is compensated, a viewing angle is wider.

[0059] **FIG. 10** is a schematic cross-sectional view of a transmissive liquid crystal device according to a fourth embodiment of the present invention.

[0060] In **FIG. 10**, a transmissive liquid crystal display (LCD) device **400** includes first and second substrates **402** and **406** facing and spaced apart from each other. A diffusing layer **418**, a first linear polarizing layer **420** are sequentially formed on an outer surface of the first substrate **402**. A cholesteric liquid crystal color filter (CCF) layer **408**, a retardation layer **410** such as quarter wave plate (QWP) and a second linear polarizing layer **412** are sequentially formed

on an inner surface of the second substrate **404**. A liquid crystal layer **416** is formed between the first substrate **402** and the second linear polarizing layer **412**. A first cholesteric liquid crystal (CLC) polarizing layer **422** having right-handed helical pitch and a second CLC polarizing layer **424** having left-handed helical pitch are sequentially formed on an outer surface of the second substrate **406**. A backlight unit **426** is disposed outside the second CLC polarizing layer **424**.

[0061] Since the retardation layer **410** and the second linear polarizing layer **412** are formed between the liquid crystal layer **416** and the CCF layer **408**, an additional compensation layer for viewing angle on the diffusing layer **418** is not necessary.

[0062] **FIG. 11** is a schematic cross-sectional view illustrating polarization state of light passing through a transmissive liquid crystal display device according to a fourth embodiment of the present invention.

[0063] In **FIG. 11**, among light emitted from a backlight unit **426**, only left-handed circularly polarized light reflects from a second CLC polarizing layer **424** and right-handed circularly polarized light passes through the second CLC polarizing layer **424**. The reflected left-handed circularly polarized light is inverted into right-handed circularly polarized light through a recycling process between the backlight unit **426** and the second CLC polarizing layer **424**, thereby passing through the second CLC polarizing layer **424**.

[0064] When the right-handed circularly polarized light emitted from the second CLC polarizing layer **424** enters a first CLC polarizing layer **422**, obliquely incident light corresponding to red, green and blue colors reflects from the first CLC polarizing layer **422**. The reflected obliquely incident light is perpendicularly emitted toward the first CLC polarizing layer **422** through the recycling process. Accordingly, the right-handed circularly polarized light is perpendicularly emitted from the first CLC polarizing layer **422** and passes through a CCF layer **408**. While passing through a retardation layer **410**, the right-handed circularly polarized light is inverted into a linearly polarized light having a polarization direction parallel to an optical axis of a second linear polarizing layer **412**. As a result, the linearly polarized light passes through the second linear polarizing layer **412** and is emitted through a liquid crystal layer **416**, a diffusing layer **418** and a first linear polarizing layer **420**. A compensation layer for viewing angle may be formed on the diffusing layer **418** in another embodiment.

[0065] Even though a transmissive LCD device has first and second CLC polarizing layers having discrete and continuous helical pitches, respectively, in the first to fourth embodiments of the present invention, the first and second CLC polarizing layers may be formed to have continuous and discrete helical pitches, respectively, in the other embodiments. Accordingly, a transmissive LCD device of the present invention has a structure such that one of the first and second CLC polarizing layers has a discrete helical pitch and the other of the first and second CLC polarizing layers has a continuous helical pitch. Moreover, a CCF layer may be formed to have the same circular polarization direction as a CLC polarizing layer having a discrete helical pitch.

[0066] In a transmissive LCD device according to the present invention, light is effectively collected by forming

the first and second CLC polarizing layers between the backlight unit and the CCF layer. Moreover, high display quality is obtained by reducing color differences between front and oblique positions.

[0067] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A liquid crystal display device, comprising:
 - first and second substrates facing and spaced apart from each other;
 - a retardation layer on an outer surface of the first substrate;
 - a linear polarizing layer on the retardation layer;
 - a cholesteric liquid crystal color filter (CCF) layer on an inner surface of the second substrate;
 - a liquid crystal layer between the first substrate and the CCF layer;
 - a first cholesteric liquid crystal (CLC) polarizing layer on an outer surface of the second substrate and having a first helical pitch of a first circular polarization direction;
 - a second cholesteric liquid crystal (CLC) polarizing layer on the first CLC polarizing layer, the second CLC polarizing layer having a second helical pitch of a second circular polarization direction opposite to the first circular polarization direction; and
 - a backlight unit outside the second CLC polarizing layer.
2. The device according to claim 1, wherein the first helical pitch is discrete and the second helical pitch is continuous.
3. The device according to claim 2, wherein the first helical pitch corresponds to bands of wavelengths adjacent to red, green and blue colors, and the second helical pitch corresponds to a broadband of wavelength.
4. The device according to claim 3, the CCF layer has a third helical pitch of a third circular polarization direction the same as the first circular polarization direction.
5. The device according to claim 3, the third helical pitch corresponds to bands of wavelengths of red, green and blue colors.
6. The device according to claim 3, the first to third circular polarization direction is one of right-handedness and left-handedness.
7. The device according to claim 1, wherein the first helical pitch is continuous and the second helical pitch is discrete.
8. The device according to claim 1, further comprising a diffusing layer between the first substrate and the retardation layer.

9. The device according to claim 8, further comprising a compensation layer of viewing angle between the retardation layer and the linear polarizing layer.

10. The device according to claim 1, wherein the backlight unit emits light of a spectrum having peaks at wavelength bands corresponding to red, green and blue colors.

11. The device according to claim 1, wherein the retardation layer is a quarter wave plate.

12. A liquid crystal display device, comprising:

- first and second substrates facing and spaced apart from each other;
- a diffusing layer on an outer surface of the first substrate;
- a first linear polarizing layer on the diffusing layer;
- a cholesteric liquid crystal color filter (CCF) layer on an inner surface of the second substrate;
- a retardation layer on the CCF layer;
- a second linear polarizing layer on the retardation layer;
- a liquid crystal layer between the first substrate and the second linear polarizing layer;
- a first cholesteric liquid crystal (CLC) polarizing layer on an outer surface of the second substrate and having a first helical pitch of a first circular polarization direction;
- a second cholesteric liquid crystal (CLC) polarizing layer on the first CLC polarizing layer, the second CLC polarizing layer having a second helical pitch of a second circular polarization direction opposite to the first circular polarization direction; and
- a backlight unit outside the second CLC polarizing layer.

13. The device according to claim 12, wherein the first helical pitch is discrete and the second helical pitch is continuous.

14. The device according to claim 13, wherein the first helical pitch corresponds to bands of wavelengths adjacent to red, green and blue colors, and the second helical pitch corresponds to a broadband of wavelength.

15. The device according to claim 14, the CCF layer has a third helical pitch of a third circular polarization direction the same as the first circular polarization direction.

16. The device according to claim 14, the third helical pitch corresponds to bands of wavelengths of red, green and blue colors.

17. The device according to claim 14, the first to third circular polarization direction is one of right-handedness and left-handedness.

18. The device according to claim 12, wherein the first helical pitch is continuous and the second helical pitch is discrete.

19. The device according to claim 12, further comprising a compensation layer of viewing angle between the diffusing layer and the first linear polarizing layer.

20. The device according to claim 12, wherein the backlight unit emits light of a spectrum having peaks at wavelength bands corresponding to red, green and blue colors.

* * * * *

专利名称(译)	使用胆甾型液晶的液晶显示装置		
公开(公告)号	US20040008302A1	公开(公告)日	2004-01-15
申请号	US10/614293	申请日	2003-07-08
[标]申请(专利权)人(译)	MOON JONG WEON		
申请(专利权)人(译)	MOON JONG-WEON		
当前申请(专利权)人(译)	MOON JONG-WEON		
[标]发明人	MOON JONG WEON		
发明人	MOON, JONG-WEON		
IPC分类号	G02F1/1333 G02F1/1335 G02F1/13357		
CPC分类号	G02F1/133514 G02F1/133533 G02F2001/133543 G02F1/13362 G02F1/133536		
优先权	1020020039609 2002-07-09 KR		
其他公开文献	US7253858		
外部链接	Espacenet USPTO		

摘要(译)

一种液晶显示装置，包括：第一基板和第二基板，彼此面对并且彼此间隔开；在第一基板的外表面上的延迟层；延迟层上的线性偏振层；在第二基板的内表面上的胆甾型液晶滤色器（CCF）层；第一基板和CCF层之间的液晶层；在第二基板的外表面上的第一胆甾型液晶（CLC）偏振层，第一CLC偏振层具有第一圆偏振方向的第一螺距；第一CLC层上的第二胆甾型液晶（CLC）偏振层，第二CLC偏振层具有与第一圆偏振方向相反的第二圆偏振方向的第二螺旋间距；以及第二CLC层外部的背光单元。

