



US 20040222813A1

(19) **United States**(12) **Patent Application Publication****Kim et al.**(10) **Pub. No.: US 2004/0222813 A1**(43) **Pub. Date: Nov. 11, 2004**(54) **METHOD AND APPARATUS FOR TESTING
LIQUID CRYSTAL DISPLAY**(30) **Foreign Application Priority Data**

May 6, 2003 (KR)..... P2003-28646

(76) Inventors: **Jong Dam Kim**, Kyonggi-do (KR);
Hyun Kyu Lee, Seoul (KR); **Yong Jin
Cho**, Seoul (KR); **See Hwa Jeong**,
Kyonggi-do (KR)**Publication Classification**(51) **Int. Cl.⁷** **G01R 31/00**(52) **U.S. Cl.** **324/770**

Correspondence Address:

**BIRCH STEWART KOLASCH & BIRCH
PO BOX 747
FALLS CHURCH, VA 22040-0747 (US)**(21) Appl. No.: **10/665,576**(22) Filed: **Sep. 22, 2003**(57) **ABSTRACT**

A method and apparatus are provided for inspecting an electrical defectiveness of a liquid crystal display substrate. The method includes shorting ESD protection devices with a conductive shorting bar to form a current path on each of signal wirings of the substrate, supplying a current to the signal wirings, and determining a defectiveness of the signal wirings depending on the current flowing on the signal wirings.

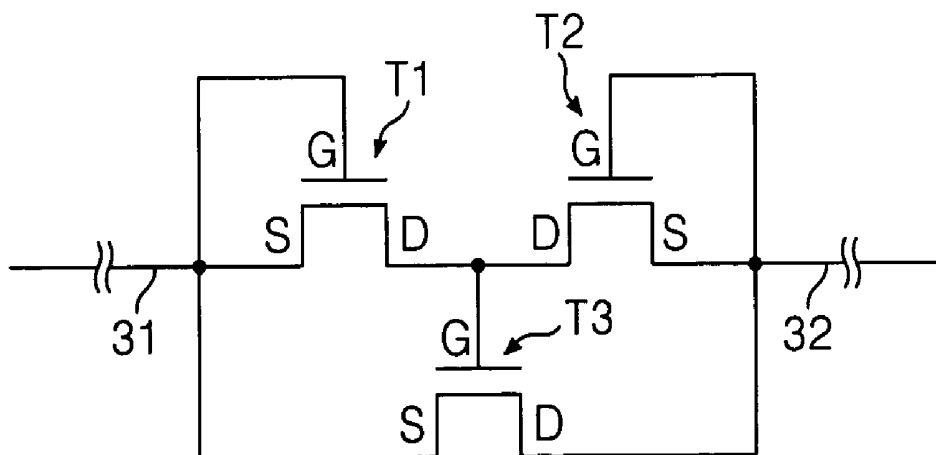


FIG. 1
RELATED ART

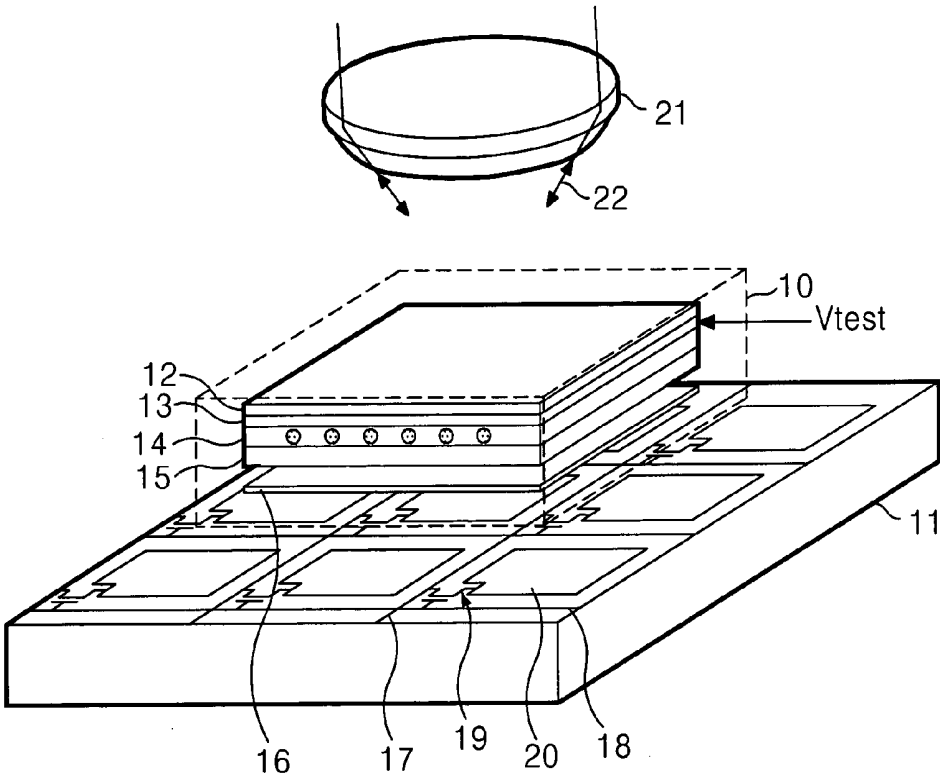


FIG.2

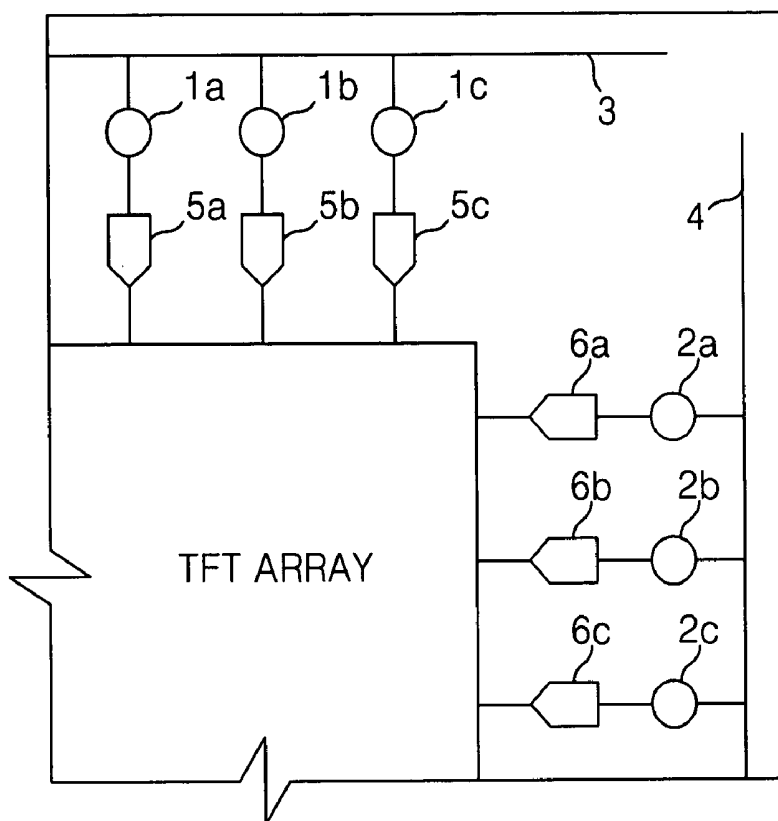


FIG.3

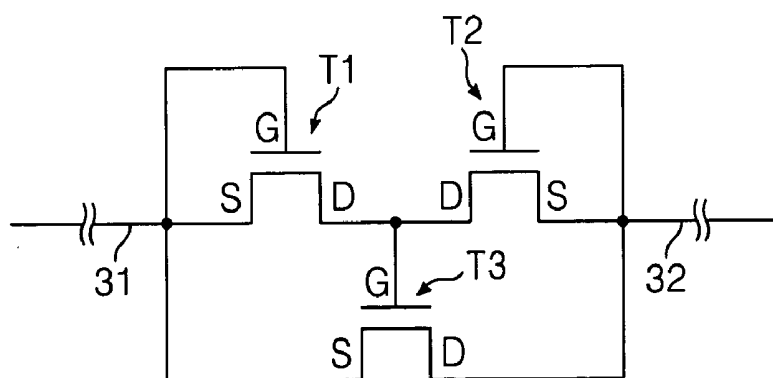


FIG. 4

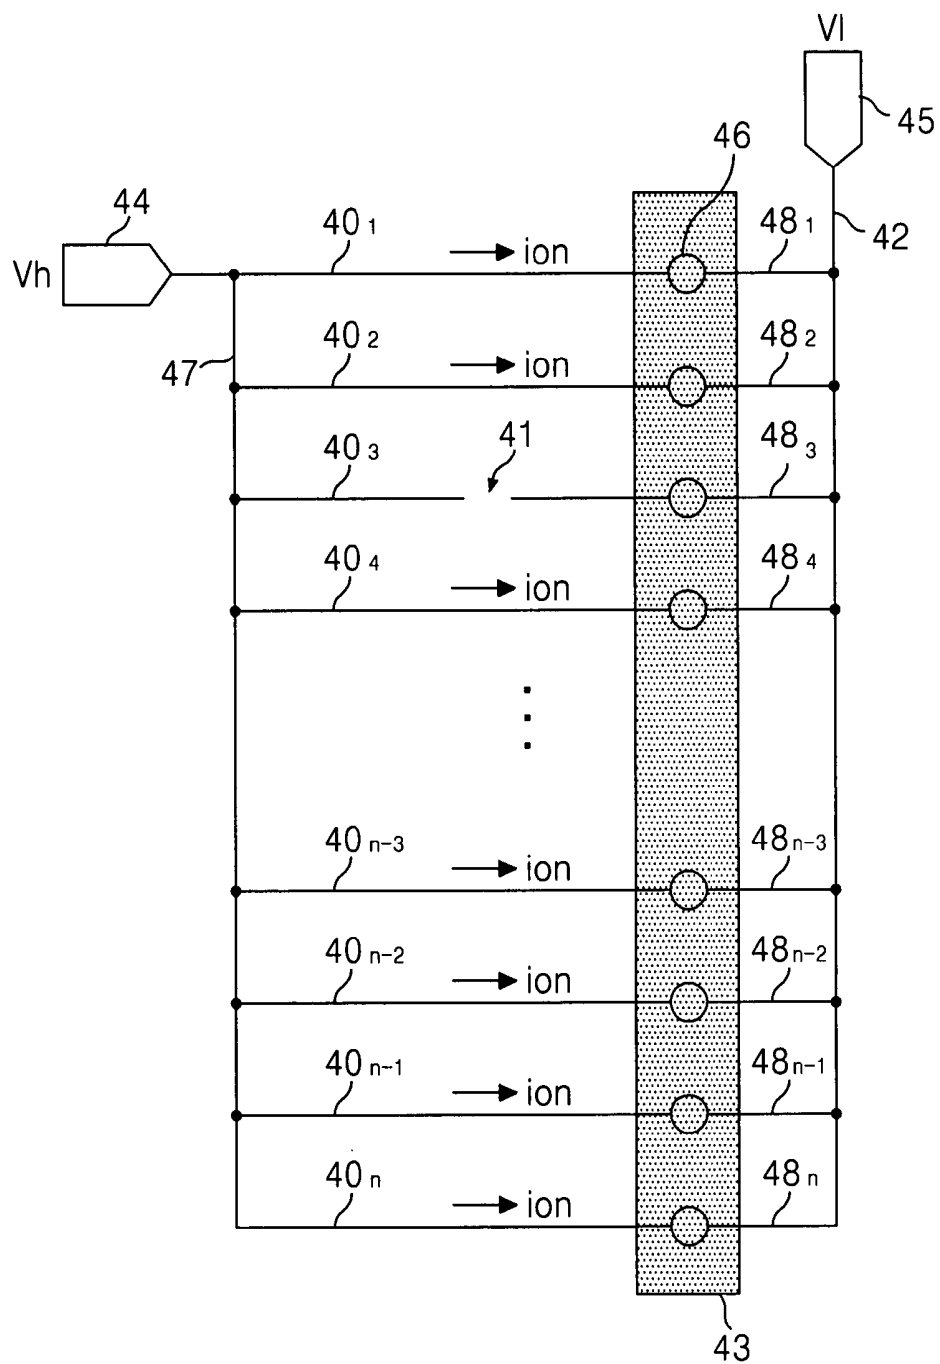


FIG. 5

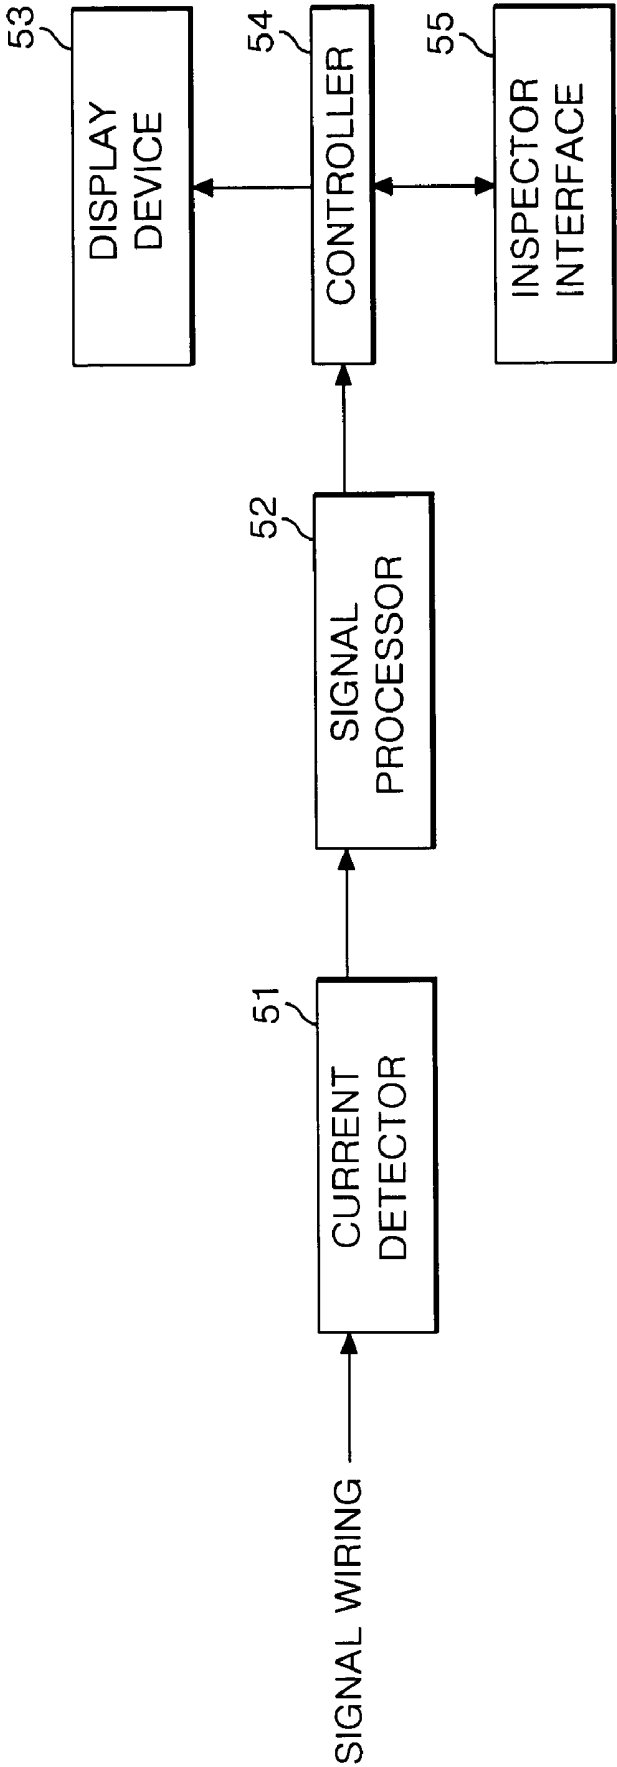


FIG. 6

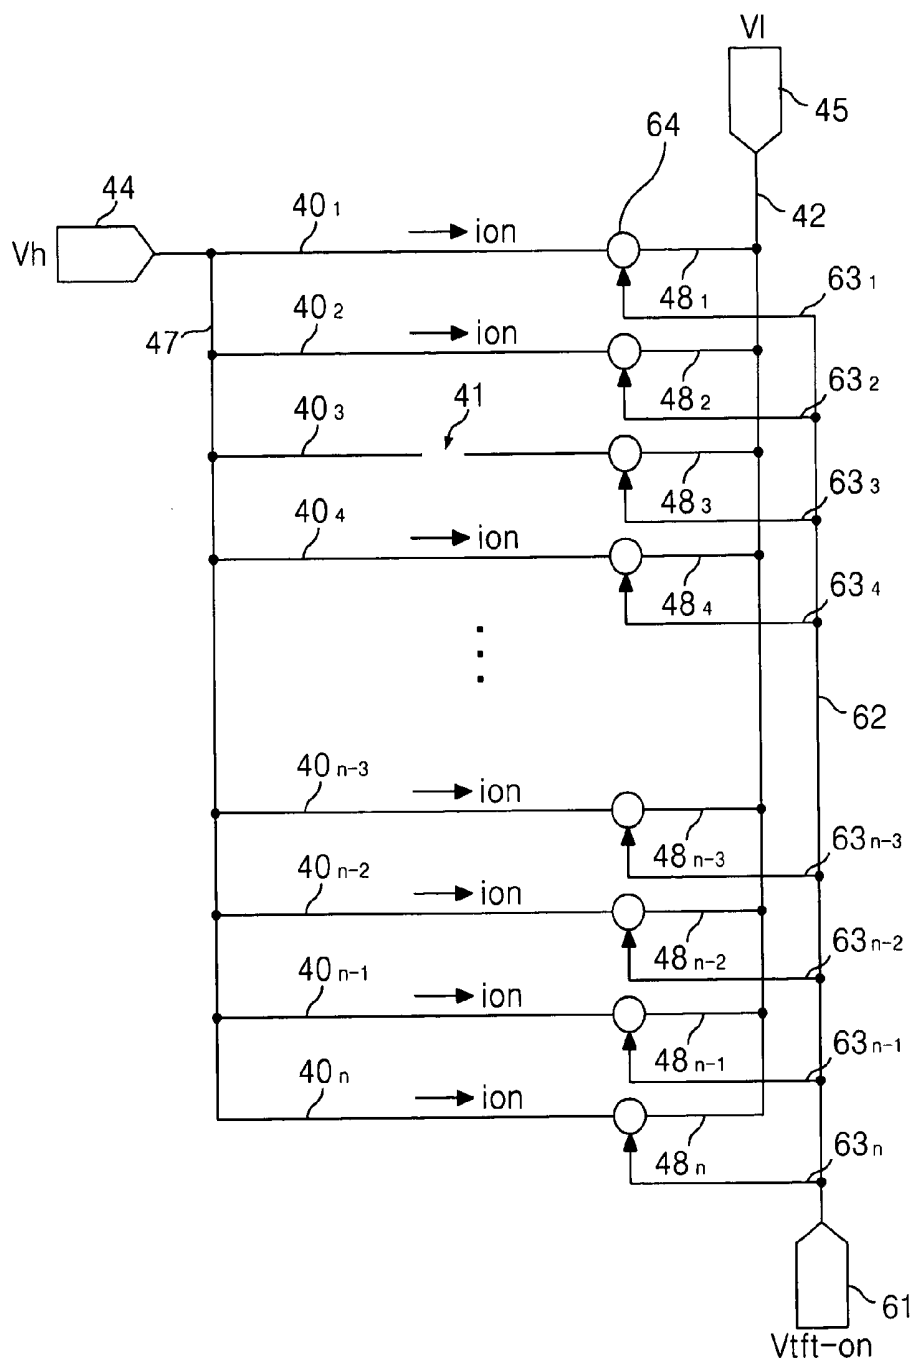


FIG. 8


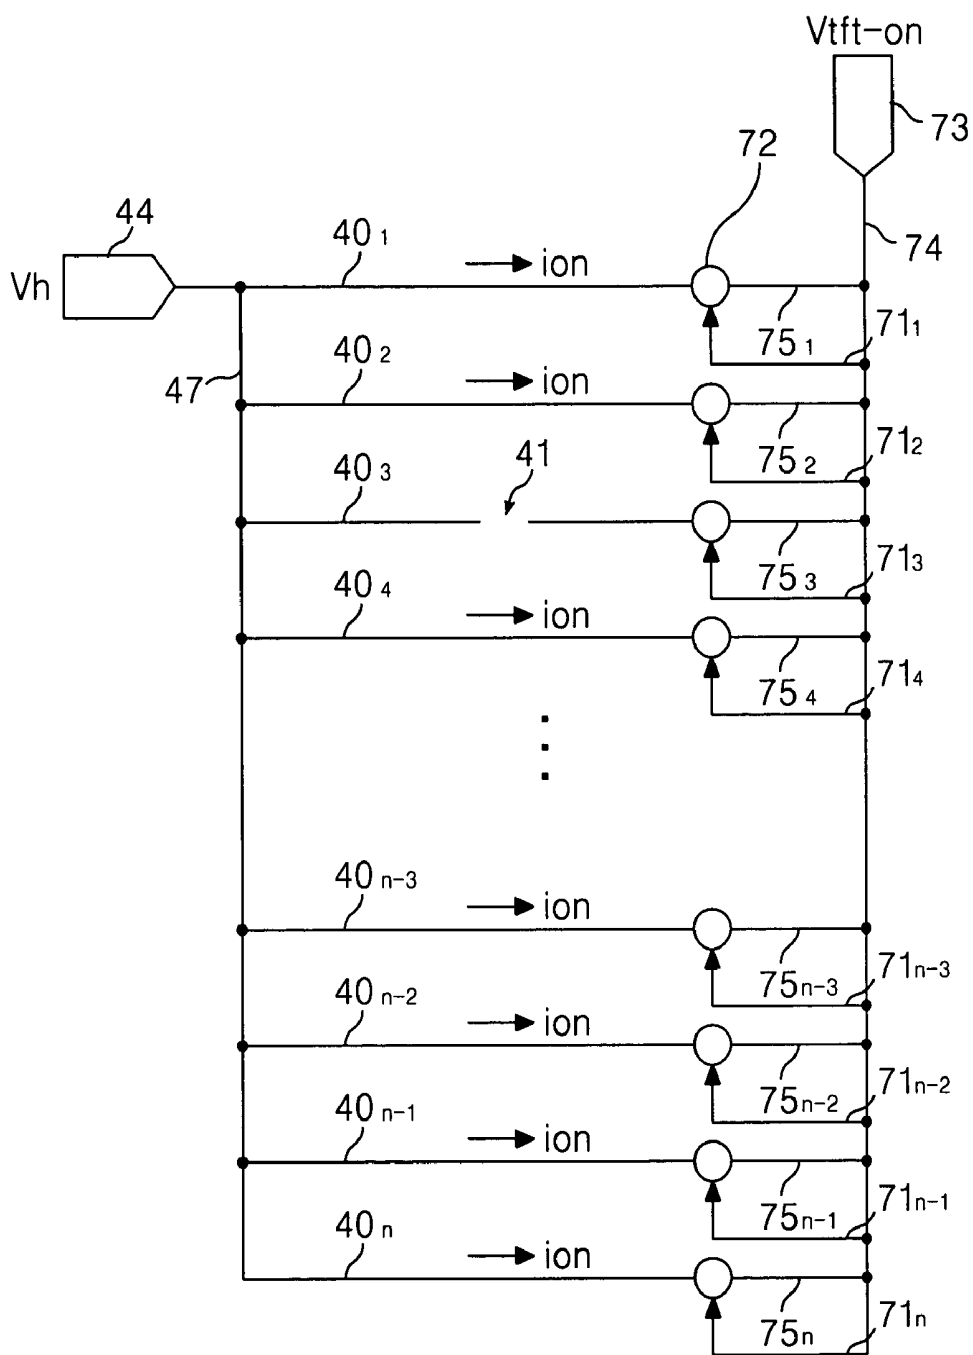


FIG. 9

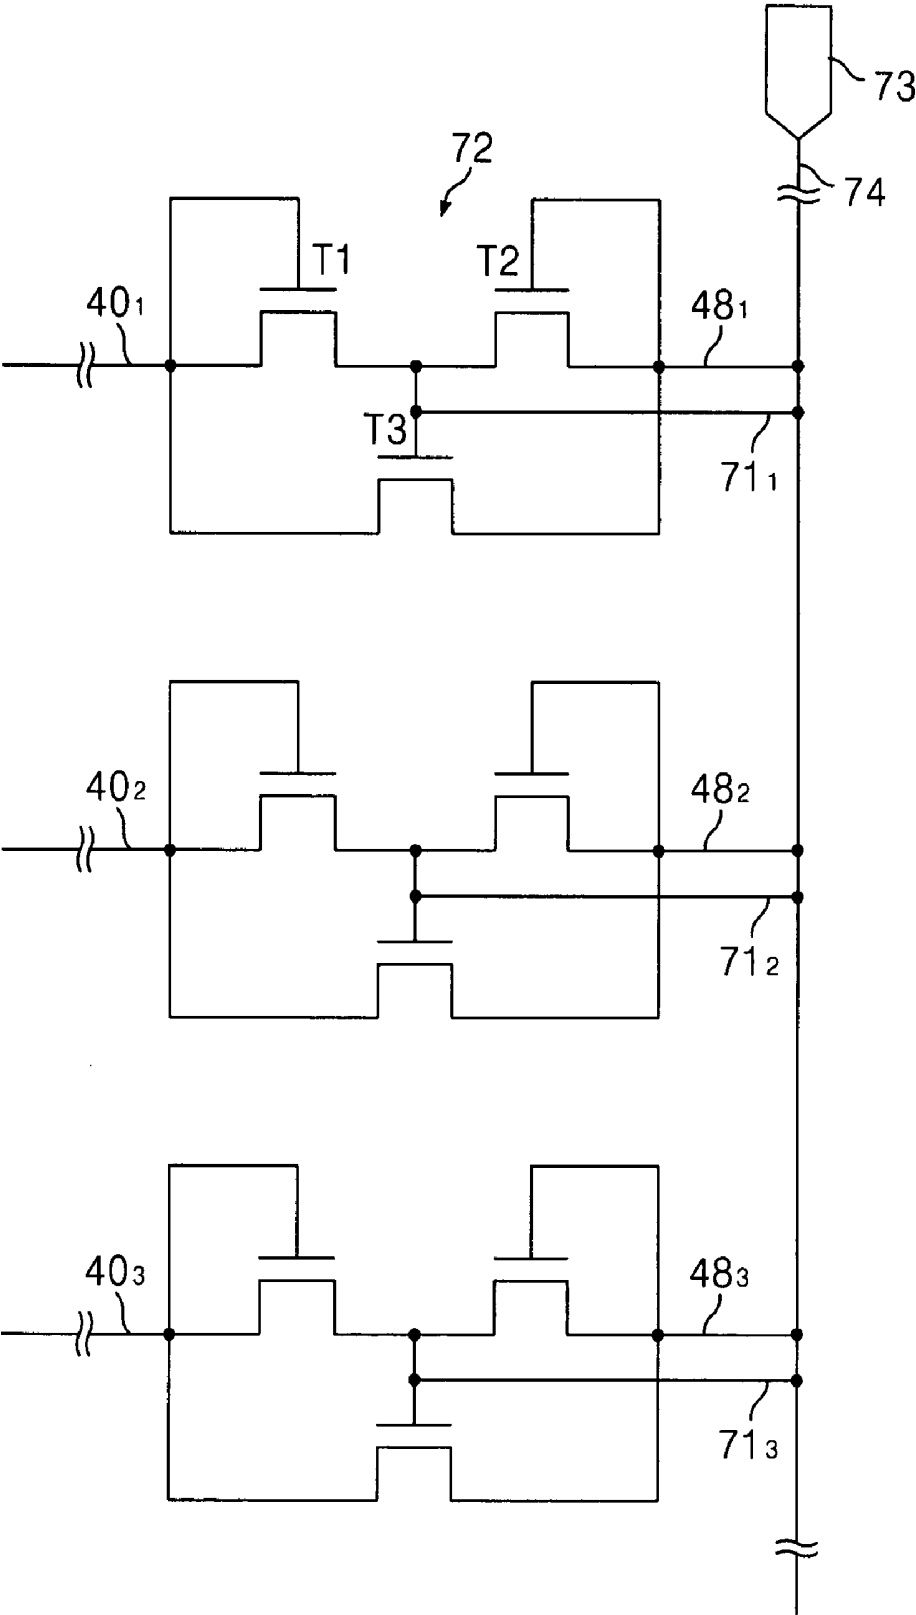

METHOD AND APPARATUS FOR TESTING LIQUID CRYSTAL DISPLAY

[0001] The present application claims, under 35 U.S.C. § 119, the priority benefit of Korean Patent Application No. P2003-28646 filed May 6, 2003, the entire contents of which are herein fully incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display (LCD), and more particularly, to a method and apparatus for inspecting an electrical defectiveness of an LCD by using an electrostatic discharge damage (ESD) protection device.

[0004] 2. Description of the Related Art

[0005] Display apparatuses have become important as visual information transferring media. Among the display apparatuses, a cathode ray tube is widely used at present, but is disadvantageous in that its weight and volume are large. Therefore, various types of flat display apparatuses have been developed that are capable of overcoming the defects of the cathode ray tube. An LCD, a field emission display (FED), a plasma display panel (PDP), and an electroluminescence (EL) display are different examples of flat display apparatus. Most of these apparatuses are available in the market.

[0006] The LCD device is easily adaptive due its smallness which improves productivity. Thus, it is quickly replacing the cathode ray tubes in many applications. In particular, the LCD device of an active matrix type for driving a liquid crystal cell by using a thin film transistor (hereinafter referred to as "TFT") has an advantage in that the picture quality it provides is excellent, and its power consumption is low. Such LCDs have been rapidly developed into a large size and high definition due to the recent productivity technology and research.

[0007] A process for fabricating the LCD device of the active matrix type is divided into a substrate cleaning, a substrate patterning, an alignment forming/rubbing, a substrate assembling/a liquid crystal material injecting, a mounting, an inspecting and a repairing, etc.

[0008] Generally, impurities on the substrate surface of the LCD device are removed by a detergent in the substrate cleaning process.

[0009] The substrate patterning process is divided into a patterning of an upper substrate (color filter substrate) of an LCD and a patterning of a lower substrate (TFT array substrate) of the LCD. There are formed a color filter, a common electrode, a black matrix, etc. on the upper substrate. There are formed signal wirings such as data lines and gate lines on the lower substrate, TFTs (thin film transistors) each at an intersection of the corresponding data line and the corresponding gate line, and pixel electrodes each in a pixel region between the corresponding gate line and the corresponding data line connected to a source electrode of the TFT.

[0010] An alignment film is applied to each of the upper substrate and the lower substrate in the alignment film forming/rubbing process and the alignment film is rubbed by a rubbing material.

[0011] In the substrate assembling/the liquid crystal injection process, the upper substrate and the lower substrate are bonded together by using a sealant, and the liquid crystal material and spacers are injected through a liquid crystal injection hole. Then the liquid crystal injection hole is sealed.

[0012] In the mounting process of the liquid crystal panel, a tape carrier package (TCP) mounted with integrated circuits such as a gate drive integrated circuit and a data drive integrated circuit, is connected to a pad part on the substrate. Such drive integrated circuits may be directly mounted on the substrate by using a chip on glass (COG) method other than a tape automated bonding (TCB) using the TCP described above.

[0013] The inspecting process includes a first electrical inspection performed after a variety of signal wirings and the pixel electrodes are formed and a second electrical inspection and a visual inspection performed after the substrate assembly/liquid crystal injection process. Specifically, the electrical inspection of the signal wirings and the pixel electrodes of the lower substrate followed by the substrate assembling may reduce an undesirable ratio and a waste matter and may find a defective substrate capable of repairing at an early stage.

[0014] The repairing process performs a restoration for a repairable substrate determined by the inspecting process. However, in the inspecting process, defective substrates beyond repair are discarded.

[0015] The electrical inspection of the lower substrate (TFT array substrate) of a general LCD, which is performed before the substrate assembling, frequently employs a method using an apparatus shown in **FIG. 1**. Referring to **FIG. 1**, this electrical inspection process includes: placing a modulator **10** over a TFT array substrate **11** of an LCD to be tested with a designated gap, applying a test voltage (V_{test}) to the modulator **10** while maintaining the gap, detecting a light reflected from the modulator **10** in response to the test voltage, and determining an electrical defectiveness of signal wirings **17** and **18** (data and gate lines) of the LCD substrate.

[0016] In the modulator **10**, a polymer-dispersed liquid crystal (hereinafter referred to as "PDLC") **14** is put between an upper transparent substrate **12** having a common electrode **13** formed thereon and a lower transparent substrate **15**. In the modulator **10**, a reflection sheet **16** is mounted on a rear surface of the lower transparent substrate **15**. The modulator **10** has an air nozzle and a vacuum nozzle for auto-gapping that is used to maintain a designated gap between the modular **10** and the TFT array substrate **11** being inspected.

[0017] Above the modulator **10**, a lens **21** is provided for focusing a light **22** from a light source (not shown) onto the modulator **10** and for transmitting any light **22** reflected from the modulator **10** during the inspection.

[0018] The TFT array substrate **11** being tested includes thereon TFTs **19**, the signal wirings **17** and **18** (data and gate lines crossing each other in a matrix format) and pixel electrodes **20**. The TFT array substrate **11** is formed in a liquid crystal display apparatus of the active matrix type.

[0019] The electrical inspection of the TFT array substrate **11** begins by loading the substrate **11** to be tested below the

modulator **10** and lowering the modulator **10** with a certain gap maintained between the modulator **10** and the substrate by auto-gapping. While the gap between the modulator **10** and the substrate **11** is maintained at a predetermined effective gap, the light **22** from the light source is radiated towards the modulator **10** and focused onto the modulator **10** via the focusing lens **21**, and simultaneously a test voltage (V_{test}) is applied to the common electrode **13**. And a test data applied from a driving circuit in a jig (not shown) is applied to the data lines **17** and a test scan signal is applied to the gate lines **18**. Then, an effective electric field is applied to the PDLC **14** between the common electrode **13** of the modulator **10** and the pixel electrode **20** to be tested.

[0020] If the electric field is not applied, the PDLC **14** causes the light **22** from the light source above the modulator **10** to be scattered. However, if the effective electric field (E) is applied, the liquid crystal molecules in the PDLC **14** become aligned to the direction of the effective electric field (E) and cause the light from the light source to be transmitted through the PDLC **14**. That is, if the wirings **17** and **18** properly work, then the PDLC **14** will cause the light from the light source to be transmitted through the PDLC **14**. Accordingly, during this electrical inspection process, the liquid crystal layer of the PDLC **14** corresponding to the pixel electrode **20** to which the voltage is properly applied and transmitted, causes the light **22** to be transmitted through the PDLC **14**. However, if the voltage is not properly transmitted to the pixel electrode **20**, e.g., due to a defect in the wiring(s) associated with the pixel electrode **20**, then the liquid crystal layer of the PDLC **14** causes the light **20** to be scattered in that part.

[0021] The light **22** transmitted through the liquid crystal layer of the PDLC **14** is reflected on the reflection sheet **16** of the modulator **10** and is reversely directed back to the lens **21**, while the light **22** scattered in the liquid crystal layer of the PDLC **14** is vanished and is not incident to the reflection sheet **16**. The light reflected by the reflection sheet **16** of the modulator **10** and transmitted out from the modulator **10** is then received by a charge-coupled device (CCD) (not shown) via the focusing lens **21**. The reflected light is then converted into an electrical signal and transferred to a display apparatus via a signal processing circuit. A testing inspector monitors an image or data displayed on the display apparatus to determine whether or not there is a defect in the wirings **17** and **18** of the substrate **11** and performs a second, closer inspection about the signal wirings **17** and **18** of doubtful point if a defect is initially detected.

[0022] The modulator **10** can provide reliability, but has a defect of high price. Further, since the inspection region is narrow as compared with the full area of the substrate **11**, the modulator **10** must repeat the process of inspection for each of different wirings sequentially by moving a designated distance in the vertical or horizontal direction and then stopping temporarily for auto-gapping. This requires a significant amount of inspection time.

SUMMARY OF THE INVENTION

[0023] Accordingly, it is an object of the present invention to provide a method and apparatus for inspecting a liquid crystal display in order to inspect an electrical defectiveness by using an ESD protection device.

[0024] It is another object of the present invention to provide a method and apparatus for inspecting a liquid crystal display, which overcome the limitations and disadvantages of the related art.

[0025] In order to achieve these and other objects of the invention, a method for inspecting a display device substrate having a plurality of signal wirings and a plurality of electrostatic discharge damage (ESD) protection devices, includes shorting the ESD protection devices to form a current path on each of the signal wirings, supplying a current to the signal wirings, and determining a defectiveness of at least one of the signal wirings depending on the current flowing on the signal wirings.

[0026] In accordance with an aspect of the invention, a method for inspecting a display device substrate having a plurality of signal wirings and a plurality of electrostatic discharge damage (ESD) protection devices, includes supplying a voltage to a control terminal of each of the ESD protection devices to turn on the ESD protection devices and thereby form a current path on each of the signal wirings, supplying a current to the signal wirings, and determining a defectiveness of at least one of the signal wirings depending on the current flowing on the signal wirings.

[0027] In accordance with an aspect of the invention, an apparatus for inspecting a display device substrate having a plurality of signal wirings and a plurality of electrostatic discharge damage (ESD) protection devices, includes a conductive shorting bar to short the ESD protection devices, a power supply to supply a current to the signal wirings, and a detection circuit to determine a defectiveness of the signal wirings depending on a current flowing on the signal wirings.

[0028] In accordance with an aspect of the invention, an apparatus for inspecting a display device substrate having a plurality of signal wirings and a plurality of electrostatic discharge damage (ESD) protection devices, includes a control circuit to supply a voltage to a control terminal of the ESD protection devices to turn on the ESD protection devices, so as to form a current path on the signal wirings, a power supply to supply a current to the signal wirings, and a detection circuit to determine a defectiveness of the signal wirings depending on a current flowing on the signal wirings.

[0029] These and other objects of the present application will become more readily apparent from the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0030] These and other objects of the invention will be apparent from the following detailed description of the embodiments of the present invention with reference to the accompanying drawings, in which:

[0031] FIG. 1 is a perspective view illustrating an apparatus for electrically inspecting a liquid crystal display in general;

[0032] FIG. 2 is a plan view illustrating an ESD protection device formed on a substrate of a liquid crystal panel according to an embodiment of the present invention;

[0033] FIG. 3 is a circuit diagram illustrating one example of a ESD protection device according to an embodiment of the present invention;

[0034] FIG. 4 illustrates an inspecting method of a liquid crystal display according to a first embodiment of the present invention;

[0035] FIG. 5 is a block diagram schematically illustrating an inspecting apparatus of a liquid crystal display according to an embodiment of the present invention;

[0036] FIG. 6 illustrates an inspecting method of a liquid crystal display according to a second embodiment of the present invention;

[0037] FIG. 7 is a circuit diagram in detail illustrating a connection of an ESD protection device shown in FIG. 6.

[0038] FIG. 8 illustrates an inspecting method of a liquid crystal display according to a third embodiment of the present invention; and

[0039] FIG. 9 is a circuit diagram in detail illustrating a connection of an ESD protection device shown in FIG. 8.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0040] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Hereinafter referring to FIGS. 2 to 9, the preferred embodiments of the present invention will be explained.

[0041] The present invention utilizes ESD protection devices present in a liquid crystal display to inspect the signal wirings of the TFT array substrate of the liquid crystal display. According to the present invention, the method and apparatus for inspecting the liquid crystal display inspects an electrical characteristic of the signal wirings formed within the TFT array of an effective display of the liquid crystal display in a state where ESD protection devices 1a to 1c and 2a to 2c are shorted as shown in FIG. 2.

[0042] Referring to FIG. 2, in a liquid crystal display having the TFT array on a TFT array substrate, a plurality of ESD protection devices 1a to 1c and 2a to 2c are provided at an exterior of the TFT array to provide ESD protection. As known, the TFT array includes the signal wirings such as data and gate lines, TFTs, pixel electrodes, etc. The ESD protection devices include a first group of ESD protection devices 1a to 1c connected between data pads 5a to 5c and a data shorting wiring 3 of the TFT array substrate, and a second group of ESD protection devices 2a to 2c connected between gate pads 6a to 6c and a gate shorting wiring 4. Generally a common voltage (Vcom) or a ground voltage (GND) is supplied to the data shorting wiring 3 and the gate shorting wiring 4.

[0043] A static electricity may be in flow in the TFT array during a fabricating process of the liquid crystal display such as during a depositing process or an alignment film rubbing process. The static electricity induces an insulating destruction of an insulating layer stacked on the TFT array substrate or destroys the TFTs. Further, if the static electricity is in

flow in the TFT array, an electrostatic force arises in the TFT array to cause impurities such as dust particles to attach on the TFT array substrate. At the generation of the static electricity which gives a fatal adverse effect to the TFT array substrate, the ESD protection devices 1a to 1c and 2a to 2c begin to operate to connect the signal wirings (data and gate wirings) of the TFT array to the data shorting wiring 3 and the gate shorting wiring 4, respectively. Accordingly, the static electricity is bypassed or discharged to the data shorting wiring 3 and the gate shorting wiring 4 via the ESD protection devices 1a to 1c and 2a to 2c. This causes the signal wirings of the TFT array and the shorting wirings 3 and 4 to become equipotential.

[0044] According to an embodiment of the present invention, the ESD protection devices 1a to 1c and 2a to 2c formed in the liquid crystal display are served to cut off the static electricity flowing in the TFT array and to short the adjacent signal wirings (e.g., data and gate lines) during an electrical inspection process to form a current path. One example of each of the ESD protection devices 1a to 1c and 2a to 2c at this stage according to the embodiment of the present invention is depicted in FIG. 3.

[0045] FIG. 3 shows a circuit diagram of an ESD protection device connected between a corresponding signal wiring (e.g., a data or gate line) and a corresponding data/gate shorting wiring of an LCD according to an embodiment of the present invention. Referring to FIG. 3, the ESD protection device (1a, 1b, 1c, 2a, 2b or 2c) includes first and second TFTs T1 and T2 whose source terminals S and gate terminals G are shorted respectively, and a third TFT T3 whose gate terminal G is connected to the drain terminals D of the first and the second TFTs T1 and T2.

[0046] Particularly, the drain terminal D of the first TFT T1 is connected to the drain terminal D of the second TFT T2. The source terminal S of the third TFT T3 is connected in common to the source and gate terminals G and S of the first TFT T1 and a first wiring 31. The drain terminal D of the third TFT T3 is connected in common to the source and gate terminals G and S of the second TFT T2 and a second wiring 32.

[0047] Here it is assumed that the first wiring 31 is connected to a signal wiring (e.g., data or gate line) of the TFT array and that the second wiring 32 is connected to a shorting wiring (gate or data shorting wiring such as 3 or 4 in FIG. 2) to which the common voltage Vcom or the ground voltage GND is supplied.

[0048] Generally the operation of the ESD protection devices is as follows. When the static electricity flows from the first wiring 31, the first TFT T1 is turned on and at the same time the second and third TFTs T2 and T3 are turned on while increasing the gate voltages of the second and third TFTs T2 and T3. Then, the current path is formed between the first wiring 31 and the second wiring 32 and the static electricity on the first wiring 31 is bypassed to a shorting bar via the second wiring 32.

[0049] On the other hand, if the static electricity does not flow from the first wiring 31, the first and third TFTs T1 and T3 are maintained at an off state and the gate terminal G of the second TFT T2 is maintained at a floating state since a voltage below a threshold voltage is applied to the gate terminals G. At this state, the ESD protection device blocks

the current path between the first wiring 31 and the second wiring 32 to insulate the first wiring 31 and the second wiring 32 from each other.

[0050] The inspection method and apparatus of the liquid crystal display according to the different embodiments of the present invention discussed herein employ ESD protection devices such as ones shown in FIGS. 2 and 3. However, the inspecting method and apparatus according to the present invention are not restricted to the use of the ESD protection devices shown in FIGS. 2 and 3, but are equally applicable to the use of any other type of ESD protection devices and to the inspection of any other types of displays.

[0051] FIGS. 4 and 5 illustrate the inspection method and apparatus of a liquid crystal display according to a first embodiment of the present invention.

[0052] Referring to FIGS. 4 and 5, the inspecting apparatus for a liquid crystal display according to the first embodiment of the present invention includes a conducting shorting bar 43 for shorting a plurality of ESD protection devices 46 of a liquid crystal display. The conducting shorting bar 43 is installed in a jig or housing and is movable (e.g., vertically) with respect to the ESD protection devices 46. Besides the conducting shorting bar 43, the inspection apparatus further includes a power supply for supplying a voltage to a substrate to be inspected, where the power supply may also be installed in the jig or housing.

[0053] The substrate to be inspected in this example is a lower substrate (TFT array substrate) of a liquid crystal panel. This substrate, as discussed in reference to FIG. 2, includes a TFT array having TFTs, pixel electrodes, and signal wirings 40₁ to 40_n such as gate wirings and/or data wirings (e.g., gate lines and/or data lines), etc., and the ESD protection devices and shorting wirings formed outside and around the TFT array.

[0054] Particularly, in the substrate shown in FIG. 4, a first shorting wiring 47 for shorting the signal wirings 40₁ to 40_n, a first pad 44 connected to the first shorting wiring 47, a second shorting wiring 42 connected commonly to side wirings 48₁ to 48_n connected to one side of the ESD protection devices 46, and a second pad 45 connected to the second shorting wiring 42.

[0055] In one embodiment, after forming the gate wirings, the gate electrodes of the TFTs and the gate pads on the lower substrate but prior to forming data wirings, data electrodes and data pads, the electrical inspection on the gate wirings and the gate electrodes can be performed.

[0056] Further, the inspection apparatus of the liquid crystal display according to the present invention includes, as shown in FIG. 5, a current detector 51 for detecting the current from the signal wirings 40₁ to 40_n, a signal processor 52 for signal processing the current from the current detector 51, a controller 54 for displaying the current data from the signal processor 52 on a display device 53 or other indication device, and an inspector interface 55 for supplying user data (e.g., user commands, instructions, etc.) to the controller 54. These components are all operatively coupled.

[0057] The current detector 51 is connected to each of the signal wirings 40₁ to 40_n of the substrate to detect the current flowing in each of the signal wirings 40₁ to 40_n while the electrical characteristic inspection on the substrate is carried

out. The signal processor 52 removes any noise of an analog current signal detected and provided from the current detector 51, amplifies the processed signal, converts it into a digital signal, and then supplies it to the controller 54.

[0058] The controller 54 displays the current data (i.e., data pertaining to the detected current) provided from the signal processor 52 with a designated display format such as a numerical data and/or a graph on the display device 53, and can control the display format in accordance with the data provided from the inspector interface 55. Further, the inspection apparatus according to the embodiment of the present invention may further include a light source (not shown) for representing a real image of the substrate, a CCD (charge coupled device), a magnification adjusting circuit of the CCD, and so on.

[0059] In order to carry out the electrical inspection of the substrate (e.g., TFT array substrate of an LCD) according to the first embodiment of the present invention, the substrate is loaded in the jig (or some other housing) and the ESD devices 46 of the substrate are electrically connected to the conductive shorting bar 43 as the conductive shorting bar 43 descends thereon. The power supply of the jig supplies a high voltage V_h to the first pad 44 and simultaneously supplies a low voltage V_l to the second pad 45. The high voltage V_h can be about several tens of volts (e.g., 10~99 volts) and the low voltage can be about several volts or a voltage between the common voltage V_{com} and the ground voltage GND. Then the ESD protection devices 46 are mutually shorted by the conductive shorting bar 43 of the jig and as a result, the current paths are established between the signal wirings 40₁ to 40_n and the side wirings 48₁ to 48_n, respectively, through the ESD protection devices 46.

[0060] In another embodiment, the signal wirings 40₁ to 40_n can be selectively shorted, so that any desired signal wiring(s) can be individually shorted for electrical inspection. This can be accomplished by providing portions of the conductive shorting bar 43 that are selectively movable and corresponding to the signal wirings. In another embodiment, in the conductive shorting bar 43, a separate additional voltage may be supplied to the gate terminal of the third TFT T3 of one or more ESD protection devices 46 to turn on the third TFT T3 and thus form a current path between the source terminal S and the drain terminal D of the corresponding third TFT T3. In this way, the signal wirings 40₁ to 40_n can be simultaneously or selectively inspected. Other schemes can be used to perform electrical inspection of the signal wirings as long as the electrical connection is provided between each of the signal wirings 40₁-40_n and a corresponding one of the side wirings 48₁ to 48_n.

[0061] If the current path is formed between the signal wirings 40₁ to 40_n and the side wirings 48₁ to 48_n, the high voltage V_h is applied to each of the signal wirings 40₁ to 40_n via the first pad 44 and the first shorting bar 47, and the low voltage V_l is applied to each of the side wirings 48₁ to 48_n via the second pad 45 and the second shorting wiring 42, whereby the current (ion) flows from each of the signal wirings 40₁ to 40_n to a corresponding one of the side wirings 48₁ to 48_n. At this time, if one of the signal wirings 40₁ to 40_n is opened due to, e.g., a pattern defect or pattern loss, the current will not flow therethrough. For example, if a portion of the third signal wiring 403 is opened (41) as shown in FIG. 4, then the current does not flow on the third signal

wiring 403. This non-flow of current will be detected by the current detector 51 so that a defect in the third signal wiring 403 can be detected according to the present invention. For instance, an inspector can monitor the image or the current data displayed on the display device 53 to recognize that the third signal wiring 403 is opened in the substrate being inspected. Then the substrate having the open signal wiring can be moved to the repair process as needed.

[0062] FIGS. 6 and 7 illustrates the inspection method for the liquid crystal display according to a second embodiment of the present invention. This method is implementable using the inspection apparatus shown in FIG. 5 or other suitable apparatus. In FIGS. 6 and 7, the same reference numerals are used on the same components as the substrate and the device of FIG. 4 to indicate same components, and thus the explanation therefore will be brief or omitted.

[0063] Referring to FIG. 6, the lower substrate of the liquid crystal panel includes the TFT array including the signal wirings 40₁ to 40_n, and pixel electrodes formed thereon, and ESD protection devices 64, the first shorting wiring 47, the first pad 44, the first side wirings 48₁ to 48_n, the second shorting wiring 42, the second pad 45, a third shorting wiring 63, a third pad 61 and second side wirings 63₁ to 63_n formed at an exterior side of the TFT array or substrate.

[0064] When the electrical inspection on the substrate is carried out according to the second embodiment of the present invention, a voltage V_{ft-on} greater than the threshold voltage of the TFTs (of the ESD protection devices 46) for turning on forcibly the TFTs of the ESD protection device 64 is applied to the third pad 61. This voltage is not applied to the third pad 61 at all other times.

[0065] The third shorting wiring 62 shorts the second side wirings 63₁ to 63_n to connect the second side wirings 63₁ to 63_n equipotentially. As shown in FIG. 7, the second side wirings 63₁ to 63_n are each connected between the gate terminal of the third TFT T3 in the corresponding ESD protection device 64 and the third shorting wiring 62. The third pad 61, the second side wirings 63₁ to 63_n and the third shorting wiring 62 supply the voltage V_{ft-on} to the ESD protection devices 64 only when the electrical inspection is carried out on the substrate. All other times, no such voltage is supplied to the third pad 61. Accordingly, since the third pad 61, the second wirings 63₁ to 63_n, the third shorting wiring 62 do not affect the ESD protection devices 64 during normal driving, these components remain on the substrate without being removed in the scribing process.

[0066] More specifically, on order to carry out the electrical inspection on the substrate as shown in FIGS. 6 and 7, a power supply (not shown) supplies the high voltage V_h to the first pad 44 and simultaneously supplies the low voltage V₁ to the second pad 45. At the same time, the same or different power supply applies the voltage V_{ft-on} to the third pad 61 as discussed above. Then a TFT within each of the ESD protection devices 64 is turned on in response to the voltage V_{ft-on} applied via the third pad 61, the third shorting wiring 62 and the second side wirings 63₁ to 63_n, so as to form a current path between the signal wirings 40₁ to 40_n and the first side wirings 48₁ to 48_n. In the case where each of the ESD protection devices 46 is comprised of three TFTs as shown in FIG. 3, the voltage supplied to the third pad 61 is applied to the gate terminal of the third TFT T3

maintaining a floating state upon the normal driving. In this case, the third TFT T3 is turned on in response to the voltage V_{ft-on} applied to its gate terminal G to form a current path between a corresponding one of the signal wirings 40₁ to 40_n and a corresponding one of the first side wirings 48₁ to 48_n through the third TFT T3.

[0067] If the current path is formed between the signal wirings 40₁ to 40_n and 63₁ to 63_n as described above, the high voltage V_h is applied and transmitted to the each of the signal wirings 40₁ to 40_n via the first pad 44 and the first shorting wiring 47, and the low voltage V₁ is applied and transmitted to the first side wirings 48₁ to 48_n via the second pad 45 and the second shorting wiring 42, whereby the current (ion) flows from the signal wirings 40₁ to 40_n to the first side wirings 48₁ to 48_n.

[0068] If any portion of one of the signal wirings (e.g., the third signal wiring 40₃) is opened, the current will not flow on that signal wiring. The detection of any current flow on that signal wiring will indicate whether or not there is a defect in that signal wiring.

[0069] In the current detection scheme, the current flowing on the signal wirings 40₁ to 40_n is detected by the inspection apparatus shown in FIG. 5. The inspector or user can determine the badness/defectiveness of any or all of the signal wirings 40₁ to 40_n formed on the substrate in real time depending on the detected current value.

[0070] FIGS. 8 and 9 illustrate the inspection method of the liquid crystal display according to a third embodiment of the present invention. This method is implementable using the inspection apparatus shown in FIG. 5 or other suitable apparatus. In FIGS. 8 and 9, the same reference numerals are used on the same components as the substrate and the device of FIG. 4 to indicate same components, and thus the explanation therefore will be brief or omitted.

[0071] Referring to FIG. 8, the lower substrate (e.g., TFT array substrate) of the liquid crystal panel according to the third embodiment of the present invention includes a TFT array having TFTs, pixel electrodes and the signal wirings 40₁ to 40_n, and ESD protection devices 72, the first shorting wiring 47, the first pad 44, first side wirings 75₁ to 75_n, a second shorting wiring 74, a second pad 73, third side wirings 71₁ to 71_n formed at an exterior side of the TFT array or the substrate.

[0072] When the electrical inspection on the substrate is carried out according to the third embodiment of the present invention, a voltage V_{ft-on} greater than the threshold voltage of a TFT (of the ESD protection device 72) for turning on forcibly the TFTs of the ESD protection devices 72 is applied at the pad 73. The second shorting wiring 74 shorts the first side wirings 75₁ to 75_n and the third side wirings 75₁ to 75_n to connect equipotentially all the first side wirings 75₁ to 75_n and the third side wirings 71₁ to 71_n. The third side wirings 71₁ to 71_n are each connected between a TFT gate terminal of the ESD protection device 72 and the second shorting wiring 74. The second pad 73, the second shorting wiring 74, the first side wirings 75₁ to 75_n and the third side wirings 75₁ to 75_n supply the voltage V_{ft-on} to the ESD protection devices 72 only when the electrical inspection is carried out on the substrate. All other times, such voltage is not supplied. Accordingly, since the second pad 73, the second shorting wiring 74, the first side wirings 75₁ to 75_n

and the third side wirings 71_1 to 71_n do not affect the ESD protection devices **72** during normal driving, these components can remain on the substrate in the scribing process.

[0073] In order to carry out the electrical inspection on the substrate according to the third embodiment, a power supply (not shown) supplies the high voltage V_h to the first pad **44** and simultaneously supplies the low voltage V_{tft-on} to the second pad **73**. The low voltage V_{tft-on} is lower than the high voltage V_h , but is set up to be greater than the threshold voltage of the TFT(s) of the ESD protection devices **72** to turn on the TFT(s). The voltage V_{tft-on} is applied to a gate terminal of a TFT of each of the ESD protection devices **72**. Then the TFTs within the ESD protection devices **72** are turned on in response to the voltage V_{tft-on} applied via the second pad **73**, the second shorting wiring **74** and the third side wirings 71_1 to 71_n to form a current path between the signal wirings 40_1 to 40_n and the first side wirings 75_1 to 75_n , respectively.

[0074] If each of the ESD protection devices **72** includes three TFTs as shown in **FIG. 3**, the voltage V_{tft-on} supplied to the second pad **73** is applied to the gate terminal of the third TFT **T3** (of each ESD protection device **72**) maintaining the floating state upon the normal driving as shown in **FIG. 9**. In this case, the third TFTs **T3** are turned on in response to the voltage V_{tft-on} applied to their gate terminal **G** to form the current paths between the signal wirings 40_1 to 40_n and the first side wirings 75_1 to 75_n , correspondingly, through the third TFTs **T3**.

[0075] If the current path is formed between the signal wirings 40_1 to 40_n and the first side wirings 75_1 to 75_n as described above, the high voltage V_h is applied to the each of the signal wirings 40_1 to 40_n via the first pad **44** and the first shorting wiring **47**, and the low voltage V_{tft-on} is applied via the second pad **73** and the second shorting wiring **73**, whereby the current (ion) flows from the signal wirings 40_1 to 40_n to the first side wirings 75_1 to 75_n , respectively.

[0076] If any portion of one of the signal wirings (e.g., the third signal wiring **403**) is opened, the current will not flow on that signal wiring. The detection of any current flow on that signal wiring will indicate whether or not there is a defect in that signal wiring.

[0077] In the current detection scheme, the current flowing on the signal wirings 40_1 to 40_n is detected by the inspection apparatus shown in **FIG. 5**. The inspector or user can determine the badness/defectiveness of any or all of the signal wirings 40_1 to 40_n formed on the substrate in real time depending on the detected current value.

[0078] Each of the ESD protection devices **46**, **64** and **72** can have a structure (three TFTs) as shown in **FIG. 3**. But the invention is not limited to such, can include other suitable structures for the ESD protection devices. Further, according to the present invention, all the signal wirings of a substrate (e.g., TFT array substrate of an LCD) to be inspected can be inspected simultaneously, sequentially, or selectively as desired by applying the appropriate voltages (V_h , V_{tft-on} , and/or V_1) simultaneously, sequentially, or selectively as desired. For instance, in **FIG. 8**, instead of providing one pad **44** for supplying the high voltage V_h , multiple pads each corresponding to one of the signal wirings can be provided to selectively or sequentially apply the high voltage V_h to the desired signal wiring(s). Other variations are possible.

[0079] As described above, when the method and apparatus for inspecting the liquid crystal display according to the present invention inspect the electrical defectiveness of the signal wirings formed on the substrate to be detected, it makes the ESD protection devices shorted or the TFTs within the ESD protection devices turned on forcibly to form the current path on the signal wiring formed in the TFT array of the effective display. By detecting the current flowing on the signal wiring, the defectiveness of any one of the signal wirings formed on the substrate can be identified and detected. Accordingly, the method and apparatus for inspecting the liquid crystal display according to the invention provide a precise and reliable inspection of the electrical components of the liquid crystal display and minimize the inspection speed greatly.

[0080] Although the present invention has been explained by the embodiments shown in the drawings described above, it should be understood to the ordinary skilled person in the art that the invention is not limited to the embodiments, but rather that various changes or modifications thereof are possible without departing from the spirit of the invention. For example, though the spirit of the invention mainly explains the electrical inspection of the liquid crystal display in the embodiment, it can be identically applied to the electrical inspection on the signal wirings formed on the flat display device different from that. Accordingly, the scope of the invention shall be determined only by the appended claims and their equivalents.

What is claimed is:

1. A method for inspecting a display device substrate having a plurality of signal wirings and a plurality of electrostatic discharge damage (ESD) protection devices, the method comprising steps of:

shorting the ESD protection devices to form a current path on each of the signal wirings;

supplying a current to the signal wirings; and

determining a defectiveness of at least one of the signal wirings depending on the current flowing on the signal wirings.

2. The method according to claim 1, wherein in the shorting step, the ESD protection devices are shorted with a conductive shorting bar.

3. The method according to claim 1, wherein the step of supplying the current to the signal wirings includes:

supplying a high voltage through a first shorting wiring connected to the signal wirings; and

supplying a low voltage through a second shorting wiring connected to the ESD protection devices.

4. The method according to claim 1, wherein in the shorting step, the display device substrate is a TFT array substrate of a liquid crystal display.

5. A method for inspecting a display device substrate having a plurality of signal wirings and a plurality of electrostatic discharge damage (ESD) protection devices, the method comprising steps of:

supplying a voltage to a control terminal of each of the ESD protection devices to turn on the ESD protection devices and thereby form a current path on each of the signal wirings;

supplying a current to the signal wirings; and

determining a defectiveness of at least one of the signal wirings depending on the current flowing on the signal wirings.

6. The method according to claim 5, wherein in the voltage supplying step, the voltage is supplied through a dummy shorting wiring connected to the control terminal of each of the ESD protection devices.

7. The method according to claim 6, wherein the control terminal of each of the ESD protection devices includes a gate terminal of a transistor.

8. The method according to claim 5, wherein in the voltage supplying step, the voltage is supplied through a shorting wiring connected to the control terminal of each of the ESD protection devices and to input/output terminals of the ESD protection devices.

9. The method according to claim 8, wherein in the voltage supplying step, the control terminal of each of the ESD protection devices includes a gate terminal of a transistor, and the input/output terminal of each of the ESD protection devices includes a source/drain terminal of the corresponding transistor.

10. The method according to claim 5, wherein in the voltage applying step, the display device substrate is a TFT array substrate of a liquid crystal display.

11. An apparatus for inspecting a display device substrate having a plurality of signal wirings and a plurality of electrostatic discharge damage (ESD) protection devices, the apparatus comprising:

a conductive shorting bar to short the ESD protection devices;

a power supply to supply a current to the signal wirings; and

a detection circuit to determine a defectiveness of at least one of the signal wirings depending on the current flowing on the signal wirings.

12. The apparatus according to claim 11, wherein the conductive shorting bar is provided in a jig.

13. The apparatus according to claim 11, further comprising:

a first shorting wiring connected to the signal wirings; and

a second shorting wiring connected to the ESD protection devices,

wherein the power supply supplies a high voltage to the signal wirings through the first shorting wiring, and a low voltage to the ESD protection devices through the second shorting wiring.

14. The apparatus according to claim 11, wherein the display device substrate is a TFT array substrate of a liquid crystal display.

15. An apparatus for inspecting a display device substrate having a plurality of signal wirings and a plurality of electrostatic discharge damage (ESD) protection devices, the apparatus comprising:

a control circuit to supply a voltage to a control terminal of each of the ESD protection devices to turn on the ESD protection devices, so as to form a current path on each of the signal wirings;

a power supply to supply a current to the signal wirings; and

a detection circuit to determine a defectiveness of at least one of the signal wirings depending on the current flowing on the signal wirings.

16. The apparatus according to claim 15, further comprising:

a dummy shorting wiring through which the control circuit supplies the voltage to the control terminal of each of the ESD protection devices.

17. The apparatus according to claim 16, wherein the dummy shorting wiring is formed on the display device substrate.

18. The apparatus according to claim 15, wherein the control terminal of each of the ESD protection devices includes a gate terminal of a transistor.

19. The apparatus according to claim 15, further comprising:

a shorting wiring connected to the control terminal of each of the ESD protection devices and to an input/output terminal of each of the ESD protection devices,

wherein the control circuit supplies the voltage to the control terminals of the ESD protection devices through the shorting wiring.

20. The apparatus according to claim 19, wherein the shorting wiring is formed on the display device substrate.

21. The apparatus according to claim 19, wherein the control terminal of each of the ESD protection devices includes a gate terminal of a transistor, and the input/output terminal of each of the ESD protection devices includes a source/drain terminal of the corresponding transistor.

22. The apparatus according to claim 15, wherein the display device substrate is a TFT array substrate of a liquid crystal display.

* * * * *

专利名称(译)	用于测试液晶显示器的方法和设备		
公开(公告)号	US20040222813A1	公开(公告)日	2004-11-11
申请号	US10/665576	申请日	2003-09-22
[标]申请(专利权)人(译)	金正日DAM 李炫KYU CHO勇进 JEONG SEE HWA		
申请(专利权)人(译)	金正日DAM 李炫KYU CHO勇进 JEONG SEE HWA		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KIM JONG DAM LEE HYUN KYU CHO YONG JIN JEONG SEE HWA		
发明人	KIM, JONG DAM LEE, HYUN KYU CHO, YONG JIN JEONG, SEE HWA		
IPC分类号	G02F1/13 G01R31/00 G09G3/00		
CPC分类号	G09G3/006		
优先权	1020030028646 2003-05-06 KR		
其他公开文献	US7132846		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种用于检查液晶显示器基板的电气缺陷的方法和设备。该方法包括用导电短路棒短路ESD保护装置，以在基板的每条信号布线上形成电流路径，向信号布线提供电流，并根据信号上流动的电流确定信号布线的缺陷。布线。

