



(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2006/0001800 A1**

Sanelle et al.

(43) **Pub. Date:**

Jan. 5, 2006

(54) **SUPER BRIGHT LOW REFLECTANCE LIQUID CRYSTAL DISPLAY**

(57) **ABSTRACT**

(76) Inventors: **Joseph J. Sanelle**, Westboro, MA (US); **Diggy R. Breiling**, Beaverton, OR (US); **Daniel R. Doyle**, Medway, MA (US)

A liquid crystal display (LCD) exhibiting enhanced optical viewing performance. In a preferred embodiment, the LCD comprises a liquid crystal display panel, the liquid crystal display panel comprising a pair of transparent substrates, liquid crystal material sandwiched between the transparent substrates and transparent electrodes positioned between the liquid crystal material and the transparent substrates. The LCD also comprises a rear polarizer assembly comprising a compensation film, a polarizer mounted on the rear surface of the compensation film, and a first index-matched, pressure sensitive adhesive (PSA) mounted on the front surface of the compensation film, the PSA being adhered to the rear surface of the LCD panel. The LCD also comprises a front polarizer assembly, the front polarizer assembly comprising a front polarizer, a compensation film mounted on the rear surface of the front polarizer and an index-matched PSA mounted on the front surface of the front polarizer. The front polarizer is crossed relative to the rear polarizer. The front polarizer assembly may be adhered to the front of the LCD panel with a second index-matched, optical bonding material or may be spaced therefrom by an air gap. A transparent cover is mounted on the second index-matched PSA. The transparent cover is preferably a plastic plate. The plastic plate may be textured to reduce glare or may have an anti-reflection coating or an anti-reflection film applied to the front surface thereof. Instead of a plastic plate, the transparent cover may be a glass plate or a touch panel.

Correspondence Address:
KRIEGSMAN KRIEGSMAN
665 Franklin Street
Framingham, MA 01702 (US)

(21) Appl. No.: **11/209,102**

(22) Filed: **Aug. 22, 2005**


Related U.S. Application Data

(63) Continuation of application No. 09/772,197, filed on Jan. 29, 2001, now Pat. No. 6,933,991, which is a continuation-in-part of application No. 09/235,584, filed on Jan. 22, 1999, now Pat. No. 6,181,394.

Publication Classification

(51) **Int. Cl.**
G02F 1/1335 (2006.01)

(52) **U.S. Cl.** **349/96**

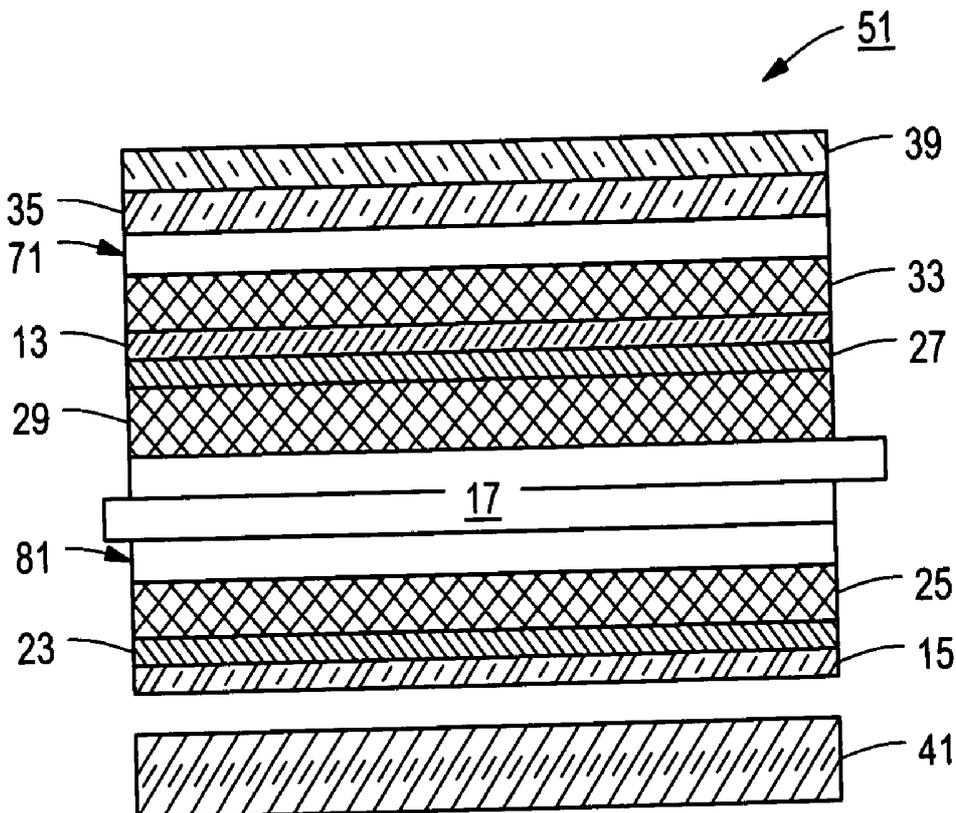

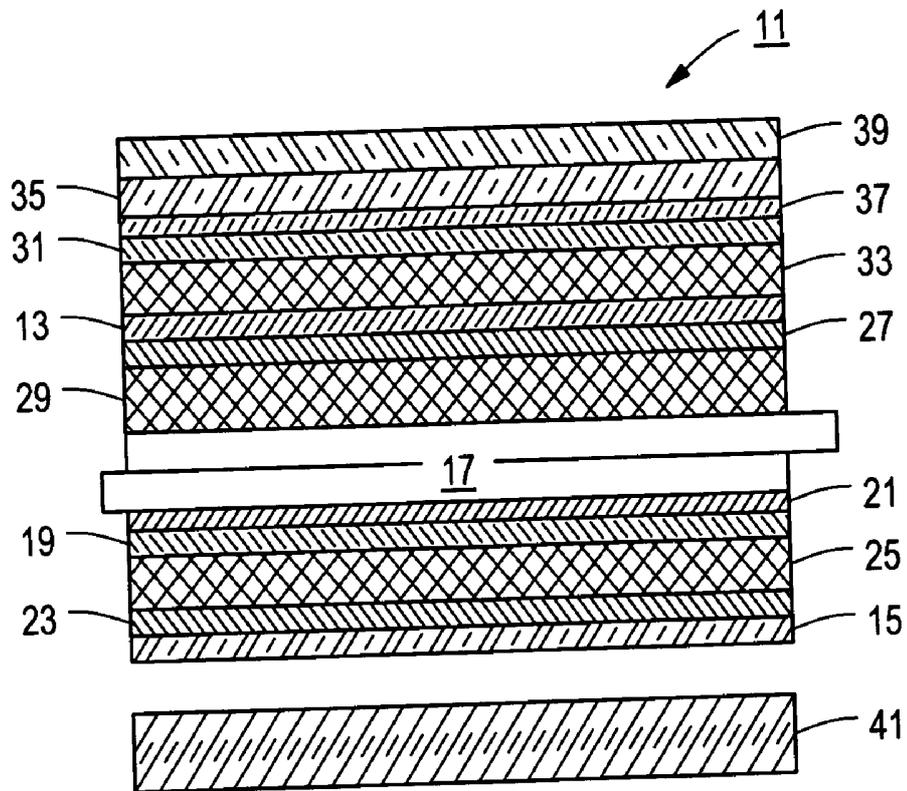


FIG. 1

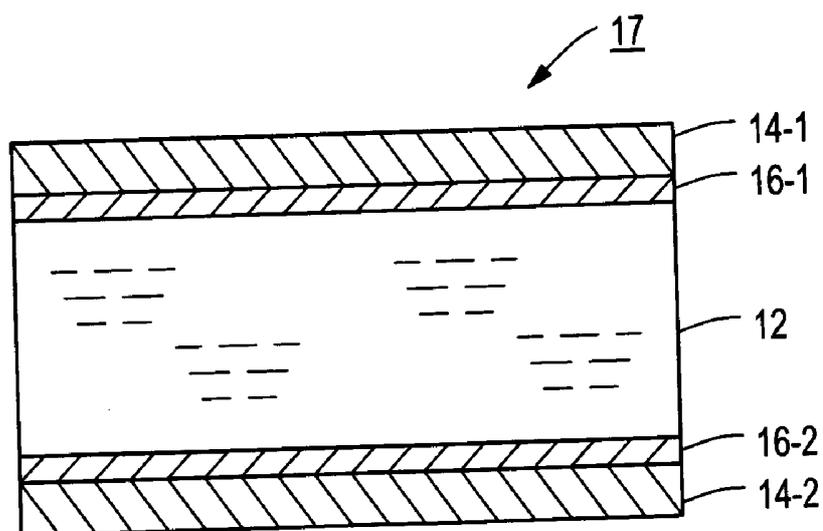


FIG. 2

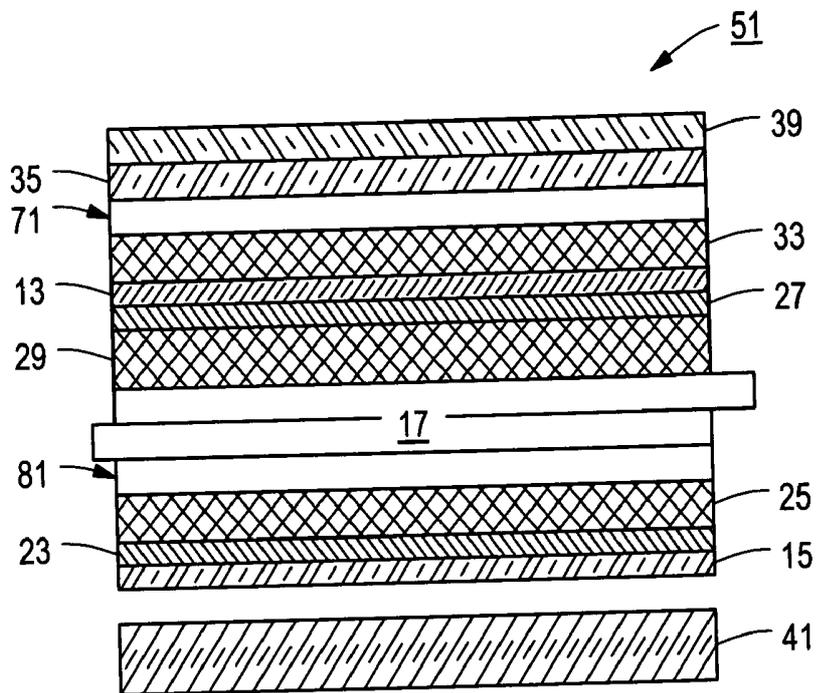


FIG. 3

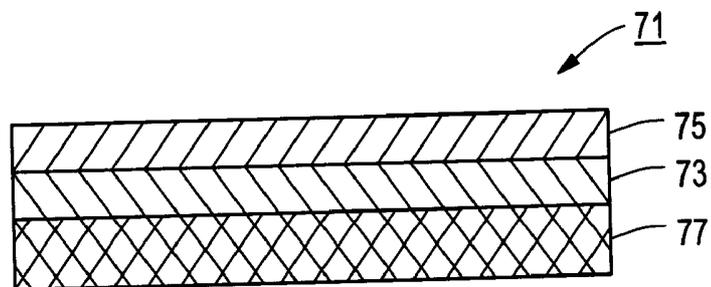


FIG. 4

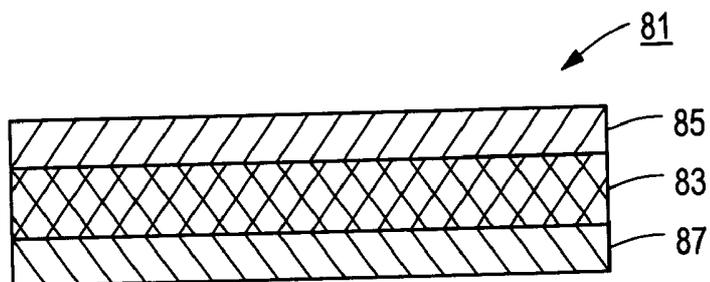


FIG. 5

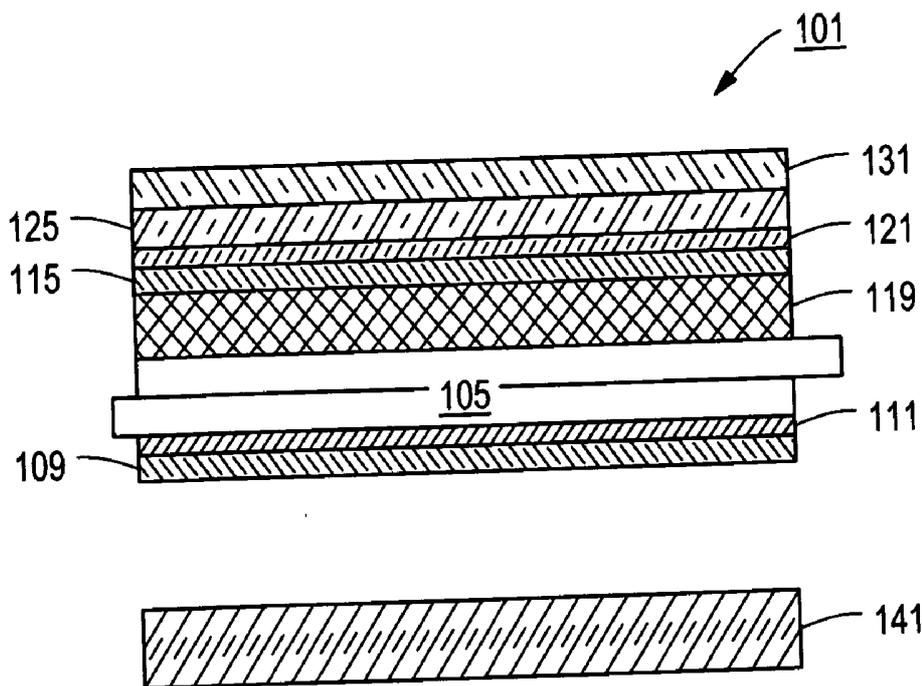


FIG. 6

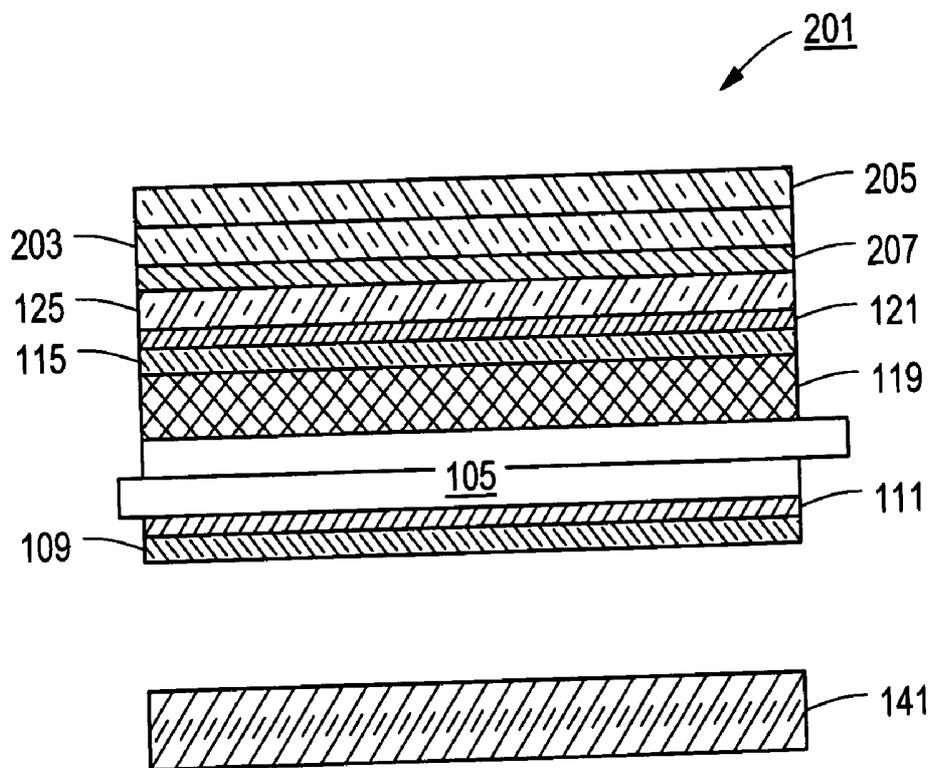


FIG. 7

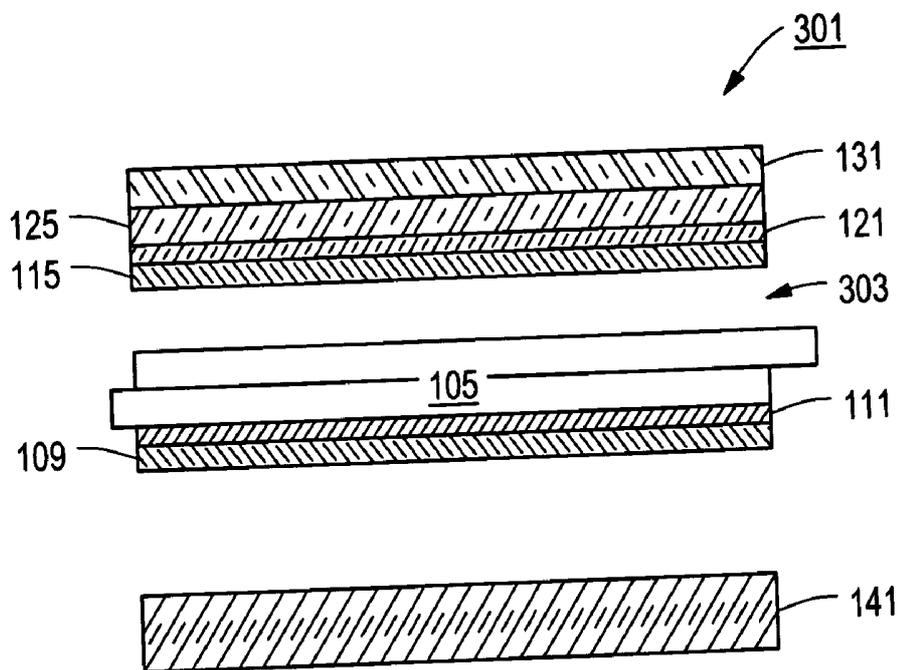


FIG. 8

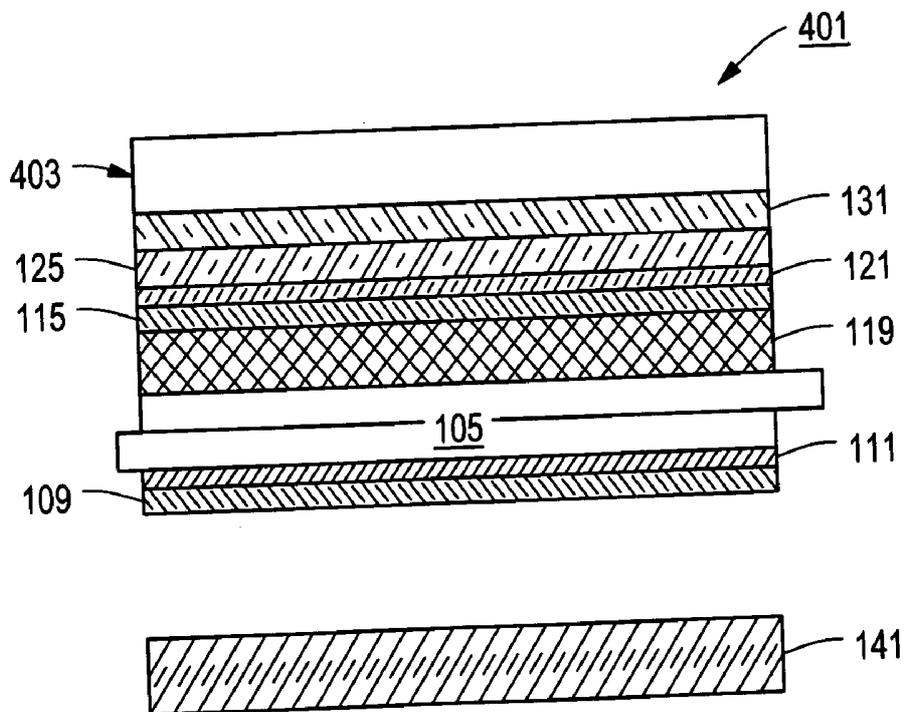


FIG. 9

SUPER BRIGHT LOW REFLECTANCE LIQUID CRYSTAL DISPLAY

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a continuation of U.S. patent application Ser. No. 09/772,197, inventors Sanelle et al., filed Jan. 29, 2001, which in turn is a continuation-in-part of U.S. patent application Ser. No. 09/235,584, inventors Sanelle et al., filed Jan. 22, 1999, now U.S. Pat. No. 6,181,394, the disclosures of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] The present invention relates generally to liquid crystal displays and more particularly to an improved liquid crystal display exhibiting enhanced optical viewing performance.

[0003] Liquid crystal displays, which were first introduced in the 1970's and have since been used in watches, clocks, pocket calculators, portable personal computers, navigational instruments and the like, are electronically switched displays that make use of changes in the reflective properties of liquid crystals present in an electric field. A typical liquid crystal display comprises a liquid crystal display panel (also commonly referred to as a liquid crystal display cell), said panel comprising a thin film of liquid crystals sandwiched between a pair of transparent substrates, each of the transparent substrates typically having a transparent electrically conductive coating applied to the liquid crystal side thereof, said transparent coating functioning as an electrode. The liquid crystal display panel is typically positioned between a pair of glass (or other transparent) cover plates, the cover plates being sealed together around their respective edges. The cover plates may be assembled with spacers between them to maintain a constant separation distance. Two crossed axis polarizers are positioned between the cover plates, one polarizer being adhered to the front of the liquid crystal display panel and the other polarizer being adhered to the rear of the liquid crystal display panel. When a voltage is applied selectively across the electrodes, the liquid crystal molecules between them are rearranged or switched in polarization so that light is either reflected or absorbed in the region bounded by the electrodes to form characters or graphics. Many liquid crystal displays include a backlight for night or dark viewing, and many liquid crystal displays include a layer of indium tin oxide or another suitable material positioned between the front polarizer and the front cover plate for use as an electromagnetic interference shield. Some liquid crystal displays intended for use in cold environments also include a layer of indium tin oxide or another suitable material positioned between the rear polarizer and the rear cover plate and electrically connected to a power source for use as a heating element.

[0004] Some of the advantages of liquid crystal displays, as compared to other digital displays, are their comparatively low voltage and power requirements. Unfortunately, however, one of the principal disadvantages of liquid crystal displays is that, due to their low contrast and a "washed-out" effect caused by back-reflected ambient light seen by a viewer, they cannot easily be read under high ambient light conditions, such as when placed in direct sunlight.

[0005] One approach which has been taken to improve the viewing performance of liquid crystal displays, particularly when viewed under high ambient light conditions, has been to apply an anti-reflection coating to the front of the front cover plate. Although such an approach has provided some improvement to the viewing characteristics of liquid crystal displays by reducing the amount of back-reflected light seen by the viewer, further improvement is greatly needed.

[0006] A few patents in the field of liquid crystal display technology are described below.

[0007] In U.S. Pat. No. 5,818,559, inventor Yoshida, which issued Oct. 6, 1998, there is disclosed a liquid crystal display having different linear expansion coefficients among the materials of the display. More specifically, the liquid crystal display comprises a liquid crystal cell and a polarizing sheet stuck with an adhesive layer, said cell comprising a liquid crystal interposed between a pair of resinous substrates, at least one of which has a transparent electrode, and said polarizing sheet comprising a polarizing film interposed between a pair of resinous protective films, wherein difference in a linear expansion coefficient between the resin of the substrate facing the polarizing sheet and the resin of the protective film facing the liquid crystal cell is less than $0.5 \times 10^{-5}/^{\circ}\text{C}$.

[0008] In U.S. Pat. No. 5,523,873, inventors Bradford, III et al., which issued Jun. 4, 1996, and which is incorporated herein by reference, there is disclosed a liquid crystal display comprising first and second polarizers sandwiching a liquid crystal layer therebetween, electrode means for applying a voltage across the liquid crystal layer, and a heater disposed adjacent (directly or otherwise) the first polarizer, the heater comprising a conductive layer having a substantially planar flex circuit buss bar disposed thereon, the buss bar for delivering power to the conductive layer, thereby enabling the conductive layer to heat the liquid crystal display.

[0009] In U.S. Pat. No. 3,869,196, inventor Kubota, which issued Mar. 4, 1975, and which is incorporated herein by reference, there is disclosed a liquid crystal display device wherein the thickness and the loss of light by reflection are said to be decreased by using one surface from each of a polarizer and an analyzer for forming a cell in which the liquid crystal material is confined.

[0010] Other patents of interest include U.S. Pat. No. 5,179,457, inventors Hirataka et al., which issued Jan. 12, 1993; U.S. Pat. No. 5,430,607, inventor Smith, issued Jul. 4, 1995; U.S. Pat. No. 5,570,214, inventors Abileah et al., which issued Oct. 29, 1996; U.S. Pat. No. 5,594,568, inventors Abileah et al., which issued Jan. 14, 1997; U.S. Pat. No. 5,706,068, inventors Abileah et al., which issued Jan. 6, 1998; and U.S. Pat. No. 5,739,881, inventors Xu et al., which issued Apr. 14, 1998, all of which are incorporated by reference.

SUMMARY OF THE INVENTION

[0011] It is an object of the present invention to provide a novel liquid crystal display.

[0012] It is another object of the present invention to provide a liquid crystal display that ameliorates at least some of the problems discussed above in connection with existing liquid crystal displays.

[0013] It is yet another object of the present invention to provide a liquid crystal display as described above that includes a novel optical filtering arrangement.

[0014] The present invention is based, in part, on the innovative discovery that the amount of back-reflected light seen by a viewer of a liquid crystal display can be substantially reduced and, therefore, that the viewing characteristics of a liquid crystal display can be substantially improved by moving the front polarizer from its conventional location where it is adhered to the front surface of the liquid crystal display panel and is positioned rearwardly relative to the front cover plate to a new location where it is positioned in front of said front cover plate and is preferably adhered to the back surface of an additional cover plate itself positioned in front of said front cover plate.

[0015] Therefore, according to one aspect of the invention, there is provided a liquid crystal display comprising (a) a first transparent plate; (b) a second transparent plate; (c) a liquid crystal display panel positioned between said first and second transparent plates, said liquid crystal display panel comprising a first transparent substrate, a second transparent substrate, liquid crystal material positioned between said first and second transparent substrates, a first transparent electrode positioned between said liquid crystal material and said first transparent substrate, and a second transparent electrode positioned between said liquid crystal material and said second transparent substrate; (d) a rear polarizer positioned between said liquid crystal display panel and said second transparent plate; and (e) a front polarizer positioned in front of said first transparent plate, said front polarizer being crossed relative to said rear polarizer.

[0016] In a first preferred embodiment, the first and second transparent plates are made of glass, and the liquid crystal display panel is an active matrix liquid crystal display panel. In addition, the rear polarizer is a non-compensated linear polarizer, the front surface of which is adhered to the rear surface of the active matrix liquid crystal display panel with an index-matched, pressure sensitive adhesive. The display further comprises an indium tin oxide thin film coating adapted to be used as a heating element, said coating being applied to the front surface of the second glass plate. The front surface of said heating element is adhered to the rear surface of the rear polarizer with a silicone-based, index-matched, optical bonding material.

[0017] Said liquid crystal display further comprises an indium tin oxide thin film coating usable as an electromagnetic interference (EMI) shield, said coating being applied to the rear surface of the first glass plate. The rear surface of said EMI-coated glass substrate is adhered to the front surface of the active matrix liquid crystal display panel with the above-mentioned silicone-based, index-matched, optical bonding material.

[0018] The front polarizer is also a non-compensated linear polarizer, the front surface of which is adhered to a third glass plate with an index-matched, pressure sensitive adhesive and the rear surface of which is adhered to the front surface of the first glass plate by a layer of the above-mentioned silicone-based, index-matched, optical bonding material. The display further includes an anti-reflection (AR) thin film coating applied to the front surface of the third glass plate.

[0019] In order to minimize the reflection of ambient light by the display into the view of an observer, the various

elements of the display preferably have respective indices of refraction that differ as minimally as possible.

[0020] A second preferred embodiment differs from the first preferred embodiment in that a first compensation film is interposed between the front polarizer and the index-matched optical bonding material used to bond the front polarizer to the first glass plate, and a second compensation film is interposed between the rear polarizer and the index-matched pressure-sensitive adhesive used to adhere the rear polarizer to the liquid crystal display panel.

[0021] A third preferred embodiment differs from the first preferred embodiment in that the following items are omitted: the EMI shield, the first glass plate, the optical bonding material used to bond the front polarizer to the first glass plate, the heating element, the second glass plate and the optical bonding material used to bond the rear polarizer to the heating element. In addition, the third glass plate may be a plastic plate.

[0022] A fourth preferred embodiment differs from the third preferred embodiment in that the optical bonding material used to bond the front polarizer to the liquid crystal display is replaced with an air gap.

[0023] A fifth preferred embodiment differs from the third preferred embodiment in that the anti-reflection coating is applied to the front surface of a thin film, the rear surface of said thin film being adhered to the front surface of the plastic plate by an index-matched pressure sensitive adhesive.

[0024] A sixth preferred embodiment differs from the third preferred embodiment in that the plastic plate is replaced with a touch panel.

[0025] Additional embodiments can be derived from a combination of the embodiments disclosed above.

[0026] The terms "front," "in front of," "front surface" or the like, when used herein to describe an element of a liquid crystal display or to denote the relative positions of two or more elements of a liquid crystal display, refer directionally to the viewer side of the liquid crystal display. The terms "behind," "in back of," "rear surface" or the like, when used herein to describe an element of a liquid crystal display or to denote the relative positions of two or more elements of a liquid crystal display, refer directionally to the side of the liquid crystal display facing away from the viewer, typically the backlight side of the display.

[0027] Additional objects, features, aspects and advantages of the present invention will be set forth, in part, in the description which follows and, in part, will be obvious from the description or may be learned by practice of the invention. Certain embodiments of the invention will be described hereafter in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that structural or other changes may be made without departing from the scope of the invention. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is best defined by the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] The accompanying drawing, which is hereby incorporated into and constitutes a part of this specification, illustrates a preferred embodiment of the invention and,

together with the description, serves to explain the principles of the invention. In the drawing wherein like reference numerals represent like parts:

[0029] FIG. 1 is a schematic section view of a first embodiment of a liquid crystal display constructed according to the teachings of the present invention;

[0030] FIG. 2 is a schematic section view of the liquid crystal display panel of the liquid crystal display of FIG. 1;

[0031] FIG. 3 is a schematic section view of a second embodiment of a liquid crystal display constructed according to the teachings of the present invention;

[0032] FIG. 4 is a schematic section view of one of the polarizer assemblies present in the liquid crystal display of FIG. 3, said polarizer assembly being constructed according to the teachings of the present invention;

[0033] FIG. 5 is a schematic section view of the other of the polarizer assemblies present in the liquid crystal display of FIG. 3, said polarizer assembly being a conventional polarizer assembly;

[0034] FIG. 6 is a schematic section view of a third embodiment of a liquid crystal display constructed according to the teachings of the present invention;

[0035] FIG. 7 is a schematic section view of a fourth embodiment of a liquid crystal display constructed according to the teachings of the present invention;

[0036] FIG. 8 is a schematic section view of a fifth embodiment of a liquid crystal display constructed according to the teachings of the present invention; and

[0037] FIG. 9 is a schematic section view of a sixth embodiment of a liquid crystal display constructed according to the teachings of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0038] As noted above, the present invention is directed to the problem of poor viewing performance or "washout" in liquid crystal displays, said problem occurring most notably under high ambient light conditions. More specifically, the problem is caused by the reflection of ambient light by the liquid crystal display back towards the viewer, thereby obscuring the image generated by the liquid crystal display. Moreover, in those instances in which the liquid crystal display includes an electromagnetic interference shield, often in the form of an indium tin oxide coating applied to the rear surface of the front cover plate of the display, the problem of ambient light reflection into the view of an observer is made even more acute.

[0039] Referring now to FIG. 1, there is shown a schematic section view of a first embodiment of a liquid crystal display constructed according to the teachings of the present invention, said liquid crystal display being represented generally by reference numeral 11.

[0040] Liquid crystal display 11, which is particularly well-suited for (but is not limited to) military applications, comprises a first glass substrate 13, a second glass substrate 15 and a liquid crystal display (LCD) panel 17, LCD panel 17 being positioned between glass substrates 13 and 15. Glass substrates 13 and 15, which may be conventional in

nature and correspond to the front and rear cover plates of a conventional liquid crystal display, typically have a thickness of about 0.04 inch and may be made of a borosilicate, a sodalime or the like. Preferably, glass substrates 13 and 15 have indices of refraction that substantially match that of LCD panel 17. LCD panel 17, which is preferably (but not necessarily) an active matrix liquid crystal display (AMLCD) panel, may be conventional in nature.

[0041] As shown in FIG. 2, LCD panel 17 typically includes a layer 12 of liquid crystals sandwiched between a pair of transparent plates 14-1 and 14-2, the inner surfaces of plates 14-1 and 14-2 being coated with a transparent conductive coating used to form transparent electrodes 16-1 and 16-2, respectively.

[0042] Referring back to FIG. 1, display 11 also comprises a rear polarizer 19, rear polarizer 19 preferably having an index of refraction that substantially matches that of LCD panel 17. The front surface of rear polarizer 19 is preferably adhered to the rear surface of LCD panel 17 with a layer 21 of a conventional index-matched, pressure sensitive adhesive (layer 21 being about 0.001 inch in thickness). Rear polarizer 19 may be, for example, a conventional non-compensated linear polarizer, and layer 21 may be applied to polarizer 19 by the polarizer's manufacturer so that polarizer 19 and layer 21 form a polarizer assembly.

[0043] In addition, display 11 preferably comprises a thin film coating 23 applied to the front surface of second glass substrate 15. Coating 23, whose index of refraction substantially matches that of glass substrate 15, is preferably made of indium tin oxide or another suitable material so that, when coupled to a power source, coating 23 serves as a heating element to heat display 11 when it is used in cold ambient temperature conditions. The front surface of coating 23 is preferably adhered to the rear surface of rear polarizer 19 with a layer 25 of an index-matched, optical bonding material. Layer 25, which may be made of, for example, a silicone-based or epoxy-based, index-matched, optical bonding material, eliminates any air gap between rear polarizer 19 and coating 23.

[0044] Display 11 preferably further comprises an electromagnetic interference (EMI) shield 27. EMI shield 27, which is preferably in the form of an indium tin oxide thin film coating applied to the rear surface of first glass substrate 13, shields LCD panel 17 from incoming electromagnetic radiation by absorbing said radiation. EMI shield 27 preferably has an index of refraction that substantially matches that of LCD panel 17, and the rear surface of EMI shield 27 is preferably adhered to the front surface of LCD panel 17 with a layer 29 of the above-mentioned index-matched, optical bonding material.

[0045] Display 11 also comprises a front polarizer 31, front polarizer 31 being similar to rear polarizer 19 but crossed relative thereto. Front polarizer 31 preferably has an index of refraction substantially matching that of first glass substrate 13, and the rear surface of front polarizer 31 is preferably adhered to the front surface of first glass substrate 13 by a layer 33 of the above-mentioned index-matched, optical bonding material.

[0046] Display 11 additionally comprises a third glass substrate 35, which may be identical in composition to glass substrates 13 and 15. Third glass substrate 35 preferably has

index of refraction substantially matching that of front polarizer **31**, and the rear surface of third glass substrate **35** is preferably bonded to the front of front polarizer **31** by a layer **37** of the above-mentioned index-matched, pressure sensitive adhesive. (Layer **37** may be applied to polarizer **31** by the polarizer's manufacturer to form a polarizer assembly.) The peripheries of first glass substrate **13**, second glass substrate **15** and third glass substrate **35** are preferably externally sealed to contain those elements of display **11** sandwiched therebetween.

[0047] Display **11** further includes a conventional anti-reflection thin film coating **39** applied (preferably by vapor deposition) to the front surface of third glass substrate **35**. Coating **39**, which is typically about 1-2 microns thick, may be made of, for example, magnesium fluoride and/or quartz.

[0048] Display **11** further includes a backlight **41**, which may be conventional in nature, positioned behind second glass substrate **15**.

[0049] Display **11** may be used in the conventional manner. Because of its construction, display **11** exhibits improved optical viewing performance.

[0050] It should be understood that, although substrates **35**, **13** and **15** of display **11** are made of glass, one could replace one or more of substrates **35**, **13** and **15** with a non-glass transparent material, such as a polycarbonate or a like plastic; however, said replacement(s) would likely render the display unsuitable for most military applications—but not unsuitable for most commercial applications.

[0051] Referring now to FIG. 3, there is shown a schematic section view of a second embodiment of a liquid crystal display constructed according to the teachings of the present invention, said liquid crystal display being represented generally by reference numeral **51**.

[0052] Display **51**, which is also particularly well-suited for (but not limited to) use in military applications, is similar in many respects to display **11**, the principal differences between the two displays being that, in display **51**, the combination of front polarizer **31** and adhesive **37** of display **11** are replaced with a polarizer assembly **71** and the combination of polarizer **19** and adhesive **21** of display **11** are replaced with a polarizer assembly **81**.

[0053] Referring now to FIG. 4, polarizer assembly **71** is shown in greater detail. Polarizer assembly **71** comprises a neutral density polarizer **73**, which may be conventional in nature. An index-matched, pressure sensitive adhesive **75**, which may be conventional in nature, is applied to one side of polarizer **73**, and a wide viewing angle film **77** (also known as a compensation film), which may be conventional in nature, is applied to the opposite side of polarizer **73**.

[0054] In display **51**, adhesive **75** is contacted with substrate **35**, with film **77** adhered to material **33**.

[0055] Referring now to FIG. 5, polarizer assembly **81** is shown in greater detail. Assembly **81**, which is conventional, comprises a wide viewing angle film **83**, which may be identical to film **77**. An index-matched, pressure sensitive adhesive **85**, which may be identical to adhesive **75**, is applied to one side of film **83**, and a neutral density polarizer **87**, which may be identical to polarizer **73** but is crossed relative thereto, is applied to the opposite side of film **83**.

[0056] In display **51**, adhesive **85** of assembly **81** is placed in contact with panel **17**, with polarizer **87** adhered to optical bonding material **25**.

[0057] One advantage to replacing polarizers **31** and **19** (and their associated pressure sensitive adhesives **37** and **21**, respectively) with assemblies **71** and **81**, respectively, is that films **77** and **83** serve to counter the birefringent effect of the liquid crystal material in panel **17**, thereby improving the viewing characteristics of the display at wide angles.

[0058] Referring now to FIG. 6, there is shown a schematic section view of a third embodiment of a liquid crystal display constructed according to the teachings of the present invention, said liquid crystal display being represented generally by reference numeral **101**.

[0059] Display **101**, which is particularly well-suited for non-military or commercial applications (e.g., cell phone screens, laptop monitors), comprises a liquid crystal display (LCD) panel **105**, LCD panel **105** being identical to LCD panel **17** of display **11**.

[0060] Display **101** also comprises a rear polarizer **109**. The front surface of rear polarizer **109** is adhered to the rear surface of LCD panel **105** with an index-matched, pressure-sensitive adhesive **111**. Polarizer **109** and adhesive **111** may be identical to polarizer **19** and adhesive **21**, respectively, of device **11** and may be manufactured together in the form of a polarizer assembly.

[0061] Display **101** additionally comprises a front polarizer **115**, front polarizer **115** being crossed relative to rear polarizer **109**. The rear surface of front polarizer **115** is adhered to the front surface of LCD panel **105** by a layer **119** of an index-matched, optical bonding material, and an index-matched pressure sensitive adhesive **121** is applied to the front surface of front polarizer **115**. Polarizer **115** and adhesive **121** may be identical to polarizer **31** and adhesive **37**, respectively, of device **11** and may be manufactured together in the form of a polarizer assembly.

[0062] Display **101** additionally comprises a transparent cover **125**, cover **125** preferably having an index of refraction substantially matching that of front polarizer **115**. The rear surface of cover **125** is preferably bonded to the front of polarizer **115** by adhesive **121**. Cover **125** is preferably made of a suitable plastic, such as a polycarbonate, but can also be made of a glass (it being understood that glass is less suitable for many commercial applications).

[0063] Display **101** preferably further includes a conventional anti-reflection thin film coating **131** applied to the front surface of cover **125**. Coating **131** may be identical to coating **39** of device **11**.

[0064] It is to be understood that, where cover **125** is made of plastic, coating **131** may be omitted and cover **125** may, instead, be textured to reduce glare.

[0065] Display **101** preferably further includes a backlight **141**, which may be conventional in nature, positioned behind polarizer **109**.

[0066] As can readily be appreciated, polarizer **115** and adhesive **121** of display **101** may be replaced with assembly **71**, with polarizer **109** and adhesive **111** of display **101** also being replaced with assembly **81**.

[0067] As can also readily be appreciated, display 101 could include EMI shield 27 and/or heating element 23; however, for most commercial applications, such components would be unnecessary.

[0068] Referring now to FIG. 7, there is shown a schematic section view of a fourth embodiment of a liquid crystal display constructed according to the teachings of the present invention, said liquid crystal display being represented generally by reference numeral 201.

[0069] Display 201 is substantially identical to display 101, the principal difference between the two displays being that display 201, instead of having an anti-reflection (AR) coating 131 applied directly to the front surface of cover 125, comprises a transparent thin film 203 having an anti-reflection coating 205 applied to its front surface and an index-matched, pressure-sensitive adhesive 207 applied to its rear surface, adhesive 207 being in direct contact with the front surface of cover 125.

[0070] As can readily be appreciated, polarizer 115 and adhesive 121 of display 201 may be replaced with assembly 71, with polarizer 109 and adhesive 111 of display 201 also being replaced with assembly 81.

[0071] As can also readily be appreciated, displays 11 and 51 could also be modified by replacing coating 131 with the combination of film 203, coating 205 and adhesive 207.

[0072] Referring now to FIG. 8, there is shown a schematic section view of a fifth embodiment of a liquid crystal display constructed according to the teachings of the present invention, said liquid crystal display being represented generally by reference numeral 301.

[0073] Display 301 is similar in many respects to display 101, the principal difference between the two displays being that display 301 does not include layer 119 of optical bonding material between front polarizer 115 and LCD panel 105; instead, in display 301, polarizer 115 and panel 105 are spaced apart by an air gap 303.

[0074] As can readily be appreciated, polarizer 115 and adhesive 121 of display 301 may be replaced with assembly 71, with polarizer 109 and adhesive 111 of display 301 also being replaced with assembly 81.

[0075] Referring now to FIG. 9, there is shown a schematic section view of a sixth embodiment of a liquid crystal display constructed according to the teachings of the present invention, said liquid crystal display being represented generally by reference numeral 401.

[0076] Display 401 is similar in many respects to display 101, the principal difference between the two displays being that, in display 401, cover 125 and coating 131 are replaced with a touch panel 403. Touch panel 403 may be conventional in nature and may be, for example, the type of touch panel found in a PALM PILOT™ personal organizer or the like.

[0077] As can readily be appreciated, polarizer 115 and adhesive 121 of display 401 may be replaced with assembly 71, with polarizer 109 and adhesive 111 of display 401 also being replaced with assembly 81.

[0078] Where touch panel 403 is of the type having a front surface onto which an AR-coated thin film may be adhered with an index-matched, pressure-sensitive adhesive (as in

display 201), display 401 preferably further includes such an AR-coated film assembly adhered to the front of touch panel 403. In addition, where such an AR-coated film assembly is adhered to the front of touch panel 403, polarizer 115 may also be moved from its position behind touch panel 403 to a position in front of said AR-coated film assembly.

[0079] As can readily be appreciated, display 301 could be modified in a manner similar to that described above for display 401 wherein cover 125 and coating 131 are replaced with a touch panel like touch panel 403.

[0080] The embodiments of the present invention recited herein are intended to be merely exemplary and those skilled in the art will be able to make numerous variations and modifications to it without departing from the spirit of the present invention. All such variations and modifications are intended to be within the scope of the present invention as defined by the claims appended hereto.

1. A liquid crystal display comprising:

- (a) a first transparent plate;
- (b) a second transparent plate;
- (c) a liquid crystal display panel positioned between said first and second transparent plates, said liquid crystal display panel comprising a first transparent substrate, a second transparent substrate, liquid crystal material positioned between said first and second transparent substrates, a first transparent electrode positioned between said liquid crystal material and said first transparent substrate, and a second transparent electrode positioned between said liquid crystal material and said second transparent substrate;
- (d) a rear polarizer positioned between said liquid crystal display panel and said second transparent plate; and
- (e) a front polarizer positioned in front of said first transparent plate, said front polarizer being crossed relative to said rear polarizer.

2. The liquid crystal display as claimed in claim 1 wherein each of said first and second transparent plates is made of glass.

3. The liquid crystal display as claimed in claim 2 further comprising an electromagnetic interference shield positioned between said first transparent plate and said liquid crystal display panel.

4. The liquid crystal display as claimed in claim 3 wherein said electromagnetic interference shield is an indium tin oxide thin film coating applied to the first transparent plate.

5. The liquid crystal display as claimed in claim 1 further comprising a third transparent plate, said third transparent plate being positioned in front of said front polarizer.

6. The liquid crystal display as claimed in claim 5 wherein each of said first, second and third transparent plate is made of glass.

7. The liquid crystal display as claimed in claim 6 further comprising an anti-reflection coating, said anti-reflection coating being applied to the front of said third transparent plate.

8. The liquid crystal display as claimed in claim 5 wherein said third transparent plate is made of plastic, said third transparent plate being textured to reduce glare.

9. The liquid crystal display as claimed in claim 5 further comprising a transparent thin film, said transparent thin film

having an anti-reflective coating on a front side thereof and an index-matched pressure sensitive adhesive on a rear side thereof, said index-matched pressure sensitive adhesive being placed in contact with said third transparent plate.

10. The liquid crystal display as claimed in claim 1 further comprising a first compensation film and a second compensation film, said first compensation film being positioned between said first polarizer and said liquid crystal display panel, said second compensation film being positioned between said second polarizer and said liquid crystal display panel.

11. The liquid crystal display as claimed in claim 1 wherein said liquid crystal display panel is an active matrix liquid crystal display panel.

12. The liquid crystal display as claimed in claim 1 further comprising a backlight, said backlight being positioned behind said second transparent plate.

13. The liquid crystal display as claimed in claim 1 further comprising a heating element adapted to be connected to a power source, said heating element being positioned between said rear polarizer and said second transparent plate.

14. The liquid crystal display as claimed in claim 13 wherein said heating element comprises an indium tin oxide coating applied to said second transparent plate.

15. The liquid crystal display as claimed in claim 1 wherein said rear polarizer is adhered directly to said liquid crystal display panel.

16. The liquid crystal display as claimed in claim 1 wherein said front polarizer is adhered directly to said third transparent plate.

17. A liquid crystal display comprising:

- (a) a first transparent plate;
- (b) a second transparent plate;
- (c) a liquid crystal display panel positioned between said first and second transparent plates, said liquid crystal display panel comprising a first transparent substrate, a second transparent substrate, liquid crystal material positioned between said first and second transparent substrates, a first transparent electrode positioned between said liquid crystal material and said first transparent substrate, and a second transparent electrode positioned between said liquid crystal material and said second transparent substrate;
- (d) a rear polarizer positioned between said liquid crystal display panel and said second transparent plate;
- (e) a front polarizer positioned in front of said first transparent plate, said front polarizer being crossed relative to said rear polarizer;
- (f) an electromagnetic interference shield positioned between said first transparent plate and said liquid crystal display panel; and
- (g) a third transparent plate positioned in front of said front polarizer.

18. The liquid crystal display as claimed in claim 17 wherein all of said first transparent plate, said second transparent plate, said third transparent plate, said front polarizer, said rear polarizer and said electromagnetic interference shield have indices of refraction that are substantially matched.

19. The liquid crystal display as claimed in claim 18 further comprising a heating element positioned between said rear polarizer and said second transparent plate and adapted to be connected to a power source for use as a heating element, said heating element having an index of refraction substantially matching that of said rear polarizer and that of said second transparent plate.

20. The liquid crystal display as claimed in claim 19 wherein said heating element is a coating applied to said third transparent plate and wherein said electromagnetic interference shield is a coating applied to said first transparent plate.

21. The liquid crystal display as claimed in claim 20 wherein said front polarizer is adhered to said third transparent plate with an index-matched pressure sensitive adhesive and is bonded to said first transparent plate with an index-matched optical bonding material, wherein said rear polarizer is adhered to said liquid crystal panel with an index-matched pressure sensitive adhesive and is bonded to said heating element with an index-matched optical bonding material and wherein said electromagnetic interference shield is bonded to said liquid crystal display with an index-matched optical bonding material.

22. The liquid crystal display as claimed in claim 21 further comprising an anti-reflection coating applied to the front of said third transparent plate.

23. The liquid crystal display as claimed in claim 22 further comprising a backlight positioned behind said second transparent plate.

24. The liquid crystal display as claimed in claim 23 wherein said liquid crystal display panel is an active matrix liquid crystal display panel.

25. A liquid crystal display comprising:

- (a) a liquid crystal display panel;
- (b) a first transparent plate positioned in front of said liquid crystal display panel;
- (c) a rear polarizer positioned behind said liquid crystal display panel;
- (d) a front polarizer positioned in front of said first transparent plate; and
- (e) an indium tin oxide layer positioned behind said front polarizer and in front of said liquid crystal display panel.

26. The liquid crystal display as claimed in claim 25 wherein said liquid crystal display panel comprises a first transparent substrate, a second transparent substrate, liquid crystal material positioned between said first and second transparent substrates, a first transparent electrode positioned between said liquid crystal material and said first transparent substrate, and a second transparent electrode positioned between said liquid crystal material and said second transparent substrate.

27. The liquid crystal display as claimed in claim 26 wherein said first transparent plate is a glass plate.

28. The liquid crystal display as claimed in claim 26 wherein said indium tin oxide layer is positioned behind said first transparent plate and in front of said liquid crystal display panel.

29. The liquid crystal display as claimed in claim 26 wherein said front and rear polarizers are orthogonal to one another.

30. A liquid crystal display comprising:

- (a) a liquid crystal display panel;
- (b) a touch panel positioned in front of said liquid crystal display panel;
- (c) a rear polarizer positioned behind said liquid crystal display panel; and
- (d) a front polarizer positioned in front of said touch panel.

31. The liquid crystal display as claimed in claim 30 wherein said liquid crystal display panel comprises a first

transparent substrate, a second transparent substrate, liquid crystal material positioned between said first and second transparent substrates, a first transparent electrode positioned between said liquid crystal material and said first transparent substrate, and a second transparent electrode positioned between said liquid crystal material and said second transparent substrate.

32. The liquid crystal display as claimed in claim 31 wherein said front and rear polarizers are orthogonal to one other.

* * * * *

专利名称(译)	超高亮度低反射率液晶显示器		
公开(公告)号	US20060001800A1	公开(公告)日	2006-01-05
申请号	US11/209102	申请日	2005-08-22
[标]申请(专利权)人(译)	SANELLE JOSEPH J BREILING DIGGY R 多伊尔丹尼尔 - [R]		
申请(专利权)人(译)	SANELLE JOSEPH J BREILING DIGGY R 多伊尔丹尼尔 - [R]		
当前申请(专利权)人(译)	VIA OPTRONICS GMBH		
[标]发明人	SANELLE JOSEPH J BREILING DIGGY R DOYLE DANIEL R		
发明人	SANELLE, JOSEPH J. BREILING, DIGGY R. DOYLE, DANIEL R.		
IPC分类号	G02F1/1335 G02B5/30 G02B1/11 G02F1/13 G02F1/133 G02F1/1333 G02F1/13363 G09F9/00		
CPC分类号	G02F1/1333 G02F1/13338 G02F1/133382 G02F1/133502 G02F1/133504 G02F1/133528 G02F2202/28 G02F2001/133334 G02F2001/13356 G02F2001/133562 G02F2001/133567 G02F2201/38 G02F1/13363		
其他公开文献	US7405779		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示器 (LCD) 具有增强的光学观察性能。在优选实施例中, LCD 包括液晶显示板, 液晶显示板包括一对透明基板, 夹在透明基板之间的液晶材料和位于液晶材料和透明基板之间的透明电极。LCD 还包括后偏振器组件, 后偏振器组件包括补偿膜, 安装在补偿膜的后表面上的偏振器, 以及安装在补偿膜的前表面上的第一折射率匹配的压敏粘合剂 (PSA), PSA 粘附在 LCD 面板的后表面上。LCD 还包括前偏振器组件, 前偏振器组件包括前偏振器, 安装在前偏振器的后表面上的补偿膜和安装在前偏振器的前表面上的折射率匹配的 PSA。前偏振器相对于后偏振器交叉。前偏振器组件可以用第二折射率匹配的光学粘合材料粘附到 LCD 面板的前面, 或者可以通过气隙与其隔开。透明盖安装在第二折射率匹配的 PSA 上。透明盖优选为塑料板。塑料板可以被纹理化以减少眩光, 或者可以具有抗反射涂层或施加到其前表面的抗反射膜。代替塑料板, 透明盖可以是玻璃板或触摸板。

