



(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2006/0132693 A1**

Kim et al.

(43) **Pub. Date: Jun. 22, 2006**

(54) **METHOD FOR FABRICATING AN ARRAY SUBSTRATE FOR IPS MODE LIQUID CRYSTAL DISPLAY DEVICE**

Publication Classification

(51) **Int. Cl.**
G02F 1/1343 (2006.01)

(76) Inventors: **Ik-Soo Kim**, Gunpo-si (KR); **Gee-Sung Chae**, Incheon-kwangyokshi (KR)

(52) **U.S. Cl.** **349/141**

Correspondence Address:
MCKENNA LONG & ALDRIDGE LLP
1900 K STREET, NW
WASHINGTON, DC 20006 (US)

(57) **ABSTRACT**

An array substrate for in-plane switching (IPS) mode liquid crystal display (LCD) device includes a pixel electrode having an extension portion, a vertical portion and a horizontal portion, the extension portion being extended from the drain electrode to the pixel region, the vertical portion being vertically extended from the extension portion and the horizontal portion being over the common line and being connected to the vertical portion. The device includes a common electrode having a plurality of vertical portions and a horizontal portion, the plurality of the vertical portions being vertically extended from the common line and arranged in an alternating pattern with the vertical portion of the pixel electrode, the horizontal portion connecting the plurality of the vertical portions into one. An auxiliary line is over the horizontal portion of the pixel electrode and being overlapped with the common line.

(21) Appl. No.: **11/341,598**


(22) Filed: **Jan. 30, 2006**

Related U.S. Application Data

(60) Division of application No. 10/762,327, filed on Jan. 23, 2004, now Pat. No. 7,023,515, which is a continuation of application No. 10/318,235, filed on Dec. 13, 2002, now Pat. No. 6,741,313.

Foreign Application Priority Data

Dec. 24, 2001 (KR) 2001-0084259

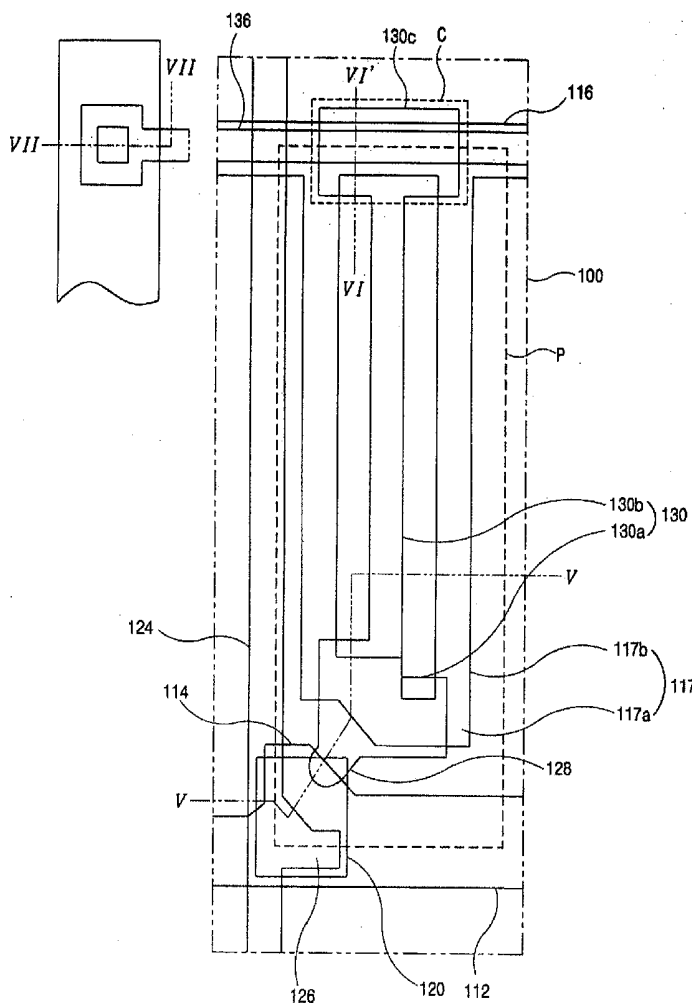

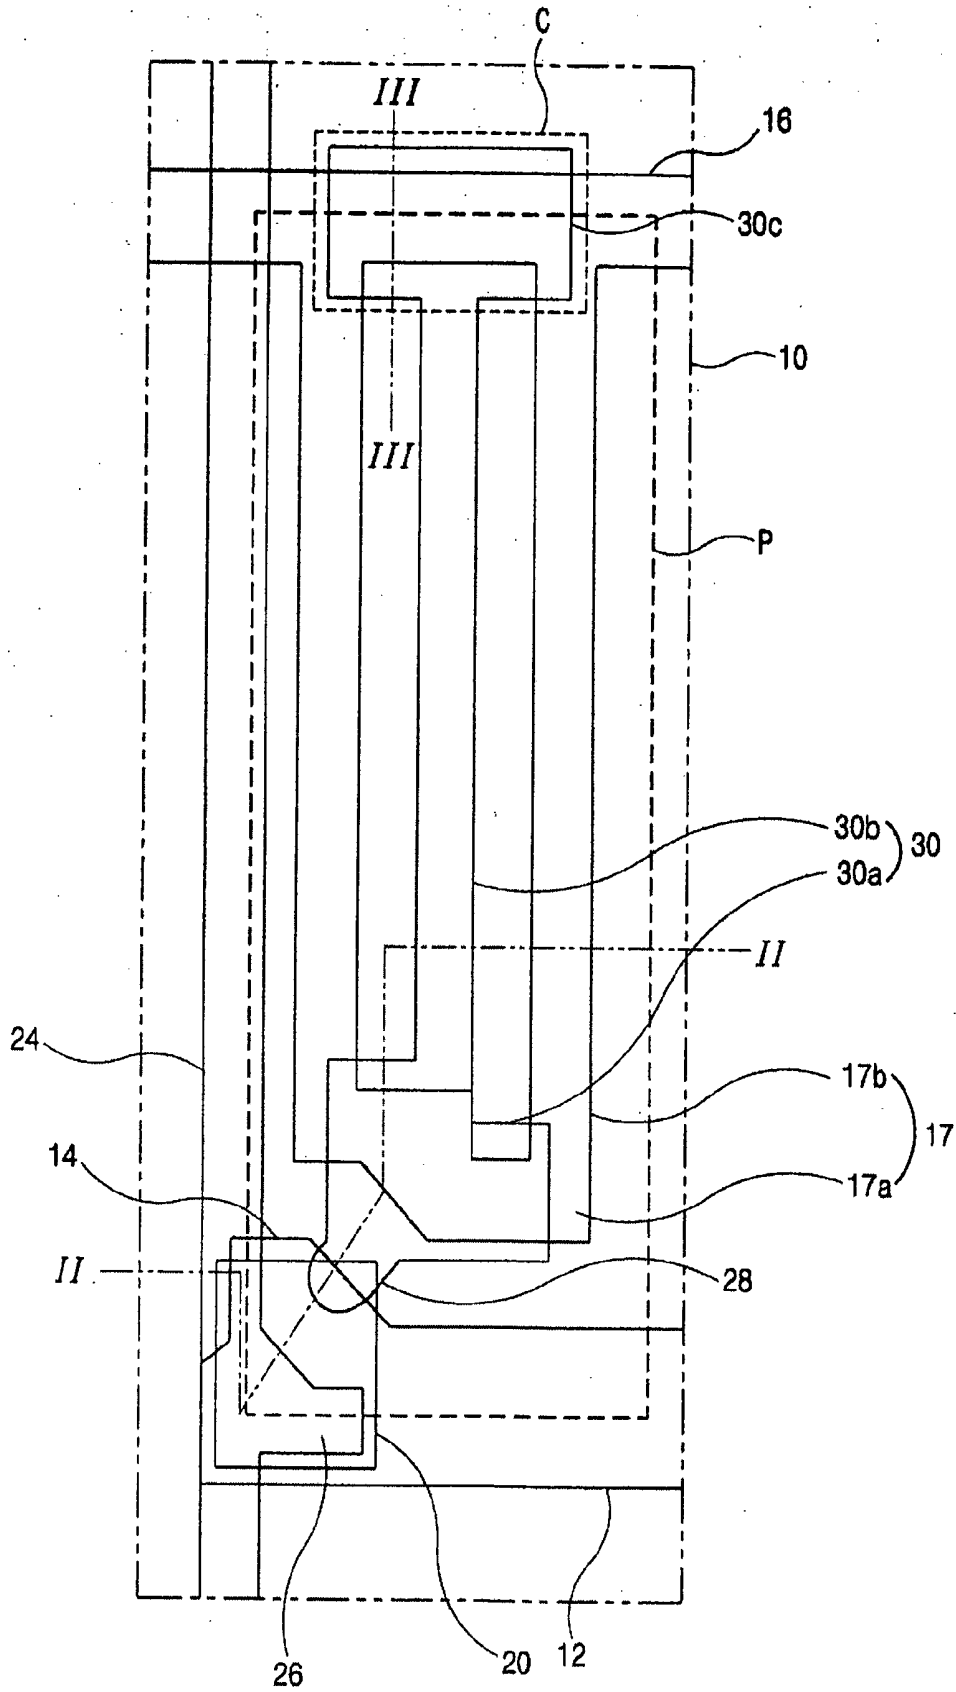


FIG. 1
(RELATED ART)

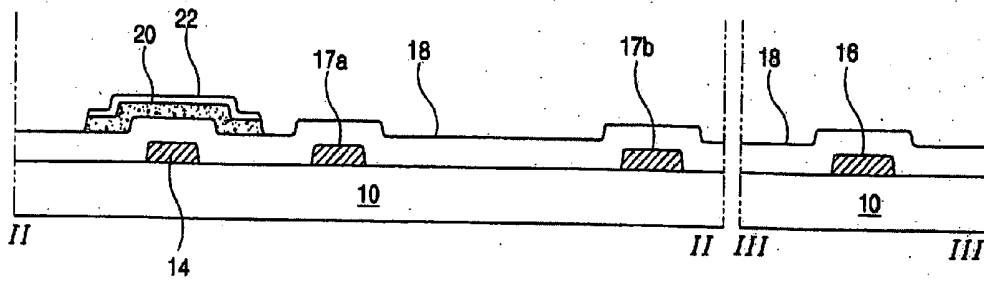


FIG. 2A
(RELATED ART)

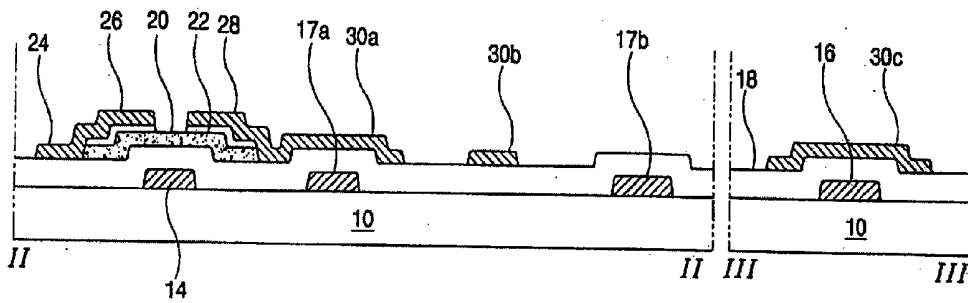


FIG. 2B
(RELATED ART)

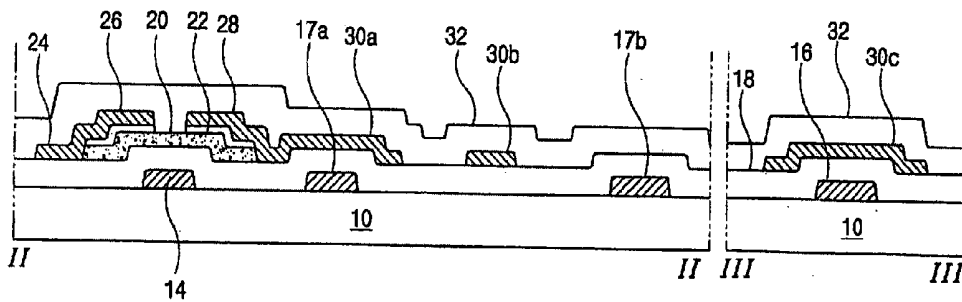


FIG. 2C
(RELATED ART)

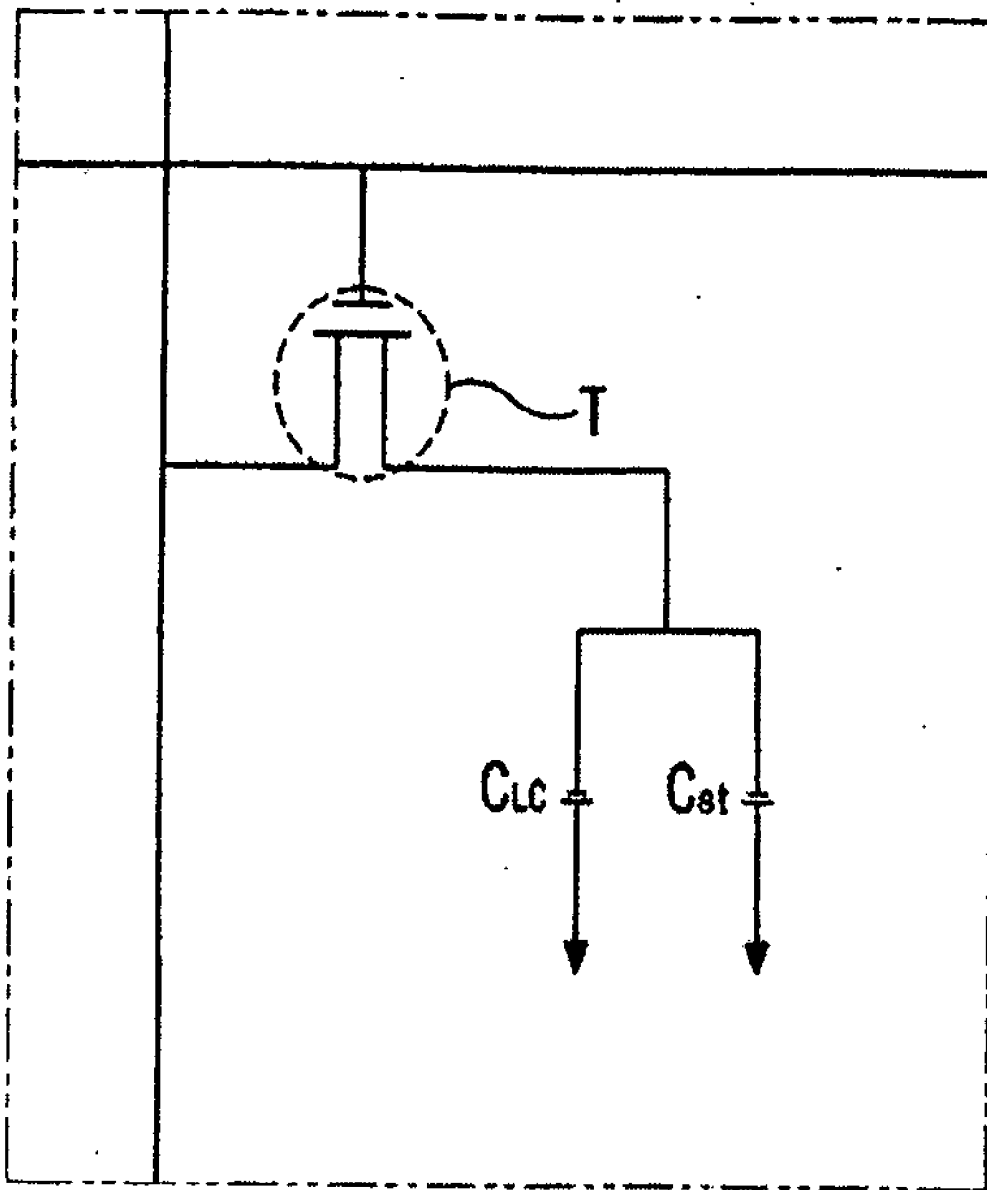


FIG. 3
(RELATED ART)

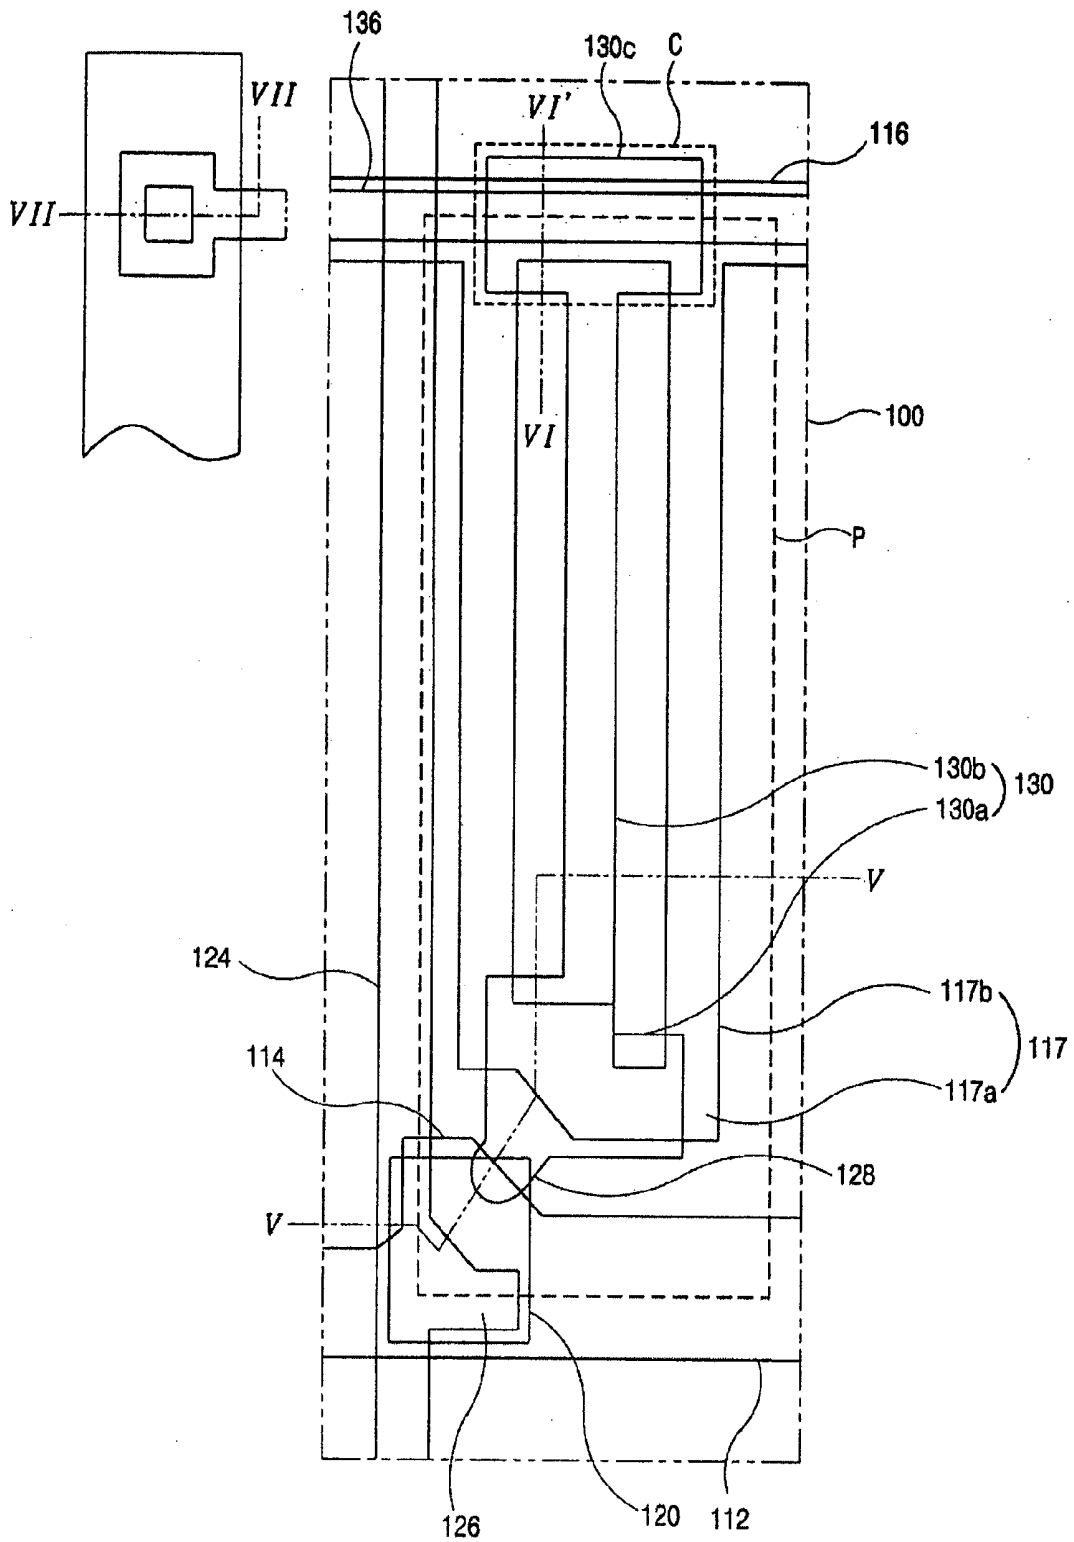


FIG. 4

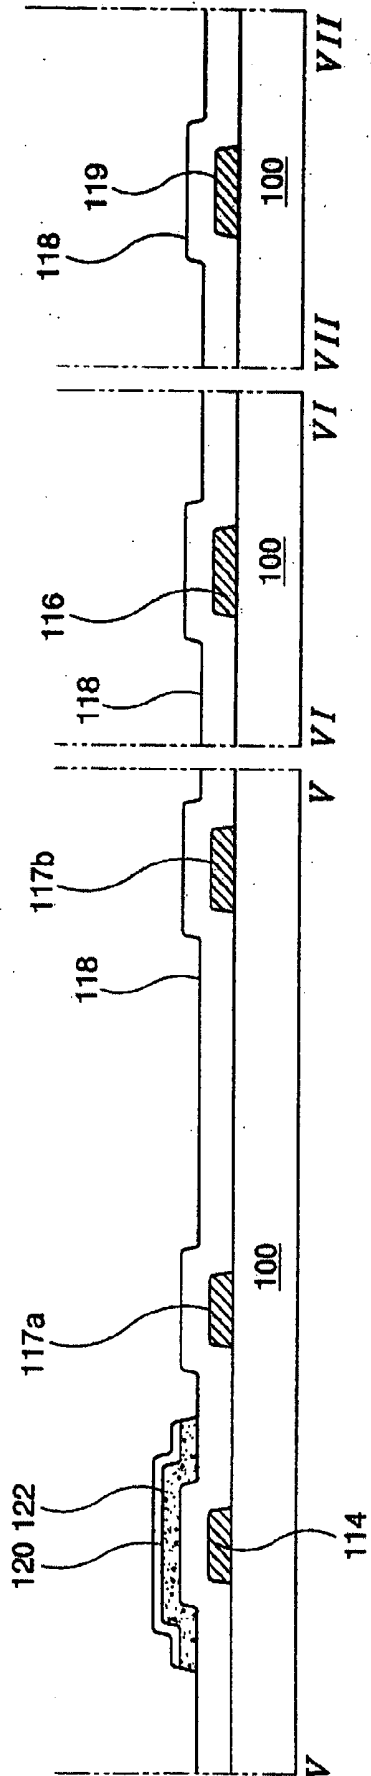


FIG. 5A

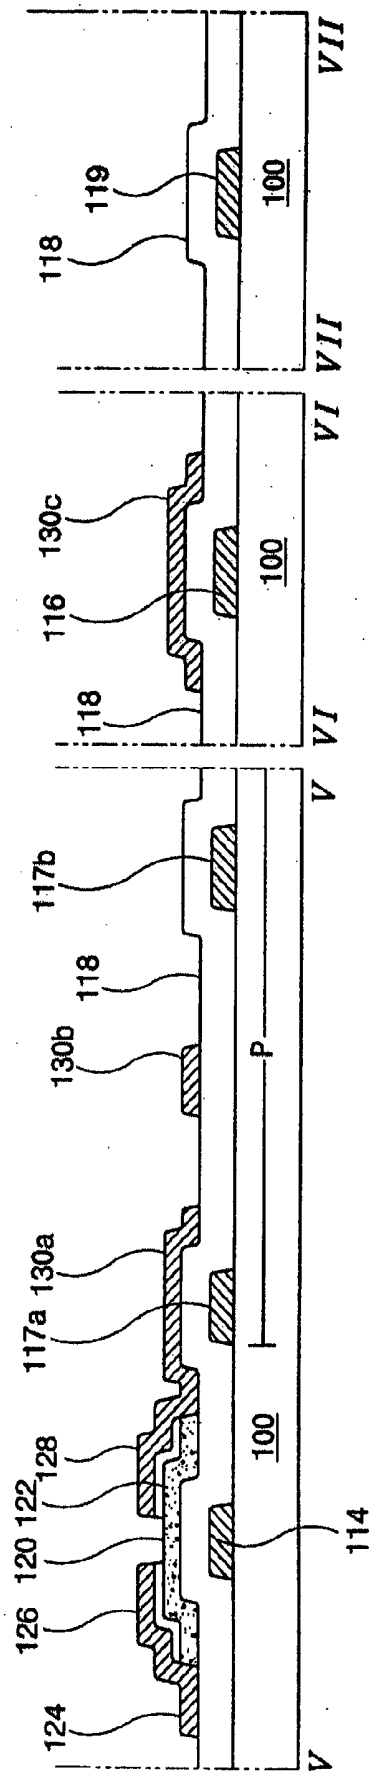


FIG. 5B

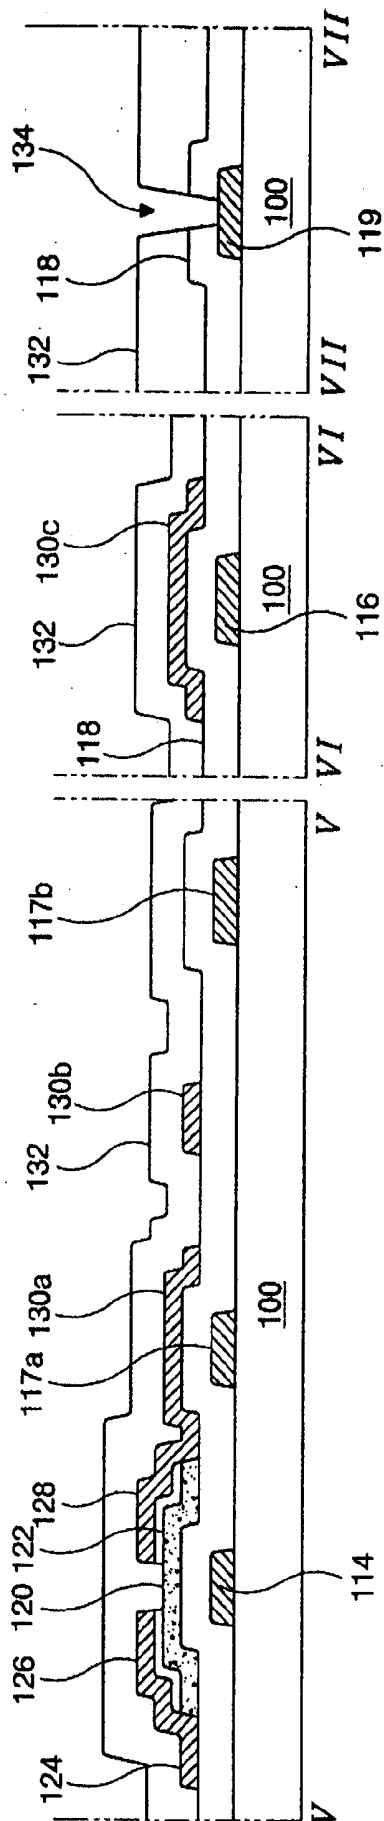


FIG. 5C

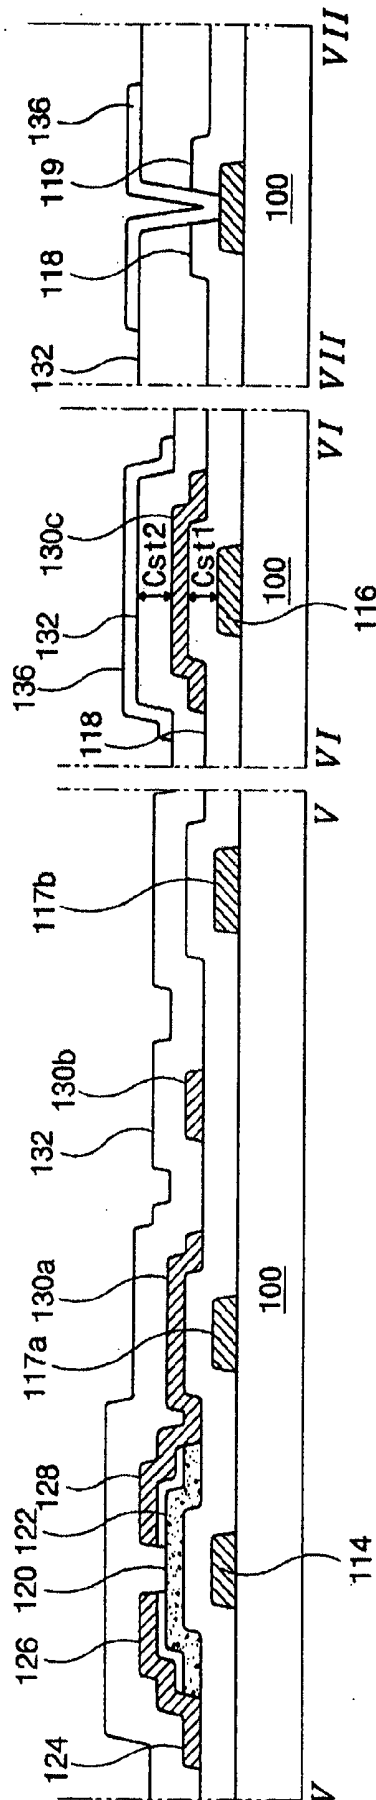


FIG. 5D

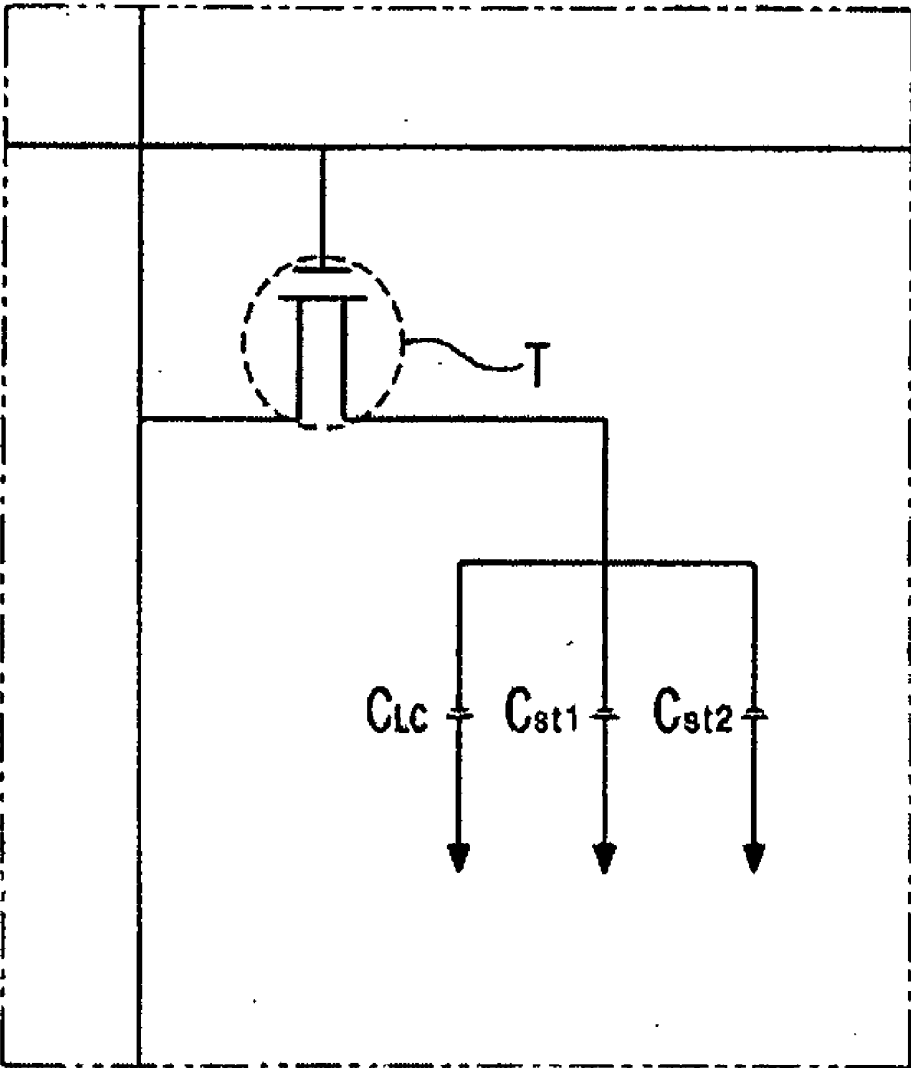


FIG. 6

**METHOD FOR FABRICATING AN ARRAY
SUBSTRATE FOR IPS MODE LIQUID CRYSTAL
DISPLAY DEVICE**

[0001] This application claims the benefit of Korean Patent Application No. 2001-84259, filed on Dec. 24, 2001 in Korea, which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display (LCD) device and more particularly, to an array substrate for In-Plane Switching (IPS) mode liquid crystal display device and fabricating method for the same in order to realize a minute pixel.

[0004] 2. Discussion of the Related Art

[0005] A typical liquid crystal display (LCD) device uses optical anisotropy and polarization properties of liquid crystal molecules. The liquid crystal molecules have a definite orientation order in alignment resulting from their thin and long shapes. The alignment direction of the liquid crystal molecules can be controlled by supplying an electric field to the liquid crystal molecules. In other words, as the alignment direction of the electric field is changed, the alignment of the liquid crystal molecules also changes. Because incident light is refracted to the orientation of the liquid crystal molecules due to the optical anisotropy of the aligned liquid crystal molecules, image data is displayed.

[0006] Currently, active matrix LCDs, in which the thin film transistors and the pixel electrodes are arranged in the form of a matrix, are widely used because of their high resolution and superiority in displaying moving images. An array substrate for the related art in-plane switching (IPS) mode liquid crystal display (LCD) device and the fabricating method for the same will be described hereinafter.

[0007] FIG. 1 is a plan view of a pixel of an array substrate for a related art in-plane switching (IPS) mode liquid crystal display (LCD) device. As shown in the figure, a plurality of gate lines 12 and common lines 16 are horizontally formed on an array substrate 10 and they are spaced apart from each other. A plurality of data lines 24 is vertically formed on the array substrate 10 and cross the gate lines 12 and the common lines 16. The data line 24 defines a pixel "T" by crossing the gate line 12. A thin film transistor "T" is formed in a cross point of the gate line 12 and the data line 24. The thin film transistor "T" includes a gate electrode 14, an active layer 20, a source electrode 26 and a drain electrode 28. The active layer 20, the source electrode 26 and the drain electrode 28 are formed over the gate electrode 14. The gate electrode 14 communicates with the gate line 12 and the source electrode 26 communicates with the data line 24. A pixel electrode 30 that communicates with the drain electrode 28 and a common electrode 17 that is parallel with the pixel electrode 30 are formed in the pixel region "P". The common electrode 17 communicates with the common line 16. The pixel electrode 30 includes an extension portion 30a, a vertical portion 30b and a horizontal portion 30c. The extension portion 30a of the pixel electrode 30 is extended from the drain electrode 28 and the vertical portion 30b of the pixel electrode 30 is vertically extended from the extension portion 30a. The horizontal portion 30c

of the pixel electrode 30 is formed over the common line 16 and connected to the vertical portion 30b. The common electrode 17 includes a horizontal portion 17a and a plurality of vertical portions 17b. The plurality of vertical portions 17b of the common electrode 17 is arranged in an alternating order with the vertical portion 30b of the pixel electrode 30. The horizontal portion 17a of the common electrode 17 connects the plurality of the vertical portion 17b into one portion. An auxiliary storage capacitor "C" is formed in the pixel region "P". The auxiliary storage capacitor "C" uses a portion of the common line 16 as a first storage electrode and the horizontal portion of the pixel electrode 30c as a second storage electrode.

[0008] FIGS. 2A to 2C are cross-sectional views taken along II-II and III-III of FIG. 1 illustrating a fabrication process according to a fabrication sequence of the related art. In FIG. 2A, the gate line 12 of FIG. 1 including the gate electrode 14, the common line 16 and the common electrode 17 are formed on the substrate 10 by depositing and patterning conductive metal material such as aluminum (Al), aluminum neodymium (AlNd), chromium (Cr), molybdenum (Mo) or tungsten (W), for example. A gate insulating layer 18 is then formed on the substrate 10 by depositing inorganic insulating material such as silicon nitride (SiNx) or silicon oxide (SiO₂), for example. The active layer 20 and an ohmic contact layer 22 are formed on the gate insulating layer 18 by depositing and patterning amorphous silicon (a-Si:H) and doped amorphous silicon (n+a-Si:H or p+a-Si:H).

[0009] In FIG. 2B, the data line 24, the source electrode 26, the drain electrode 28 and the pixel electrode 30 are formed on the substrate 10 by depositing and patterning conductive metal material such as aluminum (Al), aluminum neodymium (AlNd), chromium (Cr), molybdenum (Mo) or tungsten (W), for example. The data line 24 defines the pixel region "P" by crossing the gate line 12 and the common line 16. The source electrode 26 is formed by being extended from the data line 24 and partially overlapped with the active layer 20. The drain electrode 28 is spaced apart from the source electrode 26. The pixel electrode 30 comprises the extension portion 30a, the vertical portion 30b and the horizontal portion 30c. The horizontal portion 30b of the pixel electrode 30 is formed on the common line 16. The active layer 20 portion between the source electrode 26 and the drain electrode 28 is exposed by etching the ohmic contact layer 22 between the source electrode 26 and the drain electrode 28.

[0010] In FIG. 2C, a passivation layer 32 is formed on the substrate 10 by coating organic insulating material such as benzocyclobutene (BCB), for example, or by depositing inorganic insulating material such as silicon nitride (SiNx) or silicon oxide (SiO₂), for example.

[0011] FIG. 3 is a circuit diagram of FIG. 1. A capacitor communicates with the thin film transistor "T" in series. The capacitor includes a liquid crystal capacitor (C_{LC}) and a storage capacitor (C_{ST}), which is connected in parallel to the liquid crystal capacitor (C_{LC}).

[0012] However, if the pixel structure stated above for the in-plane switching (IPS) mode liquid crystal display (LCD) device that drives a minute pixel, an area for the storage capacitor "C" is limited. Moreover, if the area for the storage capacitor "C" is designed to be larger in order to secure a

capacitance of the storage capacitor "C", an aperture ratio of the liquid crystal panel is decreased.

SUMMARY OF THE INVENTION

[0013] Accordingly, the present invention is directed to an array substrate for in-plane switching (IPS) mode liquid crystal display (LCD) device and method for fabricating the same that substantially obviates one or more of problems due to limitations and disadvantages of the related art.

[0014] An advantage of the present invention is to provide the array substrate for in-plane switching (IPS) mode liquid crystal display (LCD) device in order to secure enough auxiliary capacitance without enlarging an area of a storage capacitor "C".

[0015] Another advantage of the present invention is to provide a fabricating method for the array substrate for in-plane switching (IPS) mode liquid crystal display (LCD) device in order to secure enough auxiliary capacitance without enlarging an area of a storage capacitor "C".

[0016] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0017] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, an array substrate for in-plane switching (IPS) mode liquid crystal display (LCD) device comprises a substrate having a plurality of pixel regions, a plurality of gate lines and a plurality of common lines in a horizontal direction, the common line being spaced apart from the gate line; a plurality of data lines crossing the gate line and the common line; a thin film transistor at a cross point of the gate line and the data line, the thin film transistor having a gate electrode, an active layer, a source electrode and a drain electrode; a pixel electrode having an extension portion, a vertical portion and a horizontal portion, the extension portion being extended from the drain electrode to the pixel region, the vertical portion being vertically extended from the extension portion and the horizontal portion being over the common line and being connected to the vertical portion; a common electrode having a plurality of vertical portions and a horizontal portion, the plurality of the vertical portions being vertically extended from the common line and arranged in an alternating pattern with the vertical portion of the pixel electrode, the horizontal portion connecting the plurality of the vertical portions into one portion, and an auxiliary line over the horizontal portion of the pixel electrode and being overlapped with the common line.

[0018] The array substrate further comprises a dummy line, referred to as a common guard ring, in a non-display area of the substrate that communicates with the auxiliary line in order to apply a common voltage to the auxiliary line. The gate line, the common line and the dummy line are formed one of aluminum (Al), aluminum alloy (Al alloy), tungsten (W), molybdenum (Mo), copper (Cu) and chromium (Cr). The common line and the horizontal portion of

the pixel electrode having an insulating layer therebetween forms a first auxiliary storage capacitor and the horizontal portion of the pixel electrode and the auxiliary line having an insulating layer therebetween forms a second auxiliary storage capacitor.

[0019] A fabrication method of an array substrate for in-plane switching (IPS) mode liquid crystal display (LCD) device comprises forming a plurality of gate lines, a plurality of common lines and a dummy line on an array substrate, the gate line and the common line being formed in a horizontal direction and spaced apart from each other, the dummy line being formed in a non-display area; forming a plurality of data lines crossing the gate line and the common line; forming a thin film transistor at a cross point of the gate line and the data line, the thin film transistor including a gate electrode, an active layer, a source electrode and a drain electrode; forming a pixel electrode having an extension portion, a vertical portion and a horizontal portion, the extension portion being extended from the drain electrode, the vertical portion being vertically extended from the extension portion and the horizontal portion being over the common line and connected to the vertical portion; forming a common electrode having a plurality of vertical portions and a horizontal portion, the plurality of the vertical portions being vertically extended from the common line and arranged in an alternating pattern with the vertical portion of the pixel electrode, the horizontal portion connecting the plurality of the vertical portions into one portion; and forming an auxiliary line over the horizontal portion of the pixel electrode, the auxiliary line being overlapped with the common line and one end of the auxiliary line communicating with the dummy line.

[0020] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWING

[0021] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0022] In the drawings:

[0023] **FIG. 1** is a plan view of a pixel of an array substrate for a related art in-plane switching (IPS) mode liquid crystal display (LCD) device;

[0024] **FIGS. 2A to 2C** are cross-sectional views taken along II-II and III-III of **FIG. 1** illustrating a fabrication process according to a fabrication sequence of the related art;

[0025] **FIG. 3** is a circuit diagram of **FIG. 1**;

[0026] **FIG. 4** a plan view of a pixel of an array substrate for an in-plane switching (IPS) mode liquid crystal display (LCD) device according to the present invention;

[0027] **FIGS. 5A to 5D** are cross-sectional views taken along V-V, VI-VI and VII-VII of **FIG. 4** illustrating a fabrication process according to a fabrication sequence of the present invention; and

[0028] **FIG. 6** is a circuit diagram of **FIG. 4**.

DETAILED DESCRIPTION OF THE
ILLUSTRATED EMBODIMENTS

[0029] Reference will now be made in detail to the illustrated embodiment of the present invention, which is illustrated in the accompanying drawings.

[0030] FIG. 4 a plan view of a pixel of an array substrate for an in-plane switching (IPS) mode liquid crystal display (LCD) device according to the present invention.

[0031] As shown in the figure, the array substrate for the in-plane switching (IPS) mode liquid crystal display (LCD) device of the present invention includes a plurality of gate lines 112, a plurality of common lines 116 and a plurality of data lines 124. The gate line 112 and the common line 116 are spaced apart from each other and parallel with each other. The data line 124 vertically crosses the gate line 112 and the common line 116 and defines a pixel region "P" by crossing the gate line 112. A thin film transistor, which includes a gate electrode 114, an active layer 120, a source electrode 126 and a drain electrode 128, is formed in a crossing point of the gate line 112 and the data line 124. The source electrode 126 communicates with the data line 124 and the gate electrode 114 communicates with the gate line 112. A pixel electrode 130 and a common electrode 117 are formed in the pixel region "P". The pixel electrode 130 communicates with the drain electrode 128. The common electrode 117 communicates with the common line 116 and is formed parallel to the pixel electrode 130. The pixel electrode 130 includes an extension portion 136a, a vertical portion 130b and a horizontal portion 130c. The extension portion 130a of the pixel electrode 130 is extended from the drain electrode 128 and the vertical portion 130b of the pixel electrode 130 is vertically extended from the extension portion 130a of the pixel electrode 130. The horizontal portion 130c of the pixel electrode 130 is positioned over the common line 116 and connected to the vertical portion 130b. The common electrode 117 includes a plurality of vertical portions 117b and a horizontal portion 117a. The vertical portions 117b of the common electrode 117 are vertically extended from the common line 116 and arranged in an alternating pattern with the vertical portion 130b of the pixel electrode 130a. The horizontal portion 117a of the common electrode 117 connects the plurality of the vertical portions 117b of the common electrode 117 into one portion. An auxiliary line 136 is further formed over the horizontal portion 130c of the pixel electrode 130 according to the present invention. The auxiliary line 136 is overlapped with the common line 116 and extended to a non-display area of the array substrate in order to electrically communicate with a dummy line 119 (not shown in FIG. 4). The dummy line 119 applies same voltage as the common line 116 to the auxiliary line 136. A dual storage is subsequently formed that includes a first electrode, a second electrode and a third electrode. The common line 116 serves as the first electrode, the horizontal portion 130c of the pixel electrode 130 the second electrode and the auxiliary line 119 the third electrode. With this array structure of the present invention, an area for the storage capacitor "C" can be reduced and enough auxiliary capacitance can be secured.

[0032] A fabrication method of the in-plane switching (IPS) mode liquid crystal display (LCD) device according to the present invention will be described hereinafter with reference to FIGS. 5A to 5D.

[0033] FIGS. 5A to 5D are cross-sectional views taken along V-V, VI-VI and VII-VII of FIG. 4 illustrating a fabrication process according to a fabrication sequence of the present invention. In FIG. 5A, the gate line 112 (not shown in FIG. 5A) including the gate electrode 114, the common line 116 and the common electrode 117 are formed on a substrate 100 by depositing conductive metal material such as copper (Cu), aluminum (Al), aluminum alloy (Al alloy) like aluminum neodymium (AlNd), chromium (Cr), molybdenum (Mo) or tungsten (W), for example, and then by a first masking process. The common electrode 117 includes the plurality of vertical portions 117b, which is vertically extended from the common line 116, and the horizontal portion 117a, which connects the plurality of the vertical portions 117b into one portion. The dummy line for applying common voltage to the auxiliary line 136 is further formed in the non-display area of the substrate 100. A gate insulating layer 118 is then formed on the substrate 100 by depositing inorganic insulating material such as silicon nitride (SiNx) or silicon oxide (SiO₂), for example. An active layer 120 and an ohmic contact layer 122 is subsequently formed on the substrate 100 by depositing and patterning amorphous silicon (a-Si:H) and then doped amorphous silicon (n+a-Si:H or p+a-Si:H).

[0034] In FIG. 5B, the data line 124, the source electrode 126, the drain electrode 128 and the pixel electrode 130 are formed on the substrate 100 by depositing and patterning conductive metal material such as copper (Cu), aluminum (Al), aluminum alloy (Al alloy) like aluminum neodymium (AlNd), chromium (Cr), molybdenum (Mo) or tungsten (W), for example. The data line 124 crosses the gate line 112 and the common line 116, and defines a pixel region "P" by crossing the gate line 112. The source electrode 126 is extended from the data line 124 and overlapped with a part of the active layer 120. The drain electrode 128 is spaced apart from the source electrode 126 on the active layer 120. As stated above, the pixel electrode 130 includes the extension portion 130a, the vertical portion 130b and the horizontal portion 130c. The horizontal portion 130c of the pixel electrode 130 is formed over the common line 116. A portion of the active layer 120 between the source electrode 126 and the drain electrode 128 is exposed by etching a portion of the ohmic contact layer 122 between the source electrode 126 and the drain electrode 128.

[0035] In FIG. 5C, a passivation layer 132 is formed on the substrate 100 by depositing inorganic insulating material such as silicon nitride (SiNx) or silicon oxide (SiO₂), for example. A contact hole 134, which exposes a part of the dummy line 119, is formed by patterning the gate insulating layer 118 and the passivation layer 132.

[0036] In FIG. 5D, the auxiliary line 136 is formed on the passivation layer 132 by depositing and patterning transparent conductive metal material such as Indium-Tin-Oxide (ITO) or Indium Zinc Oxide (IZO), for example. The auxiliary line 136 is overlapped with the common line 116 and one end of it communicates with the dummy line 119 in the non-display area of the substrate 100. As shown in the figure, dual storage capacitor, which includes a first auxiliary storage capacitor C_{St1} and a second auxiliary storage capacitor C_{St2}, are formed under the structure of the array substrate of the present invention. A part of the common line 116 serves as the first electrode, the horizontal portion 130c of

the pixel electrode **130** and the auxiliary line **136** the third electrode in the dual storage capacitor.

[0037] FIG. 6 is a circuit diagram of FIG. 4. In FIG. 6, a liquid crystal capacitor C_{LC} is connected in series to the thin film transistor "T" and the first auxiliary storage capacitor C_{St1} and the second auxiliary storage capacitor C_{St2} are connected in parallel to the liquid crystal capacitor C_{LC} . Consequently, enough auxiliary capacitance can be secured even when a width of the common line **116** should be reduced for realizing a minute pixel.

[0038] If the pixel structure described in the present invention for the in-plane switching (IPS) mode liquid crystal display (LCD) device that drives a minute pixel, an area for the storage capacitor "C" is not limited. Moreover, if the area for the storage capacitor "C" is designed to be larger in order to secure a capacitance of the storage capacitor "C", an aperture ratio of the liquid crystal panel is not decreased.

[0039] It will be apparent to those skilled in the art that various modifications and variations can be made in the fabrication and application of the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

1-19. (canceled)

20. A method for fabricating an array substrate for in-plane switching mode liquid crystal display device, comprising:

forming a plurality of gate lines, a gate electrode, a plurality of common lines, a common electrode and a dummy line on a substrate, the dummy line being formed in a non-display area;

forming a first insulating layer over the substrate;

forming a semiconductor layer on the first insulating layer;

forming a plurality of data lines, source and drain electrodes and a pixel electrode on the semiconductor layer;

forming a second insulating layer over the substrate; and

forming an auxiliary line on the second insulating layer, the auxiliary line being overlapped with the common line and one end of the auxiliary line communicating with the dummy line.

21. The method according to claim 20, wherein the gate line, the common line and the dummy line are formed using the same material on a same layer.

22. The method according to claim 20, wherein the gate line, the common line and the dummy line are formed of one of aluminum (Al), aluminum alloy (Al alloy), tungsten (W), molybdenum (Mo), copper (Cu) and chromium (Cr).

23. The method according to claim 20, wherein the auxiliary line is formed of one of Indium-Tin-Oxide (ITO) and Indium Zinc Oxide (IZO).

24. The method according to claim 20, wherein the first insulating layer is formed of one of silicon nitride (SiNx) and silicon oxide (SiO₂).

25. The method according to claim 20, wherein the second insulating layer is formed of one of silicon nitride (SiNx) and silicon oxide (SiO₂).

26. The method according to claim 20, wherein the common line and the pixel electrode to form a first storage capacitor.

27. The method according to claim 20, wherein the pixel electrode and the auxiliary line to form a second storage capacitor.

* * * * *

专利名称(译)	用于IPS模式液晶显示装置的阵列基板的制造方法		
公开(公告)号	US20060132693A1	公开(公告)日	2006-06-22
申请号	US11/341598	申请日	2006-01-30
[标]申请(专利权)人(译)	IK KIM SOO CHAE GEE SUNG		
申请(专利权)人(译)	KIM IK-SOO CHAE GEE-SUNG		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KIM IK SOO CHAE GEE SUNG		
发明人	KIM, IK-SOO CHAE, GEE-SUNG		
IPC分类号	G02F1/1343 G02F1/1362		
CPC分类号	G02F1/134363 G02F1/136213		
优先权	1020010084259 2001-12-24 KR		
其他公开文献	US7480024		
外部链接	Espacenet USPTO		

摘要(译)

一种用于面内切换 (IPS) 模式液晶显示 (LCD) 器件的阵列基板, 包括具有延伸部分, 垂直部分和水平部分的像素电极, 所述延伸部分从漏电极延伸到像素区域, 垂直部分从延伸部分垂直延伸, 水平部分在公共线上方并连接到垂直部分。该器件包括具有多个垂直部分和水平部分的公共电极, 多个垂直部分从公共线垂直延伸并与像素电极的垂直部分交替排列, 水平部分连接多个垂直部分合二为一。辅助线位于像素电极的水平部分上方并与公共线重叠。

