



(12) **Patent Application Publication**
Kwon et al.

(43) **Pub. Date:** Dec. 7, 2006

Publication Classification

(52) **U.S. Cl.** 349/106

(57) **ABSTRACT**

(30) **Foreign Application Priority Data**

A color filter substrate for an LCD device and a method for manufacturing the same, in which process steps are simplified and the manufacturing cost is reduced. The color filter substrate for an LCD device includes a substrate defined by a plurality of color filter regions and a black matrix region, R, G and B color filters respectively formed in the color filter regions of the substrate, a trench formed in the black matrix region of the substrate at a predetermined depth, and a black matrix formed inside the trench by overlapping the color filters.

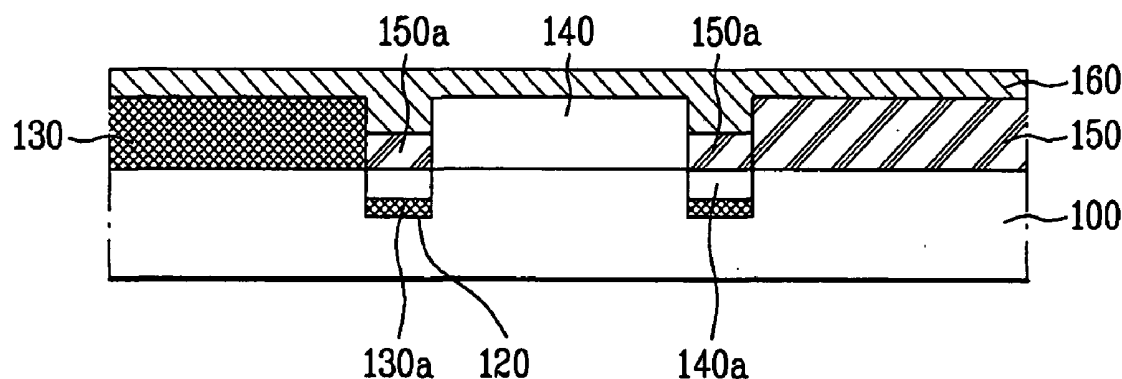


FIG. 1
Related Art

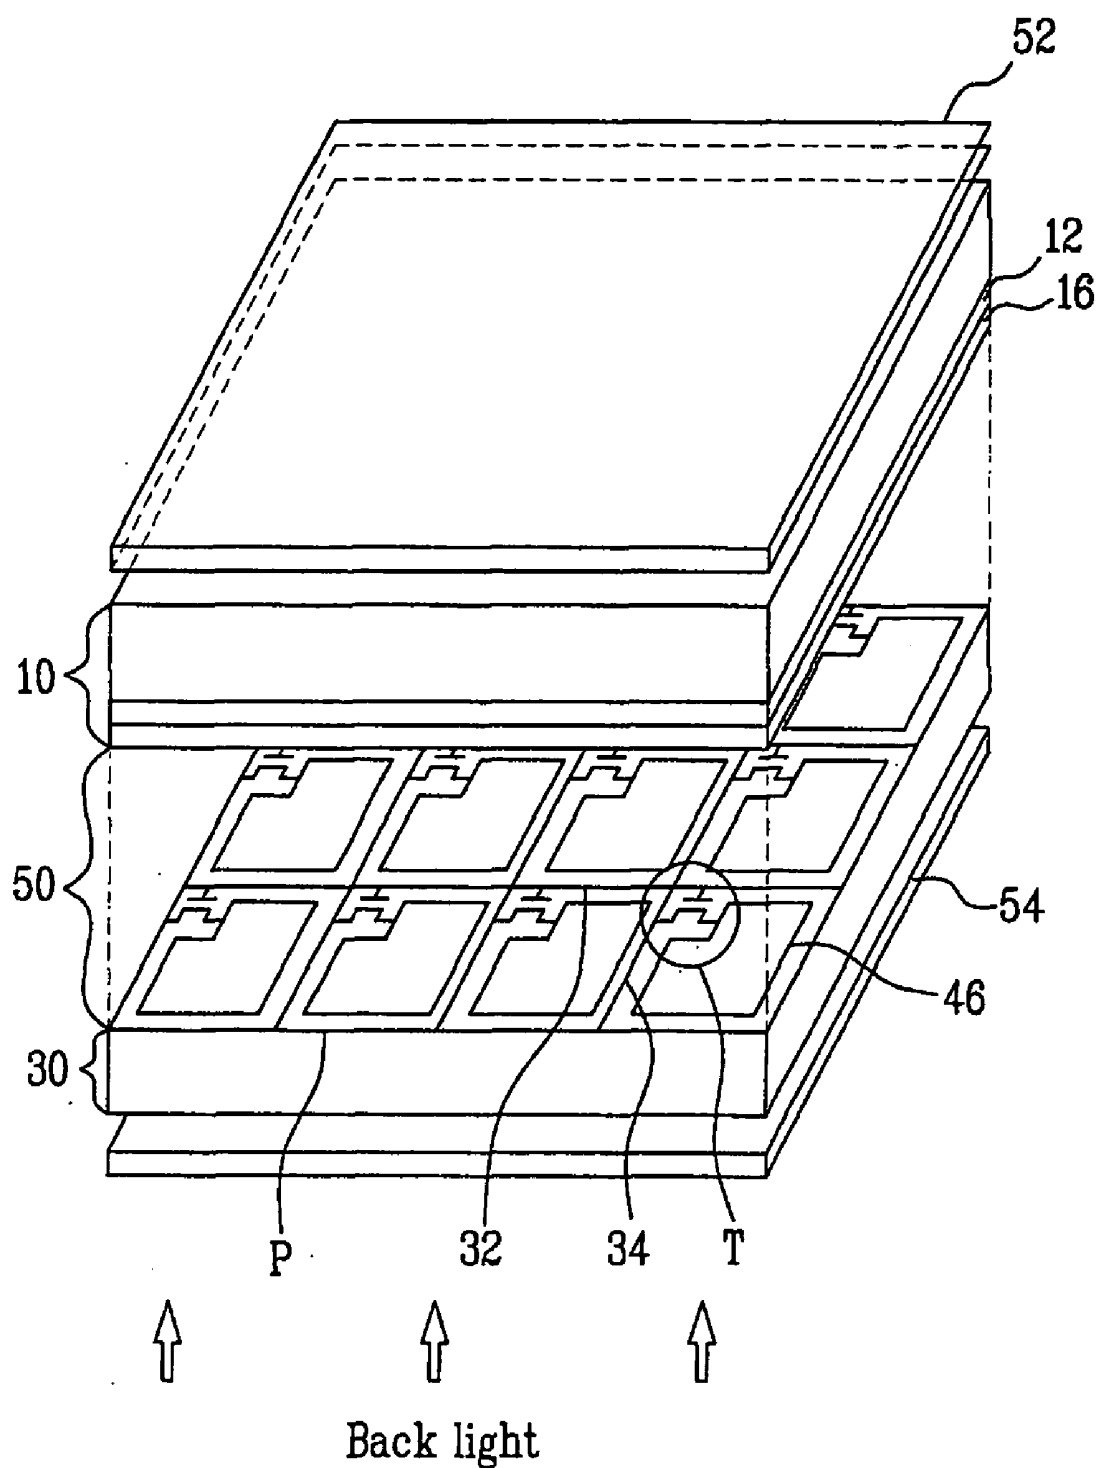


FIG. 2A
Related Art

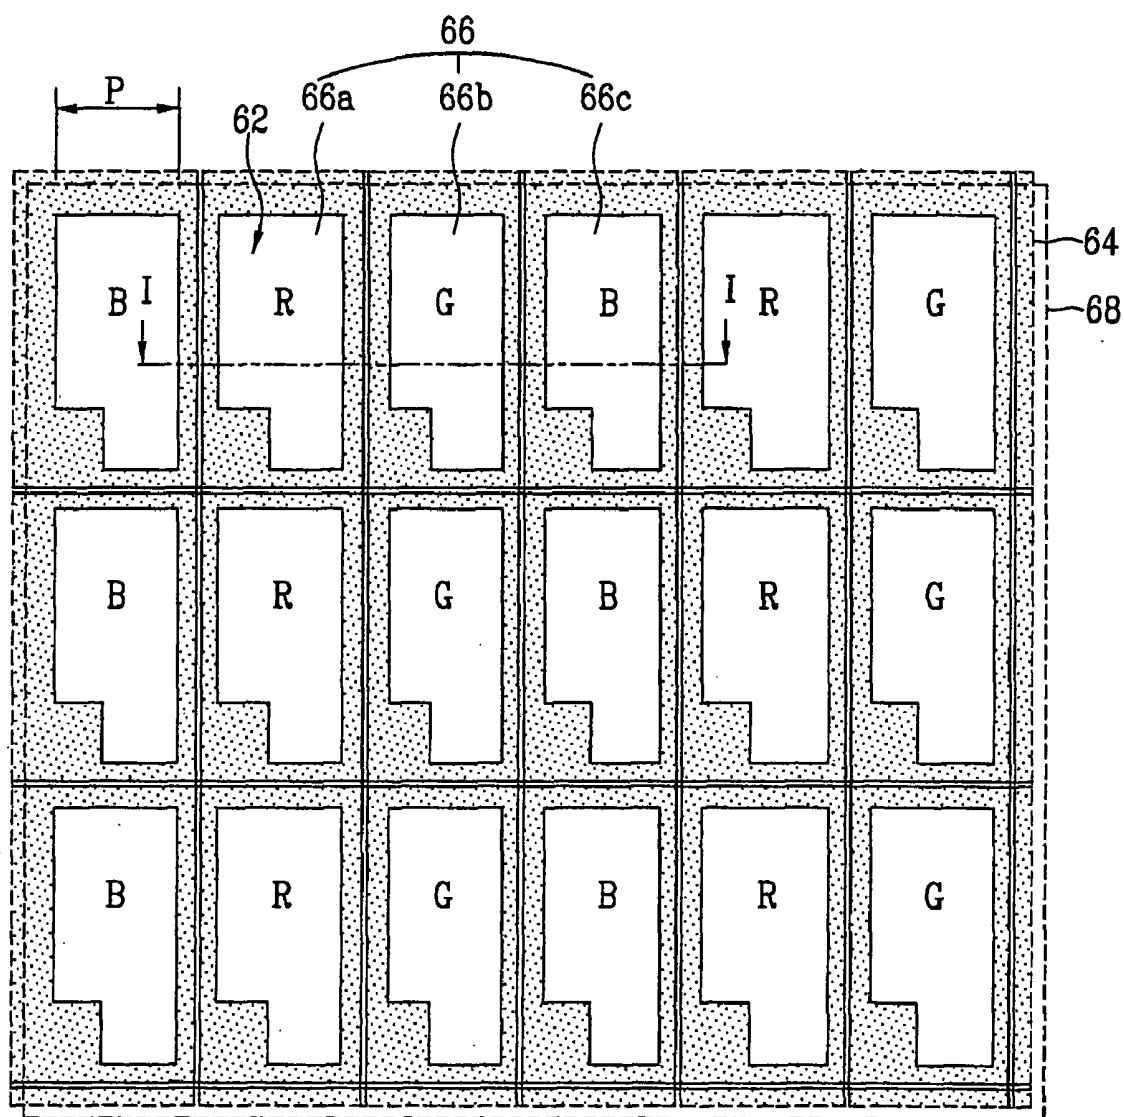


FIG. 2B
Related Art

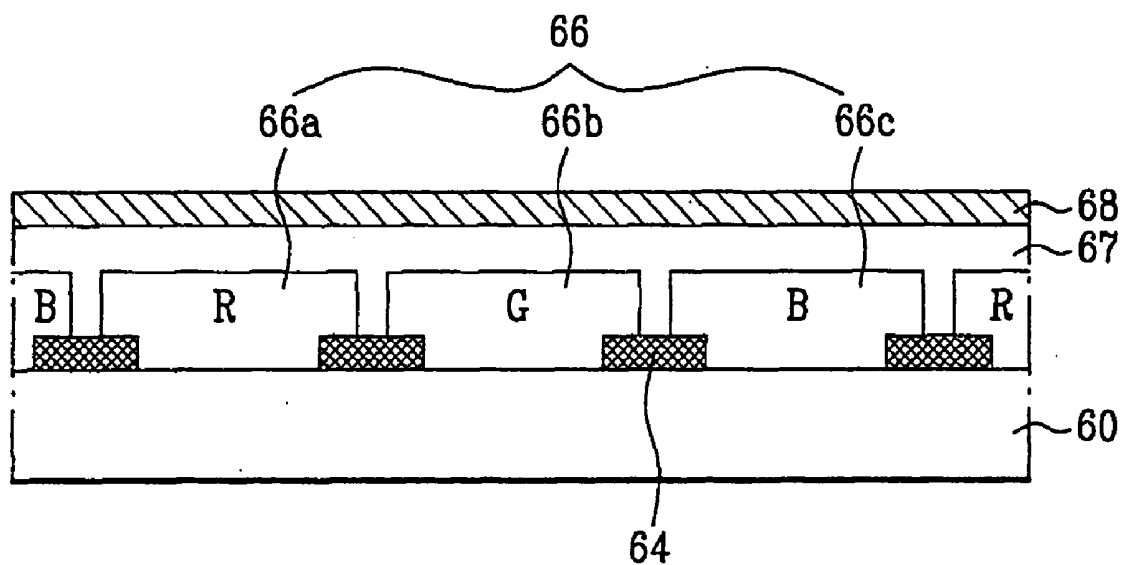


FIG. 3A
Related Art



FIG. 3B
Related Art

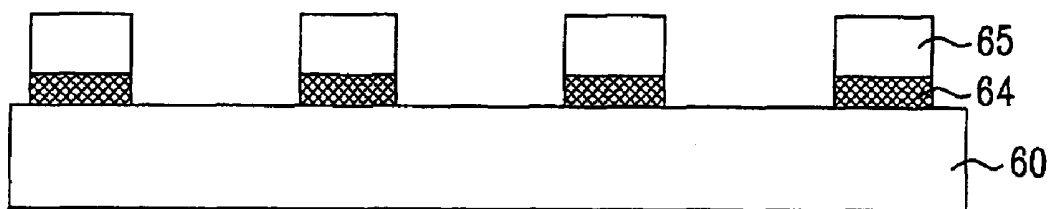


FIG. 3C
Related Art

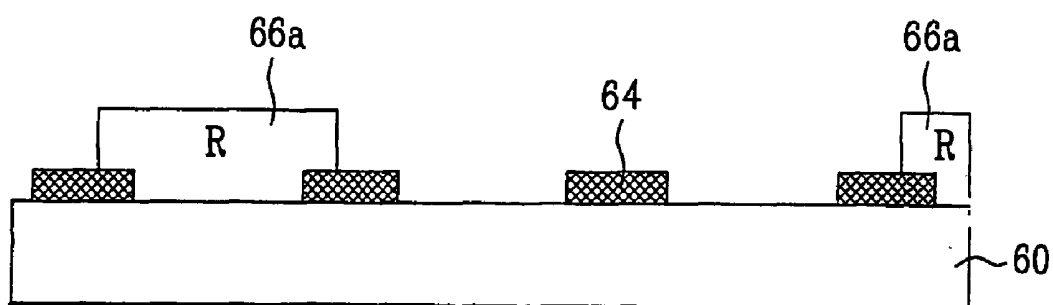


FIG. 3D
Related Art

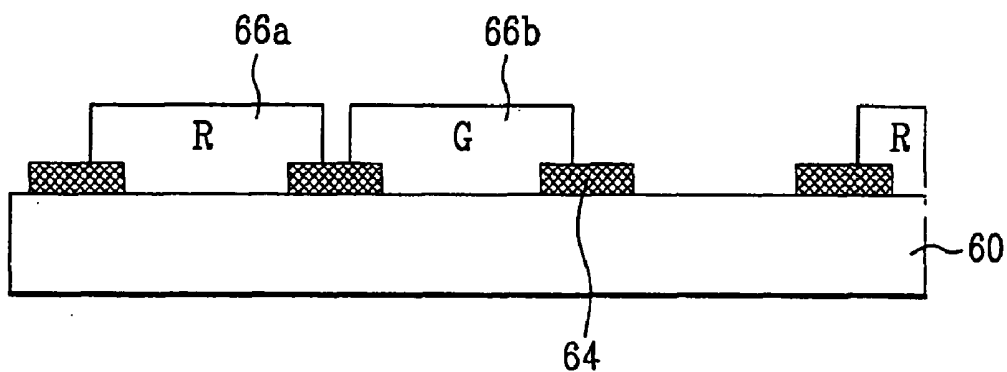


FIG. 3E
Related Art

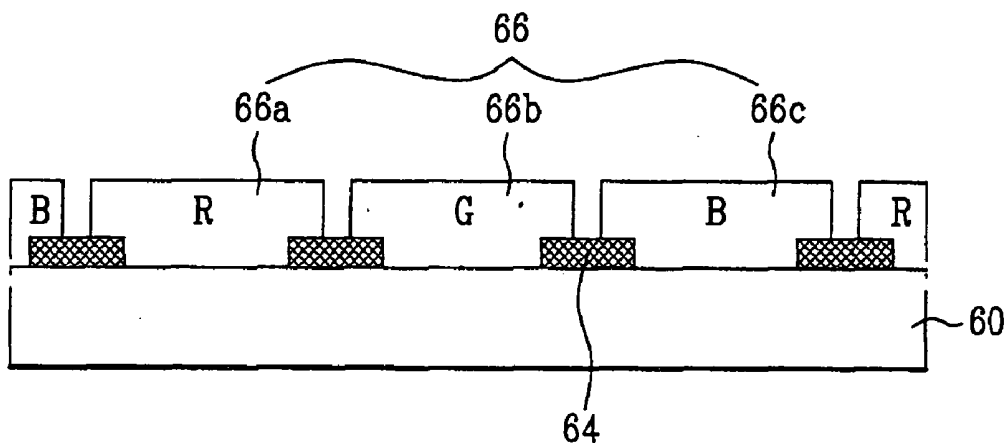


FIG. 3F
Related Art

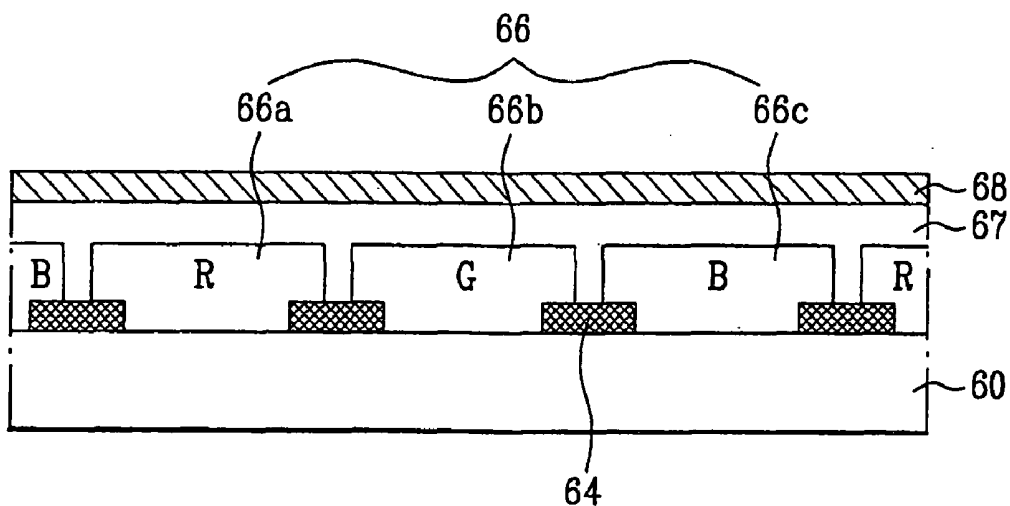


FIG. 4

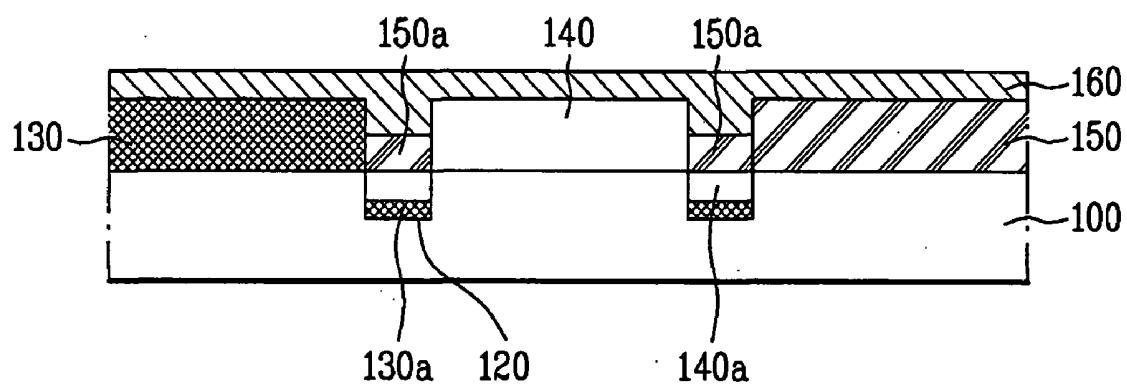


FIG. 5A

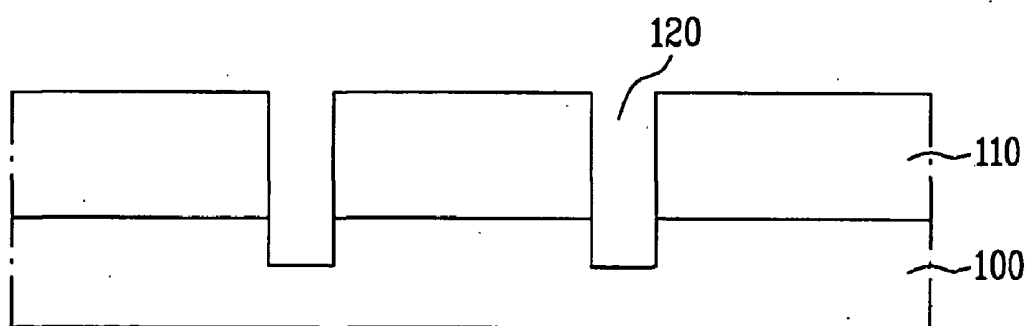


FIG. 5B

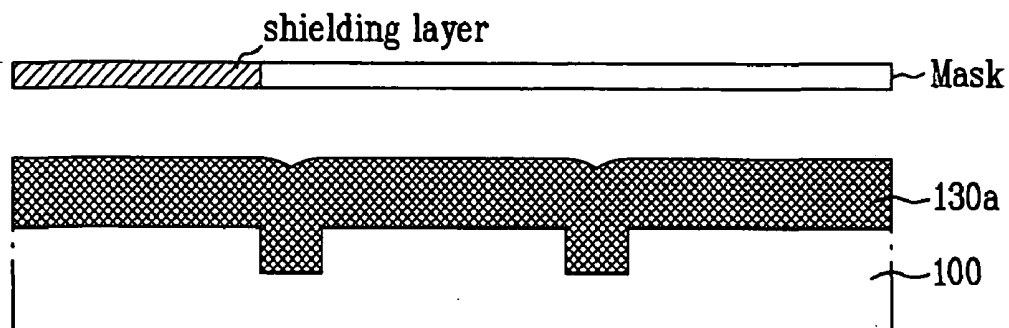


FIG. 5C

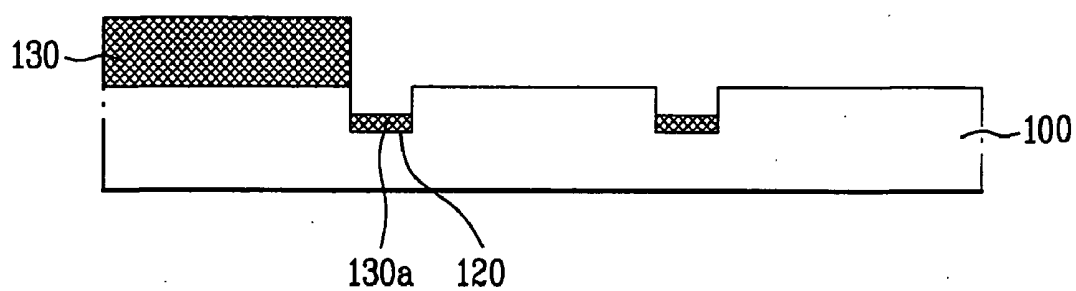


FIG. 5D

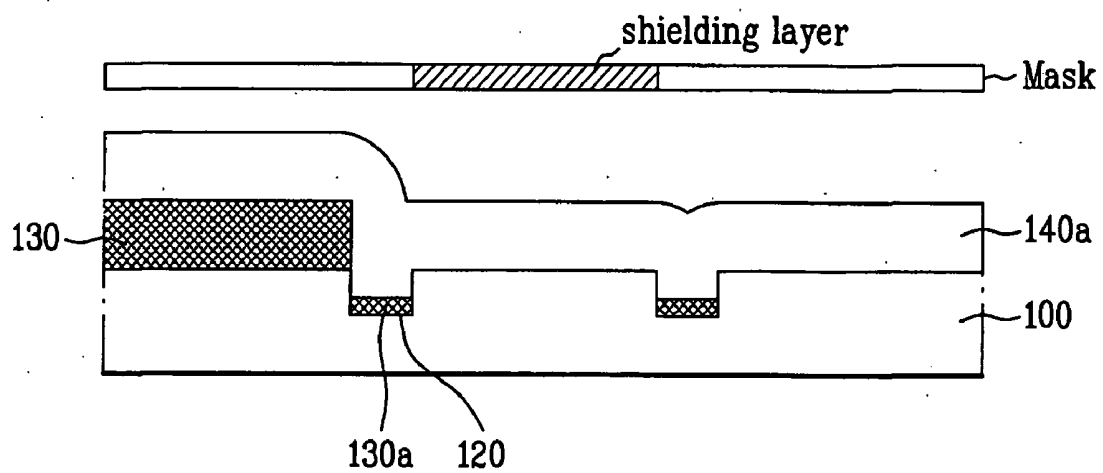


FIG. 5E

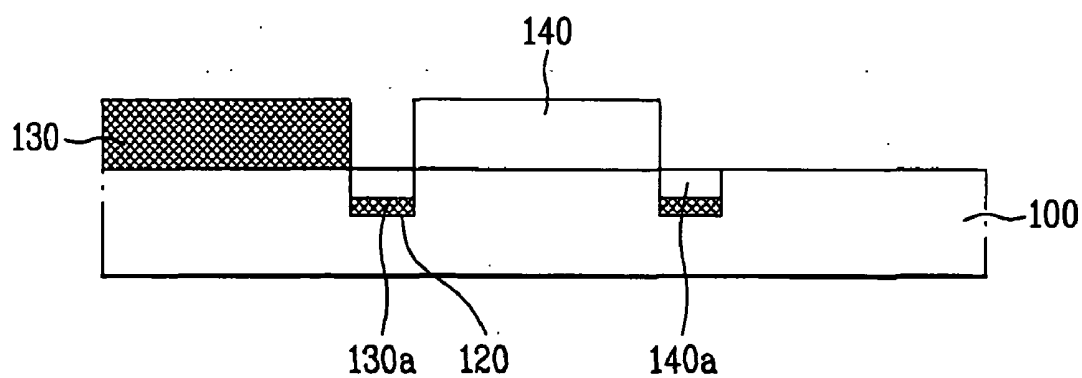


FIG. 5F

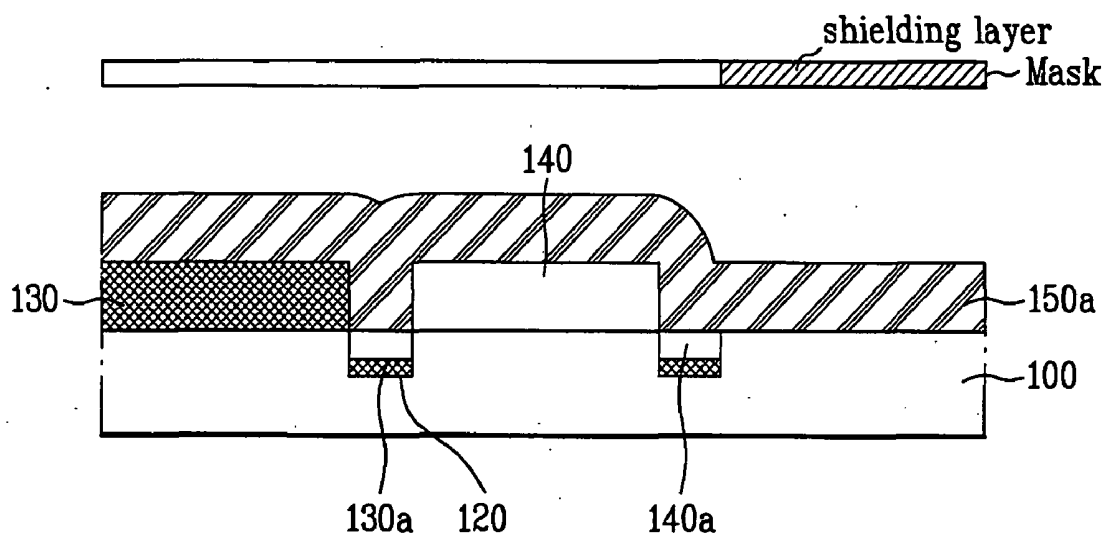


FIG. 5G

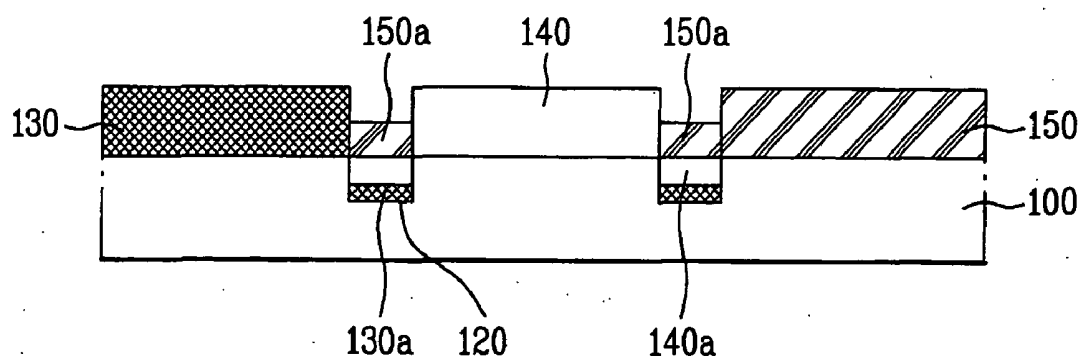


FIG. 5H


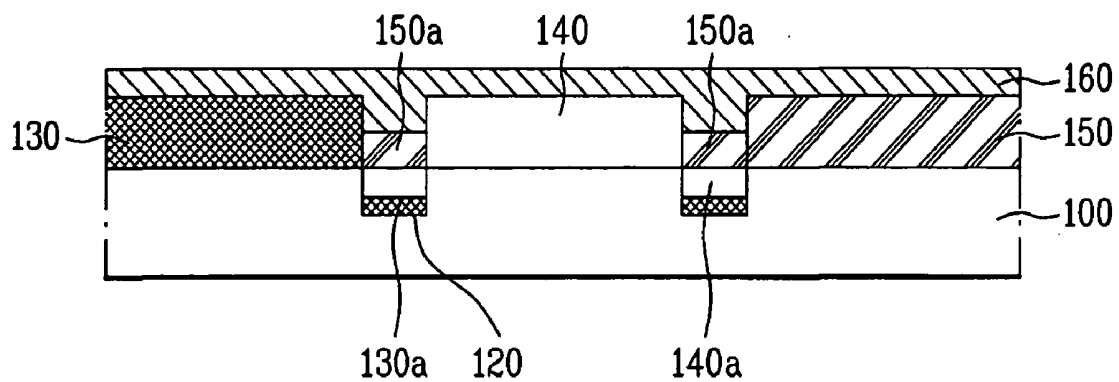


FIG. 6

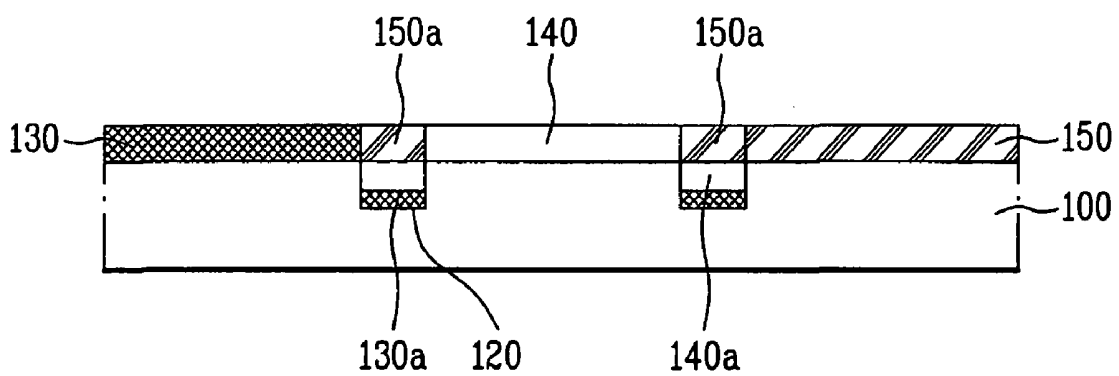

COLOR FILTER SUBSTRATE FOR LIQUID CRYSTAL DISPLAY DEVICE AND METHOD FOR MANUFACTURING THE SAME

[0001] This application claims the benefit of Korean Application Nos. P2005-46723 filed on Jun. 1, 2005 and 10-2005-0075823 filed on Aug. 18, 2005, both hereby incorporated by reference herein.

TECHNICAL FIELD

[0002] The present invention relates to a liquid crystal display (LCD) device and a method for manufacturing the same, and more particularly, to a color filter substrate for an LCD device and a method for manufacturing the same in which process steps are simplified and the manufacturing cost is reduced.

BACKGROUND

[0003] Generally, an LCD device displays a picture image by controlling light transmittance of a liquid crystal using an electric field.

[0004] To this end, the LCD device includes a liquid crystal panel arranged in a matrix arrangement and a driving circuit for driving the liquid crystal panel.

[0005] The liquid crystal panel is provided with pixel electrodes and a common electrode to apply the electric field to each of liquid crystal cells.

[0006] The pixel electrodes are formed on a lower substrate in a liquid crystal cell while the common electrode is formed on an entire surface of an upper substrate in a single body. Each of the pixel electrodes is connected with a thin film transistor (TFT) used as a switching device. The pixel electrodes are driven along with the common electrode in accordance with a data signal supplied through the TFT.

[0007] The LCD device can be fabricated to have a smaller size than that of a cathode ray tube, and is widely used for personal computers, notebook computers, office automation machines such as copiers, cellular phones, and pagers.

[0008] An active matrix type LCD device employs color filters of red (R), green (G), and blue (B) corresponding to the three primary colors of light to display a range of colors.

[0009] The respective color filters are arranged adjacent to one another and a corresponding color signal is applied to each color filter to control brightness, thereby displaying the colors.

[0010] The LCD device is fabricated using several processes with a substrate, including washing, substrate manufacture, substrate bonding/liquid crystal injection, and packaging. In the manufacturing process, the color filters are formed on the upper substrate.

[0011] Generally, a pigment dispersing method is most widely used to manufacture each color filter. In the pigment dispersing method, the color filter is manufactured by coating, exposure, development, and firing after dispersing pigment into a polyimide or acryl resin material of the color filter.

[0012] The pigment dispersing method has an advantage in that it is easy to form a fine pattern of the color filter.

However, the pigment dispersing method has a drawback in that the manufacturing process of the color filter is complicated because a photolithographic process is required for each of the R, G, and B color filters.

[0013] FIG. 1 is perspective assembly view illustrating a portion of a general LCD device.

[0014] As shown in FIG. 1, upper and lower substrates 10 and 30 oppose each other and they are separated from each other at a constant interval. A liquid crystal layer 50 is interposed between the substrates 10 and 30.

[0015] The lower substrate 30 is provided with a plurality of gate lines 32 and a plurality of data lines 34, wherein the gate lines 32 cross the data lines 34. A TFT (T) is formed at each crossing point where the gate lines 32 cross the data lines 34.

[0016] Further, a pixel region (P) is defined by the crossing point and provided with a pixel electrode 46 connected with the TFT.

[0017] Meanwhile, although not shown in detail, the TFT includes a gate electrode supplied with a gate voltage, source and drain electrodes supplied with a data voltage, and a channel that controls the On/Off state of the TFT using the difference between the gate voltage and the data voltage.

[0018] A color filter layer 12 and a common electrode 16 are sequentially formed on the upper substrate 10.

[0019] The color filter layer 12 includes a color filter that transmits light of a specific wavelength band only and a black matrix disposed at the boundary of the color filter to shield light on the pixel region P of the lower substrate 30.

[0020] Upper and lower polarizing plates 52 and 54 are respectively disposed on outer surfaces of the upper and lower substrates 10 and 30 to transmit light only parallel with a polarizing shaft. As a separate light source, a back light is arranged below the lower polarizing plate 54.

[0021] As described above, the aforementioned LCD device requires color filters of three primary colors of R, G and B to display full colors.

[0022] Hereinafter, a related art color filter substrate for an LCD device and a method for manufacturing the same will be described with reference to the accompanying drawings.

[0023] FIG. 2A is a plane view illustrating a related art color filter substrate for an LCD device and FIG. 2B is a sectional view taken along line I-I of FIG. 2A.

[0024] As shown in FIG. 2A, black matrices 64 and color filter layers 66 are formed. Each of the black matrices 64 surrounds a pixel region P and includes an opening 62. Each of the color filter layers 66 is provided with R, G and B color filters 66a, 66b and 66c that are repeatedly arranged in sequence using the black matrices 64 as the boundaries per color.

[0025] As shown in the cross-sectional view of FIG. 2B, subsequently, a common electrode 68 is formed on an entire surface of a substrate 60 including the color filter layers 66.

[0026] In other words, as shown in FIG. 2B, the black matrices 64 are formed on a glass substrate 60 and spaced apart from one another at constant intervals. The R, G and B color filters 66a, 66b and 66c are sequentially formed

using the black matrices **64** as the boundaries for the color filter layers **66**. An overcoat layer **67** and the common electrode **68** are sequentially formed on the entire surface of the substrate **60** including the color filter layers **66**.

[0027] FIG. 3A to FIG. 3F are sectional views illustrating a related art method for manufacturing a color filter substrate for an LCD device.

[0028] As shown in FIG. 3A, a resin material **64a** of consisting of a metal thin film, such as chrome, or carbon is deposited on the glass substrate **60** by sputtering.

[0029] As shown in FIG. 3B, a photoresist **65** is deposited on the resin material **64a** and then patterned by exposing and developing processes to define a black matrix region.

[0030] Subsequently, the resin material **64a** is selectively patterned using the patterned photoresist **65** as a mask to form the black matrices **64** at constant intervals.

[0031] The black matrices **64** are formed to correspond to a corner of a unit pixel and a region where the TFT is formed, and they shield a region having unstable electric field.

[0032] In FIG. 3C, an R color resist is deposited on the entire surface of the glass substrate **60** including the black matrices **64**. Then, the R color resist is selectively patterned by a photolithographic process to form the R color filter **66a** where both ends overlap on the black matrices **64**.

[0033] In FIG. 3D, a G color resist is deposited on the entire surface of the glass substrate **60** including the R color filter **66a**. Subsequently, the G color resist is selectively patterned by the photolithographic process to form the G color filter **66b**.

[0034] The G color filter **66b** is formed in a pixel adjacent to the R color filter **66a** with the black matrix **64** therebetween.

[0035] In FIG. 3E, a B color resist is deposited on the entire surface of the glass substrate **60** including the G color filter **66b**. Then, the B color resist is selectively patterned by the photolithographic process to form the B color filter **66c**.

[0036] The B color filter **66c** is formed in a pixel adjacent to the G color filter **66b** with the black matrix **64** therebetween. Thus, the color filter layers **66** of R, G and B are completed.

[0037] The color filter layers **66** are generally formed in the order of R, G and B.

[0038] As shown in FIG. 3F, to protect and planarize the color filter layers **66**, a planarization film is deposited on the entire surface of the glass substrate **60** including the color filter layers **66** by spin coating an acryl based resin or polyimide based resin, thereby forming the overcoat layer **67**.

[0039] Subsequently, indium tin oxide (ITO) is deposited on the overcoat layer **67** by sputtering to form the common electrode **68**. The ITO has good transmittivity, good conductivity and excellent thermal stability, and is a preferred material for a transparent electrode.

[0040] The common electrode **68** serves to drive the liquid crystal cell along with a pixel electrode formed on a TFT array substrate.

[0041] In accordance with the prior art process described above, the color filter substrate including the black matrices **64**, the color filter layers **66**, the overcoat layer **67**, and the common electrode **68** is completed.

[0042] For reference, in an in-plane switching (IPS) mode LCD device, since the common electrode is formed on the TFT array substrate, the color filter substrate supports the black matrices, the color filter layers, and the overcoat layer.

[0043] However, the aforementioned related art color filter substrate for the LCD and the method for manufacturing the same have several problems.

[0044] First, since the black matrices are formed at the boundary of each color filter using either metal such as Cr or black resin, the black matrix manufacturing cost is high. Second, since the overcoat layer is separately formed to planarize the color filters having an uneven step difference due to the intervening black matrices, the process is complicated and the process time becomes long. Finally, if each color filter is formed to overlap the black matrices, it is difficult to obtain satisfactory planarization and optical density.

BRIEF SUMMARY

[0045] Accordingly, the present invention is directed to a color filter substrate for an LCD device and a method for manufacturing the same, which substantially obviate one or more problems due to limitations and disadvantages of the related art.

[0046] Additional advantages and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0047] To achieve these and other advantages and in accordance with the invention, as embodied and broadly described herein, a color filter substrate for an LCD device includes a substrate having a plurality of color filter regions and a black matrix region, red, green and blue color filters in the respective color filter regions of the substrate, a trench in the black matrix region of the substrate having a predetermined depth, and a black matrix inside the trench and comprising overlapping the red, green, and blue color filters.

[0048] In another aspect of the present invention, a method for manufacturing a color filter substrate for an LCD device includes the steps of preparing a substrate having a plurality of color filter regions and a black matrix region, forming a trench in the black matrix region of the substrate at a predetermined depth, forming red, green and blue color filters respectively in the color filter regions of the substrate, and sequentially overlapping a portion of the red, green and blue color filters to form a black matrix inside the trench.

[0049] In yet another aspect a method of forming a black matrix in substrate for an LCD device includes the steps of providing a substrate and forming a trench in the substrate, and forming overlying red, green, and blue color resists either in the trench or in an area defined by the trench.

[0050] In still another aspect, a color filter substrate for an LCD device includes a substrate having a plurality of color filter regions, red, green and blue color filters in the respective color filter regions of the substrate, a trench defining a black matrix region on the substrate, wherein a black matrix material in the black matrix region comprises overlying portions of the red, green, and blue color filters.

[0051] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0052] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

[0053] **FIG. 1** is an elevational view illustrating some region of a general LCD device;

[0054] **FIG. 2A** is a plane view illustrating a related art color filter substrate for an LCD device;

[0055] **FIG. 2B** is a sectional view taken along line I-I of **FIG. 2A**;

[0056] **FIG. 3A** to **FIG. 3F** are sectional views illustrating a related art method for manufacturing a color filter substrate for an LCD device;

[0057] **FIG. 4** is a sectional view illustrating a color filter substrate for an LCD device according with an embodiment of the present invention;

[0058] **FIG. 5A** to **FIG. 5H** are sectional views illustrating a method for manufacturing a color filter substrate for an LCD device in accordance with an embodiment of the present invention; and

[0059] **FIG. 6** is a sectional view showing the color filter substrate after a planarization process.

DETAILED DESCRIPTION

[0060] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0061] **FIG. 4** is a sectional view illustrating a color filter substrate for an LCD device according to an embodiment of the present invention.

[0062] As shown in **FIG. 4**, the color filter substrate for an LCD device according to the present invention includes a transparent substrate **100** having a plurality of color filter regions and a black matrix region. R, G and B color filters **130**, **140** and **150**, respectively, are formed in each color filter region of the substrate **100**. Trenches **120** are formed in the black matrix region of the substrate **100** at a predetermined depth. A black matrix is formed inside the trench **120** at the same material as that of the color filters **130**, **140**

and **150**, and a common electrode **160** is formed on the color filters **130**, **140** and **150** and the black matrix.

[0063] In the black matrix, respective portions of color resists **130a**, **140a**, and **150a** of the R color filter **130**, the G color filter **140** and the B color filter **150** remain in the trench **120** in a sequentially deposited pattern.

[0064] Also, the black matrix and the color filters **130**, **140** and **150** are formed at the same height as one another.

[0065] **FIG. 5A** to **FIG. 5H** are sectional views illustrating a method for manufacturing the color filter substrate for the LCD device according to an embodiment of the present invention.

[0066] As shown in **FIG. 5A**, a photoresist layer **110** is deposited on the transparent substrate **100** and then selectively patterned by an exposure and development process to define the black matrix region.

[0067] Other regions of the substrate **100** except for the black matrix region are configured for the color filters and correspond to a pixel region of a lower substrate.

[0068] Subsequently, the exposed substrate **100** is selectively etched using the patterned photoresist **110** layer as a mask to form the trench **120** having a predetermined depth.

[0069] The trench **120** preferably has a depth of about 10 microns (μm) or less and, more preferably, about 5 μm to about 10 μm . Preferably, an etching gas containing HF is used for etching the substrate **100**.

[0070] As shown in **FIG. 5B**, the photoresist **110** is removed, and the R color resist **130a** is deposited on the entire surface of the substrate **100** including the trench **120**.

[0071] The R color resist **130a** can be formed by a spinning method or a spinless coating method.

[0072] In the spinning method, a color resist is deposited on the substrate and the substrate is rotated at high speed to uniformly disperse the color resist over the substrate. In the spinless coating method, the color resist on a roll is transferred/printed onto the substrate.

[0073] Further, in similarity with a general photoresist, the R color resist **130a** contains a photo-polymerization initiator, a monomer, a binder, and an organic pigment for displaying color.

[0074] When the R color filter **130a** is deposited on the entire surface of the substrate **100**, the color resist over the trench **120** has a greater thickness than the other portions due to its planarization characteristic.

[0075] As shown in **FIG. 5C**, after a specific region of the R color resist **130a** is masked by a light-shielding portion of a mask, the R color resist **130a** is exposed by irradiating UV rays.

[0076] At least one of three methods for exposing the color resist can be used, such as a proximity method that exposes an original plate by sunlight, a stepper method that performs exposure by repeating a reduced pattern, and a mirror projecting method that performs exposure by projecting a mask pattern.

[0077] For a simple matrix LCD based on low cost fabrication, the proximity method can be used having high processing speed, while the fabrication of an active matrix

LCD that requires high accuracy requires the use of the stepper method or the mirror projecting method.

[0078] The irradiated R color resist **130a**, of which the photo-chemical structure has been changed by exposure, is hardened at high temperature of 230° C. and developed to form the R color filter **130**. Next, the R color resist **130a** is developed using a developing method such as dipping, puddle, and shower spray.

[0079] For reference, if the R color resist **130a** has negative resist characteristic, a non-exposed portion is removed. In this case, the specific region for the pattern is exposed to the light-transmitting portion of the mask unlike the aforementioned case.

[0080] Meanwhile, if the R color resist **130a** is developed to form the R color filter **130**, the color resist overlying the trench **120** has a greater thickness than the other portions due to its planarization characteristic as described above. Therefore, as shown in **FIG. 5C**, a portion of the R color resist **130a** remains at a predetermined thickness without being completely removed and serves as the black matrix.

[0081] As shown in **FIG. 5D**, the G color resist **140a** is deposited on the entire surface of the substrate **100** including the R color filter **130a**, and a specific region of the G color resist **140a** is masked by a light-shielding layer of a mask.

[0082] In **FIG. 5E**, the masked G color resist **140a** is exposed by UV irradiation and developed to form the G color filter **140**. The G color filter **140** is formed in a pixel adjacent to the R color filter **130** with the trench **120** therebetween.

[0083] As the G color resist **140a** is developed to form the G color filter **140**, the color resist inside the trench **120** has a greater thickness than the other portions due to its planarization characteristic as described above. Therefore, a portion of the G color resist **140a** remains in trench **120** at a predetermined thickness without being completely removed.

[0084] In **FIG. 5F**, the B color resist **150a** is deposited on the entire surface of the substrate **100** including the G color filter **140**, and a specific region of the B color resist **150a** is masked by the light-shielding portion of the mask. Then, the masked B color resist **150a** is exposed by UV irradiation.

[0085] Subsequently, as illustrated in **FIG. 5G**, the B color resist **150a**, of which photo-chemical structure has been changed by exposure, is developed to form the B color filter **150**. The B color filter **150** is formed in a pixel adjacent to the G color filter **140** with the trench **120** therebetween. Accordingly, the color filter layers of R, G and B are fabricated by the process described above.

[0086] When the B color resist **150a** is developed to form the B color filter **150**, the color resist over the trench **120** has a greater thickness than the other portions due to its planarization characteristic as described above. Therefore, a portion of the B color resist **150a** remains at a predetermined thickness without being completely removed and, in combination with color resist portions **130a** and **140a** serves as the black matrix.

[0087] Consequently, respective overlapping color resists **130a**, **140a**, and **150a** remain overlying the trenches **120** in a pattern generally corresponding to the trenches **120** and function as the black matrix.

[0088] As shown in **FIG. 5H**, in one embodiment of the invention, a layer **160** is deposited on the respective color

filters **130**, **140** and **150**. In one embodiment of the invention, layer **160** is an ITO layer formed by sputtering and forms a common electrode **160**. The ITO has good transmittivity, good conductivity and excellent thermal stability, and is a preferred material for the transparent electrode.

[0089] The common electrode **160** serves to drive the liquid crystal cells along with a pixel electrode formed on a TFT array substrate.

[0090] It is important to note that although layer **160** has been described as an ITO layer that forms a common electrode, layer **160** can simply be an overcoat layer. For example, in an in-plane-switching (IPS) mode LCD device, since the common electrode is formed on the TFT array substrate, the color filter substrate is completed by forming the color filter layers. Accordingly, where the inventive process is carried out to form an IPS mode LCD device, layer **160** represents an overcoat layer instead of a common electrode.

[0091] Where layer **160** is an overcoat layer, a planarization process is carried out either before or after forming the overcoat layer to form a smooth, relatively flat surface. As shown in **FIG. 6**, the planarization process creates a continuous upper surface across the color filters and the black matrix. Preferably, the planarization process is performed by a chemical mechanical polishing (CMP) process. The CMP process removes all surface materials at substantially the same rate to form an upper surface having a consistent height above substrate **100**.

[0092] As described above, the color filter substrate for the LCD device and the method for manufacturing the same according to the present invention have the following advantages.

[0093] First, since the black matrix is formed by overlapping the respective color filters after forming the trench in the black matrix region by selectively etching the substrate, no separate black matrix material is required, thereby reducing the manufacturing cost.

[0094] Second, since no step difference is formed between each color filter and the black matrix, the overcoat layer for planarization can be omitted. This can simplify the process steps and reduce the manufacturing cost.

[0095] Third, since the black matrix is formed in the trench by overlapping the respective color filters, it is possible to obtain uniform overlap thickness and optical density.

[0096] Finally, since no resin black matrix is used, it is possible to reduce the manufacturing cost and a defect that may be caused by projection of the black matrix.

[0097] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the inventions. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A color filter substrate for an LCD device comprising:
 - a substrate having a plurality of color filter regions and a black matrix region;
 - red, green and blue color filters in the respective color filter regions of the substrate;

a trench in the black matrix region of the substrate having a predetermined depth; and

a black matrix overlying the trench and comprising overlapping portions of the red, green, and blue color filters.

2. The color filter substrate according to claim 1, wherein one of the overlapping portions partially resides above the trench.

3. The color filter substrate for an LCD device according to claim 1, wherein each of the red, green and blue color filters has the same height as that of the black matrix.

4. The color filter substrate for an LCD device according to claim 1, wherein the height of the black matrix is less than the height of the red, green and blue color filters.

5. The color filter substrate for an LCD device according to claim 1 further comprising an overcoat layer overlying the red, green and blue color filters and the black matrix, wherein the overcoat layer has a planar upper surface.

6. The color filter substrate according to claim 1, further comprising a common electrode overlying the black matrix and the color filters.

7. A method for manufacturing a color filter substrate for an LCD device comprising the steps of:

preparing a substrate having a plurality of color filter regions and a black matrix region;

forming a trench in the black matrix region of the substrate at a predetermined depth;

forming red, green and blue color filters respectively in the color filter regions of the substrate and sequentially overlapping a portion of the red, green and blue color filters to form a black matrix overlying the trench.

8. The method according to claim 7, wherein forming the trench comprises forming a trench in the substrate having a depth of less than about 10 μm .

9. The method according to claim 7, wherein forming the trench comprises selectively etching the black matrix region of the substrate using an etching gas containing HF.

10. The method according to claim 7, wherein the step of forming the red, green and blue color filters comprises:

depositing a red color resist on the entire surface of the substrate including the trench and selectively patterning the red color resist;

depositing a green color resist on the entire surface of the substrate including the red color resist in the trench and selectively patterning the green color resist; and

depositing a blue color resist on the entire surface of the substrate including the green color resist in the trench and selectively patterning the blue color resist.

11. The method according to claim 10, wherein forming the trench and selectively patterning the overlapping portion of the red, green and blue color filters in the trench defines the black matrix on the substrate.

12. The method according to claim 7, further comprising the step of forming a common electrode overlying the substrate and the red, green and blue color filters and the black matrix.

13. The method according to claim 7, further comprising the step of forming an overcoat layer on each of the red, green and blue color filters and the black matrix.

14. A method of forming a black matrix in substrate for an LCD device comprising the steps of:

providing a substrate and forming a trench in the substrate; and

forming stacked red, green, and blue color resists overlying the trench.

15. The method of claim 14, wherein forming stacked red, green, and blue color resists overlying the trench comprises forming red, green, and blue color filters on the substrate, and wherein a portion of each color filter is formed in one of the trench or in an area defined by the trench.

16. The method of claim 14, wherein forming stacked red, green, and blue color resists comprises:

forming a first of the red, green, or blue color resist on the substrate and filling the trench and patterning the first color resist to define a first color filter on the substrate while leaving a first portion of the first color resist in the trench;

forming a second of the red, green, or blue color resist on the substrate and patterning the second color resist to define a second color filter on the substrate while leaving a second portion of the second color resist overlying the first portion of the first color resist; and

forming a third of the red, green, or blue color resist on the substrate and patterning the third color resist to define a third color filter on the substrate while leaving a portion of the third color resist overlying the second portion of the second color resist.

17. The method according to claim 14, wherein forming a trench in the substrate comprises forming a trench having a depth of less than about 10 microns.

18. The method according to claim 14, wherein forming a trench in the substrate comprises forming a trench having a depth of about 5 microns to about 10 microns.

19. A color filter substrate for an LCD device comprising:

a substrate having a plurality of color filter regions;

red, green, and blue color filters in the respective color filter regions of the substrate;

a black matrix region on the substrate defining the color filter regions;

and a black matrix material in the black matrix region comprising overlying portions of the red, green, and blue color filters.

20. The color filter substrate according to claim 19, wherein the red, green, and blue color filters and the black matrix material have a continuous upper surface.

21. The color filter substrate according to claim 19, further comprising a common electrode overlying the continuous surface.

22. The color filter substrate according to claim 19, wherein the height of the black matrix material is less than the height of the red, green and blue color filters.

23. The color filter substrate according to claim 22, further comprising a common electrode overlying the red, green and blue color filters and the black matrix material.

专利名称(译)	用于液晶显示装置的滤色器基板及其制造方法		
公开(公告)号	US20060274231A1	公开(公告)日	2006-12-07
申请号	US11/208487	申请日	2005-08-19
[标]申请(专利权)人(译)	KWON OHñ 朝兴大号 NAM承孝		
申请(专利权)人(译)	KWON OHñ 朝兴大号 NAM承孝		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KWON OH NAM CHO HEUNG LYUL NAM SEUNG HEE		
发明人	KWON, OH NAM CHO, HEUNG LYUL NAM, SEUNG HEE		
IPC分类号	G02F1/1335		
CPC分类号	G02F1/133516 G02F1/133512		
优先权	1020050075823 2005-08-18 KR 1020050046723 2005-06-01 KR		
其他公开文献	US7639321		
外部链接	Espacenet USPTO		

摘要(译)

一种用于LCD器件的滤色器基板及其制造方法，其中简化了工艺步骤并降低了制造成本。用于LCD装置的滤色器基板包括由多个滤色器区域和黑矩阵区域限定的基板，分别形成在基板的滤色器区域中的R、G和B滤色器，形成在黑矩阵中的沟槽通过重叠滤色器，在预定深度处的基板区域和在沟槽内形成的黑矩阵。

