

(19) **United States**(12) **Patent Application Publication**
Nagata et al.(10) **Pub. No.: US 2004/0021805 A1**(43) **Pub. Date: Feb. 5, 2004**(54) **LIQUID CRYSTAL DISPLAY DEVICE**(52) **U.S. Cl. 349/43**(76) Inventors: **Tetsuya Nagata**, Mobara (JP); **Koji Hiraga**, Ooamishirasato (JP); **Masao Uehara**, Mobara (JP); **Koichi Fukuda**, Mobara (JP)(57) **ABSTRACT**

Correspondence Address:

ANTONELLI, TERRY, STOUT & KRAUS,
LLP**1300 NORTH SEVENTEENTH STREET**
SUITE 1800
ARLINGTON, VA 22209-9889 (US)(21) Appl. No.: **10/629,559**(22) Filed: **Jul. 30, 2003**(30) **Foreign Application Priority Data**

Jul. 30, 2002 (JP) 2002-220607

Dec. 6, 2002 (JP) 2002-354496

Publication Classification(51) **Int. Cl.⁷ G02F 1/136**

The present invention provides a liquid crystal display device which reduces the reflection of light from a transmissive region, enhances a contrast of images and suppresses display of inverted images. The liquid crystal display device includes a first background film made of silicon nitride and a second background film made of silicon oxide over a glass substrate, and thin film transistors and light transmissive pixel portions are formed over the second background film. The thin film transistor is constituted of a polysilicon film, a gate electrode, a drain electrode and a source electrode, while a gate insulation film, an interlayer insulation film and an organic film are formed over the pixel portion. Further, the liquid crystal display device has a function of reflecting an external light, wherein by forming the first background film thicker than the second background film, the inversion of images of a transmissive type liquid crystal panel can be suppressed.

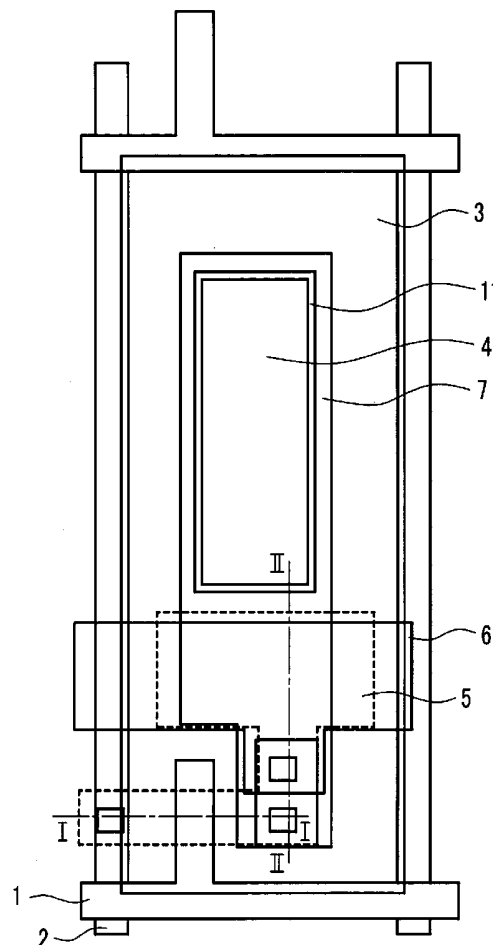


FIG. 1

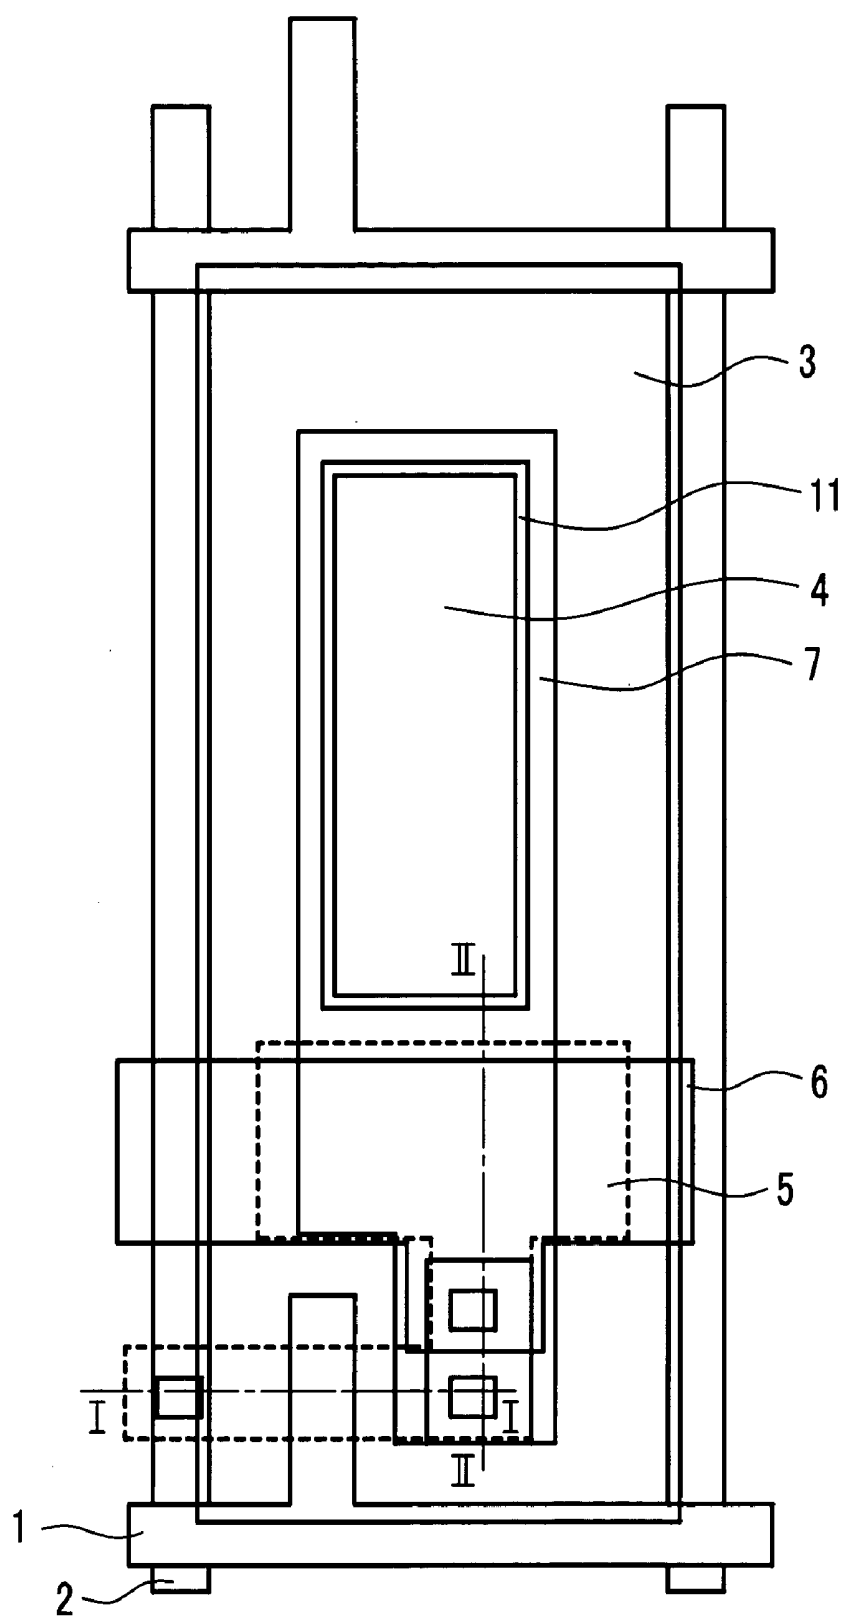


FIG. 2

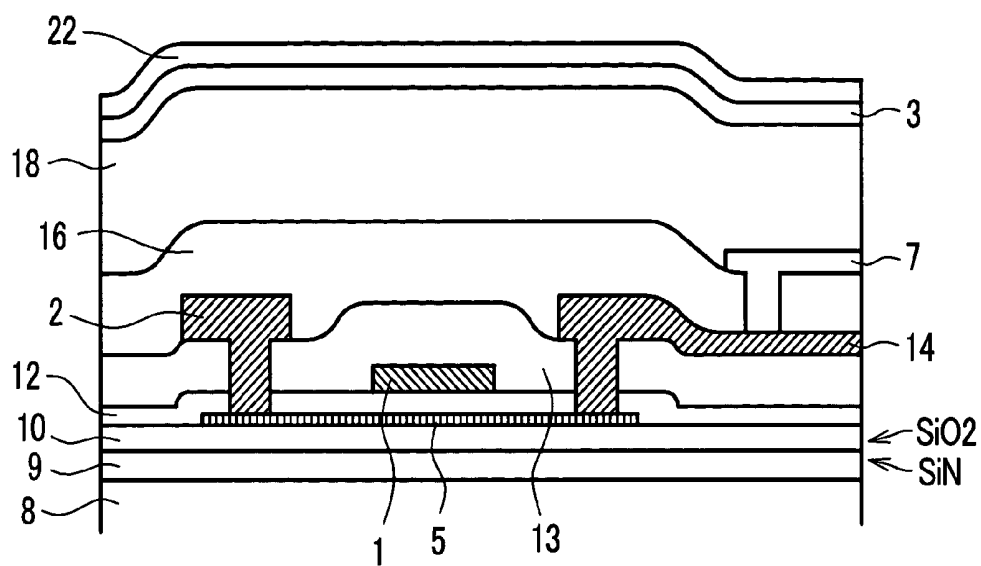


FIG. 3

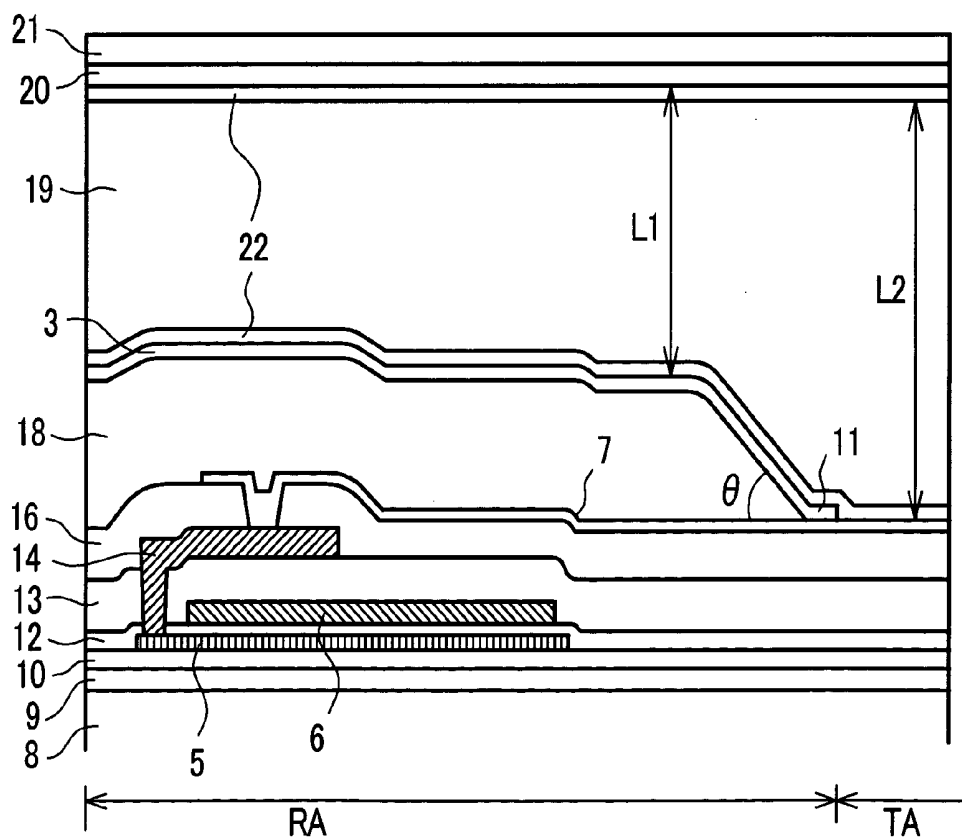


FIG. 4

	Material	d (nm)	n (Wave length : 555nm)
Orientation film/LC	Orientation film/LC		1.5
Transparent electrode	ITO	77	2.0
2nd. insulating film	SiO ₂	200	2.0
1st. insulating film	SiO ₂	540	1.5
Gate insulating layer	SiO ₂	100	1.5
2nd. lower layer	SiO ₂	100	1.5
1st. lower layer	SiN	50~180	2.0
Substrate	Glass		

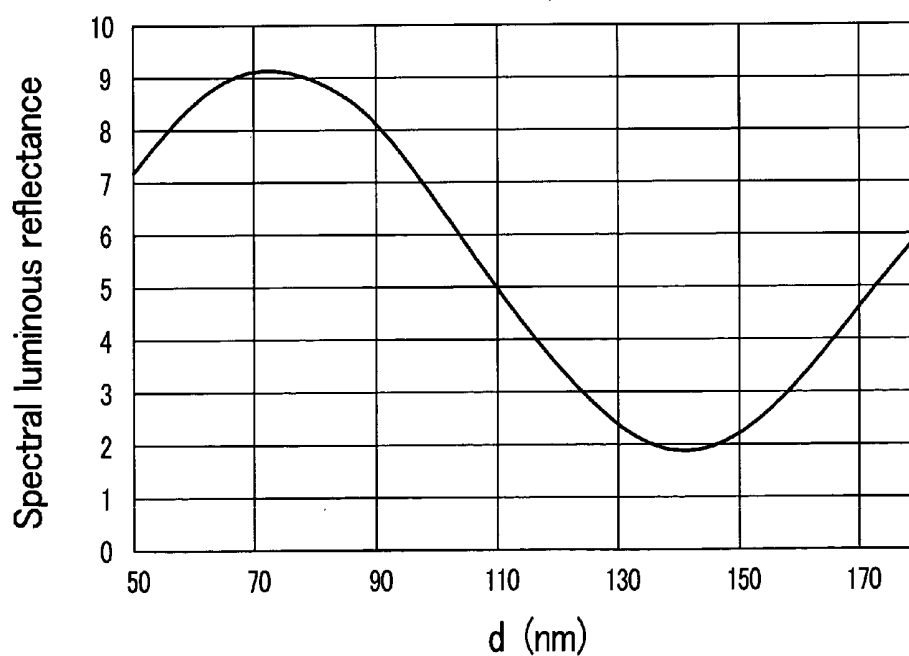
FIG. 5

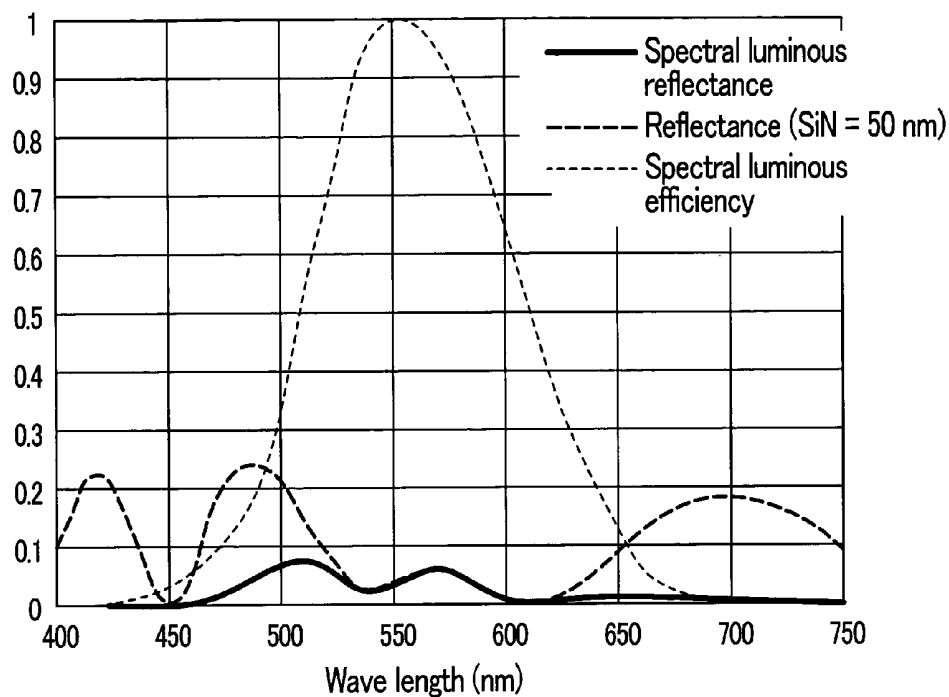
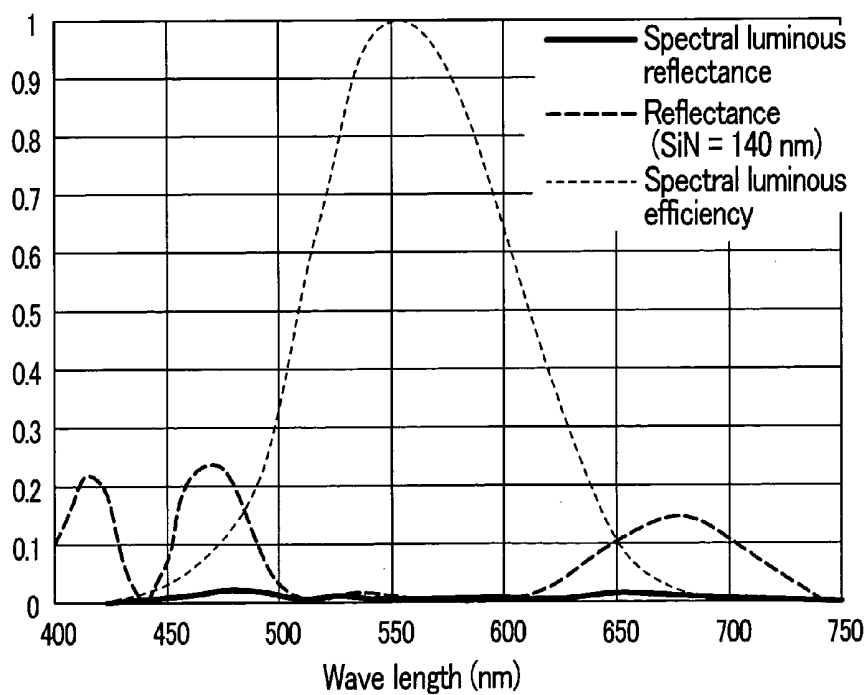
FIG. 6*FIG. 7*

FIG. 8

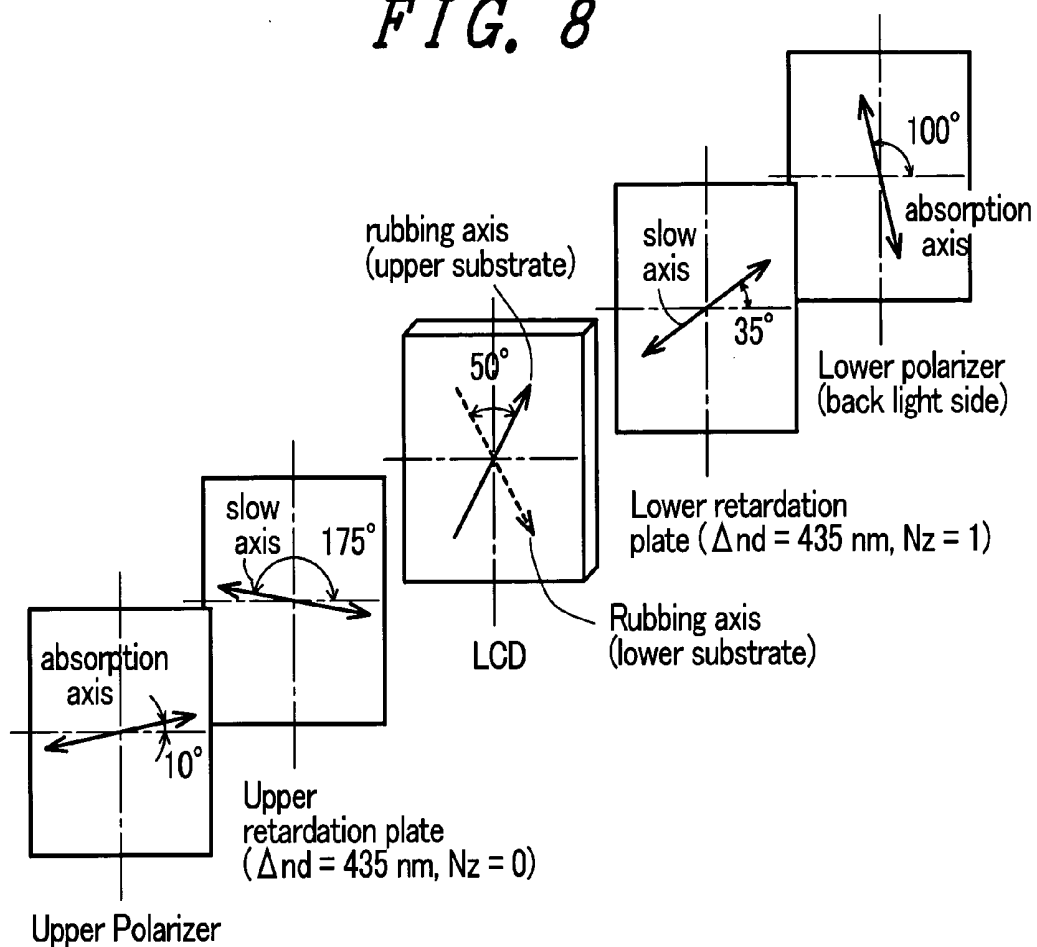


FIG. 9

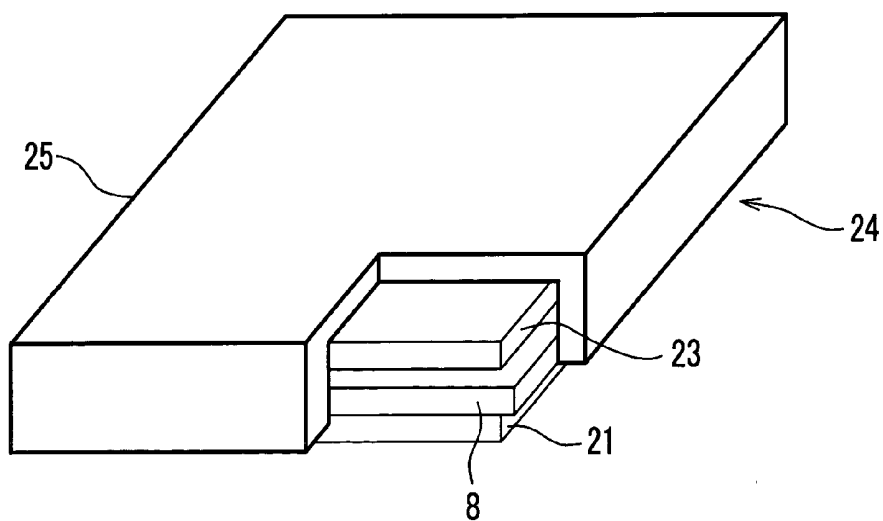


FIG. 10

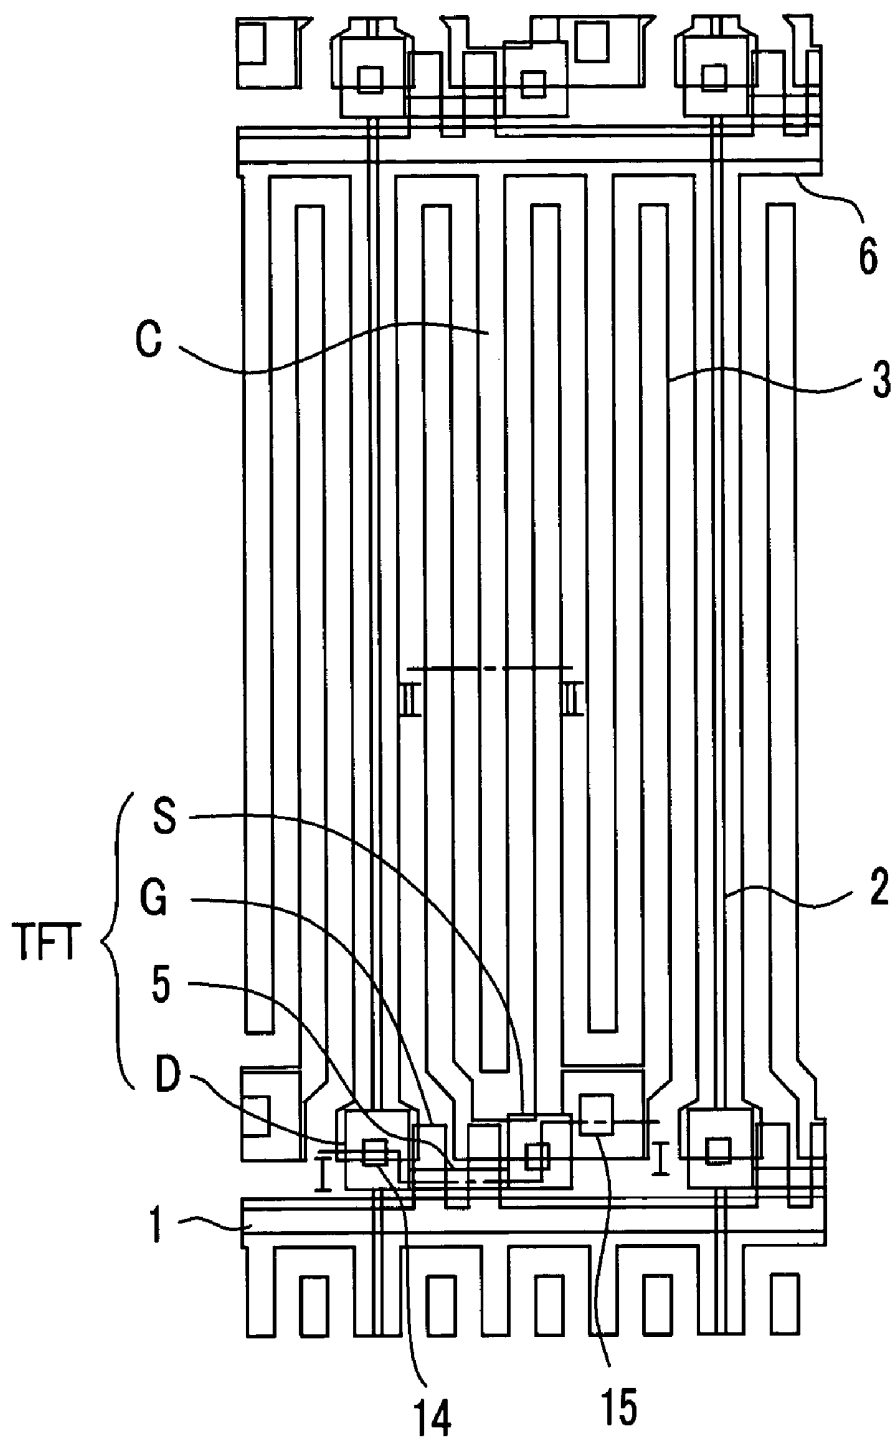


FIG. 11

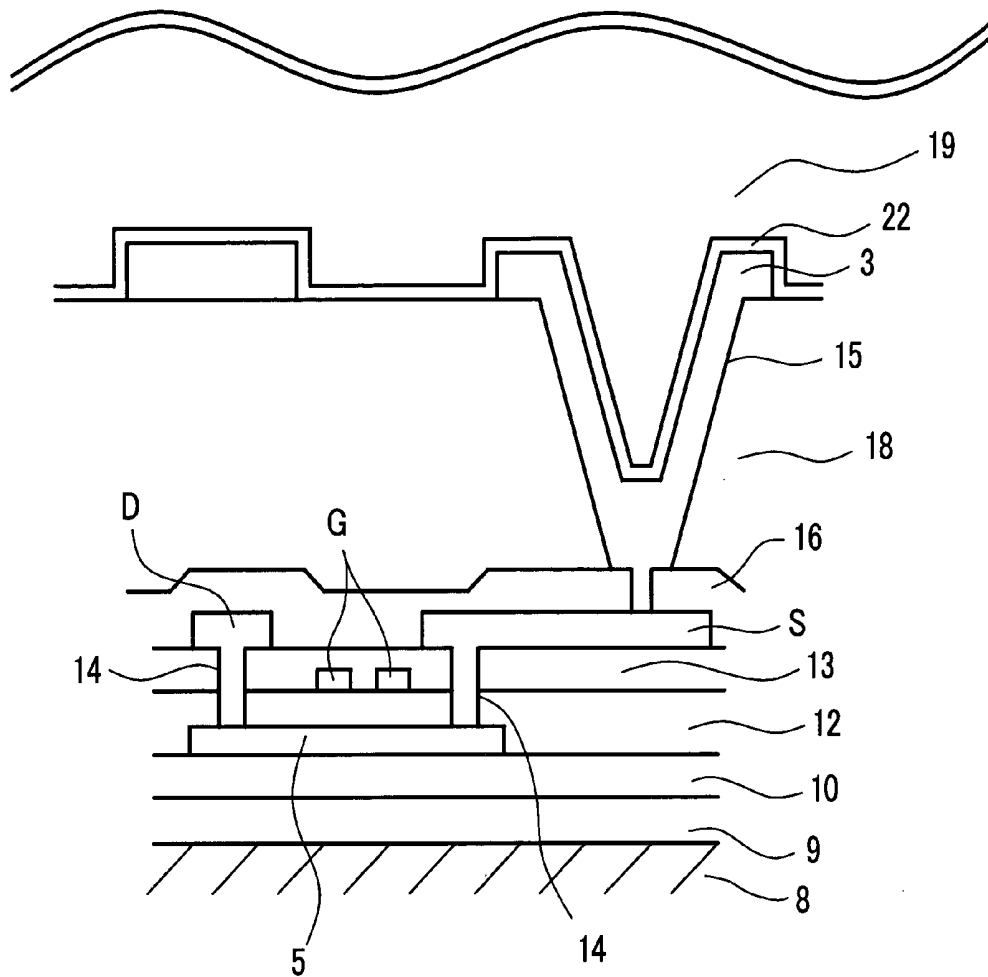


FIG. 12

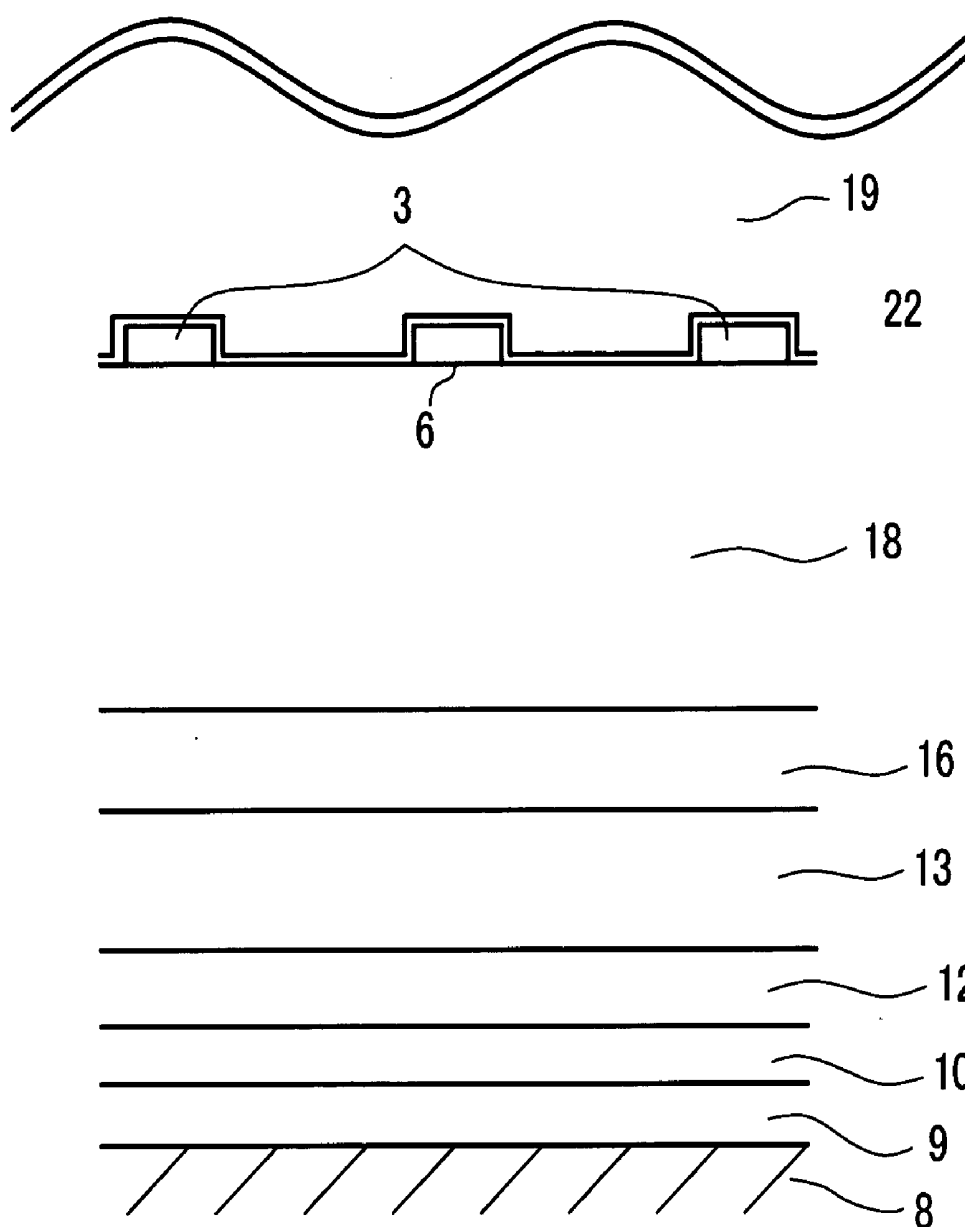


FIG. 13

	Material	d (nm)	n (Wave length : 555nm)
Orientation film/LC	Orientation film/LC	5200	1.5
Transparent electrode	ITO	140	2.0
Passivation film	Organic film	1730	1.6
2nd. insulating film	SiO ₂	300	1.85
1st. insulating film	SiO ₂	540	1.5
Gate insulating layer	SiO ₂	100	1.5
2nd. lower layer	SiO ₂	100	1.5
1st. lower layer	SiN	150	1.85
Substrate	Glass	—	1.5

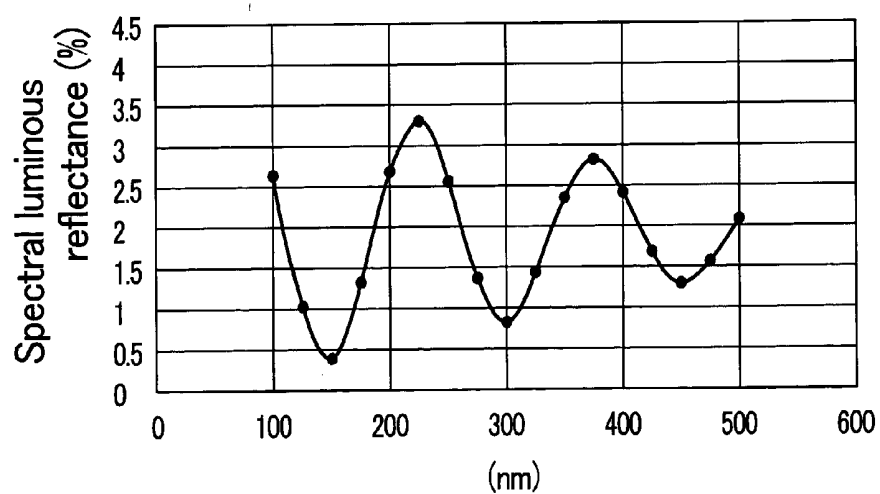
FIG. 14

FIG. 15

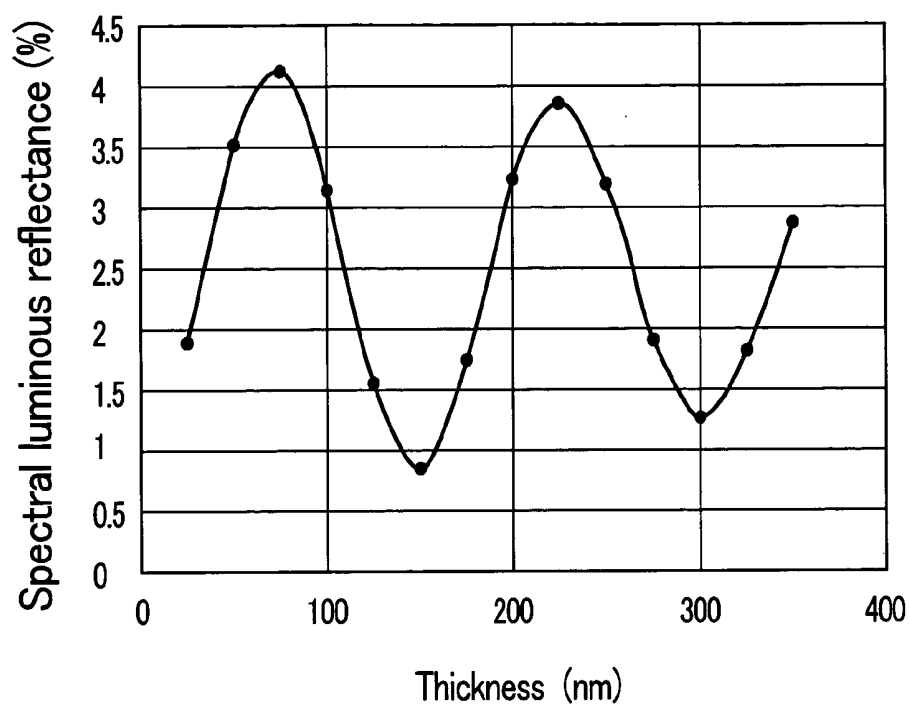


FIG. 16

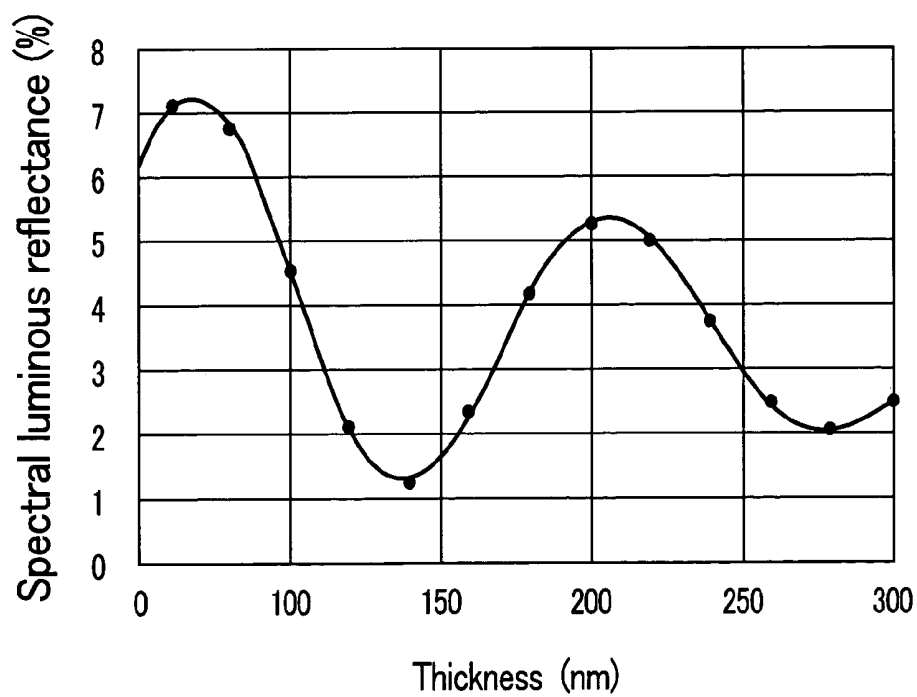


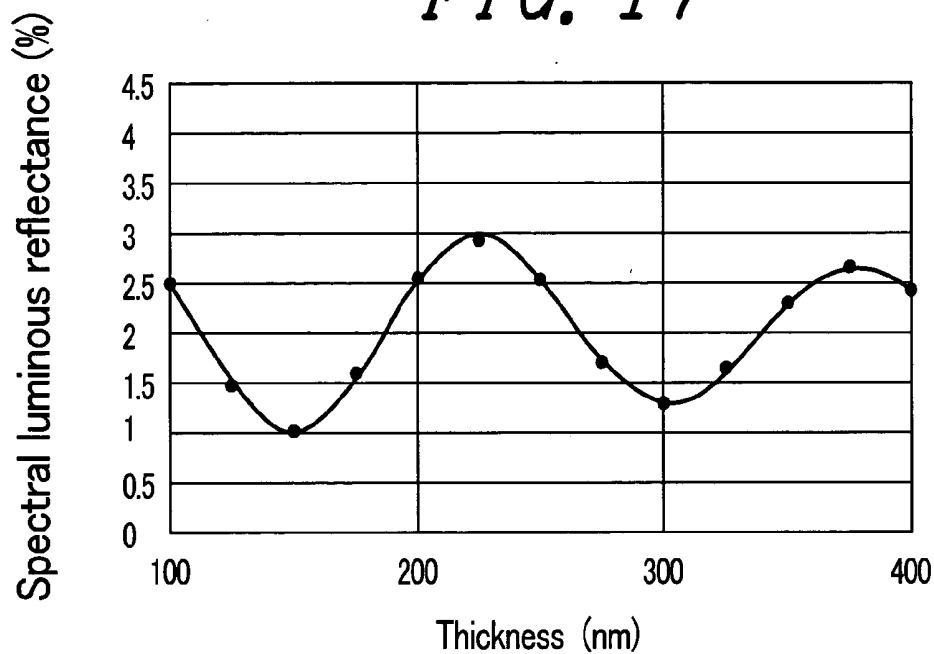
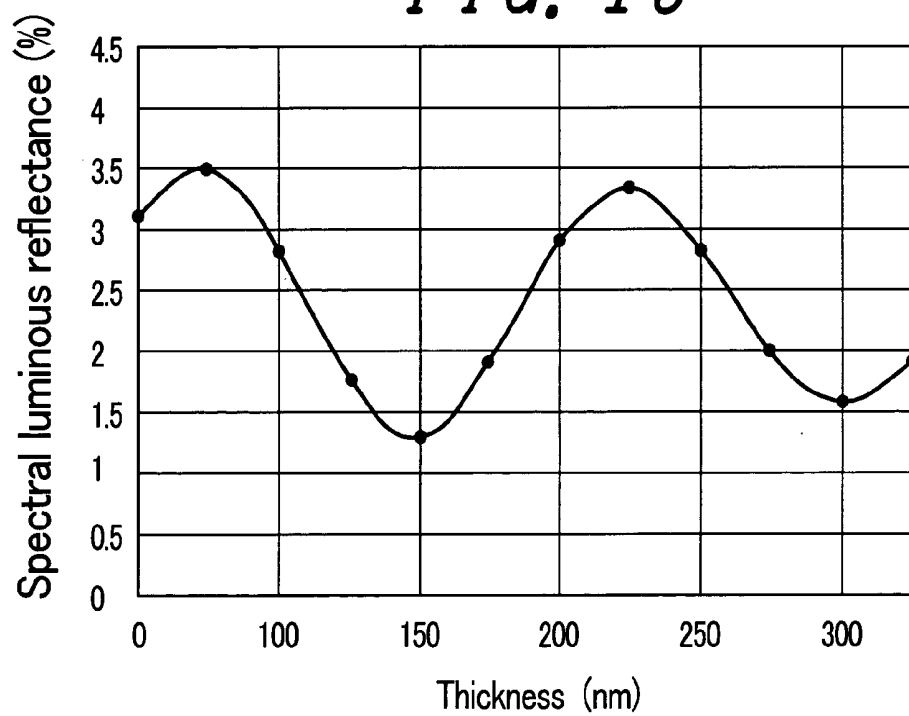
FIG. 17*FIG. 18*

FIG. 19

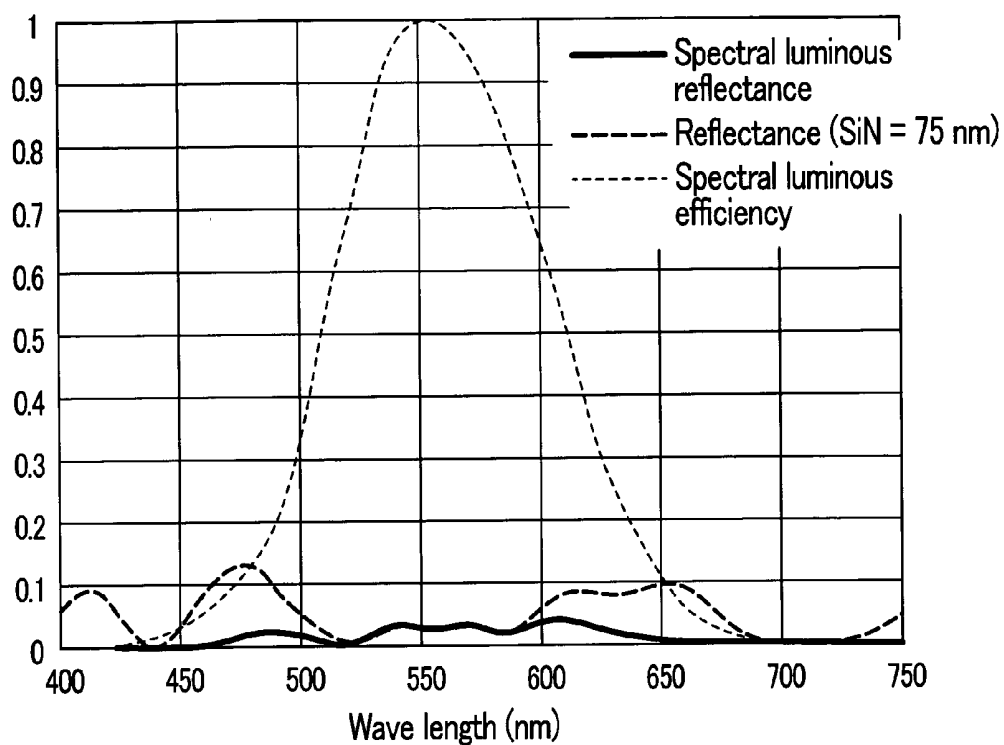


FIG. 20

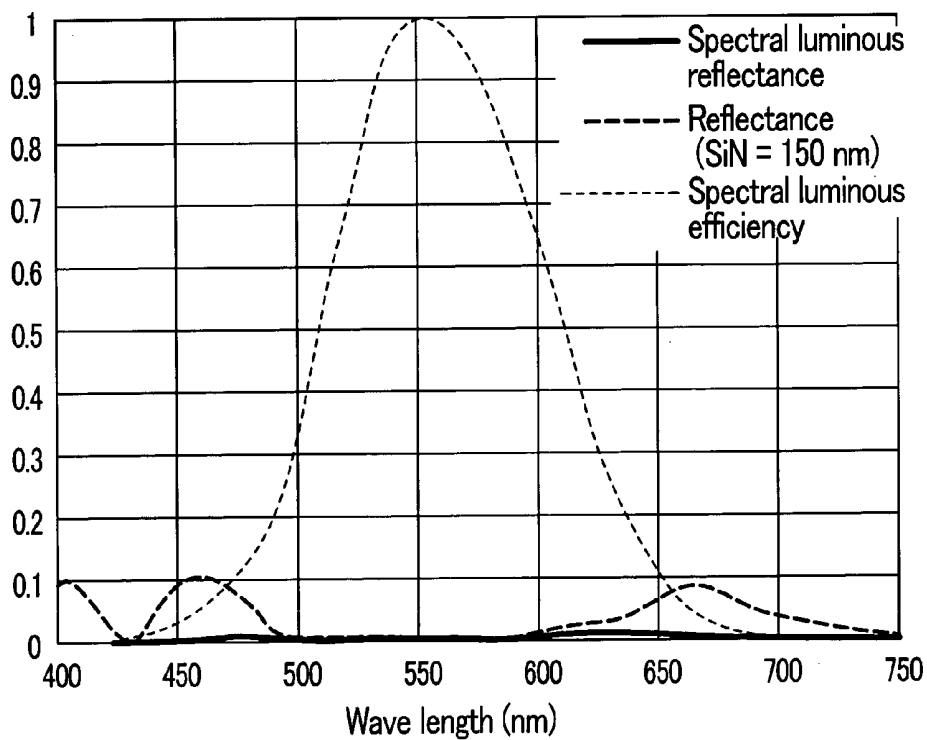


FIG. 21

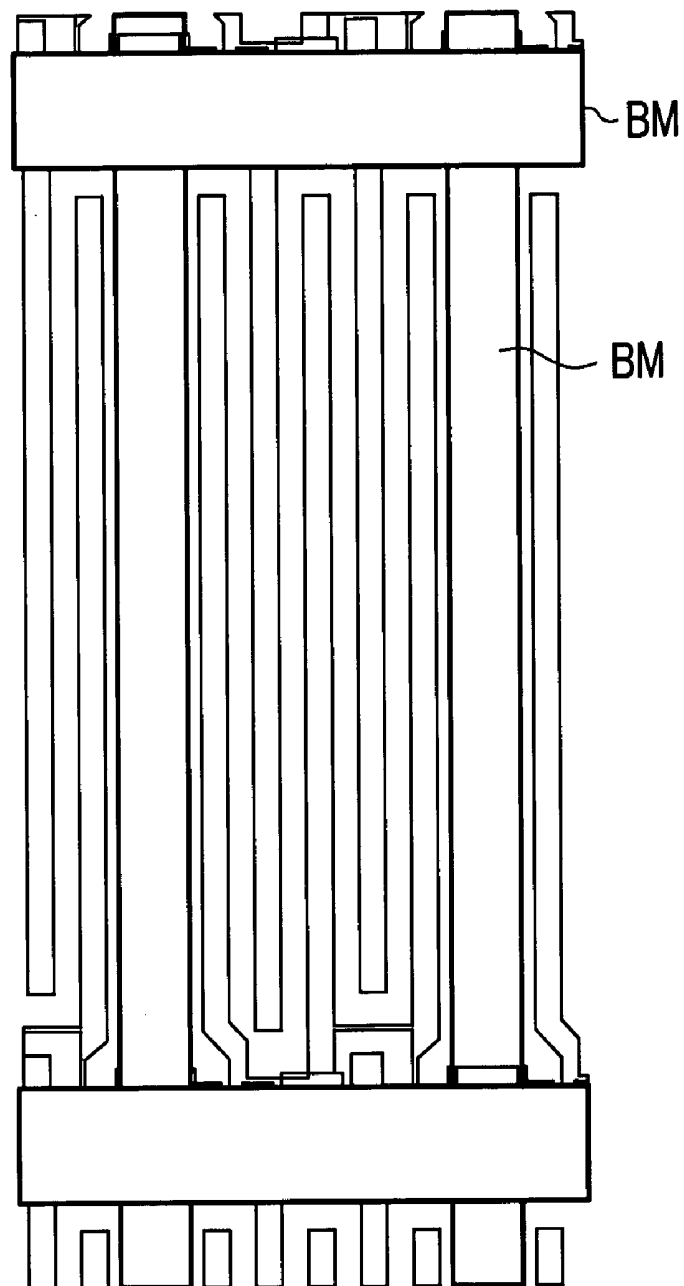


FIG. 22

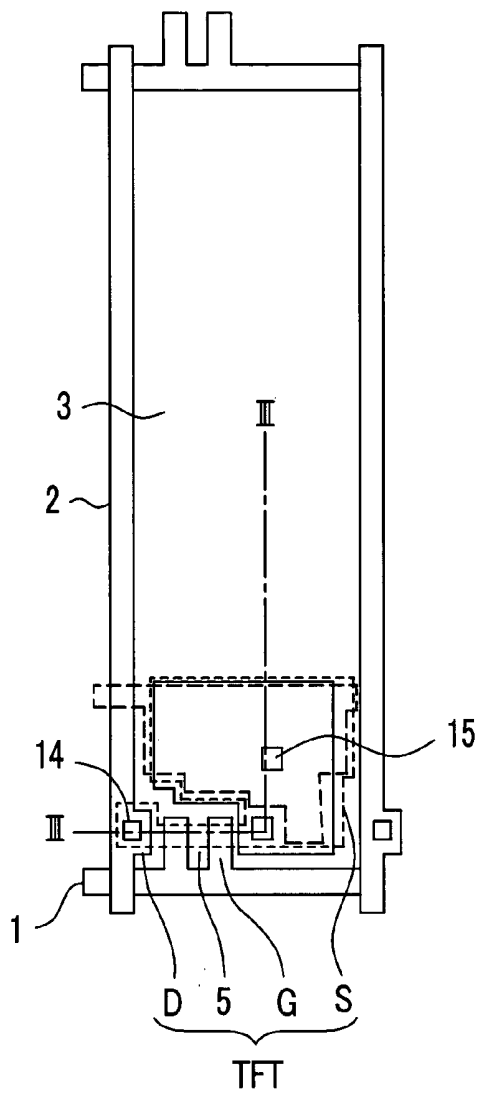


FIG. 23

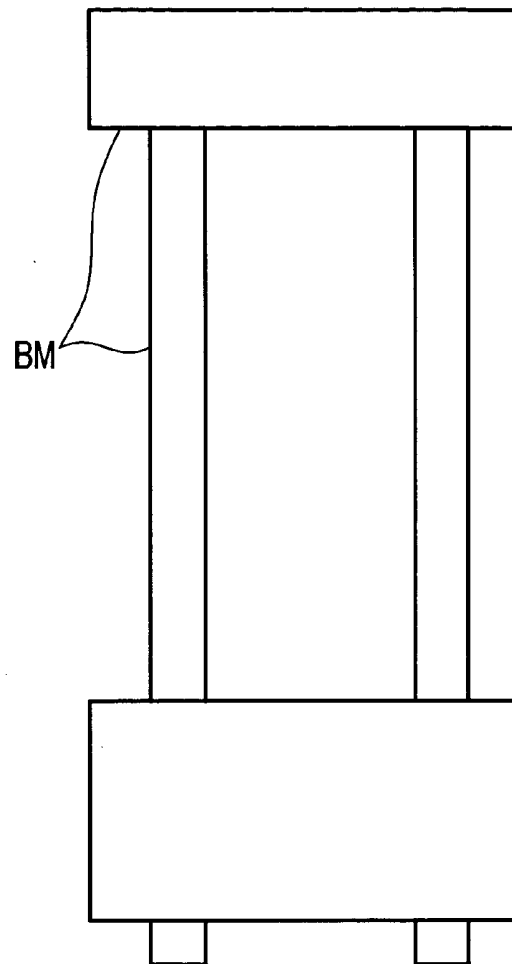


FIG. 24

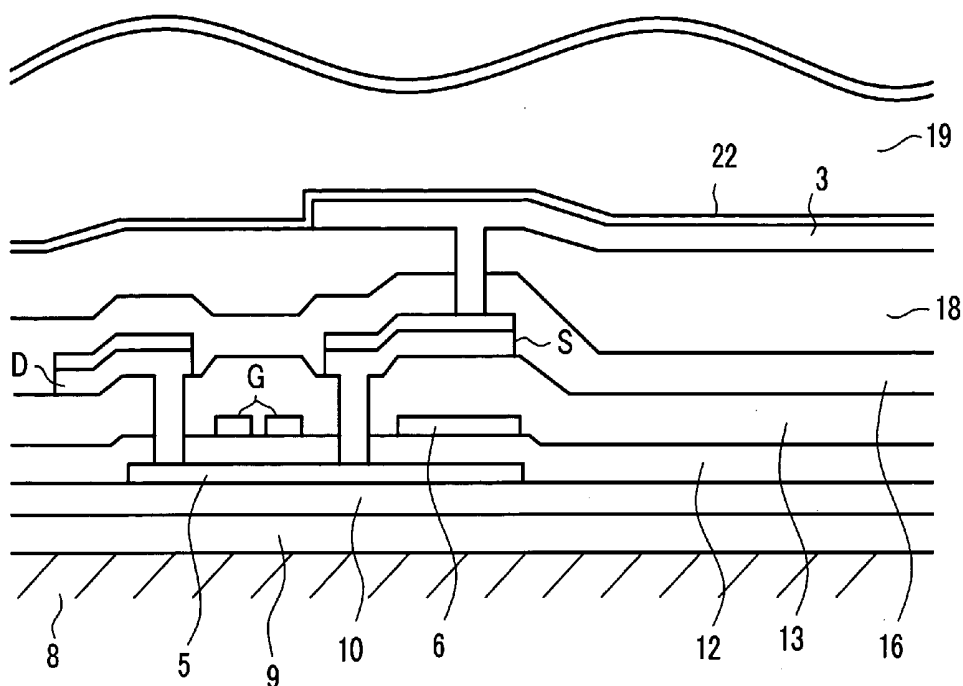
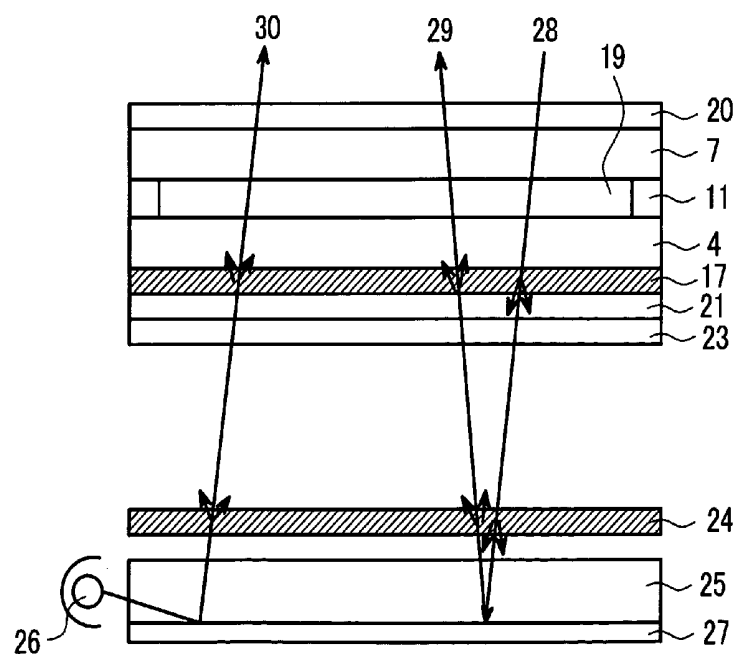


FIG. 25



LIQUID CRYSTAL DISPLAY DEVICE

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a liquid crystal display device, and more particularly to a liquid crystal display device which can enhance a contrast of an image by preventing the reflection of an external light.

[0003] 2. Description of the Related Art

[0004] A liquid crystal display device is used in a television receiver set, a personal computer, a display of a portable terminal or the like. Since the liquid crystal display device is light-weighted and exhibits a small power consumption, the liquid crystal display device is used as display means of a small electronic terminal such as a mobile telephone or the like.

[0005] Further, since the portable terminal is used outside houses or buildings, a partial-transmissive-type liquid crystal display device is used. The partial-transmissive-type liquid crystal display device displays images by making use of an external light when a using environment is bright and displays images by making use of light from a backlight when the using environment is dark (see Japanese Unexamined Patent Publication 350158/2001, for example). Further, even with respect to a liquid crystal display device adopting a full-transmissive-type panel, there exists a liquid crystal display device which can perform a transmissive display which mainly uses light from a backlight and a reflective display which reflects light incident from an image observing side on a reflector of the backlight (see Japanese Unexamined Patent Publication 98960/2002 (paragraphs 0034 to 0043, FIG. 2 and FIG. 3) and Japanese Unexamined Patent Publication 98963/2002 (paragraphs 0001 to 0007, 0016 to 017, FIG. 1, FIG. 3, FIG. 5, for example). Further, in many liquid crystal display devices, thin film transistors are used as switching elements.

[0006] Recently, to cope with a demand for a liquid crystal display device having higher definition, the number of pixels of the liquid crystal display device is increased. Along with the increase of the number of pixels, thin film transistors which exhibit a high operational speed are required. In the liquid crystal display device having high definition, as a semiconductor layer of the thin film transistor, polysilicon (polycrystalline silicon) is used in place of amorphous silicon. With the use of polysilicon as the material of the semiconductor layer, the operational speed of the thin film transistor is increased whereby images of high definition can be displayed. Further, there has been known a technique which stacks an upper-side background layer and a lower-side background layer on a glass substrate, laser beams are radiated to semiconductor thin films formed on the upper-side background layer, and the semiconductor thin films are crystallized (see Japanese Unexamined Patent Publication 132306/1994 (paragraphs 0002 to 0007, FIG. 1 to FIG. 4).

[0007] Usually, the thin film transistors are formed on the glass substrate and so-called alkali-free glass is used as a material of the glass substrate. This glass substrate includes impurities and the impurities intrude into the polysilicon film so that the transistor characteristics of the thin film transistor formed on the substrate is degraded.

[0008] To suppress the intrusion of the impurities into the polysilicon film from the glass substrate, a background film

made of silicon nitride, silicon oxide or the like is interposed between the glass substrate and the polysilicon film. The background film is formed over a whole surface of a panel and light-transmissive pixel electrodes are formed over the background film besides the thin film transistors. However, when the background film and the pixel electrodes are stacked, this gives rise to reflection of external lights attributed to the difference in refractive indices of respective films.

[0009] In the conventional liquid crystal display device using the backlight, the background film is formed also in the light transmissive region. Accordingly, there has been a drawback that when the external light is reflected in the region where the light transmissive pixel electrodes are formed, a contrast of images is lowered.

[0010] Further, in the partial-transmissive-type liquid crystal display device, the light reflective region and the light transmissive region are formed in one pixel. Accordingly, when the image is displayed by making use of light from the backlight, the transmitting light is blocked by the reflective region and hence, the luminance of the screen is low. By adopting the full-transmissive panel structure having no reflective electrode in the pixel electrode and by reflecting the external light by the backlight, the luminance when the backlight is used can be enhanced. However, since such a display device is constituted by stacking the background film, the electrodes, interlayer insulation films and the like, interface reflections attributed to the difference in refractive index occur on interfaces of respective films. Accordingly, with respect to the full-transmissive-type liquid crystal display device which reflects the external light by the backlight, there has been a drawback that when the images are displayed by the reflected light, an inverted image whose tint is inverted is displayed.

SUMMARY OF THE INVENTION

[0011] According to one typical liquid crystal display device of the present invention, the liquid crystal display device includes thin film transistors and pixel electrodes formed on a substrate and is characterized in that each thin film transistor includes a silicon film, a gate electrode, and a source electrode which is electrically connected to the pixel electrode, between the silicon film and the substrate and between the pixel electrode and the substrate, a silicon oxide film and a silicon nitride film which is formed between the silicon oxide film and the substrate are interposed, and a film thickness of the silicon nitride film is larger than a film thickness of the silicon oxide film.

[0012] Here, the liquid crystal display device of the present invention is also characterized in that the silicon nitride film satisfies a following formula assuming the film thickness as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer).

$$d-10 \leq 555 \times m / (2 \times n) \leq d+10$$

[0013] Further, the liquid crystal display device of the present invention is also characterized in that the silicon nitride film satisfies a following formula assuming the film thickness as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer).

$$0.9d \leq 555 \times m / (2 \times n) \leq 1.1d$$

[0014] Further, the liquid crystal display device of the present invention is also characterized in that the film thickness of the silicon nitride film falls within a range of 130 nm to 160 nm.

[0015] Alternatively, the film thickness of the silicon nitride film falls within a range of 126 nm to 165 nm.

[0016] Further, according to another typical liquid crystal display device of the present invention, thin film transistors and light transmissive pixel electrodes are formed over a substrate, the thin film transistor is constituted of a polysilicon film, a gate electrode, a drain electrode and a source electrode, the substrate includes a background film, the polysilicon film and the light transmissive pixel electrode are arranged over the background film, the background film is constituted of a substrate-side silicon nitride film and a liquid-crystal-layer-side silicon oxide film, and the silicon nitride film is thicker than the silicon oxide film.

[0017] Here, the silicon nitride film satisfies a following formula assuming a film thickness thereof as $d(\text{nm})$ and a refractive index when a wavelength thereof is 555 nm as n .

$$d-10 \leq 555 \times m / (2 \times n) \leq d+10$$

[0018] Further, between the substrate-side silicon nitride film and the light transmissive pixel electrode, a silicon oxide film and a second silicon nitride film are sequentially stacked. The interlayer insulation film between the silicon oxide film and the second silicon nitride film respectively satisfy a following formula assuming a film thickness thereof as $d(\text{nm})$ and a refractive index thereof when a wavelength thereof is 555 nm as n (m being an arbitrary integer).

$$d-10 \leq 555 \times m / (2 \times n) \leq d+10$$

[0019] Further, the silicon oxide film arranged between the substrate-side silicon nitride film and the light transmissive pixel electrode is constituted of a liquid-crystal-side background film, a gate insulation film and an interlayer insulation film and the second silicon nitride film is an interlayer insulation film.

[0020] Another constitution of the liquid crystal display device of the present invention is characterized in that out of two substrates which face each other with a liquid crystal layer therebetween, one substrate includes thin film transistors and the thin film transistor is constituted of a semiconductor layer, a gate electrode which is connected to a gate line, a drain electrode which is connected to a drain line and a source electrode which is connected to a pixel electrode. Further, in a region surrounded by two neighboring gate lines and two neighboring drain lines, a reflective region which is provided with a reflective electrode which reflects an external light which passes through a liquid crystal layer connected to the source electrode and a transmissive region which is provided with a light transmissive pixel electrode which is connected to the source electrode and allows light from a backlight to pass therethrough are formed, wherein a thickness of the liquid crystal layer differs between the reflective region and the transmissive region. Further, a first film and a second film are formed between the light transmissive pixel electrode of the transmissive region and the substrate, the refractive index differs between the first film and the second film, and the first film and the second film respectively satisfy a following formula assuming a film thickness thereof as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer)

$$d-10 \leq 555 \times m / (2 \times n) \leq d+10$$

[0021] Here, the liquid crystal display device of the present invention is also characterized in that the first film is made of silicon nitride and the second film is made of silicon oxide.

[0022] Further, the liquid crystal display device of the present invention is also characterized in that a third film made of silicon nitride is formed on a second film and the third film satisfies a following formula assuming a film thickness thereof as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer).

$$d-10 \leq 555 \times m / (2 \times n) \leq d+10$$

[0023] Further, another liquid crystal display device of the present invention is directed to a full transmissive type liquid crystal display device which includes a liquid crystal panel in which two substrates face each other in an opposed manner with a liquid crystal layer therebetween and a backlight which is formed on one surface side of the liquid crystal panel, wherein one substrate includes a background film, thin film transistors and light transmissive pixel electrodes are formed over the background film, and the thin film transistor includes a polysilicon film, a gate electrode, a drain electrode and a source electrode. Here, the background film includes a substrate-side silicon nitride film and a liquid-crystal-layer-side silicon oxide film, and the silicon nitride film is formed thicker than silicon oxide film. Further, the silicon nitride film satisfies a following formula assuming a film thickness thereof as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer).

$$0.9d \leq 555 \times m / (2 \times n) \leq 1.1d$$

[0024] Further, between the background film and the pixel electrode, a silicon oxide film and a second silicon nitride film are sequentially stacked, and the silicon oxide film and the second silicon nitride film satisfy a following formula assuming a film thickness thereof as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer).

$$0.9d \leq 555 \times m / (2 \times n) \leq 1.1d$$

[0025] Further, in addition to the above-mentioned constitutions, common electrodes are formed on the same substrate on which the pixel electrodes are formed or the common electrodes are formed on another one substrate.

[0026] According to the present invention, it is possible to provide a display device which can enhance a contrast and thereby can enhance the visibility of images.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] FIG. 1 is a plan view of a pixel portion of a liquid crystal display device of the present invention.

[0028] FIG. 2 is a cross-sectional view taken along a line I-I in FIG. 1.

[0029] FIG. 3 is a cross-sectional view taken along a line II-II in FIG. 1.

[0030] FIG. 4 is a view showing a material and a thickness of films or layers and refractive indices when a wavelength is 555 nm.

[0031] FIG. 5 is a graph showing a spectral luminous reflectance when a thickness of a first background film is changed from 50 nm to 180 nm.

[0032] FIG. 6 is a graph showing the relationship between a wavelength of light and the spectral luminous reflectance when a thickness of the first background film shown in FIG. 5 is 50 nm.

[0033] FIG. 7 a graph showing the relationship between a wavelength of light and the spectral luminous reflectance when a thickness of the first background film shown in FIG. 5 is 140 nm.

[0034] FIG. 8 is a view showing the constitution of films of a partial transmissive type liquid crystal display device for normally black display.

[0035] FIG. 9 is a perspective view with a part broken away of a liquid crystal display device to which the present invention is applied.

[0036] FIG. 10 is a plan view of a pixel portion of a liquid crystal display device of the second embodiment of the present invention.

[0037] FIG. 11 is a cross-sectional view taken along a line I-I in FIG. 10.

[0038] FIG. 12 is a cross-sectional view taken along a line II-II in FIG. 10.

[0039] FIG. 13 is a view showing a material and a thickness of films or layers and refractive indices when a wavelength is 555 nm.

[0040] FIG. 14 is a graph showing a spectral luminous reflectance when a thickness of a second interlayer insulation film is changed from 100 nm to 500 nm.

[0041] FIG. 15 is a graph showing a spectral luminous reflectance when a thickness of the first background film is changed from 25 nm to 350 nm.

[0042] FIG. 16 is a graph showing a spectral luminous reflectance when a thickness of the ITO is changed from 50 nm to 300 nm.

[0043] FIG. 17 is a graph showing a spectral luminous reflectance when a thickness of the second interlayer insulation film is changed from 100 nm to 400 nm.

[0044] FIG. 18 is a graph showing a spectral luminous reflectance when a thickness of the first background film is changed from 50 nm to 325 nm.

[0045] FIG. 19 is a graph showing the relationship between a wavelength of light and spectral luminous reflectance when a thickness of the first background film is 75 nm.

[0046] FIG. 20 is a graph showing the relationship between a wavelength of light and spectral luminous reflectance when a thickness of the first background film is 150 nm.

[0047] FIG. 21 is a plan view showing a structure when a second substrate on which color filters are formed is overlapped to a first substrate.

[0048] FIG. 22 is a plan view showing a pixel region of the liquid crystal display device of the third embodiment of the present invention.

[0049] FIG. 23 is a plan view of black matrixes BM formed on the second substrate.

[0050] FIG. 24 is a cross-sectional view taken along a line III-III in FIG. 22.

[0051] FIG. 25 is a cross-sectional view of the liquid crystal display device for explaining the arrangement of a backlight structural body.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0052] Preferred embodiments of the present invention are explained hereinafter in conjunction with attached drawings.

[0053] FIG. 1 is a plan view showing a pixel portion of a liquid crystal display device of the first embodiment of the present invention.

[0054] Out of two substrates which are arranged to face each other with a liquid crystal layer therebetween, thin film transistors are formed on one substrate. Further, on each region which is surrounded by a group of gate lines and a group of drain lines which cross each other, a switching element which is turned on in response to a scanning signal from the gate line and a pixel electrode to which a video signal is supplied from the drain line through the switching element are formed thus constituting a so-called pixel. The region which is surrounded by the group of gate lines and the group of drain lines constitutes a pixel region. The thin film transistor is used as a switching element.

[0055] One pixel is formed in the region surrounded by two neighboring gate lines 1 and two neighboring drain lines 2. A color image can be displayed on a front surface of a panel using these three types of pixels (pixel for red, pixel for green, pixel for blue).

[0056] Within one pixel, a light reflective region in which a reflective electrode 3 is formed and a light transmissive region 4 on which a reflective electrode is not formed are provided. The light transmissive region 4 is formed by forming an opening in the reflective electrode 3. A transparent electrode 7 is formed in the light transmissive region 4. The pixel electrode is constituted of the reflective electrode 3 and the transparent electrode 7.

[0057] Below the reflective electrode 3, the gate line (gate electrode) 1, the drain line (drain electrode) 2, a polysilicon film 5, a storage line (storage electrode) 6 and the transparent electrode 7 are formed.

[0058] FIG. 2 is a cross-sectional view taken along a line I-I in FIG. 1.

[0059] A first background film 9 is formed on the substrate 8 on which the thin film transistors are formed and a second background film 10 is formed on the first background film 9. Then, the polysilicon film 5 is formed on the second background film 10.

[0060] The polysilicon film 5 can be formed using either a solid-phase crystallization or a laser annealing method. Since the solid-phase crystallization heats the whole substrate at a high temperature, it is necessary to use a material which exhibits high resistance against heat such as quartz glass. On the other hand, in the laser annealing method, an amorphous silicon layer is formed on a glass substrate by annealing using laser beams. Accordingly, it is unnecessary to heat the whole substrate at a high temperature. The polysilicon film which can be formed at a low temperature compared to the solid-phase crystallization is formed on a glass substrate which is referred to as alkali-free glass. This glass substrate includes impurities. To prevent the impurities from intruding into the polysilicon film, a background film is formed on the glass substrate.

[0061] In forming the polysilicon film, by crystallizing polysilicon on a silicon oxide film, it is possible to form the

polysilicon layer having small grain boundaries. However, to suppress the intrusion of the impurities into the silicon oxide film from the glass substrate, it is necessary to increase a thickness of the silicon oxide film.

[0062] In view of the above, a silicon nitride film is used as the first background film 9. Although the silicon nitride film is not favorable for the formation of the polysilicon film 5, the silicon nitride film can suppress the intrusion of the impurities into the polysilicon film from the glass substrate 8. Accordingly, it is possible to suppress the degradation of transistor characteristics attributed to the diffusion of sodium or the like from the glass substrate.

[0063] A silicon oxide film is formed as the second background film 10. By forming the polysilicon film 5 on the oxide silicon film, it is possible to form crystallized silicon having a large particle size. Further, due to the formation of the oxide film, it is possible to prevent the fluctuation of a threshold voltage of the transistor.

[0064] By forming the silicon nitride film as the first background film 9 and by forming the silicon oxide film as the second background film 10, it is possible to form the thin background film as a whole. Thinner the background film, it is possible to form the background film with small undulation or waving and hence, it is possible to reduce the change of film thickness.

[0065] A gate insulation film 12 is formed such that the film 12 covers the polysilicon film 5. Gate electrodes 1 are formed on the gate insulation film 12. The gate insulation film 12 is arranged to provide an insulation between the polysilicon film 5 and the gate electrodes 1. In this embodiment, the gate insulation film 12 is formed of a silicon oxide film and the gate electrode 1 is made of a molybdenum tungsten alloy.

[0066] Over the gate insulation film 12, a first interlayer insulation film 13 is formed such that the film 13 covers the gate lines 1. The first interlayer insulation film 13 is formed of a silicon oxide film and is mainly served for ensuring the insulation between the gate electrodes 1 and the drain electrodes 2 or the source electrodes 14.

[0067] Contact holes 15 are formed in the gate insulation film 12 and the first interlayer insulation film 13. Here, the drain electrodes 2 and the semiconductor layers 5 are connected to each other via the contact holes 15 while the source electrodes 14 and the semiconductor layers 5 are also connected to each other via the contact holes 15. In this embodiment, the drain electrode 2 and the source electrode 14 have the three-layered structure consisting of an upper layer made of titanium, an intermediate layer made of aluminum and a lower layer made of titanium (titanium/aluminum/titanium). By arranging the titanium layer at the upper layer and the lower layer, the electric connection between the polysilicon film 5 and the transparent electrode (ITO) 7 is ensured.

[0068] Over the first interlayer insulation film 13, a second interlayer insulation film 16 is formed such that the film 16 covers the drain electrodes 2 and the source electrodes 4. The second interlayer insulation film 16 is formed of a silicon nitride film. With the use of the silicon nitride film as the second interlayer insulation film 16, it is possible to prevent the intrusion of the contaminating matters into the thin film transistor from an organic insulation film 18 and, at

the same time, it is possible to enhance the adhesiveness between the organic insulation film 18 and the second interlayer insulation film.

[0069] Over the second interlayer insulation film 16, the transparent electrodes 7 are formed. Contact holes 15 are formed in the second interlayer insulation film 16 so as to establish the electric connection between the source electrodes 14 and the transparent electrodes 7. The transparent electrodes 7 are made of ITO (Indium Tin Oxide).

[0070] Over the second interlayer insulation film 16, a third interlayer insulation film 18 is formed such that the film 18 partially covers the transparent electrodes 7. The third interlayer insulation film 18 is made of an organic material (an organic insulation film). By arranging the organic insulation film 18 over the second interlayer insulation film 16, it is possible to reduce the coupling capacitance between wiring such as the gate lines or between the drain lines. Due to the reduction of coupling capacitance, it is possible to reduce the power consumption of the liquid crystal display device.

[0071] Over the third interlayer insulation film 18, the reflective electrodes 3 are formed. The reflective electrode 3 has a two-layered structure (titanium-tungsten alloy/aluminum) consisting of an upper layer made of a titanium-tungsten alloy and a lower layer made of aluminum. The titanium-tungsten alloy ensures the electric connection between the reflective electrode 3 and the transparent electrode 7.

[0072] FIG. 3 is a cross-sectional view taken along a line II-II in FIG. 1.

[0073] A region on which the reflective electrode 3 is formed constitutes a reflective region AR and a region on which the reflective electrode 3 is not formed constitutes a transmissive region TA.

[0074] The first background film 9 and the second background film 10 are formed on the glass substrate 8. These background films are formed over the whole pixel region. When the background films are removed in the midst of the manufacturing step of the low-temperature silicon, in the succeeding photolithography step, a developing solution, an etchant, a resist removing liquid or the like is directly brought into contact with the glass substrate. Accordingly, ion such as sodium ion or the like in the glass substrate is dissolved.

[0075] Due to the provision of the background films, the developing solution, the etchant, the resist removing liquid or the like is not brought into contact with the glass substrate in the photolithography step and hence, it is possible to reuse these liquids again after filtering them whereby it is possible to prevent the whole manufacturing line from contamination. Further, the manufacturing cost can be reduced.

[0076] The polysilicon film 5 is formed over the second insulation background film and the first interlayer insulation film 13 is formed over the second background film such that the insulation film 13 covers the polysilicon film 5. Over the first interlayer insulation film, storage electrodes 6 are formed. The storage electrode 6 faces the source electrode 14 and the transparent electrode 7 by way of the insulation film in an opposed manner thus forming a holding capacitance.

[0077] Further, since the storage electrode **6** is formed within the reflective region RA, it is unnecessary to allow light to pass therethrough. Accordingly, the storage electrode **6** is formed of a molybdenum-tungsten film.

[0078] The third interlayer insulation film **18** includes an opening portion at a portion thereof. As shown in FIG. 1, the reflective electrode **3** forms an opening portion **4** by tracing the opening formed in the third interlayer insulation film **18**. The reflective electrode **3** includes a connection portion **11** in the opening portion of the third interlayer insulation film **18**. The reflective electrode **3** is electrically connected with the transparent electrode **7** through the connecting portion **11**.

[0079] Further, an inclined portion **17** having an angle θ is formed between the third interlayer insulation film **18** and the transparent electrode **7**. The angle θ is smaller than 90 degrees and is about 45 degrees. By forming such an inclined portion **17**, rubbing mottling on the orientation film can be reduced.

[0080] The transparent electrode **7** is formed in an area wider than the opening portion **4** formed in the reflective electrode **3**. A backlight not shown in the drawing is arranged below the glass substrate and the transparent electrode **7** constitutes a light transmissive pixel electrode which allows light from the backlight to pass therethrough.

[0081] The pixel portion faces the counter substrate **21** provided with the counter electrodes **20** with the liquid crystal layer **19** therebetween. Further, a thickness (a gap) of the liquid crystal layer differs between a gap L1 of the reflective region and a gap L2 of a transmissive region. That is, the thickness of the liquid crystal layer differs between the reflective region and the transmissive region.

[0082] In this embodiment, the above-mentioned constitution is applied to a liquid crystal display device for normally black display.

[0083] The liquid crystal display device for normally black display exhibits the higher transmissivity than the liquid crystal display device for normally white display and hence, the liquid crystal display device can use thick color filters whereby the liquid crystal display device is excellent in color reproducibility.

[0084] Further, by setting the gap L2 of the transparent region larger than the gap L1 of the reflective region, the luminance can be enhanced.

[0085] In the transmissive region, light transmissive films are stacked and these stacked films differ in the refractive index from each other. The thicknesses of the light transmissive films are controlled to prevent the reflection of an external light from the counter substrate side.

[0086] In the transmissive region, between the transparent electrode **7** and the glass substrate **8**, the first background film **9**, the second background film **10**, the gate insulation film **12** and the first interlayer insulation film **13** are arranged.

[0087] These films are respectively configured to satisfy a following formula assuming the film thickness as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer excluding a negative integer).

$$d-10 \leq 555 \times m / (2 \times n) \leq d+10$$

[0088] Due to such a constitution, the reflection of the external light in the transmissive region can be suppressed whereby it is possible to provide the liquid crystal display device which can enhance the contrast.

[0089] FIG. 4 shows a specific embodiment of materials, thicknesses (film thicknesses) of respective films or layers and the refractive indices when the wavelength is 555 nm. In this embodiment, the gap L2 of the transmissive region is set to 5.2 μm and the gap L1 of the reflective region is set to 3.7 μm .

[0090] The first background film and the second background film differ in the refractive index. To protect the polysilicon film from the impurities in the glass substrate, the first background film may preferably have a film thickness of at least 45 nm. In this embodiment, the material of the first background film **9** is silicon nitride, the refractive index of the first background film **9** is 2.0, and the film thickness of the first background film **9** is 130 nm to 150 nm. The material of the second background film **10** is silicon oxide, the refractive index of the second background film **10** is 1.5, and the film thickness of the second background film **10** is 100 nm. The first background film is formed thicker than the second background film.

[0091] The material of the gate insulation film **12** is silicon oxide in the same manner as the second background film, while the refractive index of the gate insulation film **12** is 2.0 and the film thickness of the gate insulation film **12** is 100 nm. The material of the first interlayer insulation film **13** is silicon oxide in the same manner as the second background film, while the refractive index of the first interlayer insulation film **13** is 2.0 and the film thickness of the first interlayer insulation film **13** is 540 nm. With respect to the second interlayer insulation film **16**, the material is silicon nitride, the refractive index is 2.0 and the film thickness is 200 nm. With respect to the transparent electrode, the material is ITO, the refractive index is 2.0 and the film thickness is 77 nm. Further, the refractive indices of the orientation film **22** and the liquid crystal are 1.5.

[0092] Among these films, the second background film which constitutes the liquid-crystal-layer-side background film has the same refractive index as that of the gate insulation film and the first interlayer insulation film and hence, they can be considered as the same films. Further, since the second interlayer insulation film and the transparent electrode have the same refractive index, these films are also considered to be the same film. Accordingly, the first film is the silicon nitride film which is constituted of the first background film and hence, the refractive index is 2.0 and the film thickness is 130 to 150 nm. The second film is the silicon oxide film which is constituted of the second background film, the gate insulation film and the first interlayer insulation film and hence, the refractive index is 1.5 and the film thickness is 740 nm. Further, the third film has the refractive index of 2.0 and the film thickness of 277 nm.

[0093] The above-mentioned films satisfy a following formula assuming the film thickness as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer excluding negative integer).

$$d-10 \leq 555 \times m / (2 \times n) \leq d+10$$

[0094] Due to such a constitution, the reflection of the external light in the transmissive region can be suppressed

whereby it is possible to provide the liquid crystal display device which can enhance the contrast.

[0095] It is more preferable to set the thickness of the first background film to 140 nm.

[0096] FIG. 5 is a view showing the spectral luminous reflectance when the second background film, the gate insulation film, the first interlayer insulation film and the second interlayer insulation film assume values shown in FIG. 4 and the film thickness of the first background film is changed within a range of 50 nm to 180 nm. FIG. 6 is a view showing the relationship between the wavelength of light and the spectral luminous reflectance when the film thickness of the first background film in FIG. 5 is 50 nm. FIG. 7 is a view showing the relationship between the wavelength of light and the spectral luminous reflectance when the film thickness of the first background film in FIG. 5 is 140 nm.

[0097] As can be clearly understood from FIG. 5, FIG. 6 and FIG. 7, the spectral luminous reflectance takes the minimum value when the film thickness of the background film is set to 140 nm.

[0098] This value agrees with a following equation, wherein the film thickness is $d(\text{nm})$ and a refractive index when a wavelength is 555 nm is n .

$$d=555 \times n / 2 \times n$$

[0099] Human is most sensitive to light having the wavelength of 555 nm and hence, the contrast can be enhanced by suppressing the reflection of light having the wavelength in the vicinity of 555 nm.

[0100] It is necessary to adjust the film thickness by adding about 10% of film thickness to the calculated value or subtracting about 10% of film thickness from the calculated value by considering manufacturing errors. The film thickness is preferably controlled to a value having an error 10 nm.

[0101] FIG. 8 is view showing the film constitution of the partial transmissive type liquid crystal display device for normally black display.

[0102] The thickness of the liquid crystal layer in the transmissive region is set, by taking the polarizer and the optical retardation plate into consideration, to a value such that the optimum transmissive optical characteristics such as contrast and transmissivity can be obtained with respect to the transmitting light which passes the liquid crystal layer once. Further, the thickness of the liquid crystal layer in the reflective region is set, by taking the polarizer and the optical retardation plate into consideration, to a value such that the optimum transmissive optical characteristics such as contrast and transmissivity can be obtained with respect to the reflecting light which passes the liquid crystal layer twice. Accordingly, when light which passes the liquid crystal layer, the reflective electrode and the liquid crystal layer in this order is blocked by the optical retardation plate and the polarizer so that the black display is performed, the reflective lights from the transmissive region differ in the thickness of the liquid crystal layer through which lights pass and hence, the lights differ in retardation of the liquid crystal layer whereby the lights are in a polarized state in which the optical retardation plate and the polarizer cannot block the lights.

[0103] That is, when there is no difference between the gap L2 of the transmissive region and the gap L1 of the reflective region, the retardation of the liquid crystal is equal between the transmissive region and the reflective region and hence, the lights are blocked by the optical retardation plate and the polarizer. However, when there exists the difference between the gap L2 of the transmissive region and the gap L1 of the reflective region, the retardation of the liquid crystal differs between the transmissive region and the reflective region and hence, the reflective light from the transmissive region cannot be blocked.

[0104] FIG. 9 is a perspective view with a part broken away of a liquid crystal display device 24 to which the present invention is applied. The liquid crystal display device 24 is constituted by incorporating a counter substrate 21 having a image display screen, a glass substrate 8 which is arranged to face the counter substrate 21 with a liquid crystal layer therebetween, and a backlight assembly 23 which is arranged on a back surface of the glass substrate 8 in a frame 25.

[0105] The present invention can suppress the reflection of the external light in the transmissive region and hence, the present invention can enhance the contrast particularly in the liquid crystal display device having the difference between the gap L2 of the transmissive region and the gap L1 of the reflective region.

[0106] The reflective light from the multilayered film is generated such that since the refractive indices of the respective layers which constitute the multilayered film are different from each other, interface reflections occur between respective layers and these interface reflections interfere with each other thus generating the reflection light.

[0107] In the low-temperature polysilicon thin film transistor, the silicon oxide film, the silicon nitride film, the organic interlayer insulation film and ITO film are used. Among these films, by setting the optical thickness $n \times d$ (n : refractive index, d : film thickness) to $555/2$ (nm) with respect to the film having the large refractive index, when the light having wavelength of green which exhibits the highest visibility is incident, the phase of the reflective light becomes opposite from each other and hence are offset from each other at both interfaces of the film having the large refractive index whereby the reflectance becomes small.

[0108] Further, by setting the film thickness of the silicon nitride which is used as the background film to the above-mentioned value as in the case of the previous embodiment while holding the film thicknesses of the gate insulation film, the interlayer insulation film and the transparent electrode to film thicknesses most suitable for the electric characteristics of the low-temperature polysilicon transistor and holding capacitances, the interface reflection can be reduced.

[0109] FIG. 10 is a view for explaining the second embodiment of the present invention and is a plan view of a pixel portion of a liquid crystal display device. Further, the embodiment shown in FIG. 10 is applicable to the full transmissive type display device which is not provided with reflective electrodes for displaying images by reflecting an external light to the pixel portion.

[0110] Out of two substrates which are arranged to face each other with a liquid crystal layer therebetween, thin film

transistors are formed on one substrate (first substrate). Further, color filters are formed on another substrate (second substrate) explained later.

[0111] On each region which is surrounded by a group of gate lines **1** and a group of drain lines **2** which cross each other, a switching element which is turned on in response to a scanning signal from the gate line **1** and a pixel electrode **3** to which a video signal is supplied from the drain line **2** through the switching element are formed. The region which is surrounded by the group of gate lines and the group of drain lines constitutes a pixel region. The thin film transistor (TFT) is used as a switching element. The thin film transistor is constituted of a gate electrode G which is connected to the gate line **1**, a polycrystalline silicon film **5**, a drain electrode D which is connected to the drain line **2** and a source electrode S which is connected to the pixel electrode.

[0112] One pixel is formed in the region surrounded by two neighboring gate lines **1** and two neighboring drain lines **2**. A color image can be displayed on a front surface of a panel using these three types of pixels (pixel for red, pixel for green, pixel for blue).

[0113] Within one pixel, a common electrode C and a pixel electrode **3** are formed. Further, the common electrode C and the pixel electrode **3** are formed on the same substrate thus constituting a liquid crystal display device adopting a so-called lateral electric field (In-Plane-Switching) system. By arranging a common line **6** which is connected to the common electrode C in parallel and above the gate line **1**, the pixel is enlarged.

[0114] FIG. 11 is a cross-sectional view taken along a line I-I in FIG. 10.

[0115] The thin film transistors are formed on the glass substrate **8** and the glass substrate **8** is made of glass which is referred to as alkali-free glass. The glass substrate **8** contains impurities and there exists the possibility that the impurities intrude into the polysilicon film **5** and deteriorates the transistor characteristics of the thin film transistors formed on the substrate. To suppress the intrusion of the impurities from the glass substrate **8** to the polysilicon film **5**, a background film made of silicon nitride, silicon oxide or the like is formed between the glass substrate **8** and the polysilicon film **5**. The background film is formed over the whole surface of the panel and the light transmissive pixel electrodes **3** and the common electrodes C are formed over the background film besides the thin film transistors.

[0116] A first background film **9** is formed over the substrate **8** over which the thin film transistors are formed, while a second background film **10** is formed over the first background film **9**. Then, the polysilicon film **5** is formed over the second background film **2**. The manner of forming these films, the constitution of and manner of forming the first interlayer insulation film and the second interlayer insulation film are equal to those of the first embodiment.

[0117] An organic insulation film **18** formed over the second interlayer insulation film is also referred to as a leveling film. By forming the organic insulation film **18**, the surface on which the common electrodes C and the pixel electrodes **3** are formed constitutes a flat surface which is not influenced by surface irregularities of the second interlayer insulation film **16**. By providing the organic insulation film **18**, the coupling capacitance among wiring consisting of the

gate lines, the drain lines and the common lines can be reduced. Due to the reduction of the coupling capacitance, the power consumption of the liquid crystal display device can be reduced.

[0118] The common electrodes C and the pixel electrodes **3** are formed over the organic insulation film **18**. The common electrodes C and the pixel electrodes **3** are formed within the pixel and are formed of a light transmissive film. For example, as the transparent electrode, ITO (Indium Tin Oxide) can be used.

[0119] Contact holes **15** are formed in the second interlayer insulation film **16** and the organic insulation film **18** so as to establish the electric connection between the source electrode S and the pixel electrode **3**.

[0120] In this embodiment, the above-mentioned constitution is applied to the liquid crystal display device for normally black display.

[0121] In the pixel portion, light transmissive films are stacked and these stacked films differ in the refractive index from each other. To prevent the reflection of an external light from the counter substrate side, the film thicknesses of the light transmissive films are controlled.

[0122] FIG. 12 is a cross-sectional view taken along a line II-II in FIG. 10.

[0123] Due to the provision of the background films, the developing solution, the etchant, the resist removing liquid or the like is not brought into contact with the glass substrate in the photolithography step and hence, it is possible to suppress the dissolving of ions such as sodium ions from the glass substrate. If the dissolving of ions can be eliminated, it is possible to reuse these liquids again after filtering them whereby it is possible to prevent the whole manufacturing line from contamination. Further, the manufacturing cost can be reduced.

[0124] A gate insulation film **12**, a first interlayer insulation film **13**, a second interlayer insulation film **16**, an organic insulation film **18** are formed over the second background film in a stacked manner. Over the organic insulation film **18**, the pixel electrodes **3** and the common electrodes C are formed on the same substrate. The orientation film **22** is formed over the glass substrate **8** such that the orientation film **22** covers the organic insulation film **18**, the pixel electrodes **3** and the common electrodes C. The liquid crystal layer is formed such that the layer is brought into contact with the orientation film **22**.

[0125] These films are arranged within the pixel and have light transmissive characteristics. Particularly, since a given voltage is applied to the pixel electrodes and the common electrodes, these electrodes are formed of ITO (Indium Tin Oxide) which is a transparent conductive film. By controlling liquid crystal molecules in response to an electric field generated between the pixel electrode and the common electrode, a light transmission quantity is controlled.

[0126] As an ideal, the liquid crystal display device is constituted such that a following formula is satisfied assuming the film thickness as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer excluding a negative integer).

$$d=555 \times m / (2 \times n)$$

[0127] However, in an actual use, in view of the manufacturing error or the like, it is necessary to adjust the film thickness within about 10% of the film thickness in addition to the calculated value. It is preferable to control the film thickness within the error of 10 nm.

[0128] Within the pixel region, on the glass substrate **8**, there are provided the second background film **10**, the gate insulation film **12**, the first interlayer insulation film **13** and the leveling film **18** which have a relatively low refractive index and the first background film **9** and the second interlayer insulation film **16** having a relatively high refractive index.

[0129] The respective films having the relatively high refractive index are configured to respectively satisfy a following formula assuming the film thickness as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer excluding a negative integer).

$$0.9d \leq 555 \times m / (2 \times n) \leq 1.1d$$

[0130] Although the above range allows $\pm 10\%$ of the film thickness as the range of error, when the film thickness d exceeds 200 nm, $\pm 15\%$ of the given film thickness is allowable as the range of error. Due to such a constitution, it is possible to suppress the reflection of an external light attributed to the difference in refractive index when light passes from the film having the high refractive index to the film having the low refractive index whereby the display of the inverted image can be suppressed.

[0131] Further, the respective films having the relatively low refractive index are configured to respectively satisfy a following formula assuming the film thickness as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer excluding a negative integer).

$$0.9d \leq 555 \times m / (2 \times n) \leq 1.1d$$

[0132] Although the above range allows $\pm 10\%$ of the film thickness as the range of error, when the film thickness d exceeds 200 nm, $\pm 15\%$ of the given film thickness is allowable as the range of error. Due to such a constitution, it is possible to further suppress the reflection of an external light in the transmissive region whereby the display of the inverted image can be suppressed.

[0133] FIG. 13 shows a specific embodiment of materials, thicknesses (film thicknesses) and the refractive indices of respective films or layers when the wavelength is 555 nm. In this embodiment, the gap L2 of the transmissive region is set to 5.2 μm .

[0134] The first background film and the second background film differ in the refractive index. To protect the polysilicon film from the impurities in the glass substrate, the first background film may preferably have a film thickness of at least 45 nm. In this embodiment, the material of the first background film **9** is silicon nitride, the refractive index of the first background film **9** is 1.85, and the film thickness of the first background film **9** is 150 nm. The material of the second background film **10** is silicon oxide, the refractive index of the second background film **10** is 1.5, and the film thickness of the second background film **10** is 100 nm. The first background film is formed thicker than the second background film.

[0135] The material of the gate insulation film **12** is silicon oxide in the same manner as the second background film,

while the refractive index of the gate insulation film **12** is 1.5 and the film thickness of the gate insulation film **12** is 100 nm. The material of the first interlayer insulation film **13** is silicon oxide in the same manner as the second background film, while the refractive index of the first interlayer insulation film **13** is 1.5 and the film thickness of the first interlayer insulation film **13** is 540 nm. With respect to the second interlayer insulation film **16**, the material is silicon nitride, the refractive index is 1.85 and the film thickness is 300 nm. With respect to the leveling film **18**, an organic film having the refractive index of 1.6 is used and the film thickness is 1750 nm. With respect to the pixel electrode **3** and the common electrode **6**, these electrodes are made of ITO, the refractive index is 2.0 and the film thickness is 140 nm. Further, the refractive indices of the orientation film **22** and the liquid crystal are 1.5.

[0136] Among these films, the second background film which constitutes the liquid-crystal-layer-side background film has the same refractive index as that of the gate insulation film and the first interlayer insulation film and hence, they can be considered as the same film. Accordingly, the first film is the silicon nitride film which is constituted of the first background film and hence, the refractive index is 1.85 and the film thickness is 150 nm. The second film is the silicon oxide film which is constituted of the second background film, the gate insulation film and the first interlayer insulation film and hence, the refractive index is 1.5 and the film thickness is 740 nm. Further, the third film is constituted of the second interlayer insulation film, the fourth film is constituted of the leveling film, and the fifth film is constituted of an ITO film.

[0137] The first and the fifth films satisfy a following formula assuming the film thickness as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer excluding a negative integer).

$$d(1-0.1) \leq 555 \times m / (2 \times n) \leq d(1+0.1)$$

[0138] On the other hand, the second, the third and the fourth films satisfy a following formula assuming the film thickness as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer excluding a negative integer)

$$d(1-0.15) \leq 555 \times m / (2 \times n) \leq d(1+0.15)$$

[0139] Due to such a constitution, the reflection of the external light on respective kinds of films formed on the glass substrate **8** in the transmissive region can be suppressed whereby it is possible to enhance the visibility of image when the image is displayed by reflecting the external light at the backlight side of the panel. Particularly, the first background film is formed with the large film thickness and hence, intrusion of the impurities into the polysilicon film from the substrate can be suppressed.

[0140] FIG. 14 and FIG. 15 are views showing the spectral luminous reflectance of the region in the pixel where the pixel electrode and the common electrode are not formed.

[0141] FIG. 14 is a view showing the spectral luminous reflectance when the first background film, the second background film, the gate insulation film, the first interlayer insulation film, the leveling film and the ITO film assume values shown in FIG. 13 and the film thickness of the second interlayer insulation film is changed within a range of 100

nm to 500 nm. The spectral luminous reflectance is taken on an axis of ordinates and the film thickness of the second interlayer insulation film is taken on an axis of abscissas. The spectral luminous reflectance when the film thickness of the second interlayer insulation film is about 150 nm is about 0.45% and hence, the spectral luminous reflectance takes the lowest value. The spectral luminous reflectance assumes the low value next to the lowest when the film thickness of the second interlayer insulation film is about 300 nm. That is, the spectral luminous reflectance is about 0.88%.

[0142] FIG. 15 is a view showing the spectral luminous reflectance when the second background film, the gate insulation film, the first interlayer insulation film, the second interlayer insulation film, the leveling film and the ITO film assume values shown in FIG. 13 and the film thickness of the first background film is changed within a range of 25 nm to 350 nm. The spectral luminous reflectance is taken on an axis of ordinates and the film thickness of the first interlayer insulation film is taken on an axis of abscissas. The spectral luminous reflectance when the film thickness of the first background film is about 150 nm is about 0.88% and hence, the spectral luminous reflectance takes the lowest value. The spectral luminous reflectance assumes the low value next to the lowest when the film thickness of the first background film is about 300 nm. That is, the spectral luminous reflectance is about 1.33%.

[0143] FIG. 16, FIG. 17 and FIG. 18 are views showing the spectral luminous reflectance of the region in the pixel where the pixel electrode and the common electrode are formed.

[0144] FIG. 16 is a view showing the spectral luminous reflectance when the first background film, the second background film, the gate insulation film, the first interlayer insulation film, the second interlayer insulation film and the leveling film assume values shown in FIG. 13 and the film thickness of the ITO film is changed within a range of 50 nm to 300 nm. The spectral luminous reflectance is taken on an axis of ordinates and the film thickness of the ITO film is taken on an axis of abscissas. As shown in FIG. 16, the spectral luminous reflectance when the film thickness of the ITO film is about 140 nm is about 1.3% and hence, the spectral luminous reflectance takes the lowest value. The spectral luminous reflectance assumes the low value next to the lowest when the film thickness of the ITO film is about 280 nm. That is, the spectral luminous reflectance is about 2.1%.

[0145] FIG. 17 is a view showing the spectral luminous reflectance when the first background film, the second background film, the gate insulation film, the first interlayer insulation film, the leveling film and the ITO film assume values shown in FIG. 13 and the film thickness of the second interlayer insulation film is changed within a range of 100 nm to 400 nm. The spectral luminous reflectance is taken on an axis of ordinates and the film thickness of the second interlayer insulation film is taken on an axis of abscissas. The spectral luminous reflectance when the film thickness of the second interlayer insulation film is about 150 nm is about 1.02% and hence, the spectral luminous reflectance takes the lowest value. The spectral luminous reflectance assumes the low value next to the lowest when the film thickness of the second interlayer insulation film is about 300 nm. That is, the spectral luminous reflectance is about 1.3%.

[0146] FIG. 18 is a view showing the spectral luminous reflectance when the second background film, the gate insulation film, the first interlayer insulation film, the second interlayer insulation film, the leveling film and the ITO film assume values shown in FIG. 13 and the film thickness of the first background film is changed within a range of 50 nm to 325 nm. The spectral luminous reflectance is taken on an axis of ordinates and the film thickness of the first interlayer insulation film is taken on an axis of abscissas. The spectral luminous reflectance when the film thickness of the first background film is about 150 nm is about 1.3% and hence, the spectral luminous reflectance takes the lowest value. The spectral luminous reflectance assumes the low value next to the lowest when the film thickness of the first background film is about 300 nm. That is, the spectral luminous reflectance is about 1.56%.

[0147] In this example, in addition to results shown in FIG. 14 and FIG. 17, from a viewpoint of reduction of capacitance and reduction of contamination attributed to the organic film, the film thickness of the second interlayer insulation film is set to 300 nm and the film thickness of the first background film is set to 150 nm in view of FIG. 15 and FIG. 18. Due to such a constitution, it is possible to suppress the interface reflection which appears when light advances from the film having the relatively high refractive index to the film having the relatively low refractive index.

[0148] FIG. 19 is a view showing the relationship between a wavelength of light and spectral luminous reflectance when a thickness of the first background film is 75 nm, and FIG. 20 is a graph showing the relationship between a wavelength of light and spectral luminous reflectance when a thickness of the first background film is 150 nm. In FIG. 19 and FIG. 20, the reflectance (%), the spectral luminous reflectance (%) and visibility are taken on the axis of ordinates and the wavelength (nm) of light is taken on an axis of abscissas. Here, the visibility is set to 1 when the wavelength is 555 nm which gives the strongest visibility to human. In FIG. 19, the visibility is about 0.028 when the wavelength is 555 nm.

[0149] On the other hand, in FIG. 20, the visibility when the wavelength is 555 nm is about 0.0009 and hence, the reflection light having the wavelength of 555 nm can be suppressed to an extent that human can hardly recognize the reflection light. Human is most sensitive to light having the wavelength of 555 nm and hence, the contrast can be enhanced by suppressing the reflection of light having the wavelength in the vicinity of 555 nm.

[0150] The reflective light from the multilayered film is generated such that since the refractive indices of the respective layers which constitute the multilayered film are different from each other, interface reflections occur between respective layers and these interface reflections interfere with each other thus generating the reflection light.

[0151] FIG. 21 is a plan view when the second substrate 7 on which color filters are formed is overlapped to the first substrate 4. Particularly, FIG. 21 is a view which explains the positional relationship between the positions of the drain lines and gate lines formed on the first substrate with the position of the black matrixes BM formed on the second substrate. The color filters and the black matrixes BM are formed on the second substrate 7.

[0152] The full transmissive type liquid crystal display device reflects the external light by the drain lines and the

gate lines which are formed of a metal thin film and hence, the contrast of images is degraded. Accordingly, the black matrixes BM are arranged to overlap the drain lines and the gate lines. Due to such an arrangement of the black matrixes BM, the degradation of the contrast of images can be suppressed.

[0153] FIG. 22 is a view for explaining the third embodiment and is a plan view of a liquid crystal display device in which a substrate on which pixel electrodes are formed and a substrate on which common electrodes are formed are arranged to face each other in an opposed manner with a liquid crystal layer therebetween. To parts shown in FIG. 22 which have the identical functions as those of the first embodiment, the same reference symbols are given. Further, the embodiment shown in FIG. 22 is applied to a full transmissive type display device which includes no reflective electrodes for displaying images by reflecting an external light on pixel portions.

[0154] Hereinafter, the point which makes this embodiment different from the second embodiment is explained in detail.

[0155] The thin film transistors and the pixel electrodes 3 are formed on one of two substrates which face each other in an opposed manner with the liquid crystal layer therebetween. In each pixel portion, in the same manner as the first embodiment, gate electrodes G, drain electrodes D, source electrodes S, gate lines 1, drain lines 2, the pixel electrodes 3, a polysilicon film 5, a contact hole 14 for forming a thin film transistor TFT, contact holes 15 are formed. The constitution which makes this embodiment largely different from the first embodiment lies in a point that common electrodes are not formed on the same layer as the pixel electrodes 3 and a point that storage lines (storage electrodes) 6 are formed on the same layer as the gate lines. By providing the storage lines, the holding capacitance of the pixel electrodes can be increased.

[0156] FIG. 23 is a plan view of black matrixes BM which are formed on the second substrate 7 (color filter substrate). The black matrixes BM are arranged such that the black matrixes BM cover the gate electrodes G, the drain electrodes D, the source electrodes S, the gate lines 1, the drain lines 2 and the storage lines 6 all of which constitute metal portions in FIG. 2. By arranging the black matrixes BM in such a manner, the reflection of the external light by the metal portions can be prevented and hence, the contrast can be enhanced. Further, the counter electrodes (common electrodes) C are formed on a surface of the second substrate 7 which faces the liquid crystal layer. An orientation film is formed over the second substrate 7 such that the orientation film also covers the counter electrodes C.

[0157] FIG. 24 is a cross-sectional view taken along a line III-III in FIG. 22.

[0158] The first background film 9, the second background film 10 are formed over the glass substrate 8 and the polysilicon film 5 is formed on the second background film 10. The gate insulation film 12 is formed so as to cover the polysilicon film 5 and the gate electrodes G are formed on the gate insulation film. Further, the storage electrodes 6 which are formed on the same layer as the gate electrodes G are formed over the gate insulation film 12. The first interlayer insulation film 13 is formed such that the first

interlayer insulation film 13 covers the gate electrodes G, the storage electrodes 6 and the gate insulation film. The contact holes 14 are formed in portions of the first interlayer insulation film 13 and the gate insulation film so that respective connections between the polysilicon film 5 and gate electrodes G and between the polysilicon film 5 and the source electrodes S can be established. The drain electrodes D and the source electrodes S which are formed on the first interlayer insulation film have a three-layered structure consisting of a titanium-tungsten layer as a lower layer, an aluminum layer as an intermediate layer and a titanium-tungsten layer as an upper layer. In FIG. 24, the lower layer and the intermediate layer are shown as one film. The titanium-tungsten layer constituting the upper layer ensures the electrical connection with the pixel electrodes 3. The second interlayer insulation film 16 is formed such that the insulation film 16 covers the drain electrodes, the source electrodes and the first interlayer insulation film, while the organic insulation film 18 is formed such that the insulation film 18 covers the second interlayer insulation film. Contact holes 15 are formed in portions of the organic insulation film and this enables the connection between the source electrodes and the pixel electrodes. ITO (Indium Tin Oxide) is used as a material of the pixel electrodes. An orientation film 22 is formed over a surface of the first substrate over which these layers are respectively formed and which faces the liquid crystal layer 19.

[0159] On the pixel region, the light transmissive films are laminated and these laminated films have different refractive indices. To prevent the reflection of the external light from the counter substrate side, the film thicknesses of the light transmissive films are controlled.

[0160] Also in the third embodiment, the film thicknesses are configured to respectively satisfy a following formula assuming the film thickness of each film as $d(\text{nm})$ and the refractive index when the wavelength is 555 nm (m being an arbitrary integer excluding a negative integer) as n .

$$d=555 \times m / (2 \times n).$$

[0161] Further, considering the manufacturing errors, the visibility or the like, it is necessary to reduce or add the thickness of approximately 10% of the film thickness in addition to the calculated value. The film thickness is favorably controlled within the error of 10 nm.

[0162] That is, the film thicknesses are configured to respectively satisfy a following formula assuming the film thickness of each film as $d(\text{nm})$ and the refractive index when the wavelength is 555 nm (m being an arbitrary integer excluding a negative integer) as n .

$$0.9d \leq 555 \times m / (2 \times n) \leq 1.1d.$$

[0163] Further, in view of the allowable range of the visibility, when the film thickness d exceeds the 200 nm, $\pm 15\%$ of the given film thickness is allowable.

[0164] That is, the film thicknesses are configured to respectively satisfy a following formula assuming the film thickness of each film as $d(\text{nm})$ and the refractive index when the wavelength is 555 nm (m being an arbitrary integer excluding a negative integer) as n .

$$0.85d \leq 555 \times m / (2 \times n) \leq 1.15d.$$

[0165] The specific thickness is shown in FIG. 13.

[0166] By constituting the laminated film structure in this manner, the reflection of the external light attributed to the difference of the refractive index when the light passes from the film having the high refractive index to the film having the low refractive index can be suppressed and the display of the inverted image can be suppressed.

[0167] FIG. 25 is a cross-sectional view of the liquid crystal display device for explaining the arrangement of a backlight structural body which is used in common by the embodiments of the present invention.

[0168] The first substrate 4 and the second substrate 7 are arranged to face each other in an opposed manner while sandwiching the liquid crystal layer 19 therebetween. The first substrate and the second substrate are fixed by a sealing material 11.

[0169] The polarizer 20 is arranged on the image display surface side (image observing surface side) of the second substrate and the polarizer 21 is also arranged on the backlight side (opposite to the image observing surface side) of the first substrate. Further, a light diffusion layer 17 is disposed between the first substrate 7 and the polarizer 21. Further, a reflection polarizer 23 is arranged on the backlight side of the polarizer 21.

[0170] The backlight structural body is constituted of at least a light guide plate 25, a light source 26 and a reflection plate 27. A light diffusion sheet 24 may be arranged on the front surface of the light guide plate 25 when necessary.

[0171] The light diffusion layer 17 is made of a diffusion tacky adhesive material. The diffusion tacky adhesive material has both of a light diffusion function and a function of fixing the polarizer and the first substrate. Further, the light diffusion sheet 24 is arranged in front of the polarizer (observing window side) so as to diffuse light.

[0172] The light 28 incident from the observing window to the panel is diffused by the light diffusion layer 17 and the light diffusion sheet 24 and reaches the reflection plate 27. The reflected light 29 is also irradiated from the panel after passing through the diffusion sheet and the light diffusion layer 17 and hence, the light is sufficiently diffused whereby the luminance mottling can be suppressed. Further, the occurrence of a shadow of the image which is generated when the image is observed in an oblique direction can be prevented and hence, the image recognition is improved. Particularly, the lateral field type liquid crystal display device has a wide viewing angle and hence, the present invention is preferably applicable to such a display device. Further, with the provision of the reflection polarizer 23, the external light can be effectively used.

[0173] On the other hand, the light 30 irradiated from the light source 26 of the backlight passes through the light guide plate 25 and is bent toward the image display surface side. The light 30 is also diffused by the light diffusion sheet and the light diffusion layer and hence, the luminance mottling on the image display surface can be suppressed. With such a constitution, when the using environment is dark, the image is displayed using the light from the backlight and when the using environment is bright, the image is displayed by reflecting the external light. Particularly, the

inverted display of the image which may occur when the image is displayed by reflecting the external light can be suppressed.

[0174] Further, it is also possible to use both of the external light and the backlight. In this case, even when the using environment is bright, the image display having a favorable contrast can be displayed.

[0175] Further, although, in the above-mentioned embodiments, the first substrate 4 is explained as the glass substrate, a similar drawback arises so long as the substrate needs the background film. The first substrate may be formed of a substrate other than the glass substrate. Further, even other than the background film, by applying the above-mentioned constitution to the structure which is formed by forming the multilayered film in the light transmissive portion, the image recognition can be improved.

[0176] In the application which constitutes a basis for claiming the internal priority with respect to the present application, the film thickness of the nitride silicon is defined as

$$d \pm 10 = 555 \times m / 2 \times n.$$

[0177] However, in this previous domestic application, as clearly shown in FIG. 5, FIG. 6 and FIG. 7, it is found that when the film thickness of the background film is set to 140 nm, the spectral luminous reflectance becomes minimum. That is, the previous domestic application describes that assuming the film thickness of the background film as $d(\text{nm})$ and the refractive index when the wavelength is 555 nm as n , a following formula is satisfied.

$$d = 555 \times m / 2 \times n$$

[0178] Further, the previous domestic application also describes that it is necessary to adjust the film thickness of the background film within approximately 10% of the film thickness considering manufacturing error and the film thickness is favorably controlled with the allowable error of 10 nm. That is, according to the technical concept of the present invention, it is a requisite that assuming the film thickness of the background film as $d(\text{nm})$ and the refractive index when the wavelength is 555 nm as n , a following formula is satisfied.

$$d - 10 \leq 555 \times m / (2 \times n) \leq d + 10$$

[0179] However, in the specification of the previous domestic application, there existed some deficiencies in the description of formula.

[0180] In the display device of the present invention, it is preferable to set the film thickness of the nitride silicon of the background film within a range of 140 nm $\pm$ 10 nm (within a range of 130 nm to 150 nm) which provides the minimum spectral luminous reflectance. However, this range is a value which is obtained when the refractive index of the nitride silicon is set to 2.0 and the refractive index of the nitride silicon varies within a range of 2.0 to 1.85. When the refractive index is set to 1.85, it is preferable to set the film thickness within a range of 150 nm $\pm$ 10 nm (within a range of 140 nm to 160 nm). Accordingly, by taking the change of the refractive index of the nitride silicon into consideration, it is preferable that the film thickness of the nitride silicon of the background film is set within a range of 130 nm to 160 nm.

[0181] Further, in the specification of the previous domestic application, it is described that it is necessary to increase or decrease the film thickness of the nitride silicon of the background film within 10% of the thickness by taking the manufacturing error into consideration. Under such a condition, when the refractive index of the nitride silicon of the background film is 2.0, it is necessary to adjust the film thickness within a range of $140\text{ nm} \pm 14\text{ nm}$, that is, within a range of 126 nm to 154 nm. Further, when the refractive index of the nitride silicon of the background film is 1.85, it is necessary to adjust the film thickness within a range of $150\text{ nm} \pm 15\text{ nm}$, that is, within a range of 135 nm to 165 nm. Accordingly, by taking the change of the refractive index of the nitride silicon into consideration, it is necessary to adjust the film thickness of the nitride silicon of the background film within a range of 126 nm to 165 nm. Further, there may be a case that the film thickness of the nitride silicon changes within approximately 15% depending on a manufacturing device or a manufacturing process. In such a case, it is necessary to set the film thickness of the nitride silicon of the background film in a range of about 120 nm to 170 nm. Even within this range, it is possible to decrease the reflection of the nitride silicon compared to the conventional technique. Further, as mentioned above, to protect the polysilicon film from the impurities of the substrate, it is sufficient that the film thickness of the nitride silicon which constitutes the first background film is set to a value equal to or more than 45 nm. The film thickness of the nitride silicon background film shown in FIG. 4 within a range of 50 nm to 180 nm is a range determined by focusing on the advantageous effect of reducing the intrusion of the impurities from the substrate. Accordingly, to increase this advantageous effect in decreasing the reflection of the nitride silicon film further, it is favorable to restrict the film thickness in a narrower range.

[0182] Here, the relationship between the film thickness of the background nitride silicon film and the spectral luminous reflectance shown in FIG. 5 is obtained by setting the refractive index of the nitride silicon film to about 2 (roughly 1.98). FIG. 5 also shows a case in which the refractive index is set to 1.85. However, the refractive index of the nitride silicon film changes from 1.8 to 2.1 according to the properties of the manufacturing device or the manufacturing process. Accordingly, by setting the film thickness to 132 nm when the refractive index of the nitride silicon is 2.1 and by setting the film thickness to 154 nm when the refractive index is 1.8, the spectral luminous reflectance assumes the minimum value. That is, to take the change of the refractive index of the nitride silicon film of the background film into consideration, by setting the film thickness of the nitride silicon of the background film within a range of 132 nm to 154 nm, the spectral luminous reflectance can be suppressed to a low value.

[0183] Here, considering that the refractive index of the background film changes from 1.8 to 2.1, when the film thickness is adjusted within a range of 10 nm as mentioned above, it is favorable to set the film thickness to a value which falls within a range of 122 nm to 164 nm. Further, when the film thickness of the nitride silicon of the background film is adjusted within a range of 10% of the thickness, it is necessary to adjust the film thickness of the nitride silicon of the background film in a range of 118 nm to 169 nm.

[0184] The restriction of the film thickness of the nitride silicon background film described here relates to the film thickness of the transmissive portion within the pixel region.

[0185] Although the values of the film thickness have been described heretofore, it is preferable to set these values as follows. That is, assuming the film thickness of the background film of the nitride silicon as $d(\text{nm})$ and the refractive index when the wavelength is 555 nm as n , it is favorable to set the film thickness such that a following formula is satisfied

$$d - 10 \leq 555 \times m / (2 \times n) \leq d + 10$$

[0186] when the film thickness is suppressed within a range of $\pm 10\text{ nm}$, and

$$dx(1 - 0.01 \times a) \leq 555 \times m / (2 \times n) \leq d + (1 + 0.01 \times a)$$

[0187] when the film thickness is suppressed in a range of $\pm a\%$.

[0188] According to the present invention, by reducing the reflection of light from the transmissive region, a contrast which is formed by the reflective pixel electrode, the liquid crystal layer arranged above the reflective pixel electrode, the optical retardation plate, the polarizer can be enhanced. Further, the present invention also provides the display device which can enhance the visibility of images when the images are displayed by reflecting the external light on the back surface side than the first substrate. Still further, it is possible to enhance the visibility of images even when the reflective light and the light from the backlight are used simultaneously.

What is claimed is:

1. A liquid crystal display device including thin film transistors and pixel electrodes formed on a substrate being characterized in that

each thin film transistor includes a silicon film, a gate electrode, and a source electrode which is electrically connected to the pixel electrode,

between the silicon film and the substrate and between the pixel electrode and the substrate, a silicon oxide film and a silicon nitride film which is formed between the silicon oxide film and the substrate are interposed, and

a film thickness of the silicon nitride film is larger than a film thickness of the silicon oxide film.

2. A liquid crystal display device according to claim 1, wherein the silicon nitride film satisfies a following formula assuming the film thickness as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer).

$$d - 10 \leq 555 \times m / (2 \times n) \leq d + 10$$

3. A liquid crystal display device according to claim 1, wherein the silicon nitride film satisfies a following formula assuming the film thickness as $d(\text{nm})$ and a refractive index when a wavelength is 555 nm as n (m being an arbitrary integer).

$$0.9d \leq 555 \times m / (2 \times n) \leq 1.1d$$

4. A liquid crystal display device according to claim 1, wherein the film thickness of the silicon nitride film falls within a range of 130 nm to 160 nm.

5. A liquid crystal display device according to claim 1, wherein the film thickness of the silicon nitride film falls within a range of 126 nm to 165 nm.

6. A liquid crystal display device according to claim 1, wherein a gate insulation film is formed between the silicon layer and the gate electrode, and an interlayer film arranged close to the gate insulation film is interposed between the gate insulation film and the pixel electrode.

7. A liquid crystal display device according to claim 6, wherein the interlayer film includes a first interlayer insulation film and a second interlayer insulation film which is formed between the first interlayer insulation film and the pixel electrode.

8. A liquid crystal display device according to claim 7, wherein the gate insulation film and the first interlayer insulation film are made of a same material.

9. A liquid crystal display device according to claim 8, wherein the gate insulation film and the first interlayer insulation film are made of silicon oxide and a following formula is satisfied assuming a total film thickness of the silicon oxide film, the gate insulation film and the first interlayer insulation film as $d(\text{nm})$ and m as an arbitrary integer.

$$0.9d \leq 555 \times m / (2 \times 1.5) \leq 1.1d$$

10. A liquid crystal display device according to claim 6, wherein a following formula is satisfied assuming a total film thickness of the second interlayer insulation film and the pixel electrode as $d(\text{nm})$ and m as an arbitrary integer.

$$0.9d \leq 555 \times m / (2 \times 2) \leq 1.1d$$

11. A liquid crystal display device according to claim 1, wherein the pixel electrode includes a reflective electrode and a light-transmissive electrode, and a distance from the substrate to the reflective electrode and a distance from the substrate to the light-transmissive electrode differ from each other.

12. A liquid crystal display device according to claim 11, wherein an organic film is formed between the reflective electrode and the substrate.

13. A liquid crystal display device according to claim 1, wherein the pixel electrode is a light transmissive electrode and an organic film is formed between the light transmissive electrode and the substrate.

14. A liquid crystal display device according to claim 12, wherein a following formula is satisfied assuming a total film thickness of the organic film as $d(\text{nm})$ and m as an arbitrary integer.

$$0.9d \leq 555 \times m / (2 \times 1.6) \leq 1.1d$$

15. A liquid crystal display device according to claim 1, wherein light transmissive counter electrodes are formed on a substrate which faces the substrate in an opposed manner.

16. A liquid crystal display device according to claim 13, wherein a backlight is formed outside the substrate and a reflector is formed on the backlight.

17. A liquid crystal display device according to claim 1, wherein the pixel electrode is formed on an organic film formed on the substrate and a common electrode is also formed on the organic film.

18. A liquid crystal display device according to claim 17, wherein a following formula is satisfied assuming a total film thickness of the organic film as $d(\text{nm})$ and m as an arbitrary integer.

$$0.9d \leq 555 \times m / (2 \times 1.6) \leq 1.1d$$

19. A liquid crystal display device according to claim 16, wherein a backlight is formed outside the substrate and a reflector is formed on the backlight.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US20040021805A1	公开(公告)日	2004-02-05
申请号	US10/629559	申请日	2003-07-30
[标]申请(专利权)人(译)	同时tetabuya 平贺KOJI UEHARA MASAO 福田浩一		
申请(专利权)人(译)	永田TETSUYA 平贺KOJI UEHARA MASAO 福田KOICHI		
当前申请(专利权)人(译)	永田TETSUYA 平贺KOJI UEHARA MASAO 福田KOICHI		
[标]发明人	NAGATA TETSUYA HIRAGA KOJI UEHARA MASAO FUKUDA KOICHI		
发明人	NAGATA, TETSUYA HIRAGA, KOJI UEHARA, MASAO FUKUDA, KOICHI		
IPC分类号	G02F1/1368 G02F1/1333 G02F1/1335 G02F1/136		
CPC分类号	G02F1/133345 G02F2202/104 G02F1/133555 G02F1/133502		
优先权	2002220607 2002-07-30 JP 2002354496 2002-12-06 JP		
其他公开文献	US7245338		
外部链接	Espacenet USPTO		

摘要(译)

本发明提供一种液晶显示装置，其减少来自透射区域的光的反射，增强图像的对比度并抑制反转图像的显示。该液晶显示装置包括由氮化硅制成的第一背景膜和在玻璃基板上由氧化硅制成的第二背景膜，并且在第二背景膜上形成薄膜晶体管和透光像素部分。薄膜晶体管由多晶硅膜，玛瑙电极，漏电极和源电极构成，而栅极绝缘膜，层间绝缘膜和有机膜形成在像素部分上。此外，液晶显示装置具有反射外部光的功能，其中通过形成比第二背景膜厚的第一背景膜，可以抑制透射型液晶面板的图像的反转。

