



US 20040169786A1

(19) **United States**

(12) **Patent Application Publication**
Yamazaki et al.

(10) Pub. No.: US 2004/0169786 A1

(43) Pub. Date: Sep. 2, 2004

(54) LIQUID CRYSTAL DISPLAY DEVICE AND
MANUFACTURING METHOD OF LIQUID
CRYSTAL DISPLAY DEVICE

(30) **Foreign Application Priority Data**

Jan. 15, 2003 (JP) 2003-007568
Jan. 15, 2003 (JP) 2003-007697

(75) Inventors: **Shunpei Yamazaki**, Tokyo (JP); **Toru Takayama**, Atsugi (JP); **Junya Maruyama**, Ebina (JP); **Yuugo Goto**, Atsugi (JP); **Yumiko Ohno**, Atsugi (JP); **Akio Endo**, Atsugi (JP); **Yasuyuki Arai**, Atsugi (JP)

Correspondence Address:

ERIC ROBINSON

PMB 955

21010 SOUTHBANK ST.

POTOMAC FALLS, VA 20165 (US)

(73) Assignee: Semiconductor Energy Laboratory Co., Ltd., Atsugi-shi (JP)

(21) Appl. No.: 10/756,833

(22) Filed: Jan. 14, 2004


Publication Classification


(51) Int. Cl.⁷ G02F 1/1335
(52) U.S. Cl. 349/61


(57) ABSTRACT






ABSTRACT




To sophisticate a portable electronic appliance without hindering reduction of the weight and the size, more specifically, to sophisticate a liquid crystal display apparatus installed in a portable electronic appliance without hindering the mechanical strength, a liquid crystal display apparatus includes a first plastic substrate, a light-emitting device which is disposed over the first plastic substrate, resin which covers the light-emitting device, an insulating film which is in contact with the resin, a semiconductor device which is in contact with the insulating film, a liquid crystal cell which is electrically connected to the semiconductor device, and a second plastic substrate, wherein the semiconductor device and the liquid crystal cell are disposed between the first plastic substrate and the second plastic substrate.


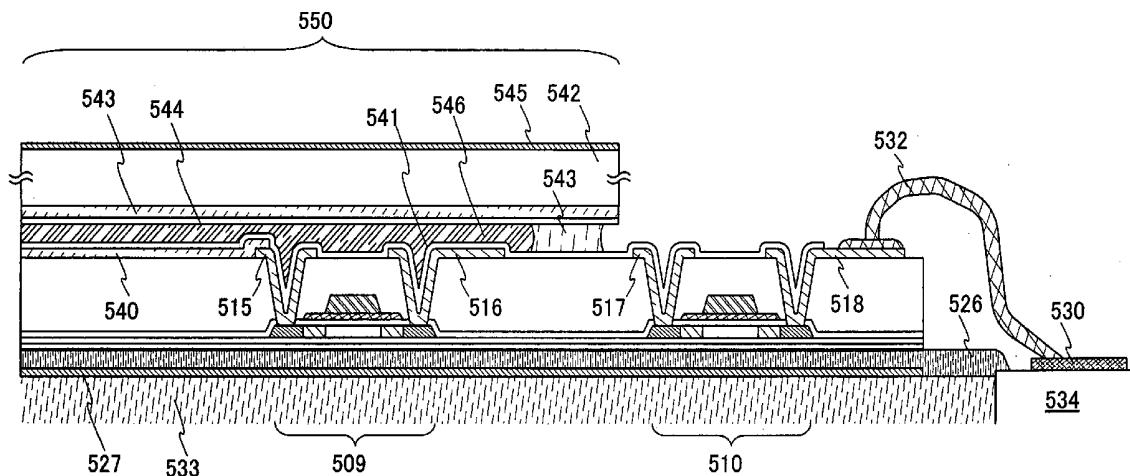


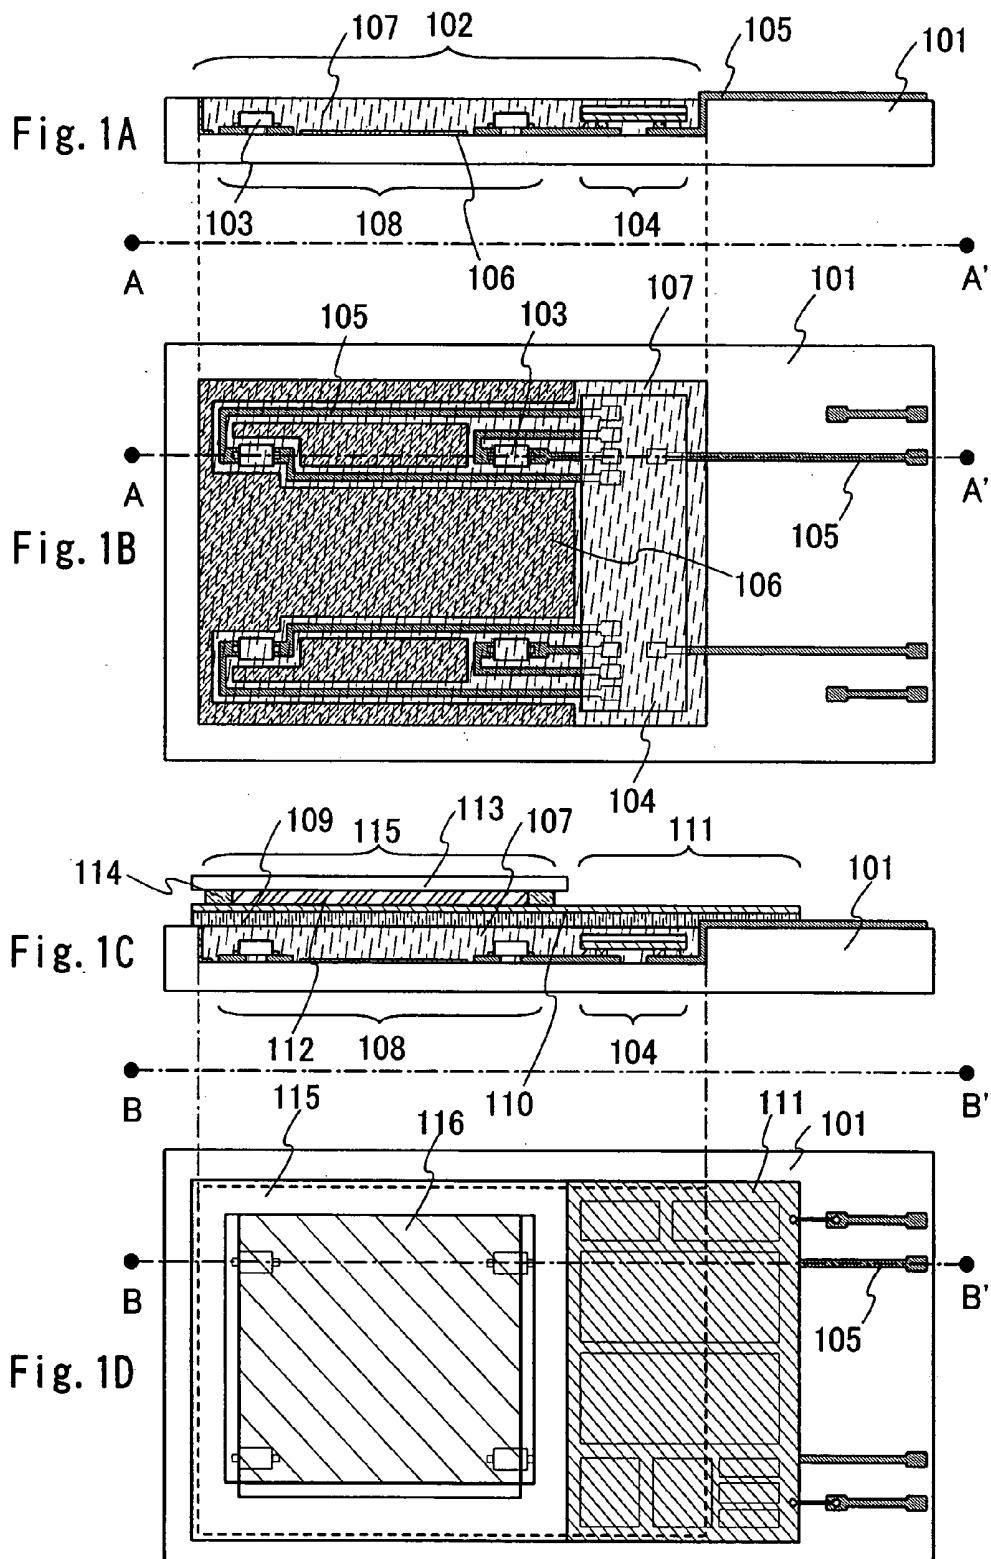

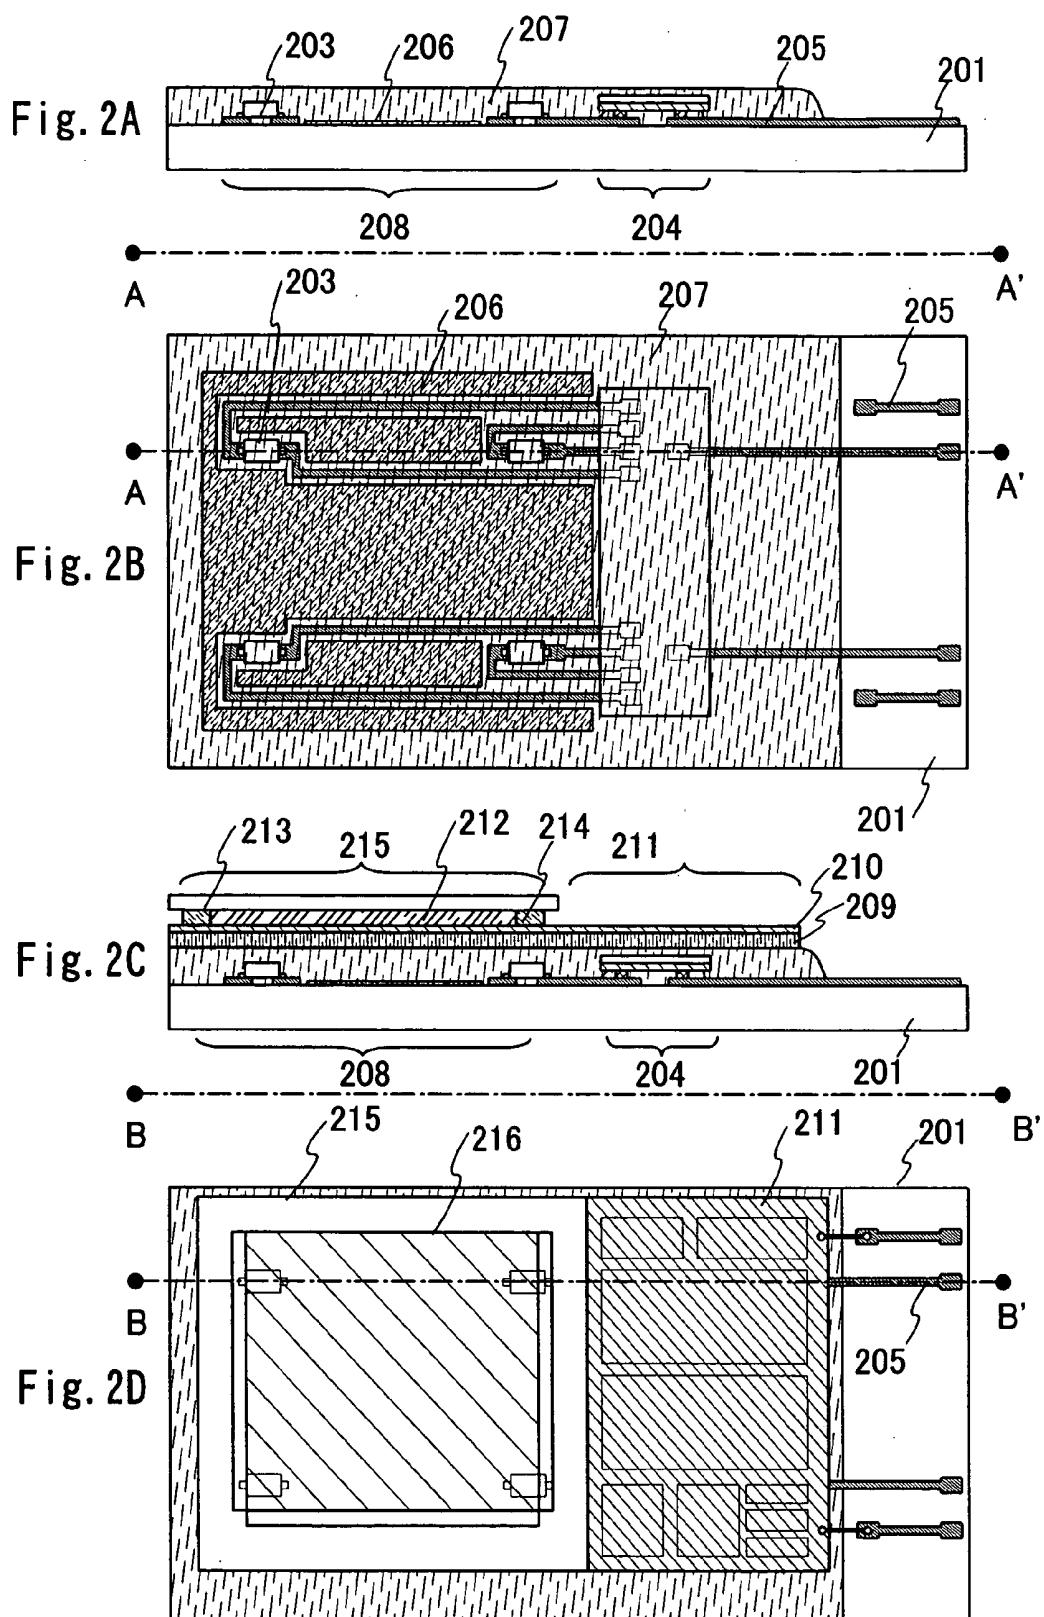

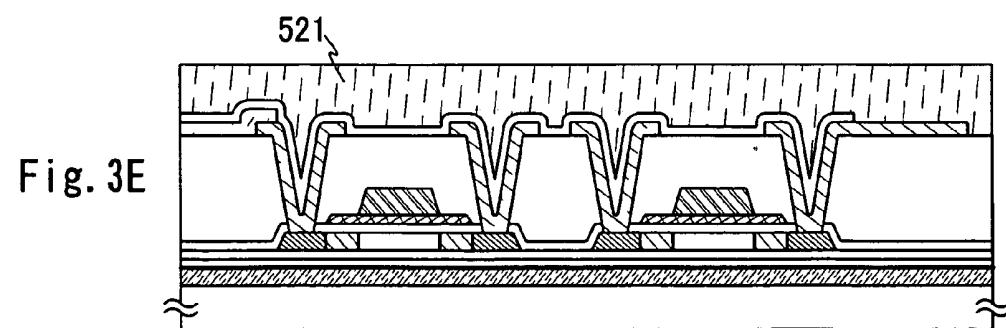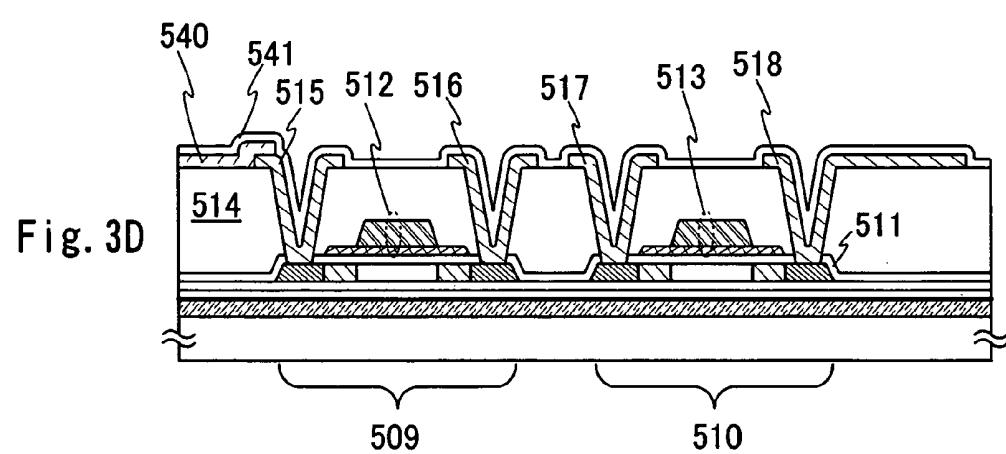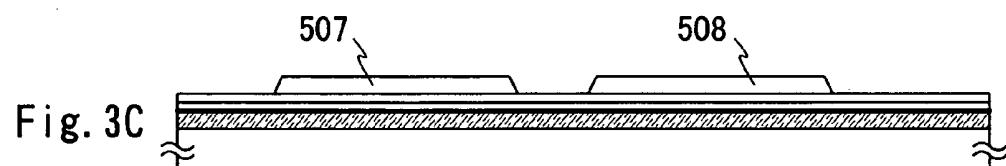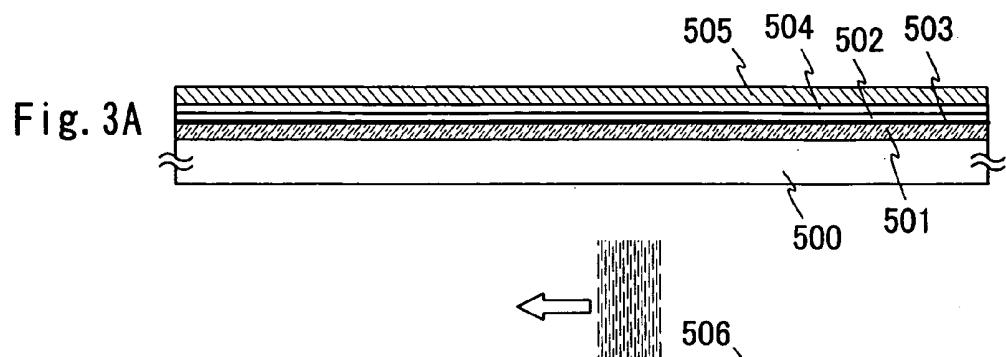

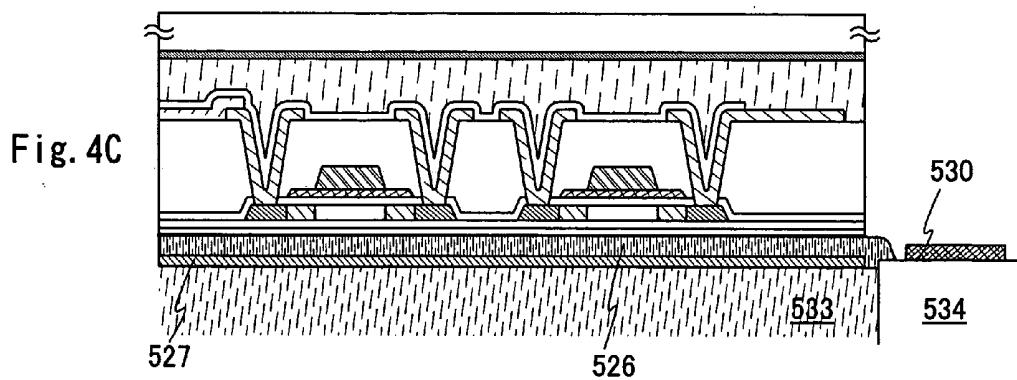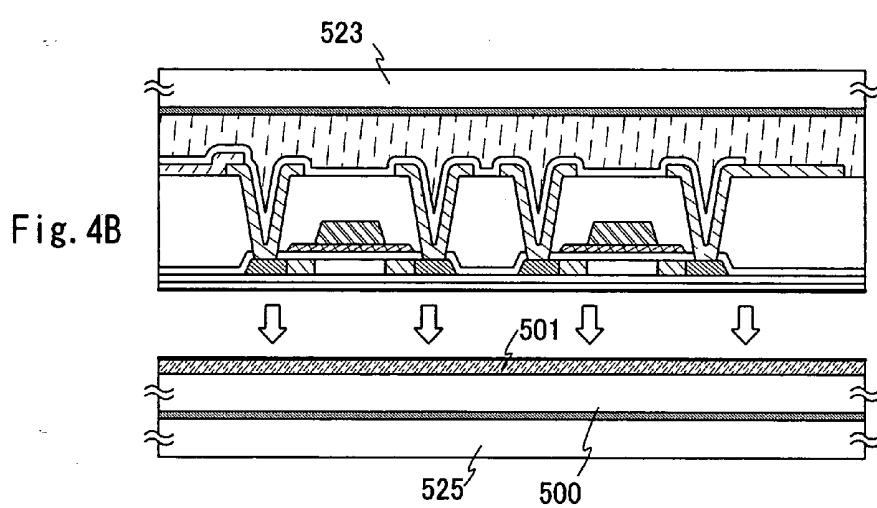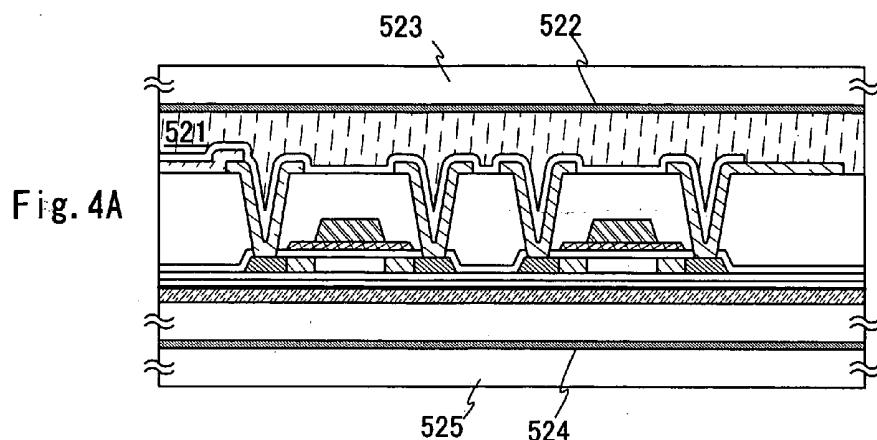

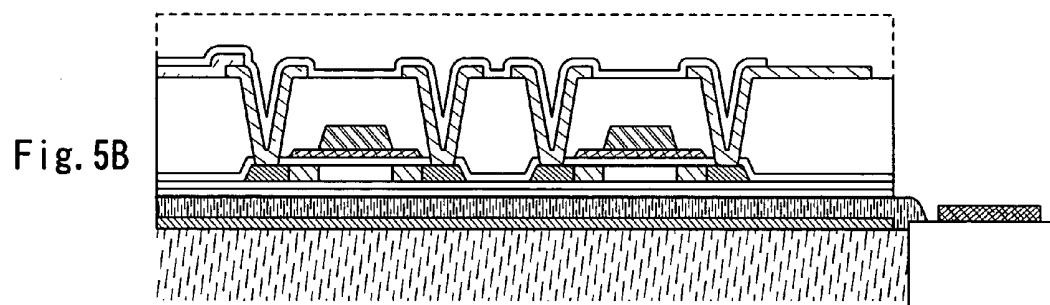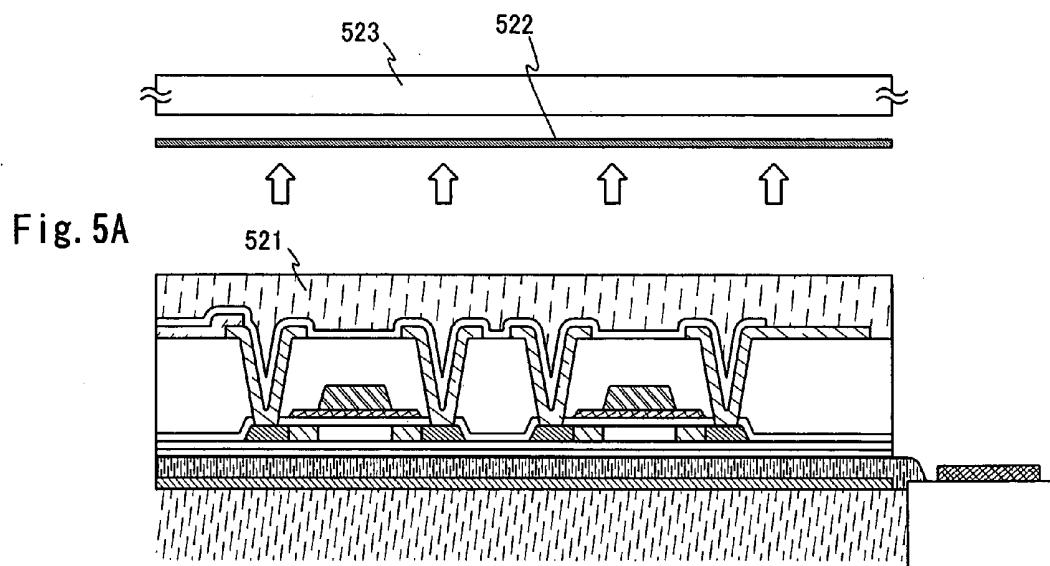

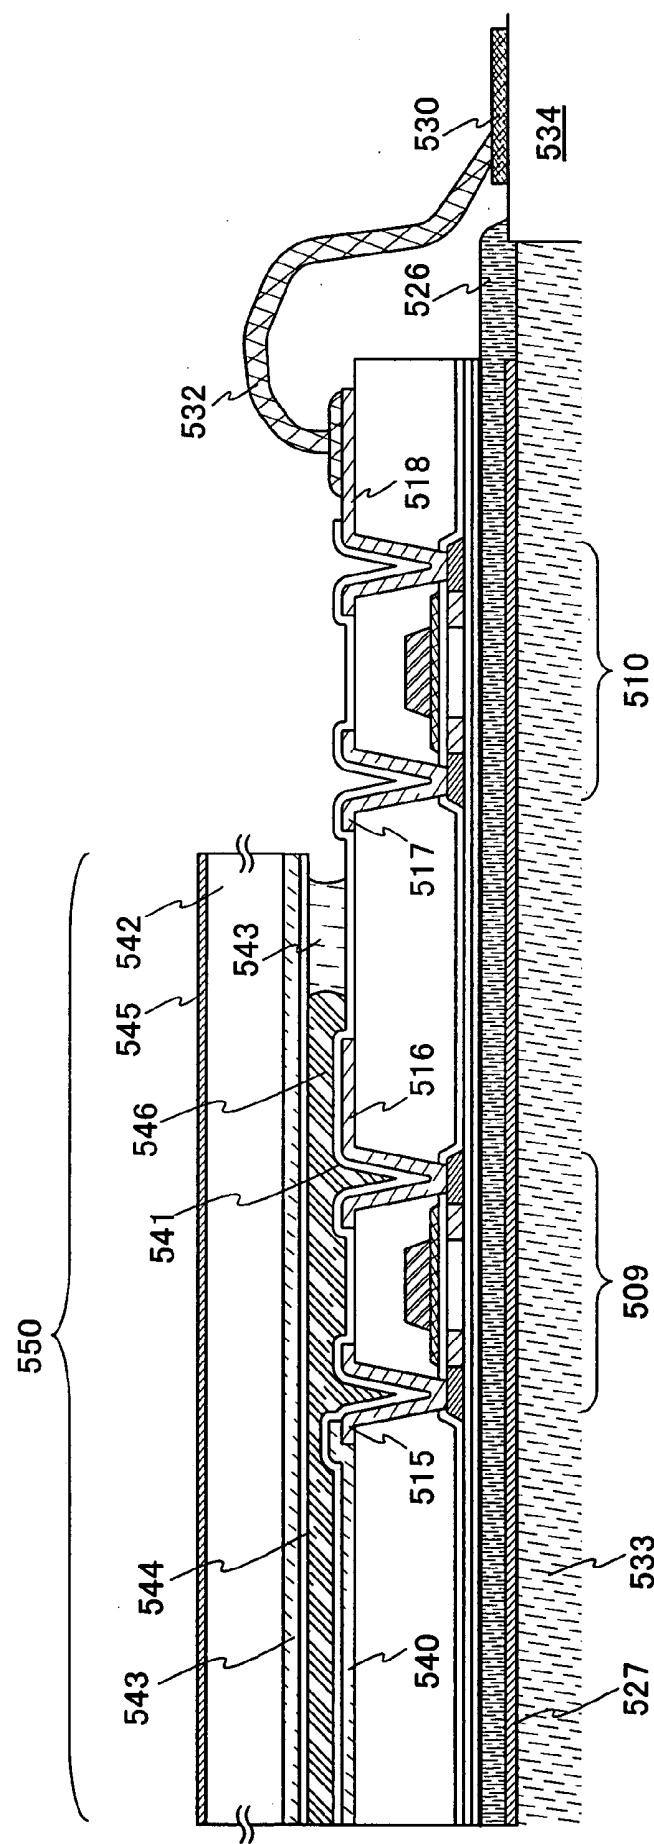
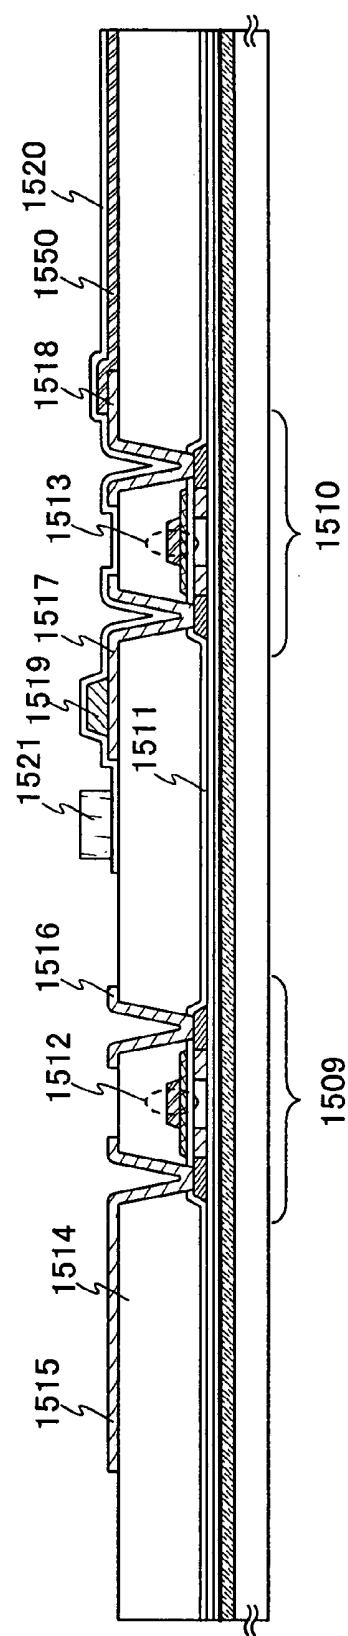
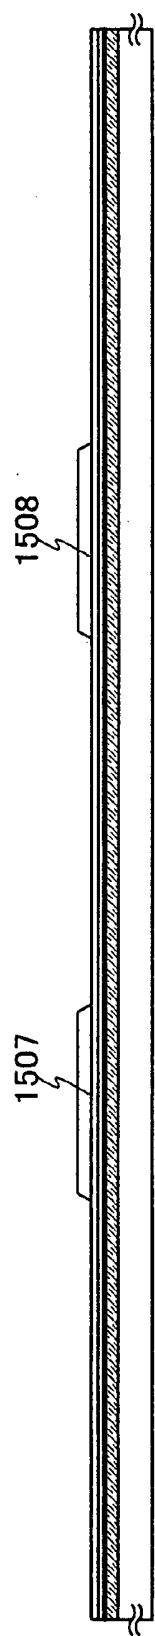
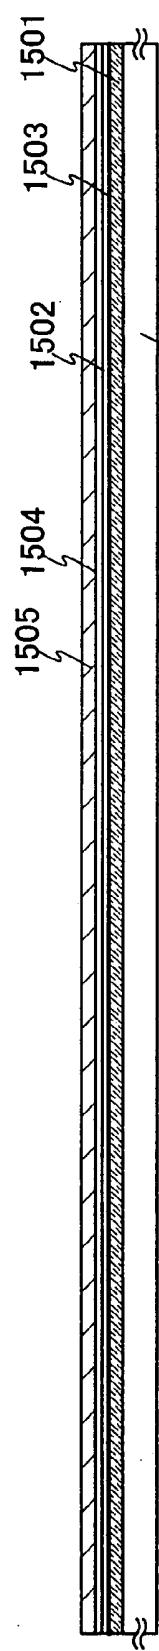


Fig. 6



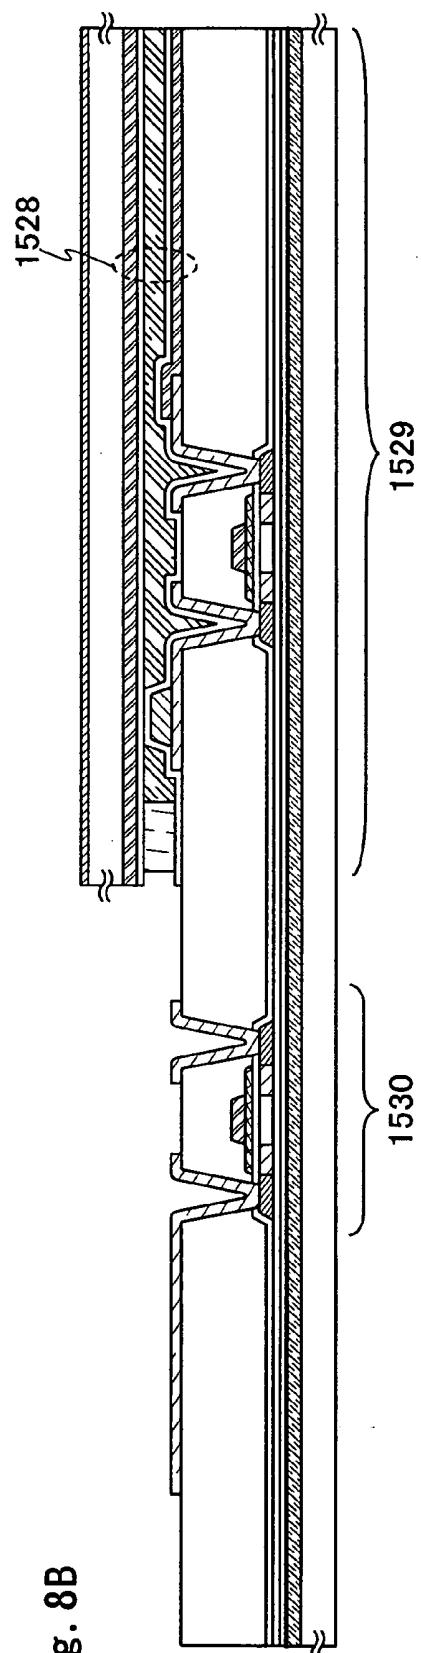
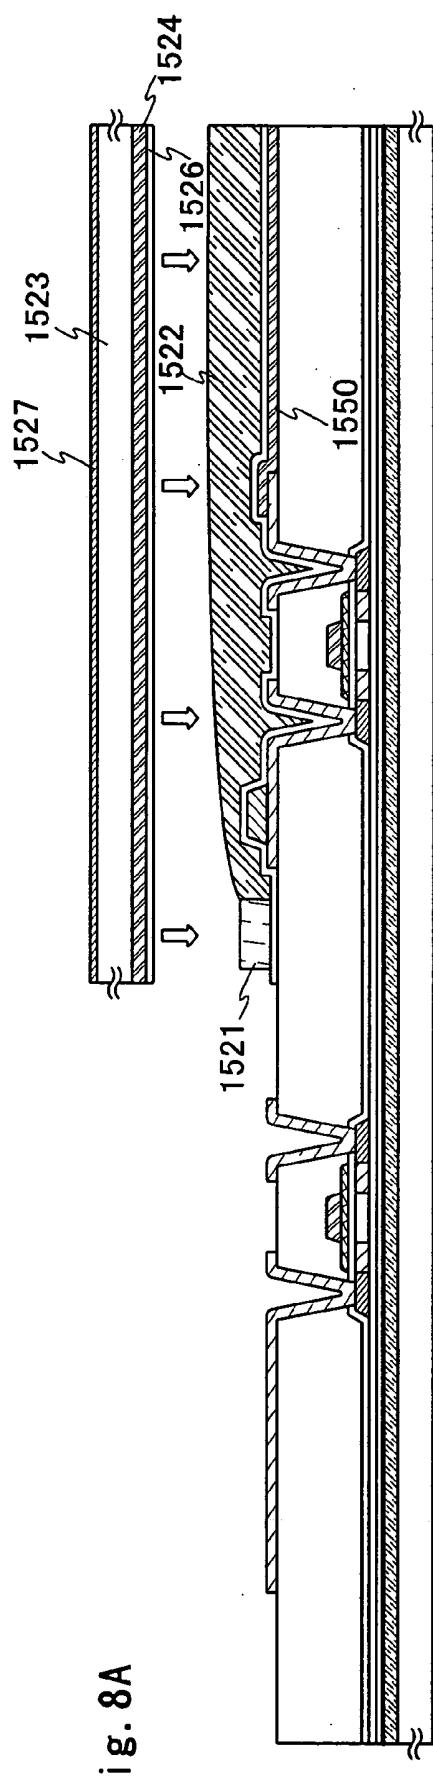


Fig. 9A

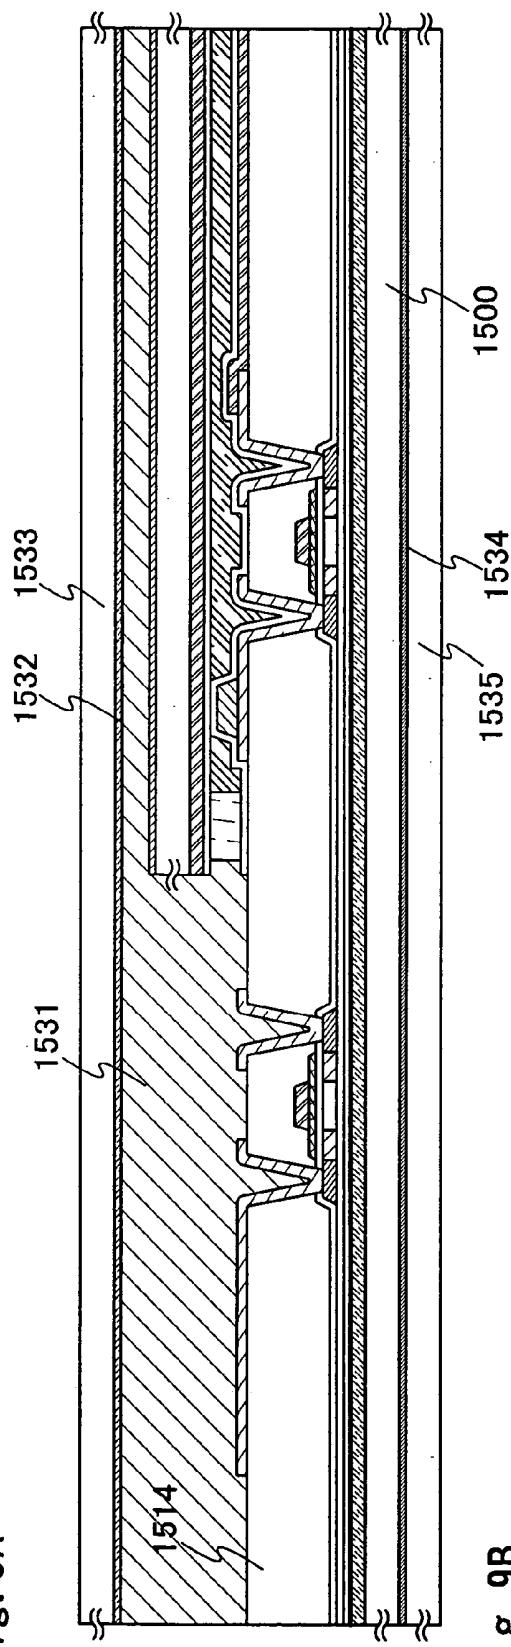
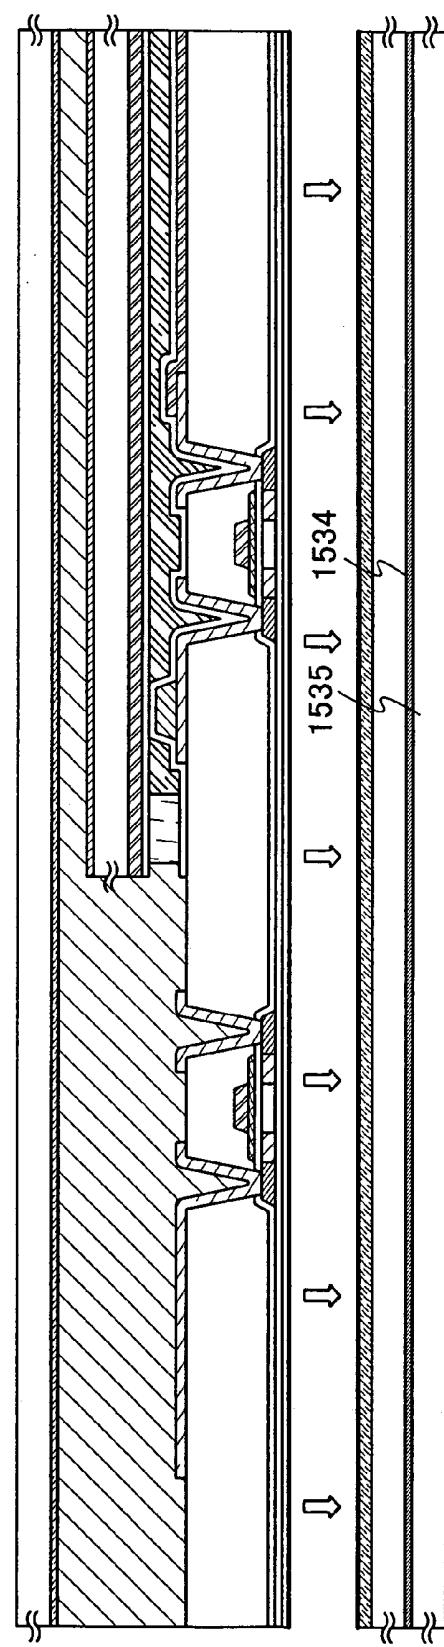


Fig. 9B



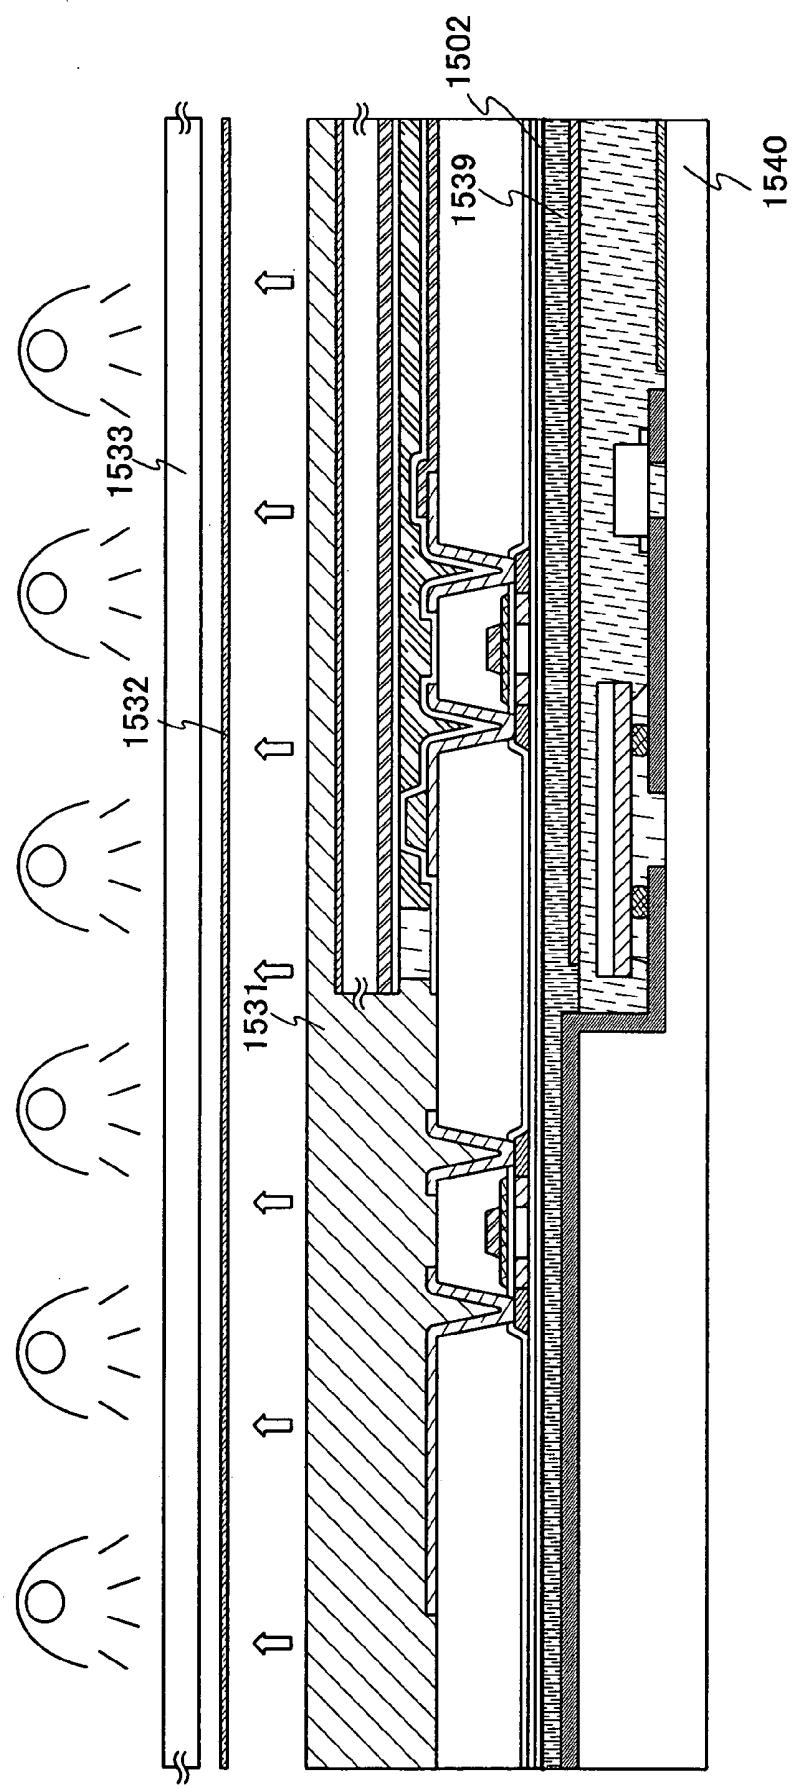
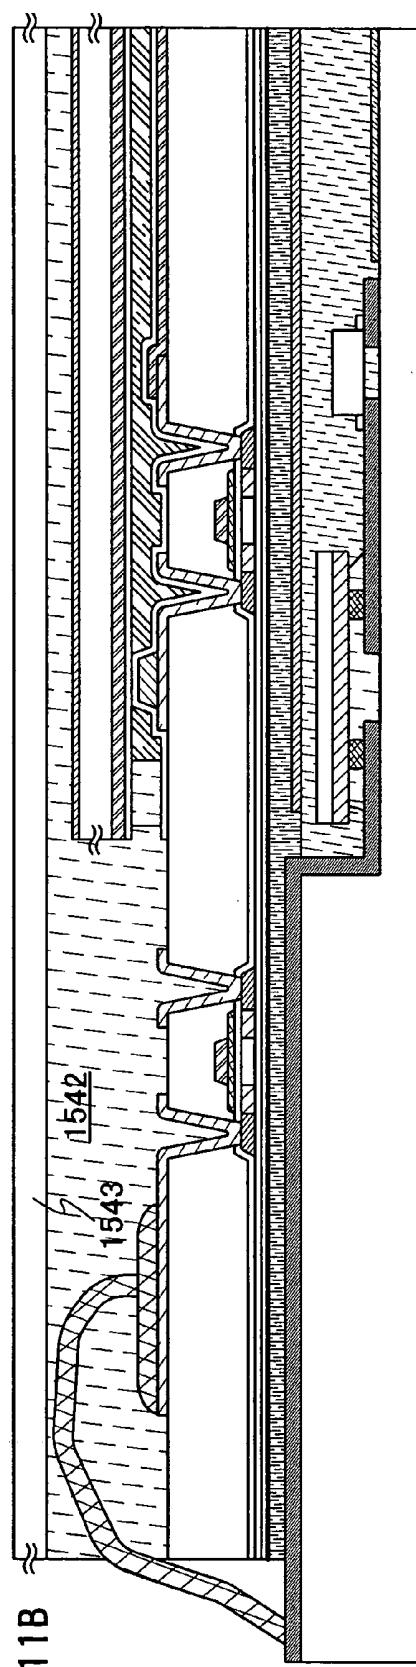
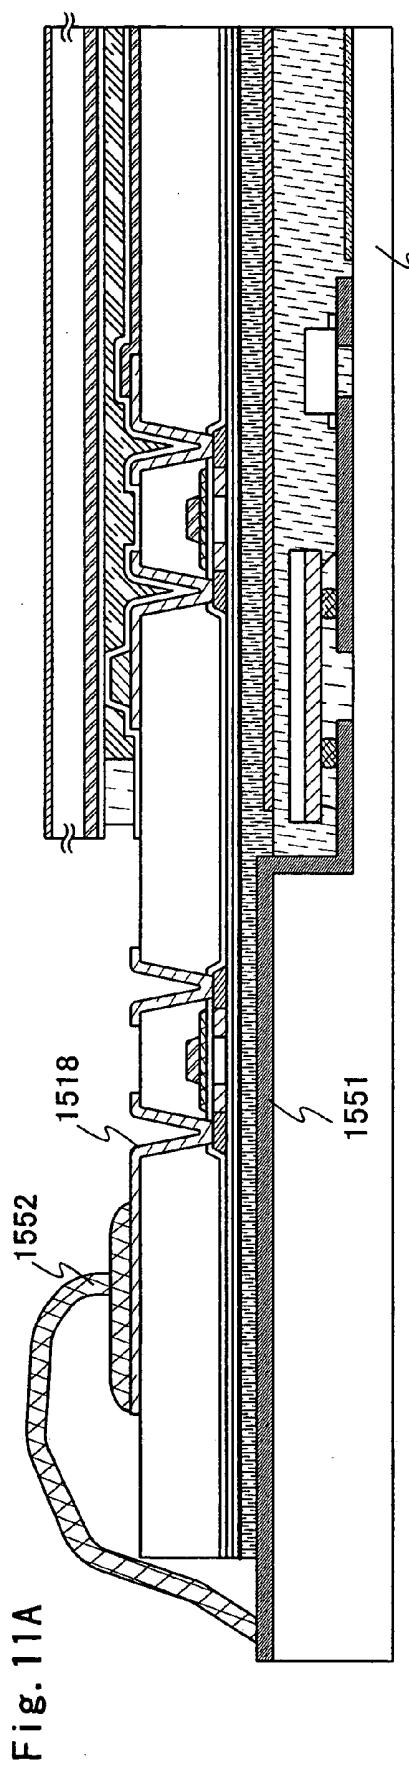
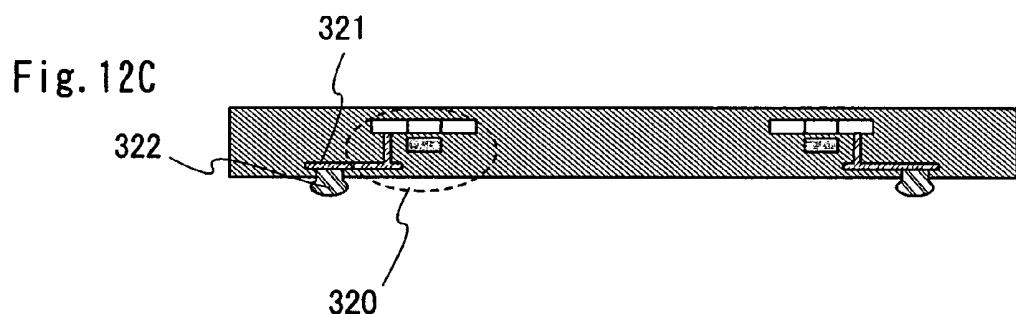
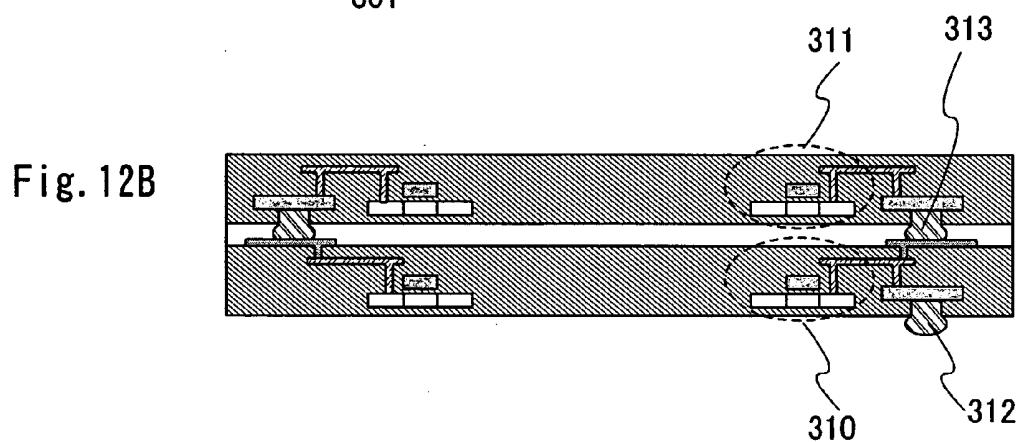
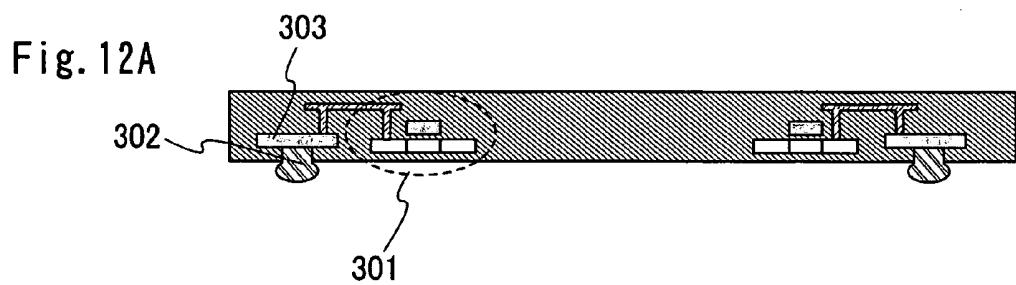


Fig. 10





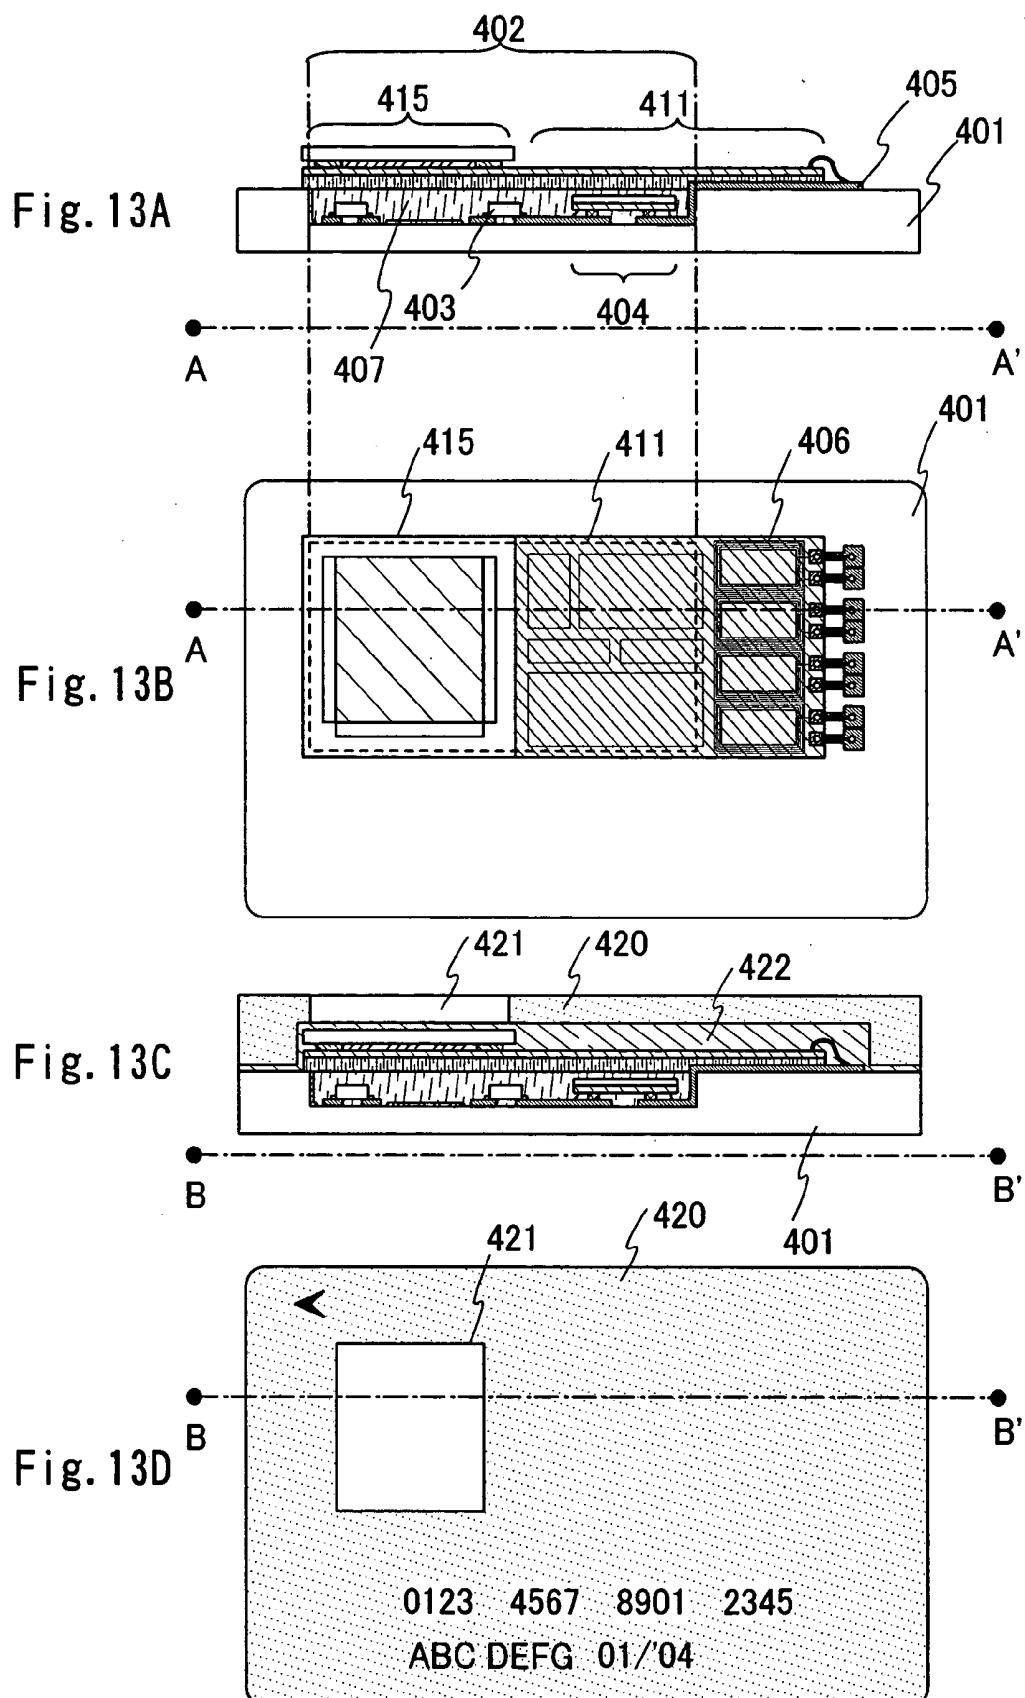


Fig. 14A

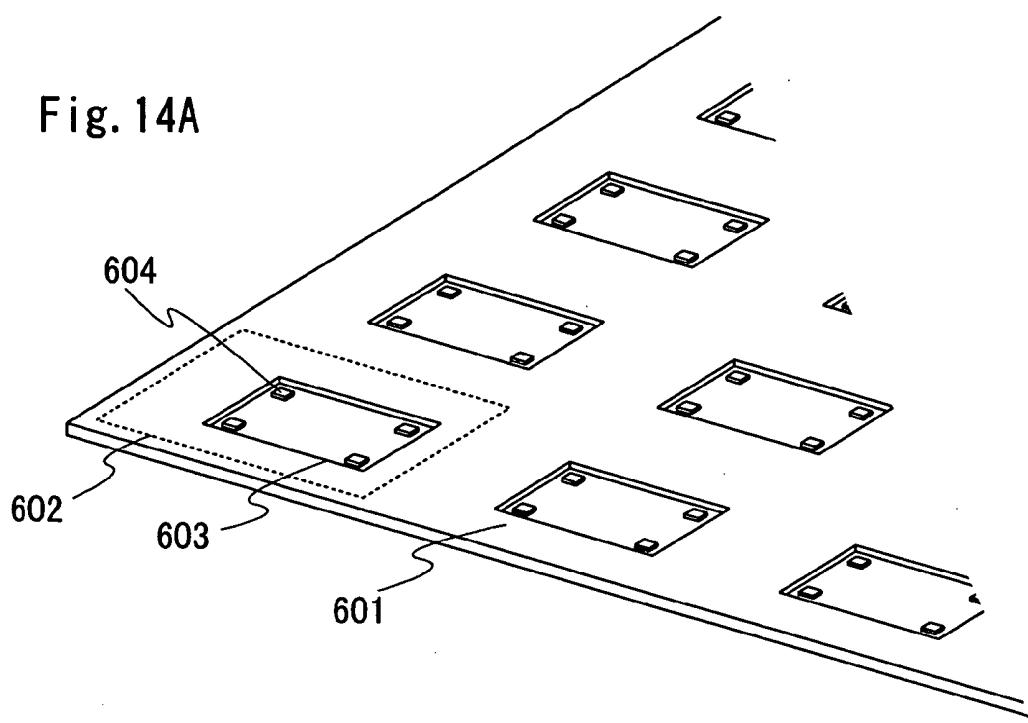
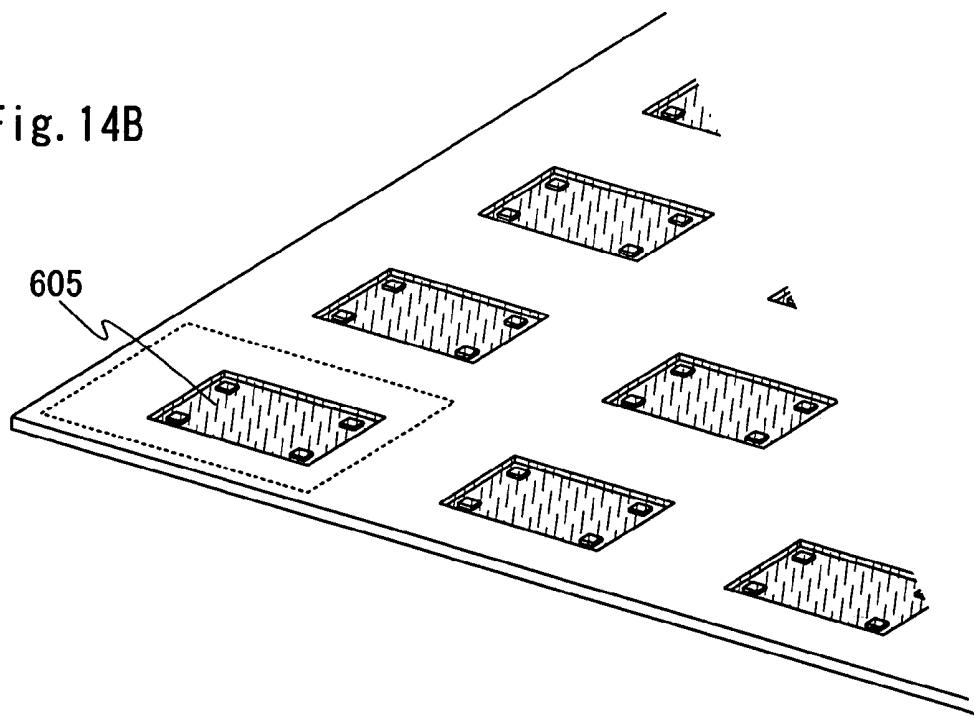


Fig. 14B



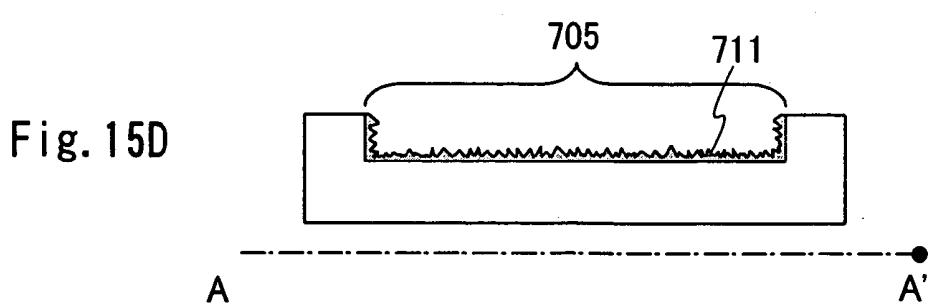
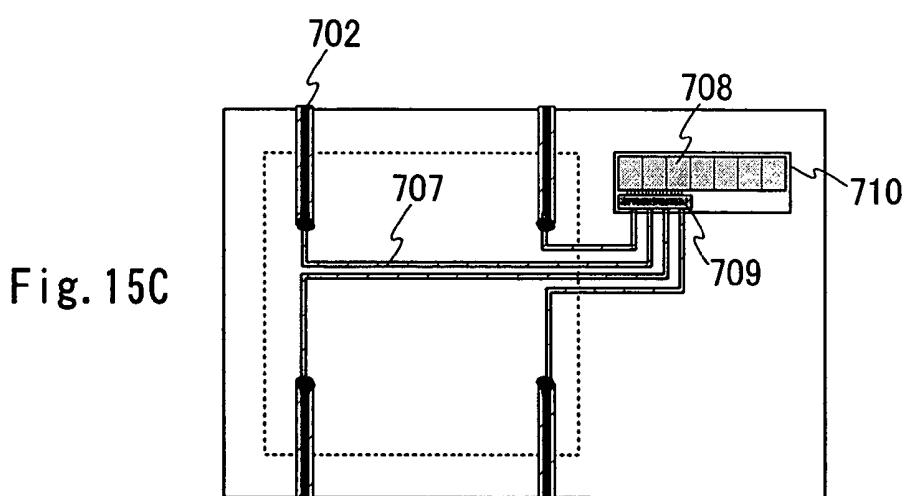
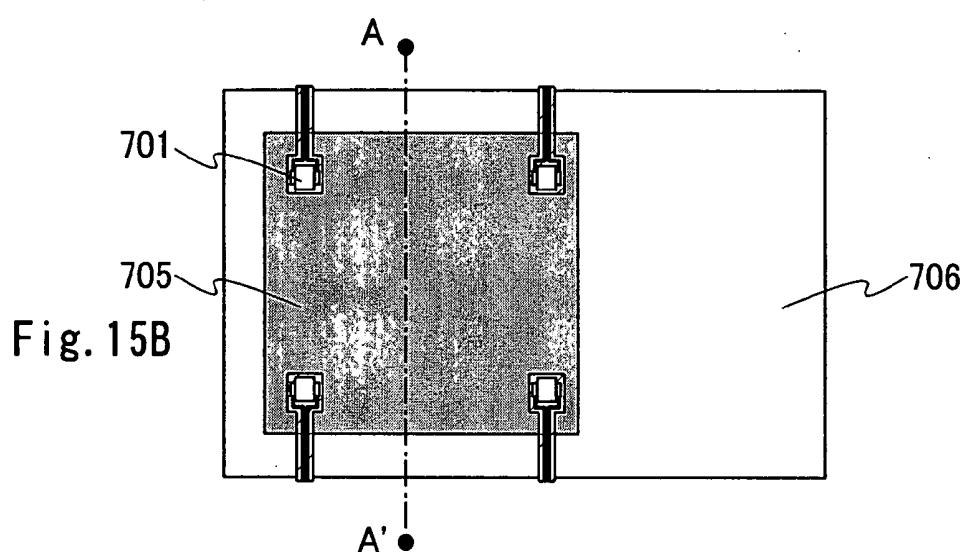
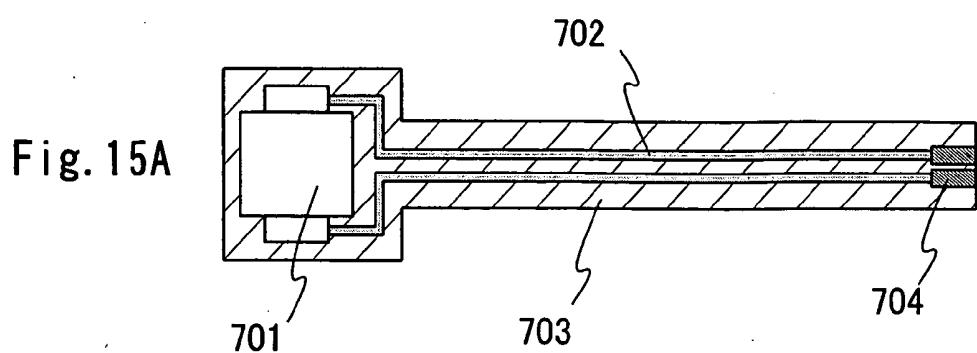


Fig. 16A

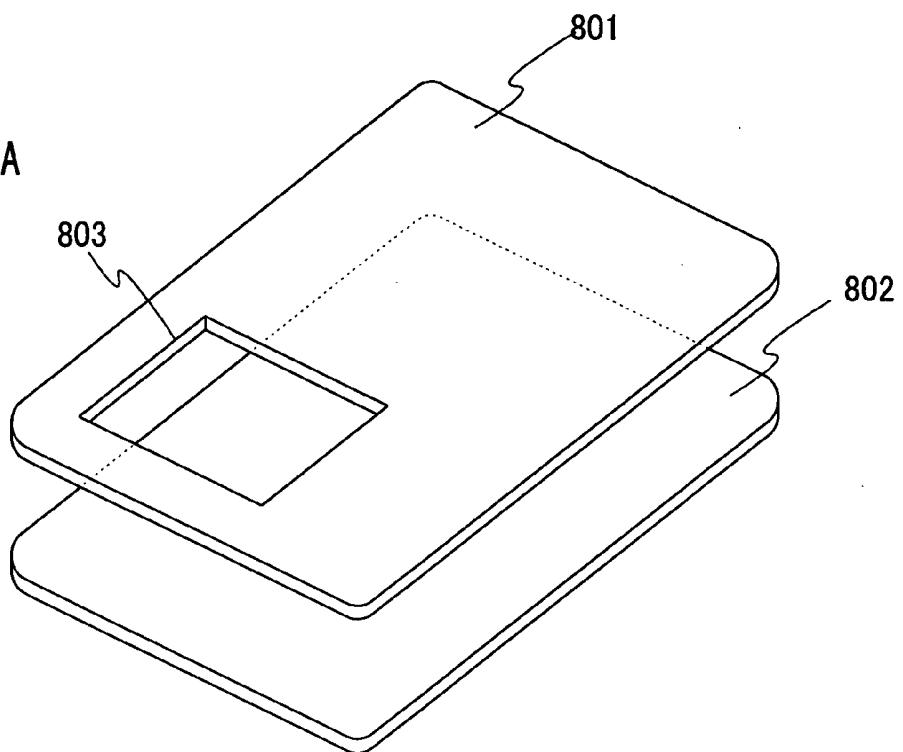


Fig. 16B

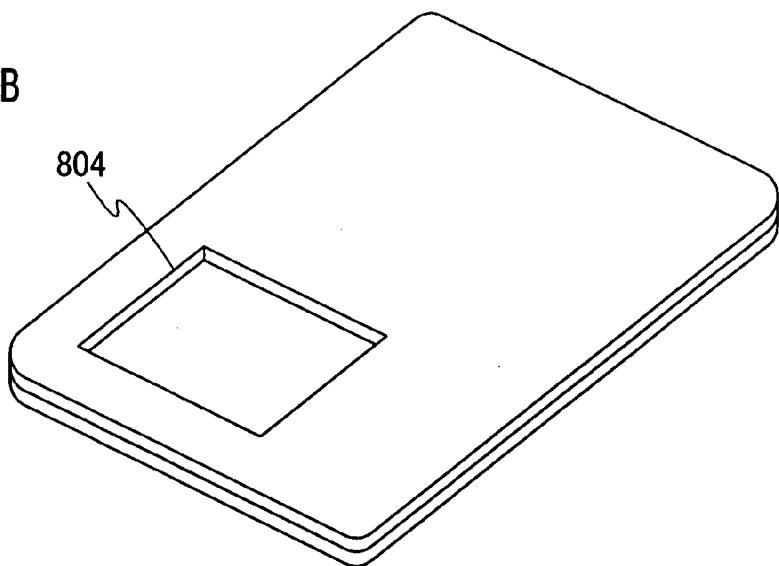


Fig. 17A

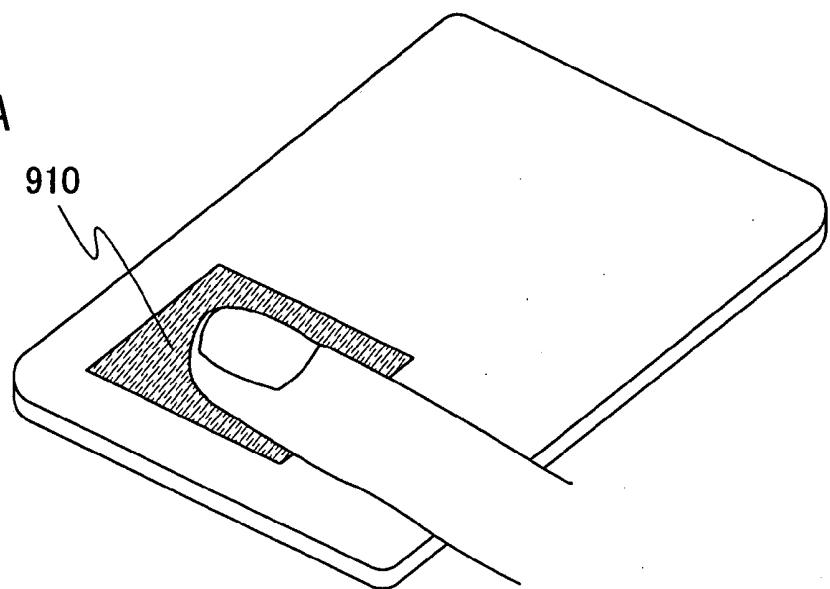
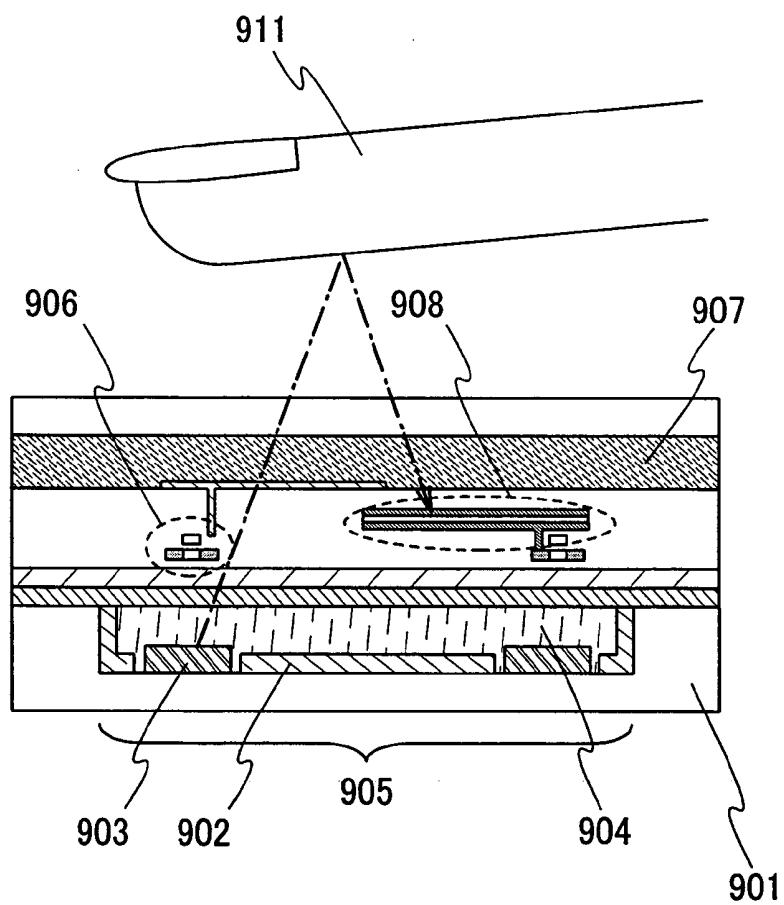


Fig. 17B



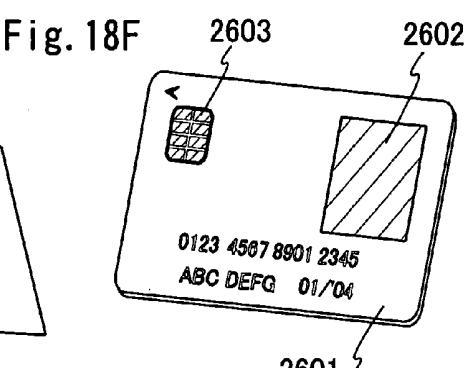
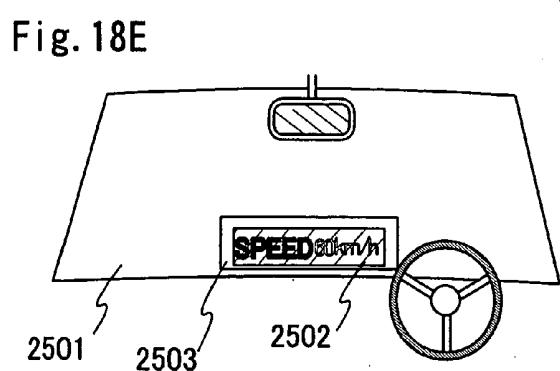
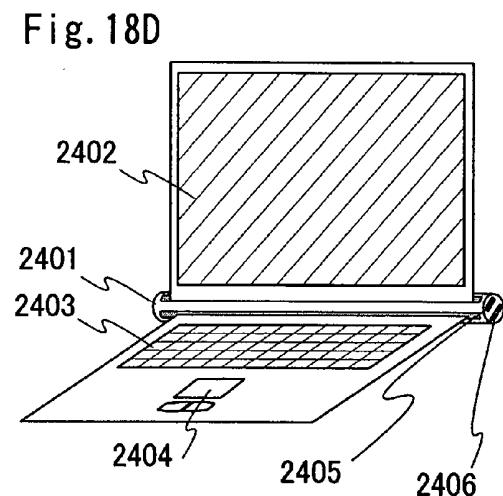
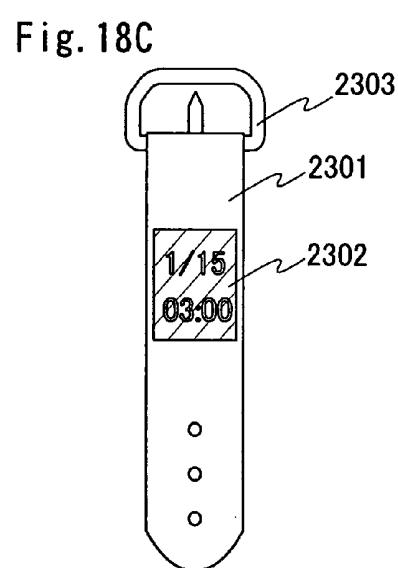
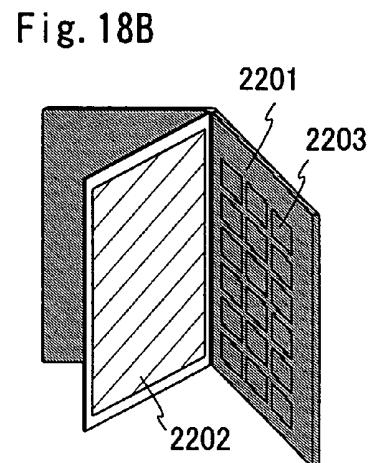
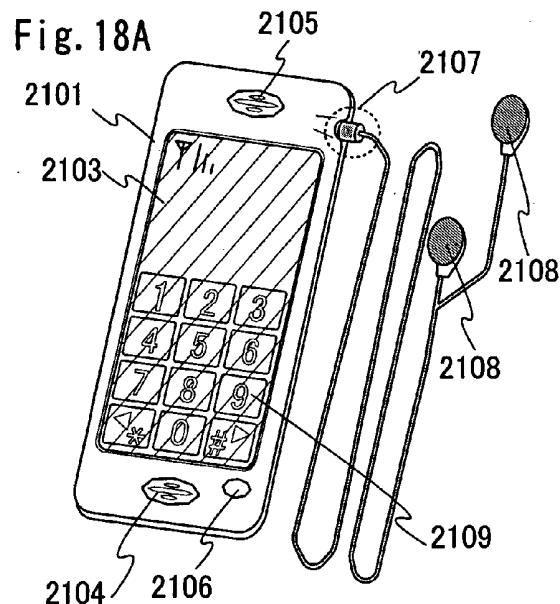




Fig. 19A

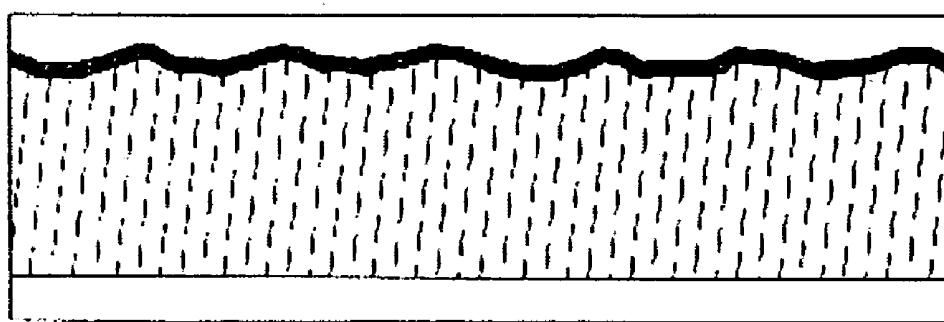


Fig. 19B

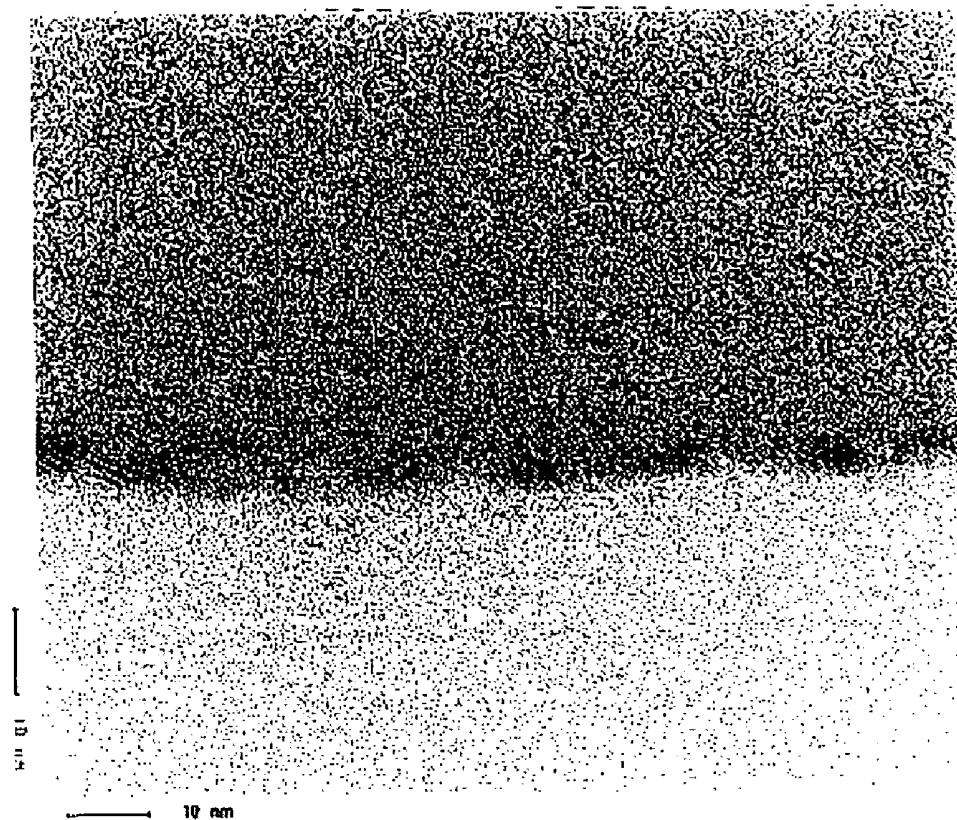


Fig. 20A



Fig. 20B

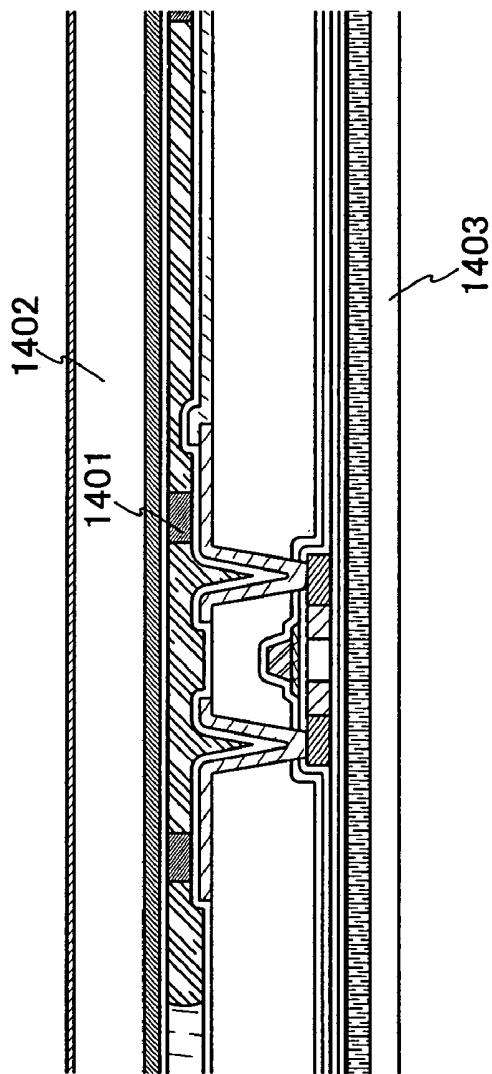


Fig. 21A

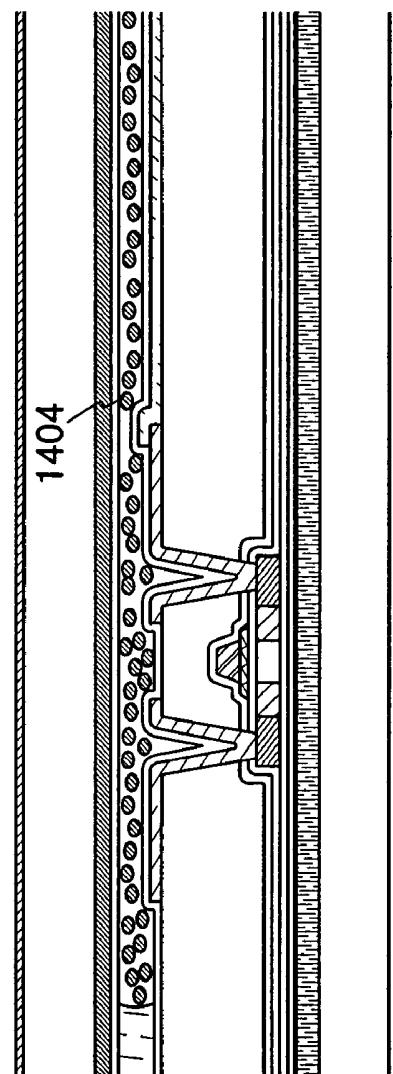


Fig. 21B

LIQUID CRYSTAL DISPLAY DEVICE AND MANUFACTURING METHOD OF LIQUID CRYSTAL DISPLAY DEVICE

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a liquid crystal display apparatus, and more particularly such a transparent liquid crystal display apparatus installed in a portable electronic appliance. Further, the invention relates to a method for manufacturing a liquid crystal display apparatus, and more particularly such a method for manufacturing a transparent liquid crystal display apparatus installed in a portable electronic appliance. Moreover, the invention relates to an electronic appliance using the liquid crystal display apparatus.

[0003] 2. Related Art

[0004] A portable electronic appliance as typified by a portable phone or an electronic book is required to have various functions such as sending and receiving mail, recognizing sound, and capturing an image using a small camera, in addition to a flat panel display for displaying an image. On the other hand, there is still a strong demand by user such as reducing size and weight. Therefore there is a need for installing IC having further large size of circuit or amount of memory as much as possible into limited volume of a portable electronic appliance.

[0005] It is important how to manufacture a flat panel display into thin and light in order to keep space to accommodate IC and to reduce size and weight of a portable electronic appliance. For instance, a liquid crystal display apparatus used relatively a lot for a portable electronic appliance can be in some degree reduced its size and weight by reducing a thickness of a glass substrate used for a panel filled with liquid crystal and by adopting a reflective type liquid crystal display apparatus that needs no light source, an optical waveguide, or the like.

[0006] However, a glass substrate cannot be formed into too thin considering mechanical strength of a panel. For instance, in case of using barium borosilicate glass, alumino borosilicate glass, or the like, thickness limit and weight limit of 3-inch-square is at most from 1 to 2 mm and 10 g, respectively. A reflective type liquid crystal display apparatus utilizing outside light is difficult in recognition of an image in the dark so that an advantage that a portable electronic appliance is not required to be site-specific is not sufficiently utilized.

SUMMARY OF THE INVENTION

[0007] It is an object of the present invention is to sophisticate a portable electronic appliance without hindering reduction of the weight and the size. It is more specific object of the invention is to sophisticate a liquid crystal display apparatus installed in a portable electronic appliance without hindering the mechanical strength.

[0008] A liquid crystal display apparatus according to the invention uses a light-emitting device such as a light-emitting diode (LED) or an electroluminescent device as a light source. The light-emitting device formed over a plastic substrate having flexibility is covered with a resin that is

transparent to light in order to flatten a surface of the light-emitting device. Then, a liquid crystal cell and a semiconductor device for driving the liquid crystal cell are provided over the flattened resin. A light source in a state that a light-emitting device is covered with a resin is referred to as a solid-state light source.

[0009] Generally, a plastic substrate is superior in mechanical strength for vibration and shock by its flexibility so that the thickness can easily be reduced. However, a plastic substrate and a resin often have not enough heat resistance to withstand heat treatment in manufacturing a semiconductor device used for a liquid crystal display apparatus. In view of this, according to the invention, a semiconductor device is formed over a substrate having resistance enough to withstand the heat treatment, and the semiconductor device is moved over a solid-state light source.

[0010] A liquid crystal display apparatus according to the invention is provided with a means of reflecting light generated in a light-emitting device in a direction of a liquid crystal cell. Specifically, light is reflected by pasting a ready-made reflection plate over the plastic substrate or by depositing a metal film (hereinafter, reflection film) over a surface of the plastic substrate by vapor deposition. Further, a polarization plate is provided between a resin covering a light-emitting device, and a semiconductor device and liquid crystal cell.

[0011] Hereinafter, the first method for manufacturing a liquid crystal display apparatus according to the invention will be explained in specific.

[0012] A first substrate that has heat resistance capable of withstanding heat treatment in a process for manufacturing a semiconductor device is prepared. A metal film is formed over the first substrate, and oxidized to form a metal oxide film having an extreme thin film thickness of several nm. Then, an insulating film and a semiconductor film are sequentially stacked over the metal oxide film. The insulating film can be formed into either a single layer or a laminated layer composed of a plurality of films. For instance, silicon nitride, silicon oxynitride, silicon oxide, or the like can be used for the insulating film. A semiconductor device used for a liquid crystal display apparatus is formed by the semiconductor film.

[0013] After the semiconductor device is formed and before completing a liquid crystal cell, a second substrate is pasted onto the first substrate to cover the semiconductor device in such a way that the semiconductor device is sandwiched between the second substrate and the first substrate. The liquid crystal cell includes a pixel electrode, a counter electrode, and liquid crystal disposed between the pixel electrode and the counter electrode. As used herein, the term "before completing a liquid crystal cell" refers to a period between the formation of a pixel electrode of a liquid crystal cell connected electrically to a TFT, which is one of semiconductor devices, and an orientation film covering the pixel electrode, and the paste of a counter substrate provided with a counter electrode.

[0014] A third substrate is pasted for reinforcing rigidity of the first substrate onto an opposite side of the first substrate on which the semiconductor device is formed. The first substrate can be easily separated and the semiconductor

device is hardly damaged when rigidity of the first substrate is stronger than that of the second substrate. In addition, the third substrate is unnecessary to be pasted in case that rigidity of the first substrate is enough to separate the first substrate from the semiconductor device.

[0015] Then, the metal oxide film is crystallized by heat treatment or the like to enhance brittleness of the metal oxide film and to make it easier for the first substrate to be easily separated from the semiconductor device. Subsequently, the first substrate is separated together with the third substrate from the semiconductor device. In addition, the heat treatment to crystallize the first substrate can be carried out before pasting either the third substrate or the second substrate. Alternatively, the heat treatment in a process for forming the semiconductor device can serve as the heat treatment to crystallize the metal oxide film.

[0016] The first substrate may be separated together with the third substrate from the semiconductor device by splitting-off a boundary face of the metal film and the metal oxide film, the boundary face of the insulating film and the metal oxide film, or metal oxide film itself. In any case, the first substrate is separated so as the semiconductor device to attach to the second substrate.

[0017] A plastic substrate at the side of a light source is prepared for being pasted with a semiconductor device. Hereinafter, the plastic substrate is referred to as a device substrate to distinguish from a plastic substrate at the side of a counter electrode used in later. A light-emitting device is provided over the device substrate, and a resin is coated to cover the light-emitting device. Then, a first polarization plate is pasted onto the resin that is flattened.

[0018] Next, by separating the first substrate, the semiconductor device attached to the second substrate is pasted onto the first polarization plate with adhesive or the like. Then, the second substrate is separated to fix the semiconductor device to the device substrate.

[0019] A liquid crystal cell for a liquid crystal apparatus is formed. Specifically, a plastic substrate provided with a counter electrode, a second polarization substrate, or the like (hereinafter, counter substrate) is prepared separately, and pasted onto the semiconductor device, then, a liquid crystal cell is completed. A color filter, an orientation film, a black matrix, and the like may be provided to the counter substrate in addition to the counter electrode and the second polarization plate.

[0020] Hereinafter, a second method for manufacturing a liquid crystal display apparatus according to the invention will be explained.

[0021] A first substrate that has heat resistance capable of withstanding heat treatment in a process for manufacturing a semiconductor device is prepared. A metal film is formed over the first substrate, and oxidized to form a metal oxide film having an extreme thin film thickness of several nm. Then, an insulating film and a semiconductor film are sequentially stacked over the metal oxide film. The insulating film can be either a single layer or a laminated layer having a plurality of films. For instance, silicon nitride, silicon oxynitride, silicon oxide, or the like can be used for the insulating film. A semiconductor device used for a liquid crystal display apparatus is formed by the semiconductor film.

[0022] A liquid crystal cell for a liquid crystal apparatus is formed. The liquid crystal cell includes a pixel electrode, a counter electrode, and liquid crystal disposed between the pixel electrode and the counter electrode. Specifically, a plastic substrate provided with a counter electrode, a second polarization substrate, or the like (hereinafter, counter substrate) is prepared separately, and pasted onto the semiconductor device, then, a liquid crystal cell is completed. A color filter, an orientation film, a black matrix, and the like may be provided to the counter substrate in addition to the counter electrode and the second polarization plate.

[0023] After forming the semiconductor device and the liquid crystal cell, a second substrate is pasted onto the semiconductor device and the liquid crystal cell so as to cover them. Accordingly, the liquid crystal cell is interposed between the first substrate and the second substrate.

[0024] A third substrate is pasted for reinforcing rigidity of the first substrate onto an opposite side of the first substrate on which the semiconductor device and the liquid crystal cell are formed. The first substrate can be easily separated and the semiconductor device and the liquid crystal cell are hardly damaged when rigidity of the first substrate is stronger than that of the second substrate. In addition, the third substrate is unnecessary to be pasted in case that rigidity of the first substrate is enough to be separated from the semiconductor device.

[0025] Then, the metal oxide film is crystallized by heat treatment or the like to enhance brittleness of the metal oxide film and to make it easier for the first substrate to be easily separated from the semiconductor device. Subsequently, the first substrate is separated together with the third substrate from the semiconductor device. In addition, the heat treatment to crystallize the first substrate can be carried out before pasting either the third substrate or the second substrate. Alternatively, the heat treatment in a process for forming a semiconductor device can serve as the heat treatment to crystallize the metal oxide film.

[0026] The first substrate may be separated together with the third substrate from the semiconductor device and the liquid crystal cell by splitting-off a boundary face of the metal film and the metal oxide film, the boundary face of the insulating film and the metal oxide film, or metal oxide film itself. In any case, the first substrate is separated so as the semiconductor device and the liquid crystal cell to attach to the second substrate.

[0027] A plastic substrate at the side of a light source (device substrate) is prepared for being pasted with the semiconductor device and the liquid crystal cell. A light-emitting device is provided over the device substrate, and a resin is coated to cover the light-emitting device. Then, a first polarization plate is pasted onto the resin that is flattened.

[0028] Next, by separating the first substrate, the semiconductor device and the liquid crystal cell attached to the second substrate is pasted onto the first polarization plate with adhesive or the like. Then, the second substrate is separated to fix the semiconductor device to the device substrate. And then, a liquid crystal display apparatus is completed.

[0029] In case that a plurality of liquid crystal display apparatus is formed from one large substrate, the large substrate is diced to divide into the plurality of liquid crystal display apparatus.

[0030] According to the invention, a thickness of a liquid crystal display apparatus can be at least 0.6 mm and at most 1.5 mm.

[0031] As described above, the liquid crystal display apparatus is superior in mechanical strength for shock since the device substrate and the counter substrate have flexibility compared with a glass substrate. Consequently, a thickness of the liquid crystal display apparatus can easily be reduced. Further, the freedom of shape of the liquid crystal display apparatus is increased since the device substrate and the counter substrate have flexibility. Therefore a liquid crystal display apparatus can be formed into a curved shape to be capable of pasting onto a kind of a columned bottle.

[0032] Light generated in the light-emitting device is dispersed by covering the light-emitting device with a resin that is transparent to light to equalize brightness of a pixel portion of a liquid crystal display apparatus. Brightness can be further equalized by providing dispersion plate between a liquid crystal cell and a resin covering a light-emitting device.

[0033] According to the invention, a liquid crystal display apparatus can be drastically formed into thin and reduced its weight without being damaged the mechanical strength by above described structure. Applying a liquid crystal display apparatus according to the invention to an electronic appliance, a space for using IC can be kept large and an electronic appliance can be sophisticated without preventing the electronic appliance from being lightweight and downsized. Especially, a liquid crystal display apparatus according to the present invention is useful for a portable electronic appliance since usability thereof becomes improved by reducing the weight and the size. According to the invention, even when size of a pixel portion of a liquid crystal display apparatus is increased, weight thereof is almost same as that of a liquid crystal display apparatus using a conventional glass substrate.

BRIEF DESCRIPTION OF THE DRAWINGS

[0034] FIGS. 1A to 1D are views showing cross-sectional views of a liquid crystal display apparatus according to the invention;

[0035] FIGS. 2A to 2D are views showing cross-sectional views of a liquid crystal display apparatus according to the invention;

[0036] FIGS. 3A to 3C are explanatory views showing a method for manufacturing a liquid crystal display apparatus according to the invention;

[0037] FIGS. 4A to 4C are explanatory views showing a method for manufacturing a liquid crystal display apparatus according to the invention;

[0038] FIGS. 5A and 5B are explanatory views showing a method for manufacturing a liquid crystal display apparatus according to the invention;

[0039] FIG. 6 is an explanatory view showing a method for manufacturing a liquid crystal display apparatus according to the invention;

[0040] FIGS. 7A to 7C are explanatory views showing a method for manufacturing a liquid crystal display apparatus according to the invention;

[0041] FIGS. 8A and 8B are explanatory views showing a method for manufacturing a liquid crystal display apparatus according to the invention;

[0042] FIGS. 9A and 9B are explanatory views showing a method for manufacturing a liquid crystal display apparatus according to the invention;

[0043] FIG. 10 is an explanatory view showing a method for manufacturing a liquid crystal display apparatus according to the invention;

[0044] FIGS. 11A and 11B are explanatory views showing a method for manufacturing a liquid crystal display apparatus according to the invention;

[0045] FIGS. 12A to 12C are cross-sectional views showing a thin film circuit or an LED driver thin film circuit;

[0046] FIGS. 13A to 13D are cross-sectional views showing an electronic card utilizing a liquid crystal display apparatus according to the invention;

[0047] FIG. 14 is an oblique perspective view showing a large device substrate;

[0048] FIG. 15 is a view showing an LED utilizing an FPC and the state that the LED is pasted onto a device substrate;

[0049] FIGS. 16A and 16B are views showing the structure of a device substrate;

[0050] FIGS. 17A and 17B are an oblique perspective view and a cross-sectional view showing a sensor electronic card, respectively;

[0051] FIGS. 18A to 18F are views showing electronic appliances;

[0052] FIGS. 19A and 19B are cross sections of TEM images of a metal oxide film before separating;

[0053] FIGS. 20A and 20B are cross sections of TEM images of an insulating film after separating; and

[0054] FIGS. 21A and 21B are cross-sectional views showing a liquid crystal display apparatus according to the present invention.

[0055] These and other objects, features and advantages of the present invention will become more apparent upon reading of the following detailed description along with the accompanied drawings.

DETAILED DESCRIPTION OF THE INVENTION

[0056] The structure of a liquid crystal display apparatus according to the present invention will be explained with reference to FIGS. 1A to 1D. FIG. 1A is a cross-sectional view of a device substrate 101 before semiconductor device is pasted to the device substrate. FIG. 1B is a top surface view of the device substrate 101 illustrated in FIG. 1A. FIG. 1A is a cross-sectional view of the device substrate 101 illustrated in FIG. 1B taken along the line A-A'.

[0057] The device substrate 101 illustrated in FIGS. 1A and 1B has a concave portion 102. One or a plurality of LED

103 is provided in the concave portion **102**. The concave portion **102** can be formed by a known means, for example, a mold. The driving of the LED **103** is controlled by a thin film circuit (hereinafter, LED driver thin film circuit) **104** for driving the LED **103**. The LED driver thin film circuit **104** is not always necessary to be provided in the concave portion **102**, that is, the LED driver thin film circuit **104** can be provided except the concave portion **102**. The way of forming the LED driver thin film circuit **104** will be described later.

[0058] Reference numeral **105** denotes a wiring formed over the device substrate **101**. The wiring **105** connects electrically the LED **103** to the LED driver thin film circuit **104**, and also connects electrically the LED driver thin film circuit **104** to a semiconductor device pasted later to an exterior of the liquid crystal display apparatus. The wiring **105** can be formed over the device substrate **101** by a known means such as plating.

[0059] Reference numeral **106** denotes a reflection film that is formed by depositing metals by vapor deposition in the concave portion **102**. To prevent short-circuiting, the reflection film **106** is deposited to be electrically separated from the wiring **105** or the LED **103**. In this embodiment, as a means for reflecting light emitted from the LED **103** in the direction of a liquid crystal cell, a reflection film that is formed by vapor deposition is used, however, a reflection plate that is formed separately may be pasted onto the device substrate **101**. In this case, the reflection plate is preferably pasted onto the position so as to reflect light emitted from the LED **103** in the direction of a liquid crystal cell. For instance, the reflection plate can be provided over surface that is opposing to the LED **103** and that is not provided with the concave portion **102**.

[0060] The LED **103** is covered with a resin **107**. In this embodiment, the resin **107** fills the concave portion **102**. In case that the LED driver thin film circuit **104** is provided in the concave portion **102**, the LED driver thin film circuit **104** is covered with the resin **107**. As the resin **107**, known resin such as acrylic resin, epoxy resin, urethane resin, polycarbonate resin, or vinyl resin can be used. Transparent particles having different refractive index from that of the resin can be dispersed in the resin **107**. For instance, spherical particles can be dispersed in polymethyl methacrylate resin. It is desired that resin be appropriately selected according to the pasting process of a semiconductor device.

[0061] In FIGS. 1A and 1B, reference numeral **108** denotes a light source portion that is provided with the LED **103** and the reflection film **106**, and that is covered with the resin **107**.

[0062] FIG. 1C is a cross-sectional view of the liquid crystal display apparatus according to the invention in which a semiconductor device is pasted and a liquid crystal cell is completed. FIG 1D is a top view of the liquid crystal display apparatus illustrated in FIG. 1C. FIG 1C is a cross-sectional view of FIG. 1D taken along the line of B-B'.

[0063] A semiconductor device **110** is pasted to the resin **107** by an adhesive **109**. Not shown in FIG. 1C, a first polarization plate is provided between the resin **107** and the adhesive **109**. In this embodiment, as shown in FIGS. 1C and 1D, the semiconductor device **110** is not only used to a pixel portion of a liquid crystal display apparatus but also

used to a thin film circuit **111** for driving or signal processing a liquid crystal display apparatus.

[0064] Reference numeral **113** denotes a counter substrate that is encapsulated with liquid crystal **112** by a sealant **114**. The region where the liquid crystal **112** is encapsulated by the counter substrate **113** corresponds to a panel **115**. Light from the light source portion **108** is radiated to a pixel portion **116** provided to the panel **115**. In addition, the thin film circuit **111** is electrically connected to the wiring **105** by wire bonding method, flip chip method, or the like.

[0065] According to this embodiment, signals or power source voltage can be supplied to a liquid crystal display apparatus via the wiring **105**, but not exclusively, signals or power source voltage may be supplied by light using a light-emitting device, a light sensor, or the like, or by electromagnetic induction using an antenna coil.

[0066] As a plastic substrate, ARTON® containing norbornene resin with polar group by JSR Corporation can be used. In addition, a plastic substrate such as polyethylene terephthalate (PET), polyether sulfone (PES), polyethylene naphthalate (PEN), polycarbonate (PC), nylon, polyether ether ketone (PEEK), polysulfone (PSF), polyetherimide (PEI), polyalylate (PAR), polybutylene terephthalate (PBT), or polyimide can be used.

[0067] An example that a concave portion is provided to a device substrate and an LED is provided in the concave portion is explained in this embodiment, however, the invention is not limited thereto. A flat plastic substrate without concave portion can be used as the device substrate.

[0068] A structure of the liquid crystal display apparatus that utilizes a flat plastic substrate as a device substrate will be explained with reference to FIGS. 2A to 2D. FIG. 2A is a cross-sectional view of a device substrate in which a semiconductor device has not pasted yet. The device substrate **201** is flat and not provided with a concave portion. FIG. 2B is a top view of the device substrate **201** illustrated in FIG. 2A. FIG. 2A is a cross-sectional view of FIG. 2B taken along the line A-A'.

[0069] One or a plurality of LED **203** is provided over the device substrate **201** illustrated in FIGS. 2A and 2B. Reference numeral **204** denotes an LED driver thin film circuit. The LED driver thin film circuit **204** is electrically connected to the LED **203** by a wiring **205**. The wiring **205** is used for electrically connecting the LED driver thin film circuit **204** or a semiconductor device, which is formed later, to exterior of the liquid crystal display apparatus. To prevent short-circuiting, a reflection film **206** is deposited to be separated from the wiring **205** and the LED **203**. A reflection film that is formed separately can be used instead of that formed by vapor deposition.

[0070] The LED **203** is covered with a resin **207**. In this embodiment, a photosensitive resin is coated and partly exposed, then, the resin **207** is coated in order to expose a part of the wiring **205**. The LED driver thin film circuit **204** may also be covered with the resin **207**. In FIGS. 2A and 2B, reference numeral **208** denotes a light source portion that is provided with the LED **203** and the reflection film **206**, and that is covered with the resin **207**.

[0071] FIG. 2C is a cross-sectional view of a liquid crystal display apparatus according to the invention in which a

semiconductor device is pasted and a liquid crystal cell is completed. **FIG. 2D** is a top view of the liquid crystal display apparatus illustrated in **FIG. 2C**. **FIG. 2C** is a cross-sectional view of **FIG. 2D** taken along the line of B-B'.

[0072] A semiconductor device **210** is pasted onto the resin **207** by an adhesive **209**. Not shown in **FIG. 2C**, a first polarization plate is provided between the resin **207** and the adhesive **209**. In addition, reference numeral **211** corresponds to a thin film circuit formed using the semiconductor device **210**.

[0073] Reference numeral **213** denotes a counter substrate that is encapsulated with liquid crystal **212** by a sealant **214**. The region where the liquid crystal **212** is encapsulated by the counter substrate **213** corresponds to a panel **215**. Light from the light source portion **208** is radiated to a pixel portion **216** provided with the panel **215**. In addition, the thin film circuit **211** is electrically connected to the wiring **205** by wire bonding method, flip chip method, or the like.

[0074] The concave portion of the device substrate allows the LED to be covered with a resin while wiring is exposed by only dropping a resin into the concave portion. Further, a reflection film in the concave portion allows light emitted from LED to radiate effectively to the pixel portion. In case that the concave portion is not provided, the intensity of the device substrate can be further increased compared with the case that the concave portion is provided.

[0075] Then, a specific method for manufacturing a semiconductor device used for the thin film circuit and the liquid crystal display apparatus and a way of pasting the semiconductor device onto the device substrate will be explained hereinafter. In this embodiment, though two TFTs are exemplified as the semiconductor device, the semiconductor device included in a thin film circuit and a liquid crystal display apparatus is not limited to the two TFTs, any circuit device can be used. A memory device, a diode, a photoelectric conversion device, a resistive element, a coil, a capacitance element, an inductor, or the like can be typically given as examples for the semiconductor device, in addition to TFTs.

[0076] As shown in **FIG. 3A**, a metal film **501** is deposited over a first substrate **500** by sputtering. Here, tungsten is used for forming the metal film **501** and formed to have a thickness of from 10 to 200 nm, preferably, from 50 to 75 nm. In this embodiment, the metal film **501** is deposited directly on the first substrate **500**, but the metal film **501** may also be deposited after covering the first substrate **500** by an insulating film such as silicon oxide, silicon nitride, silicon oxynitride, or the like.

[0077] An oxide film **502** is deposited to be stacked after depositing the metal film **501** without exposing to the air. A silicon oxide film is deposited to have a thickness of from 150 to 300 nm as the oxide film **502**. In case of depositing by sputtering, a film is deposited over the edge of the first substrate **500**. Hence, the metal film **501** and the oxide film **502** are preferably removed selectively by O₂ ashing and the edge of the first substrate **500** is preferably cut by dicing to prevent the oxide film **502** from remaining over the first substrate **500** in separating in a later process.

[0078] In depositing the oxide film **502**, pre-sputtering, that is, plasma is generated by shielding between a target and a substrate with shutter, is carried out as a preliminary step

toward sputtering. The first substrate **500** is pre-sputtered under the equilibrium state, that is, Ar flow rate used is 10 sccm; O₂, 30 sccm; substrate temperature, 270° C.; and deposition power, 3 kW. A metal oxide film **503** is deposited having an ultra thin thickness of several nm (here, 3 nm) between the metal film **501** and the oxide film **502** by the pre-sputtering. The metal oxide film **503** is formed by oxidization of the metal film **501**. Hence, the metal oxide film **503** is formed of tungsten oxide.

[0079] The metal oxide film **503** is, but not exclusively, deposited by pre-sputtering in this embodiment. For example, the metal oxide film **503** may be deposited by oxidizing deliberately the surface of the metal film **501** in plasma using oxygen or oxygen added with inert gases such as Ar or the like.

[0080] After depositing the oxide film **502**, a base film **504** is deposited by plasma chemical vapor deposition (hereinafter, PCVD). Here, a silicon oxynitride film is deposited to have a thickness approximately of 100 nm as the base film **504**. After depositing the base film **504**, a semiconductor film **505** is deposited without exposing to the atmosphere. The semiconductor film **505** is formed to have a thickness of from 25 to 100 nm, preferably, from 30 to 60 nm. The semiconductor film **505** may be either an amorphous semiconductor or a polycrystalline semiconductor. The semiconductor film may be formed by not only silicon but also silicon germanium. In case of using silicon germanium, the concentration of germanium is preferably approximately from 0.01 to 4.5 atomic %.

[0081] As shown in **FIG. 3B**, the semiconductor film **505** is crystallized by a known technique. As the known technique, thermal crystallization using an electric heating furnace, laser crystallization using a laser light, and ramp annealing crystallization using an infrared light. Alternatively, crystallization using catalytic elements can be used according to the technique disclosed in Unexamined Patent Publication No. 7-130652.

[0082] The semiconductor film **505** that is a polycrystalline semiconductor film may be formed in advance by sputtering, PCVD, or thermal CVD.

[0083] The semiconductor film **505** is crystallized by laser crystallization in this embodiment. A crystal having a large grain diameter can be obtained by laser light irradiation of from a second harmonic to a fourth harmonic of a fundamental wave by using a solid laser capable of continuously oscillating. Typically, a second harmonic (532 nm) or a third harmonic (355 nm) of Nd: YVO₄ laser (fundamental wave of 1064 nm) may be applied. When a continuously oscillating laser is used, a laser light emitted from the continuously oscillating YVO₄ laser having an output power of 10 W is converted to a harmonic by a nonlinear optical device. There is also a method in which a harmonic is outputted by using nonlinear optical device. Preferably, the laser light is formed by using an optical system such that it becomes in a rectangular shape or an elliptical shape on an irradiating face and radiated to the semiconductor film **505**. The laser irradiation is carried at energy density of approximately from 0.01 to 100 MW/cm² (preferably from 0.1 to 10 MW/cm²) and a scanning speed of approximately from 10 to 2000 cm/s.

[0084] The laser crystallization may be carried out by radiating a continuous wave laser light of fundamental wave

and a continuous wave laser light of harmonic wave, or radiating a continuous wave laser light of fundamental wave and a pulsed laser light of harmonics.

[0085] A laser light may be radiated in an inert gas atmosphere such as rare gas or nitride. According to this, the surface roughness of a semiconductor due to a laser irradiation, further, the variations of a threshold value due to the variations of interface state density can be prevented.

[0086] A semiconductor film 506 that is enhanced its degree of crystallinity is formed by irradiating the above described semiconductor film 505 with a laser light. Next, as shown in FIG. 3C, the semiconductor film 506 is patterned to form island like semiconductor films 507, 508. Various semiconductor devices as typified by TFTs are formed using the island like semiconductor films 507, 508. In this embodiment, the base film 504 and the island like semiconductor films 507, 508 are in contact with each other, but an electrode, an insulating film, or the like may be formed between the base film 504 and the island like semiconductor films 507, 508 depending on a semiconductor device. For example, in case of a bottom gate type TFT that is one of the semiconductor devices, a gate electrode and a gate insulating film are formed between the base film 504 and the island like semiconductor films 507, 508.

[0087] In this embodiment, top gate type TFTs 509 and 510 are formed using the island like semiconductor films 507, 508 (FIG. 3D). Specifically, a gate insulating film 511 is deposited so as to cover the island like semiconductor films 507, 508. Then, a conductive film is deposited over the gate insulating film 511 and patterned, and gate electrodes 512, 513 are formed. Next, impurities imparting n-type are added to the island like semiconductor films 507, 508 using the gate electrodes 512, 513 or resist that is deposited and patterned as masks to form a source region, a drain region, and an LDD (Lightly Doped Drain) region. Here, TFTs 509, 510 are n-type, in case of using p-type TFTs, impurities imparting p-type are added.

[0088] According to the above described process, TFTs 509, 510 can be formed. A method for manufacturing the TFTs is not limited to the above described process.

[0089] A first interlayer insulating film 514 is fabricated so as to cover the TFTs 509, 510. Contact holes are formed at the gate insulating film 511 and the first interlayer insulating film 514, and terminals 515 to 518 connected to the TFTs 509, 510 via the contact holes are formed so as to be in contact with the first interlayer insulating film 514.

[0090] A pixel electrode 540 of a liquid crystal cell is formed by a transparent conductive film such as ITO so as to be in contact with the terminal 515. Then, an orientation film 541 is formed to cover the pixel electrode 540, and rubbing treatment is carried out to the orientation film 541. A part of the terminal 518 is exposed by etching or the like so as not to be covered by the orientation film 541.

[0091] A protective layer 521 is formed over the orientation film 541. As a material for forming the protective layer 521, a material which can protect the surface of the TFTs 509, 510, the orientation film 541, and terminals 515 to 518 in pasting or separating the second substrate in a later process, and which can be removed after separating a second substrate is used. For example, the protective film 521 can

be formed by coating resin of epoxy series, acrylate series, or silicon series that is soluble in water over the whole surface, and baking.

[0092] In this embodiment, a water-soluble resin (TOA-GOSEI Co., Ltd.: VL-WSHL10) is spin-coated to have a thickness of 30 μm , and exposed for two minutes to be partially cured, then, exposed its back with UV rays for 2.5 minutes, and then, exposed its surface for 10 minutes, that is, 12.5 minutes in total, to be fully cured. Consequently, the protective layer 521 is formed (FIG. 3E).

[0093] Though an example that the protective layer 521 is formed after the orientation film 541 is formed is explained in this embodiment, the orientation film 541 may be formed after removing the protective layer 521 in a later process. However, in case of stacking a plurality of organic resins, there is a threat of melting the stacked organic resin depending on the solvent in coating or baking, or increasing excessively its density. In case of forming the protective layer 521 after forming the orientation film 541, each of which is formed by organic resin soluble in the same etchant, an inorganic insulating film (a SiN_x film, a SiN_xO_y film, an AlN_x film, or an AlN_xO_y film) is preferably formed so as to cover the first interlayer insulating film 514, and be disposed between the first interlayer insulating film 514 and the terminals 515 to 518 for removing smoothly the protective film 521 in a later process.

[0094] For separating smoothly in a later process, the metal oxide film 503 is crystallized. By this crystallization, the metal oxide film 503 becomes susceptible to fracture in grain boundary and enhanced its brittleness. The crystallization is carried out by heat-treating for approximately at from 420 to 550° C. for 0.5 to 5 hours.

[0095] Then, some treatments are carried out on the metal oxide film 503 in order to make it easier for the metal oxide film 503 to be separated by weakening partly the adhesiveness between the metal oxide film 503 and the oxide film 502 or the adhesiveness between the metal oxide film 503 and the metal film 501. Specifically, the periphery of the region that is to be separated is locally pressed from outside to be damaged a part of the inside or the boundary face-neighborhood of the oxide film 503. Specifically, a hard needle such as a diamond pen is attached perpendicular to the edge-neighborhood of the metal oxide film 503 and moved along with the metal oxide film 503 with applying loading. Preferably, a scribe device can be used to move with applying loading on the region with press force ranging from 0.1 to 2 mm. It is important to carry out some treatment for easy separating, that is, it is important to prepare for separating process. Such preparatory process to weaken selectively the adhesiveness will prevent poor separating and improve the process yield.

[0096] Next, a second substrate 523 is pasted onto the protective film 521 with a two-sided tape 522, and a third substrate 525 is pasted over the first substrate 500 with a two-sided tape 524 (FIG. 4A). An adhesive can be used instead of a two-sided tape. For example, it is possible to reduce the load of a semiconductor device, which becomes increased by separating the second substrate, by using an adhesive that is melted with UV light.

[0097] The third substrate 525 prevents the first substrate 500 from being damaged in a later process for separating.

For the second substrate **523** and the third substrate **525**, the substrate that has higher rigidity than that of the first substrate **500**, for example, a quartz substrate or a semiconductor substrate is preferably to be used.

[0098] Then, the metal film **501** is separated from the oxide film **502** by a physical means. The separation of metal film **501** is started from the region that is partly weakened its adhesiveness to the metal film **501** or the oxide film **502** in the previous process.

[0099] The metal film **501** may be removed by separating the metal film **501** from metal oxide film **503**, by separating the oxide film **502** from the metal oxide film **503**, or splitting the metal oxide film **503** into two. Further, the second substrate **523** to which semiconductor devices (here, TFTs **509**, **510**) are pasted is separated from the third substrate **525** to which the first substrate **500** and the metal film **501** are pasted. The separation can be carried out with comparatively small force (for example, man's hand, air pressure of gas sprayed from a nozzle, ultrasonic waves, or the like). FIG. 4B shows a state of after separating.

[0100] A first polarization plate **527** provided over a resin **533** is bonded to the oxide layer **502** that is partly attached with the metal oxide film **503** with an adhesive **526** (FIG. 4C). At this time, it is important that the material for the adhesive **526** is selected in order that the adhesiveness between the oxide layer **502** and the first polarization plate **527** by the adhesive **526** to be stronger than that between the second substrate **523** and the protective layer **521** by the two-sided tape **522**.

[0101] If the metal oxide film **503** is remained over the surface of the oxide film **502**, the adhesiveness of the polarization plate **527** may get worse, so that the remained metal oxide film may be completely removed before bonding to the oxide film **502**.

[0102] In case of using the semiconductor devices **509**, **510** are used for the thin film circuit, the semiconductor devices **509**, **510** are unnecessary to be pasted to overlap with the first polarization plate **527**.

[0103] As the adhesive **526**, various curing adhesives such as a photo-curing adhesive, for example, a reaction-curing adhesive, a thermal-curing adhesive, or a UV-curing adhesive, or an anaerobic adhesive can be used. More preferably, the adhesive **526** is given high thermal conductivity by means of mixing powder comprising silver, nickel, aluminum, or aluminum nitride, or filler.

[0104] In addition, reference numeral **530** denotes a wiring formed over the device substrate **534**. The wiring **530** is formed by coating copper with solder, gold, or tin.

[0105] As shown in FIG 5A, the two-sided tape **522** and the second substrate **523** are separated sequentially or simultaneously from the protective layer **521**. The two-sided tape **522** can be separated simultaneously with curing the adhesive **526** by using UV-curing adhesive as the adhesive **526**, and by using a tape or adhesive that is separated by UV light as the two-sided tape **522**.

[0106] As shown in FIG 5B, the protective film **521** is removed by water since the protective film **521** is formed by a resin that is soluble in water. In case that the remained protective film **521** causes deterioration, the remained pro-

tective film **521** is preferably removed by carrying out cleaning treatment or O₂ plasma treatment to the surface.

[0107] In this embodiment, tungsten is used for a material of the metal film **501**, however, the present invention is not limited thereto. Any material can be used as long as which includes metals that allows a substrate to be separated by forming the metal oxide film **503** over the surface of the material and crystallizing the metal oxide film **503**. For instance, TiN, WN, Mo, or the like can be used in addition to tungsten. In case of using these alloys as the metal film, the optimal temperature for heat treatment to crystallize differs depending on the composition ratio of the metal film. On the basis of the fact, the heat treatment can be carried out at the temperature that has no adverse effects on the manufacturing process for a semiconductor device, and selection ranges of the manufacturing process become difficult to be restricted by adjusting the composition ratio of the metal film.

[0108] A liquid crystal cell is formed as illustrated in FIG. 6.

[0109] After the protective layer **521** is formed, a counter substrate **542** that is formed separately is pasted with sealant **543**. Filler may be mixed into the sealant. The counter substrate **542** has a thickness of approximately several hundreds μm , and is provided with a counter electrode **543** formed by a transparent conductive film and an orientation film **544** that is rubbing treated. In addition, a color filter and a black matrix (a shielding film) to prevent disclination may be formed. Further, a second polarization plate **545** is pasted onto the opposite side of the counter electrode **543** on which the counter substrate **542** is formed.

[0110] Then, liquid crystal **546** is injected and encapsulated to complete a panel **550**. In addition, the way of injecting liquid crystal may be dispenser method or dip method. A spacer may be provided between the pixel electrode **540** and the counter electrode **543** for keeping cell gaps. The liquid crystal display apparatus is completed by connecting electrically the terminal **518** to the wiring **530** provided with the device substrate **534** by wire bonding method.

[0111] Then, a method for manufacturing a liquid crystal display apparatus according to the invention, which is different from that illustrated in FIGS. 3 to 6, will be explained. In this embodiment, though a TFT is exemplified as the semiconductor device, the semiconductor device included in a thin film circuit and a liquid crystal display apparatus is not limited to the TFT, any circuit device can be used. For example, a memory device, a diode, a photoelectric conversion device, a resistive element, a coil, a capacitance element, an inductor, or the like can be typically given, in addition to TFTs.

[0112] As shown in FIG. 7A, a metal film **1501** is deposited over a first substrate **1500** by sputtering. Here, tungsten is used for forming the metal film **1501** and formed to have a thickness of from 10 to 200 nm, preferably, from 50 to 75 nm. In this embodiment, the metal film **1501** is deposited directly on the first substrate **1500**, but the metal film **1501** may also be deposited after covering the first substrate **1500** by an insulating film such as silicon oxide, silicon nitride, silicon oxynitride, or the like.

[0113] An oxide film **1502** composing the insulating film is deposited to be stacked after depositing the metal film

1501 without exposing to the air. A silicon oxide film is deposited to have a thickness of from 150 to 300 nm as the oxide film **1502**. In case of depositing by sputtering, a film is deposited over the edge of the first substrate **1500**. Hence, the metal film **1501** and the oxide film **1502** are preferably removed selectively by O₂ ashing to prevent the oxide film **1502** from remaining over the first substrate **1500** in separating in a later process.

[0114] In depositing oxide film **1502**, pre-sputtering, that is, plasma is generated by shielding between a target and a substrate with shutter, is carried out as a preliminary step toward sputtering. The first substrate **1500** is pre-sputtered under the equilibrium state, that is, Ar flow rate used is 10 sccm; O₂, 30 sccm; substrate temperature, 270° C.; and deposition power, 3 kW. A metal oxide film **1503** is deposited having an ultra thin thickness of several nm (here, 3 nm) between the metal film **1501** and the oxide film **1502** by the pre-sputtering. The metal oxide film **1503** is formed by oxidization of the metal film **1501**. Hence, the metal oxide film **1503** is formed of tungsten oxide.

[0115] The metal oxide film **1503** is, but not exclusively, deposited by pre-sputtering in this embodiment. For example, the metal oxide film **1503** may be deposited by oxidizing deliberately the surface of the metal film **1501** in plasma using oxygen or oxygen added with inert gases such as Ar or the like.

[0116] After depositing the oxide film **1502**, a base film **1504** composing the insulating film is deposited by PCVD. Here, a silicon oxynitride film is deposited to have a thickness of approximately 100 nm as the base film **1504**. After depositing the base film **1504**, a semiconductor film **1505** is deposited without exposing to the atmosphere. The semiconductor film **1505** is formed to have a thickness of from 25 to 100 nm, preferably, from 30 to 60 nm. The semiconductor film **1505** may be either an amorphous semiconductor or a polycrystalline semiconductor. The semiconductor film may be formed by not only silicon but also silicon germanium. In case of using silicon germanium, the concentration of germanium is preferably approximately from 0.01 to 4.5 atomic %.

[0117] Next, the semiconductor film **1505** is crystallized by a known technique. As the known technique, thermal crystallization using an electric heating furnace, laser crystallization using a laser light, and ramp annealing crystallization using an infrared light. Alternatively, crystallization using catalytic elements can be used according to the technique disclosed in Unexamined Patent Publication No. 7-130652.

[0118] The semiconductor film **1505** is crystallized by laser crystallization in this embodiment. Before the laser crystallization, the semiconductor film is thermal-annealed at 500° C. for 1 hour to increase resistance of the semiconductor film to laser. In this embodiment, the heat treatment enhances the brittleness of the metal oxide film **1503** to make it easier for the first substrate **1500** to be separated later. By this crystallization, the metal oxide film **1503** becomes susceptible to fracture in grain boundary and enhanced its brittleness. The crystallization of the metal oxide film **1503** is preferably carried out by heat-treating for approximately at from 420 to 550° C. from 0.5 to 5 hours.

[0119] A crystal having a large grain diameter can be obtained by laser light irradiation of from a second harmonic

to a fourth harmonic of a fundamental wave by using a solid laser capable of continuously oscillating. Typically, a second harmonic (532 nm) or a third harmonic (355 nm) of Nd: YVO₄ laser (fundamental wave of 1064 nm) may be applied. When a continuously oscillating laser is used, a laser light emitted from the continuously oscillating YVO₄ laser having an output power of 10 W is converted to a harmonic by a nonlinear optical device. There is also a method in which a harmonic is outputted by using a nonlinear optical device. Preferably, the laser light is formed by using an optical system such that it becomes in a rectangular shape or an elliptical shape when radiated to an irradiating face, and radiated to the semiconductor film **1505**. On this occasion, an energy density of approximately from 0.01 to 100 MW/cm² (preferably from 0.1 to 10 MW/cm²) is necessary and a semiconductor film may be irradiated with the laser light while it is moved relatively thereto at a speed of approximately from 10 to 2000 cm/s.

[0120] The laser crystallization may be carried out by radiating a continuous wave laser light of fundamental wave and a continuous wave laser light of harmonic wave, or radiating a continuous wave laser light of fundamental wave and a pulsed laser light of harmonics.

[0121] A laser light may be radiated in the inert gas atmosphere such as rare gas or nitride. According to this, the surface roughness of a semiconductor due to a laser irradiation, further, the variations of a threshold value due to the variations of interface state density can be prevented.

[0122] The crystallinity of the semiconductor film **1505** is further enhanced by the above described crystallization. The semiconductor film **1505** that is a polycrystalline semiconductor film may be formed in advance by sputtering, PCVD, thermal CVD, or the like.

[0123] Next, as shown in FIG. 7B, the semiconductor film **1505** is patterned to form island like semiconductor films **1507**, **1508**. Various semiconductor devices as typified by TFTs are formed using the island like semiconductor films **1507**, **1508**. In this embodiment, the base film **1504** and the island like semiconductor films **1507**, **1508** are in contact with each other, but an electrode, an insulating film, or the like may be formed between the base film **1504** and the island like semiconductor films **1507**, **1508** depending on a semiconductor device. For example, in case of a bottom gate type TFT that is one of the semiconductor devices, a gate electrode and a gate insulating film are formed between the base film **1504** and the island like semiconductor films **1507**, **1508**.

[0124] In this embodiment, top gate type TFTs **1509**, **1510** are formed using the island like semiconductor films **1507**, **1508** (FIG. 7C). Specifically, a gate insulating film **1511** is deposited so as to cover the island like semiconductor films **1507**, **1508**. Then, a conductive film is deposited over the gate insulating film **1511** and patterned, and then, gate electrodes **1512**, **1513** are formed. Next, impurities imparting n-type are added to the gate electrodes **1507**, **1508** using the gate electrodes **1512**, **1513** or resist that is deposited and patterned as masks to form a source region, a drain region, and an LDD (Lightly Doped Drain) region. Here, TFTs **1509**, **1510** are n-type, but impurities imparting p-type are added in case of using p-type TFTs.

[0125] According to the above described process, TFTs **1509**, **1510** can be formed. A method for manufacturing the TFTs is not limited to the above described process.

[0126] A first interlayer insulating film 1514 is fabricated so as to cover the TFTs 1509, 1510. Contact holes are formed in the gate insulating film 1511 and the first interlayer insulating film 1514, and terminals 1515 to 1518 connected to the TFTs 1509, 1510 via the contact holes are formed so as to be in contact with the first interlayer insulating film 1514.

[0127] The TFT 1510 used as a switching element of the pixel portion of the liquid crystal display apparatus is electrically connected to the terminal 1518. A pixel electrode of a liquid crystal cell is formed by transparent conductive film such as ITO so as to connect to the terminal 1518. A spacer 1519 is formed by using an insulating film. Then, an orientation film 1520 is formed to cover the pixel electrode 1550, the terminal 1518, and the spacer 1519, and rubbing treatment is carried out thereto. In addition, the orientation film 1520 may be formed to overlap with the thin film circuit.

[0128] Then, a sealant 1521 is formed to encapsulate liquid crystal. As shown in FIG. 8A, liquid crystal 1522 is dropped in the region encircled by the sealant 1521. A counter substrate 1523 that is formed separately is pasted with sealant 1521. FIG. 8B is a view showing a state after the counter substrate 1523 is pasted. Filler may be mixed into the sealant 1521. The counter substrate 1523 has a thickness of approximately several hundreds μm , and is provided with a counter electrode 1524 formed by a transparent conductive film and an orientation film 1526 that is rubbing treated. In addition, a color filter and a black matrix (a shielding film) to prevent disclination may be formed. Further, a second polarization plate 1527 is pasted onto the opposite side of the counter electrode 1524 on which the counter substrate 1523 is formed.

[0129] The region where the counter electrode 1524, the liquid crystal 1522, and the pixel electrode 1550 are overlapped each other corresponds to a liquid crystal cell 1528. When the liquid crystal cell 1528 is completed, a panel 1529 is also completed. In addition, though a thin film circuit 1530 is not overlapped with the counter substrate 1523, the thin film circuit 1530 may dare to be overlapped with the counter substrate 1523. In this case, a resin may be filled between the counter substrate and the thin film circuit to increase mechanical strength of a liquid crystal display apparatus.

[0130] In this embodiment, the liquid crystal is encapsulated by dispenser method (dropping method) though, the invention is not limited thereto. The liquid crystal may be encapsulated by dipping method (pumping method) utilizing capillary phenomenon after pasting the counter substrate onto the liquid crystal.

[0131] Next, as shown in FIG. 9A, a protective film 1531 is formed to cover the thin film circuit 1530 and the panel 1529. The protective layer 1531 is formed by a material that can protect the thin film circuit 1530 and the panel 1529 in pasting or separating a second substrate 1533 later, and that can be removed after separating the second substrate 1533. For example, the protective film 1531 can be formed by coating resin of epoxy series, acrylate series, or silicon series that is soluble in water over the whole surface.

[0132] In this embodiment, a water-soluble resin (TOA-GOSEI Co., Ltd.: VL-WHSL10) is spin-coated to have a thickness of 30 μm , and exposed for two minutes to be

partially cured, then, exposed its back with UV rays for 2.5 minutes, and then, exposed its surface for 10 minutes to be fully cured. Consequently, the protective layer 1531 is formed.

[0133] In case of stacking a plurality of organic resins, there is a threat of melting the stacked organic resin depending on the solvent in coating or baking, or increasing excessively its density. In case of forming simultaneously both the first interlayer insulating film 1514 and the protective layer 1531, each of which is formed by organic resin soluble in the same etchant, an inorganic insulating film (a SiN_x film, a SiN_xO_y film, an AlN_x film, or an AlN_xO_y film) is preferably formed so as to cover the first interlayer insulating film 1514.

[0134] Then, some treatments are carried out on the metal oxide film 1503 in order to make it easier for the metal oxide film 1503 to be separated by weakening partly the adhesiveness between the metal oxide film 1503 and the oxide film 1502 or the adhesiveness between the metal oxide film 1503 and the metal film 1501. Specifically, the periphery of the region that is to be separated is locally pressed from outside to damage a part of the inside or the boundary face-neighborhood of the oxide film 1503. Specifically, a hard needle such as a diamond pen is attached perpendicular to the edge-neighborhood of the metal oxide film 1503 and moved along with the metal oxide film 1503 with applying loading. Preferably, a scribe device can be used to move with applying loading on the region with press force ranging from 0.1 to 2 mm. It is important to carry out some treatment for easy separating, that is, it is important to prepare for separating. Such preparatory process to weaken selectively the adhesiveness will prevent poor separating and improve the process yield.

[0135] Next, a second substrate 1533 is pasted onto the protective layer 1531 with a two-sided tape 1532, and a third substrate 1535 is pasted over the first substrate 1500 with a two-sided tape 1534. An adhesive can be used instead of a two-sided tape. For example, it is possible to reduce the load of a semiconductor device, which is increased by separating the second substrate, by using an adhesive that is melted with UV light. The third substrate 1535 prevents the destruction of the first substrate 1500 in the subsequent process of separating. For the second substrate 1533 and the third substrate 1535, the substrate that has higher rigidity than that of the first substrate 1500, for example, a quartz substrate or a semiconductor substrate is preferably to be used.

[0136] Then, the metal film 1501 is separated from the oxide film 1502 by a physical means. The separation of metal film 1501 is started from the region that is partly weakened its adhesiveness with respect to the metal film 1501 or the oxide film 1502 in the previous process.

[0137] Three separating portions may be resulted from the separation of metal film 1501, that is, the separating portion of the metal film 1501 and metal oxide film 1503, the separating portion of the oxide film 1502 and the metal oxide film 1503, or the separating portion within the metal oxide film 1503. Further, the second substrate 1533 on which semiconductor devices (here, TFTs 1509, 1510) are pasted is separated from the third substrate 1535 on which the first substrate 1500 and the metal film 1501 are pasted. The separation can be carried out with comparatively small force (for example, man's hand, air pressure of gas sprayed from

a nozzle, ultrasonic waves, or the like). **FIG. 9B** shows a state of after the separating process.

[0138] A device substrate **1540** is bonded with an adhesive **1539** to the oxide layer **1502** that is partly attached with the metal oxide film **1503** (**FIG. 10**). At this time, it is important that the material for the adhesive **1539** is selected in order that the adhesiveness to be stronger between the oxide layer **1502** and the device substrate **1540** by the adhesive **1539** than that between the second substrate **1533** and the protective layer **1531** by the two-sided tape **1532**.

[0139] As the adhesive **1539**, various curing adhesives such as a photo-curing adhesive, for example, a reaction-curing adhesive, a thermal-curing adhesive, or a UV-curing adhesive, or an anaerobic adhesive can be used. More preferably, the adhesive **1539** is given high thermal conductivity by means of mixing powder comprising silver, nickel, aluminum, or aluminum nitride, or filler.

[0140] If the metal oxide film **1503** is remained over the surface of the oxide film **1502**, the adhesiveness of the device substrate **1540** may get worse, so that the remained metal oxide film may be completely removed by etching or the like before bonding to a printed wiring board.

[0141] As shown in **FIG. 10**, the two-sided tape **1532** and the second substrate **1533** are separated sequentially or simultaneously from the protective layer **1531**. The two-sided tape **1532** can be separated simultaneously with curing the adhesive **1539** by using UV-curing adhesive as the adhesive **1539**, and by using a tape or adhesive that is separated by UV light as the two-sided tape **1532**.

[0142] As shown in **FIG. 11A**, the protective film **1531** is removed by water since the protective film **1531** is formed by a resin that is soluble in water. In case that the remained protective film **1531** causes deterioration, the remained protective film **1531** is preferably removed by carrying out cleaning treatment or O₂ plasma treatment to the surface.

[0143] A terminal **1518**, a wiring **1551** provided with the device substrate **1540** are electrically connected each other by a wiring **1552** by wire bonding method, and a liquid crystal display apparatus is completed. The wiring **1551** is completed, for example, by coating copper with gold or tin. In addition, a timing for connecting the terminal **1518** and the wiring **1551** is not limited to the above described one.

[0144] It can be considered that a liquid crystal display apparatus is completed in this state. However, according to this embodiment, mechanical strength of the liquid crystal display apparatus is enhanced by encapsulating the liquid crystal display apparatus by a sealing member.

[0145] As shown in **FIG. 11B**, the thin film circuit **1530** and the panel **1529** are covered with a resin **1542** and a cover member **1543** is provided to protect the thin film circuit **1530** and the panel **1529**. In addition, the cover member **1543** is not always necessary to be provided, the device substrate **1540** can be covered directly with a sealing member.

[0146] As material for the sealing member used for encapsulating the liquid crystal display apparatus, a material that is used in general can be used. For instance, polymeric material such as polyester, acrylic acid, polyvinyl acetate, propylene, chloroethene, acrylonitrilebutadiene styrene resin, or polyethylene terephthalate can be used. The pixel portion of the liquid crystal display apparatus is exposed, or

a material for the resin **1542** or a cover member **1543** is appropriately selected in encapsulating in order to pass light therethrough.

[0147] By encapsulating a liquid crystal display apparatus with a sealing member, mechanical strength of the liquid crystal display apparatus is enhanced, heat generated in the liquid crystal display apparatus is radiated, and electromagnetic noises from adjacent circuit of external of the liquid crystal display apparatus can be rejected.

[0148] A plastic substrate can be used for the device substrate **1540**, the cover member **1543**, and the counter substrate **1523**. As a plastic substrate, ARTON® containing norbornene resin with polar group by JSR Corporation can be used. In addition, a plastic substrate such as polyethylene terephthalate (PET), polyether sulfone (PES), polyethylene naphthalate (PEN), polycarbonate (PC), nylon, polyether ether ketone (PEEK), polysulfone (PSF), polyetherimide (PEI), polyallylate (PAR), polybutylene terephthalate (PBT), or polyimide can be used. It is desired that the device substrate **1540** has high thermal conductivity of approximately from 2 to 30 W/mK to radiate heat generated in the liquid crystal display apparatus.

[0149] In this embodiment, tungsten is used for a material of the metal film **1501**, however, the present invention is not limited thereto. Any material can be used as long as which includes metals that allows a substrate to be separated by forming the metal oxide film **1503** over the surface of the material and crystallizing the metal oxide film **1503**. For instance, TiN, WN, Mo, or the like can be used in addition to tungsten. In case of using these alloys as the metal film, the optimal temperature for heat treatment to crystallize differs depending on the composition ratio of the metal film. On the basis of the fact, the heat treatment can be carried out at the temperature that has no adverse effects on the manufacturing process for a semiconductor device, and selection ranges of the manufacturing process become difficult to be restricted by adjusting the composition ratio of the metal film.

[0150] In addition, a semiconductor device used for an LED driver thin film circuit can be formed according to the above described method for forming a semiconductor device.

[0151] A material for a resin covering a light-emitting diode is preferably and appropriately selected depending on the method for curing a first substrate, a second substrate, and an adhesive.

[0152] An example that a wiring formed over a device substrate is electrically connected to a thin film circuit or an LED driver thin film circuit by flip chip method instead of wire bonding method will be explained hereinafter.

[0153] **FIG. 12A** is a cross-sectional view of a thin film circuit or an LED driver thin film circuit, each of which is provided with solder balls.

[0154] As shown in **FIG. 12A**, a semiconductor device **301** is electrically connected to a wiring over a device substrate with a solder ball **302**. The solder ball **302** is provided to the side of the device substrate of the semiconductor device **301** and connected to an electrode **303** that is electrically connected to the semiconductor device **301**. The electrode **303** may be formed by a conductive film that is the

same as that of a gate electrode of a TFT in case that the semiconductor device is the TFT.

[0155] FIG. 12B is a cross-sectional view of the thin film circuit or the LED driver thin film circuit in which semiconductor devices are stacked by flip chip method. As shown in FIG. 12B, semiconductor devices 310 and 311, each of which is provided to two layers, are stacked. A wiring provided to a device substrate is electrically connected to the semiconductor device 310 with a solder ball 312. In addition, the semiconductor device 310 is electrically connected to the semiconductor device 311 with a solder ball 313.

[0156] FIG. 12C is a view showing an example that a wiring formed over a device substrate is connected to a solder ball. As shown in FIG. 12C, a solder ball 312 is connected to a wiring 321 directly connected to a semiconductor device 320.

[0157] In addition, flip chip method is effective for the case that the number of connections between a thin film circuit or an LED driver thin film circuit and a wiring is large, since a pitch between wirings can be relatively reserved large compared with wire bonding method.

[0158] A solder ball and a wiring over a device substrate can be connected by various methods such as thermo-compression bonding and thermo-compression bonding with vibrations from ultrasonic wave. An under fill may fill interspace of thermo-compressed solder balls between each other to improve the mechanical strength of connection portions or the efficiency of radiation of heat generated in a thin film circuit. An under fill is not always necessary to be used, but it can prevent poor connection due to stress occurred by mismatch of coefficient of thermal expansion of a device substrate and a semiconductor device. The compression by applying ultrasonic wave can prevent poor connection compared with compression without ultrasonic wave. Especially, it is effective for the case that the number of bumps used for connecting is at least approximately 300.

[0159] A wiring formed over a device substrate can be electrically connected to a thin film circuit or an LED driver thin film circuit in various forms by combining the ways described with reference to FIGS. 12A to 12C. In addition, a flip chip method and wire bonding method can be combined for connecting.

[0160] An active matrix liquid crystal display apparatus is explained in this embodiment though, a passive matrix liquid crystal display apparatus can be adopted in the invention.

[0161] According to above described structure of the invention, a liquid crystal display apparatus can be drastically reduced its thickness and weight without being damaged the mechanical strength. Applying a liquid crystal display apparatus according to the invention to an electronic appliance, a space for using IC can be kept large and an electronic appliance can be sophisticated without preventing the electronic appliance from being lightweight and down-sized. Especially, a liquid crystal display apparatus according to the present invention is useful for a portable electronic appliance since usability thereof becomes improved by reducing the weight and the size. According to the invention, even when size of a pixel portion of a liquid crystal display apparatus is increased, weight thereof is almost the same as that of a liquid crystal display apparatus using a conventional glass substrate.

EXAMPLES

[0162] Hereinafter, examples of the present invention will be explained.

Example 1

[0163] The case that the present invention is applied to a card as typified by an electronic card will be explained in this example.

[0164] The configuration of an electronic card according to this example will be explained with reference to FIGS. 13A to 13D. FIG. 13A is a cross-sectional view showing a device substrate 401 at the time that a panel is completed. FIG. 13B is a top surface view of the device substrate illustrated in FIG. 13A. FIG. 13A shows the state that is taken along the line A-A'.

[0165] The device substrate 401 illustrated in FIGS. 13A and 13B has a concave portion 402 in which an LED 403 or a plurality of those is formed. An LED driver thin film circuit 404 is provided to the concave portion 402. The LED 403 and the LED driver circuit are covered with a resin 407.

[0166] Reference numeral 415 denotes a panel, and 411 denotes a thin film circuit. The panel and the thin film circuit are formed separately and pasted onto the device substrate 401. The thin film circuit 411 has an antenna coil 406. A wiring 405 formed over the device substrate 401 is connected electrically to the antenna coil 406.

[0167] FIG. 13C is a cross-sectional view of a liquid crystal display apparatus according to the invention at the time of completing an electronic card. FIG. 13D is a top view showing a liquid crystal display apparatus illustrated in FIG. 13C. FIG. 13C is a cross-sectional view showing FIG. 13D taken along the line B-B'.

[0168] An electronic card as illustrated in FIGS. 13C and 13D is covered with a cover member 420 so as to seal the panel 415 and the thin film circuit 411 formed over the device substrate with a resin 422. In this embodiment, light emitted from the panel 415 is transmitted through a portion 421, but not exclusively, the cover member can be formed of a material that is transparent to light in order that light emitted from panel 415 also passes through the area except the portion 421.

[0169] In this embodiment, the structure of an electronic card that supplies signal or power supply voltage by electromagnetic introduction using an antenna coil is explained, however, the electronic card can have the structure that supplies signal or power supply voltage by light using a light-emitting device or light sensor. Further, the electronic card is not limited to a noncontact card. The electronic card may be a contact card that transmits directly signals to a terminal device via a terminal.

[0170] The electronic card can be used for various purposes such as a cash card, a credit card, a prepaid card, an ID card used for identification, and a commuter pass. If an electronic card is installed with the liquid crystal display apparatus according to the invention, data of the electronic card can be displayed on a pixel portion. Further, the reliability of certification of identity can be improved by displaying a photograph of a face. If a photograph of a face is used instead of a picture for identity, resolution of at least approximately QVGA (320×240) is required.

Example 2

[0171] A method for manufacturing a plurality of liquid crystal display apparatus from a large sized device substrate will be explained with reference to **FIGS. 14A and 14B**.

[0172] As shown in **FIGS. 14A and 14B**, in case of using a large sized device substrate 601, a plurality of concave portions 603 is formed in areas 602, each of which is corresponding to each liquid crystal display apparatus. LEDs 604 are provided in each concave portion 603. A wiring connected electrically to the LED 604, an LED driver thin film circuit, a reflection film, or the like (all are not shown) are provided with the LEDs, and a resin 605 is filled with each concave portion 603 as shown in **FIG. 14B**.

[0173] A panel or a thin film circuit is formed and diced in accordance with the method explained in the embodiment, and a plurality of liquid crystal display apparatus can be manufactured from one device substrate. The dicing can be carried out either before or after forming the panel or the thin film circuit.

Example 3

[0174] In this embodiment, the example that an LED is connected to a flexible printed wiring board (FPC) and the FPC is connected to a wiring over a device substrate, instead that the LED is directly connected to the wiring over a device substrate.

[0175] **FIG. 15A** is a top surface view of an FPC connected with an LED. An LED 701 is connected to a lead 702 that is sandwiched by a plastic film 703. A terminal 704 connected with the lead 702 is not covered with the plastic film 703 and is exposed.

[0176] **FIG. 15B** is a view showing the state that the LED 701 illustrated in **FIG. 15A** is pasted onto a concave portion 705 in the device substrate 706. **FIG. 15C** is a view showing a reverse side of the device substrate 706 illustrated in **FIG. 15B**.

[0177] In the device substrate 706, a wiring 707 is provided with a reverse side of the concave portion 705. The LED 701 provided in the concave portion 705 and the wiring 707 are electrically connected each other by the lead 702.

[0178] The surface of the device substrate 706 provided with the wiring 707 has a concave portion 710. The regions provided with the concave portions 705, 710 are preferably not overlapped each other considering the intensity of the device substrate 706. A solar cell 708 and a driver circuit 709 for controlling the driving of the solar cell 708 are provided in the concave portion 710. The wiring 707 is electrically connected to the driver circuit 709.

[0179] According to the FPC, devices that are provided with both sides of the device substrate are electrically connected each other. Thus, the device substrate can be utilized without waste.

[0180] **FIG. 15D** is a cross-sectional view of the concave portion 705 taken along the dotted line A-A'. A metal reflection film 711 is deposited over the surface of the concave portion 711. According to this example, microscopic irregularities are formed on the surface of the reflection film 711 by corrodng and by sandblasting using emery,

and light emitted from the LED can be diffusely reflected and emitted evenly to the pixel portion.

Example 4

[0181] A method for forming a device substrate having a concave portion will be explained in this example.

[0182] **FIG. 16A** is a view showing a plastic substrate 801 having an opening portion 803 and a plastic substrate 802 that is planarized. The plastic substrates 801 and 802 are pasted each other. Then, a device substrate 805 having a concave portion 804 is formed in the region where the opening portion 803 overlaps with the plastic substrate 802 that is planarized.

Example 5

[0183] An example that an area sensor is provided with an electronic card utilizing a liquid crystal display according to the present invention.

[0184] **FIG. 17A** is a view showing that a tip of a finger presses a pixel portion 910 that serves not only as an image display portion but also as an area sensor. **FIG. 17B** is a view showing a cross-sectional view of the pixel portion 910 illustrated in **FIG. 17A**.

[0185] As shown in **FIG. 17B**, a device substrate 901 is formed to have a concave portion 905. A reflection film 902 is formed over the surface of the concave portion 905. An LED 903 is provided in the concave portion 905 and covered with a resin 904.

[0186] A TFT 906 for applying voltage to a liquid crystal 907 and a photo diode 908 are provided over the device substrate 901. The TFT 906 and the photo diode 908 are separately formed over different substrates, and separated to paste onto the device substrate 901.

[0187] Light emitted from the LED 903 is reflected by a finger 911 that serves as a subject, and radiated to the photo diode 908. Then, image data of the finger 911 can be obtained.

Example 6

[0188] A liquid crystal display apparatus according to the present invention can be utilized for various electronic appliances. Especially, it is effective to use the liquid crystal display apparatus for portable type electronic appliances since the usability thereof is drastically improved by reducing the weight or the size.

[0189] **FIG. 18A** is a view showing a sheet-shaped cellular phone comprising a main body 2101, a display unit 2103, a sound input unit 2104, a sound output unit 2105, a switch 2106, an external connection port 2107, or the like. An earphone 2108 prepared separately can be connected to the cellular phone via the external connection port 2107. A touch panel liquid crystal display apparatus having a sensor according to the present invention is used for the display unit 2103. A continuous stream of operation can be carried out by touching a touch panel operation key 2109 displayed on the display unit 2103. A thin film circuit provided with the liquid crystal display apparatus according to the invention can be used as various signal processing circuits provided in the main body 2101.

[0190] **FIG. 18B** is a view showing an electronic book comprising a main body 2201, a display unit 2202, an operation key 2203, and the like. The main body 2201 can have a built-in modem. A liquid crystal display apparatus having a sensor according to the present invention is used for the display unit 2202. A thin film circuit provided with the liquid crystal display apparatus according to the invention can be used as various signal processing circuits.

[0191] **FIG. 18C** is a view showing a wrist watch comprising 2301, a display unit 2302, a fastening 2303, and the like. A liquid crystal display apparatus having a sensor according to the present invention is used for the display unit 2302. A thin film circuit provided with the liquid crystal display apparatus according to the invention can be used as various signal processing circuits provided in the main body 2301.

[0192] **FIG. 18D** is a view showing a personal computer comprising a main body 2401, a display unit 2402, a touch panel key board 2403, a mouse 2404, an external connection port 2405, a power source plug 2406, and the like. A liquid crystal display apparatus having a sensor according to the present invention is used for the display unit 2402. A touch panel liquid crystal display apparatus having a sensor according to the present invention is used for the touch panel keyboard 2403 and the mouse 2404. A continuous stream of operation can be carried out by touching the touch panel key board 2403 and the mouse 2404. A thin film circuit provided with the liquid crystal display apparatus according to the invention can be used as various signal processing circuits.

[0193] **FIG. 18E** is a view showing a front glass viewing from the inside of a car. A front glass 2501 is pasted with a liquid crystal display apparatus 2503 according to the present invention. A display unit 2502 can display various pieces of information required by a driver. In **FIG. 18E**, an example that the liquid crystal display apparatus according to the invention is pasted onto the front glass is explained, but the liquid crystal display apparatus can be pasted onto a window glass of side and back of a driver's seat. Further, the liquid crystal display apparatus can be pasted onto either inside or outside of a car.

[0194] **FIG. 18F** is a view showing an electronic card comprising a main body 2601, a display unit 2602, a connection terminal 2603, and the like. The pixel portion of the liquid crystal display apparatus according to the invention can be utilized as the display unit 2602. A thin film circuit provided with the liquid crystal display apparatus according to the invention can be used as various signal processing circuits provide in the main body 2601.

[0195] Therefore the applicable range of the invention is extremely large, and the invention can be utilized for electronic appliances in various fields. The electronic appliances described in this embodiment can use any structure of liquid crystal structures described in Embodiments 1 to 5.

Example 7

[0196] A measurement result of a first substrate side after separating and a cross-section of an insulating film side by TEM will be described in this example.

[0197] On a glass substrate, a W film is deposited to have a thickness of 50 nm by sputtering, a silicon oxide film is deposited to have a thickness of 200 nm by sputtering, a

silicon oxynitride film is deposited to have a thickness of 100 nm by PCVD, an amorphous silicon film is deposited by PCVD to have a thickness of 50 nm as a semiconductor film, sequentially. Thereafter, the resulted film is heat-treated at 500° C. for 1 hour, further, at 550° C. for 4 hours, then, separated by a physical means such as polytetrafluoroethylene tape. **FIG. 19** is a TEM photograph showing the W film and an oxide layer at the substrate side. **FIG. 20** is a TEM photograph showing an oxide layer and a silicon oxide film at the semiconductor film side.

[0198] As shown in **FIG. 19**, a metal oxide film is inhomogeneously remained in contact with a metal film. As shown in **FIG. 20**, a metal oxide film is also inhomogeneously remained in contact with a metal film. According to both the TEM photographs, the facts are proved that the metal oxide film is split off by or separated at boundary faces of both sides, and that the metal oxide film is remained inhomogeneously adhered to the metal film and the silicon oxide film.

[0199] Therefore a quantity of the metal oxide film is attached to the device substrate side of the insulating film in the liquid crystal display apparatus according to the present invention.

Example 8

[0200] A liquid crystal material used for separating a first substrate after completing a liquid crystal display apparatus will be explained in this example.

[0201] **FIGS. 21A and 21B** are cross-sectional views showing a liquid crystal display apparatus according to this example. The liquid crystal display apparatus illustrated in **FIG. 21A** is provided with a columnar shaped spacer 1401 in a pixel to enhance the adhesiveness of a counter substrate 1402 and a polarizing plate 1403 at a device side. According to this, a semiconductor device except that in the region that is overlapped with a sealing member at the separation of the first substrate can be prevented from remaining at the first substrate side.

[0202] **FIG. 21B** a cross-sectional view showing a liquid crystal display apparatus utilizing a nematic liquid crystal, smectic liquid crystal, ferroelectric liquid crystal or PDLS (polymer dispersed liquid crystal) containing these liquid crystals in polymer resin. The adhesiveness of the counter substrate 1402 and the polarizing plate 1403 at a device side are enhanced, and a semiconductor device except that in the region that is overlapped with a sealing member at the separation of the first substrate can be prevented from remaining at the first substrate side by using PDLC 1404.

[0203] Although the present invention has been fully described by way of examples with reference to the accompanying drawings, it is to be understood that various changes and modifications will be apparent to those skilled in the art. Therefore, unless otherwise such changes and modifications depart from the scope of the present invention hereinafter described, they should be construed as being included therein.

What is claimed is:

1. A liquid crystal display apparatus comprising:
a first plastic substrate;
a light-emitting device formed over the first plastic substrate;
a resin covering the light-emitting device;

a semiconductor device formed on the insulating film;
a liquid crystal cell electrically connected to the semiconductor device; and
a second plastic substrate,
wherein the semiconductor device and the liquid crystal cell are formed between the first plastic substrate and the second plastic substrate.

2. A liquid crystal display apparatus comprising:
a first plastic substrate having a concave portion;
a light-emitting device formed in the concave portion of the first plastic substrate;
a resin formed in the concave portion to cover the light-emitting device;
an insulating film formed on the resin;
a semiconductor device formed on the insulating film;
a liquid crystal cell electrically connected to the semiconductor device; and
a second plastic substrate,
wherein the semiconductor device and the liquid crystal cell are formed between the first plastic substrate and the second plastic substrate.

3. A liquid crystal display apparatus comprising:
a first plastic substrate;
a metal film formed on the first plastic substrate;
a light-emitting device formed over the first plastic substrate;
a resin covering the light-emitting device;
an insulating formed on the resin;
a semiconductor device formed on the insulating film;
a liquid crystal cell electrically connected to the semiconductor device; and
a second plastic substrate,
wherein the semiconductor device and the liquid crystal cell are formed between the first plastic substrate and the second plastic substrate.

4. A liquid crystal display apparatus comprising:
a first plastic substrate having a concave portion;
a metal film and formed over the concave portion;
a light-emitting device formed in the concave portion;
a resin formed in the concave portion to cover the light-emitting device;
an insulating film formed on with the resin;
a semiconductor device formed on the insulating film;
a liquid crystal cell electrically connected to the semiconductor device; and
a second plastic substrate,
wherein the semiconductor device and the liquid crystal cell are formed between the first plastic substrate and the second plastic substrate.

5. A liquid crystal display apparatus according to any one of claims 3 and 4, wherein the metal film is sand blasted.
6. A liquid crystal display apparatus according to any one of claims 1 to 4, wherein the liquid crystal cell is transparent to light.
7. A liquid crystal display apparatus according to claim 1, wherein the light-emitting device is a light-emitting diode.
8. A liquid crystal display apparatus according to claim 7, wherein the light-emitting diode is connected to an FPC and supplied with current via the FPC.
9. A liquid crystal display apparatus according to claim 2, wherein the light-emitting device is a light-emitting diode.
10. A liquid crystal display apparatus according to claim 9, wherein the light-emitting diode is connected to an FPC and supplied with current via the FPC.
11. A liquid crystal display apparatus according to claim 3, wherein the light-emitting device is a light-emitting diode.
12. A liquid crystal display apparatus according to claim 11, wherein the light-emitting diode is connected to an FPC and supplied with current via the FPC.
13. A liquid crystal display apparatus according to claim 4, wherein the light-emitting device is a light-emitting diode.
14. A liquid crystal display apparatus according to claim 13, wherein the light-emitting diode is connected to an FPC and supplied with current via the FPC.
15. A cellular phone having the liquid crystal display apparatus according to any one of claims 1 to 4.
16. An electronic book having the liquid crystal display apparatus according to any one of claims 1 to 4.
17. A wrist watch having the liquid crystal display apparatus according to any one of claims 1 to 4.
18. A personal computer having the liquid crystal display apparatus according to any one of claims 1 to 4.
19. A front glass having the liquid crystal display apparatus according to any one of claims 1 to 4.
20. An electronic card having the liquid crystal display apparatus according to any one of claims 1 to 4.
21. A method for manufacturing a liquid crystal display apparatus comprising the steps of:
 - forming sequentially a metal film, a metal oxide film, an insulating film, and a semiconductor film over either face of a first substrate;
 - forming a semiconductor device by the semiconductor film;
 - pasting a second substrate with a first adhesive onto the first substrate to face the first substrate in such a way that the semiconductor device is sandwiched therebetween;
 - crystallizing the metal oxide film by heat treatment;
 - separating the first substrate by splitting the metal oxide film into two, each of which is adhered to the metal film and the insulating film;
 - forming a light-emitting device over a plastic substrate and coating the plastic substrate with a resin so as to cover the light-emitting device;
 - pasting the semiconductor device onto the plastic substrate by bonding the insulating film adhered with a part of the metal oxide film to the resin with a third adhesive;

separating the second substrate by removing the first adhesive; and

forming a liquid crystal cell electrically connected to the semiconductor device.

22. A method for manufacturing a liquid crystal display apparatus comprising the steps of:

forming sequentially a metal film, a metal oxide film, an insulating film, and a semiconductor film over either face of a first substrate;

forming a semiconductor device by the semiconductor film;

pasting a second substrate with a first adhesive onto the first substrate to face the first substrate in such a way that the semiconductor device is sandwiched therebetween;

separating the first substrate by splitting the metal oxide film into two, each of which is adhered to the metal film side and the insulating film side;

forming a light-emitting device over a plastic substrate and coating the plastic substrate with a resin so as to cover the light-emitting device;

pasting the semiconductor device onto the plastic substrate by bonding the insulating film adhered with a part of the metal oxide film to the resin with a third adhesive;

separating the second substrate by removing the first adhesive;

forming a liquid crystal cell electrically connected to the semiconductor device; and

crystallizing the metal oxide film by heat treatment in forming the semiconductor device.

23. A method for manufacturing a liquid crystal display apparatus comprising the steps of:

forming sequentially a metal film, a metal oxide film, an insulating film, and a semiconductor film over either face of a first substrate;

forming a semiconductor device by the semiconductor film;

pasting a second substrate with a first adhesive onto the first substrate to face the first substrate in such a way that the semiconductor device is sandwiched therebetween;

crystallizing the metal oxide film by heat treatment;

separating the first substrate by splitting the metal oxide film into two, each of which is adhered to the metal film side and the insulating film side;

forming a light-emitting device in a concave portion of a plastic substrate and coating the concave portion with a resin so as to cover the light-emitting device;

pasting the semiconductor device onto the plastic substrate by bonding the insulating film adhered with a part of the metal oxide film to the resin with a third adhesive;

separating the second substrate by removing the first adhesive; and

forming a liquid crystal cell electrically connected to the semiconductor device.

24. A method for manufacturing a liquid crystal display apparatus comprising the steps of:

forming sequentially a metal film, a metal oxide film, an insulating film, and a semiconductor film over either face of a first substrate;

forming a semiconductor device by the semiconductor film;

pasting a second substrate with a first adhesive onto the first substrate to face the first substrate in such a way that the semiconductor device is sandwiched therebetween;

separating the first substrate by splitting the metal oxide film into two, each of which is adhered to the metal film side and the insulating film side;

forming a light-emitting device in a concave portion of a plastic substrate and coating the concave portion with a resin so as to cover the light-emitting device;

pasting the semiconductor device onto the plastic substrate by bonding the insulating film adhered with a part of the metal oxide film to the resin with a third adhesive;

separating the second substrate by removing the first adhesive;

forming a liquid crystal cell electrically connected to the semiconductor device; and

crystallizing the metal oxide film by heat treatment in forming the semiconductor device.

25. A method for manufacturing a liquid crystal display apparatus comprising the steps of:

forming sequentially a metal film, a metal oxide film, an insulating film, and a semiconductor film over either face of a first substrate;

forming a semiconductor device by the semiconductor film;

forming a liquid crystal cell which is electrically connected to the semiconductor device;

pasting a second substrate with a first adhesive onto the first substrate to face the first substrate in such a way that the semiconductor device and the liquid crystal cell are sandwiched therebetween;

crystallizing the metal oxide film by heat treatment;

separating the first substrate by splitting the metal oxide film into two, each of which is adhered to the metal film side and the insulating film side;

forming a light-emitting device over a plastic substrate; coating the plastic substrate with a resin so as to cover the light-emitting device;

pasting the semiconductor device and the liquid crystal cell onto the plastic substrate by bonding the insulating film adhered with a part of the metal oxide film to the resin with a third adhesive; and

separating the second substrate by removing the first adhesive.

26. A method for manufacturing a liquid crystal display apparatus comprising the steps of:

forming sequentially a metal film, a metal oxide film, an insulating film, and a semiconductor film over either face of a first substrate;

forming a semiconductor device by the semiconductor film;

forming a liquid crystal cell which is electrically connected to the semiconductor device;

pasting a second substrate with a first adhesive onto the first substrate to face the first substrate in such a way that the semiconductor device and the liquid crystal cell are sandwiched therebetween;

separating the first substrate by splitting the metal oxide film into two, each of which is adhered to the metal film side and the insulating film side;

forming a light-emitting device over a plastic substrate;

coating the plastic substrate with a resin so as to cover the light-emitting device;

pasting the semiconductor device and the liquid crystal cell onto the plastic substrate by bonding the insulating film adhered with a part of the metal oxide film to the resin with a third adhesive;

separating the second substrate by removing the first adhesive; and

crystallizing the metal oxide film by heat treatment in forming the semiconductor device.

27. A method for manufacturing a liquid crystal display apparatus comprising the steps of:

forming sequentially a metal film, a metal oxide film, an insulating film, and a semiconductor film over either face of a first substrate;

forming a semiconductor device by the semiconductor film;

forming a liquid crystal cell electrically connected to the semiconductor device;

pasting a second substrate with a first adhesive onto the first substrate to face the first substrate in such a way that the semiconductor device and the liquid crystal cell are sandwiched therebetween;

crystallizing the metal oxide film by heat treatment;

separating the first substrate by splitting the metal oxide film into two, each of which is adhered to the metal film side and the insulating film side;

forming a light-emitting device in a concave portion of a plastic substrate and coating the concave portion with a resin so as to cover the light-emitting device;

pasting the semiconductor device and the liquid crystal cell onto the plastic substrate by bonding the insulating film adhered with a part of the metal oxide film to the resin with a third adhesive; and

separating the second substrate by removing the first adhesive.

28. A method for manufacturing a liquid crystal display apparatus comprising the steps of:

forming sequentially a metal film, a metal oxide film, an insulating film, and a semiconductor film over either face of a first substrate;

forming a semiconductor device by the semiconductor film;

forming a liquid crystal cell which is electrically connected to the semiconductor device;

pasting a second substrate with a first adhesive onto the first substrate to face the first substrate in such a way that the semiconductor device and the liquid crystal cell are sandwiched therebetween;

separating the first substrate by splitting the metal oxide film into two, each of which is adhered to the metal film side and the insulating film side;

forming a light-emitting device in a concave portion of a plastic substrate and coating the concave portion with a resin so as to cover the light-emitting device;

pasting the semiconductor device and the liquid crystal cell onto the plastic substrate by bonding the insulating film adhered with a part of the metal oxide film to the resin with a third adhesive;

separating the second substrate by removing the first adhesive; and

crystallizing the metal oxide film by heat treatment in forming the semiconductor device.

29. A method for manufacturing a liquid crystal display apparatus according to any one of claims 21 to 28, wherein the liquid crystal cell is transparent to light.

30. A method for manufacturing a liquid crystal display apparatus according to claim 21, wherein the light-emitting device is a light-emitting diode.

31. A method for manufacturing a liquid crystal display apparatus according to claim 30, wherein the light-emitting diode is connected to an FPC and supplied with current via the FPC.

32. A method for manufacturing a liquid crystal display apparatus according to claim 22, wherein the light-emitting device is a light-emitting diode.

33. A method for manufacturing a liquid crystal display apparatus according to claim 32, wherein the light-emitting diode is connected to an FPC and supplied with current via the FPC.

34. A method for manufacturing a liquid crystal display apparatus according to claim 23, wherein the light-emitting device is a light-emitting diode.

35. A method for manufacturing a liquid crystal display apparatus according to claim 34, wherein the light-emitting diode is connected to an FPC and supplied with current via the FPC.

36. A method for manufacturing a liquid crystal display apparatus according to claim 24, wherein the light-emitting device is a light-emitting diode.

37. A method for manufacturing a liquid crystal display apparatus according to claim 36, wherein the light-emitting diode is connected to an FPC and supplied with current via the FPC.

38. A method for manufacturing a liquid crystal display apparatus according to claim 25, wherein the light-emitting device is a light-emitting diode.

39. A method for manufacturing a liquid crystal display apparatus according to claim 38, wherein the light-emitting diode is connected to an FPC and supplied with current via the FPC.

40. A method for manufacturing a liquid crystal display apparatus according to claim 26, wherein the light-emitting device is a light-emitting diode.

41. A method for manufacturing a liquid crystal display apparatus according to claim 40, wherein the light-emitting diode is connected to an FPC and supplied with current via the FPC.

42. A method for manufacturing a liquid crystal display apparatus according to claim 27, wherein the light-emitting device is a light-emitting diode.

43. A method for manufacturing a liquid crystal display apparatus according to claim 42, wherein the light-emitting diode is connected to an FPC and supplied with current via the FPC.

44. A method for manufacturing a liquid crystal display apparatus according to claim 28, wherein the light-emitting device is a light-emitting diode.

45. A method for manufacturing a liquid crystal display apparatus according to claim 44, wherein the light-emitting diode is connected to an FPC and supplied with current via the FPC.

* * * * *

专利名称(译)	液晶显示装置和液晶显示装置的制造方法		
公开(公告)号	US20040169786A1	公开(公告)日	2004-09-02
申请号	US10/756833	申请日	2004-01-14
[标]申请(专利权)人(译)	株式会社半导体能源研究所		
申请(专利权)人(译)	半导体能源研究所有限公司.		
当前申请(专利权)人(译)	半导体能源研究所有限公司.		
[标]发明人	YAMAZAKI SHUNPEI TAKAYAMA TORU MARUYAMA JUNYA GOTO YUUGO OHNO YUMIKO ENDO AKIO ARAI YASUYUKI		
发明人	YAMAZAKI, SHUNPEI TAKAYAMA, TORU MARUYAMA, JUNYA GOTO, YUUGO OHNO, YUMIKO ENDO, AKIO ARAI, YASUYUKI		
IPC分类号	G02F1/1345 G02F1/1333 G02F1/13357 G02F1/1362 H01L27/146 G02F1/1335		
CPC分类号	G02F1/133305 G02F1/133603 G02F1/1362 H01L2221/68368 H01L27/14678 H01L2221/68359 G02F2001/13613 H01L2224/48465 H01L2224/73265 H01L2224/8592		
优先权	2003007568 2003-01-15 JP 2003007697 2003-01-15 JP		
其他公开文献	US8040456		
外部链接	Espacenet USPTO		

摘要(译)

为了在不妨碍重量和尺寸减小的情况下复杂化便携式电子设备，更具体地，为了使安装在便携式电子设备中的液晶显示装置不会妨碍机械强度，液晶显示装置包括第一塑料基板，设置在第一塑料基板上的发光装置，覆盖发光装置的树脂，与树脂接触的绝缘膜，与绝缘膜接触的半导体装置，液晶单元电连接到半导体器件和第二塑料衬底，其中半导体器件和液晶单元设置在第一塑料衬底和第二塑料衬底之间。

