




US 20040207776A1


(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2004/0207776 A1**
(43) **Pub. Date: Oct. 21, 2004**
Choi et al.(54) **FABRICATING METHOD FOR A
FERROELECTRIC LIQUID CRYSTAL PANEL**(30) **Foreign Application Priority Data**

Dec. 21, 1999 (KR)..... 1999-59598

(76) Inventors: **Suk-Won Choi**, Anyang-shi (KR);
Su-Seok Choi, Hanam-shi (KR)**Publication Classification**Correspondence Address:
MCKENNA LONG & ALDRIDGE LLP
1900 K STREET, NW
WASHINGTON, DC 20006 (US)(51) **Int. Cl.⁷** **G02F 1/1333**
(52) **U.S. Cl.** **349/85**(21) Appl. No.: **10/848,065**(57) **ABSTRACT**(22) Filed: **May 19, 2004****Related U.S. Application Data**(62) Division of application No. 09/740,967, filed on Dec.
21, 2000, now Pat. No. 6,757,035.


A liquid crystal display device, and a method of fabricating such a liquid crystal display device, that uses a ferroelectric liquid crystal (FLC). Additives are added to the ferroelectric liquid crystal. The additives are then used to form polymer networks, beneficially by exposure to ultraviolet light. Suitable additives include an acrylate compound.

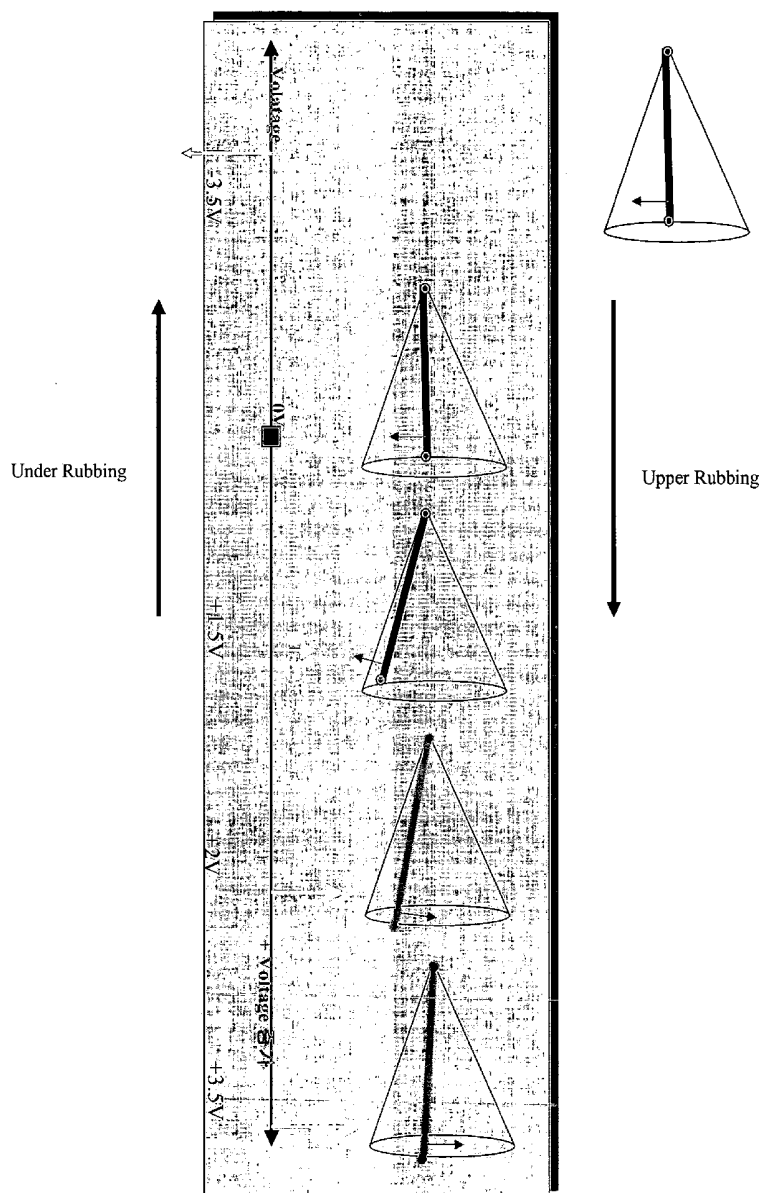

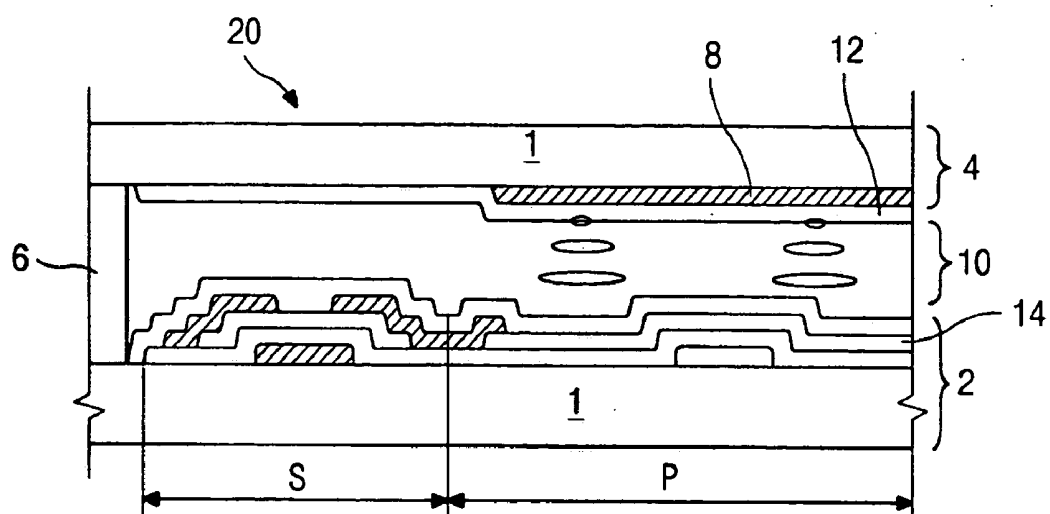


(related art)

Figure 1



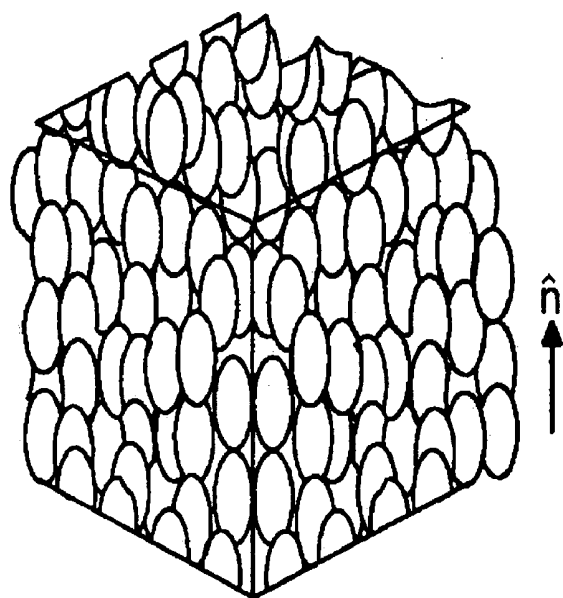


(related art)

Figure 2A

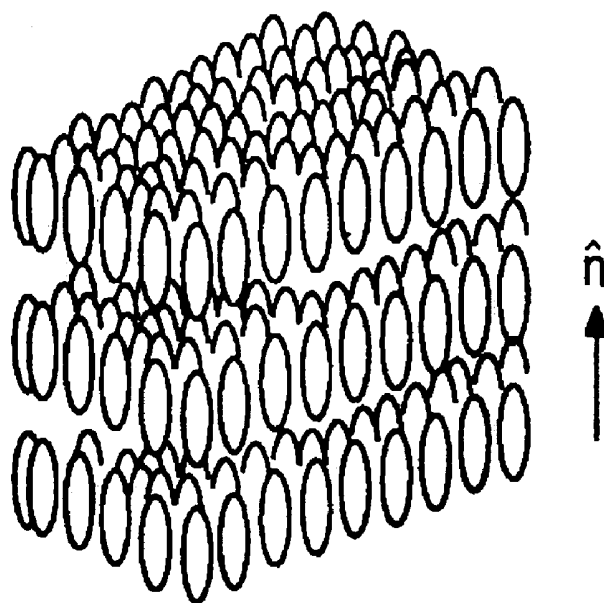

(related art)
Figure 2B



(related art)
Figure 2C

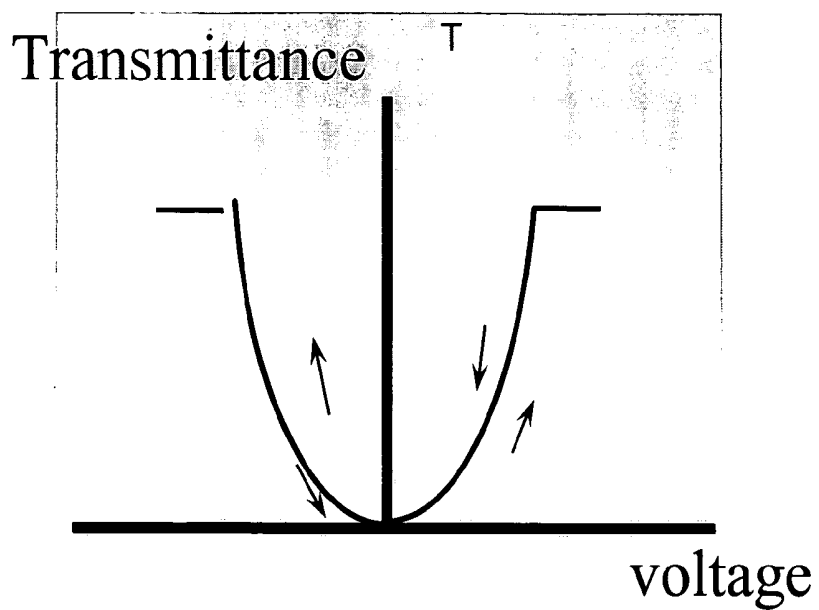


Figure 4A

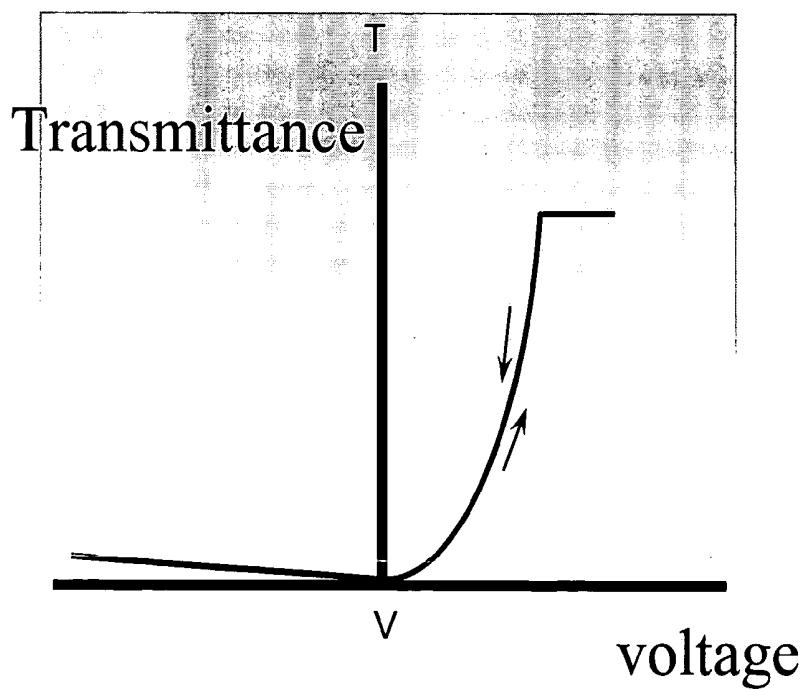


Figure 4B

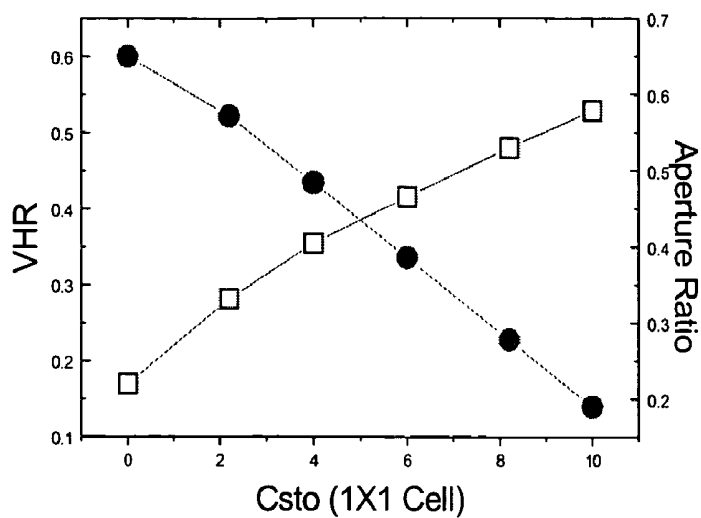


Figure 5

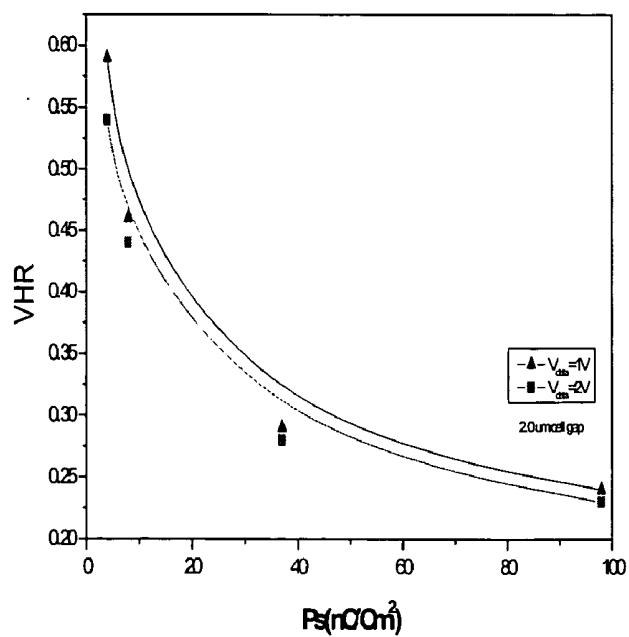


Figure 6

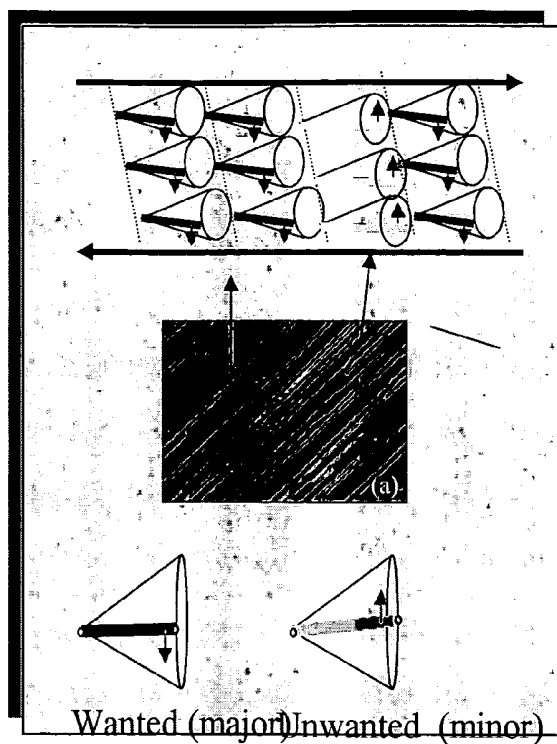


Figure 7A

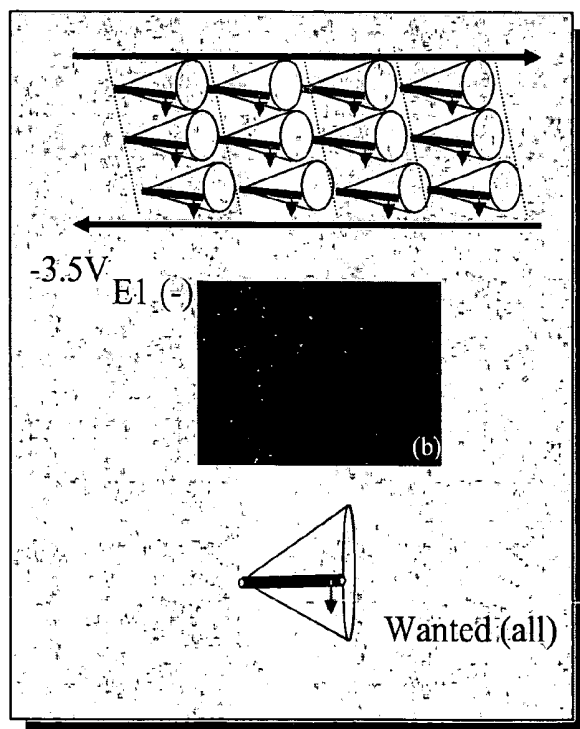


Figure 7B


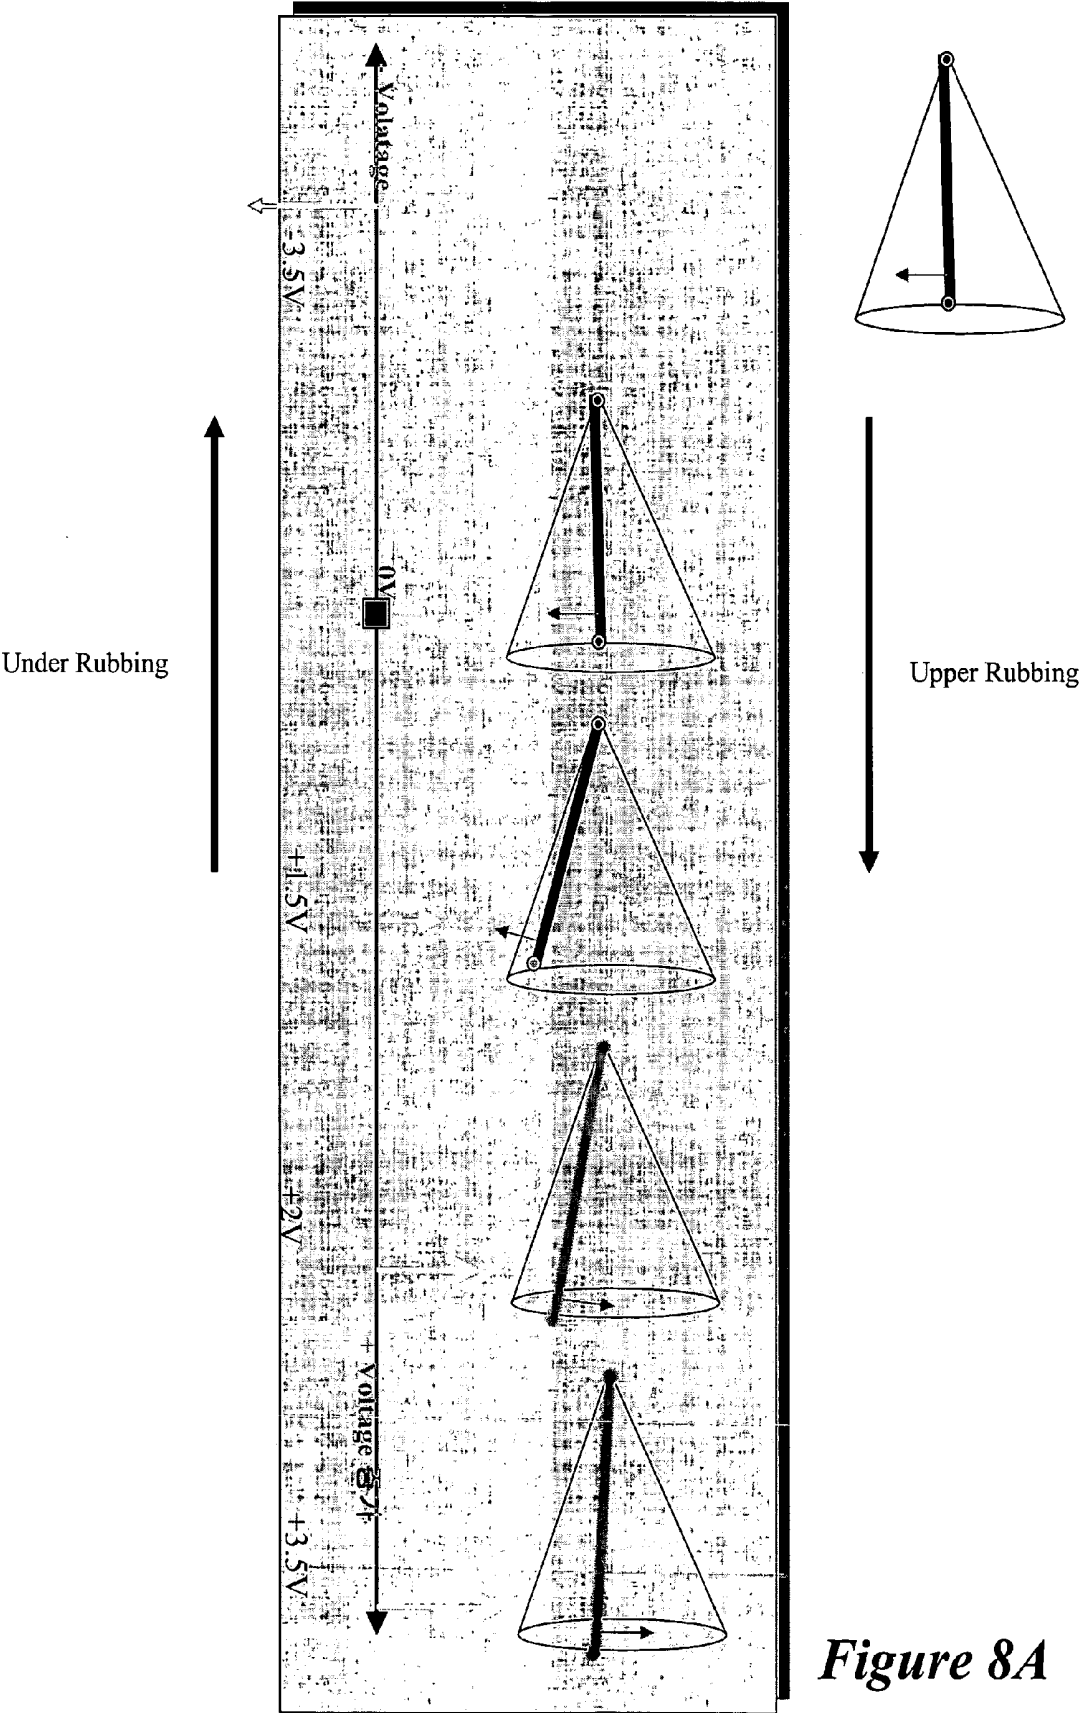


Figure 8A

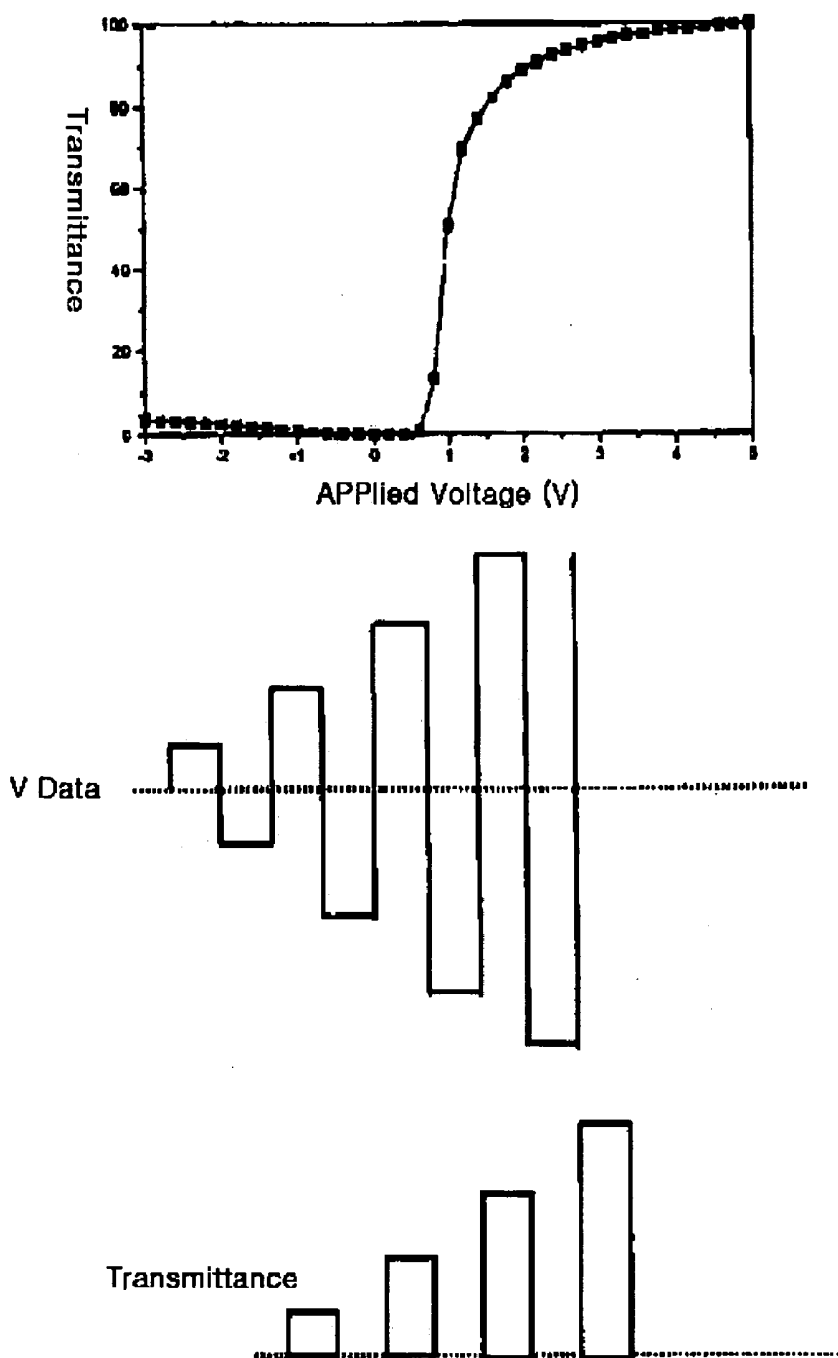

(related art)
Figure 8B

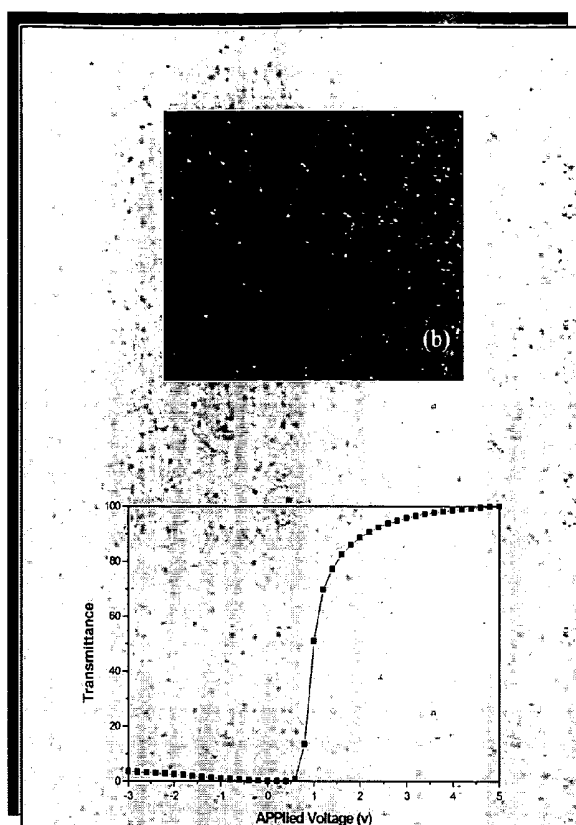


Figure 9A

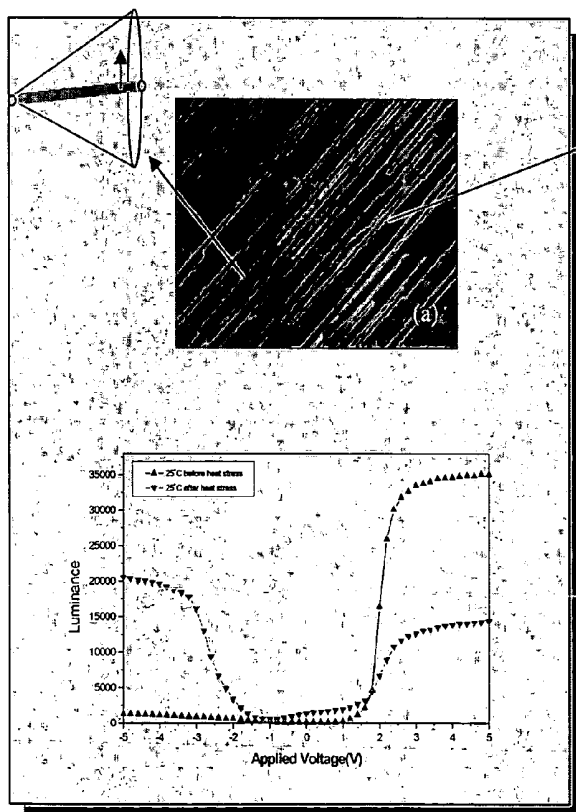


Figure 9B

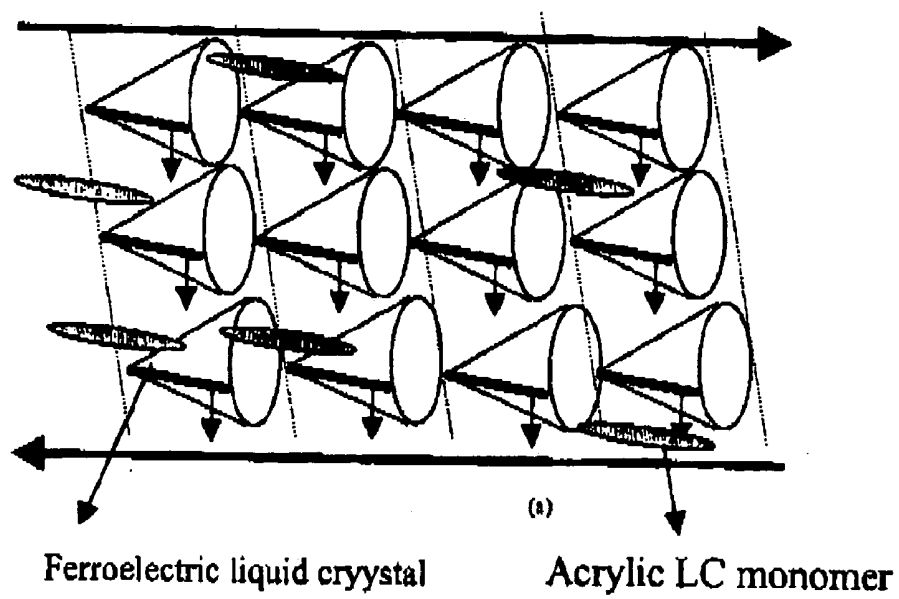


Figure 10

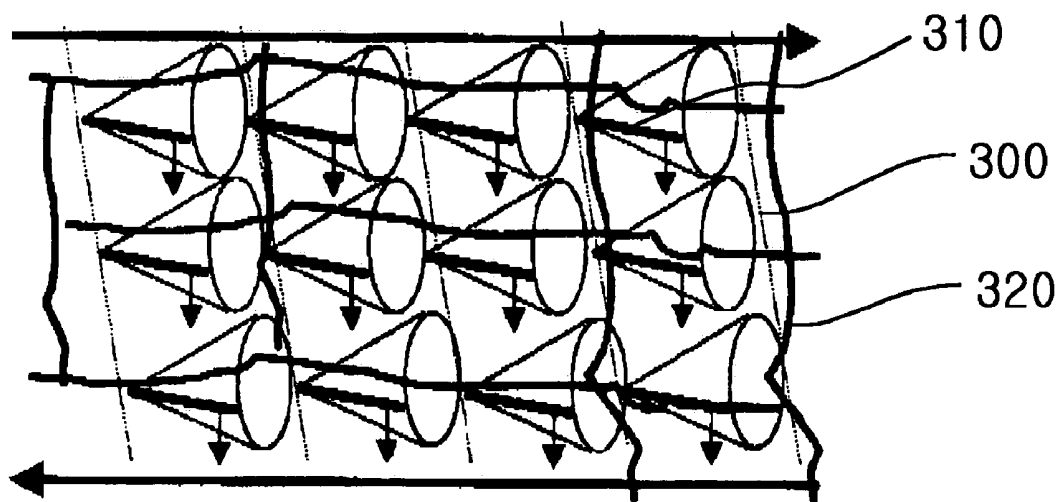


Figure 11

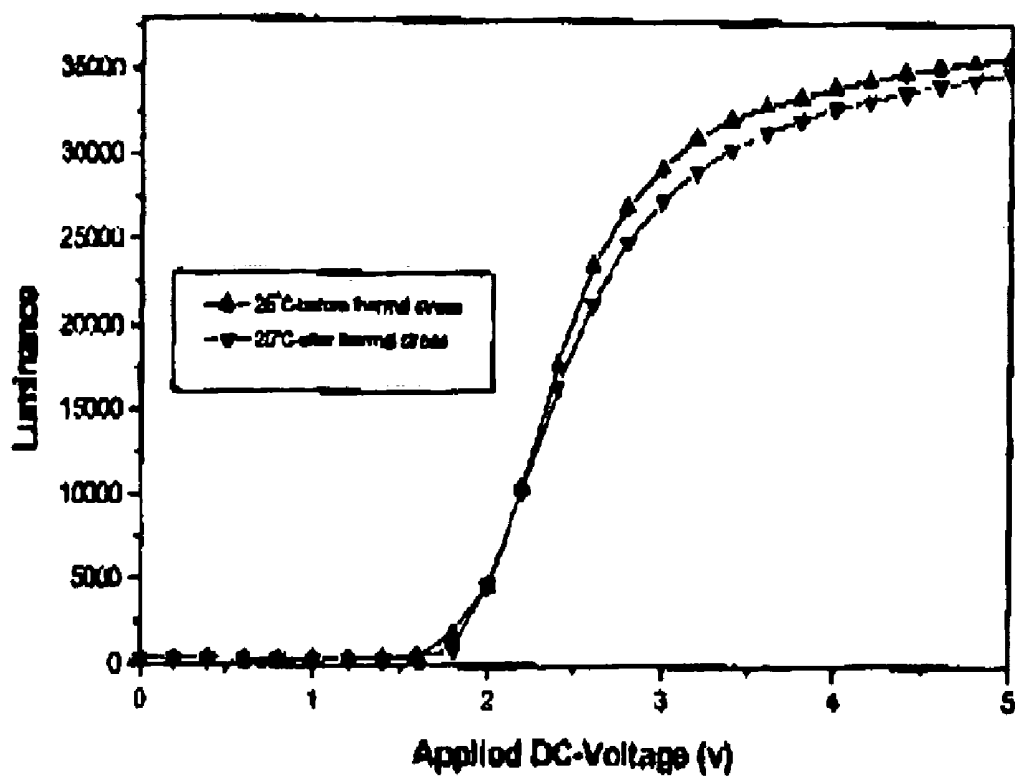


Figure 12

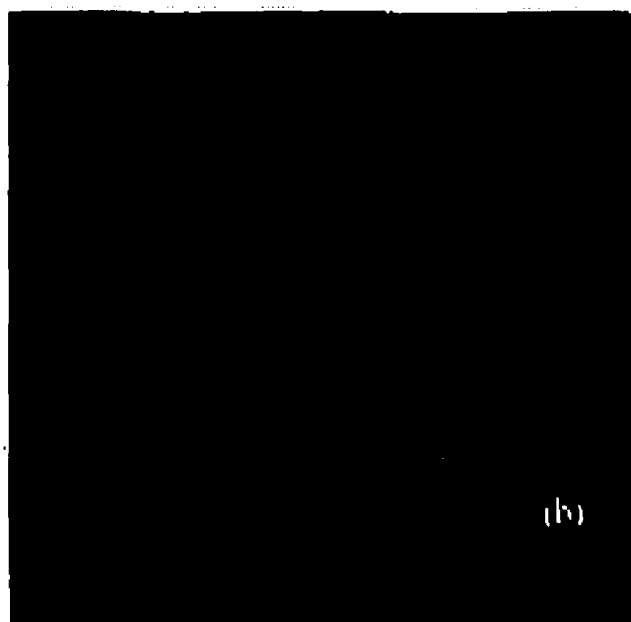


Figure 13

FABRICATING METHOD FOR A FERROELECTRIC LIQUID CRYSTAL PANEL

This application claims the benefit of Korean Patent Application No. 1999-59598, filed on Dec. 21, 1999, which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] This invention relates to liquid crystal displays. More particularly, it relates to liquid crystal displays that use ferroelectric and anti-ferroelectric liquid crystals.

[0003] 2. Discussion of the Related Art

[0004] A conventional liquid crystal display (LCD) includes a display panel having upper and lower substrates that are attached to each other, and an interposed liquid crystal, usually a nematic, a smectic, or a cholesteric liquid crystal. A liquid crystal display utilizes the electro-optic effects of the liquid crystal. The display panel is operationally divided into a plurality of liquid crystal cells. On the exterior surfaces of the upper and lower substrates, polarizers or retardation films are selectively attached.

[0005] A major design consideration of a liquid crystal cell is the characteristic of the particular liquid crystal that is used. A good liquid crystal should have a fast response time, a good gray scale, and a wide viewing angle, all while operating at a low driving voltage. However, it is very difficult to find a liquid crystal that has all of those characteristics. Thus, various designs have been adopted for liquid crystal display devices.

[0006] Among the various types of liquid crystals displays, the 90° twist mode TN liquid crystal display has neither a wide viewing angle nor a fast response time. An in-plane switching (IPS) mode has a wide viewing angle, but a relatively slow response time that results in decreased luminance and poor moving image quality. To overcome the problem of a slow response time, various technologies have been proposed. For a fast response time, LTN (low twisted nematic) and OCB (optically compensated birefringence) modes have been studied. However, those technologies have not yet been able to provide the fast response time of a CRT.

[0007] FIG. 1 is a cross-sectional view illustrating a conventional TN-LCD panel. As shown in FIG. 1, the TN-LCD panel has lower and upper substrates 2 and 4 and an interposed liquid crystal layer 10. The lower substrate 2 includes a substrate 1 having a TFT "S" that is used as a switching element that changes the orientation of the liquid crystal molecules. The TFT "S" includes a pixel electrode 14 that applies a voltage to the liquid crystal layer 10 in accordance with signals that are applied to the TFT "S". The upper substrate 4 has a color filter 13 for implementing color, and a common electrode 12 on the color filter 8. The common electrode 12 serves as an electrode for applying a voltage to the liquid crystal layer 10. The pixel electrode 14 is arranged over a pixel portion "P," i.e., a display area. Further, to prevent leakage of the liquid crystal layer 10 between the two substrates 2 and 4, those substrates are sealed by a sealant 6.

[0008] FIGS. 2A to 2C illustrate possible alignments of liquid crystal molecules in a liquid crystal layer. In a nematic liquid crystal, while each rod-like molecule fluctuates quite rapidly, as shown in FIG. 2A the molecules have a definite orientational order expressed by a unit vector "fi" called a director. As shown in FIG. 2B, in a smectic liquid crystal the molecules positionably have a layered structure in which the molecular orientation is tilted perpendicular to the layers. As shown in FIG. 2C, in a cholesteric liquid crystal, the director $\hat{n}$ changes its orientation gradually along a helical axis. The helical axis coincides with the optical axis of this material. Among the different types of liquid crystals, the nematic liquid crystal is most widely used in liquid crystal display devices.

[0009] Liquid crystals for liquid crystal display devices should:

[0010] a) have a liquid crystal phase that extends from low to high temperatures, and thus can operate over a range of temperatures;

[0011] b) be chemically and optically stable over time;

[0012] c) have a low viscosity and a fast response time;

[0013] d) have highly ordered molecular alignments, and thus provide good contrast; and

[0014] e) have a large dielectric anisotropy and a low operating voltage.

[0015] The electro-optic effect enables electrical modulation of light by changing the alignment of the liquid crystal molecules using an applied electric field.

[0016] Among the various types of nematic liquid crystals, a twisted nematic (TN) liquid crystal and a super twisted nematic (STN) liquid crystal are often used. In a TN liquid crystal panel, a nematic liquid crystal is interposed between transparent lower and upper substrates. Those substrates induce a definite molecular arrangement such that a gradual rotation of the molecules occurs between the lower transparent substrate and the upper transparent substrate until a twist angle of 90 degrees is achieved. In an STN liquid crystal panel the angle of twist rotation is increased to 180 or to 360 degrees.

[0017] The basic configuration and operation of a twisted nematic liquid crystal display device will now be explained. As shown in FIG. 3A, opposed and spaced apart first and second polarizers 10 and 16, respectively, have perpendicular first and second transmittance axis directions 40 and 42. Between the two polarizers 10 and 16 are first and second transparent substrates 12 and 14, which are also opposed to and spaced apart from each other. Spacers are used to maintain the cell gap between the substrates. For example, plastic balls or silica balls having a diameter of 4 to 5 micrometers can be sprayed on the first substrate.

[0018] Still referring to FIG. 3A, the first and the second transparent substrates 12 and 14 include first and second orientation films 20 and 22, respectively, on their opposing surfaces. Between the first and second orientation films 20 and 22 is a positive TN liquid crystal 18.

[0019] The positive TN liquid crystal has a characteristic that it arranges according to an applied electric field. The

first and second polarizer **10** and **16**, respectively, transmit light that is parallel with their transmittance-axis directions **40** and **42**, but reflect or absorb light that is perpendicular to their transmittance-axis directions **40** and **42**.

[0020] The first and second orientation films **20** and **22** were previously rubbed in a proper direction with a fabric. This rubbing causes the positive TN liquid crystal molecules between the first and second transparent substrates **12** and **14** to become tilted several degrees. First and second rubbing directions **50** and **52** of the first and second orientation films **20** and **22** are, respectively, parallel with the transmittance-axis directions of the first and second polarizers **10** and **16**. With no electric field applied across the positive TN liquid crystal **18**, the orientation of the liquid crystal molecules twists between one substrate and the other at a definite angle, that angle being the twisted angle of the positive TN liquid crystal **18**.

[0021] During operation, a back light device **24** irradiates white light onto the first polarizer **10**. The first polarizer **10** transmits only the portion of the light that is parallel with the first transmittance-axis direction **40**. The result is a first linearly polarized light **26** that passes through the polarizer **10**. The first linearly polarized light **26** then passes into the positive TN liquid crystal **18** via the first transparent substrate **12**.

[0022] As the first polarized light **26** passes through the positive TN liquid crystal **18**, the first polarized light **26** changes its phase according to the twist alignment of the positive TN liquid crystal molecules. Accordingly, the first linearly polarized light **26** becomes an elliptically (possibly circularly) polarized light **28**.

[0023] The elliptically polarized light **28** passes through the second transparent substrate **14**, and meets the second polarizer **16**. When the elliptically polarized light **28** passes through the second polarizer **16**, the second polarizer **16** transmits only the portion of the elliptically polarized light **28** that is parallel to the second transmittance-axis direction **42**. A polarized light **30** is then emitted. In the above-mentioned operation, a white state is displayed.

[0024] Turning now to **FIG. 3B**, when a voltage supplier **35** induces an electric field through the positive TN liquid crystal **18**, the positive TN liquid crystal molecules rotate and arrange such that the longitudinal axes of the molecules become perpendicular to the surfaces of the first and second substrates **12** and **14**. Accordingly, the first linearly polarized light **26** passes through the first transparent substrates **12**, the positive TN liquid crystal **18**, and the second transparent substrate **14** without phase change. The first linearly polarized light **26** then meets the second polarizer **16**. As the second polarizer **16** has the second transmittance-axis direction **52** which is perpendicular to the first linearly polarized light **26**, the second polarizer **16** absorbs or shields most of the first linearly polarized light **26**. Thus, little or none of the first linearly polarized light **26** passes through the second polarizer **16**. Accordingly, a dark state is displayed.

[0025] Generally, the response time of a nematic liquid crystal display is greater than 15 ms. This is because of a low elastic constant and the time required to polarize the molecules. This results in decreased luminance when a nematic liquid crystal display produces high speed moving images.

[0026] Because of that limitation, a ferroelectric liquid crystal (FLC) in the smectic phase has become of interest.

The FLC has a hundred times faster response time than the TN LC or the STN LC. This is because the FLC has a spontaneous polarization that leads to high-speed responses, and thus an improvement in the display of moving images. For example, a deformed helix FLC (DHF), a surface stabilized FLC (SS-FLC), an AFLC, a V-shape FLC, and a half-VFLC (HV-FLC) have been developed for the LCD device.

[0027] Except for the DHF FLC, to use a ferroelectric LC in a liquid crystal display application, the cell gap between the two transparent substrates of a liquid crystal display device should be uniformly maintained at less than about 2 micrometers.

[0028] Among the various ferroelectric LCs, the V-shape FLC and the HV-FLC have recently become of significant interest due to their advantages in producing gray scale images and to their operational modes. Prototypes implementing these FLCs have been produced.

[0029] **FIGS. 4A and 4B** respectively illustrate electro-optic properties of the V-shape FLC and the HV-FLC. As indicated, the transmittance of the V-shape FLC and the HV-FLC are readily controlled by a voltage.

[0030] When driving a TFT Liquid Crystal Display, the VHR (voltage holding ratio) property is important. As the VHR becomes smaller, each pixel element requires a larger storage capacitance so that more charge becomes available to prevent or to compensate for charge leak. However, as shown in **FIG. 5** this decreases the aperture ratio. Additionally, a larger storage capacitor requires a higher voltage driver IC.

[0031] In general, for a nematic liquid crystal TFT-LCD the VHR is above 95%. Thus, the VHR is not a significant problem for such displays. However, a ferroelectric liquid crystal (FLC) has a VHR that is much smaller, possibly under 50%. This is due to the depolarization effect of the liquid crystal, which is directly related to spontaneous polarization. So, as shown in **FIG. 6**, the VHR becomes smaller as the spontaneous polarization (P_s) becomes larger.

[0032] As result, It is difficult to drive a FLC having a large spontaneous polarization with a TFT

[0033] The P_s (spontaneous polarization) value of a V-shape FLC ranges into several hundred nC/Cm², but an HV-shape FLC has a P_s value under 10 nC/Cm². So, the HV-FLC has a significant advantage in this regard.

[0034] Additionally, the V-shape FLC undergoes phase transitions of "Isotropic $\rightarrow$ N* $\rightarrow$ Sc* $\rightarrow$ crystal" as the temperature decreases. The HV-FLC has phase transitions of "Isotropic $\rightarrow$ N* $\rightarrow$ Sc* $\rightarrow$ crystal" as the temperature decreases. If only cooling is conducted until the Sc* phase (the phase at room temperature and at the driving temperature), random 2-domain molecular orientations appear due to unwanted molecule configurations as shown **FIG. 7A**.

[0035] However, if an appropriate DC (direct current) electric field ($\rightarrow$ polarity) is applied during the N* $\rightarrow$ Sc* phase transition (over a small temperature range), the unwanted molecule configuration is suppressed. As a result, as shown in **FIG. 7B**, all of the molecules properly align. **FIG. 7B** shows a proper alignment (mono-domain) achieved using an appropriate DC electric field. In this state, the liquid crystals continuously rotate around a cone angle of 50° until

they react to an applied electric field. **FIG. 8A** illustrates the driving of a HV-FLC, while **FIG. 8B** illustrates electro-optic curves of the driven HV-FLC.

[0036] So, a HV-FLC has good alignment, the same transmittance as a nematic due to the 50° cone rotation, and a small Ps, all of which makes them suitable for LCD applications.

[0037] While the HV-FLC has many good properties, it has very weak resistance to both thermal stress and mechanical stress. Although all molecules can be aligned by applying an appropriate DC (direct current) electric field (–polarity) during the N*→Sc* phase transition, thermal stress causes the reverse transition from Sc*→N* to occur. Then, the mono-domain alignment is broken and the unwanted random domains reappear after cooling back to the Sc* phase. Furthermore, mechanical stress can break the mono-domain alignment. Then, the unwanted random domains reappear.

[0038] **FIG. 9A** illustrates an electro-optic curve and the image of a mono-domain aligned cell. **FIG. 9B** shows electro-optic curves and an image of a cell having a broken alignment and random 2-domains. As shown, light leakage occurs from a cross polarizer.

SUMMARY OF THE INVENTION

[0039] Accordingly, the principles of the present invention relate to liquid crystal panels that are designed to substantially obviate one or more of the problems due to the limitations and disadvantages of the related art.

[0040] It is an object of the present invention to provide a liquid crystal display panel having a fast response time.

[0041] Additional features and advantages of the invention will be set forth in the description that follows, and in part will be apparent from that description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0042] The principles of the present invention provide for a method of fabricating a liquid crystal display device. Such a method includes forming a first orientation film on a first substrate, forming a second orientation film on a second substrate, spacing the first and second substrates apart, and then interposing a ferroelectric liquid crystal layer between the first and second substrates. That ferroelectric liquid crystal layer includes a special additive. The method further includes aligning the ferroelectric liquid crystal layer above a phase transition temperature (the SmA phase in some cases, the Sc* phase in others), and then forming polymer networks by exposing the ferroelectric liquid crystal layer to light such that the additive in the ferroelectric liquid crystal layer is polymerized. In such a method, the additive beneficially includes a monoacrylate compound, a diacrylate compound, or a combination of both. Beneficially, polymer networks are formed using ultraviolet light. Additionally, the polymer networks are beneficially formed along molecular layer boundaries of the ferroelectric liquid crystal layer and/or across molecular layer boundaries of the ferroelectric liquid crystal layer.

[0043] It is to be understood that both the foregoing general description and the following detailed description

are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWING

[0044] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0045] In the drawings:

[0046] **FIG. 1** is a cross-sectional view of a typical TFT liquid crystal display panel;

[0047] **FIGS. 2A, 2B, and 2C** illustrate molecular alignments of nematic, smetic, and cholesteric liquid crystals, respectively.

[0048] **FIGS. 3A and 3B** illustrate a configuration and an operation of a liquid crystal panel;

[0049] **FIGS. 4A and 4B** are graphs of electro-optic properties of a V-shaped FLC and an HV-FLC, respectively;

[0050] **FIG. 5** is a graph illustrating relations between the VHR, an aperture ratio, and a storage capacitor;

[0051] **FIG. 6** is a graph illustrating a VHR property of a conventional HV-FLC;

[0052] **FIG. 7A** illustrates two random domains of the conventional HV-FLC;

[0053] **FIG. 7B** illustrates a mono-domain of the conventional HV-FLC;

[0054] **FIG. 8A** shows a driving of the conventional HV-FLC;

[0055] **FIG. 8B** shows an electro-optic curve of the conventional HV-FLC;

[0056] **FIG. 9A** shows an electro-optic curve (luminance versus voltage) and light leakage from a mono-domain cell;

[0057] **FIG. 9B** is a luminance versus voltage graph illustrating changes in an electro-optic property of a conventional SmC* phase before and after thermal stress;

[0058] **FIG. 10** illustrates an alignment direction of a ferroelectric liquid crystal layer along an acrylate monomer;

[0059] **FIG. 11** illustrates a polymerization of an acrylate monomer mixed into a ferroelectric liquid crystal layer;

[0060] **FIG. 12** is a luminance versus voltage graph illustrating changes in an electro-optic property of the SmC* phase before and after applying a thermal stress, when polymer networks are formed in the FLC according to the principles of the present invention; and

[0061] **FIG. 13** illustrates a black state of an HV-FLC according to an embodiment of the present invention after a thermal stress is applied.

DETAILED DESCRIPTION OF AN ILLUSTRATED EMBODIMENT

[0062] Reference will now be made in detail to an embodiment of the present invention, the example of which is illustrated in the accompanying drawings.

[0063] According to the principles of the present invention, an additive is mixed into a ferroelectric liquid crystal (FLC). Beneficially, that additive includes an acrylate compound. Before polarization, a (−) direct current electric field is applied during the phase transition. This provides for a good mono-domain alignment of the FLC. After this, the acrylate monomer aligns along the ferroelectric liquid crystal (as shown in FIG. 10). When mixing an additive into the FLC, only a small quantity of additive should be used. This tends to prevent the electro-optic properties of the FLC from varying due to the additive. The additives are 1 to 3% by weight.

[0064] FIG. 11 illustrates polymerization of an acrylate compound mixed into a FLC 310. As the FLC 310 mixed with the acrylate compound is exposed to light, intra-layer or inter-layer polymer networks 320 are formed along the molecular layer boundaries 300 of the FLC 310. This is due to the polymerization of the acrylate compound caused by the light. That polymerization tends to stabilize the FLC molecules. Beneficially, the light that is used for polymerization is ultraviolet light. The acrylate compounds beneficially includes monoacrylate and diacrylate compounds.

[0065] Now, the process of fabricating a liquid crystal panel implementing the FLC layer will be provided.

[0066] At first, the FLC is mixed with an additive. The mixed FLC is then interposed between first and second substrates of a liquid crystal panel. The substrates are then sealed using a sealant. The first and second substrates preferably have, respectively, first and second orientation films on their opposing surfaces, and the first and second orientation films are beneficially adapted for homogeneous alignment.

[0067] The first substrate includes a transparent substrate. A pixel electrode and a color filter are respectively formed on the first and second substrates. In addition, the present invention includes a backlight.

[0068] In the case of a HV-FLC, the HV-FLC is mixed with a small quantity of additives. The HV-FLC is aligned during the transition phase from an N* phase to an Sc* phase by the application of a direct electric field to the HV-FLC. After the HV-FLC in the Sc* phase becomes mono-stable, the direct electric field is removed. Then, light is used to expose the HV-FLC. The resulting polymer networks form across and along the HV-FLC molecular layers. The amount of the additives is beneficially controlled such that the polymer-stabilized HV-FLC has similar optical properties to that of an HV-FLC without additives. The principles of the present invention can be also be applied to a V shaped FLC (during the SmA⇒SmC* phase transition).

[0069] When a thermal stress is applied to a polymer-stabilized HV-FLC, an Sc* to N* phase transition occurs. Then, when the N* phase transitions back to the Sc* phase (by another temperature change) the liquid crystal molecules return to the mono-stable alignment. Significantly, the electro-optical properties of a polymer-stabilized HV-FLC tend to be stable over temperature changes. This result is similar to what is shown in FIG. 12.

[0070] FIG. 13 is an enlarged view of an HV-FLC according to the principles of the present invention after a thermal stress. Unlike that shown in FIG. 9B, there is no white. Thus, the liquid crystal molecules maintain their alignment in spite of the thermal stress.

[0071] In another aspect, to form the polymer networks, ultra-violet (UV) rays of light are beneficially used. The irradiating energy of the UV light is beneficially controlled to be within a range of 40 to 200 mJ/cm². This prevents cleavage of the FLC as well as providing a sufficient anchoring force between the orientation film and the FLC molecules. Further, the UV light source beneficially has a power such that a rapid polymerization is prevented (say between 1 to 5 mW/cm²).

[0072] The present invention can be applied to a liquid crystal displays that use a TFT (thin film transistor), a MIM (Metal-insulator-Metal), a poly-Si or a diode.

[0073] While the invention has been particularly shown and described with reference to an embodiment thereof, it will be understood by those skilled in the art that the foregoing and other changes in form and details may be made therein without departing from the spirit and scope of the invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A method of fabricating a liquid crystal display device, comprising:

forming a first orientation film on a first substrate;

forming a second orientation film on a second substrate;

spacing the first and second substrates apart by a gap;

forming a ferroelectric liquid crystal layer between the first and second substrates, the ferroelectric liquid crystal layer having an additive;

aligning the ferroelectric liquid crystal layer around a phase transition temperature of a SmC* phase; and

forming polymer networks in the ferroelectric liquid crystal layer by polymerizing the additives.

2. A method of fabricating a liquid crystal display device according to claim 1, wherein the additive includes an acrylate compound.

3. A method of fabricating a liquid crystal display device according to claim 1, wherein a weight % of the additive in the ferroelectric liquid crystal layer is between 1 and 3%.

4. A method of fabricating a liquid crystal display device according to claim 1, wherein the polymer networks are formed by exposing the ferroelectric liquid crystal layer to light.

5. A method of fabricating a liquid crystal display device according to claim 4, wherein the exposing light is ultra-violet.

6. A method of fabricating a liquid crystal display device according to claim 5, wherein the energy of the ultraviolet is between 40 and 200 nJ/cm².

7. A method of fabricating a liquid crystal display device according to claim 5, wherein the power of the ultraviolet is between 1 and 5 mW/cm².

8. A method of fabricating a liquid crystal display device according to claim 1, wherein the polymer networks are formed along molecule layer boundaries of the ferroelectric liquid crystal layer.

9. A method of fabricating a liquid crystal display device according to claim 1, wherein the polymer networks are formed across molecule layer boundaries of the ferroelectric liquid crystal layer.

10. A method of fabricating a liquid crystal display device according to claim 1, wherein the phase transition temperature includes those from the SmA phase to the SmC* phase.

11. A method of fabricating a liquid crystal display device according to claim 1, wherein the phase transition temperature includes those from the N* phase to the SmC* phase.

12. A method of fabricating a liquid crystal display device according to claim 1, wherein the electric field is a direct current electric field.

13. A liquid crystal display device, comprising:

a first orientation film on a first substrate;

a second substrate spaced apart from said first substrate by a gap;

a second orientation film on the second substrate; and

a ferroelectric liquid crystal in the gap, wherein the ferroelectric liquid crystal layer includes a polymer network.

14. A liquid crystal device according to claim 13, wherein the polymer network is a polymerized additive.

15. A liquid crystal device according to claim 14, wherein the additive includes an acrylate compound.

16. A liquid crystal device according to claim 14, wherein the additive is between 1 and 3% by weight of the ferroelectric liquid crystal layer.

17. A liquid crystal device according to claim 13, wherein the polymer network is along molecule layer boundaries of the ferroelectric liquid crystal layer.

18. A liquid crystal device according to claim 13, wherein the polymer network is across molecule layer boundaries of the ferroelectric liquid crystal layer.

19. A liquid crystal device according to claim 13, further comprising a backlight.

20. A liquid crystal device according to claim 13, further comprising a thin film transistor.

21. A liquid crystal device according to claim 13, wherein the first substrate is transparent.

22. A liquid crystal device according to claim 21, further comprising a pixel electrode on the first substrate.

23. A liquid crystal device according to claim 13, further comprising a color filter on the second substrate.

* * * * *

专利名称(译)	一种铁电液晶面板的制作方法		
公开(公告)号	US20040207776A1	公开(公告)日	2004-10-21
申请号	US10/848065	申请日	2004-05-19
[标]申请(专利权)人(译)	崔硕原 蔡苏SEOK		
申请(专利权)人(译)	CHOI SUK-WON 蔡苏硕		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	CHOI SUK WON CHOI SU SEOK		
发明人	CHOI, SUK-WON CHOI, SU-SEOK		
IPC分类号	G02F1/13 G02F1/1334 G02F1/1337 G02F1/141 G02F1/1333		
CPC分类号	G02F1/141 G02F2001/13345 G02F2001/13775		
优先权	1019990059598 1999-12-21 KR		
其他公开文献	US7362392		
外部链接	Espacenet USPTO		

摘要(译)

一种液晶显示装置，以及制造这种液晶显示装置的方法，其使用铁电液晶（FLC）。将添加剂添加到铁电液晶中。然后将添加剂用于形成聚合物网络，有利地通过暴露于紫外光。合适的添加剂包括丙烯酸酯化合

