



(19) **United States**

(12) **Patent Application Publication**  
Moon et al.

(10) **Pub. No.: US 2008/0239175 A1**  
(43) **Pub. Date: Oct. 2, 2008**

(54) **LIQUID CRYSTAL DISPLAY DEVICE WITH SENSING FUNCTION AND METHOD OF FABRICATING THE SAME**

**Publication Classification**

- (51) **Int. Cl.**  
*G02F 1/136* (2006.01)  
*H01L 21/84* (2006.01)
- (52) **U.S. Cl.** ..... 349/12; 438/155; 257/E21.7
- (57) **ABSTRACT**

(76) Inventors: **Su Hwan Moon**, Gumi-si (KR);  
**Tae Hwan Kim**, Seoul (KR)

Correspondence Address:  
**BRINKS HOFER GILSON & LIONE**  
**P.O. BOX 10395**  
**CHICAGO, IL 60610 (US)**

(21) Appl. No.: **11/967,680**

(22) Filed: **Dec. 31, 2007**

(30) **Foreign Application Priority Data**

Mar. 30, 2007 (KR) ..... P 2007-0031485

A liquid crystal display device with a sensing function and a method of fabricating the same are disclosed. The device comprising gate and data lines crossing each other on a substrate, so as to define a pixel region including a pixel electrode; a first switching thin film transistor disposed at a crossing of the gate and data lines; a sensing thin film transistor, disposed at a predetermined portion of the pixel region, that senses external light; a sensing storage capacitor that stores a signal sensed by the sensing thin film transistor; and a second switching thin film transistor that receives the sensing signal stored and reads information that is externally inputted, wherein the sensing storage capacitor and the second switching thin film transistor are provided with a reflective region including a reflective electrode.

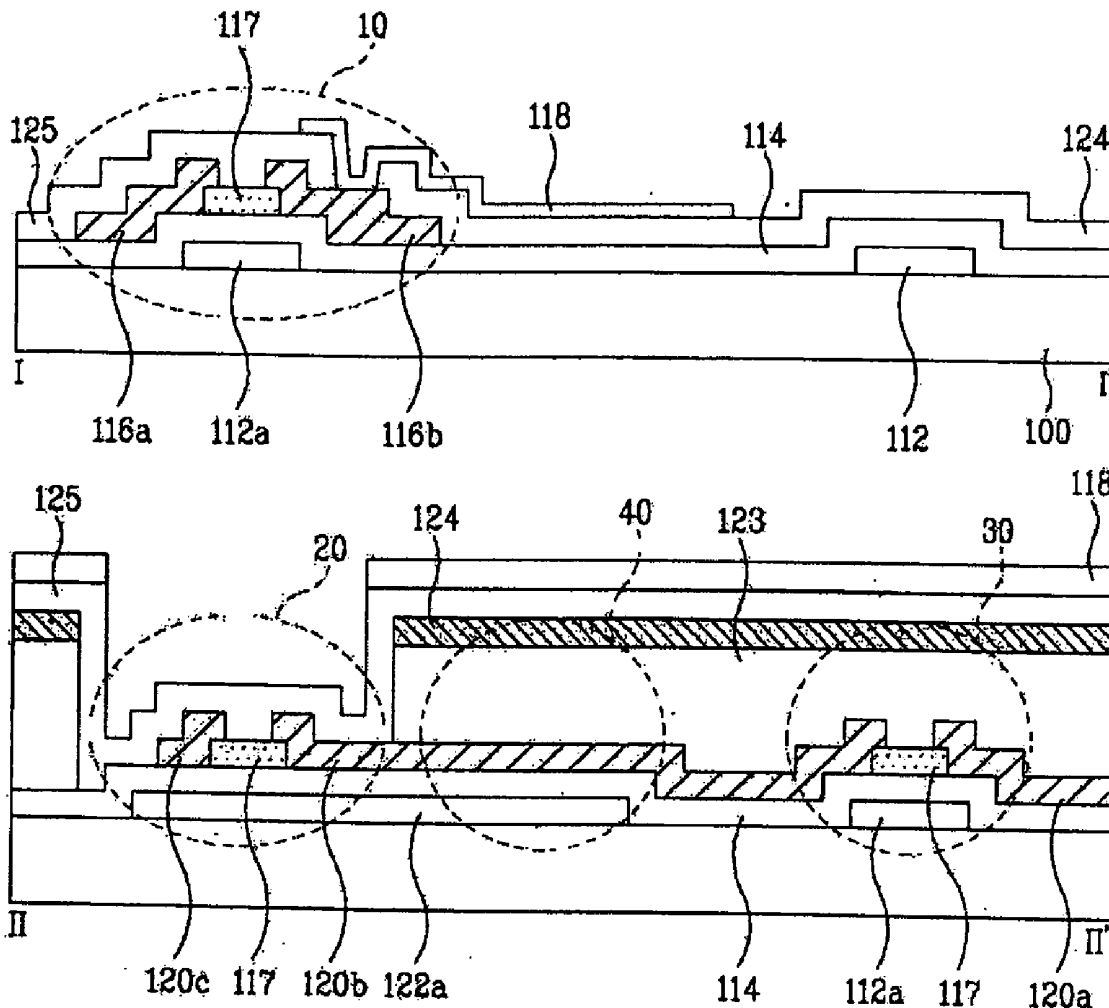


FIG. 1

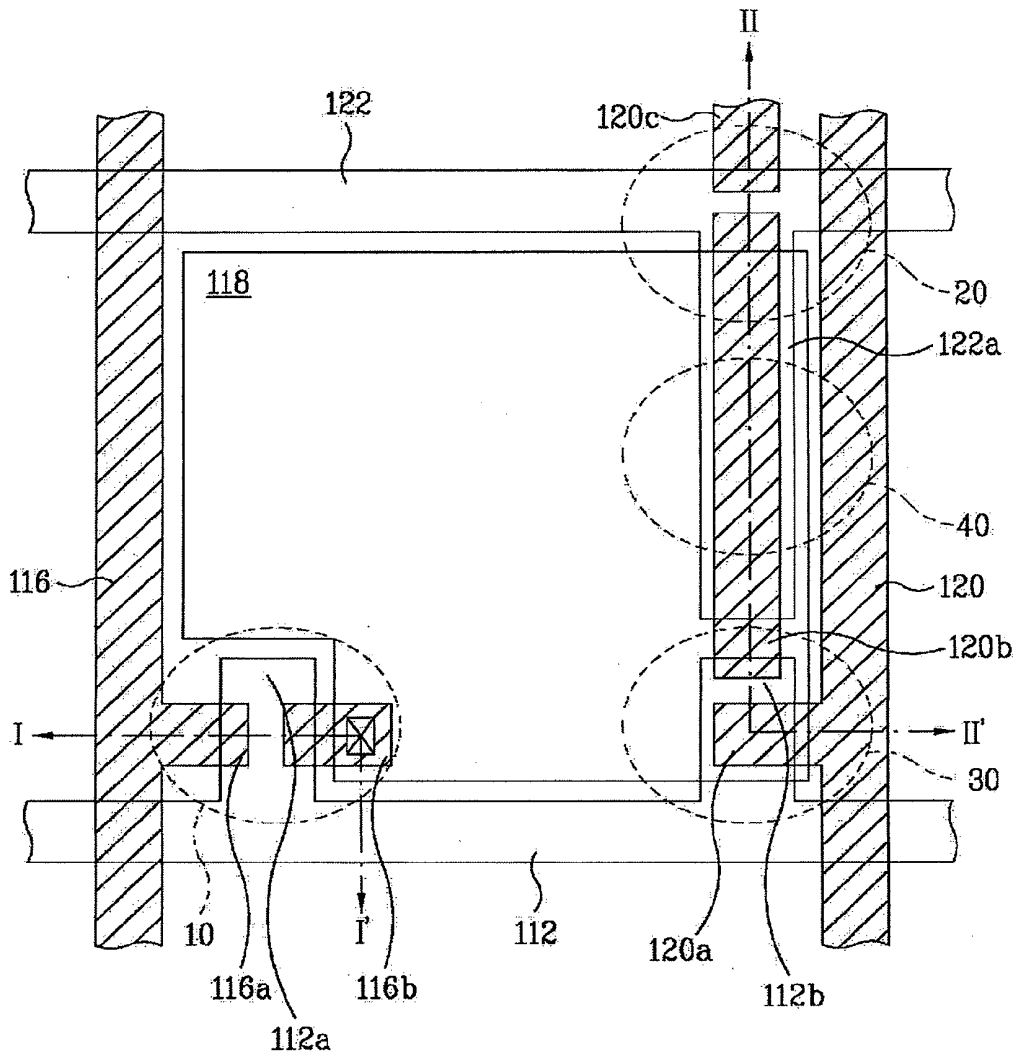


Fig. 2

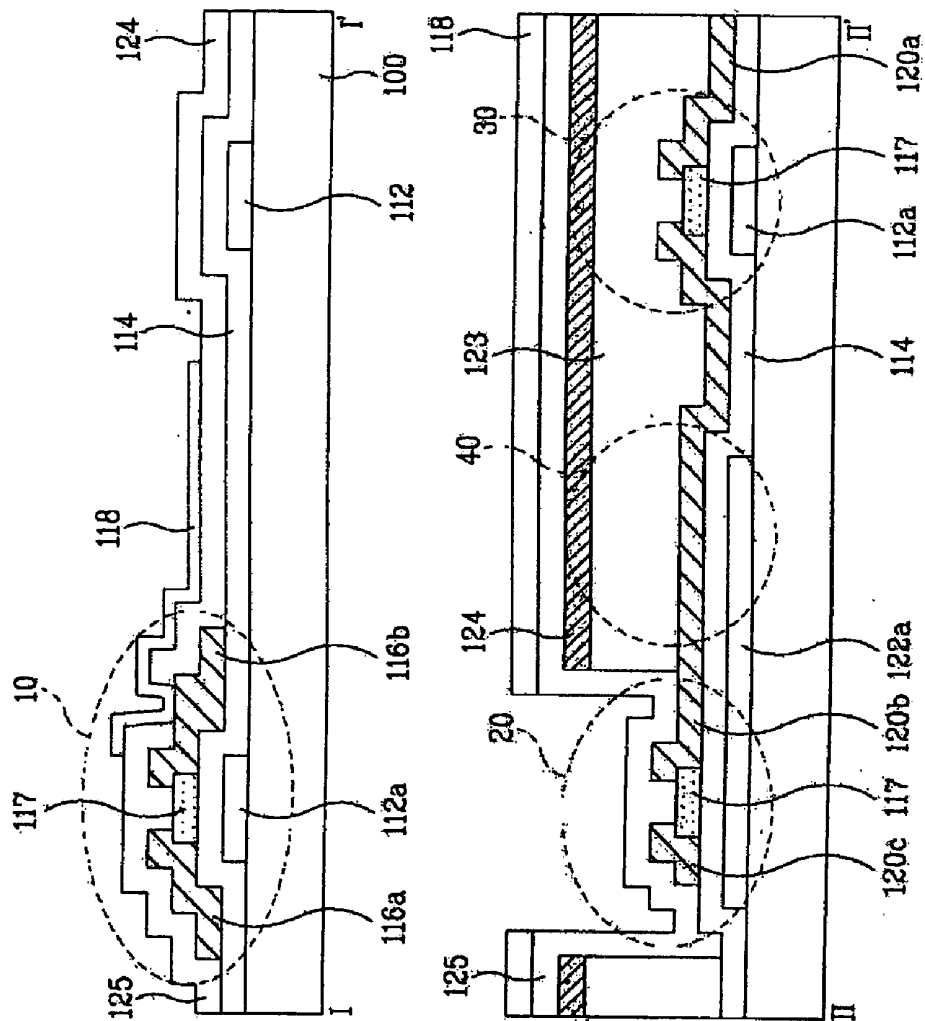


FIG. 3A

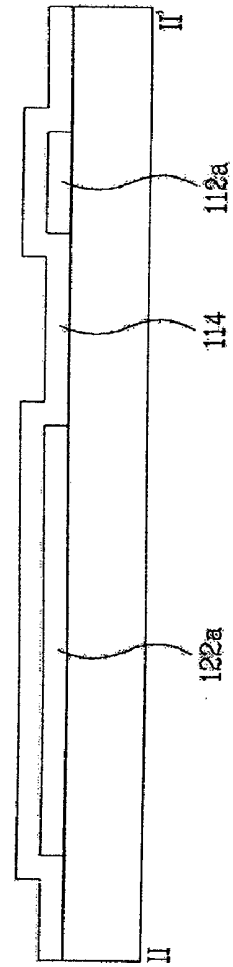
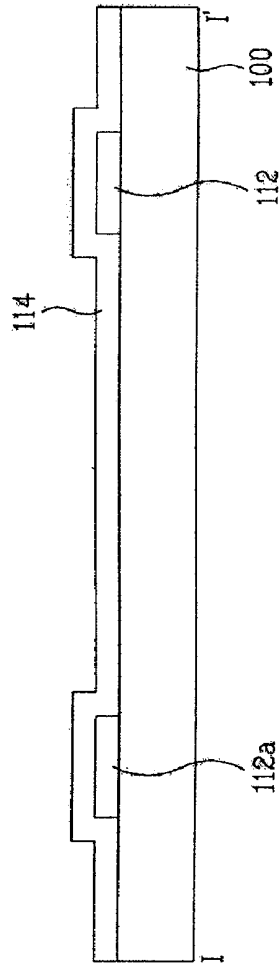


FIG. 3B

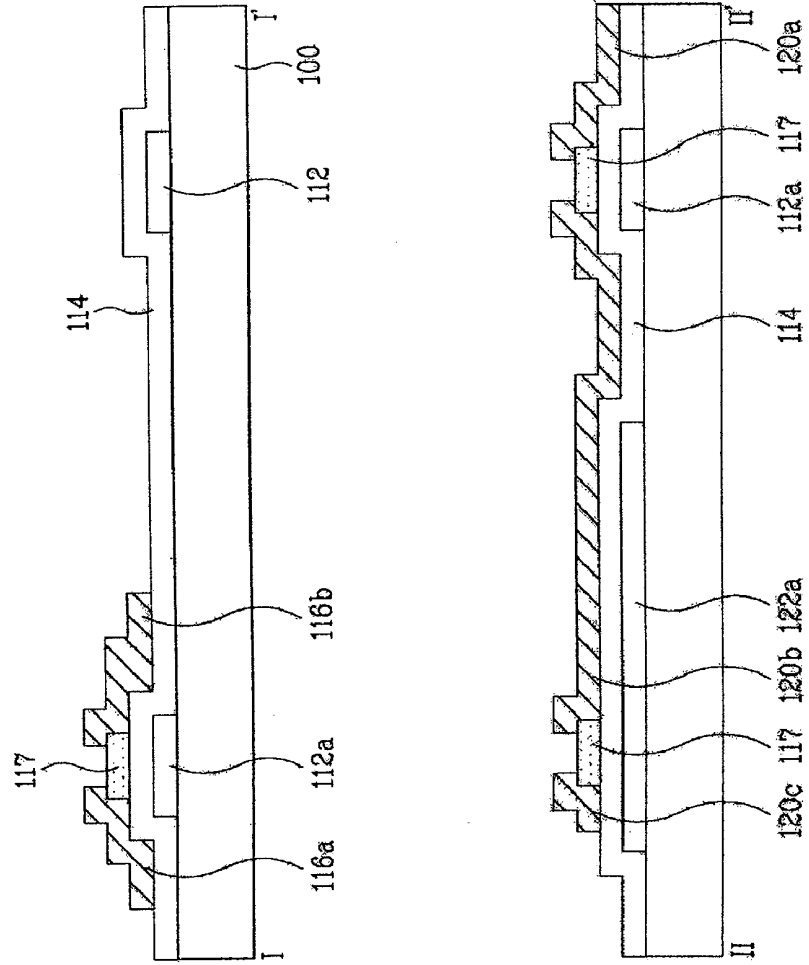


FIG. 3C


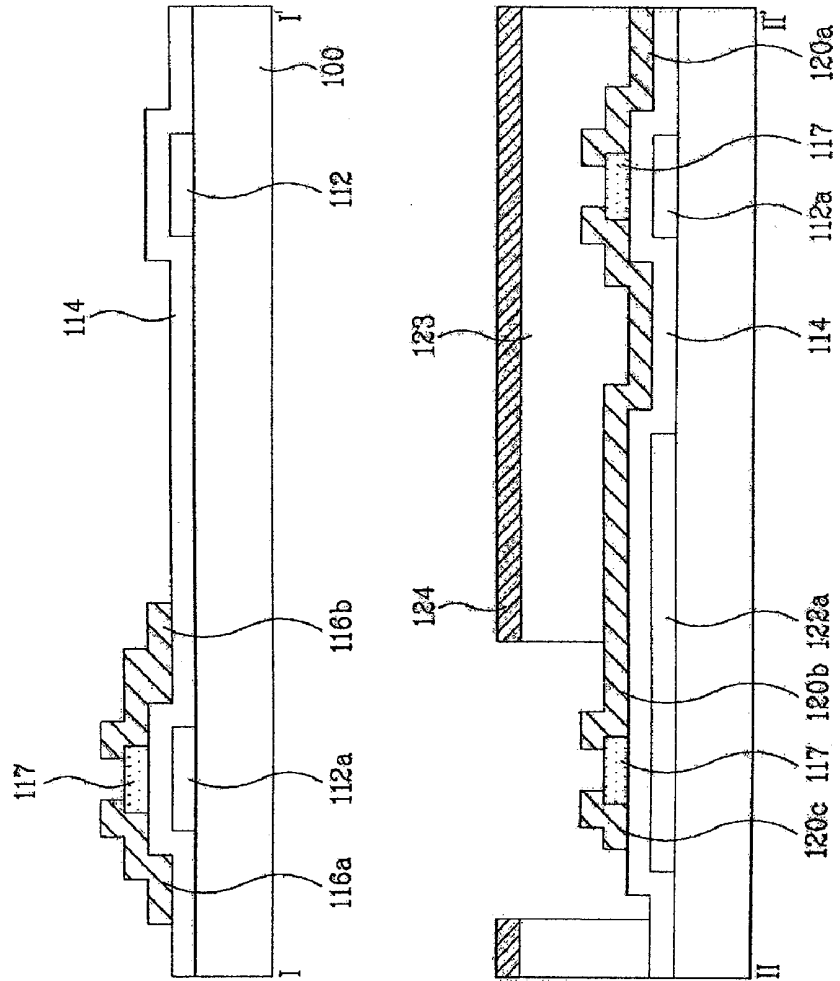


Fig. 3D

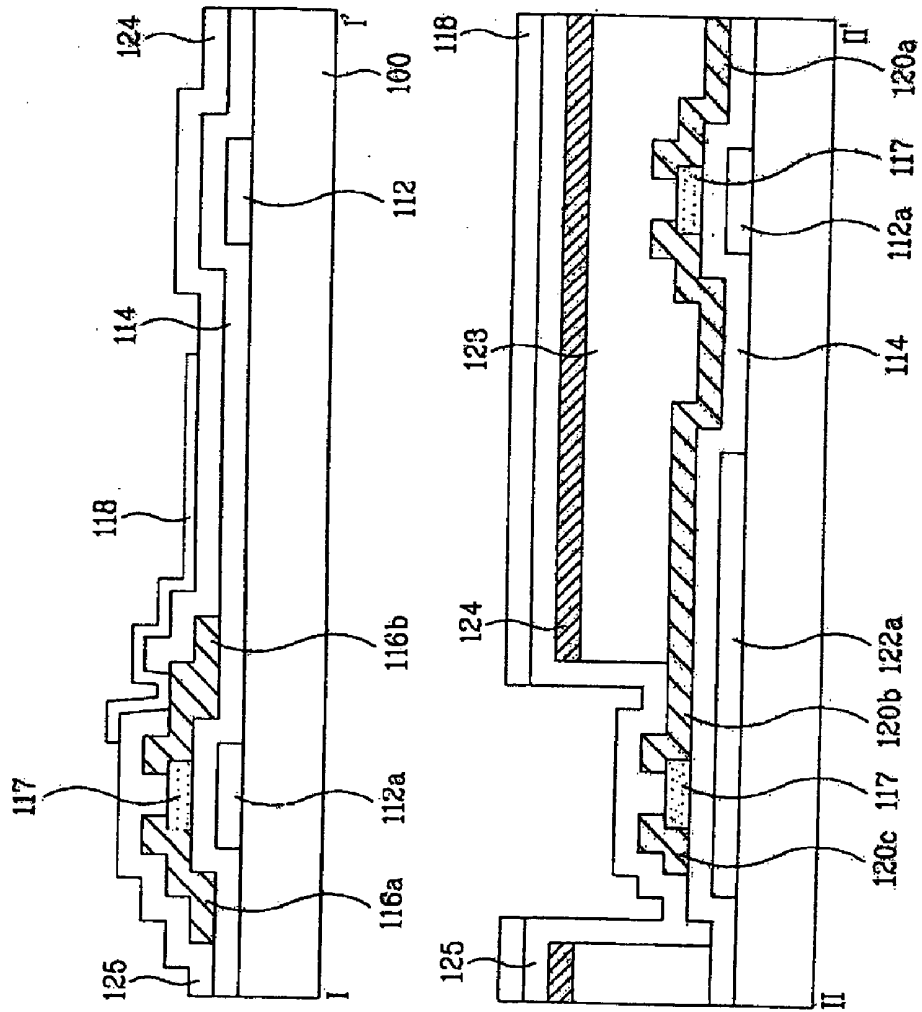

**LIQUID CRYSTAL DISPLAY DEVICE WITH  
SENSING FUNCTION AND METHOD OF  
FABRICATING THE SAME**

CLAIM FOR PRIORITY

**[0001]** This application claims the benefit of Korean Patent Application No. P2007-31485 filed Mar. 30, 2007, which is hereby incorporated by reference as if fully set forth herein.

BACKGROUND

**[0002]** 1. Field of the Invention

**[0003]** The present invention relates to a liquid crystal display device and a method of fabricating the same, and more particularly, to a liquid crystal display device with a sensing function and a method of fabricating the same.

**[0004]** 2. Discussion of the Related Art

**[0005]** A liquid crystal display device includes a color filter substrate provided with a color filter and a black matrix; a thin film transistor array substrate provided with a thin film transistor used as a switching unit and a pixel electrode; and a liquid crystal layer formed by injecting a liquid crystal material having an anisotropic dielectric constant into a space between the color filter substrate and the thin film transistor array substrate. A different electric potential is applied to the electrodes on the substrates. The intensity of a resulting electric field formed in the liquid crystal material can be controlled to thereby change alignment of liquid crystal molecules in the liquid crystal layer. Through the change in alignment of the liquid crystal molecules, it is possible to control an amount of light passing through a transparent insulation substrate, thereby displaying desired images.

**[0006]** The liquid crystal display device does not itself emit light. Therefore, it is necessary to provide the liquid crystal display device with a backlight unit. The backlight unit is provided at the rear surface of liquid crystal panel to display images, so that an entire screen is illuminated uniformly with the light emitted from the backlight unit. Based on a structure of the thin film transistor array substrate, the liquid crystal display device can be classified into a display function and a sensing function (touch sensor, fingerprint sensor, etc.).

**[0007]** In case where the liquid crystal display device has a sensing function, each pixel region is provided with a sensor driving circuit. The sensor driving circuit formed in each pixel region is provided with a light-shielding region, which prevents the incidence of light generated from the backlight unit.

**[0008]** Due to the sensor driving circuit with the light-shielding region in each pixel region, a light-transmission region, which permits the incidence of light generated from the backlight unit, is decreased in size.

**[0009]** Thus, the entire luminance of liquid crystal panel is decreased.

**[0010]** Also, a liquid crystal display device with the sensing function includes the sensor driving circuit as well as the switching unit, so that a power consumption of the liquid crystal display panel is increased.

SUMMARY

**[0011]** A liquid crystal display device with a sensing function comprises gate and data lines crossing each other on a substrate, so as to define a pixel region including a pixel electrode. A first switching thin film transistor is formed at a crossing of the gate and data lines. A sensing thin film transistor

is formed at a predetermined portion of the pixel region for sensing external light. A sensing storage capacitor stores a signal sensed by the sensing thin film transistor. A second switching thin film transistor receives the sensing signal stored and reads information that is externally input. The sensing storage capacitor and the second switching thin film transistor are provided with a reflective region including a reflective electrode.

**[0012]** In another aspect, a method of fabricating a liquid crystal display device with sensing function comprises forming gate patterns including a gate line, a gate electrode of a first switching thin film transistor, a gate electrode of a second switching thin film transistor, and a gate electrode of a sensing thin film transistor on a substrate; forming a gate insulation film on the substrate including the gate patterns; forming a semiconductor layer on the first switching thin film transistor, the second switching thin film transistor and the sensing thin film transistor formed on the substrate including the gate insulation film; forming source/drain electrode patterns including a data line crossing the gate line with the gate insulation film interposed therebetween, source and drain electrodes of the first switching thin film transistor, source and drain electrodes of the second switching thin film transistor, and driving source and drain electrodes of the sensing thin film transistor; forming a first passivation film and a reflective electrode on the regions of the storage capacitor and the second switching thin film transistor; forming a second passivation film including a hole to expose the drain electrode of the first switching thin film transistor on the substrate including the reflective electrode; and forming a pixel electrode connected to the drain electrode of the first switching thin film transistor through the hole.

**[0013]** It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

**[0014]** The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

**[0015]** FIG. 1 is a plan diagram illustrating a liquid crystal display device with a sensing function according to the present disclosure;

**[0016]** FIG. 2 is a cross sectional diagram along I-I' and II-II' of FIG. 1; and

**[0017]** FIGS. 3A to 3D are cross sectional diagrams illustrating a method of fabricating a liquid crystal display device with a sensing function according to the present disclosure.

DETAILED DESCRIPTION OF THE  
EMBODIMENTS

**[0018]** Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0019] Hereinafter, a liquid crystal display device according to the present invention will be explained with reference to the accompanying drawings.

[0020] FIG. 1 is a plan diagram illustrating a liquid crystal display device with a sensing function according to the present disclosure. FIG. 2 is a cross sectional diagram along I-I' and II-II' of FIG. 1. FIGS. 1 and 2 illustrate a thin film transistor array substrate of a liquid crystal display device with a sensing function according to the present disclosure. The thin film transistor array substrate is positioned in opposite to a color filter array substrate in state of interposing a liquid crystal layer therebetween, wherein the color filter array substrate includes a black matrix and a color filter.

[0021] As shown in FIGS. 1 and 2, the thin film transistor array substrate with the sensing function according to the present invention includes gate and data lines 112 and 116 crossing each other on a lower substrate 100 so as to define a pixel region in state of interposing a gate insulation film 114 therebetween. A first switching thin film transistor 10 of pixel is formed at each crossing of the gate and data lines 112 and 116. A pixel electrode 118 is formed in a predetermined portion of the pixel region. A read-out line 120 is formed in parallel to the data line 116 in state of interposing the pixel electrode 118 within the pixel region. First and second driving voltage supplying lines (not shown, 122) are formed in parallel to the gate line, to supply a driving voltage to a sensing thin film transistor 20. A sensing thin film transistor 20 is formed at a crossing of the second driving voltage supplying line 122 and the read-out line 120. A second switching thin film transistor 30 is formed at a crossing of the gate line 112 and the read-out line 120. In addition, a sensing storage capacitor 40 is disposed between the sensing thin film transistor 20 and the second switching thin film transistor 30, and a pixel storage capacitor (not shown) is disposed at an overlap between the pixel electrode 118 and the previous gate line.

[0022] The first switching thin film transistor 10 includes a gate electrode 112a diverged from the gate line 112; a source electrode 116a diverged from the data line 116; a drain electrode 116b connected to the pixel electrode 118 via a contact hole; a semiconductor layer 117 overlapped with the gate electrode 112a and forming a channel between the source and drain electrodes 116a and 116b; and an ohmic contact layer (not shown) formed on the semiconductor layer 117. The semiconductor layer 117 overlaps with the source electrode 116a and the drain electrodes 116b, and includes a channel region between the source and drain electrodes 116a and 116b. Accordingly, the first switching thin film transistor 10 charges and maintains the pixel electrode 118 with a pixel voltage signal supplied to the data line 116 in response to a gate signal supplied to the gate line 112.

[0023] The pixel electrode 118 is connected to the drain electrode 116b of the first switching thin film transistor 10 via a contact hole passing through a passivation film 124. Thus, there is a potential difference between the pixel electrode 118 charged with the pixel voltage and the common electrode on the color filter array substrate (not shown) or on the lower substrate having the pixel electrode. By this potential difference, the liquid crystal molecules provided between the thin film transistor array substrate and the color filter array substrate are rotated to transmit the incident light through the pixel electrode 118 from the lower surface of the lower substrate toward the color filter array substrate.

[0024] The pixel storage capacitor (not shown) is formed by the previous gate line 116 and the pixel electrode 118, and

the gate insulation film 114 and the passivation film 124 are positioned between the gate line 116 and the pixel electrode 118. Accordingly, the pixel storage capacitor (not shown) makes the pixel electrode maintained with the pixel voltage charged therein until the next pixel voltage is charged therein.

[0025] The liquid crystal display device with the sensing function includes a sensing driving circuit as well as the first switching thin film transistor and the pixel storage capacitor. The sensing driving circuit includes the sensing thin film transistor 20, the second storage capacitor 30 and the second switching thin film transistor 40.

[0026] The sensing thin film transistor 20 includes a gate electrode 122a connected to the second driving voltage supplying line 122 supplied with a second driving voltage; a semiconductor layer and ohmic contact layer 117 overlapped with the gate electrode 122a in state of interposing the gate insulation film 114 therebetween; a driving source electrode 120c electrically connected with the semiconductor layer and ohmic contact layer 122a and connected to the first driving voltage supplying line (not shown) supplied with a first driving voltage; and a driving drain electrode 120b positioned in opposite to the driving source electrode 120c. The sensing thin film transistor 20 includes a second contact hole (not shown) passing through the gate insulation film 114 so as to expose the predetermined portion of the first driving voltage supplying line (not shown). Also, the driving source electrode 120c is connected to the first driving voltage supplying line (not shown) via a metal pattern (not shown) formed on the second contact hole (not shown). The semiconductor layer and ohmic contact layer 117 overlap with the driving source electrode 120c and the driving drain electrode 120b, and also include the channel region between the driving source electrode 120c and the driving drain electrode 120b. Thus, the sensing thin film transistor 20 senses the incident light by touch or images, for example, fingerprints.

[0027] The first storage capacitor 40 includes a storage capacitor lower electrode 122a which is formed as one body with the gate electrode 122a of the sensing thin film transistor 20; and a storage capacitor upper electrode 120b which is overlapped with the storage capacitor lower electrode 122a in state of interposing the gate insulation film 114 therebetween, and is formed as one body with the driving drain electrode 120b of the sensing thin film transistor 20. Accordingly, the first storage capacitor 40 stores charges by a photoelectric current generated from the sensing thin film transistor 20.

[0028] The second switching thin film transistor 30 includes a gate electrode 122b formed on the substrate; a source electrode 120b connected to the storage capacitor upper electrode; a drain electrode 120a positioned in opposite to the source electrode 120b and connected to the read-out line 120; a semiconductor layer, overlapped with the gate electrode 122a, for forming the channel region between the source and drain electrodes; and an ohmic contact layer (not shown) formed on the semiconductor layer.

[0029] The operation of the disclosed sensing driving circuit will be briefly explained. As the driving voltage is applied to the driving source electrode 120c of the sensing thin film transistor 20, the voltage is applied to the gate electrode 122a, and light is sensed in the active layer, a photoelectric current path from the driving source electrode 120c to the driving drain electrode 120b through the channel is generated based on the amount of light sensed.

[0030] The photoelectric current path flows toward the storage capacitor upper electrode 120b, and simultaneously the

storage capacitor lower electrode **122a** is brought into contact with the gate electrode **122a** of the sensing thin film transistor **20**, whereby the storage capacitor is charged with the charges by the photocurrent. The charges charged in the storage capacitor are read in a read-out integrated circuit (not shown) via the second switching thin film transistor and the read-out line **120**. That is, the signal detected in the read-out integrated circuit is varied based on the amount of light sensed by the sensing thin film transistor. It is possible to sense images of a document, image scan or touch input. The sensed images may be transmitted to a controller, or the images may be realized on the liquid crystal display panel according to the control of a user.

**[0031]** The region provided with the second storage capacitor **30** and the second switching thin film transistor **40** of the sensing driving circuit is provided with a reflective region having a reflective electrode (**124** in FIG. 3D). In comparison to the related art liquid crystal display panel having the sensing driving circuit formed only with the light-shielding region, the liquid crystal display panel of the present disclosure, which includes the sensing driving circuit provided with the reflective region and light-shielding region, has a relatively higher luminescence. Also, the liquid crystal display panel according to the present disclosure includes the sensing driving circuit provided with the reflective region, so that it is possible to lower the power consumption due to the use of an external light or artificial light source.

**[0032]** FIGS. 3A to 3D are cross sectional diagrams illustrating a method of fabricating a liquid crystal display device with a sensing function according to the present disclosure.

**[0033]** After forming a gate metal layer on the substrate **100**, the gate metal layer is patterned by photolithography, thereby forming gate patterns including the gate line **112**, the gate electrode **112a** of the first switching thin film transistor **10**, the gate electrode **112b** of the second switching thin film transistor **30**, the first driving voltage supplying line (not shown), the second driving voltage supplying line **122**, and the gate electrode **122a** of the sensing thin film transistor **20**, as shown in FIG. 3A. At this time, the second driving voltage supplying line **122** is formed as one body with the storage capacitor lower electrode **122a**. Then, the gate insulation film **114** is formed on the substrate **100** including the gate patterns.

**[0034]** Thereafter, a  $n^+$ -type amorphous silicon layer is formed on the substrate **100** including the gate insulation film **114**, and is then patterned by photolithography, thereby forming the first switching thin film transistor **10**, the second switching thin film transistor **30**, and the semiconductor layer **117** of the sensing thin film transistor **20**, as shown in FIG. 3B. In this case, the semiconductor layer **117** is formed in a double-layered structure comprised of the active layer and the ohmic contact layer.

**[0035]** After forming a source/drain metal layer on the substrate **110** including the semiconductor layer **117**, the source/drain metal layer is patterned by photolithography, thereby forming source/drain patterns including the data line **116**, the source and drain electrodes **116a** and **116b** of the first switching thin film transistor **10**, the source and drain electrodes **120a** and **120b** of the second switching thin film transistor **30**, the driving source and drain electrodes **120c** and **120b** of the sensing thin film transistor **20**, the storage capacitor upper electrode **120b** of the first storage capacitor **40** connected to the driving drain electrode **120b**, and the read-out line **120**.

**[0036]** After a first passivation film is formed on the substrate **100** including the source/drain patterns, the first passi-

vation film is patterned by photolithography, thereby forming the first passivation film **123** on the first storage capacitor **40** and the second switching thin film transistor **30**, as shown in FIG. 3C. Then, a reflective electrode metal layer is formed on the substrate **100** including the first passivation film **123**, and then the reflective electrode metal layer is patterned by photolithography, thereby forming the reflective electrode **124** on the first passivation film **123**. At this time, the reflective electrode metal layer is formed of a metal material having low resistance and high reflectivity, for example, aluminum Al.

**[0037]** As shown in FIG. 3D, after forming a second passivation film **125** on the substrate **100** including the reflective electrode **124**, the second passivation film is patterned by photolithography, thereby forming the contact hole (not shown) for exposing the drain electrode of the first switching thin film transistor **30**. Then, a transparent conductive film is formed on the second passivation film **125** including the contact hole (not shown), and then the transparent conductive film is patterned by photolithography, thereby forming the pixel electrode **118** connected to the drain electrode of the first switching thin film transistor **30**. The process is completed.

**[0038]** In the aforementioned drawings, the sensing driving circuit is positioned at the right side of the pixel region. However, it is possible to position the sensing driving circuit at the left side, upper side or lower side of the pixel region.

**[0039]** As mentioned above, the liquid crystal display device according to the present invention and the method of fabricating the same have the following advantages.

**[0040]** In the liquid crystal display device according to the present invention, the sensing driving circuit is provided with the reflective region. Thus, as compared with the related art liquid crystal panel including the sensing driving circuit provided only with the light-shielding region, the liquid crystal display panel of the present invention including the sensing driving circuit provided with the reflective region and the light-shielding region has the improved luminescence.

**[0041]** The liquid crystal display device according to the present disclosure includes the sensing driving circuit provided with the reflective region, to thereby reduce the power consumption due to the use of an external light or artificial light source.

**[0042]** It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the inventions. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A liquid crystal display device with sensing function comprising:
  - gate and data lines crossing each other on a substrate, so as to define a pixel region including a pixel electrode;
  - a first switching thin film transistor disposed at a crossing of the gate and data lines;
  - a sensing thin film transistor, disposed at a predetermined portion of the pixel region, that senses external light;
  - a sensing storage capacitor that stores a signal sensed by the sensing thin film transistor; and
  - a second switching thin film transistor that receives the sensing signal stored and reads information externally inputted,

- wherein the sensing storage capacitor and the second switching thin film transistor are provided with a reflective region including a reflective electrode.
2. The device of claim 1, wherein the sensing thin film transistor comprises:
- a gate electrode connected to a first driving voltage supplying line supplied with a first driving voltage;
  - a driving source electrode connected to a second driving voltage supplying line supplied with a second driving voltage;
  - a driving drain electrode disposed in opposite to the driving source electrode; and
  - a semiconductor layer disposed between the gate electrode and the driving source electrode or between the gate electrode and the driving drain electrode.
3. The device of claim 1, wherein the sensing storage capacitor comprises:
- a storage capacitor lower electrode formed as one body with the gate electrode of the sensing thin film transistor; and
  - a storage capacitor upper electrode overlapped with the storage capacitor lower electrode in state of interposing an insulation film therebetween, and formed as one body with the driving drain electrode of the sensing thin film transistor.
4. The device of claim 1, wherein the second switching thin film transistor comprises:
- a gate electrode connected to the gate line;
  - a source electrode connected to the storage capacitor upper electrode;
  - a drain electrode positioned in opposite to the source electrode; and
  - a semiconductor layer disposed between the gate electrode and the source electrode or between the gate electrode and the drain electrode.
5. The device of claim 4, wherein the drain electrode is connected to a read-out line formed in parallel to the data line.
6. A method of fabricating a liquid crystal display device with sensing function comprising:
- forming gate patterns including a gate line, a gate electrode of a first switching thin film transistor, a gate electrode of a second switching thin film transistor, and a gate electrode of a sensing thin film transistor on a substrate;
  - forming a gate insulation film on the substrate including the gate patterns;
  - forming a semiconductor layer on the first switching thin film transistor, the second switching thin film transistor and the sensing thin film transistor formed on the substrate including the gate insulation film;
  - forming source/drain electrode patterns including a data line crossing the gate line with the gate insulation film interposed therebetween, source and drain electrodes of the first switching thin film transistor, source and drain electrodes of the second switching thin film transistor, and driving source and drain electrodes of the sensing thin film transistor;
  - forming a first passivation film and a reflective electrode on the regions of the storage capacitor and the second switching thin film transistor;
  - forming a second passivation film including a hole to expose the drain electrode of the first switching thin film transistor on the substrate including the reflective electrode; and
  - forming a pixel electrode connected to the drain electrode of the first switching thin film transistor through the hole.
7. The method of claim 6, wherein forming the gate patterns comprises forming a first driving voltage supplying line and a second driving voltage supplying line.
8. The method of claim 7, wherein the second driving voltage supplying line is formed as one body with the gate electrode of the sensing thin film transistor and the storage capacitor lower electrode.
9. The method of claim 6, wherein forming the source/drain electrode pattern comprises forming a read-out line connected to the drain electrode of the second switching thin film transistor and formed in parallel to the data line.
10. The method of claim 6, wherein the driving drain electrode of the sensing thin film transistor is formed as one body with the storage capacitor upper electrode of the first storage capacitor and the source electrode of the second switching thin film transistor.

\* \* \* \* \*

专利名称(译)	具有传感功能的液晶显示装置及其制造方法		
公开(公告)号	<a href="#">US20080239175A1</a>	公开(公告)日	2008-10-02
申请号	US11/967680	申请日	2007-12-31
[标]申请(专利权)人(译)	MOON SU HWAN 金泰HWAN		
申请(专利权)人(译)	MOON SU HWAN 金泰HWAN		
当前申请(专利权)人(译)	MOON SU HWAN 金泰HWAN		
[标]发明人	MOON SU HWAN KIM TAE HWAN		
发明人	MOON, SU HWAN KIM, TAE HWAN		
IPC分类号	G02F1/136 H01L21/84		
CPC分类号	G02F1/133362 G02F1/13338 G02F1/13624 H01L27/124 H01L27/12 H01L27/13 G02F2001/13312		
优先权	1020070031485 2007-03-30 KR		
其他公开文献	US8111344		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

公开了一种具有传感功能的液晶显示装置及其制造方法。该器件包括在基板上彼此交叉的栅极线和数据线，以限定包括像素电极的像素区域；第一开关薄膜晶体管，设置在栅极线和数据线的交叉处；传感薄膜晶体管，设置在像素区域的预定部分，用于感测外部光；感测存储电容器，存储由感测薄膜晶体管感测的信号；接收存储的感测信号并读取外部输入的信息的第二开关薄膜晶体管，其中，感测存储电容器和第二开关薄膜晶体管设置有包括反射电极的反射区域。

