



US 20080303775A1

(19) **United States**(12) **Patent Application Publication**
Guo et al.(10) **Pub. No.: US 2008/0303775 A1**(43) **Pub. Date: Dec. 11, 2008**(54) **LIQUID CRYSTAL DISPLAY HAVING LOGIC
CONVERTER FOR CONTROLLING PIXEL
UNITS TO DISCHARGE**(30) **Foreign Application Priority Data**


Jun. 8, 2007 (CN) 200710074777.2

(75) Inventors: **Wei Guo, Shenzhen (CN);
Yaw-Shing Tseng, Miao-Li (TW)****Publication Classification**(51) **Int. Cl.**
G09G 3/36 (2006.01)(52) **U.S. Cl.** **345/98**

Correspondence Address:

**WEI TE CHUNG
FOXCONN INTERNATIONAL, INC.
1650 MEMOREX DRIVE
SANTA CLARA, CA 95050 (US)**(57) **ABSTRACT**

An exemplary liquid crystal display (200) includes a liquid crystal panel (240) having pixel units (248), a scanning circuit (210) configured to activate the pixel units, and a power supply circuit (230) having a control unit (231) and a logic converter (232). The control unit generates a control signal when an external command is applied to the power supply circuit. The logic converter carries out a predetermined logic calculation between the control signal and the external command. The scanning circuit activates all the pixel units to discharge in response to a result of the logic calculation, such that an image displayed by the liquid crystal panel is removed.

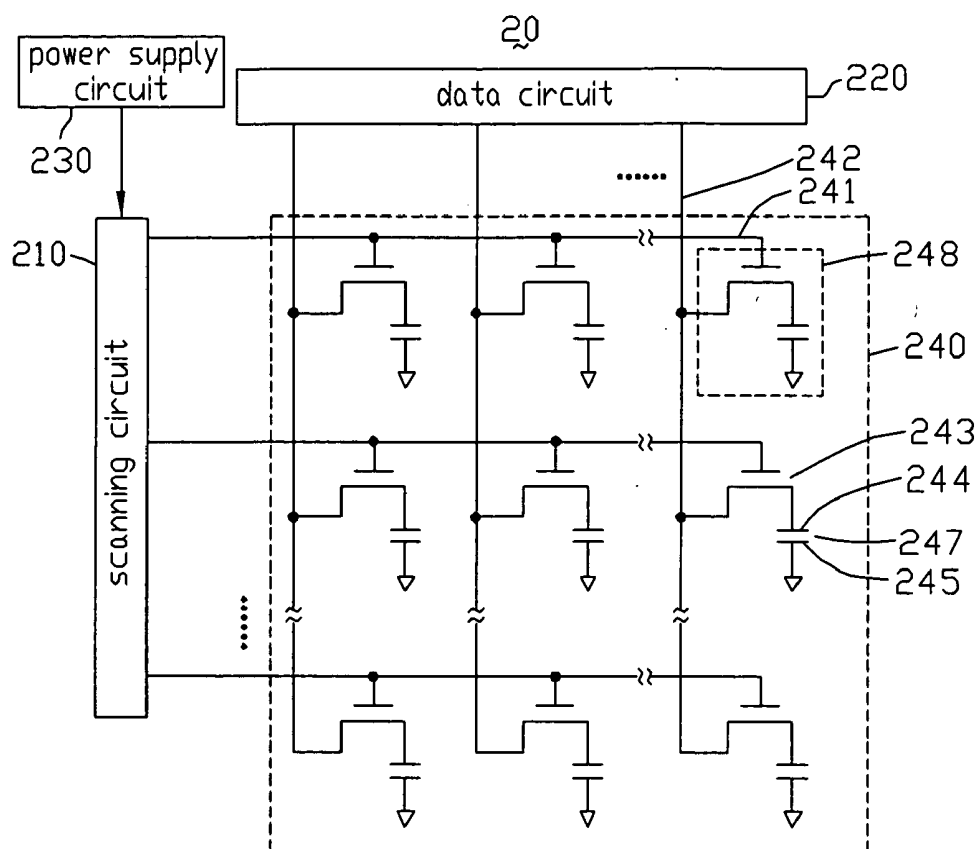(73) Assignee: **INNOCOM
TECHNOLOGY(SHENZHEN)
CO., LTD.; INNOLUX DISPLAY
CORP.**(21) Appl. No.: **12/157,016**(22) Filed: **Jun. 6, 2008**

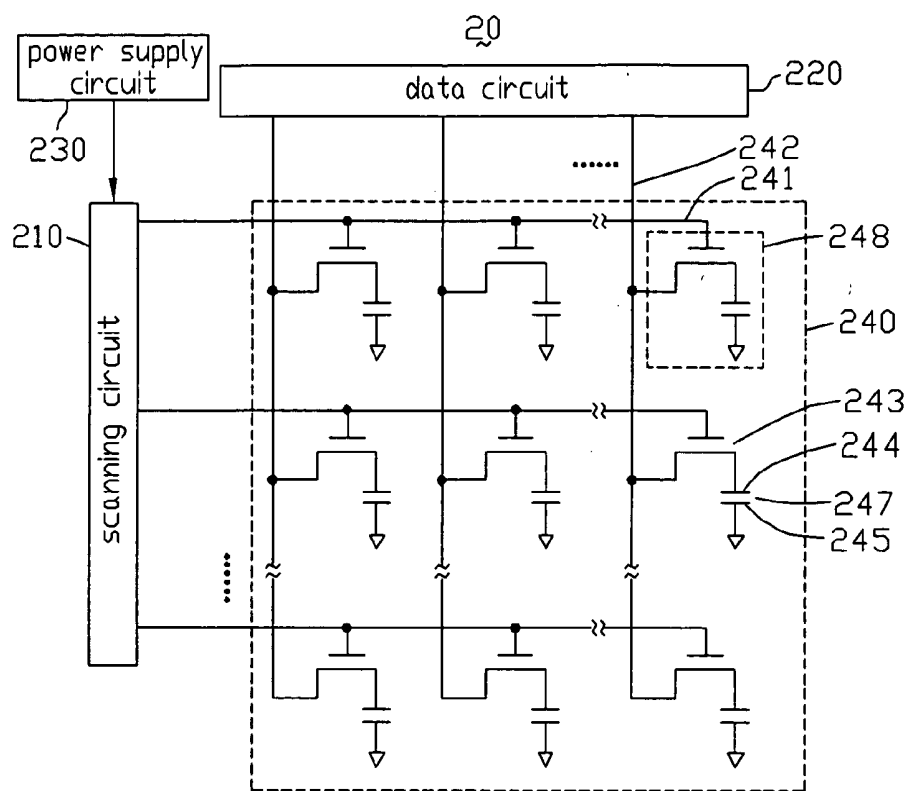


FIG. 1

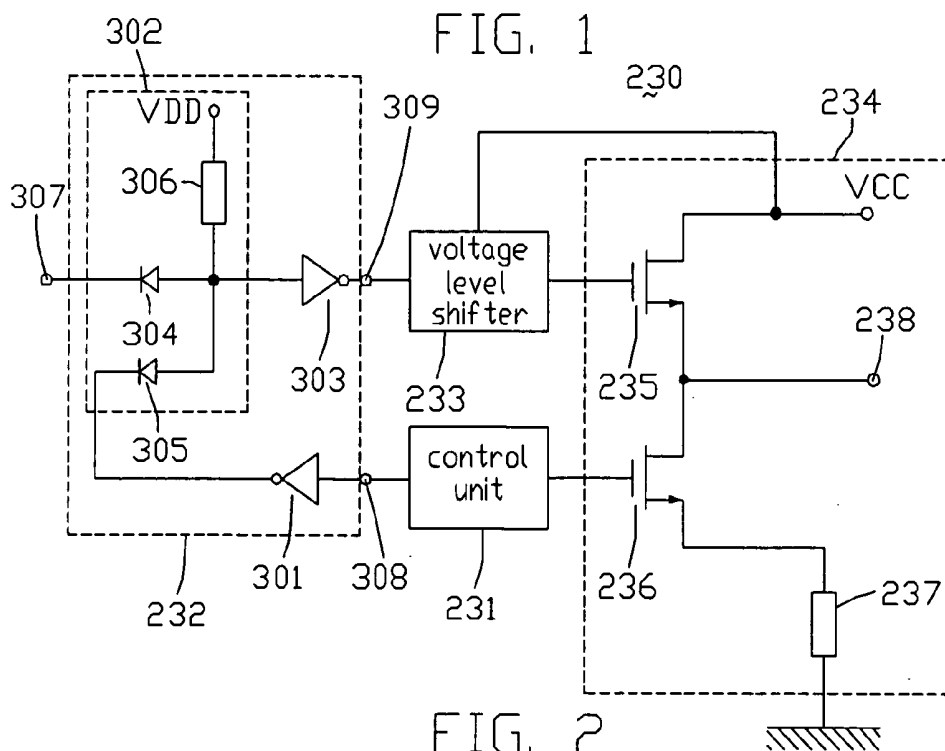


FIG. 2

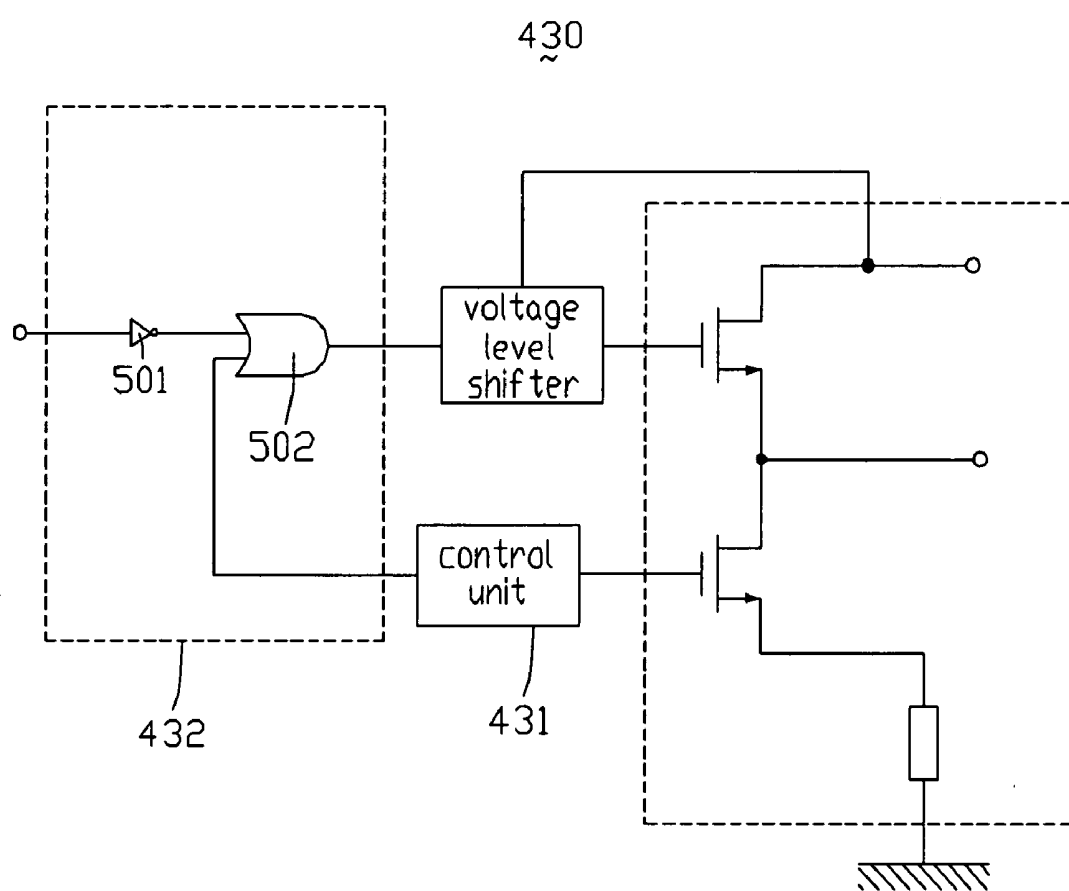


FIG. 3

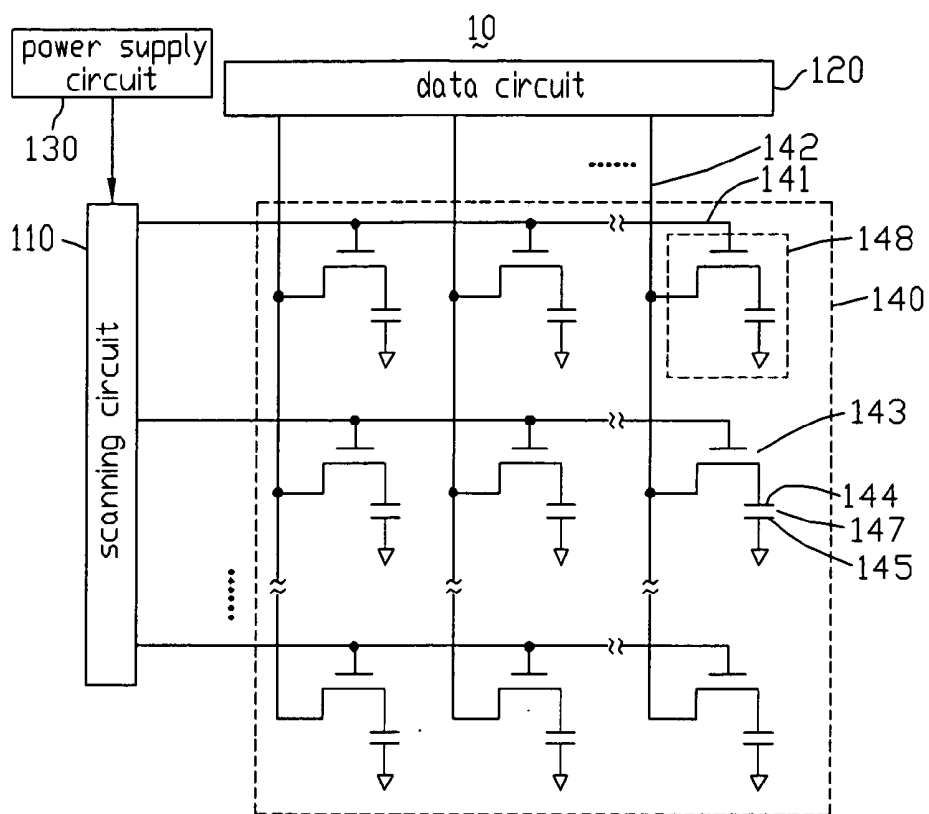


FIG. 4
(RELATED ART)

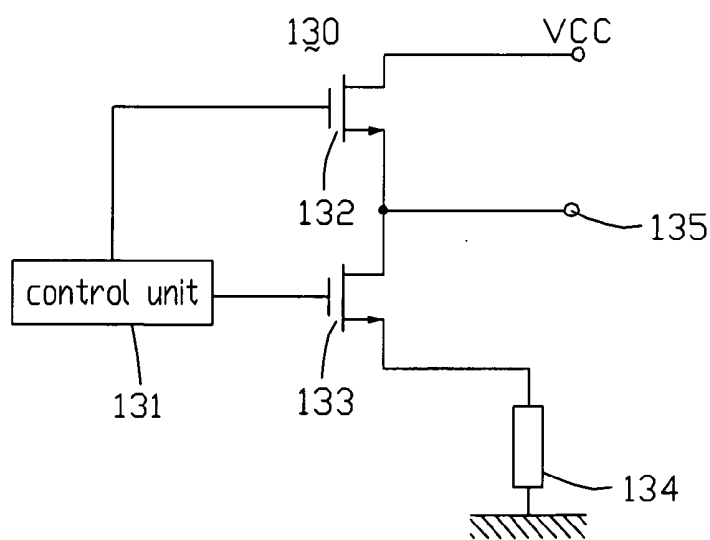


FIG. 5
(RELATED ART)

LIQUID CRYSTAL DISPLAY HAVING LOGIC CONVERTER FOR CONTROLLING PIXEL UNITS TO DISCHARGE

FIELD OF THE INVENTION

[0001] The present invention relates to liquid crystal displays (LCDs), and more particularly to an LCD that has a logic converter configured for controlling pixel units to discharge when the LCD is switched off.

GENERAL BACKGROUND

[0002] LCDs are widely used in various electronic information products, such as notebooks, personal digital assistants, video cameras, and the like.

[0003] FIG. 4 is an abbreviated circuit diagram of a conventional LCD. The LCD 10 includes a scanning circuit 110, a data circuit 120, a power supply circuit 130, and a liquid crystal panel 140. The liquid crystal panel 140 includes n rows of parallel scanning lines 141 (where n is a natural number), m columns of parallel data lines 142 perpendicular to the scanning lines 141 (where m is also a natural number), and a plurality of pixel units 148 cooperatively defined by the crossing scanning lines 141 and data lines 142. The pixel units 148 are arranged in a matrix. The scanning lines 141 are connected to the scanning circuit 110, and the data lines 142 are connected to the data circuit 120.

[0004] Each pixel unit 148 includes a thin film transistor (TFT) 143, a pixel electrode 144, and a common electrode 145. A gate electrode of the TFT 143 is connected to a corresponding one of the scanning lines 141, and a source electrode of the TFT 143 is connected to a corresponding one of the data lines 142. Further, a drain electrode of the TFT 143 is connected to the pixel electrode 144. The common electrode 145 is generally opposite to the pixel electrode 144, with liquid crystal molecules (not shown) sandwiched therebetween, so as to cooperatively form a liquid crystal capacitor 147.

[0005] Referring to FIG. 5, the power supply circuit 130 includes a control unit 131, a first transistor 132, a second transistor 133, a resistor 134, and an output terminal 135. The first and second transistors 132, 133 are both P-channel metal oxide semiconductor (PMOS) transistors. A gate electrode of the first transistor 132 is connected to the control unit 131, and a drain electrode of the first transistor 132 is configured to receive a power voltage signal VCC. Further, a source electrode of the first transistor 132 is connected to the output terminal 135, and also connected to a drain electrode of the second transistor 133. A gate electrode of the second transistor 133 is connected to the control unit 131, and a source electrode of the second transistor 133 is grounded via the resistor 134. The output terminal 135 is further connected to the scanning circuit 110.

[0006] In operation, the scanning circuit 110 provides a plurality of scanning signals to the scanning lines 141 sequentially, so as to activate the pixel units 148 row by row. The data circuit 120 provides a plurality of data voltage signals to the pixel electrodes 144 of the activated pixel units 148. Thereby, the liquid crystal capacitors 147 of the activated pixel units 148 are charged, and an electric field is generated between the pixel electrode 144 and the common electrode 145 in each pixel unit 148. The electric field drives the liquid crystal molecules to control light transmission of the pixel unit 148, such that the pixel unit 148 displays a particular color (red,

green, or blue) having a corresponding gray level. The aggregation of colors displayed by all the pixel units 148 simultaneously constitutes an image viewed by a user of the LCD 10.

[0007] When the LCD 10 is switched off, an external command is provided to the control unit 131 of the power supply circuit 130, and the control unit 131 correspondingly provides a low level voltage signal to switch the first transistor 132 on, and provides a high level voltage signal to switch the second transistor 133 off. Thereby, the power voltage signal VCC is outputted to the scanning circuit 110 via the first transistor 132. Due to the power voltage signal VCC, the scanning circuit 110 provides high level voltage signals to all the scanning lines 141 simultaneously, such that all the TFTs 143 are switched on, and the liquid crystal capacitors 147 are discharged. After the discharging process, the electric field in each pixel unit 148 is removed, and the image displayed by the LCD 10 disappears.

[0008] However, the external command may not last for a sufficiently long period of time. If the external command lapses within the discharging process, the control unit 131 is liable to stop providing the low level voltage signal to the first transistor 132. In this circumstance, the power voltage signal VCC cannot output to the scanning circuit 110, and accordingly the high level voltage signals outputted by the scanning circuit 110 are canceled. Thus the discharging process stops ahead of time, and the liquid crystal capacitors 147 are incapable of discharging completely. Residual charges in the liquid crystal capacitors 147 may cause an unwanted residual image to be displayed on the LCD 10.

[0009] What is needed is to provide an LCD that can overcome the above-described deficiencies.

SUMMARY

[0010] In a first aspect, a liquid crystal display includes a liquid crystal panel having a plurality of pixel units, a scanning circuit configured to activate the pixel units, and a power supply circuit having a control unit and a logic converter. The control unit generates a control signal when an external command is applied to the power supply circuit. The logic converter carries out a predetermined logic calculation between the control signal and the external command. The scanning circuit activates all the pixel units to discharge in response to a result of the logic calculation, such that an image displayed by the liquid crystal panel is removed.

[0011] In a second aspect, a liquid crystal display includes a plurality of pixel units, a scanning circuit connected to the pixel units, and a power supply circuit comprising a control unit and a logic converter. When the liquid crystal display is switched off, an external command is provided to the power supply circuit. The power supply circuit generates a control signal via the control unit according to the external command, carries out a predetermined logic calculation between the external command and the control signal via the logic converter, so as to provide an output enable signal. The scanning circuit drives all the pixel units to discharge in response to the output enable signal.

[0012] Other novel features and advantages will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] FIG. 1 is essentially an abbreviated circuit diagram of an LCD according to a first embodiment of the present invention, the LCD including a power supply circuit.

[0014] FIG. 2 is a diagram of the power supply circuit of the LCD of FIG. 1.

[0015] FIG. 3 is a diagram of a power supply circuit of an LCD according to a second embodiment of the present invention.

[0016] FIG. 4 is essentially an abbreviated circuit diagram of a conventional LCD, the LCD including a power supply circuit.

[0017] FIG. 5 is a diagram of the power supply circuit of the LCD of FIG. 4.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0018] Reference will now be made to the drawings to describe preferred and exemplary embodiments of the present invention in detail.

[0019] FIG. 1 is an abbreviated circuit diagram of an LCD according to a first embodiment of the present invention. The LCD 20 includes a scanning circuit 210, a data circuit 220, a power supply circuit 230, and a liquid crystal panel 240.

[0020] The liquid crystal panel 240 includes n rows of parallel scanning lines 241 (where n is a natural number), m columns of parallel data lines 242 perpendicular to the scanning lines 241 (where m is also a natural number), and a plurality of pixel units 248 cooperatively defined by the crossing scanning lines 241 and data lines 242. The pixel units 248 are arranged in a matrix. The scanning lines 241 are connected to the scanning circuit 210. The data lines 242 are connected to the data circuit 220.

[0021] Each pixel unit 248 includes a TFT 243, a pixel electrode 244, and a common electrode 245. A gate electrode of the TFT 243 is connected to a corresponding one of the scanning lines 241, and a source electrode of the TFT 243 is connected to a corresponding one of the data lines 242. Further, a drain electrode of the TFT 243 is connected to the pixel electrode 244. The common electrode 245 is generally opposite to the pixel electrode 244, with liquid crystal molecules (not shown) sandwiched therebetween, so as to cooperatively form a liquid crystal capacitor 247.

[0022] Referring also to FIG. 2, the power supply circuit 230 includes a control unit 231, a logic converter 232, a voltage level shifter 233, and an output control circuit 234.

[0023] The control unit 231 is configured to provide a control signal in response to an external command when the LCD 20 is switched off, and includes a first output terminal (not labeled) and a second output terminal (not labeled). The first and second output terminals are respectively used to output the control signal to the logic converter 232 and the output control circuit 234.

[0024] The logic converter 232 is configured to carry out a predetermined logic calculation, and includes a first input terminal 307 configured for receiving the external command, a second input terminal 308 configured for receiving the control signal from the control unit 231, and an output terminal 309 configured to output a result of the logic calculation to the voltage level shifter 233. Assuming that the control signal and the external command are respectively X and Y, the predetermined logic calculation can be expressed as $Z = \overline{X} \cdot Y$, where Z represents the calculation result.

[0025] In particular, the logic converter 232 includes a first logic NOT gate 301, a logic AND gate 302, and a second logic NOT gate 303. The logic AND gate 302 includes a first diode 304, a second diode 305, and a first resistor 306. A negative terminal of the first diode 304 serves as the first input terminal

307 of the logic converter 232. A positive terminal of the first diode 304 is configured to receive a logic power voltage VDD via the first resistor 306, and is connected to an input terminal of the second logic NOT gate 303 and a positive terminal of the second diode 305. A negative terminal of the second diode 305 is connected to an output terminal of the first logic NOT gate 301. An input terminal of the first logic NOT gate 301 serves as the second input terminal 308 of the logic converter 232, and an output terminal of the second logic NOT gate 303 serves as the output terminal 309 of the logic converter 232.

[0026] The voltage level shifter 233 is configured to adjust a voltage level of the calculation result outputted by the logic converter 232 according to an analog power voltage VCC, so as to generate an output enable (OE) signal.

[0027] The output control circuit 234 includes a first transistor 235, a second transistor 236, a second resistor 237, and an output terminal 238. The first and second transistors 235, 236 are both PMOS transistors. A gate electrode of the first transistor 235 is configured to receive the OE signal from the voltage level shifter 233. A drain electrode of the first transistor 235 is configured to receive the analog power voltage VCC. A source electrode of the first transistor 235 is connected to the output terminal 238 and to a drain electrode of the second transistor 236. A gate electrode of the second transistor 236 is configured to receive the control signal from the control unit 231. A source gate electrode of the second transistor 236 is grounded via the second resistor 237. The output terminal 238 is further connected to the scanning circuit 210.

[0028] In operation, the scanning circuit 210 provides a plurality of scanning signals to the scanning lines 241 sequentially, so as to activate the pixel units 248 row by row. The data circuit 220 provides a plurality of data voltage signals to the pixel electrodes 244 of the activated pixel units 248. Thereby, the liquid crystal capacitors 247 of the activated pixel units 248 are charged, and an electric field is generated between the pixel electrode 244 and the common electrode 245 in each pixel unit 248. The electric field drives the liquid crystal molecules to control light transmission of the pixel unit 248, such that the pixel unit 248 displays a particular color (e.g. red, green, or blue) having a corresponding gray level. The aggregation of colors displayed by all the pixel units 248 simultaneously constitutes an image viewed by a user of the LCD 20.

[0029] When the LCD 20 is switched off, an external command is provided to the control unit 231 and the logic shifter 232. The external command can for example be generated by a processor in response to a switch key being manually pressed by a user. Typically, the external command is a high level voltage signal. Due to the external command, the control unit 231 outputs a control signal having a high level voltage, and accordingly the second transistor 236 is switched off.

[0030] In addition, the control signal is converted to a low level voltage signal by the first logic NOT gate 301, and outputted to the logic AND gate 302. In the logic AND gate 302, the first diode 304 is switched off due to the high level external command, and the second diode 305 is switched on due to the low level voltage signal. The low level voltage signal is transmitted to the second logic NOT gate 303 via the second diode 305, converted to a high level voltage signal again by the second logic NOT gate 303, and outputted to the voltage level shifter 233 via the output terminal 309.

[0031] The voltage level shifter 233 adjusts the voltage level of the high level voltage signal outputted by the logic

converter **232**, so as to provide an output enable (OE) signal having a negative polarity and a value substantially the same as the analog power voltage VCC. Such OE signal causes the first transistor **235** to be in a deep saturation state. Thereby, the analog power voltage VCC is outputted to the scanning circuit **210** via the first transistor **235** and the output terminal **238**.

[0032] The analog power voltage VCC further enables the scanning circuit **210** to provide high level voltage signals to all the scanning lines **241** simultaneously, such that all the TFTs **243** are switched on, and the liquid crystal capacitors **247** are discharged.

[0033] Before the liquid crystal capacitors **247** discharge completely, the external command may disappear. This may for example happen when the switch key is prematurely or improperly released by the user. In this situation, the control signal drops to a low level voltage, such that the second diode **305** is switched off. Simultaneously, an electrical potential of the first input terminal **307** of the logic converter **232** also drops to a low level voltage. Thereby, the first diode **304** is switched on, and the logic converter **232** continues to output the high level voltage signal to the voltage level shifter **233**. That is, although the external command lapses or disappears ahead of time, the high level voltage signal received by the voltage level shifter **233** is maintained. Thus the voltage level shifter **233** continues to provide the OE signal to the output control circuit **234**, and accordingly the analog power voltage VCC continues outputting to the scanning circuit **210** until the discharging process is completed. The electric field between the pixel electrode **244** and the common electrode **245** in each pixel unit **248** is thereby completely removed, and the image displayed on the liquid crystal panel **240** of the LCD **20** disappears.

[0034] In the LCD **20**, the logic converter **232** and the voltage level shifter **233** are employed to cooperatively provide the OE signal. Due to the logic calculation carried out in the logic converter **232**, when the external command is provided to control the LCD **20** to be switched off, the OE signal is provided to the output control circuit **234** stably, even if the external command lapses or ceases unusually early or quickly. Thus the liquid crystal capacitors **247** are capable of discharging completely, and any unwanted residual image that might otherwise be displayed on the liquid crystal panel **240** is not displayed.

[0035] Moreover, the voltage level adjustment of the voltage level shifter **233** causes the OE signal to have a value the same as the analog power voltage VCC. This further drives the first transistor **235** to be in a deep saturation state, and accordingly the analog power voltage VCC can be outputted to the scanning circuit **210** without being consumed by the first transistor **235**. By employing such analog power voltage VCC, all the TFTs **243** of the pixel units **248** are switched on completely, and the discharging process of the liquid crystal capacitors **247** is more reliable.

[0036] FIG. 3 is a circuit diagram of a power supply circuit **430** of an LCD according to a second embodiment of the present invention. The power supply circuit **430** is similar to the power supply circuit **230**. However, the power supply circuit **430** includes a control unit **431** configured to provide a control signal, and a logic converter **432** having a logic NOT gate **501** and a logic OR gate **502**. When the LCD of the second embodiment is switched off, an external command is outputted to the logic OR gate **501** via the logic NOT gate **502**, and the control signal is outputted to the logic OR gate **501**

directly. Thereby, the logic converter **432** is capable of carrying out a logic calculation, namely $Z=X+\overline{Y}$, where X is the control signal and Y is the external command. It is noted that the logic calculation $Z=X+\overline{Y}$ has a logic function substantially the same as the logic function $Z=\overline{X}\cdot\overline{Y}$ carried out by the logic converter **232** of the power supply circuit **230**. Therefore by employing the power supply circuit **430**, the LCD of the second embodiment can also eliminate any unwanted residual image that might otherwise be displayed.

[0037] It is to be further understood that even though numerous characteristics and advantages of preferred and exemplary embodiments have been set out in the foregoing description, together with details of structures and functions associated with the embodiments, the disclosure is illustrative only; and that changes may be made in detail (including in matters of arrangement of parts) within the principles of the invention to the full extent indicated by the broad general meaning of the terms in which the appended claims are expressed.

What is claimed is:

1. A liquid crystal display, comprising:

a liquid crystal panel comprising a plurality of pixel units; a scanning circuit configured to activate the pixel units; and a power supply circuit comprising a control unit and a logic converter;

wherein the control unit is configured to generate a control signal when an external command is applied to the power supply circuit, the logic converter is configured to carry out a predetermined logic calculation between the control signal and the external command, and the scanning circuit is configured to activate all the pixel units to discharge in response to a result of the logic calculation such that an image displayed by the liquid crystal panel is removed.

2. The liquid crystal display of claim 1, wherein the logic calculation result is a selected one of $\overline{X}\cdot\overline{Y}$ and $X+\overline{Y}$, X and Y respectively representing the control signal and the external command.

3. The liquid crystal display of claim 1, wherein the logic converter comprises a first input terminal configured for receiving the external command, a second input terminal configured for receiving the control signal, and an output terminal configured for outputting the logic calculation result.

4. The liquid crystal display of claim 3, wherein the logic converter further comprises a logic AND gate, a first logic NOT gate, and a second logic NOT gate, the logic AND gate receives the external command directly, receives the control signal via the first logic NOT gate, and outputs the logic calculation result to the output terminal of the logic converter via the second logic NOT gate.

5. The liquid crystal display of claim 4, wherein the logic AND gate comprises a first diode, a second diode, and a resistor, a negative terminal of the first diode is configured to receive the external command, a positive terminal of the first diode is configured to receive a digital power voltage via the resistor, and is connected to the second logic NOT gate and a positive terminal of the second diode, a negative terminal of the second diode is connected to the first logic NOT gate.

6. The liquid crystal display of claim 1, wherein the logic converter comprises a logic NOT gate and a logic OR gate, the logic OR gate receives the external command via the logic

NOT gate, receives the control signal directly, and outputs the logic calculation result to the output terminal of the logic converter.

7. The liquid crystal display of claim 1, wherein the power supply circuit further comprises a voltage level shifter, the voltage level shifter receives the logic calculation result, and adjusts a voltage level thereof, so as to generate an output enable signal.

8. The liquid crystal display of claim 7, wherein a value of the output enable signal is substantially the same as a predetermined analog power voltage.

9. The liquid crystal display of claim 7, wherein the power supply circuit further comprises an output control circuit, the output control circuit is configured to output the analog power voltage to the scanning circuit according to the output enable signal and the control signal.

10. The liquid crystal display of claim 9, wherein the output control circuit comprises a first transistor, a second transistor, and an output terminal, a gate electrode and a drain electrode of the first transistor are respectively configured to receive the output enable signal and the analog power voltage, a source electrode of the first transistor is connected to the scanning circuit via the output terminal, and connected to a drain electrode of the second transistor, a gate electrode of the second transistor is configured to receive the control signal, and a source electrode of the second transistor is grounded via a resistor.

11. The liquid crystal display of claim 10, wherein the first transistor and the second transistor are both P-channel metal oxide semiconductor transistors.

12. The liquid crystal display of claim 7, wherein the scanning circuit outputs a plurality of high level voltage signals to the pixel units when the analog power voltage is applied thereto, so as to drive the pixel units to discharge.

13. The liquid crystal display of claim 1, wherein the external command is provided by a processor, and is generated in response to a switch key being manually pressed by a user.

14. A liquid crystal display, comprising:
a plurality of pixel units;
a scanning circuit connected to the pixel units; and
a power supply circuit comprising a control unit and a logic converter;

wherein when the liquid crystal display is switched off, an external command is provided to the power supply circuit, the power supply circuit generates a control signal via the control unit according to the external command, and carries out a predetermined logic calculation between the external command and the control signal via the logic converter so as to provide an output enable signal, and the scanning circuit drives all the pixel units to discharge in response to the output enable signal.

15. The liquid crystal display of claim 14, wherein a result of the logic calculation is a selected one of $\overline{X} \cdot \overline{Y}$ and $X + \overline{Y}$, X and Y respectively representing the control signal and the external command.

16. The liquid crystal display of claim 14, wherein the power supply circuit further comprises a voltage level shifter, and the voltage level shifter receives the logic calculation result, and adjusts a voltage level of the logic calculation result so as to generate the output enable signal.

17. The liquid crystal display of claim 16, wherein the voltage level shifter adjusts a value of the output enable signal to be substantially the same as a predetermined analog power voltage.

18. The liquid crystal display of claim 17, wherein the power supply circuit further comprises an output control circuit configured to output the analog power voltage to the scanning circuit according to the output enable signal and the control signal.

* * * * *

专利名称(译)	液晶显示器具有用于控制像素单元放电的逻辑转换器		
公开(公告)号	US20080303775A1	公开(公告)日	2008-12-11
申请号	US12/157016	申请日	2008-06-06
[标]申请(专利权)人(译)	INNOCOM TECHSHENZHEN群创光电股份有限公司		
申请(专利权)人(译)	INNOCOM科技 (深圳) 有限公司 , 群创光电股份有限公司.		
当前申请(专利权)人(译)	群创光电 INNOCOM科技 (深圳) 有限公司.		
[标]发明人	GUO WEI TSENG YAW SHING		
发明人	GUO, WEI TSENG, YAW-SHING		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3677 G09G3/3696 G09G2310/0245 G09G2310/0289 G09G2320/02 G09G2330/02 G09G2330/027		
优先权	200710074777.2 2007-06-08 CN		
其他公开文献	US8188962		
外部链接	Espacenet USPTO		

摘要(译)

示例性液晶显示器 (200) 包括具有像素单元 (248) 的液晶面板 (240) , 被配置为激活像素单元的扫描电路 (210) , 以及具有控制单元 (231) 的电源电路 (230) 。) 和逻辑转换器 (232) 。当外部命令施加到电源电路时, 控制单元产生控制信号。逻辑转换器在控制信号和外部命令之间执行预定的逻辑计算。扫描电路响应于逻辑计算的结果激活所有像素单元放电, 从而去除液晶面板显示的图像。

