



US 20080309853A1

(19) **United States**(12) **Patent Application Publication****Ge et al.**(10) **Pub. No.: US 2008/0309853 A1**(43) **Pub. Date: Dec. 18, 2008**(54) **WIDE VIEWING ANGLE TRANSFLECTIVE
LIQUID CRYSTAL DISPLAYS**(52) **U.S. Cl. 349/96; 349/114; 349/187**

(76) Inventors: **Zhibing Ge**, Orlando, FL (US);
Thomas Xinzhong Wu, Oviedo, FL
(US); **Shin-Tson Wu**, Oviedo, FL
(US); **Wang-Yang Li**, Xinhua Town
(TW); **Chung-Kuang Wei**, Taipei
City (TW)

Correspondence Address:
BRIAN STEINBERGER/UCF
101 BREVARD AVENUE
COCOA, FL 32922 (US)

(21) Appl. No.: **11/763,894**(22) Filed: **Jun. 15, 2007****Publication Classification**

(51) **Int. Cl.**
G02F 1/1335 (2006.01)

(57) **ABSTRACT**

Apparatus, methods and systems for a transmissive liquid crystal display including a plurality of pixel circuits, each pixel circuit including a reflective region and a transmissive region. The reflective region includes a polarization dependent reflector for reflecting ambient light. The reflective and transmissive regions include an initially homogeneously aligned liquid crystal layer sandwiched between a first and a second substrate. Each pixel further includes at least one first transparent electrode as the common electrode and at least one second transparent electrode as the pixel electrode both formed on one of the same first and second substrates, wherein substantial fringe fields with rich horizontal electric fields are generated in the liquid crystal layer when voltage is applied to the pixel electrode, making the liquid crystal molecules rotate mainly in the horizontal direction to achieve wide viewing angle.

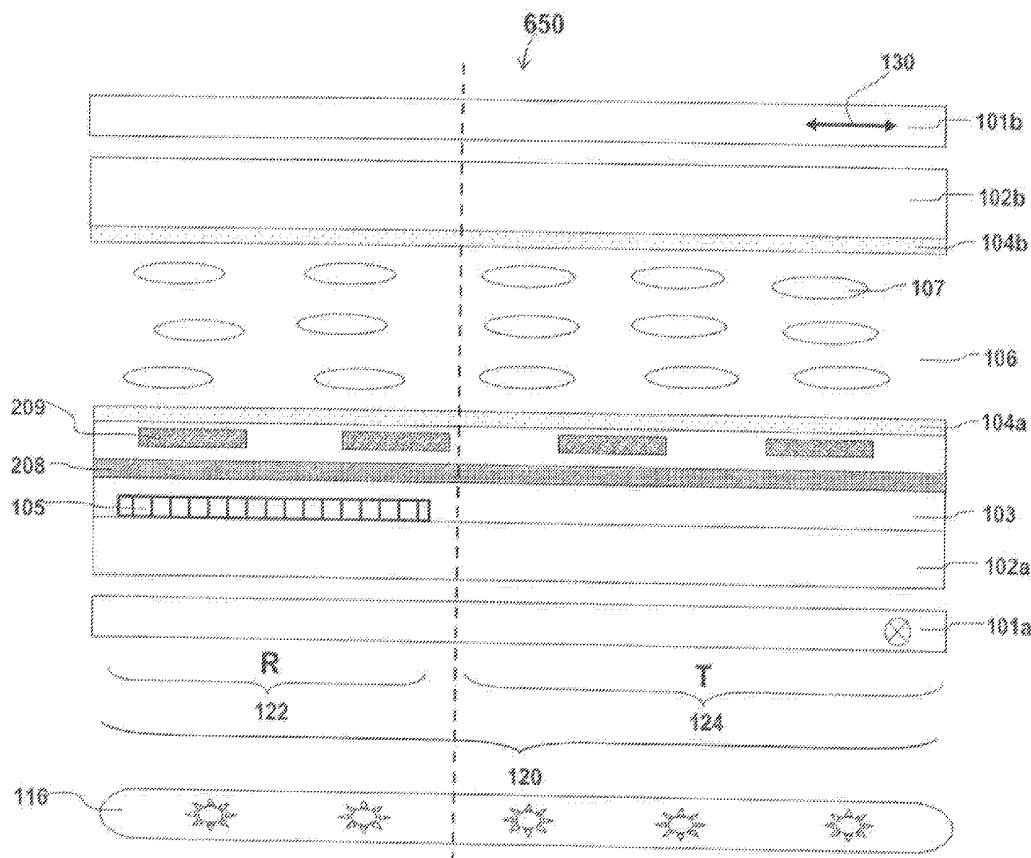
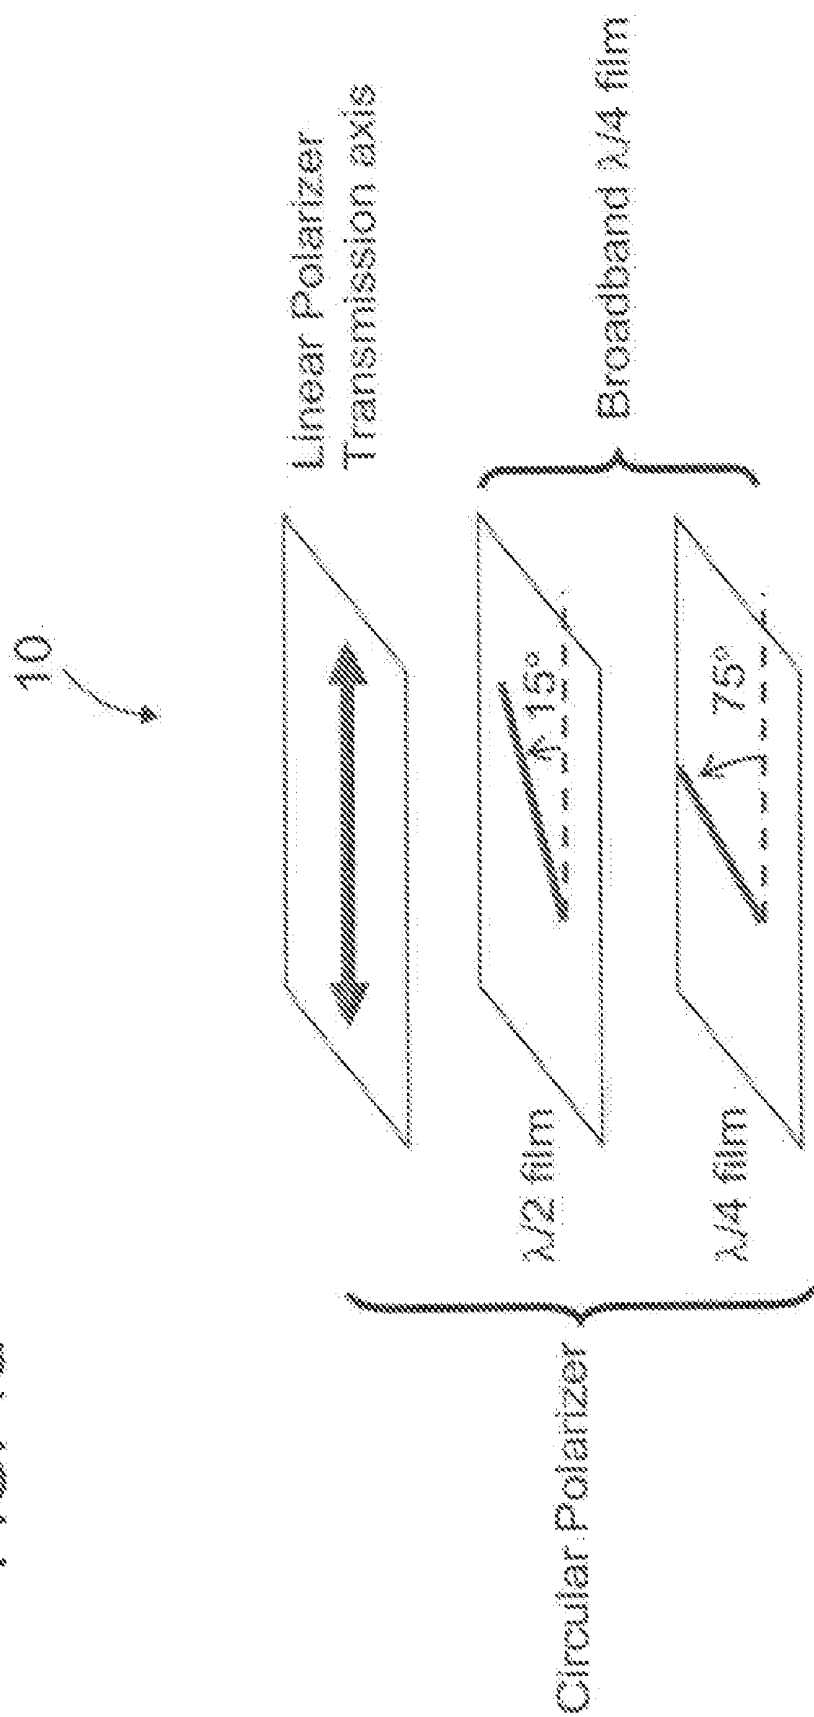
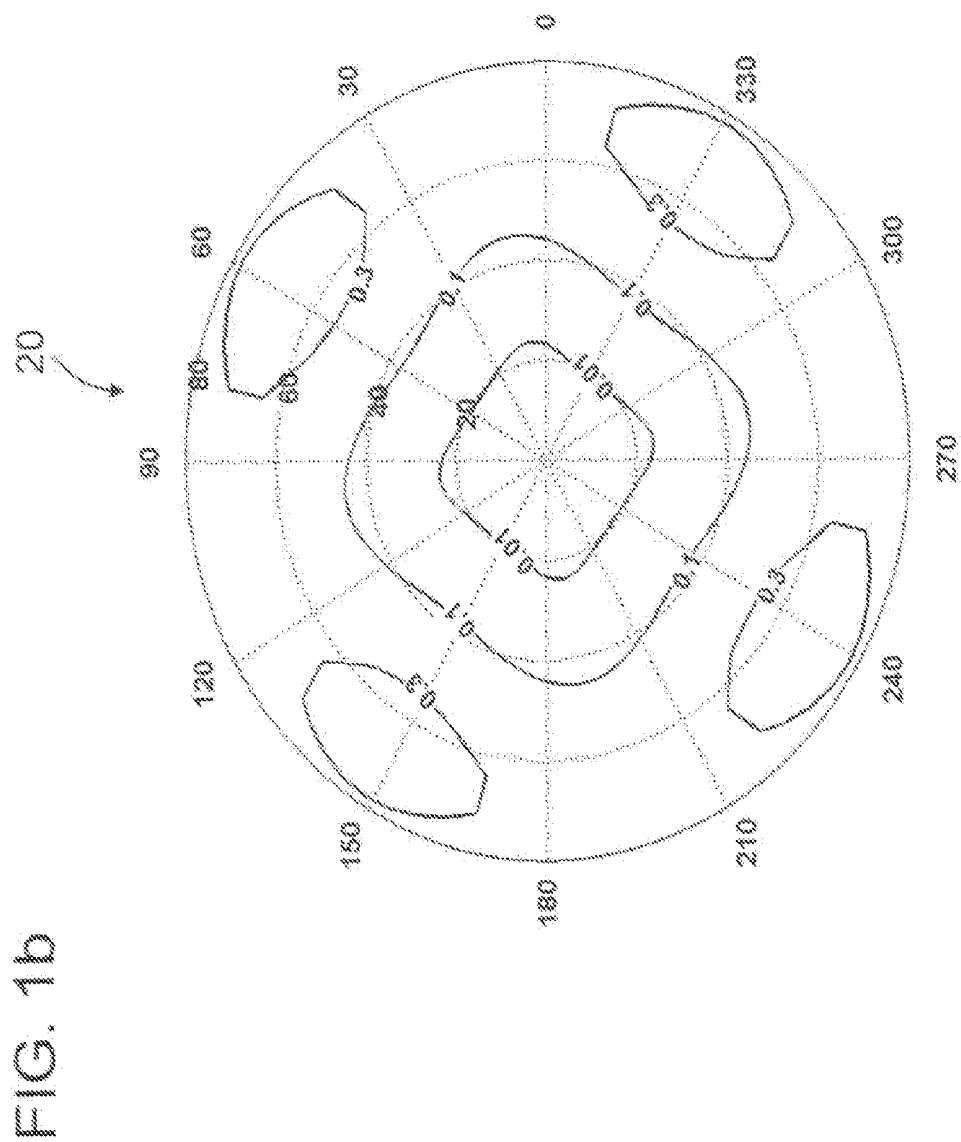


FIG. 1a





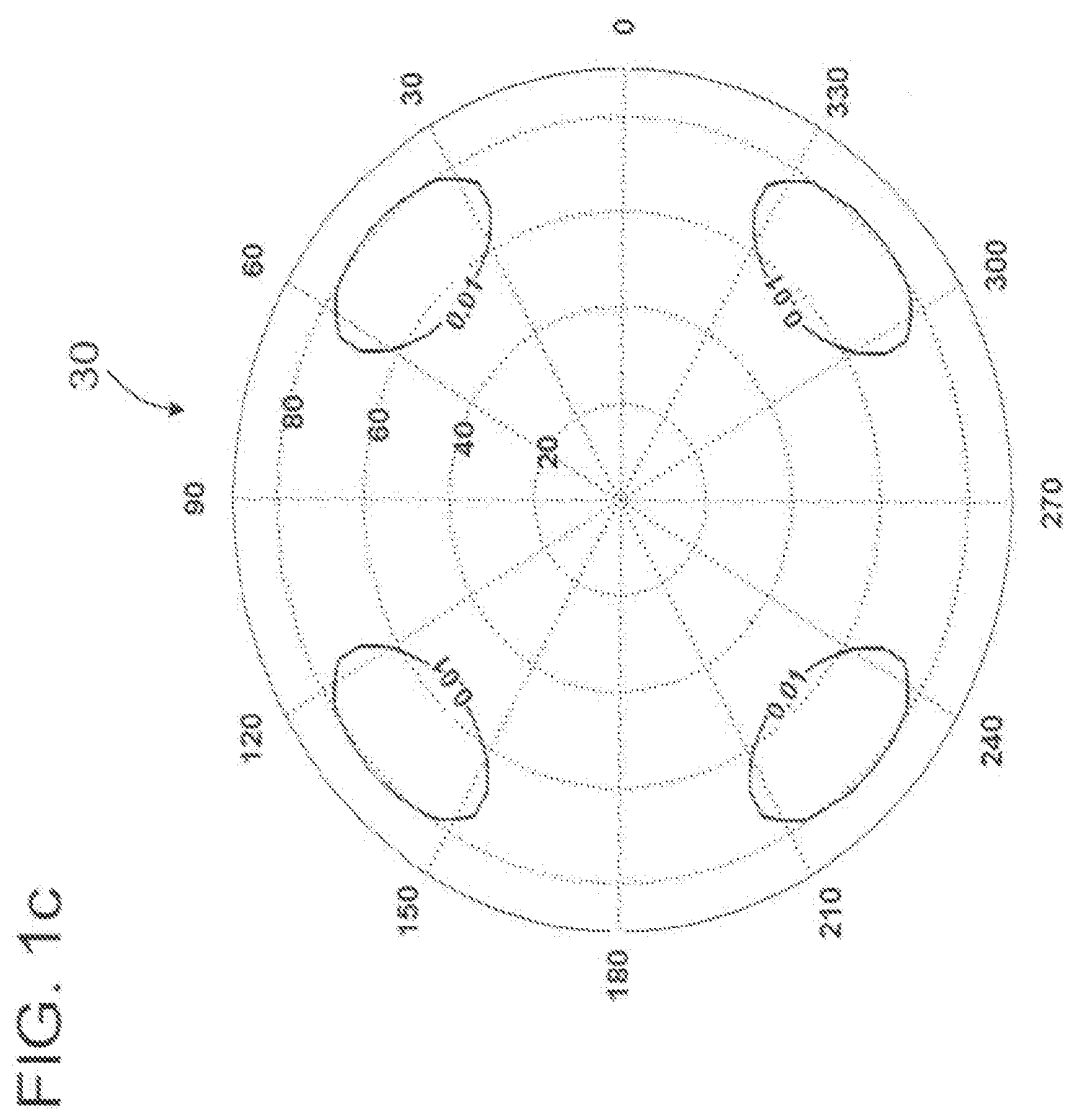


FIG. 2

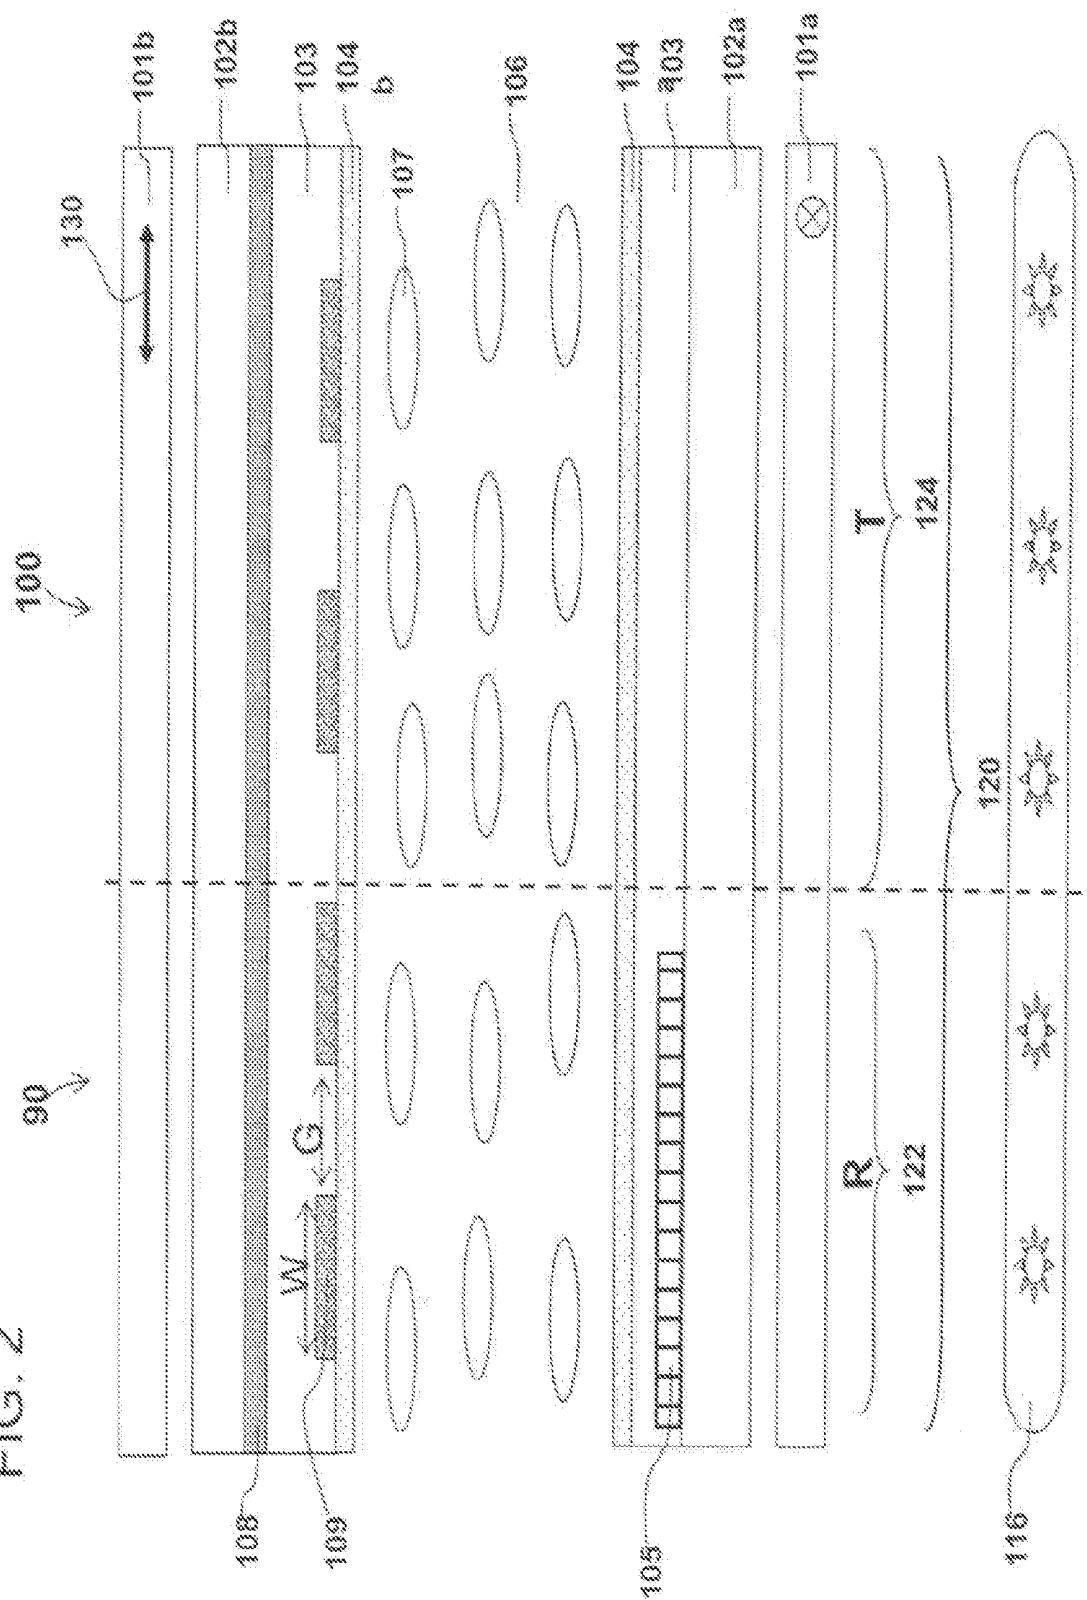


FIG. 3

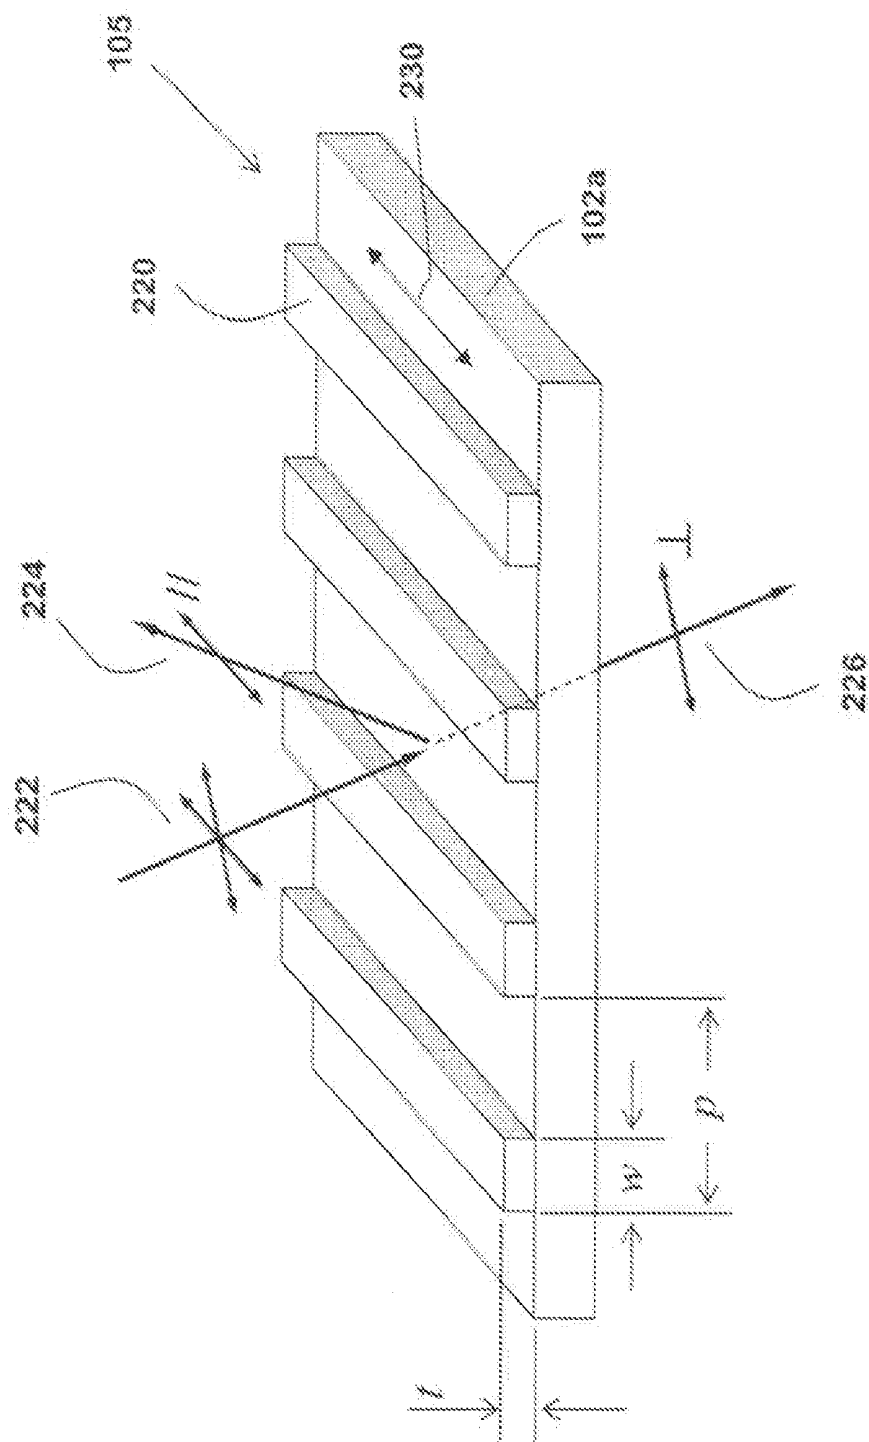


FIG. 4

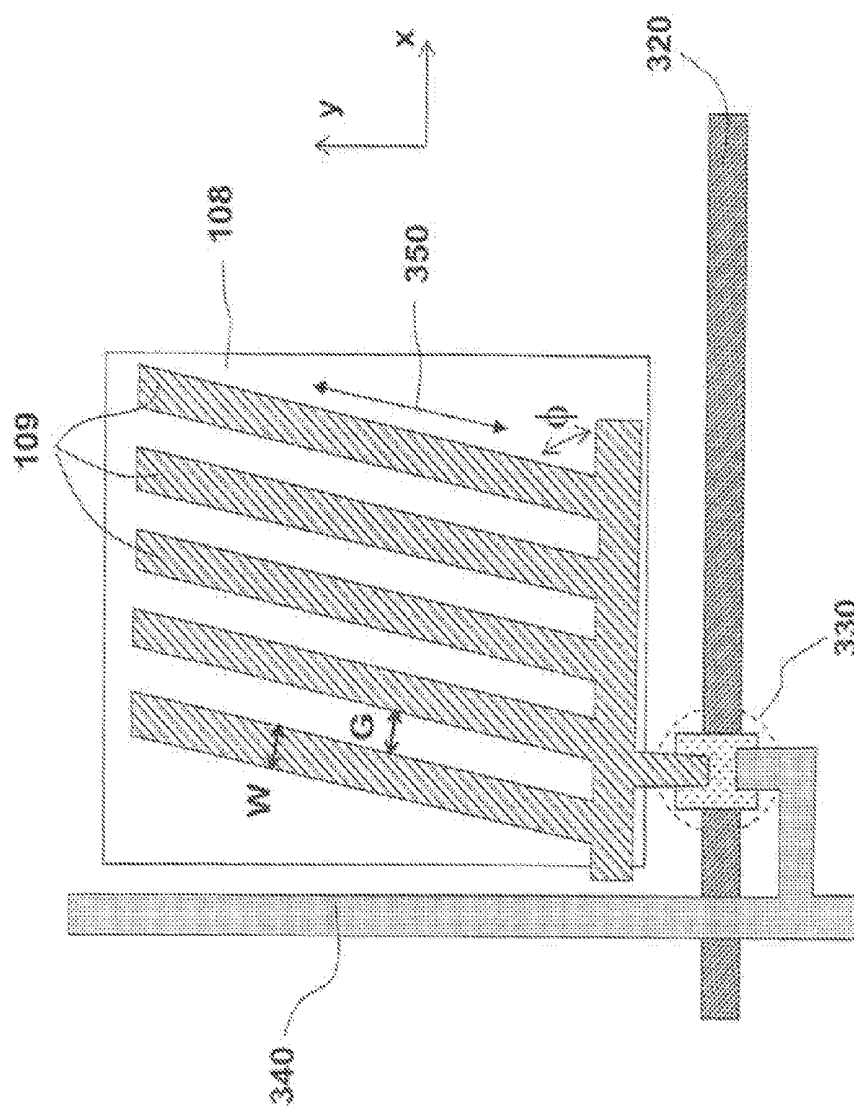


FIG. 5

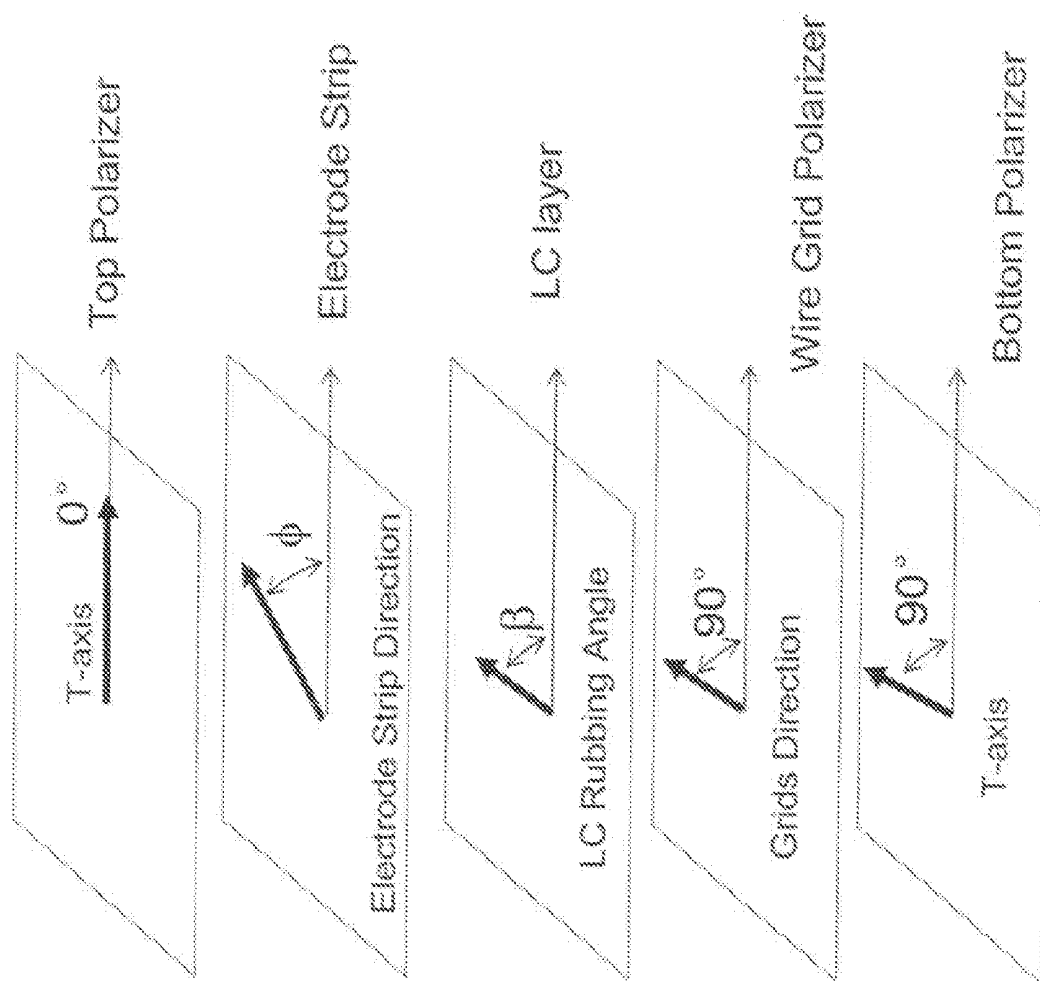


FIG. 7

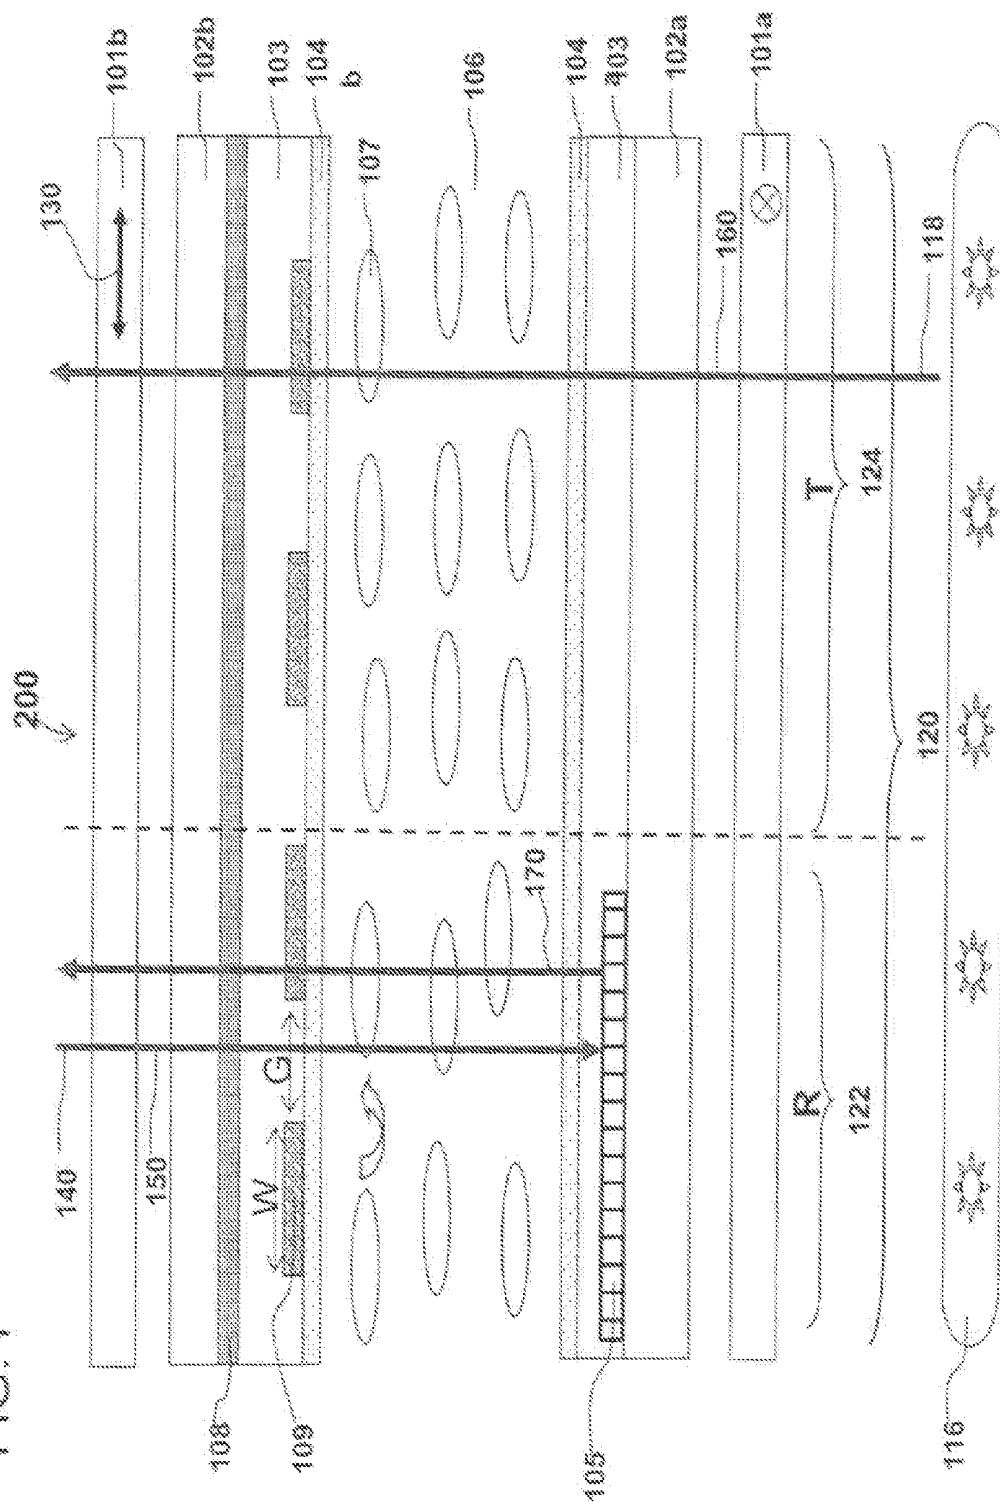


FIG. 8a

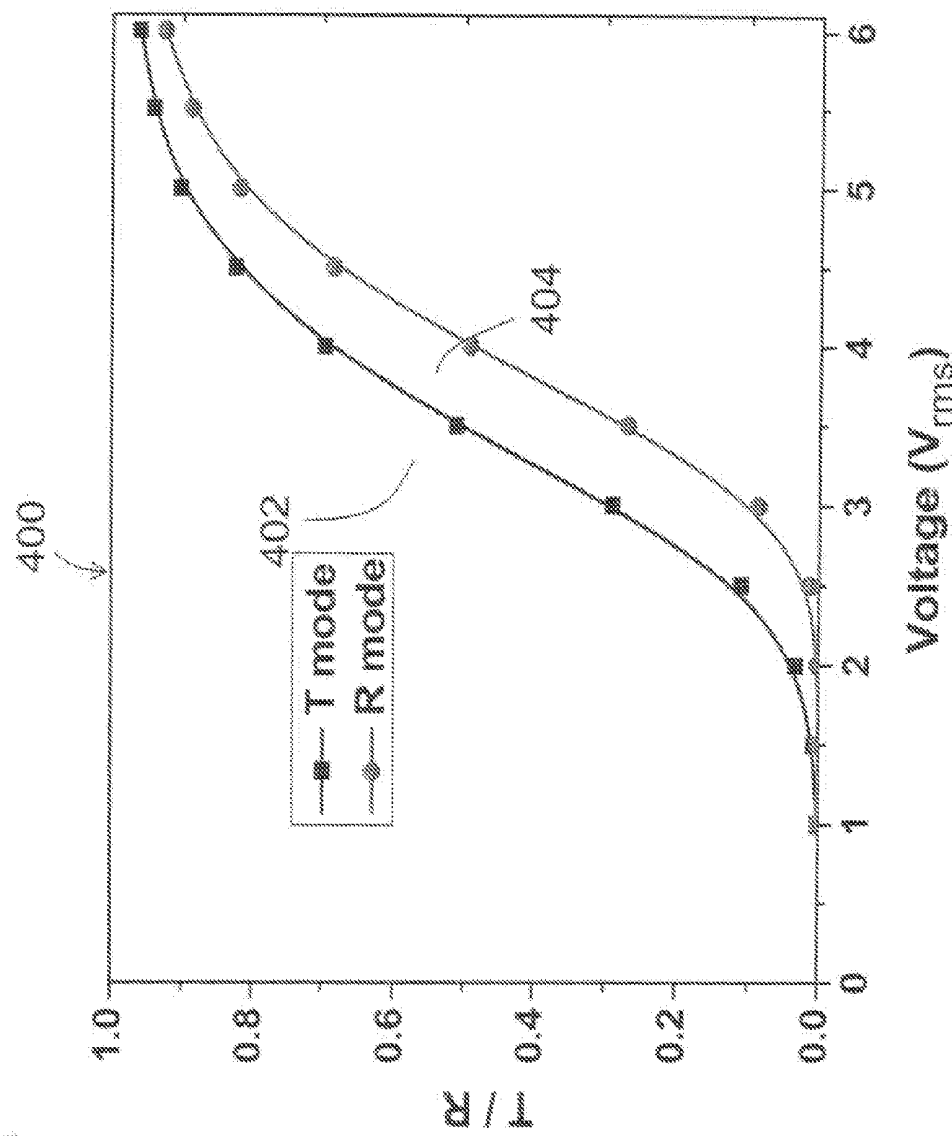


FIG. 8b

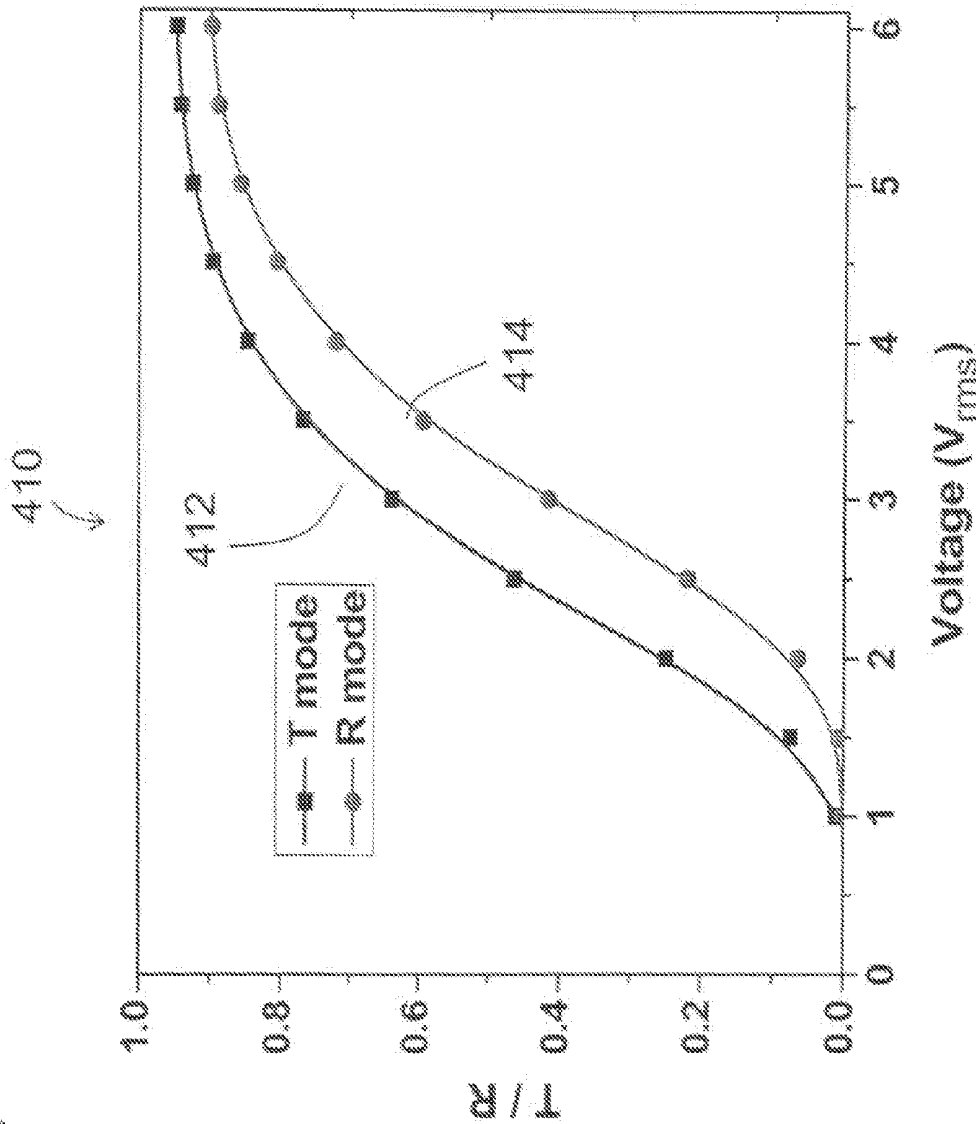


FIG. 9

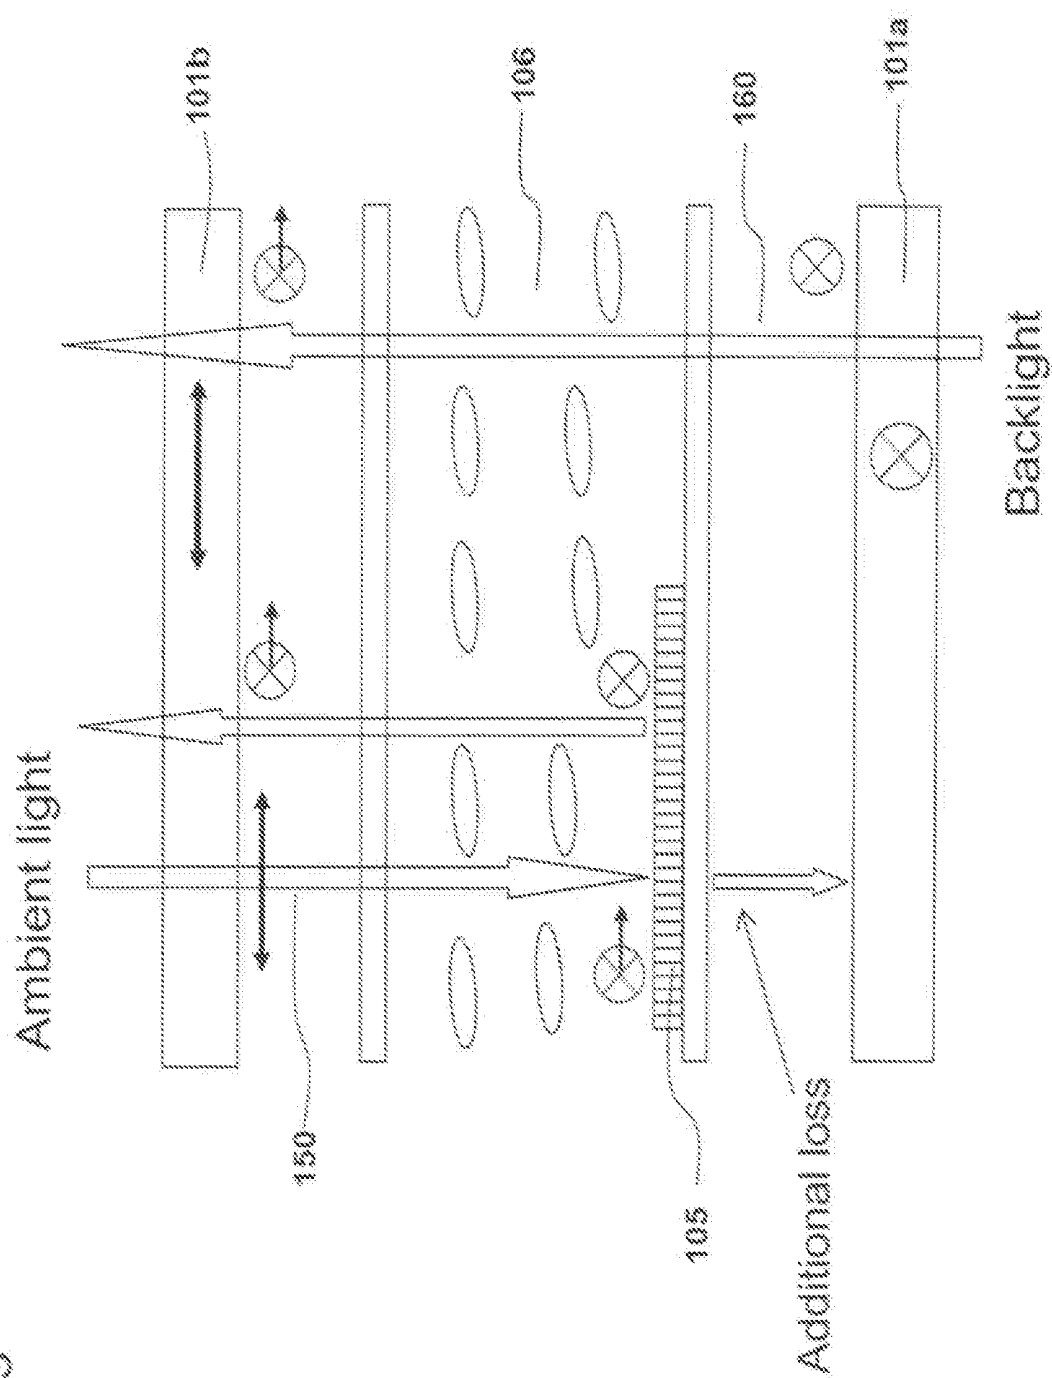


FIG. 10

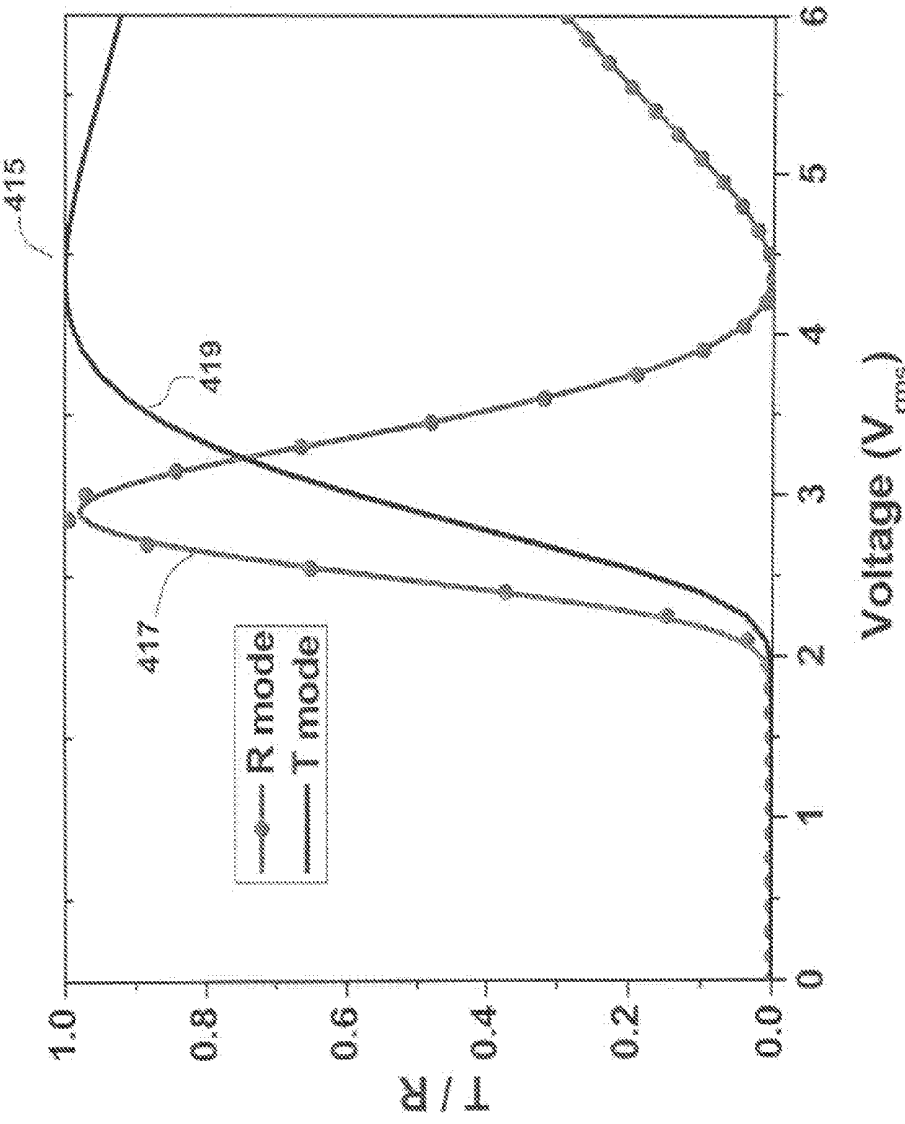


FIG. 11a

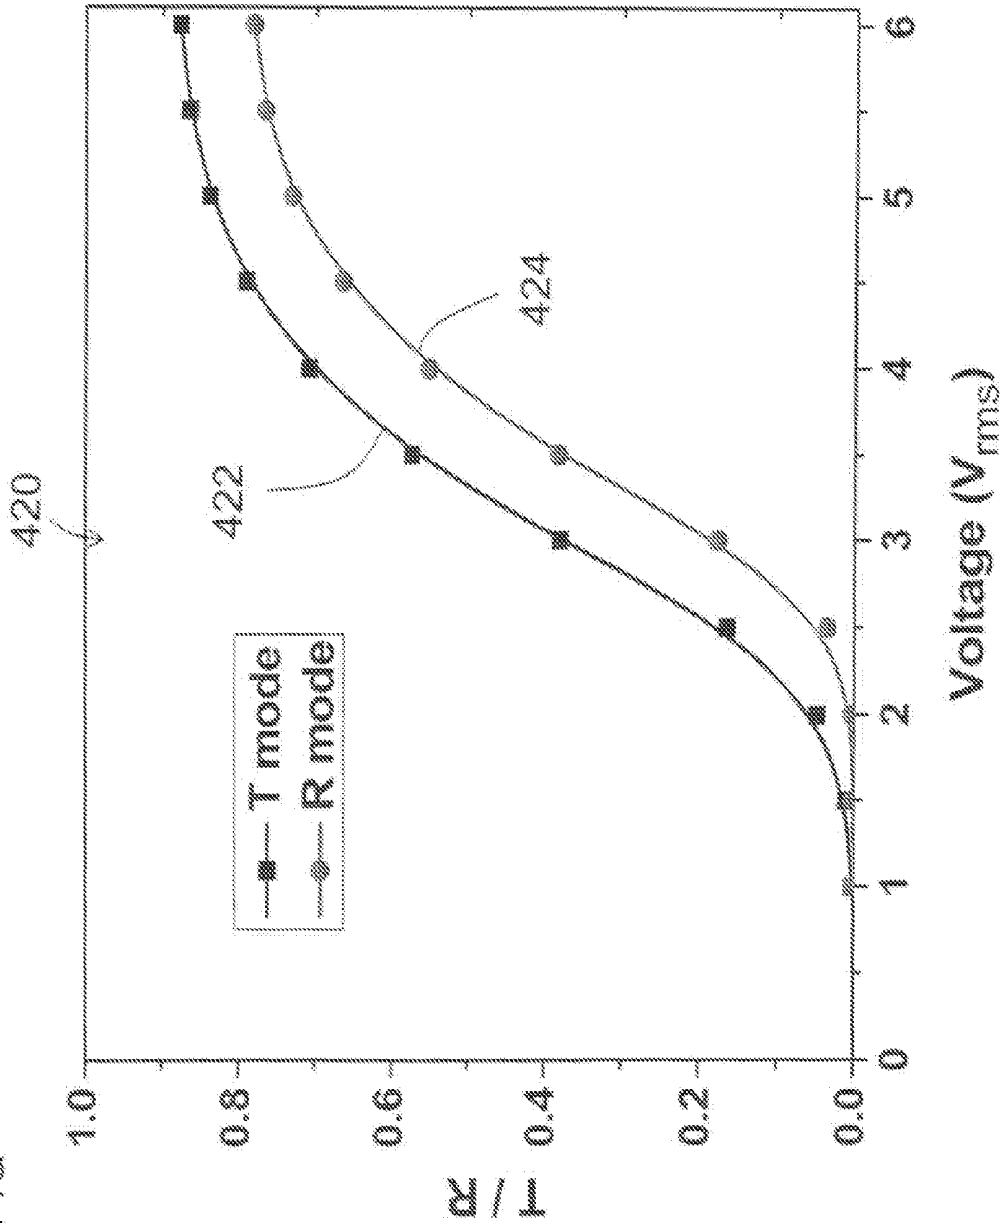


FIG. 11b

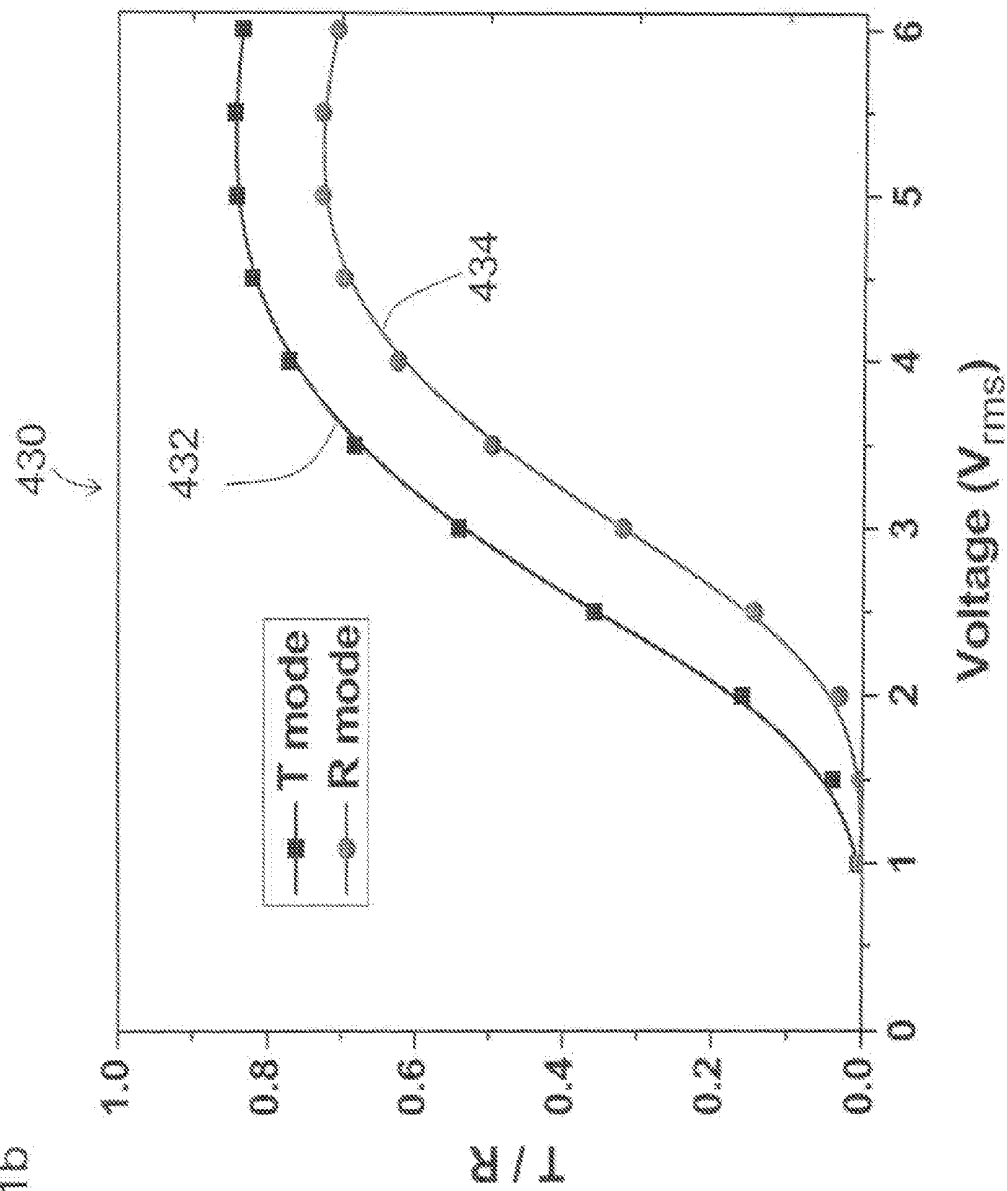
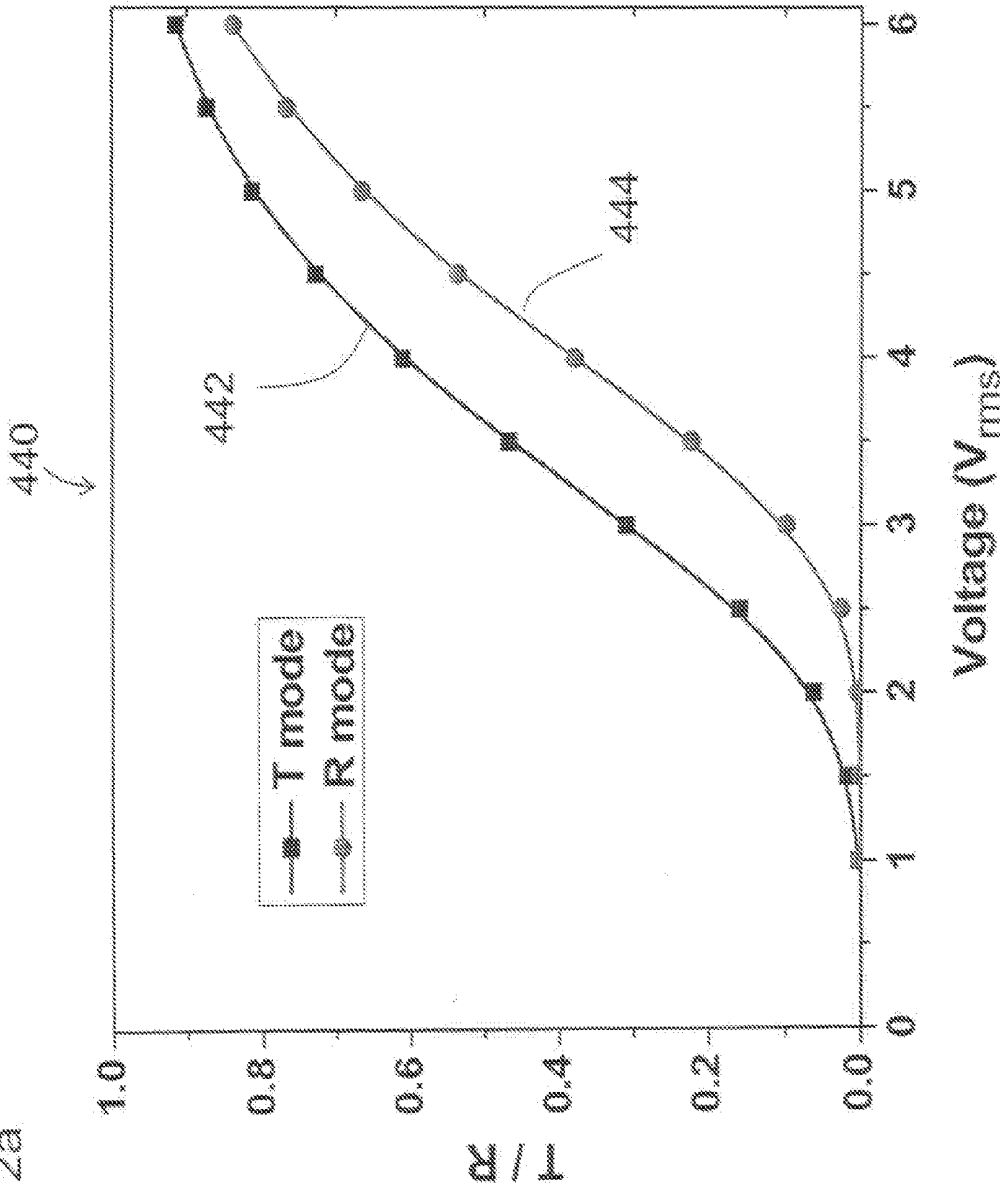


FIG. 12a



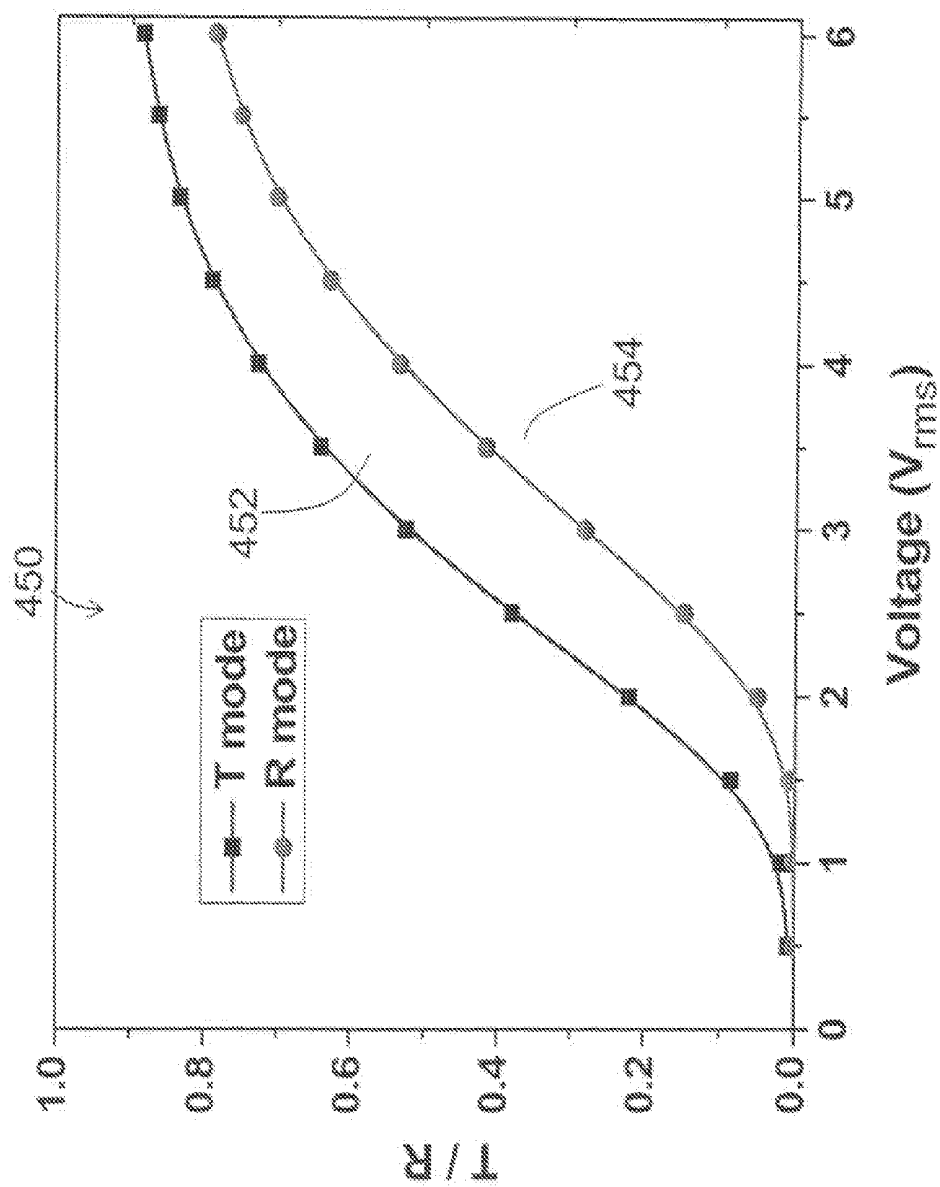


FIG. 12b

FIG. 13

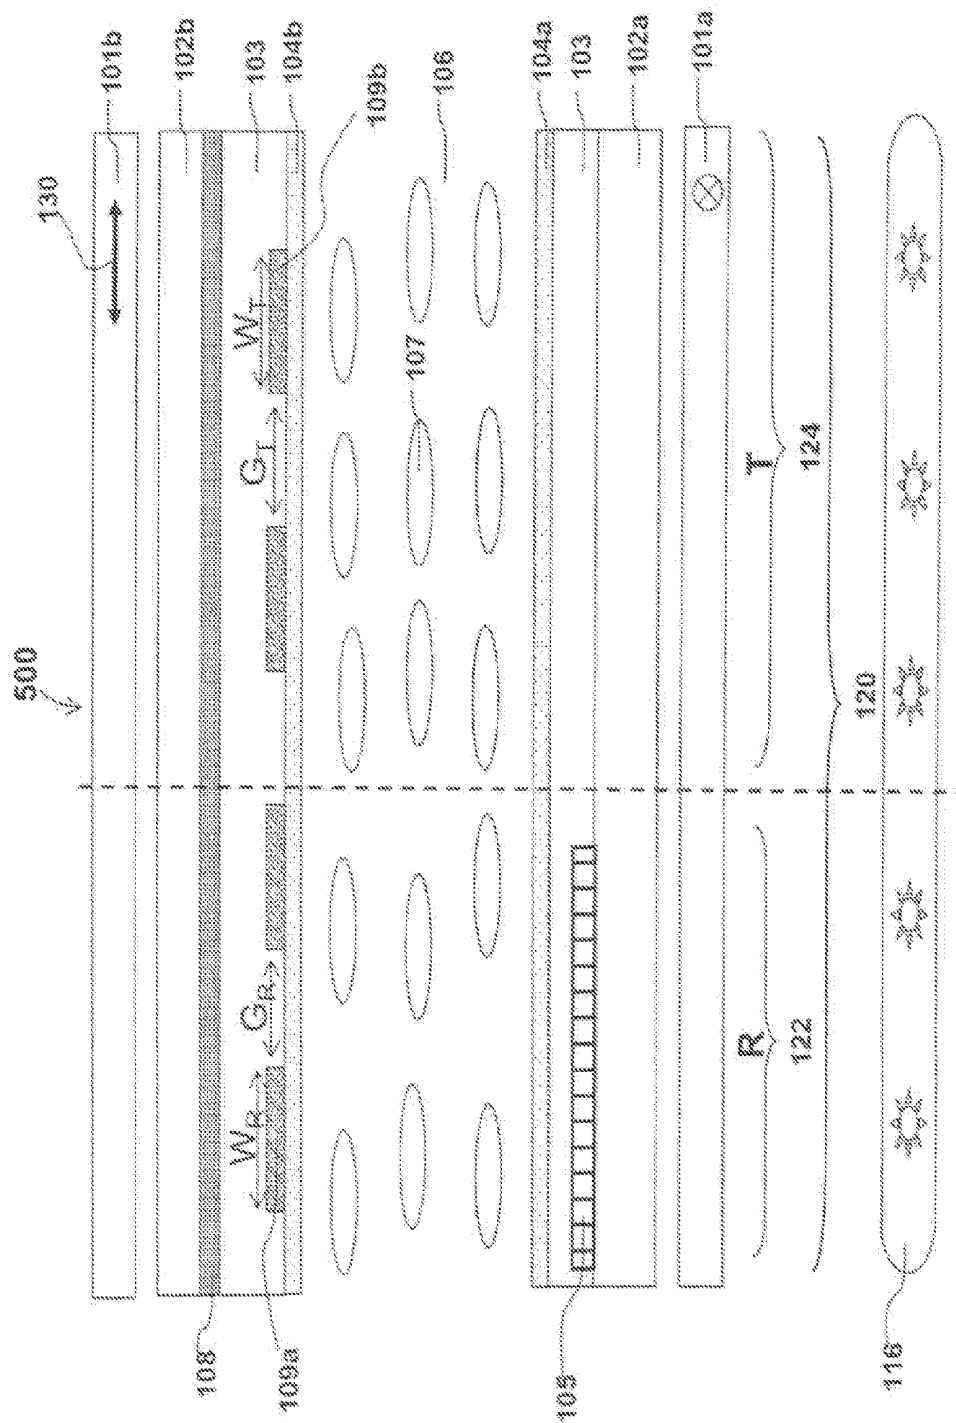
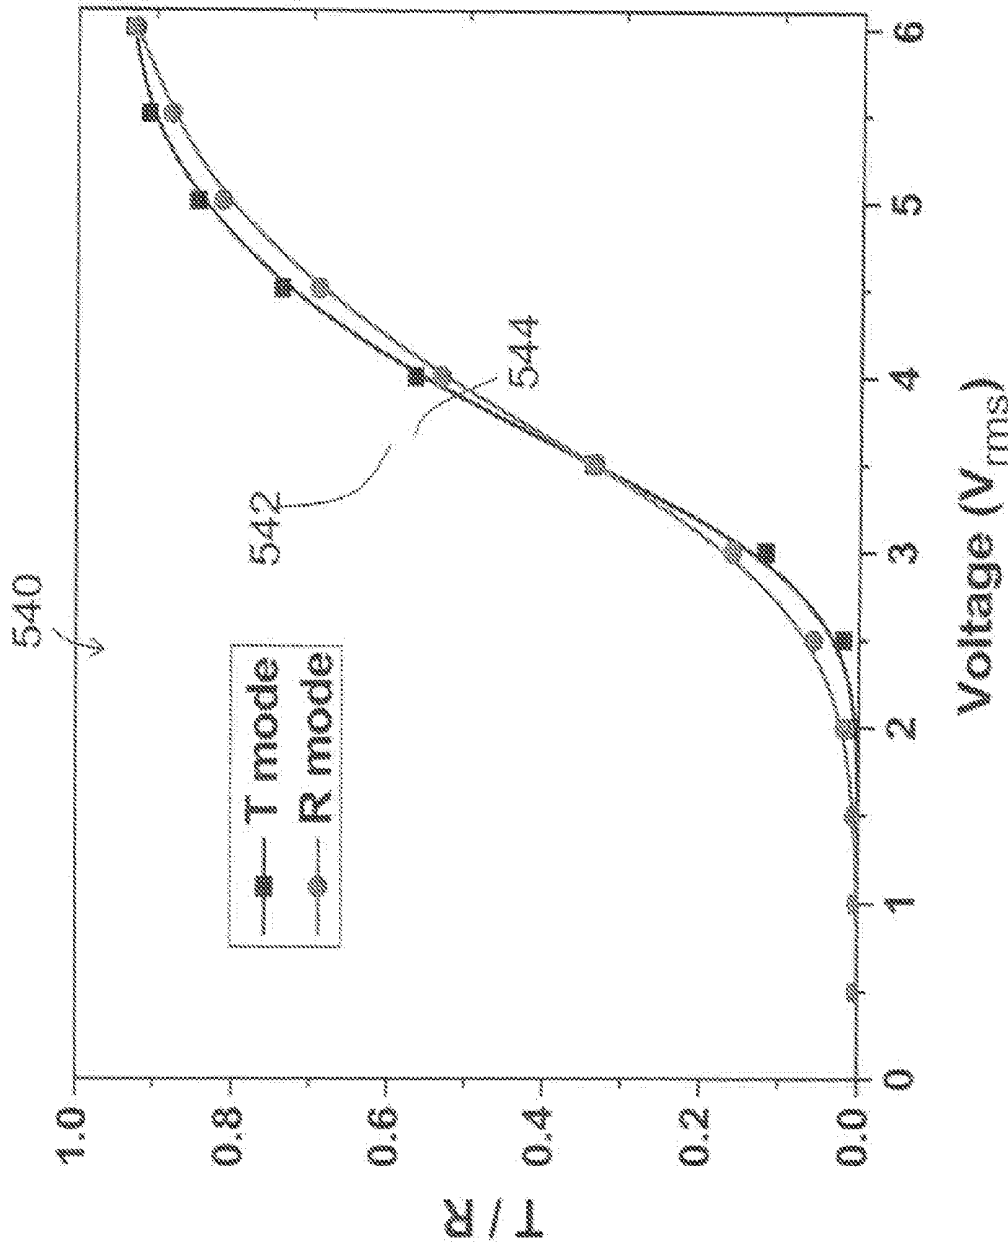
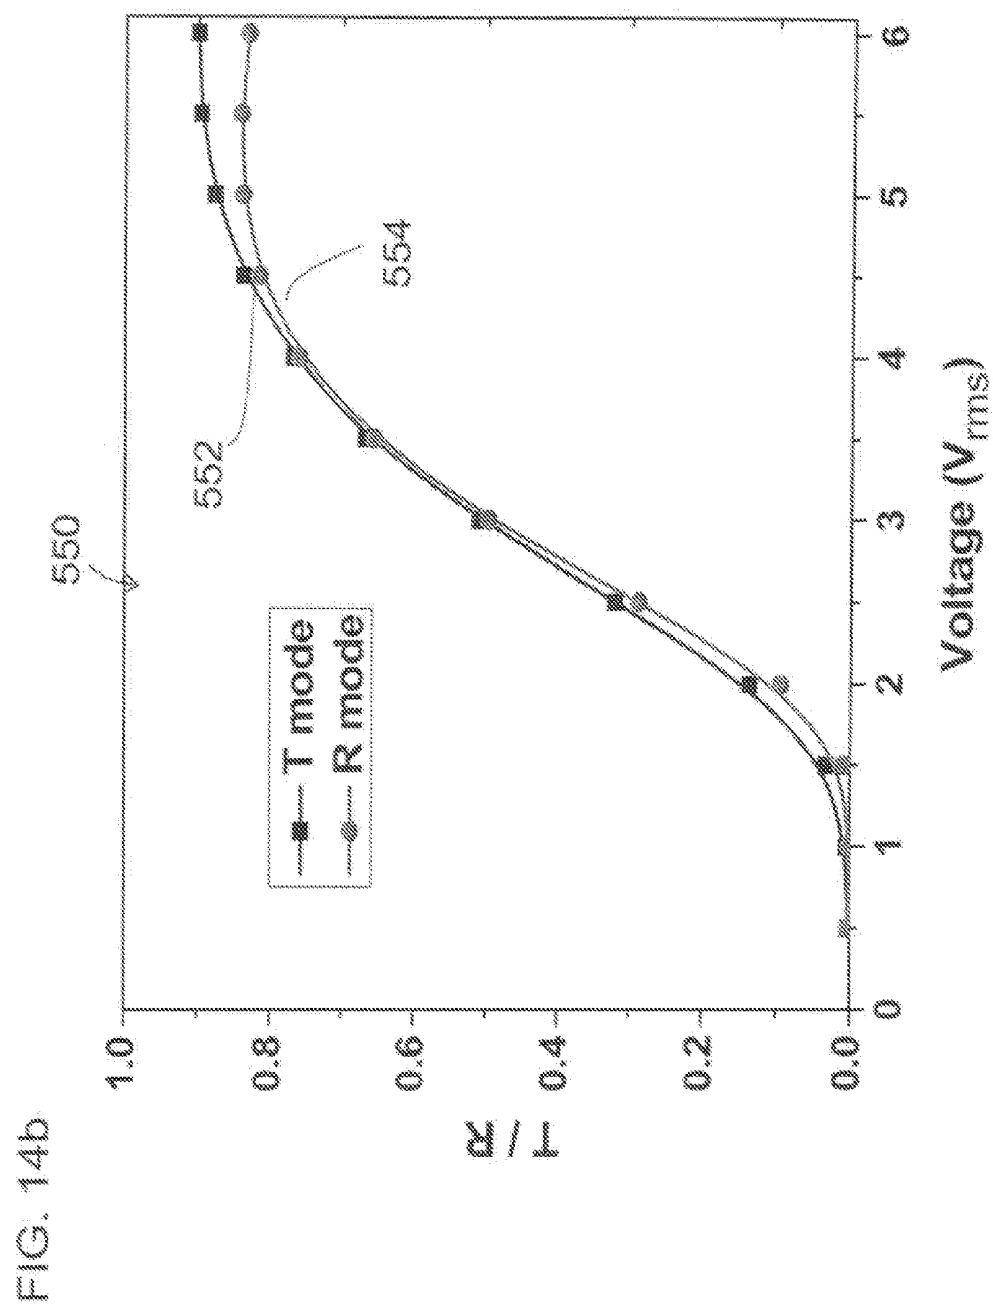
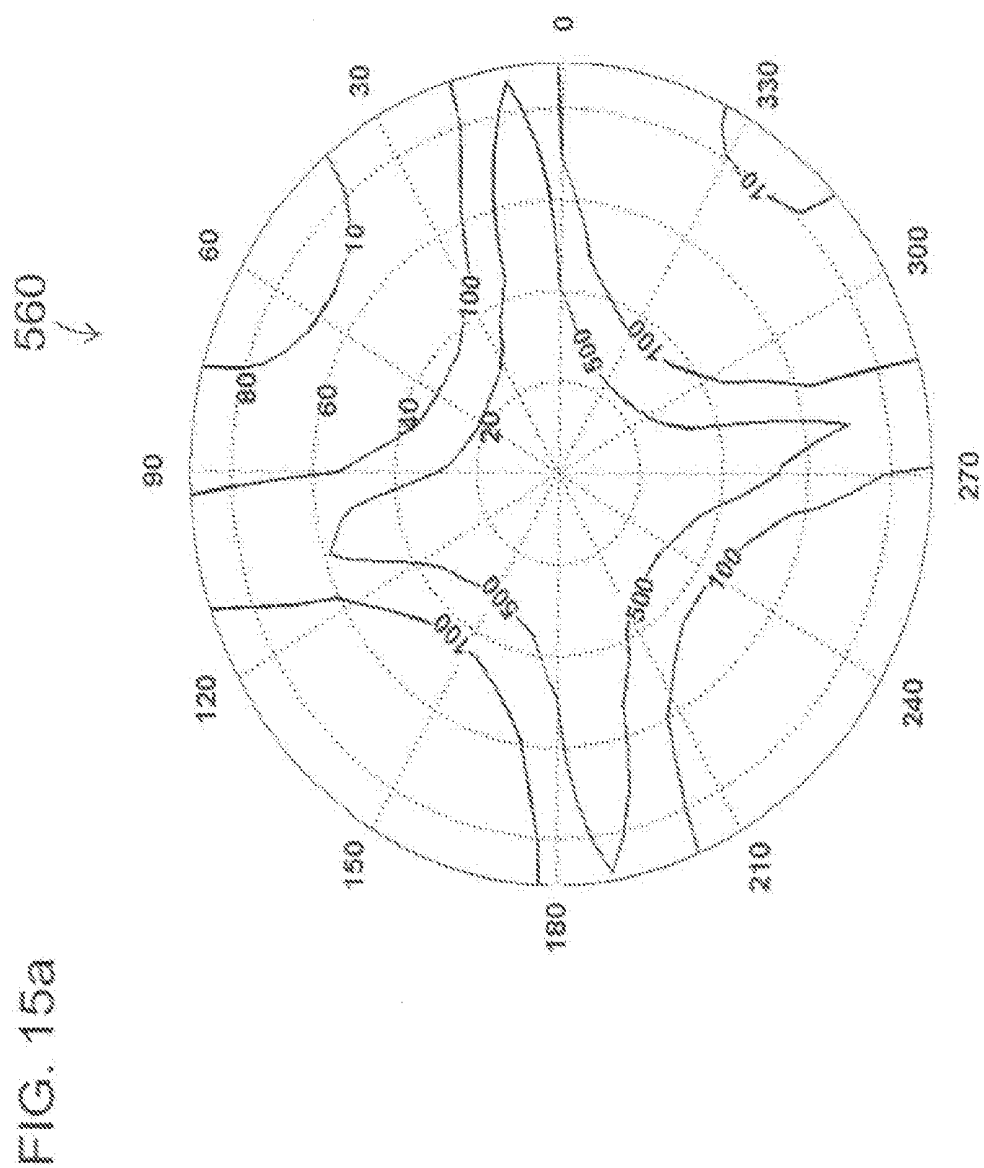


FIG. 14a







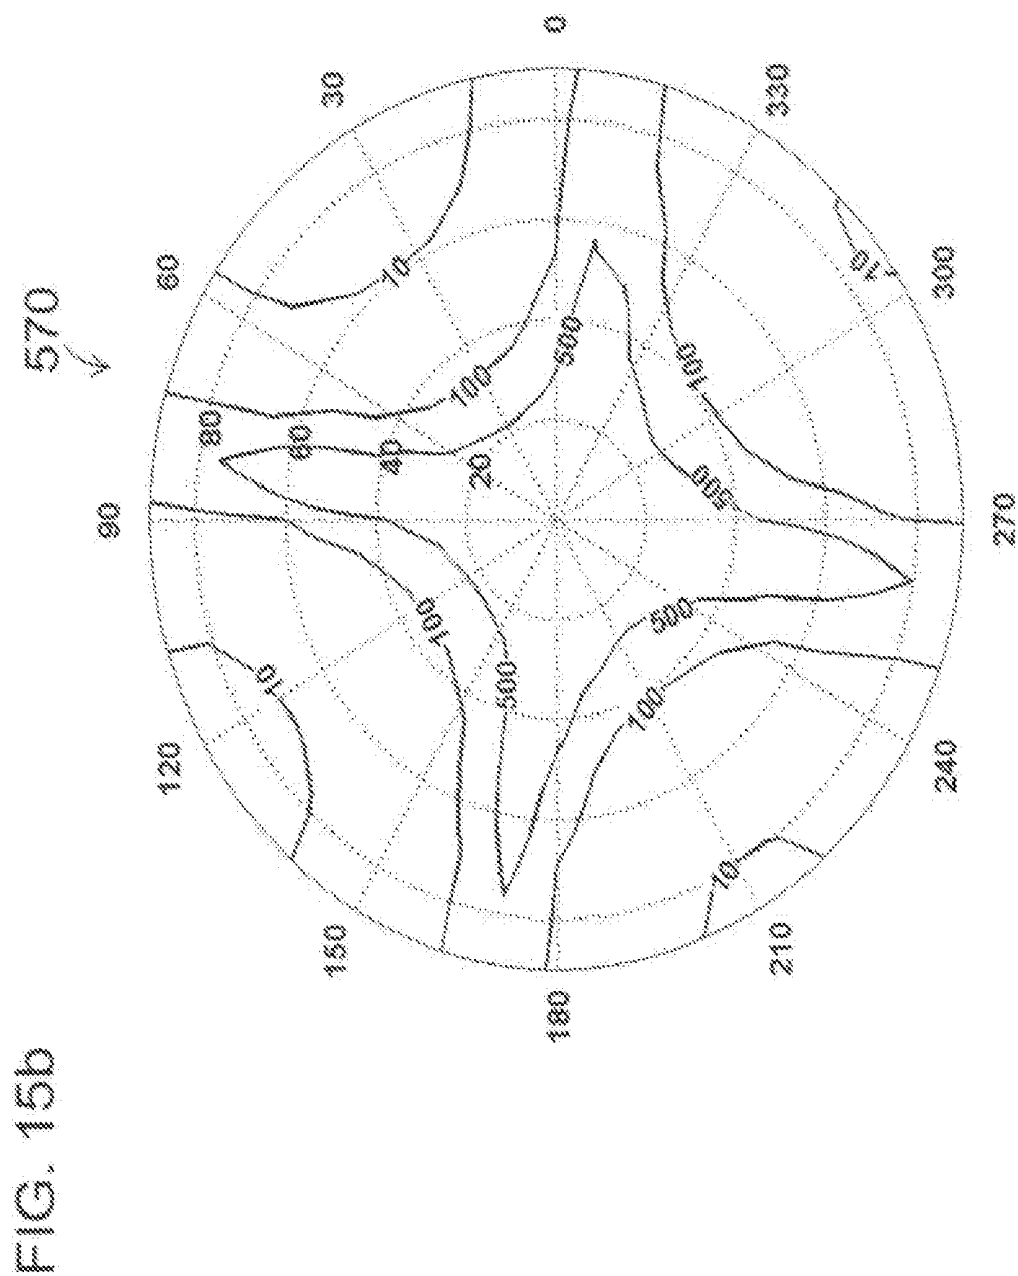


FIG. 16a

580

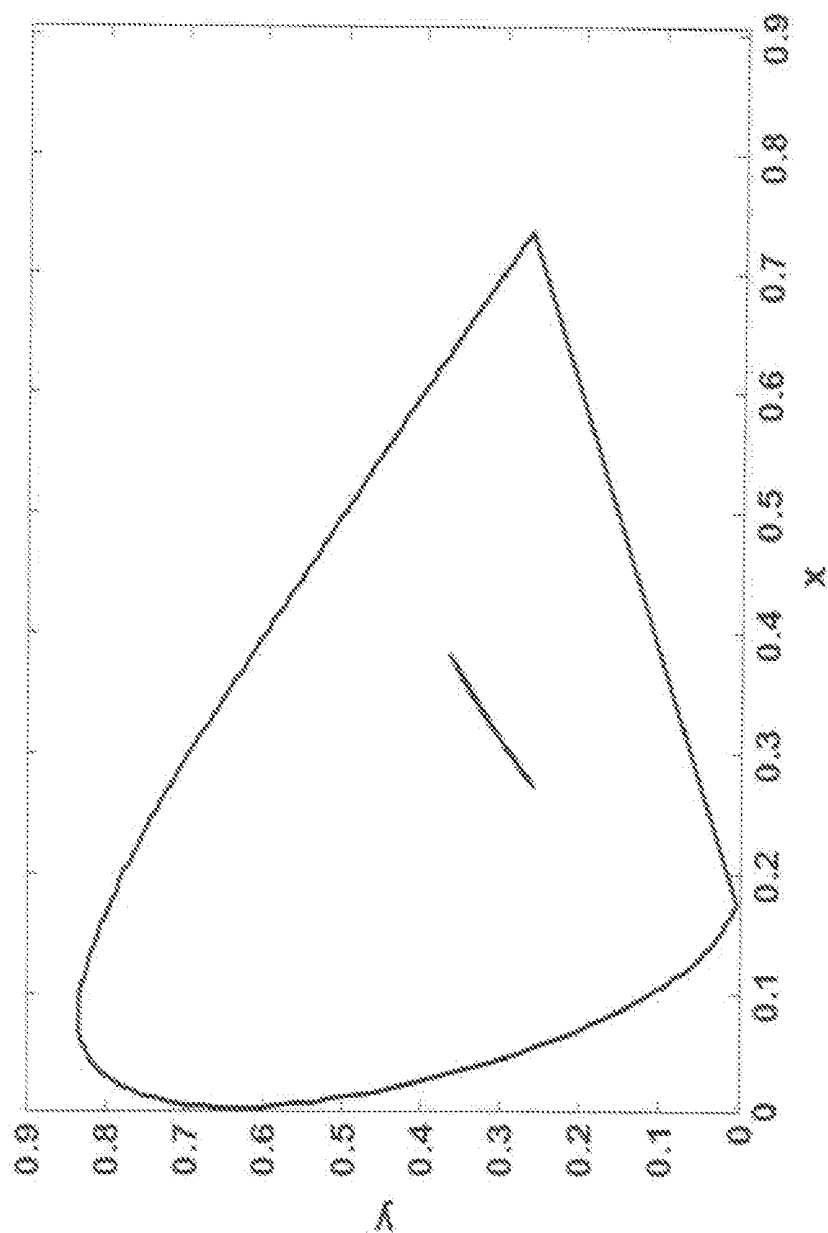


FIG. 16b

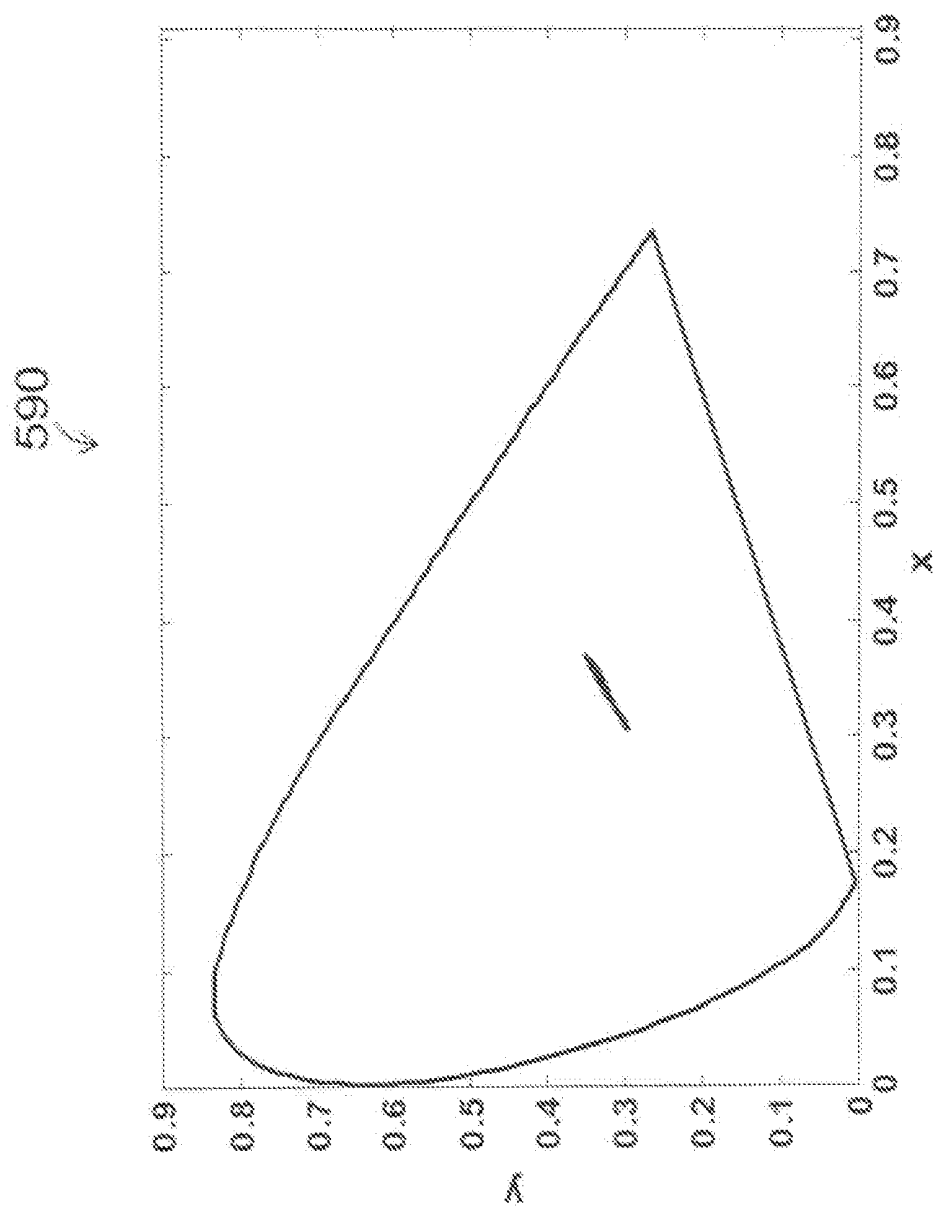


FIG. 17

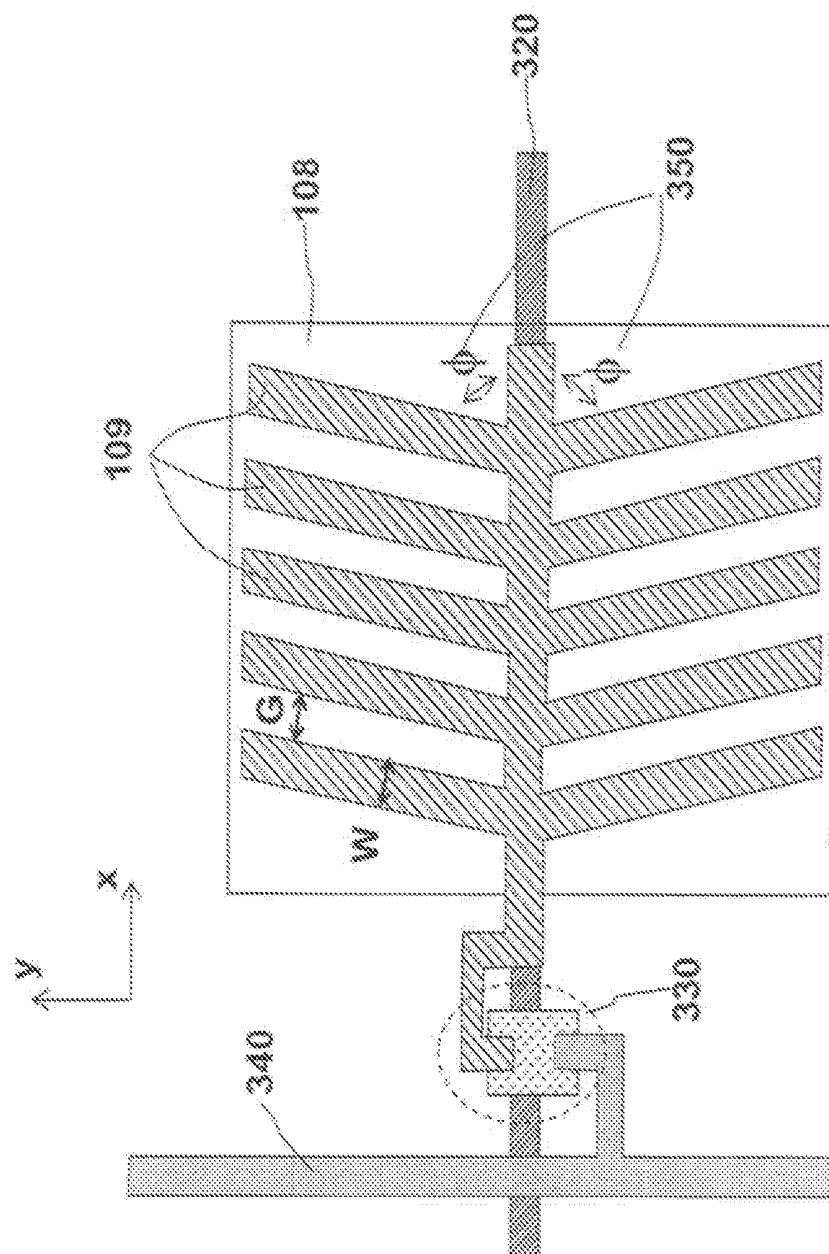


FIG. 18a

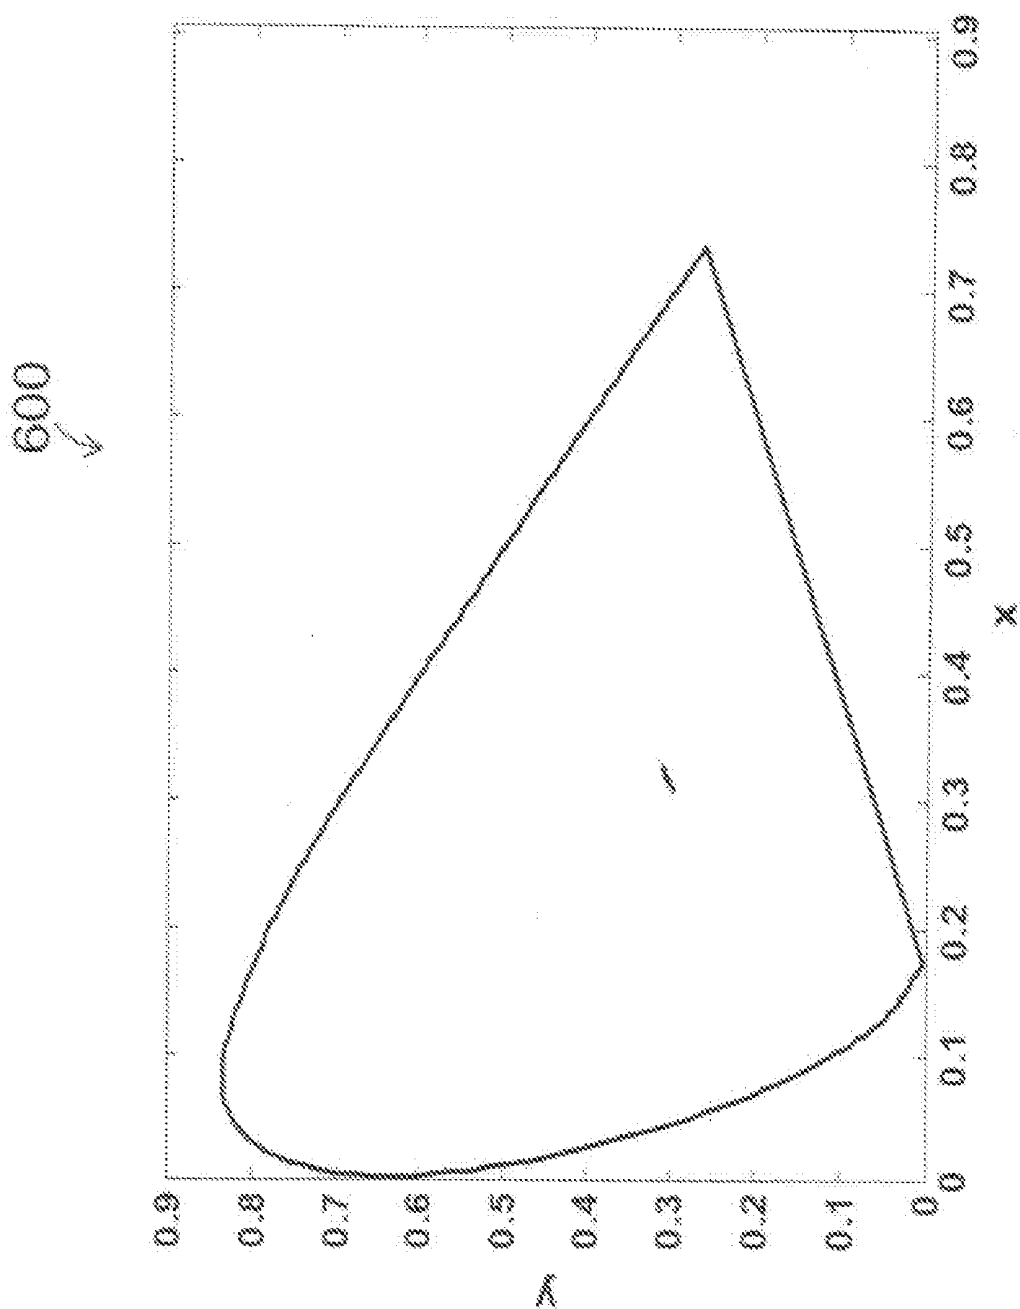


FIG. 18b


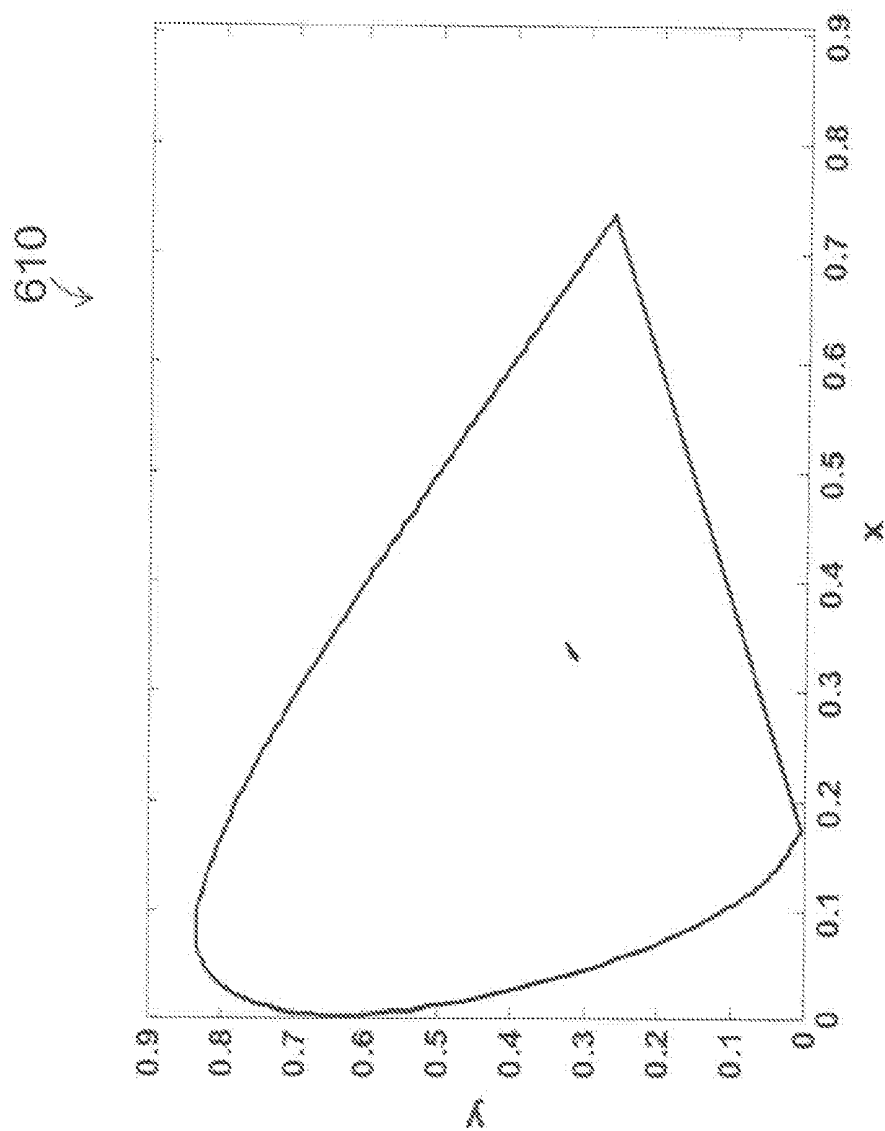


FIG. 20

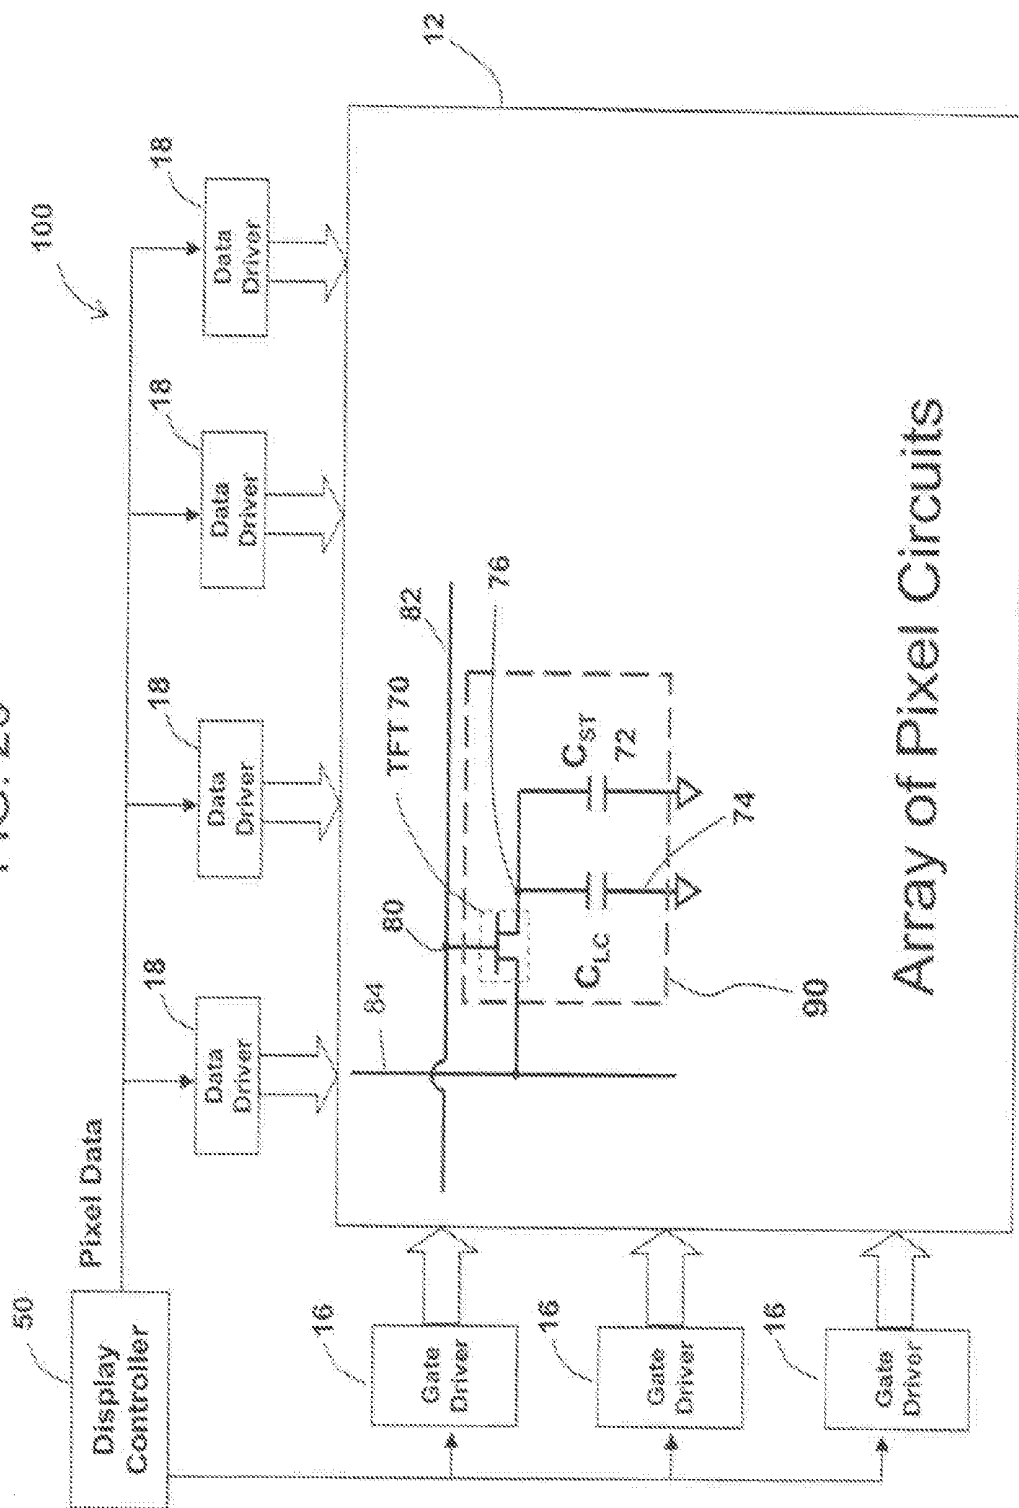

WIDE VIEWING ANGLE TRANSLFLECTIVE LIQUID CRYSTAL DISPLAYS

FIELD OF THE INVENTION

[0001] The present invention is related to a liquid crystal display (LCD), and more particularly to apparatus, methods, systems and devices for a high light efficiency, wide viewing angle transreflective liquid crystal display using a polarization dependent reflector as a means of reflecting light and an initially homogeneous aligned liquid crystal cell for the wide viewing angle transmissive mode for application requiring high light efficiency and low power consumption, and versatility for different ambient light conditions.

BACKGROUND AND PRIOR ART

[0002] Liquid crystal displays have been widely used in various mobile devices, owing to its high image quality, compact size, and light weight. In those devices, such as in cell phones and personal digit assistants (PDAs), a pure transmissive (T) typed LCD that exhibits a high contrast ratio and good color saturation is usually employed. However, the pure T type LCD has a poor outdoor readability because its image is washed out by strong ambient lights, such as sunlight, which makes it imperfect for devices that require frequency outdoor applications. Besides, its dependence on a backlight causes a relatively high power consumption, which further reduces the working time for each battery change. On the other hand, a reflective (R) type LCD does not require a backlight unit and uses the ambient light for displaying images instead. As a result the display's power consumption is low and has a good outdoor readability, making it uniquely useful for certain environments. However, the unavoidable surface reflection inherent in R type devices result in an inferior contrast and color saturation as compared to the T mode LCDs.

[0003] To overcome abovementioned problems of both the transmissive mode and reflective mode displays in mobile device applications, the transreflective typed LCD combines both T and R type LCDs into one display to obtain environment-versatility, good image quality, and low power consumption. A transreflective type LCD can operate in a transmissive mode and/or a reflective mode. In one example, each pixel of the transreflective LCD is divided into a T sub-pixel and a R sub-pixel, and the cell gap of the T (d_T) and R (d_R) regions are different ($d_T \sim 2 d_R$) for maximum light efficiency as described in U.S. Pat. No. 6,341,002 issued to Shimizu et al. on Jan. 22, 2002.

[0004] However, besides the light efficiency, another critical issue in abovementioned kind of display is its dependence on a broadband circular polarizer. As shown in FIG. 1a, a typical broadband circular polarizer 10 in most prior art transreflective LCDs consists of one linear polarizer along with one mono-chromatic half-wave plate and one mono-chromatic quarter-wave plate under a special alignment as described by S. Pancharatnam ("Achromatic combinations of birefringent plates: part 1. An achromatic circular polarizer," in Proc. Indian Academy of Science, vol. 41, sec. A, (1955), pp. 130-136. The mono-chromatic half-wave plate has its optics axis set at 15 degrees with respect to the transmission axis of the top polarizer, and the mono-chromatic quarter-wave plate has its optics axis set at 75 degrees with respect to the transmission axis of the polarizer. Because of the existence of the broadband quarter-wave plate above the LC cell for R mode,

the T mode requires another circular polarizer to be set below the LC cell to achieve a common dark state as in the R mode. A problem with this configuration is that the viewing angle of the transreflective LCDs is quite narrow.

[0005] FIG. 1b is a graph 20 that shows the simulated light leakage of two stacked circular polarizers, in which the light leakages at different viewing angles, both azimuthal and polar directions are calculated correspondingly. The calculated results are normalized to its maximum possible output value between two parallel aligned linear polarizers in the normal direction. As shown in FIG. 1b, the light leakage of two stacked broadband circular polarizers is severe at off-axis, e.g., the approximately 10% light leakage occurs within a cone at 40 degrees, which means the 10:1 contrast ration of two stacked circular polarizers is limited to approximately 40 degrees. However, the corresponding angular light leakage for two crossed linear polarizers is much less as shown in the graph 30 in FIG. 1c. The 10% light leakage is well suppressed to over 80 degrees, and 1% light leakage is over 50 degrees.

[0006] What is needed to solve these problems is a transreflective structure with a high light efficiency, good gray scale overlap between T and R modes, but no dependence on the abovementioned circular polarizer. In addition, a single cell gap structure for the purpose of simple fabrication and good yield is also of great interest to those skilled in the art.

SUMMARY OF THE INVENTION

[0007] A primary object of the invention is to provide new methods, systems, apparatus and devices for an apparatus, methods, systems and devices for a transreflective liquid crystal display device that can have wide viewing angle and are not dependent on the circular polarizers.

[0008] A secondary objective of the invention is to provide new methods, systems, apparatus and devices for a transreflective liquid crystal display device that can have a single cell gap for easy fabrication but with high light efficiency for both T and R modes, and can be driven by a single driving gamma curve for both T and R modes.

[0009] According to one aspect of the present invention, a liquid crystal display including a first and a second substrate have plural pixels defined therebetween; the first and second substrates have polarizing layer on an exterior surface and a single cell gap liquid crystal layer and alignment layers interposed between their inner surfaces, wherein the liquid crystal molecules are homogeneously aligned by the surface alignment layer; within each pixel, the liquid crystal display have a reflective region and a transmissive region, wherein a polarization dependent reflector, such as a wire grid polarizer is formed in the reflective region working as a means of reflecting the ambient light in displaying the images for the reflective mode, and the light from the backlight unit is employed to display the images in the transmissive mode, but no broadband quarter-wave plates are used in the transmissive region; besides at least one transparent electrode as the common electrode is formed on one of the substrate and at least one transparent electrode as the pixel electrode are formed on the same the substrate, wherein substantial horizontal electric fields are generated to rotate the liquid crystal molecules in a direction substantially parallel to the substrate surface when a driving voltage from the data line is applied to the pixel electrodes.

[0010] Further objects and advantages of this invention will be apparent from the following detailed description of preferred embodiments which are illustrated schematically in the accompanying drawings.

BRIEF DESCRIPTION OF THE FIGURES

[0011] FIG. 1a is the structure of a broadband circular polarizer.

[0012] FIG. 1b is the angular dependent light leakage of two stacked broadband circular polarizers.

[0013] FIG. 1c is the angular dependent light leakage of two crossed linear polarizers.

[0014] FIG. 2 is a cross-sectional diagram of a pixel.

[0015] FIG. 3 is the structure of a wire grid polarizer.

[0016] FIG. 4 is the top view of the strip electrode structure.

[0017] FIG. 5 is the optic axis alignment of each layer of the display.

[0018] FIG. 6 is the dark state for the display without applied voltage.

[0019] FIG. 7 is the bright state for the display with applied voltage.

[0020] FIG. 8a is the VT and VR curves of the display with a negative LC material and electrode width $W=3\text{ }\mu\text{m}$, $G=4\text{ }\mu\text{m}$, and electrode angle $\phi=80^\circ$.

[0021] FIG. 8b is the VT and VR curves of the display with a positive LC material and electrode width $W=2\text{ }\mu\text{m}$, $G=3\text{ }\mu\text{m}$, and electrode angle $\phi=10^\circ$.

[0022] FIG. 9 is the diagram of additional loss from the WGP surface of the R mode at an intermediate gray-level.

[0023] FIG. 10 is the VT and VR curves of the display with a single cell gap.

[0024] FIG. 11a is the VT and VR curves of the display with a negative LC material and electrode width $W=3\text{ }\mu\text{m}$, $G=8\text{ }\mu\text{m}$, and electrode angle $\phi=80^\circ$.

[0025] FIG. 11b is the VT and VR curves of the display with a positive LC material and electrode width $W=3\text{ }\mu\text{m}$, $G=6\text{ }\mu\text{m}$, and electrode angle $\phi=10^\circ$.

[0026] FIG. 12a is the VT and VR curves of the display with a negative LC material and electrode width $W=3\text{ }\mu\text{m}$, $G=4\text{ }\mu\text{m}$, and electrode angle $\phi=70^\circ$.

[0027] FIG. 12b is the VT and VR curves of the display with a positive LC material and electrode width $W=2\text{ }\mu\text{m}$, $G=3\text{ }\mu\text{m}$, and electrode angle $\phi=20^\circ$.

[0028] FIG. 13 is a cross-section of the structure of the present TRLCD invention with different electrode width W and gap G values in the T and R regions.

[0029] FIG. 14a is the VT and VR curves of the display with a negative LC material and electrode width $W=3\text{ }\mu\text{m}$, $G=4.5\text{ }\mu\text{m}$ in the R region and $W=3\text{ }\mu\text{m}$, $G=3\text{ }\mu\text{m}$ in the T region.

[0030] FIG. 14b is the VT and VR curves of the display with a positive LC material and electrode width $W=3\text{ }\mu\text{m}$, $G=4\text{ }\mu\text{m}$ in the R region and $W=3\text{ }\mu\text{m}$, $G=4.5\text{ }\mu\text{m}$ in the T region.

[0031] FIG. 15a is the viewing angle of the T mode in the structure of FIG. 14a.

[0032] FIG. 15b is the viewing angle of the T mode in the structure of FIG. 14b.

[0033] FIG. 16a is the color shift of the T mode in the structure of FIG. 14a.

[0034] FIG. 16b is the color shift of the T mode in the structure of FIG. 14b.

[0035] FIG. 17 is a top view of the chevron-shaped electrode TRLCD.

[0036] FIG. 18a is the color shift of the T mode in the structure of FIG. 17 with a negative LC material.

[0037] FIG. 18b is the color shift of the T mode in the structure of FIG. 17 with a positive LC material.

[0038] FIG. 19 is the cross-section view of the TRLCD with both TFT and WGP on one substrate

[0039] FIG. 20 is a schematic diagram of a liquid crystal display 100 according to the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0040] Before explaining the disclosed embodiments of the present invention in detail it is to be understood that the invention is not limited in its application to the details of the particular arrangements shown since the invention is capable of other embodiments. Also, the terminology used herein is for the purpose of description and not of limitation.

[0041] The following is a list of reference numerals used in the figures and description to identify element of the present invention.

- [0042] 10 Broadband circular polarizer
- [0043] 12 array of pixel circuits
- [0044] 16 gate driver
- [0045] 18 data driver
- [0046] 20 circular polarizer leakage
- [0047] 30 linear polarizer leakage
- [0048] 50 display controller
- [0049] 70 thin film transistor
- [0050] 72 storage capacitor
- [0051] 74 LC capacitor
- [0052] 76 TFT drain
- [0053] 80 TFT gate
- [0054] 82 gate line
- [0055] 84 data line
- [0056] 90 pixel
- [0057] transfective LCD
- [0058] 101a crossed linear polarizer
- [0059] 101b crossed linear polarizer
- [0060] 102a substrate
- [0061] 102b substrate
- [0062] 103 insulation layer
- [0063] 104a alignment layer
- [0064] 104b alignment layer
- [0065] 105 polarization dependent reflector
- [0066] 106 liquid crystal layer
- [0067] 107 LC molecules
- [0068] 108 common electrode
- [0069] 109 pixel electrode strips
- [0070] 109a electrode strip in reflective region
- [0071] 109b electrode strip in transmissive region
- [0072] 110 transfective LCD
- [0073] 116 backlight
- [0074] 118 incident backlight
- [0075] 120 pixel
- [0076] 122 reflective region
- [0077] 124 transmissive region
- [0078] 130 transmission axis
- [0079] 140 incident ambient light
- [0080] 150 transmitted ambient light
- [0081] 160 transmitted backlight
- [0082] 170 reflected ambient light
- [0083] 208 common electrode
- [0084] 209 pixel electrode
- [0085] 220 metal strips
- [0086] 222 incident light
- [0087] 224 first component of the light

[0088] 226 second component of the light
 [0089] 230 lengthwise direction
 [0090] 320 gate line 320
 [0091] 330 thin film transistor
 [0092] 340 data line
 [0093] 350 lengthwise strip direction
 [0094] 400 voltage dependent T and R curves
 [0095] 402 voltage dependent T curve
 [0096] 404 voltage dependent R curve
 [0097] 410 voltage dependent T and R curves
 [0098] 412 voltage dependent T curve
 [0099] 414 voltage dependent R curve
 [0100] 415 voltage dependent T and R curves
 [0101] 417 voltage dependent R curve
 [0102] 419 voltage dependent T curve
 [0103] 420 voltage dependent T and R curves
 [0104] 422 voltage dependent T curve
 [0105] 424 voltage dependent R curve
 [0106] 430 voltage dependent T and R curves
 [0107] 432 voltage dependent T curve
 [0108] 434 voltage dependent R curve
 [0109] 440 voltage dependent T and R curves
 [0110] 442 voltage dependent T curve
 [0111] 444 voltage dependent R curve
 [0112] 450 voltage dependent T and R curves
 [0113] 452 voltage dependent T curve
 [0114] 454 voltage dependent R curve
 [0115] 500 pixel
 [0116] 540 voltage dependent T and R curves
 [0117] 542 voltage dependent T curve
 [0118] 544 voltage dependent R curve
 [0119] 550 voltage dependent T and R curves
 [0120] 552 voltage dependent T curve
 [0121] 554 voltage dependent R curve
 [0122] 560 iso-contrast plot
 [0123] 570 iso-contrast plot
 [0124] 580 color shift plot
 [0125] 590 color shift plot
 [0126] 600 color shift plot
 [0127] 610 color shift plot
 [0128] 650 pixel
 [0129] FIG. 2 is cross-sectional diagram of an example of a pixel 90 of a transfective liquid crystal display 100. In the display 100, the liquid crystal layer 106 is sandwiched between the bottom substrate 102a and the top substrate 102b, which together are further interposed between two crossed linear polarizers 101a and 101b. The liquid crystal molecules are initially homogeneously aligned by the surface alignment layers 104a and 104b. A first transparent plane electrode layer 108 is formed on the top substrate 102b as the common electrode; a group of second transparent electrode strips 109 with a width W and a gap G between adjacent strips are formed on the substrate 102b as the pixel electrodes 109, wherein the common 108 and pixel 109 electrodes are insulated by a passivation layer 103 such as silicon oxide (SiO₂) or silicon nitride (Si₃N₄) formed therebetween. Each pixel 120 of the display 100 is divided into a reflective region 122 and a transmissive region 124. In the reflective region 122, a polarization dependent reflector such as a wire grid polarizer 105 is formed on the bottom substrate 102a as a means of reflecting the ambient light incident from the top polarizer 101b. In the transmissive region 124, the light from the backlight unit 116 transmits the bottom polarizer 101a and modulated by the LC layer to displays the image.

[0130] As shown in FIG. 3, the wire grid polarizer (WGP) 105 includes metal strips 220 formed on the lower substrate 102a. The metal strips 220 extend along the direction 230 referred to as the lengthwise direction of the metal strips 220. The wire grid polarizer 105 has a transmission axis that is perpendicular to the lengthwise 230 of the metal strips 220 and a reflection axis that is parallel to the lengthwise direction 230 of the metal strips 220. When an unpolarized incident light 222 impinges on the surface of the wire grid polarizer 105, a first component of the light 224 having a polarization parallel to the lengthwise direction of the metal strips 220 is reflected, and a second component of the light 226 having a polarization perpendicular to the metal strips passes through the wire grid polarizer 105.

[0131] FIG. 4 is a top view of the plane common electrode and the strip-shaped pixel electrodes of pixel 90, where an x-y coordinate is defined as a reference. As shown, the x-axis is a reference direction set along the transmission axis 130 shown in FIG. 2 of the top polarizer 101b. The common electrode 108 is a transparent plane electrode and the pixel electrodes 109 are strip-shaped with a width W and a gap G and the lengthwise strip direction 350 is set at an angle ϕ with respect to the x-axis. The pixel is controlled by the thin-film-transistor (TFT) 330. When the TFT 330 is turned on by the signal from the gate line 320, the voltage from the data line 340 is applied to the pixel electrodes 109 to rotate the liquid crystal molecules.

[0132] The optic axes of the each layer and the electrode strip orientation show in FIG. 2 are shown in FIG. 5. As previously described, the transmission axis 130 of the top polarizer 101b is taken as the reference direction. The transmission axis of the bottom polarizer 101a is set at a direction perpendicular to that of the top polarizer 101b. The lengthwise direction 230 of the wire grids 220, which is also the reflective axis of the wire grid polarizer 105, is set perpendicular to the transmission axis 130 of the top polarizer 101b.

[0133] The liquid crystal layer 106 is rubbed in a direction β with respect to the reference direction 130 and the electrode strip direction 350 of the pixel electrodes 109 has an angle ϕ with respect to the reference transmission axis 130 of the top polarizer. The angle β can have two values: parallel or perpendicular to the reference direction 130. The specific value of the angle ϕ is based on the LC material used in this design and the rubbing direction β . More specifically, the absolute value $|\phi - \beta|$ should be within a range of approximately 0° and 45°, when a positive dielectric anisotropy ($\Delta\epsilon$) material is used, and it should be within a range of approximately 45° and 90°, when a negative $\Delta\epsilon$ material is used. For example, when the rubbing direction angle β is set at approximately 0° with respect to the transmission axis of the top polarizer and a positive $\Delta\epsilon$ material is used, the value of the angle ϕ should be set between approximately 0° and approximately 45°. On the other hand, when a negative $\Delta\epsilon$ LC material is used with $\beta = 0^\circ$, the angle ϕ is set between approximately 45° and approximately 90°. Correspondingly, when the angle β is set at 90°, the angle ϕ is set between approximately 0° and approximately 45° when a negative $\Delta\epsilon$ LC material is used, and be set between approximately 45° and approximately 90° when a positive $\Delta\epsilon$ LC material is used.

[0134] Operationally, when no voltage is applied to pixel electrode 109 as shown in the display 110 in FIG. 6, the LC molecules 107 are initially homogeneously aligned. For the transmissive (T) region 124 of the pixel at the voltage-off state, the light 118 that transmits the bottom polarizer 101a

has polarization perpendicular to the transmission axis **130** of the top polarizer **101b**. Because the liquid crystal layer has a rubbing direction either parallel ($\beta=0^\circ$) or perpendicular ($\beta=90^\circ$) to the transmission axis **130**, that transmitted back-light **160** maintains its polarization state when passing through the LC layer, and is blocked by the top crossed polarizer **101b** on the top substrate **102b**. For the reflective (R) region **122** of the pixel at the voltage-off state, the incident ambient light **140** passes the top polarizer first to have a polarization parallel to the transmission axis **130**, then the transmitted incident light **150** experiences negligible phase retardation after passing through the LC layer. Because the reflective axis of the WGP **105** is set at perpendicular to the transmission axis **130**, the ambient light passes through the WGP **105** and is blocked by the bottom polarizer **101a**. Thus, at the voltage-off state, both the T and R regions are in a common dark state.

[0135] When a high voltage, above the threshold voltage, is applied to the pixel electrode **109**, (the threshold voltage is a voltage below which the perturbation of liquid crystal molecule orientations is negligible with respect to the initial state when no pixel voltage is applied,) in the LC display **200** shown in FIG. 7, the LC molecules are rotated by the electric fields generated from the pixel **109** and common **108** electrodes. Therefore the new average optic axis of the LC layer changes to a new angle. When the phase retardation value $d\Delta n$, where d is cell gap of the LC layer, Δn equals $n_e - n_o$, where n_e and n_o are the extraordinary and ordinary refractive indices, respectively, of the liquid crystal material, is equal to approximately half-wave plate, the LC layer functions like a polarization rotator for the light passing through it. In this example, for the transmissive region **124** of the pixel at a voltage-on state, the incident light **118** from the backlight **116** first has a polarization state that is parallel to the transmission axis of the bottom polarizer **101a** and the transmitted back-light **160** further passes through the LC layer.

[0136] If the new average optic axis of the LC layer is rotated by 45° away from its initial rubbing direction, the LC layer rotates the polarization of the transmitted backlight **160** from the bottom polarizer by an angle of 90° , thus the transmitted backlight **160** light transmits through the top polarizer **101b** and is seen by the viewer. For the reflective region **122** of the pixel **120** at a voltage-on state, the incident ambient light **140** passes the top polarizer **101b** and the transmitted ambient light **150** has a polarization parallel to the transmission axis **130**. The polarization direction of the transmitted ambient light **150** is first rotated approximately 90° by the LC layer before it impinges on the WGP surface **105**, thus the transmitted ambient light **150** is parallel to the reflective direction **230** of the WGP **105**, and is reflected back through the LC layer as reflected ambient light **170**. After the reflected ambient light **170** passes the LC layer, its polarization direction experiences another 90° rotation to a direction parallel to the transmission axis **130** and then transmits through the top polarizer **101b** to the viewer. A common bright state is achieved for both the T and R modes.

[0137] As an example in accordance with the LC display structure **100** shown in FIG. 2, a negative LC material, such as MLC-6608 from Merck, is taken in this structure with its parallel dielectric constant $\epsilon_{11}=3.6$, perpendicular one $\epsilon_1=7.8$, elastic constants $K_{33}=16.7$ pN, $K_{33}=18.1$ pN, extraordinary refractive index $n_e=1.5578$, and ordinary refractive index $n_o=1.4748$ at $\lambda=589$ nm. In this example, the liquid crystal layer has a cell gap of approximately $4\ \mu\text{m}$, and

the electrode width W of approximately $3\ \mu\text{m}$ and the gap between adjacent electrode strips is approximately $4\ \mu\text{m}$. The rubbing direction β of the LC layer is set at approximately 0° with respect to the transmission axis **130** of the top polarizer **101b** and the electrode strip direction ϕ is at an angle of approximately 80° to gain maximum light efficiency. The angles are almost equivalent to the example with $\beta=90^\circ$ and $\phi=10^\circ$.

[0138] FIG. 8a is a graph **400** showing the simulated voltage-dependent efficiency curves for original voltage/transmission (VT) curve, original voltage/reflection (VR) curve. As shown in FIG. 8a, both the voltage-transmissive (VT) curve **402** and the voltage-reflective (VR) curve **404** share a common dark state and reach above approximately 90% of the maximum possible light efficiency at $V=6$ Vrms.

[0139] Correspondingly, the structure can also use a positive $\Delta\epsilon$ LC material such as MLC-6686 from Merck with its parallel dielectric constant $\epsilon_{11}=14.5$, perpendicular one $\epsilon_1=4.5$, elastic constant $K_{11}=8.8$ pN, $K_{33}=14.6$ pN, extraordinary refractive index $n_e=1.5774$, and ordinary refractive index $n_o=1.4824$ at $\lambda=589$ nm. In this example, the liquid crystal layer has a cell gap of approximately $4\ \mu\text{m}$, and the electrode width W equal approximately $2\ \mu\text{m}$ and the gap G between adjacent electrode strips is set at approximately $3\ \mu\text{m}$. When the rubbing direction β of the LC layer is set at approximately 0° with respect to the transmission axis **130** of the top polarizer **101b**, then the electrode strip direction ϕ is at an angle of approximately 10° to gain maximum light efficiency. The graph **410** shown in FIG. 8b shows the simulated voltage-dependent efficiency curves for original VT curve and original VR curve. Similarly, both the VT curve **412** and VR curve **414** from graph **410** reaches over approximately 90% of the maximum possible light efficiency. Since the dielectric anisotropy $\Delta\epsilon$ value of the positive material is much larger than that of the negative material, the on-state voltage of the cell using a positive LC material is also smaller than that of the negative cell.

[0140] However, for both cells using a positive dielectric anisotropy $\Delta\epsilon$ and a negative dielectric anisotropy $\Delta\epsilon$ LC material, VR is always lower than the corresponding VT value at each inter-mediate gray level. For example, in the example shown in FIG. 8a, the differences in the VR curve **404** and VT curve **402** is caused by the loss of light in the R sub-pixel **122** when the pixel voltage corresponds to a gray scale between the dark and bright states. Referring to FIG. 9, when the pixel voltage is at a level such that the rotation of the liquid crystal molecules **107** is less than approximately 45° from its original rubbing direction, the linearly polarized transmitted ambient light **150** has a polarization direction non-parallel to the reflective axis of the WGP **105** when the transmitted ambient light **150** reaches the surface of the wire grid polarizer dielectric anisotropy **105**. A portion of the transmitted ambient light **150**, the component of the light perpendicular to the metal stripes **220** passes the wire grid polarizer (WGP) **105** and is absorbed by the lower polarizer **101a**. Thus, the amount of ambient transmitted light that is reflected by the wire grid polarizer **105** is less than the transmitted backlight **160** that passed through the linear polarizer **101a**. This accounts for the lower luminance in the R sub-pixel region **122** compared to the T sub-pixel region **124** for a given pixel voltage. This additional loss from the WGP **105** surface results in VT and VR curves that deviate from each other as shown in FIGS. 8a and 8b.

[0141] As an estimation of the match or deviation between the VT and VR curves, the root-mean-square (RMS) value of the difference between the normalized T and R (normalization is in the reference to the maximum transmission of two stacked parallel linear polarizers) is introduced. Still referring to FIG. 8, for the VT and VR curves shown, when N=256 voltage points are sampled between gray-level 0 (wherein V=approximately 0.5 Vrms) and gray-level 255 (wherein V=approximately 6.0 Vrms), the RMS value of the difference between the T and R can be calculated by the following value

$$\sqrt{\frac{\sum_{i=1}^N (T_i - R_i)^2}{N}}.$$

For the VT 402 and VR 404 curves shown in FIG. 8A, the RMS value is approximately 12.9%, and the RMS value for the VT and VR curves 412 and 414 shown in FIG. 8B is approximately 13.8%. Referring to FIG. 10 which is a plot for a transmissive LCD using a single cell gap and a single driving circuit, the RMS value of difference between the VT curve 417 and VR curve 419 in graph 415 is approximately 31%, when V=approximately 1.5 Vrms is taken for gray level 0 and V=approximately 3.0 Vrms is taken for gray level 256.

[0142] FIG. 11a is a graph 420 that shows another example using a negative dielectric anisotropy $\Delta\epsilon$ LC material with electrode width W equal approximately 3 μm and gap G equal approximately 8 μm . The VT curve 422 reaches approximately 90% light efficiency at V=approximately 6 Vrms and VR curve 424 reaches approximately 80% at approximately the same voltage. Similarly, FIG. 11b is a graph 430 that shows the example using a positive dielectric anisotropy $\Delta\epsilon$ LC material with electrode width W=approximately 3 μm and gap G=approximately 6 μm . The light efficiency of T mode reaches approximately 85% at V=approximately 5.5 Vrms as shown in curve 432, and the efficiency of R mode reaches approximately 70% at V=approximately 5.5 Vrms as shown in curve 434. As shown in FIGS. 11a and 11b, the basic shapes of the VT and VR curves seem to change little in response to the variation of the electrode width and gap.

[0143] In another example, the electrode strip direction ϕ is varied with respect to the rubbing angle β for the cell configuration shown in FIGS. 1-7. In this example, the cell parameters are kept same as the parameters used to produce the VT 402 and VR 404 curves shown in FIG. 8a, with the exception that the electrode strip direction ϕ is changed from approximately 80° to approximately 70°. FIG. 12a is a graph 440 that shows the corresponding VT curve 442 and VR curve 444 when ϕ =approximately 70°. Because the effective rotation of the LC molecules away from the initial rubbing angle is less than 45°, the maximum light efficiency is also reduced for both T and R modes. Similarly for the cell using a positive LC material, the angle ϕ is changed from approximately 10° to approximately 20°, while keeping the other parameters approximately the same as the parameters used to produce graph 410 shown in FIG. 8b, the resulting VT curve 452 and VR curve 454 are shown in graph 450 of FIG. 12b. The maximum light efficiency is slightly reduced, but the shape of the curves is similar. From the analysis above, it is shown that the design has relatively large tolerance of the variation of the electrode width W, gap G, and electrode strip angle ϕ .

[0144] Yet in another example of the present invention is shown in FIG. 13. In this example, the electrode width W and distance (gap) G between adjacent electrodes of R pixel electrodes 109a are different in the R region 122 from electrode width W and gap G between adjacent pixel electrodes of T pixel electrodes 109b in the T region 124 of the LCD pixel 500. This configuration allows the designer to optimize the match between the VT and VR curves in response to the applied voltage. FIG. 14a is a graph 540 that shows the simulated VT 542 and VR 544 curves for the structure shown in FIG. 13, where in the reflective region 122 the width W_R equal approximately 3 μm and the gap G_R equal approximately 4.5 μm , and in the transmissive region 124 the width W_T equal approximately 3 μm and the gap G_T equals approximately 3 μm . In this example, the LC material is a negative $\Delta\epsilon$ LC material such as MLC-6608 from Merck. The cell gap is kept at 4 μm and rubbing angle β =0° and electrode strip direction ϕ =80°. For the VT curve 542 and VR curve 544 shown in FIG. 14a, when N=256 voltage points are sampled between gray-level 0 (wherein V=0.5 Vrms) and gray-level 255 (wherein V=6.0 Vrms), the RMS value of the difference between the T and R by

$$\sqrt{\frac{\sum_{i=1}^N (T_i - R_i)^2}{N}}$$

is approximately 2.8%. Similarly, FIG. 14b is a graph 550 that shows the simulated VT and VR curves for the structure shown in FIG. 13, where the W_R =3 μm , G_R =4 μm , W_T =3 μm , and G_T =4.5 μm , and the LC material is a positive $\Delta\epsilon$ LC material such as MLC-6686 from Merck. The RMS value of this case is between VT curve 552 and VR curve 554 is approximately 2.69%, if gray-level 0 is set at V=0.5 Vrms and gray-level 256 is set at V=5.5 Vrms. Although the width W and gap G in the T and R regions are different, they can be still fabricated by the same steps of photomasks as those using uniform width W and gap G in both of the T and R regions.

[0145] Because of the removal of broadband quarter-wave plate in the present invention, for the T mode, the viewing angle is inherently wide even without additional compensation films. FIG. 15A shows the iso-contrast plot 560 for the T mode in the structure in FIG. 13 where W_T =3 μm , and G_T =3 μm and a negative LC material is used. As shown, the viewing cone with contrast ratio (CR)>10:1 is greater than approximately 85° at most of the azimuthal angles. Similarly, FIG. 15B shows the iso-contrast plot 570 for the T mode in the structure shown in FIG. 13 with W_T =3 μm and G_T =4.5 μm using a positive LC material. The CR is greater than 10:1 viewing cone is over 70° at most azimuthal directions. From these FIGS. 14a and 14b, it is shown that novel TRLCD design of the present invention is a wide viewing angle technology suitable for high performance display applications. In addition to the viewing angle, color shift is another important property to characterize the performance of a display.

[0146] When a LCD panel is illuminated by a white backlight such as D65 at its bright state, the output light has a special spectrum distribution after passing through the polarizers, the LC cell, and the color filters. This output light at the normal direction is specified by one color coordinate value in the CIE 1931 Chromaticity Diagram that is close to (x=0.33, y=0.33). However, the same backlight through the LCD panel

has different color coordinate values if viewed from off-axis directions, which is called color shift. For the LC structure with same cell parameters for FIG. 15a, its color shift viewed at different azimuthal angles with a fixed off-axis polar angle equal to 60° is shown in the graph 580 in FIG. 16a. All the color coordinates are plotted in this figure and their trace shows all the possible colors it can viewed from different azimuthal angles with polar angle at 60°. In the cell using a negative LC material, the LC molecules experience a quite uniform rotation at the bright state and the domain is almost purely one-domain structure. As a result, the average color shift is quite evident. On the other hand, in the same cell in the graph 590 in FIG. 15b using a positive LC material, the color shift shown in FIG. 16b is relatively small as compared to that of FIG. 16a. It results in that a positive LC material will experience both substantial rotations and some tilts at the bright state. Therefore, there are multi-domain like structure of the LC molecules' distribution. To further suppress the color shift of the structures abovementioned, in the preferred embodiment, the multi-domain structure is highly preferred.

[0147] In yet another example of the present invention, a chevron-shaped electrode structure is introduced as shown in FIG. 17. The common electrode 108 is a transparent plane electrode and the pixel electrodes 109 are chevron-shaped strip-shaped transparent electrodes. In this alternative configuration, the x-y coordinate takes the transmission axis 130 of the top polarizer 101b as the reference x-direction. The pixel electrode strips 109 in one period have a top half plane and a bottom half plane shown in FIG. 17. Each part of the pixel electrode has a width of W and gap of G and the strips of both planes have an angle ϕ with respect to the x-axis. A TFT 330 controlled by gate line 320 is formed to control the voltage applied to the pixel electrode 109. The driving voltage comes from the data line 340.

[0148] In the voltage-off state, the LC molecules are rubbed in a direction parallel to either the x- or the y-direction and the backlight transmitted through the bottom polarizer does not experience a phase retardation from the LC layer, and as a result is blocked the top polarizer. When a high voltage is applied to the pixel electrode 109, the LC molecules in the top part of the pixel electrode strips 109 is rotated by 45° towards one direction, and those in the bottom part will also be rotated by 45° towards the opposite direction of the LC molecules in the top half plane. Therefore the lights passing both top and bottom planes will have polarization rotation by approximately 90° and transmit through the top polarizer. Because more domains are introduced by the structure of the pixel electrodes shown in FIG. 17, the color shift is reduced. FIG. 18a is a graph 600 that shows the color shift of the cell using the same negative LC material, cell gap, electrode width W, and gap G as shown in FIG. 15a, but with two-domain structured electrodes as shown in FIG. 17. As shown, the color shift is greatly suppressed by the chevron shaped electrodes. Similarly, FIG. 18b is a graph 610 that shows the color shift of the cell using the same positive LC material, cell gap, electrode width, and gap G as shown in FIG. 15b, but with a two-domain shaped electrode. The color shift is very small and confined to the white point (0.33, 0.33). Thus, the multi-domain structured electrode shape in this example is used to improve the color performance of the display.

[0149] In all the abovementioned structures, the common electrode, the pixel electrode, and the TFT are formed in the top substrate as to separate their fabrication process from those for the WGP on the bottom substrate. Alternatively,

both the wire grid polarizer WGP and the thin film transistor TFT are formed on one substrate as shown the display 650 configuration shown in FIG. 19. In this embodiment, the glass substrate 102a with the WGP 105 is covered by the passivation layer 103. Then the common electrode 208 and pixel electrode 209 are formed along with the TFT (not shown). In this example, when no voltage is applied, all the LC molecules are homogeneously aligned to the initial rubbing direction and the light passing through from the bottom polarizer does not change its polarization direction and is blocked by the top polarizer 101b to achieve a dark state. When a high voltage is applied, the voltage difference between the pixel electrode 209 and the common electrode 208 generates fringe fields with rich horizontal components that rotate the LC molecules horizontally to change the polarization direction of the input backlight to achieve the bright state.

[0150] FIG. 20 is a diagram of an example of the liquid crystal display 100, which includes an array 12 of pixels 90 that are controlled by one or more gate drivers 16 and one or more data drivers 18. Referring to FIG. 2 in conjunction with FIG. 13, each pixel 90 includes one or more thin film transistors 70 having a source driven by the data driver 18, a gate 80 driven by the gate line 82 and a drain 76. The pixel circuit also includes a storage capacitor C_{ST} 72, and a liquid crystal cell which has an effective capacitance represented by C_{LC} 74. The capacitors C_{ST} 72 and C_{LC} 74 can be, e.g., connected in parallel to the pixel electrode 109. The capacitor C_{LC} 74 is connected between the pixel electrode 109 and the common electrode 108. For example, the storage capacitor C_{ST} 72 can be connected between the pixel electrode 109 and the common electrode 108, or between the pixel electrode 109 and the gate line 82 of another pixel in the next row.

[0151] The thin film transistor 70 includes a gate 80 that is connected to gate line 82, which is connected to the gate driver 16. When the gate driver 16 drives the gate line 82 to turn on the thin film transistor 80, the data driver 18 simultaneously drives a data line 84 with a pixel voltage signal (e.g., V_{DATA}), which is passed to the storage capacitor C_{ST} 72 and the liquid crystal cell. The voltage (e.g., V_{DATA}) across the capacitor C_{ST} 72 determines the voltage applied to the liquid crystal cell. The voltage on the data line 84 is sometimes referred to as a "gray scale voltage" because it determines the gray scale level shown by the pixel 90.

[0152] In summary, the structures of the present invention attain good light efficiency and inherently wide viewing angle. Besides, a single gray-scale gamma curve can be used to drive the transmissive and reflective mode.

[0153] While the invention has been described, disclosed, illustrated and shown in various terms of certain embodiments or modifications which it has presumed in practice, the scope of the invention is not intended to be, nor should it be deemed to be, limited thereby and such other modifications or embodiments as may be suggested by the teachings herein are particularly reserved especially as they fall within the breadth and scope of the claims here appended.

What is claimed is:

1. A transfective liquid crystal display device comprising:
 - a plurality of pixel circuits sandwiched between a first substrate and a second substrate, each pixel circuit comprising:
 - a reflective region comprising a first portion of a liquid crystal layer and a polarization dependent reflector that transmits light having a first polarization and reflects light having a second polarization;

- a transmissive region comprising a second portion of the liquid crystal layer;
 - at least one transparent common electrode formed on the inner surface of one of the first and second substrate; and
 - at least one transparent pixel electrode formed on an outer surface of the same substrate as the common electrode, the at least one common electrode and at least one pixel electrode insulated by a passivation layer therebetween; the liquid crystal molecules in the reflective and transmissive regions are substantially aligned along a direction parallel to the first and second substrate when no voltage is applied to the at least one common and at least one pixel electrodes, and horizontal electric fields that are substantially parallel to the first and second substrate are generated in the liquid crystal layer to rotate liquid crystal molecules substantially in a plane parallel to the first and second substrate, when a high voltage is applied to the pixel electrode.
2. The display of claim 1 wherein the common electrode is a plane electrode.
 3. The display of claim 1 wherein the pixel electrode comprises:
 - at least two electrode strips that are parallel to each other having an electrode width between approximately 1 μm and approximately 6 μm and a gap between adjacent strips between approximately 1 μm and approximately 10 μm .
 4. The display of claim 3 wherein a shape of each of the at least two pixel electrode strips is selected from a group consisting of straight, curved, and piecewise linear shapes.
 5. The display of claim 3 wherein the electrode width and the gap between adjacent pixel electrode strips are approximately equal in the reflective region and transmissive region.
 6. The display of claim 3 wherein the electrode width and the gap between adjacent pixel electrode strips in the reflective region is different than the electrode width and gap between adjacent pixel electrode strips in the transmissive region.
 7. The display of claim 1 wherein the at least one common electrode and at least one pixel electrode are made of one of an indium tin oxide, indium zinc oxide, and gallium zinc oxide material.
 8. The display of claim 1 wherein the passivation layer is one of a silicon dioxide and silicon nitride material.
 9. The display of claim 1, further comprising:
 - a first linear polarizer on an outer surface of the first substrate; and
 - a second linear polarizer on an outer surface of the second substrate, wherein the first and the second linear polarizer extend over the transmissive and reflective regions.
 10. The display of claim 9 wherein the first linear polarizer has a transmission axis perpendicular to the transmission of the second linear polarizer.
 11. The display of claim 9 wherein the first linear polarizer is located adjacent to a viewer than the second linear polarizer and the polarization dependent reflector has a reflective axis perpendicular to the transmission axis of the first linear polarizer.
 12. The display of claim 9 wherein the polarization dependent reflector comprises:
 - a wire grid polarizer.
 13. The display of claim 12 wherein the reflection axis of the polarization dependent reflector is perpendicular to the transmission axis of one of the first linear polarizer that is closer to the viewer.
 14. The display of claim 1 wherein the polarization dependent reflector comprises:
 - a wire grid polarizer.
 15. The display of claim 1 wherein the liquid crystal layer sandwiched between the first and second substrates has a rubbing direction parallel to the transmission axis of the first linear polarizer.
 16. The display of claim 1 wherein the liquid crystal layer sandwiched between the first and second substrates has a rubbing direction perpendicular to the transmission axis of the first second polarizer.
 17. The display of claim 1 wherein the liquid crystal layer comprises:
 - a negative dielectric anisotropic liquid crystal material.
 18. The display of claim 1 wherein the liquid crystal layer comprises:
 - a positive dielectric anisotropic liquid crystal material.
 19. The display of claim 17 wherein the pixel electrode comprises:
 - at least two pixel electrode strips each having a lengthwise strip direction that forms a cross angle within a range of approximately 45° and approximately 90° with respect to a lengthwise direction of a rubbing axis of the negative dielectric anisotropic liquid crystal material.
 20. The display of claim 18 wherein the pixel electrode comprises:
 - at least two pixel electrode strips each having a lengthwise strip direction that forms a cross angle within a range between 0° and approximately 45° with respect a lengthwise direction of a rubbing axis of the positive dielectric anisotropic liquid crystal material.
 21. A method for fabricating each pixel region of a transmissive liquid crystal display comprising the steps of:
 - forming a polarization dependent reflector in a first region of a first substrate, the first region corresponding to a reflective region of a pixel of the transmissive liquid crystal display;
 - forming a thin-film-transistor in the same pixel region of a display on one of the first substrate and a second substrate;
 - forming a gate line connected with a gate of the thin-film-transistor;
 - forming a data line connected with one of a drain and a source end of the thin-film-transistor;
 - forming a first counter plane electrode on one of the first and second substrate;
 - forming a passivation layer covering the first counter plane electrode;
 - forming a second electrode with at least one of straight, curved, and piecewise linear shaped electrode strips on the passivation layer on the same substrate with the first electrode;
 - connecting the first electrode to a first reference voltage;
 - connecting the second electrode to the other end of the thin-film-transistor as to the data line; and
 - sandwiching a liquid crystal layer between an interior surface of the first and second substrates;
 22. The method of claim 21, further comprising the step of providing a first and second alignment layer respectively on the first and second substrates, wherein when no voltage is applied to the first and second electrode liquid

crystal molecules of the liquid crystal layer substantially align in a direction parallel to the first and second substrates.

23. The method of claim **21**, further comprising:
providing a first linear polarizer on an exterior surface of the first substrate facing; and

providing a second linear polarizer on an exterior surface of the second substrate, the first linear polarizer having a transmission axis that is non-parallel to a transmission axis of the second linear polarizer.

* * * * *

专利名称(译)	宽视角半透半反液晶显示器		
公开(公告)号	US20080309853A1	公开(公告)日	2008-12-18
申请号	US11/763894	申请日	2007-06-15
[标]申请(专利权)人(译)	GE治兵 吴THOMAS新章 吴SHIN TSON 李汪洋 魏重光		
申请(专利权)人(译)	GE治兵 吴THOMAS新章 吴SHIN-TSON 李王扬 魏重光		
当前申请(专利权)人(译)	GE治兵 吴THOMAS新章 吴SHIN-TSON 李王扬 魏重光		
[标]发明人	GE ZHIBING WU THOMAS XINZHANG WU SHIN TSON LI WANG YANG WEI CHUNG KUANG		
发明人	GE, ZHIBING WU, THOMAS XINZHANG WU, SHIN-TSON LI, WANG-YANG WEI, CHUNG-KUANG		
IPC分类号	G02F1/1335		
CPC分类号	G02F1/133555 G02F1/134363 G02F2001/133548		
其他公开文献	US7589808		
外部链接	Espacenet USPTO		

摘要(译)

用于透射型液晶显示器的装置，方法和系统包括多个像素电路，每个像素电路包括反射区域和透射区域。反射区域包括用于反射环境光的偏振相关反射器。反射和透射区域包括夹在第一和第二基板之间的初始均匀排列的液晶层。每个像素还包括至少一个作为公共电极的第一透明电极和作为像素电极的至少一个第二透明电极，它们都形成在相同的第一和第二基板之一上，其中产生具有丰富水平电场的大量边缘场。当电压施加到像素电极时，液晶层主要在水平方向上旋转，以实现宽视角。

