



US007651744B2

(12) **United States Patent**
Tyan et al.

(10) **Patent No.:** **US 7,651,744 B2**
(45) **Date of Patent:** **Jan. 26, 2010**

(54) **LIQUID CRYSTAL DISPLAY**

(75) Inventors: **Horng-Long Tyan**, Hsinchu (TW);
Chyi-Ming Leu, Taichung County
(TW); **Tzong-Ming Lee**, Hsinchu (TW)

(73) Assignee: **Industrial Technology Research
Institute**, Hsinchu (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 295 days.

(21) Appl. No.: **11/283,872**

(22) Filed: **Nov. 22, 2005**

(65) **Prior Publication Data**

US 2007/0087134 A1 Apr. 19, 2007

(30) **Foreign Application Priority Data**

Oct. 19, 2005 (TW) 94136537 A

(51) **Int. Cl.**

G02F 1/13 (2006.01)

G02F 1/136 (2006.01)

(52) **U.S. Cl.** **428/1.6**; 349/158

(58) **Field of Classification Search** 428/1.3,
428/1.6, 1.31; 349/158, 106
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,287,311 A * 11/1966 Edwards 524/600
4,751,146 A 6/1988 Maeda et al.
5,053,480 A * 10/1991 Koto et al. 528/188
5,364,908 A * 11/1994 Oishi et al. 525/64
5,610,742 A 3/1997 Hinata et al.
5,856,065 A * 1/1999 Hagen 430/283.1
5,856,432 A * 1/1999 Auman et al. 528/353
6,010,825 A * 1/2000 Hagen et al. 430/283.1
6,525,791 B1 * 2/2003 Tsuda et al. 349/106
6,734,276 B2 * 5/2004 Yamashita et al. 528/170

6,962,756 B2 * 11/2005 Kihara et al. 428/690
7,026,032 B2 * 4/2006 Lee et al. 428/98
7,144,679 B2 * 12/2006 Izumida et al. 430/283.1
7,160,587 B2 1/2007 Doi et al.
2002/0022710 A1 * 2/2002 McGrath et al. 528/170
2002/0192445 A1 * 12/2002 Ezzell et al. 428/212
2003/0078333 A1 4/2003 Kawaguchi et al.
2003/0104232 A1 6/2003 Kihara et al.
2003/0134460 A1 * 7/2003 Forbes et al. 438/158
2003/0194573 A1 * 10/2003 Itoh et al. 428/461
2004/0018131 A1 * 1/2004 Izumida et al. 423/22
2005/0145832 A1 * 7/2005 Wessling et al. 252/500

OTHER PUBLICATIONS

JPO Website Machine English Translation of JP 2003-231752,
Nishio et al., Aug. 19, 2003.*

* cited by examiner

Primary Examiner—David R Sample


Assistant Examiner—Sophie Hon

(74) *Attorney, Agent, or Firm*—Birch, Stewart, Kolasch &
Birch, LLP

(57) **ABSTRACT**


A liquid crystal display. The liquid crystal display includes a
color filter substrate and an array substrate, wherein at least
one of the color filter substrate and the array substrate com-
prises polyimide having formula (I):

(I)

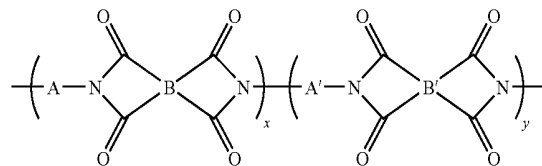

wherein A and A' are the same or different and comprise
cycloaliphatic compounds or aromatic compounds, B
and B' are the same or different and comprise aromatic
compounds, and x and y are 10~10000, wherein at least
one of A and A' is a cycloaliphatic compound.

20 Claims, 1 Drawing Sheet

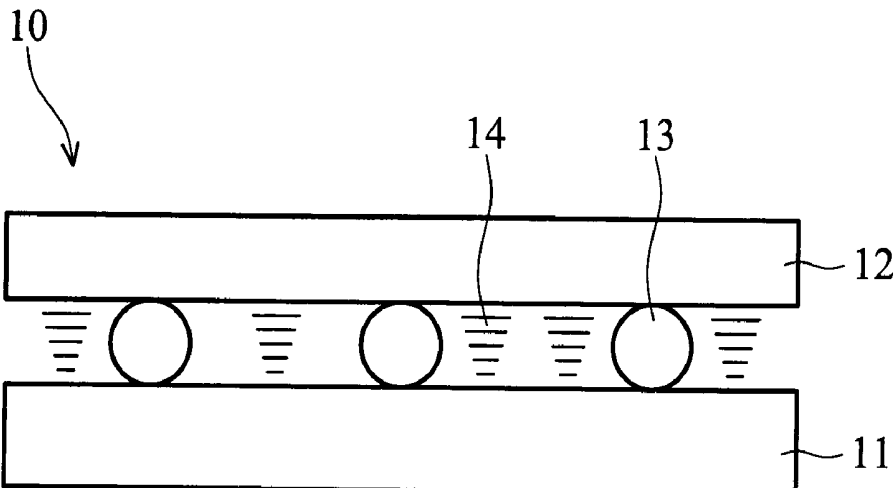

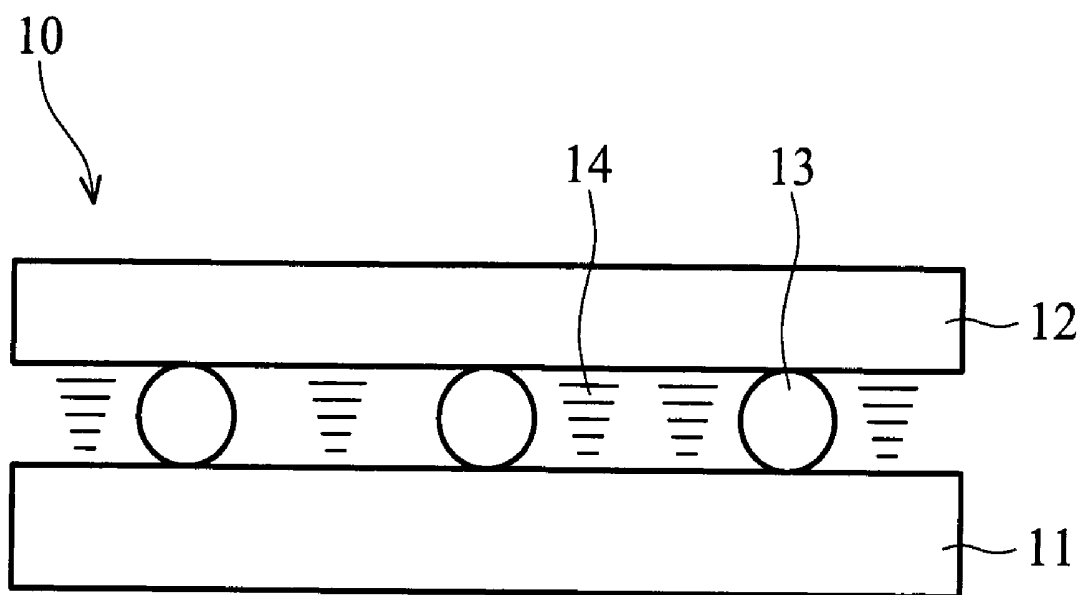


FIG. 1

1

LIQUID CRYSTAL DISPLAY

BACKGROUND

The invention relates to a liquid crystal display, and more specifically to a polyimide liquid crystal display.

With advances in information and digitization, light, thin, and portable electronic products utilizing thin display panels have become popular. However, it is inconvenient for portability and its complicated fabrication may cause low yields.


Thus, a transparent and flexible plastic substrate (0.1~0.2 mm) has been developed. Such plastic substrate is thin, light, durable, and portable, and produced by a continuous rolling process, significantly reducing costs.

Unfortunately, problems such as deposition of indium tin oxide (ITO) and thin film transistor (TFT) thereon and back-end panel assembly occur. Additionally, the glass transition temperature (T_g) of the optical-level plastic substrate such as PET, PEN, PC, or m-COC (Arton or Zeonor) is lower than 200° C., being unfavorable to fabrication. Also, PES substrate has insufficient solvent resistance, with yellowing and cracking at high temperatures (200° C.). Furthermore, some polyimide plastic substrates capable of thermal and solvent resistance, being dark brown, are only suitable for use in reflective LCD panels, not transmission LCD panels.

Additionally, the plastic substrate must be fixed to a glass substrate by resin glue to facilitate subsequent multi-lithography and etching due to its difficulty in handling. However, TFT element breakage and residual resin glue may easily occur when the plastic substrate is taken off the glass substrate.

SUMMARY

The invention provides a liquid crystal display comprising a color filter substrate and an array substrate, wherein at least one of the color filter substrate and the array substrate comprises polyimide having formula (I):

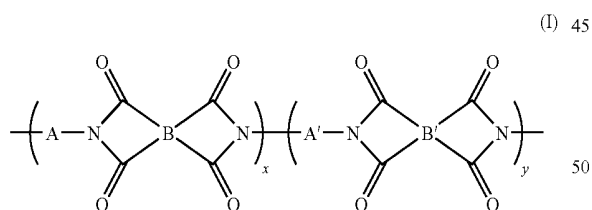

wherein A and A' are the same or different and comprise cycloaliphatic compounds or aromatic compounds, B and B' are the same or different and comprise aromatic compounds, and x and y are 10~10000, wherein at least one of A and A' is a cycloaliphatic compound.

A detailed description is given in the following embodiments with reference to the accompanying drawing.

BRIEF DESCRIPTION OF THE DRAWINGS


The invention can be more fully understood by reading the subsequent detailed description and examples with references made to the accompanying drawing, wherein:

2


FIG. 1 is a cross section of a liquid crystal display of the invention.

DETAILED DESCRIPTION


The invention provides a liquid crystal display comprising a color filter substrate and an array substrate. At least one of the color filter substrate and the array substrate comprises polyimide having formula (I):

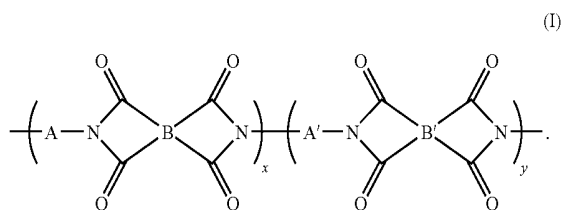

In formula (I), A and A' may be the same or different and comprise cycloaliphatic compounds such as

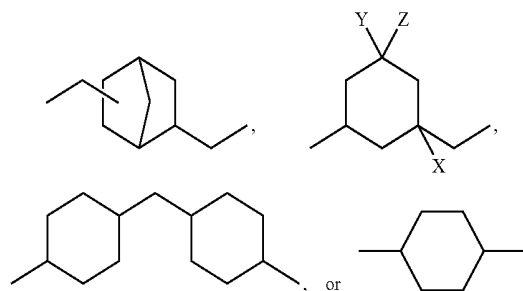


wherein X, Y, and Z may comprise hydrogen, methyl, trifluoromethyl, hydroxyl, C_{1-18} alkyl, bromine, chlorine, or iodine, or aromatic compounds such as



wherein X and Y may comprise hydrogen, methyl, trifluoromethyl, hydroxyl, C_{1-18} alkyl, bromine, chlorine, or iodine and Z may comprise $-\text{O}-$, $-\text{CH}_2-$, $-\text{S}-$, $-\text{SO}_2-$, $-\text{C}(\text{CH}_3)_2-$, $-\text{Ar}-\text{O}-\text{Ar}-$, $-\text{Ar}-\text{CH}_2-\text{Ar}-$, $-\text{O}-\text{Ar}-\text{C}(\text{CH}_3)_2-\text{Ar}-\text{O}-$, $-\text{O}-\text{Ar}-\text{Ar}-\text{O}-$, $-\text{O}-\text{Ar}-\text{C}(\text{CF}_3)_2-\text{Ar}-\text{O}-$, or $-\text{Ar}-\text{C}(\text{CH}_3)_2-\text{Ar}-$, wherein Ar is phenyl.

B and B' may be the same or different and comprise aromatic compounds such as

3

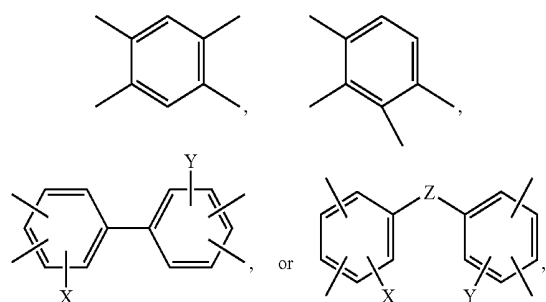


5

10

15

20


4

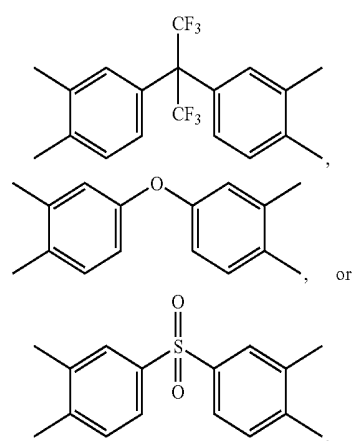

wherein X and Y may comprise hydrogen, methyl, trifluoromethyl, hydroxyl, C_{1-18} alkoxy, bromine, chlorine, or iodine and Z may comprise $-O-$, $-SO_2-$, $-CH_2-$, $-C(CH_3)_2-$, $-COO(CH_3)_2COO-$, $-C(CF_3)_2-$, $-Ar-O-Ar-$, $-O-Ar-O-$, $-Ar-CH_2-Ar-$, $-O-Ar-C(CH_3)_2-Ar-O-$, $-O-Ar-Ar-O-$, $-O-Ar-C(CF_3)_2-Ar-O-$, or $-Ar-C(CH_3)_2-$ Ar—, wherein Ar is phenyl. B and B' may be

and x and y may be 10~10000.


The polyimide having formula (I) provided by the invention comprises

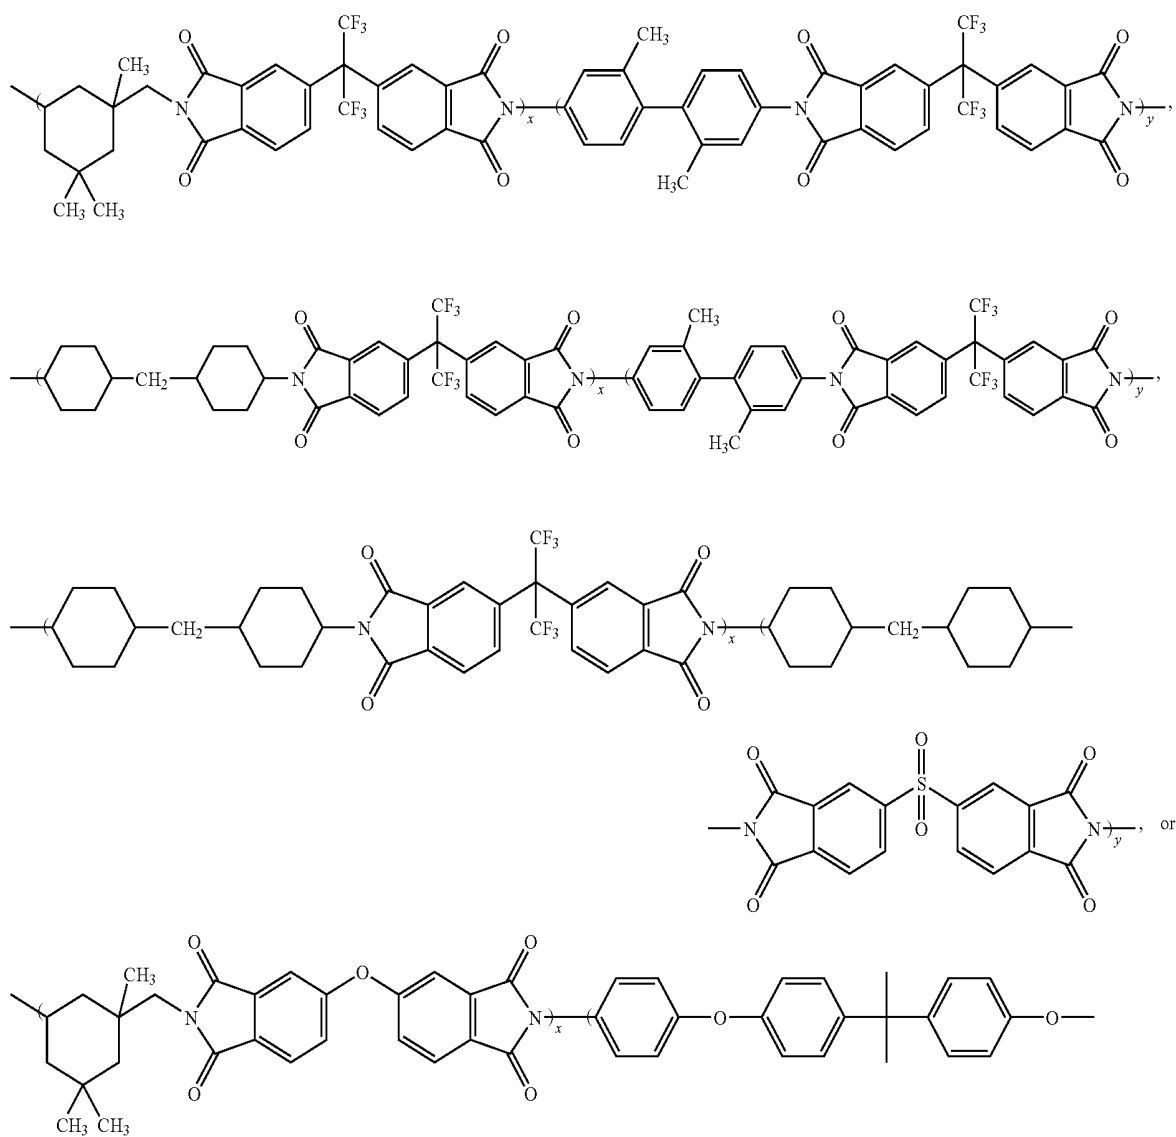

5


6

-continued

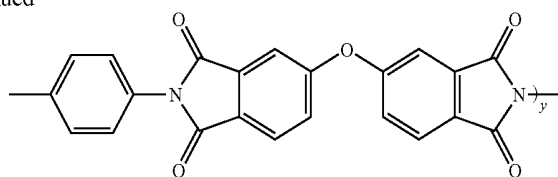


wherein x and y may be 10~10000.

The polyimide provided by the invention may have formula (II):




In formula (II), A may be a cycloaliphatic compound such as

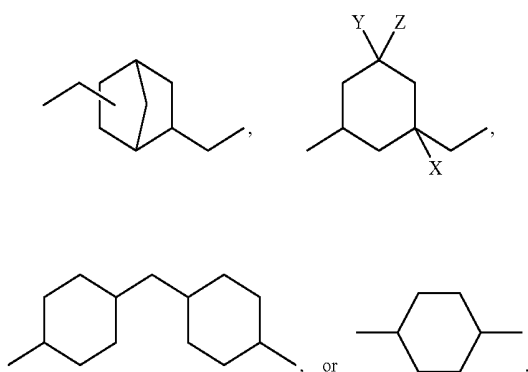

wherein X, Y, and Z may comprise hydrogen, methyl, trifluoromethyl, hydroxyl, C1-18 alkyl, bromine, chlorine, or iodine.

B may be an aromatic compound such as

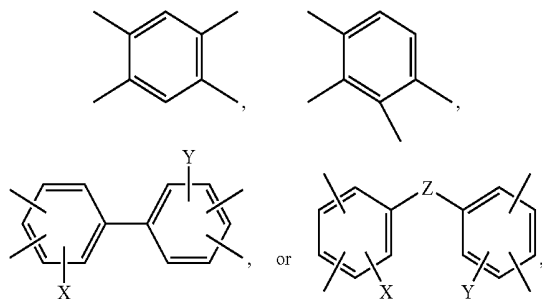


wherein X and Y may comprise hydrogen, methyl, trifluoromethyl, hydroxyl, C₁₋₁₈ alkoxy, bromine, chlorine, or iodine and Z may comprise —O—, —SO₂—, —CH₂—,

10


—C(CH₃)₂—, —COO(CH₃)₂COO—, —C(CF₃)₂—, —Ar—O—Ar—, —O—Ar—O—, —Ar—CH₂—Ar—, —O—Ar—C(CH₃)₂—Ar—O—, —O—Ar—Ar—O—, —O—Ar—C(CF₃)₂—Ar—O—, or —Ar—C(CH₃)₂—Ar—, wherein Ar is phenyl. B and B' may be

(II)

20




30



35

40




and n may be 10~10000.


The polyimide having formula (II) provided by the invention comprises

50

55

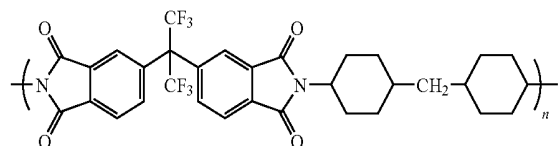


The compound of formula (II) is prepared in two steps as follows. First, a diamine such as 4,4-methylene bis(cyclohexylamine) (DACH), a dianhydride monomer such as 2,2'-bis(3,4-dicarboxyphenyl)hexafluoropropane dianhydride (6FDA), and a polar solvent such as N-methyl-2-pyrrolidone (NMP) or N,N-dimethylacetamide (DMAc) are added to a flask and reacted to form a poly(amic acid) (PAA). The PAA is then imidized at about 300~400° C. to form a polyimide via dehydration and cyclization. The reaction scheme is shown below.

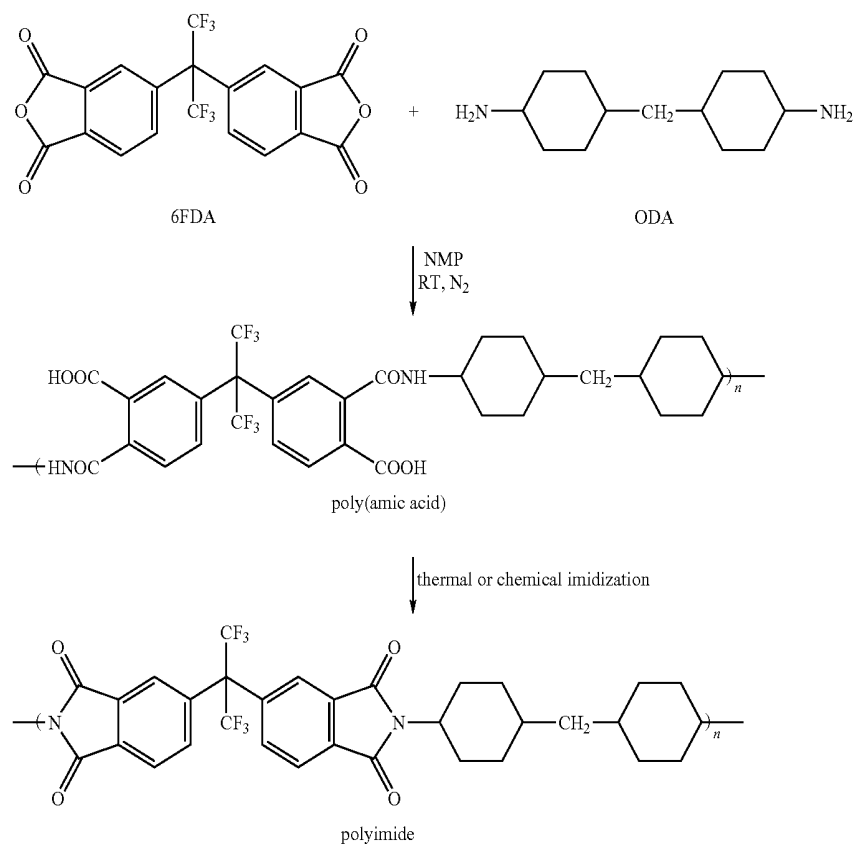

Second, a diamine such as 4,4-methylene bis(cyclohexylamine) (DACH), a dianhydride monomer such as 2,2'-bis(3,4-dicarboxyphenyl)hexafluoropropane dianhydride (6FDA), and a solvent such as m-cresol or phenol are added to a flask and reacted at a reflux temperature to form a polyimide via PAA formation, dehydration, and cyclization. The reaction

35 Compared to the traditional polyimide, the novel polyimide, a partial phenyl structure, comprising a cycloaliphatic diamine monomer and an aromatic dianhydride monomer, provides higher thermal resistance and transmission rate and improved workability and chemical resistance due to conduc-
40 tion of the cycloaliphatic compounds thereto.

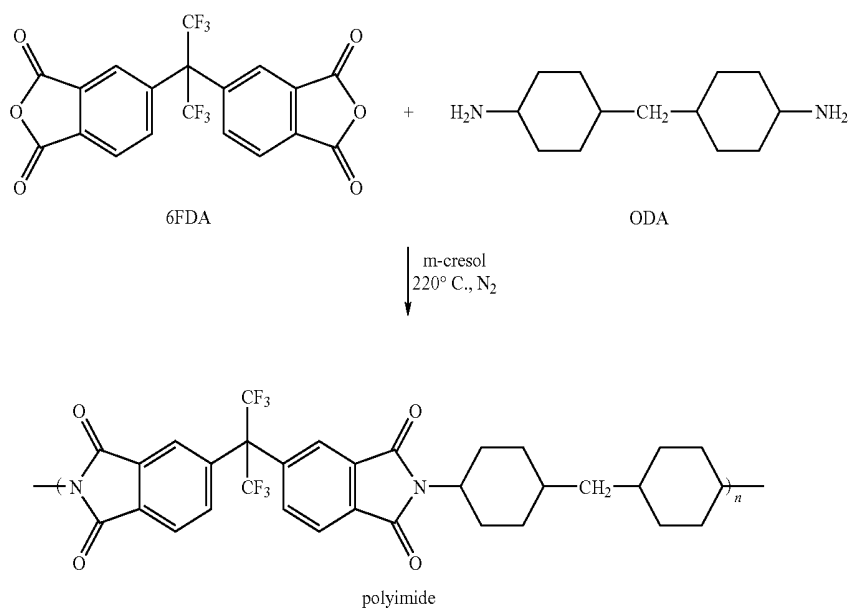

9

The polyimide film has haze less than 3%, a transmission rate exceeding 70%, a yellow index less than 6.5, a glass transition temperature of about 250~350° C., a coefficient of thermal expansion of about 20~75 ppm/° C., and a thickness of about 20~200 μm, preferably 50~150 μm.


In FIG. 1, a liquid crystal display structure of the invention is illustrated. A liquid crystal display **10** comprises an array substrate **11**, a color filter substrate **12**, spacers **13**, and liquid crystals **14**. At least one of the array substrate **11** and color

10

1.64 g m-TB-HG and 0.56 g IPDA were dissolved in 41 g DMAc at room temperature under nitrogen gas. Next, 5 g 6FDA was added to form a sticky PAA solution with stirring for 3 hr. The PAA solution was then filmed on a glass substrate by a doctor blade and imidized at 100° C., 200° C., and 300° C., respectively, for 1 hr to form a transparent and colorless polyimide film.

Example 3

Preparation of 6FDA-m-TB-HG-co-6FDA-DACH
(PI-FTD))

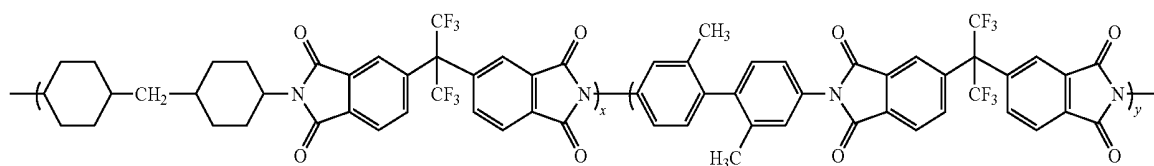


filter substrate **12** is composed of polyimide. The array substrate **11** is opposite to the color filter substrate **12** and the spacers **13** and liquid crystals **14** are formed therebetween.

EXAMPLES

Example 1


Preparation of 6FDA-DACH (PI-FD))

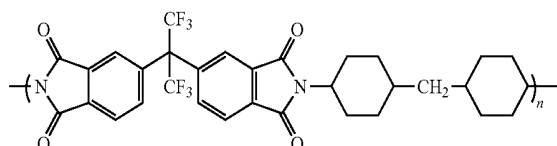

2.329 DACH was dissolved in 41 g DMAc at room temperature under nitrogen gas. Next, 5 g 6FDA was added to form a sticky PAA solution with stirring for 3 hr. The PAA solution was then filmed on a glass substrate by a doctor blade and imidized at 100° C., 200° C., and 300° C., respectively, for 1 hr to form a transparent and colorless polyimide film.

Example 2

Preparation of 6FDA-m-TB-HG-co-6FDA-IPDA
(PI-FTI))

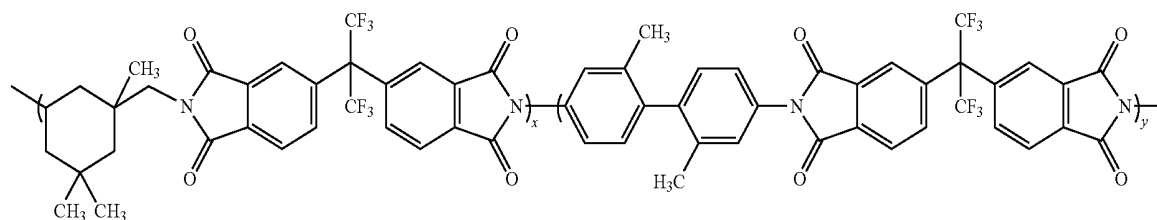


11

1.63 g M-TB-HG and 0.70 g DACH were dissolved in 42 g DMAc at room temperature under nitrogen gas. Next, 5 g 6FDA was added to form a sticky PAA solution with stirring for 3 hr. The PAA solution was then filmed on a glass substrate by a doctor blade and imidized at 100° C., 200° C., and 300° C., respectively, for 1 hr to form a transparent and colorless polyimide film.

Example 4


Preparation of 6FDA-m-DACH-co-DSDA-DACH (PI-FDD)

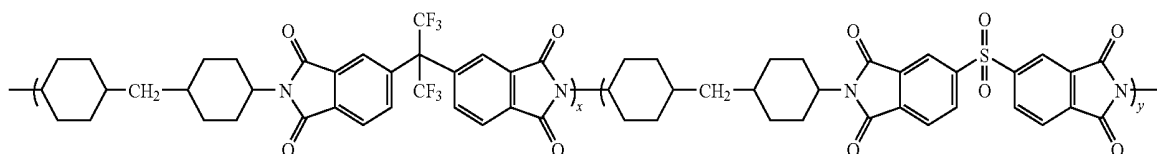

3.12 g DACH was dissolved in 46 g DMAc at room temperature under nitrogen gas. Next, 3 g 6FDA and 3 g DSDA were added to form a sticky PAA solution with stirring for 3 hr. The PAA solution was then filmed on a glass substrate by a doctor blade and imidized at 100° C., 200° C., and 300° C., respectively, for 1 hr to form a transparent and colorless polyimide film.

Example 5

Preparation of ODPa-BAPpm-co-ODPa-IPDA (PI-OBI)

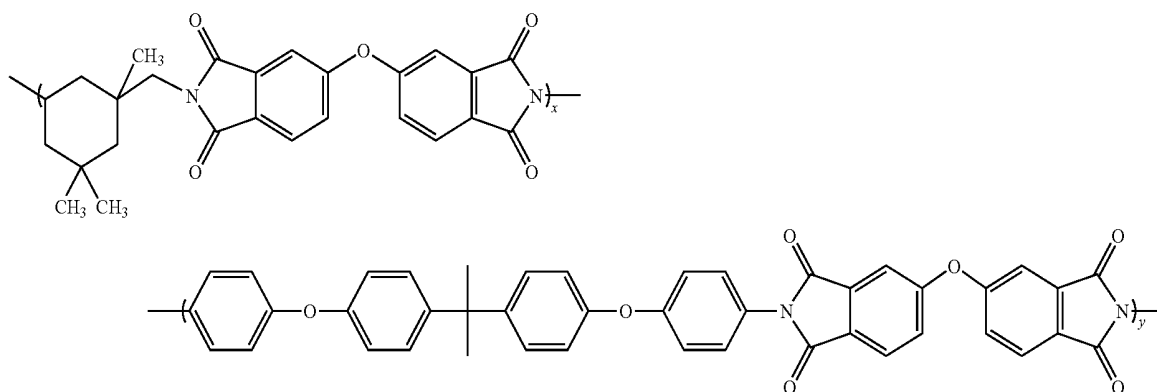

4.53 g BAPpm and 0.81 g IPDA were dissolved in 59 g DMAc at room temperature under nitrogen gas. Next, 5 g ODPa was added to form a sticky PAA solution with stirring for 3 hr. The PAA solution was then filmed on a glass substrate by a doctor blade and imidized at 100° C., 200° C., and 300° C., respectively, for 1 hr to form a transparent and colorless polyimide film.

Thickness, haze, transmission rate, yellow index, glass transition temperature, and coefficient of thermal expansion of the disclosed polyimide film (such as PI-FD, PI-FTI, PI-FTD, PI-FDD, and PI-OBI) and conventional material (such as PES, Kapton, and Ube) are compared in Table 1.

12

TABLE 1

Poly-imide	Thick-ness (μm)	Haze (%)	Trans-mission rate (%)	Yellow index	Glass transition temperature (° C.)	Coefficient of thermal expansion (ppm/° C.)
PI-FD	59	0.24	90.3	6.33	326	68
PI-FTI	69	1.96	89.4	3.59	336	71
PI-FTD	79	1.74	90.0	3.98	307	75
PI-FDD	60	1.74	90.7	2.78	301	61
PI-OBI	52	2.91	89.0	6.37	285	73
Con-ven-						

TABLE 1-continued

Poly-imide	Thick-ness (μm)	Haze (%)	Trans-mission rate (%)	Yellow index	Glass transition temperature (° C.)	Coefficient of thermal expansion (ppm/° C.)
tional material						
PES	200	0.30	89.0	0.97	225	58
Kapton	25	0.72	73.6	82.34	318	16
Ube	51	2.49	32.1	66.46	332	23

Compared to the disclosed polyimide, the conventional PES is not a proper substrate material because of its lower glass transition temperature even has a better haze, transmission rate, and yellow index. Kapton and Ube are also unsuitable for use as substrate due to raised yellow index and deteriorated transmission rate.


Additionally, the disclosed polyimide can be directly filmed on a glass substrate without use of resin glue and easily removed after multi-lithography and etching or treating with a water bath, simplifying the TFT processes. The polyimide can be widely used in flexible LCDs, PDPS, FEDs, SEDs, E-inks, and E-papers, or OLEDs.

13


While the invention has been described by way of example and in terms of preferred embodiment, it is to be understood that the invention is not limited thereto. To the contrary, it is intended to cover various modifications and similar arrangements (as would be apparent to those skilled in the art). Therefore, the scope of the appended claims should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements.

What is claimed is:


1. A liquid crystal display, comprising: a color filter substrate; and an array substrate; wherein at least one of the color filter substrate and the array substrate consists of polyimide having formula (I):

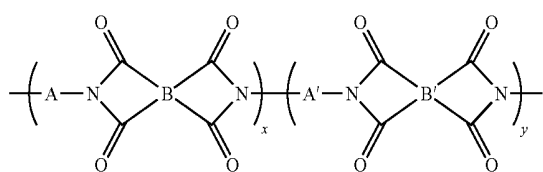

wherein A and A' are the same or different and comprise (1) cycloaliphatic compounds comprising at least one of




wherein X, Y, Z comprise hydrogen, methyl, trifluoromethyl, hydroxyl, C₁₋₁₈ alkyl, bromine, chlorine or iodine or (2) aromatic compounds; B and B' are the same or different and comprise aromatic compounds, and x and y are 10-10,000, wherein at least one of A and A' is a cycloaliphatic compound from the (1) cycloaliphatic compounds comprising at least one of




2. The liquid crystal display as claimed in claim 1, wherein one of A and A' comprise

14

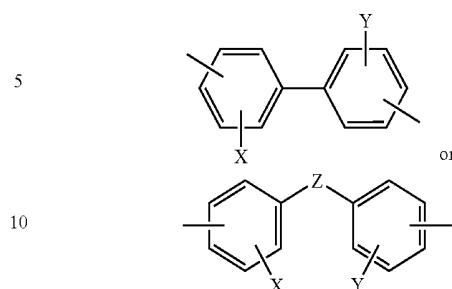


wherein X and Y comprise hydrogen, methyl, trifluoromethyl, hydroxyl, C₁₋₁₈ alkyl, bromine, chlorine, or iodine and Z comprises —O—, —CH₂—, —S—, —SO₂—, —C(CH₃)₂—, —Ar—O—Ar—, —Ar—CH₂—Ar—, —O—Ar—C(CH₃)₂—Ar—O—, —O—Ar—Ar—O—, —O—Ar—C(CF₃)₂—Ar—O—, or —Ar—C(CH₃)₂—Ar—, wherein Ar is phenyl.

3. The liquid crystal display as claimed in claim 1, wherein B and B' comprise

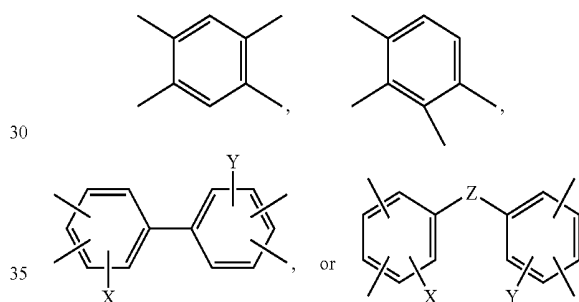


wherein X and Y comprise hydrogen, methyl, trifluoromethyl, hydroxyl, C₁₋₁₈ alkoxy, bromine, chlorine, or iodine and Z comprises —O—, —SO₂—, —CH₂—, —C(CH₃)₂—, —COO(CH₃)₂COO—, —C(CF₃)₂—, —Ar—O—Ar—, —O—Ar—O—, —Ar—CH₂—Ar—, —O—Ar—C(CH₃)₂—Ar—O—, —O—Ar—Ar—O—, —O—Ar—C(CF₃)₂—Ar—O—, or —Ar—C(CH₃)₂—Ar—, wherein Ar is phenyl.

4. The liquid crystal display as claimed in claim 1, wherein B and B' comprise

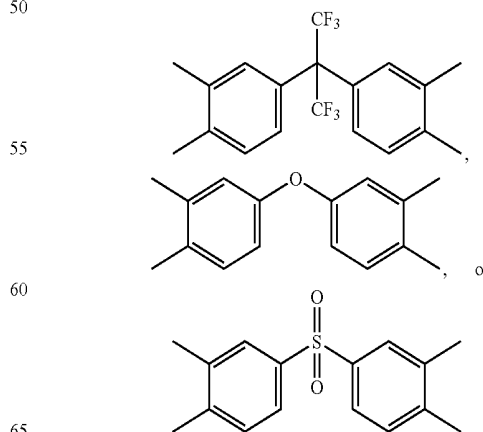

15


5. The liquid crystal display as claimed in claim 1, wherein the polyimide comprises

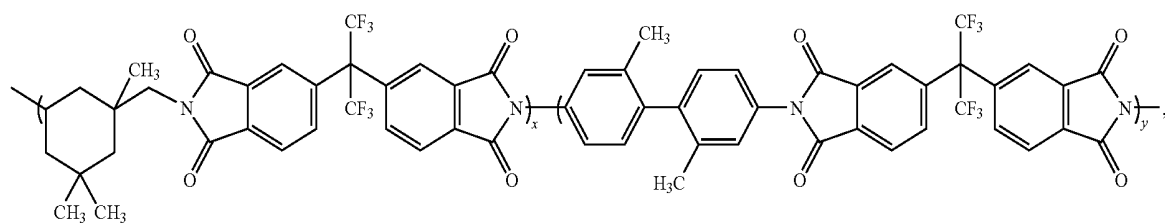

wherein x and y are 10~10000.


15

6. The liquid crystal display as claimed in claim 1, wherein the polyimide comprises

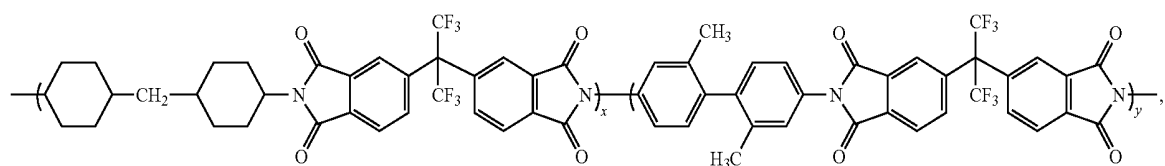


wherein x and y are 10~10000.

7. The liquid crystal display as claimed in claim 1, wherein the polyimide comprises

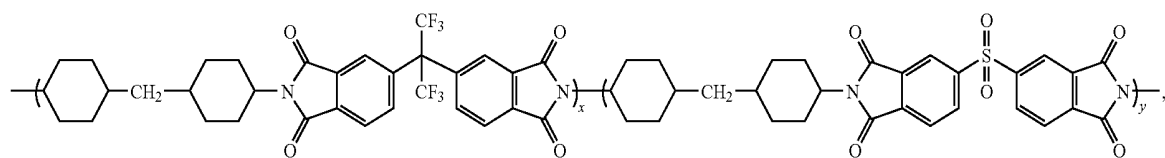

wherein x and y are 10~10000.


8. The liquid crystal display as claimed in claim 1, wherein the polyimide comprises

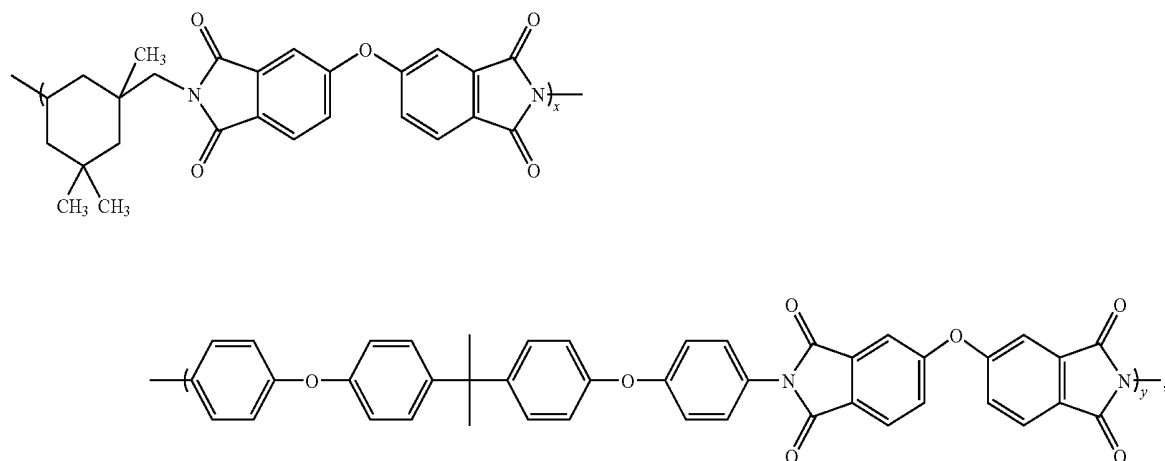


wherein x and y are 10~1000.

17


9. The liquid crystal display as claimed in claim 1, wherein the polyimide comprises formula (II):



wherein A is a cycloaliphatic compound comprising





or




wherein X, Y, and Z comprise hydrogen, methyl, trifluoromethyl, hydroxyl, C₁₋₁₈ alkyl, bromine, chlorine, or iodine, B is





18




, or



11. The liquid crystal display as claimed in claim 9, wherein the polyimide comprises

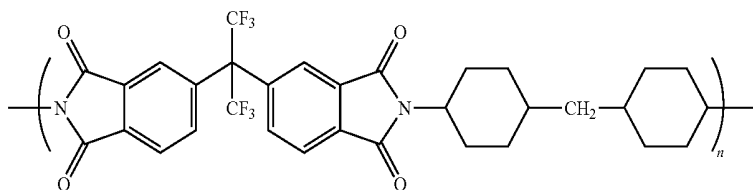

or



wherein X and Y comprise hydrogen, methyl, trifluoromethyl, hydroxyl, C₁₋₁₈ alkoxy, bromine, chlorine, or iodine and Z comprises —O—, —SO₂—, —CH₂—, —C(CH₃)₂—, —COO(CH₃)₂COO—, —C(CF₃)₂—, —Ar—O—Ar—, —O—Ar—O—, —Ar—CH₂—Ar—, —O—Ar—C(CH₃)₂—Ar—O—, —O—Ar—Ar—O—, —O—Ar—C(CF₃)₂—Ar—O—, or —Ar—C(CH₃)₂—Ar—, wherein Ar is phenyl, and n is 10~10000.

10. The liquid crystal display as claimed in claim 9, wherein B comprises

12. The liquid crystal display as claimed in claim 1, further comprising spacers formed between the color filter substrate and the array substrate.

13. The liquid crystal display as claimed in claim 1, further comprising liquid crystals interposed between the color filter substrate and the array substrate.

14. The liquid crystal display as claimed in claim 1, wherein the substrate comprising polyimide has haze less than 3%.

15. The liquid crystal display as claimed in claim 1, wherein the substrate comprising polyimide has a transmission rate exceeding 70%.

16. The liquid crystal display as claimed in claim 1, wherein the substrate comprising polyimide has a yellow index less than 6.5%.

17. The liquid crystal display as claimed in claim 1, wherein the substrate comprising polyimide has a glass transition temperature (T_g) of about 250~350° C.

18. The liquid crystal display as claimed in claim 1, wherein the substrate comprising polyimide has a coefficient of thermal expansion (CTE) of about 20~75 ppm/° C.

19. The liquid crystal display as claimed in claim 1, wherein the substrate comprising polyimide has a thickness of about 20~200 μm.

20. The liquid crystal display as claimed in claim 1, wherein the substrate comprising polyimide has a thickness of about 50~150 μm.

专利名称(译)	液晶显示器		
公开(公告)号	US7651744	公开(公告)日	2010-01-26
申请号	US11/283872	申请日	2005-11-22
[标]申请(专利权)人(译)	财团法人工业技术研究院		
申请(专利权)人(译)	工业技术研究院		
当前申请(专利权)人(译)	工业技术研究院		
[标]发明人	TYAN HORNG LONG LEU CHYI MING LEE TZONG MING		
发明人	TYAN, HORNG-LONG LEU, CHYI-MING LEE, TZONG-MING		
IPC分类号	G02F1/13 G02F1/136		
CPC分类号	C08G73/10 C08G73/1039 G02F1/133305 C08G73/1064 Y10T428/1036 Y10T428/1086		
代理机构(译)	桦木, STEWART, KOLASCH与桦木, LLP		
优先权	094136537 2005-10-19 TW		
其他公开文献	US20070087134A1		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示器。液晶显示器包括滤色器基板和阵列基板，其中滤色器基板和阵列基板中的至少一个包括具有式(I)的聚酰亚胺：其中A和A'相同或不同并且包含脂环族化合物或芳族化合物，B和B'相同或不同并且包含芳族化合物，并且x和y为10~10000，其中A和A'中的至少一个是脂环族化合物。

