



US 20020041351A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2002/0041351 A1**  
**Back** (43) **Pub. Date: Apr. 11, 2002**(54) **TRANSFLECTIVE LIQUID CRYSTAL  
DISPLAY AND METHOD OF FABRICATING  
THE SAME****Publication Classification**(51) **Int. Cl.<sup>7</sup>** ..... **G02F 1/1335**  
(52) **U.S. Cl.** ..... **349/114**(76) **Inventor: Heum-II Baek, Seoul (KR)****Correspondence Address:****MORGAN, LEWIS & BOCKIUS  
1800 M STREET NW  
WASHINGTON, DC 20036-5869 (US)**(21) **Appl. No.: 09/850,186**(22) **Filed: May 8, 2001**(30) **Foreign Application Priority Data****May 8, 2000 (KR) ..... 2000-24481**(57) **ABSTRACT**

The invention relates to a transfective liquid crystal display device that has a high contrast ratio. The transfective liquid crystal panel includes a homogeneous liquid crystal such that the transfective liquid crystal display device will have an optical retardation when the voltage is applied. Therefore, in order to compensate the optical retardation caused by this liquid crystal, a thickness of the liquid crystal layer is adjusted. Moreover, a thickness of the retardation film is also adjusted. Accordingly, the complete dark state and the high contrast ratio are achieved in the liquid crystal display.



FIG.3  
(RELATED ART)

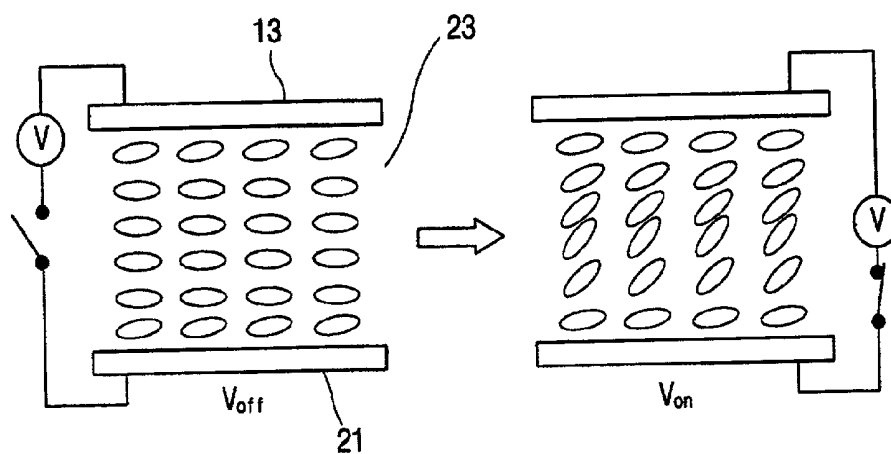


FIG.4  
(RELATED ART)

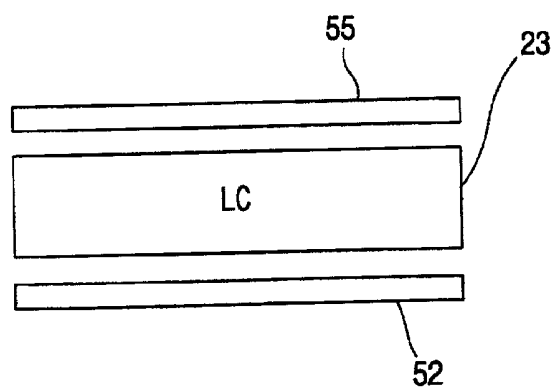


FIG. 5  
(RELATED ART)

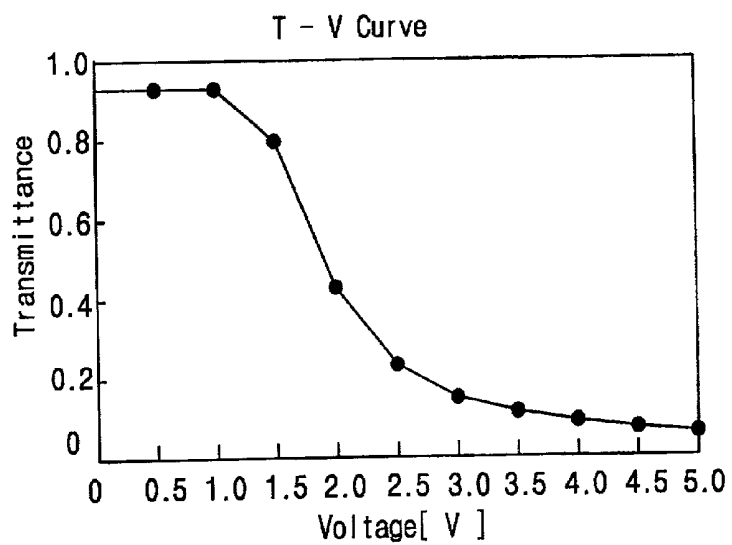


FIG. 6

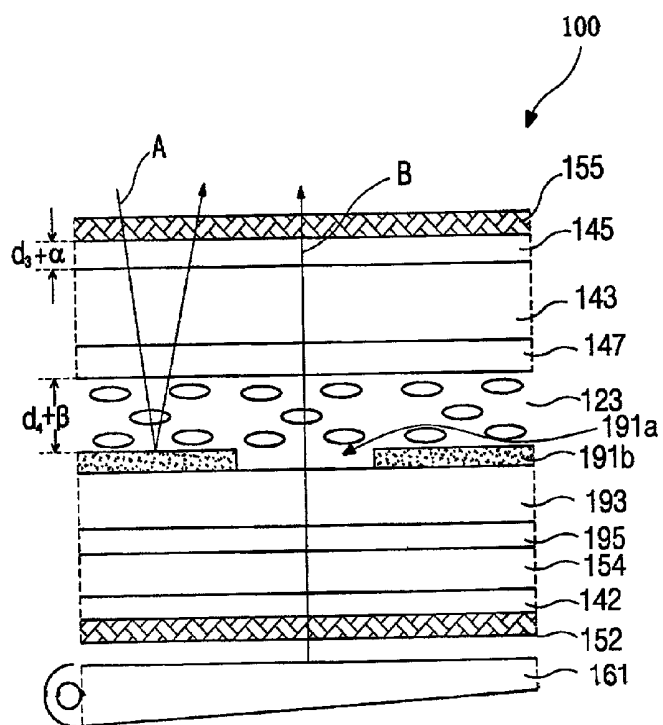


FIG. 7

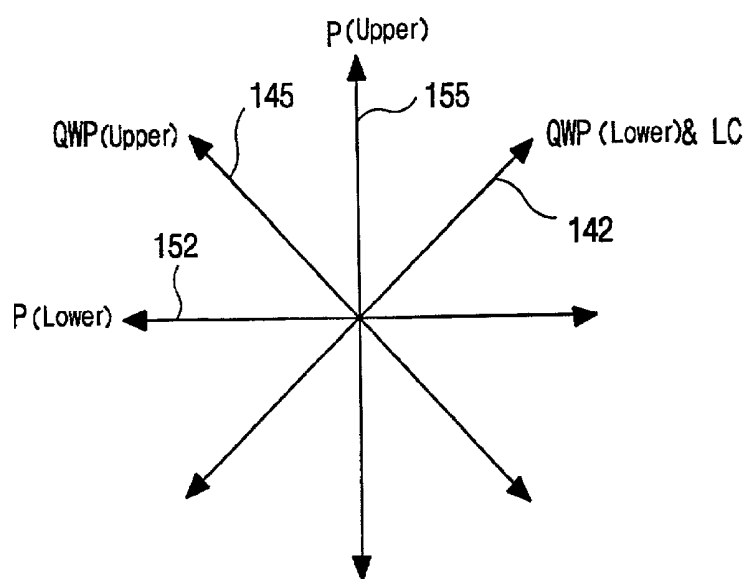


FIG. 8A

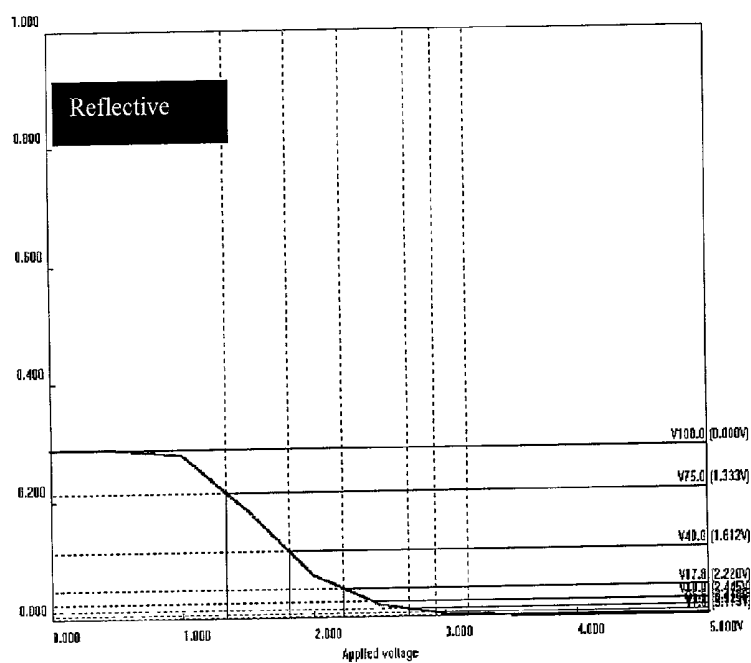


FIG. 8B

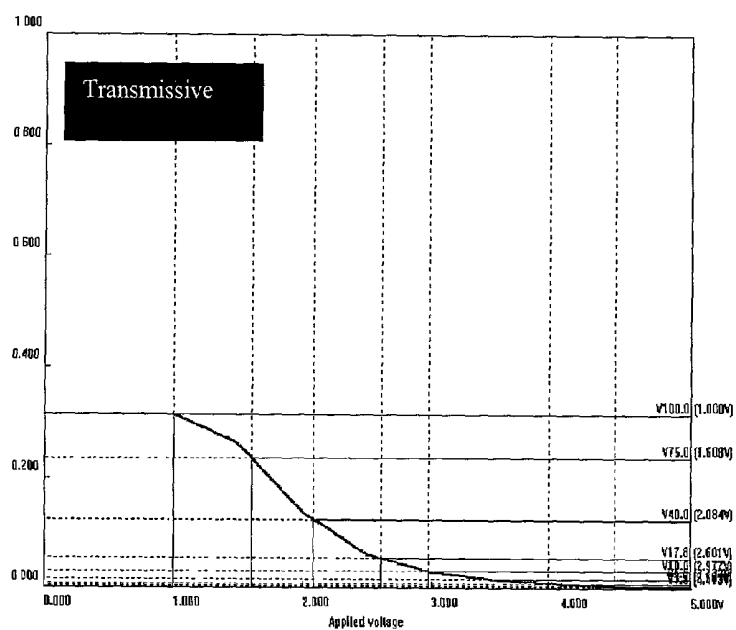


FIG. 9

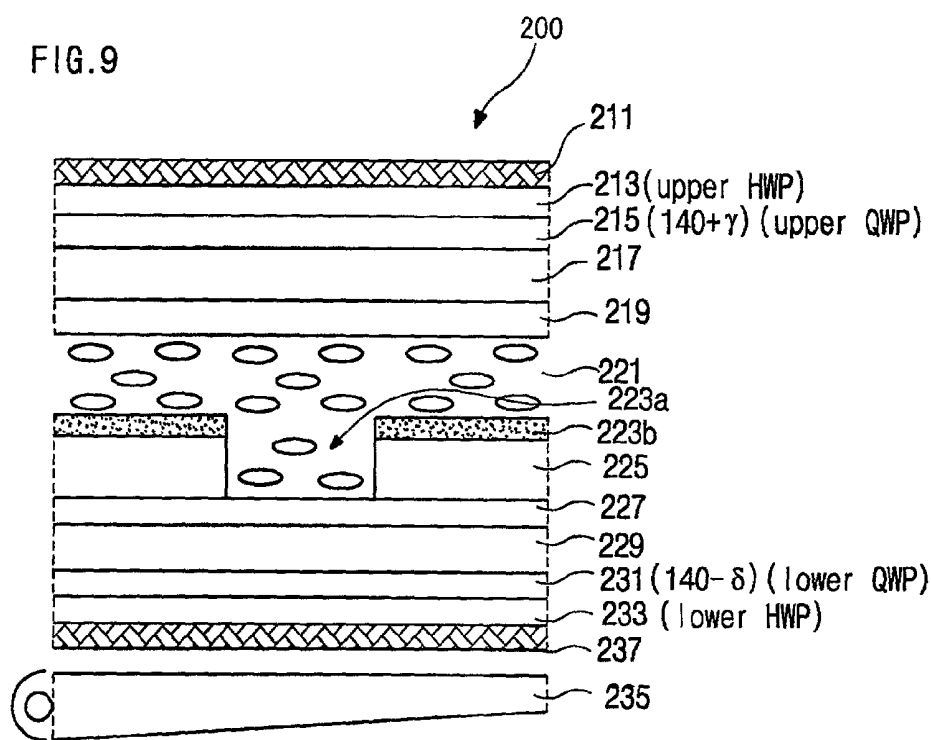


FIG.10

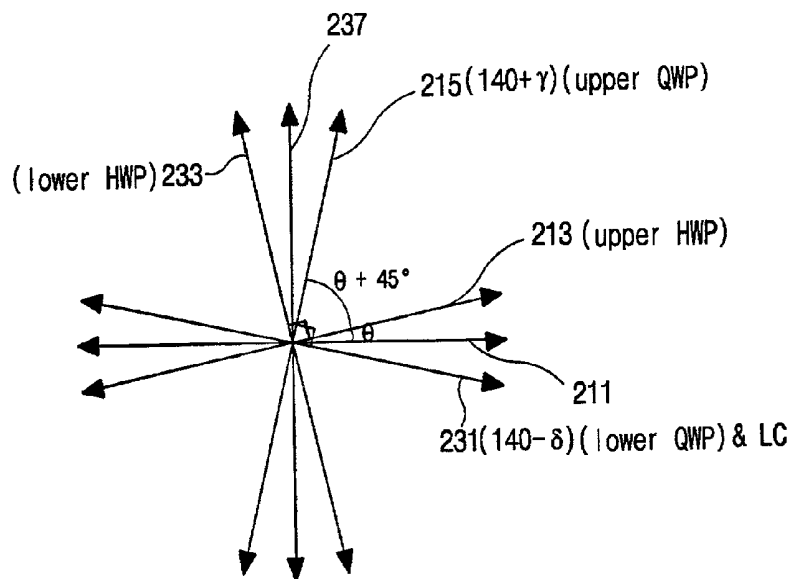


FIG.11A


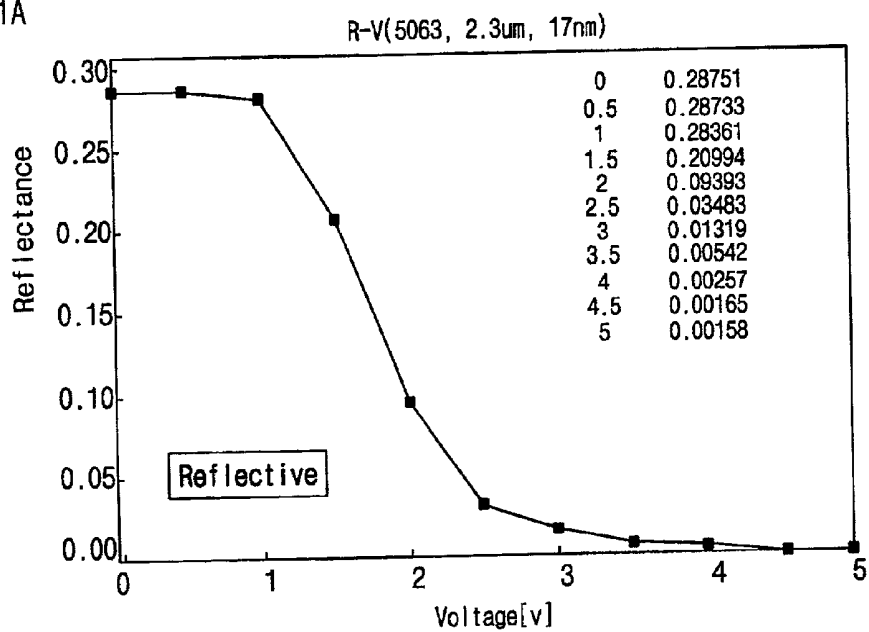


FIG. 11B



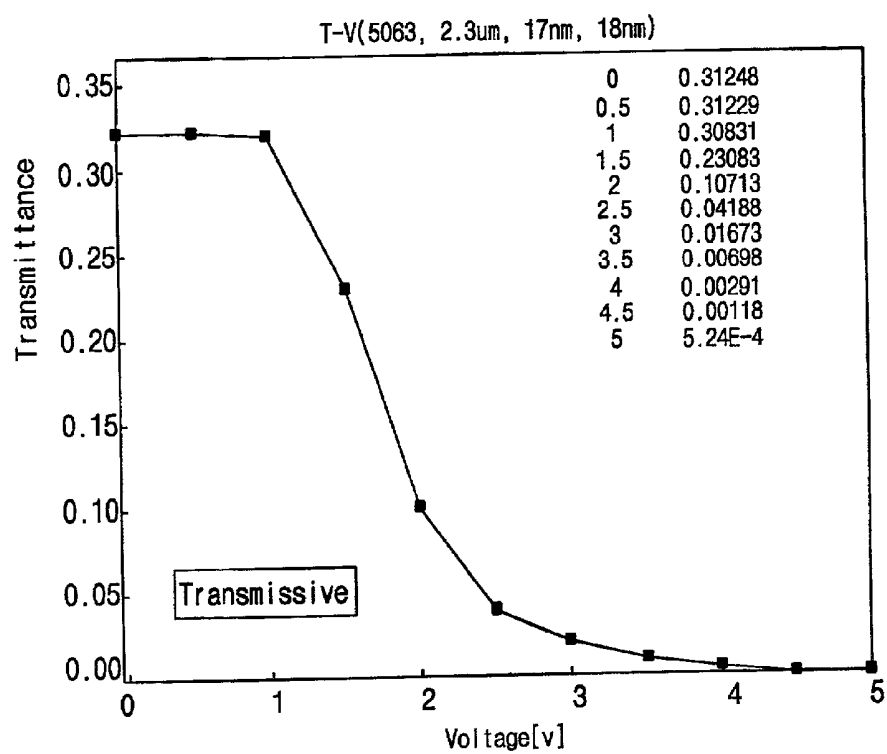

## TRANSFLECTIVE LIQUID CRYSTAL DISPLAY AND METHOD OF FABRICATING THE SAME

[0001] This application claims the benefit of Korean Application No. 2000-24481 filed on May 8, 2000, which is hereby incorporated by reference.

### BACKGROUND OF THE INVENTION

#### [0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display, and more particularly, to a transfective liquid crystal display and method of fabricating the same. Although the present invention is suitable for a wide scope of applications, it is particularly suitable for a high contrast ratio.

#### [0004] 2. Discussion of the Related Art

[0005] In general, a liquid crystal display (LCD) is classified as a transmission type and a reflection type depending on implementing an internal or external light source. The transmission type has a liquid crystal display panel, which does not emit light itself, and has a backlight as a light-illuminating section.

[0006] The backlight is disposed at the rear or one side of the panel. The amount of the light from the backlight that passes through the liquid crystal panel is controlled by the liquid crystal panel in order to implement an image display. In other words, the light from the backlight varies and displays images according to the arrangement of the liquid crystal molecules. However, the backlight of the transmission type LCD consumes 50% or more of the total power consumed by the LCD device. Providing a backlight therefore increases power consumption.

[0007] In order to overcome the above problem, a reflection type LCD has been selected for portable information apparatuses that are often used outdoors or carried with users. Such a reflection type LCD is provided with a reflector formed on one of a pair of substrates. Thus, ambient light is reflected from the surface of the reflector. The reflection type LCD using the reflection of ambient light is disadvantageous in that a visibility of the display is extremely poor when surrounding environment is dark.

[0008] In order to overcome the above problems, a construction which realizes both a transmissive mode display and a reflective mode display in one liquid crystal display device has been proposed. This is so called a transfective liquid crystal display device. The transfective liquid crystal display (LCD) device alternatively acts as a transmissive LCD device and a reflective LCD device. Due to the fact that a transfective LCD device can make use of both internal and external light sources, it can be operated in bright ambient light as well as has a low power consumption.

[0009] FIG. 1 shows a typical transfective liquid crystal display (LCD) device 11. The transfective LCD device 11 includes upper and lower substrates 15 and 21 with an interposed liquid crystal 23. The upper and lower substrates 15 and 21 are sometimes respectively referred to as a color filter substrate and an array substrate.

[0010] On the surface facing into the lower substrate 21, the upper substrate 15 includes a black matrix 16 and a color filter layer 17. The color filter layer 17 includes a matrix array of red (R), green (G), and blue (B) color filters that are

formed, such that each color filter is divided by the black matrix 16. The upper substrate 15 also includes a common electrode 13 over the color filter layer 17 and the black matrix 16.

[0011] On the surface facing into the upper substrate 15, the lower substrate 21 includes an array of thin film transistors (designated as TFT "T" in FIG. 1) that act as switching devices. The array of thin film transistors is formed to correspond to the matrix of color filters. A plurality of gate and data lines 25 and 27 are positioned and crossed over each other. A TFT is located near at each crossing portion of the gate and data lines 25 and 27. The lower substrate 21 also includes a plurality of pixel electrodes 19 in the area between the gate and data lines 25 and 27. Such an area is often referred to as pixel regions "P", as shown in FIG. 1.

[0012] Each pixel electrode 19 includes a transparent portion 19a and a reflective portion 19b. The transparent portion 19a is usually formed of a transparent conductive material having good light transmissivity, such as indium tin oxide (ITO). Alternatively, the transparent portion 19a may be a hole. Moreover, a conductive metallic material having a superior light reflectivity is used for the reflective portion 19b.

[0013] FIG. 2, a schematic cross-sectional view of a transfective LCD device 57 illustrating an operation of such devices. For convenience, the color filters 17 (shown in FIG. 1) are not shown in FIG. 2 because it does not affect the polarization state of light. As shown in FIG. 2, the transfective LCD device 57 includes lower and upper substrates 21 and 15 and an liquid crystal layer 23 having optical anisotropy is interposed therebetween.

[0014] The upper substrate 15 includes a common electrode 13 on its surface facing into the lower substrate 21. On the other surface of the upper substrate 15, an upper quarter wave plate (QWP) 45 (often referred to as a retardation film), which has a phase difference  $\lambda/4$ , and an upper polarizer 55 are formed in series.

[0015] The lower substrate 21 includes a transparent electrode 50 on its surface facing into the upper substrate 15. A passivation layer 48 and a reflective electrode 19b are formed in series on the transparent electrode 50. The reflective electrode 19b and the transparent electrode 50 act together as a pixel electrode (the reference numeral 19 of FIG. 1). The passivation layer 48 and the reflective electrode 19b also have a transmitting hole 19a.

[0016] Various configurations and structures may be implemented for the pixel electrode in the transfective LCD device. However, the passivation layer 48 should be formed between the transparent electrode 50 and the reflective electrode 19b.

[0017] In order to form a pixel electrode, a transparent conductive material such as ITO (indium tin oxide) or IZO (indium zinc oxide) is deposited on the lower substrate 21 and then patterned into the transparent electrode 50.

[0018] Next, the passivation layer 48 is formed on the transparent electrode 50. The conductive metallic material having superior reflectivity, such as aluminum (Al) or the like, is deposited on the passivation layer 48 and then patterned to form a reflective electrode 19b. In this pattern-

ing process, the transmitting hole **19a** as a transparent portion is formed at the central portion of the reflective electrode **19b**. Moreover the central portion of the passivation layer **48** corresponding to the hole **19a** is also patterned to expose the central portion of the transparent electrode **50**.

[0019] Accordingly, the transparent electrode **50** and the reflective electrode **19b** serve as a pixel electrode. Moreover, this structure makes different cell gaps “ $d_1$ ” and “ $d_2$ ” between the common electrode **13** and the pixel electrode (the reflective electrode **19b** and the transparent electrode **50**). “ $d_1$ ” denotes the first cell gap between the common electrode **13** and the reflective electrode **19b** while “ $d_2$ ” denotes the second cell gap between the common electrode **13** and the transparent electrode **50**.

[0020] On the other surface of the lower substrate **21**, a lower quarter wave plate **54** and a lower polarizer **52** are formed in series. Moreover, a backlight device **41** is arranged below the lower polarizer **52**.

[0021] In a homogeneous liquid crystal or twisted nematic (TN), its molecules are oriented in the vertical direction when a voltage is applied ( $V_{on}=5V$ ) and used as a liquid crystal layer **23**. When an optical retardation “ $\Delta n \cdot d_1$ ” of a first cell gap is  $\lambda/4$  ( $\lambda=550$  nm) and a second cell gap “ $d_2$ ” is twice as large as the first cell gap “ $d_1$ ” as described by equations (1) and (2), an optical retardation “ $\Delta n \cdot d_2$ ” of the second cell gap “ $d_2$ ” is shown in equation (3).

$$\Delta n \cdot d_1 = \lambda/4 \quad (1)$$

$$d_2 = 2d_1 \quad (2)$$

$$\therefore \Delta n \cdot d_2 = \lambda/2 \quad (3)$$

[0022] In the above equations,  $\Delta n$  is birefringence,  $d_1$  denotes the first cell gap between the reflective electrode and the common electrode,  $d_2$  denotes the second cell gap between the transparent electrode and the common electrode.  $\lambda$  is the wavelength of the light, and  $\lambda/4$  is a phase shift value of the light when the light passes through a reflective portion of the liquid crystal layer **23** between the common electrode **13** and the reflective electrode **19b** at once.  $\lambda/2$  is a phase shift value of the light when the light passes through a transparent portion of the liquid crystal layer between the common electrode **13** and the transparent electrode **50** at once.

[0023] Accordingly, the optical retardation “ $\Delta n \cdot d_2$ ” of the second cell gap “ $d_2$ ”, as shown by equation (3), is  $\lambda/2$  ( $\lambda=550$  nm). In the reflective mode, the ambient light passes through the liquid crystal layer **23** twice, i.e., as the ambient light is reflected by the reflective electrode **19b**.

[0024] As mentioned above, since different cell gaps (the transparent portion and the reflective portion) are formed in the liquid crystal layer **23**, there is no difference in the optical retardation of light passing both through the transparent portion and through the reflective portion.

[0025] FIG. 3 shows a liquid crystal orientation in cases that the voltage is applied and not applied. As shown, molecules of the liquid crystal layer **23** are arranged in the horizontal direction along the upper and lower substrates **13** and **21** when the voltage is not applied. On the other hand, the molecules are arranged in the vertical direction perpendicular to the upper and lower substrates **13** and **21** when the voltage is applied. However, in the ON-state, the molecules close to the upper and lower substrate **13** and **21** are not

oriented properly because of an anchoring energy generated between the liquid crystal molecules and each substrate.

[0026] Therefore, the liquid crystal layer **23** derives characteristics of birefringence because the liquid crystal molecules are not properly oriented. Namely, a residual optical phase retardation can exist because of unchanged orientation or alignment of some of the liquid crystal molecules that are close to the upper and lower substrates **13** and **21**. These cause the light leakage in a dark state of the LCD device.

[0027] In general, in case of the TN liquid crystal that has a twisted angle of  $90^\circ$ , molecules detached from the upper and lower substrates are mostly arranged perpendicular to the pair of substrates when the voltage is applied since these molecules are not affected from the anchoring energy. Moreover, the molecules close to the pair of substrates are not arranged in the vertical direction. Thus, the orientation direction of the TN liquid crystal molecules close to the upper substrate are arranged perpendicular to that of the molecules close to the lower substrate. As a result, an optical effect of the TN liquid crystal is offset each other.

[0028] However, in case of the homogeneous liquid crystal that has a twisted angle of  $0^\circ$  as shown in FIG. 3, these molecules close to the upper and lower substrates **13** and **21** affect the optical effect of the liquid crystal layer **23**. This is because an orientation direction of the molecules located close to the upper substrate **13** are parallel to that of the molecules around the lower substrate **23**.

[0029] Therefore, a light leakage occurs in the dark state of the LCD device when the upper retardation film (the reference numeral **45** of FIG. 2) and the lower retardation film (the reference numeral **54** of FIG. 2) have the same phase difference value. In addition, a contrast ratio of the transmissive LCD device is deteriorated by the light leakage.

[0030] FIG. 4 is a simplified cross-sectional view in order to calculate a phase retardation value of the above-mentioned homogeneous liquid crystal. As shown, the upper polarizer **55** and the lower polarizer **52** are facing into each other. The liquid crystal layer **23** that has the optical retardation  $\lambda/2$  is interposed between the pair of polarizers **55** and **52**. Thereafter, a transmittance is measured by a simulator such as an LCD master.

[0031] FIG. 5 is a graph illustrating a transmittance when a voltage is applied to the transmissive LCD device of FIG. 4. When the voltage is applied, i.e., the TFT is turned ON, the transmittance should be ideally zero (i.e.,  $T=0$ ). However, the transmittance results in 0.038 (i.e.,  $T=0.038$ ) in experiment. Moreover, the transmittance can be calculated by the following equation (4).

$$T = \sin^2 2\phi \sin^2 \left[ \frac{\pi \cdot \Delta n \cdot d}{\lambda} \right] \quad (4)$$

[0032] In equation (4), “ $T$ ” denotes a transmittance, “ $\Delta n \cdot d$ ” denotes an optical retardation,  $\lambda$  denotes a wavelength of light,  $\phi$  denotes an angle between a transmissive axis of the polarizer and an optical axis of the liquid crystal layer. From the above equation (4), the optical retardation “ $\Delta n \cdot d$ ” is 34 nm (i.e.,  $\Delta n \cdot d=34$  nm), when  $\lambda$  is 550 nm and  $\phi$  is 45 degrees.

[0033] Accordingly, the light passing through the liquid crystal layer, which includes a homogeneous liquid crystal, has an optical retardation when a voltage is applied to the related art transfective LCD device. Thus, a complete dark state can not be achieved because of the light leakage described above.

#### SUMMARY OF THE INVENTION

[0034] Accordingly, the present invention is directed to a transfective liquid crystal display and a method of fabricating the same that substantially obviate one or more of the problems due to limitations and disadvantages of the related art.

[0035] An object of the invention is to provide a transfective LCD display and a method of fabricating the same achieving a high contrast ratio.

[0036] Additional features and advantages of the invention will be set forth in the description that follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0037] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described, a transfective liquid crystal display includes upper and lower substrates facing into and spaced apart from each other, wherein the upper and lower substrates include a plurality of pixel regions that display images, a liquid crystal layer interposed between the upper and lower substrates, wherein the liquid crystal layer has a first adjusted thickness to compensate an residual optical retardation of incident light caused by anchored liquid crystals near an alignment layer when a maximum operation voltage is applied, an upper quarter wave plate (QWP) on the upper substrate, wherein the upper quarter wave plate has a second adjusted thickness to compensate the residual optical retardation caused by the liquid crystal layer when the maximum operation voltage is applied, an upper polarizer on the upper quarter wave plate, a transparent common electrode on a surface of the upper substrate facing into the lower substrate, a pixel electrode over a first surface of the lower substrate, wherein the pixel electrode corresponds to each pixel region, and the pixel electrode is divided into transparent and reflective portions, a lower quarter wave plate (QWP) on a second surface of the lower substrate, a lower polarizer below the lower quarter wave plate, and a backlight device arranged to be adjacent to the lower polarizer.

[0038] The liquid crystal layer has a thickness of "d" and a transmittance of "T" when a maximum voltage for operating is applied, wherein an adjusted thickness of liquid crystal layer is calculated using the following equation:

$$T = \sin^2 2\phi \sin^2 \left[ \frac{\pi \cdot \Delta n \cdot d_1}{\lambda} \right],$$

[0039] where, T is equals to the value of the transmittance,  $\phi$  is an angle between an optical axis of the liquid crystal layer and a transmissive axis of the polarizer,  $\Delta n$  is a

birefringence of the liquid crystal layer, and wherein  $d_1$  is calculated from the above equation, and the liquid crystal layer then has the adjusted thickness "d+d<sub>1</sub>" for compensating the optical retardation. A value of  $\phi$  mentioned above is 45 degrees.

[0040] The upper QWP has a thickness of "d" and a transmittance of "T", wherein an adjusted thickness of the upper QWP for compensation is calculated using the following equation:

$$T = \sin^2 2\phi \sin^2 \left[ \frac{\pi \cdot \Delta n \cdot d_2}{\lambda} \right],$$

[0041] where, T is equals to the value of the transmittance,  $\phi$  is an angle between a slow axis of the upper QWP and a transmissive axis of the polarizer,  $\Delta n$  is a birefringence of the upper QWP, and wherein  $d_2$  is calculated from the above equation and the upper QWP then has the adjusted thickness "d+d<sub>2</sub>" for compensating the optical retardation. A value of  $\phi$  mentioned above is 45 degrees. In accordance with the purpose of the invention, in another aspect, the principles of the present invention provide a transfective liquid crystal display device, including: upper and lower substrates facing and spaced apart from each other, wherein the upper and lower substrates include a plurality of pixel region that display images; a liquid crystal layer interposed between the upper and lower substrates, wherein the liquid crystal layer has an adjusted thickness of compensating a residual optical retardation of incident light caused by anchored liquid crystals near an alignment layer when a maximum voltage for operating is applied; a first upper retardation film over the upper substrate; a second upper retardation film between the first upper retardation film and the upper substrate, wherein the second upper retardation film has an adjusted thickness of compensating an optical retardation caused by the liquid crystal layer; an upper polarizer on the first upper retardation film; a transparent common electrode on a surface of the upper substrate facing the lower substrate; a transparent electrode on a surface of the lower substrate facing the upper substrate; a pixel electrode over the lower substrate, wherein the pixel electrode corresponds to each pixel region, and wherein the pixel electrode is divided into transparent and reflective portions; a second lower retardation film on the other surface of the lower substrate, wherein the second lower retardation film has an adjusted thickness of compensating a residual optical retardation caused by the liquid crystal layer when a maximum voltage for operating is applied; a first lower retardation film under the second lower retardation film; a lower polarizer under the first lower retardation film; and a backlight device arranged adjacent to the lower polarizer.

[0042] The transparent portion of the pixel electrode includes a transparent electrode, and wherein the transparent electrode is disposed on a surface of the lower substrate facing the upper substrate. The transfective liquid crystal display device further comprises a passivation layer on the transparent electrode, the passivation layer having a transmitting hole in its central portion. Moreover, the reflective portion of the pixel electrode includes a reflective electrode, which is disposed on the passivation layer and has the transmitting hole in its central portion.

[0043] The transreflective liquid crystal display device further includes a passivation layer on the transparent electrode, and the passivation layer has a transmitting hole in its central portion. Moreover, the transreflective liquid crystal display device further includes a reflective electrode on the passivation layer, and the reflective electrode has the transmitting hole in its central portion.

[0044] The liquid crystal layer has a thickness of “d” in a reflective portion in order for an optical retardation of  $\lambda/4$ , and a thickness of “2d” in a transmissive portion in order for an optical retardation of  $\lambda/2$ , wherein the liquid crystal layer has a transmittance of “T” when a maximum voltage for operating is applied, wherein an adjusted thickness of the liquid crystal layer is calculated using the following equation:

$$T = \sin^2 2\phi \sin^2 \left[ \frac{\pi \cdot \Delta n \cdot d^*}{\lambda} \right],$$

[0045] where, T is equals to the value of the transmittance,  $\phi$  is an angle between an optical axis of the liquid crystal layer and a transmissive axis of the polarizer,  $\Delta n$  is a birefringence of the liquid crystal layer, and  $d^*$  is a thickness of the liquid crystal layer, wherein  $d^*$  is  $d_1$  or  $d_2$ , wherein  $d_1$  and  $d_2$  are calculated from the above equation, where,  $d_1$  is a first auxiliary thickness of the liquid crystal layer when the residual optical retardation of the light is  $\gamma$  in the reflective portion,  $d_2$  is a second auxiliary thickness of the liquid crystal layer when the residual optical retardation of the light is  $\omega$  in the transmissive portion, and then the phase difference between the transmissive and reflective portions is  $\delta = \omega - \gamma$ , and wherein the reflective portion of the liquid crystal layer has the adjusted thickness of “ $d + d_1$ ” and the transmissive portion of the liquid crystal display has the adjusted thickness of “ $2d + d_2$ ” for compensating the optical retardation. A value of  $\phi$  mentioned above is 45 degrees.

[0046] The second upper retardation film has a thickness of “ $d_4$ ” and a transmittance of “T”, wherein an adjusted thickness of the second retardation film is calculated using the following equation:

$$T = \sin^2 2\phi \sin^2 \left[ \frac{\pi \cdot \Delta n \cdot d^*}{\lambda} \right],$$

[0047] where, T is equals to the value of the transmittance,  $\phi$  is an angle between a slow axis of the retardation film and a transmissive axis of the polarizer,  $\Delta n$  is a birefringence of the retardation film, and  $d^*$  is a thickness of the liquid crystal layer, wherein  $d^*$  is  $d_1$ ,  $d_2$  or  $d_3$ , wherein  $d_1$ ,  $d_2$  and  $d_3$  are calculated from the above equation and the following equation:

$$d_{2(\omega)} = d_{1(\gamma)} + d_{3(\delta)}$$

[0048] where,  $d_1$  is a first auxiliary thickness of the liquid crystal layer when the residual optical retardation of the light is  $\gamma$  in the reflective portion,  $d_2$  is a second auxiliary thickness of the liquid crystal layer when the residual optical retardation of the light is  $\delta$  in the transmissive portion, and then the phase difference between the transmissive and reflective portions is  $\delta = \omega - \gamma$ , and wherein the second upper

retardation film has the thickness of “ $d_4 + d_{1(\gamma)}$ ” for compensating the optical retardation. A value of  $\phi$  mentioned above is 45 degrees.

[0049] The second lower retardation film has the thickness of “ $d_4 - d_{3(\delta)}$ ” for compensating the optical retardation. The first upper and lower retardation films are beneficially half wave plates (HWPs) and the second upper and lower retardation films are beneficially quarter wave plates (QWPs). The transmissive axis of the lower polarizer is perpendicular to that of the upper polarizer. The slow axis of the first upper retardation film is perpendicular to that of the first lower retardation film. The slow axis of the second upper retardation film is perpendicular to that of the second lower retardation film. The optical axis of the liquid crystal layer is parallel with the slow axis of the second lower retardation film.

[0050] In another aspect of the present invention, a transreflective liquid crystal display device includes upper and lower substrates facing and spaced apart from each other, wherein the upper and lower substrates include a plurality of pixel region that display images; an upper quarter wave plate (QWP) on the upper substrate; an upper polarizer on the upper quarter wave plate; a lower quarter wave plate (QWP) under the lower substrate; a lower polarizer under the lower quarter wave plate; a backlight device arranged adjacent to the lower polarizer; a liquid crystal layer interposed between the upper and lower substrates; a transparent common electrode on a surface of the upper substrate facing the lower substrate; an upper alignment layer between the transparent common electrode and the liquid crystal layer; a pixel electrode over the lower substrate, wherein the pixel electrode corresponds to each pixel region, and wherein the pixel electrode is divided into transparent and reflective portions; and a lower alignment layer between the pixel electrode and the liquid crystal layer; wherein a transmissive axis of the upper polarizer is perpendicular to a transmissive axis of the lower polarizer; wherein a slow axis of the upper QWP is perpendicular to a slow axis of the lower QWP; wherein the slow axis of the upper QWP forms an angle of  $45^\circ$  with the transmissive axis of the upper polarizer; wherein an optical retardation of the upper QWP is  $\lambda/4 + \alpha$ ; wherein  $\alpha$  ranges from zero to 100 nm; and wherein the slow axis of the lower QWP is parallel with an orientation direction of the liquid crystal display layer.

[0051] An optical retardation of the liquid crystal layer is  $\lambda/4 + \alpha$ . The optical retardation of the liquid crystal layer is different between transmissive and reflective portions, wherein the optical retardation is  $\lambda/4 + \alpha$  in the reflective portion, and wherein the optical retardation is  $\lambda/2 + \beta$  in the transmissive portion, and wherein  $\beta$  ranges from zero to 100 nm. Here, an optimum value of  $\alpha$  for adjusting the optical retardation ranges from zero to 50 nm and an optimum value of  $\beta$  for adjusting the optical retardation ranges from zero to 50 nm.

[0052] In another aspect of the present invention, a transreflective liquid crystal display includes upper and lower substrates facing and spaced apart from each other, wherein the upper and lower substrates include a plurality of pixel region that display images; an upper quarter wave plate (QWP) on the upper substrate; an upper half wave plate (HWP) on the upper QWP; an upper polarizer on the upper HWP; a lower quarter wave plate (QWP) under the lower

substrate; a lower half wave plate (HWP) under the lower QWP; a lower polarizer under the lower HWP; a backlight device arranged adjacent to the lower polarizer; a liquid crystal layer interposed between the upper and lower substrates; a transparent common electrode on a surface of the upper substrate facing the lower substrate; an upper alignment layer between the transparent common electrode and the liquid crystal layer; a pixel electrode over the lower substrate, wherein the pixel electrode corresponds to each pixel region, and wherein the pixel electrode is divided into transparent and reflective portions; and a lower alignment layer between the pixel electrode and the liquid crystal layer; wherein a transmissive axis of the upper polarizer is perpendicular to a transmissive axis of the lower polarizer; wherein a slow axis of the upper QWP is perpendicular to a slow axis of the lower QWP; wherein a slow axis of the upper HWP is perpendicular to a slow axis of the lower HWP; wherein an optical retardation of the upper QWP is  $\lambda/4+\alpha$ ; wherein  $\alpha$  ranges from zero to 100 nm; wherein the slow axis of the lower QWP is parallel with an orientation direction of the liquid crystal display layer; wherein an optical retardation of the lower QWP is  $\lambda/4-\beta$ ; and wherein  $\beta$  ranges from zero to 100 nm.

[0053] An optical retardation of the liquid crystal layer is different between transmissive and reflective portions, wherein the optical retardation is  $\lambda/4+\alpha$  in the reflective portion, and wherein the optical retardation is  $\lambda/2+\alpha\beta$  in the transmissive portion. An optimum value of  $\alpha$  ranges from zero to 50 nm for adjusting the optical retardation and an optimum value of  $\beta$  ranges from zero to 50 nm for adjusting the optical retardation.

[0054] The slow axis of the upper HWP forms an angle of  $\theta$  with the transmissive axis of the upper polarizer. The slow axis of the upper QWP forms an angle of  $2\theta+45^\circ$  with the transmissive axis of the upper polarizer.

[0055] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0056] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiments of the invention and together with the description serve to explain the principle of the invention.

[0057] In the drawings:

[0058] FIG. 1 shows a typical transfective liquid crystal display (LCD) device;

[0059] FIG. 2 shows a schematic cross-sectional view of a transfective LCD device illustrating an operation of such devices;

[0060] FIG. 3 is a schematic view illustrating a liquid crystal orientation when a voltage is applied or not applied to the crystal;

[0061] FIG. 4 is a simplified cross-sectional view in order to calculate a phase retardation value of the homogeneous liquid crystal;

[0062] FIG. 5 is a graph illustrating a transmittance when a voltage is applied to the transfective LCD device of FIG. 4 in the related art LCD device;

[0063] FIG. 6 is a schematic cross-sectional view of a transfective LCD device illustrating an operation of such devices according to a first embodiment of the present invention;

[0064] FIG. 7 shows a positional relationship among elements of the transfective LCD device shown in FIG. 6;

[0065] FIGS. 8A and 8B are graphs illustrating a reflectance in the reflective portion and a transmittance in the transmissive portion of the transfective LCD device, respectively;

[0066] FIG. 9 is a schematic cross-sectional view of the transfective LCD device according to a second embodiment;

[0067] FIG. 10 shows a positional relationship of the elements of the transfective LCD device shown in FIG. 9; and

[0068] FIGS. 11A and 11B are graphs respectively illustrating reflectance and transmittance with variations in applied voltages according to the second embodiment.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0069] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0070] FIG. 6, a schematic cross-sectional view of a transfective LCD device 100 illustrating an operation of such devices according to a first embodiment of the present invention. For convenience, the color filters (the reference numeral 17 of FIG. 1) are not shown in FIG. 6 because they do not affect the polarization state of light. Also, some of explanation will be omitted if not necessary.

[0071] As shown in FIG. 6, the transfective LCD device 100 includes upper and lower substrates 143 and 154 and an interposed liquid crystal layer 123 that has an optical retardation of  $\lambda/4$ . A common electrode 147 is formed on the upper substrate 143. On the other surface of the upper substrate 143, an upper quarter wave plate (QWP) 145 (often referred to as an upper retardation film), which has a phase difference  $\lambda/4$ , and an upper polarizer 155 are successively formed thereon.

[0072] A transparent electrode 195 is formed on the lower substrate 154. A passivation layer 193 and a reflective electrode 191b are successively formed on the transparent electrode 195. The reflective electrode 191b and the transparent electrode 195 act together as a pixel electrode. On the other surface of the lower substrate 154, a lower quarter wave plate (QWP) 142 (referred to as a lower retardation film) and a lower polarizer 152 are successively formed thereon. Moreover, a backlight device 161 is arranged to be adjacent to the lower polarizer 152.

[0073] In the first embodiment, the liquid crystal layer 123 includes a homogeneous liquid crystal. Therefore, the liquid crystal molecules, as aforementioned, are vertically

arranged when the voltage is applied, and thus the transreflective LCD device displays the dark state. However, the molecules close to the pair of substrates, as described in FIG. 3, are not arranged to be perpendicular to the substrates. This causes the liquid crystal layer to have an optical retardation value. As a result, the light passing through the liquid crystal layer has the optical retardation so that some portion of the light leaks from the panel due to a wavelength dispersion.

[0074] Referring back to FIG. 5, the transmittance of the light passing through the liquid crystal layer is measured (i.e.,  $T=0.038$ ) when the voltage is applied. Then the optical retardation " $\Delta n \cdot d$ " is calculated using equation (4). The optical retardation of the liquid crystal can be compensated by adjusting a thickness of the liquid crystal layer.

[0075] Referring to FIG. 6, for instance, suppose that the optical retardation value of the upper retardation film is 140 nm (at  $\Delta n=0.0028$ ,  $d=50$  micrometers). Further, suppose that the liquid crystal layer is ZGS-5063 ( $\Delta n=0.067$ ), which is conventionally used. If a voltage is applied to the liquid crystal layer, an optical retardation value of the light passing through the liquid crystal layer should be ideally zero. However, due to the molecules arranged close to the substrates, the light passing through the liquid crystal has a non-zero optical retardation. Thus, when the transmittance is 0.038 ( $T=0.038$ ) as shown in FIG. 5, the liquid crystal layer has the optical retardation of 34 nm ( $\Delta n \cdot d=34$  nm) using equation (4).

[0076] From the equation of  $\Delta n \cdot d=34$  nm, " $d$ " of the retardation film is about 12 micrometers (i.e.,  $d=12$  micrometers) when the birefringence " $\Delta n$ " is 0.0028. Thus, the retardation film is thicker by 12 micrometers (i.e.,  $\alpha=12$  micrometers) than it could be (i.e.,  $d_3+\alpha$ , shown in FIG. 6). Moreover, " $d$ " of the liquid crystal layer is about 0.5 micrometers (i.e.,  $d=0.5$  micrometers) from the equation of  $\Delta n \cdot d=34$  nm when  $\Delta n=0.067$ . Thus, the liquid crystal layer is thicker by 0.5 micrometers (i.e.,  $\beta=0.5$  micrometers) than it could be (i.e.,  $d_4+\beta$ , shown in FIG. 6).

[0077] Each thickness of the liquid crystal layer and the retardation film may be described by the following TABLE 1.

TABLE 1

		Reflective	Transmissive
$V_{off}$	Upper retardation film	$\lambda/4 + \Delta n \cdot d$	$\lambda/4 + \Delta n \cdot d$
	Liquid crystal layer	$\lambda/4 + \Delta n \cdot d$	$\lambda/2 + \Delta n \cdot d$
	Lower retardation film	Don't care	$\lambda/4$
$V_{on}$	Upper retardation film	$\lambda/4 + \Delta n \cdot d$	$\lambda/4 + \Delta n \cdot d$
	Liquid crystal layer	$\Delta n \cdot d$	$\Delta n \cdot d$
	Lower retardation film	Don't care	$\lambda/4$

[0078] Accordingly, as shown in TABLE 1, the transreflective LCD device in the present invention can have a completely polarized light in the reflective and transmissive modes by controlling the thickness of the liquid crystal layer 123 and of the upper retardation film 145.

[0079] When a voltage is not applied to the liquid crystal layer 123, the light passing through the reflective portion of the liquid crystal layer 123 has an optical retardation of  $\lambda/2$ . On the other hand, the light passing through the transmissive portion of the liquid crystal layer 123 has the optical

retardation of  $\lambda/2$ . Conversely, when a voltage is applied to the liquid crystal layer 123, both the light passing through the reflective and the transmissive portions of the liquid crystal layer 123 has a zero optical retardation.

[0080] Accordingly, the complete dark state of the transreflective LCD device can be achieved in both transmissive and reflective modes. Although the optical retardation is  $\lambda/2$  in the liquid crystal layer when a voltage is not applied, the optical retardation of  $\lambda/4$  is acceptable for simplifying the fabrication process step.

[0081] In addition to the method of adjusting the thickness of the liquid crystal layer and of the retardation film, the transreflective LCD device may be designed by using other ways. For example, a slow axis of the upper QWP 145 is designed to be perpendicular to that of the lower QWP 142. Alternatively, the slow axis of the lower QWP 142 is parallel with an orientation direction of the liquid crystal layer, as shown in FIG. 7. Moreover, a transmissive axis of the upper polarizer 155 is perpendicular to that of the lower polarizer 152. Therefore, the residual optical retardation of the liquid crystal layer in the voltage of on-state is offset by these perpendicular structures. A light leakage is thus prevented when the transreflective LCD device displays the dark state.

[0082] FIGS. 8A and 8B are graphs illustrating reflectance in the reflective portion and transmittance in the transmissive portion of the transreflective LCD device, respectively. As shown, when a voltage is applied ( $V_{on}=5V$ ), a light leakage does not occur in both the reflective and transmissive portions of the transreflective LCD device. On the other hand, when a voltage is not applied ( $V_{off}=0V$ ), both the reflectance and the transmittance are about 0.3. These are almost equal to each other.

[0083] A contrast ratio is relatively more affected by the brightness of the LCD device in the dark state. According to the present invention, since the complete dark state can be achieved when a voltage is applied, the transreflective LCD device has a high contrast ratio.

[0084] A second embodiment of the present invention will be explained hereinafter referring to accompanying drawings. In the second embodiment, thickness of both the upper and lower retardation films is adjusted for compensating an optical retardation of the transmissive and reflective portions. The thickness of the liquid crystal layer is also adjusted.

[0085] FIG. 9 is a schematic cross-sectional view of a transreflective LCD device according to the second embodiment. For convenience, the color filters (the reference numeral 17 of FIG. 1) are not shown in FIG. 9 because they do not affect the polarization state of light.

[0086] As shown in FIG. 9, the transreflective LCD device 200 includes upper and lower substrates 217 and 229 and an interposed liquid crystal layer 221. The upper substrate 217 includes a common electrode 219 on the surface facing into the lower substrate 229. On the other surface of the upper substrate 217, an upper quarter wave plate (QWP) 215, an upper half wave plate (HWP) 213, and an upper polarizer 211 are successively formed thereon. The upper HWP 213 has an optical retardation of 270 nm ( $\lambda/2$ ; at  $\lambda=550$  nm) and the upper QWP 215 has an optical retardation of 140 nm ( $\lambda/4$ ; at  $\lambda=550$  nm). The upper HWP 213 and the upper QWP 215 act as first and second upper retardation films, respectively.

[0087] Still referring to FIG. 9, the lower substrate 229 includes a transparent electrode 227 on the surface facing into the upper substrate 217. A passivation layer 225 and a reflective electrode 223b are successively formed on the transparent electrode 227. A transmitting hole 223a penetrating both the reflective electrode 223b and the passivation layer 225 is formed in the central part of both the reflective electrode 223b and the passivation layer 225. The reflective electrode 223b and the transparent electrode 227 act together as a pixel electrode.

[0088] On the other surface of the lower substrate 229, a lower quarter wave plate (QWP) 231, a lower half wave plate (HWP) 233, and a lower polarizer 237 are successively formed thereon. The lower QWP 231 has an optical retardation of 140 nm ( $\lambda/4$ ; at  $\lambda=550$  nm) and the lower HWP 233 has an optical retardation of 270 nm ( $\lambda/2$ ; at  $\lambda=550$  nm). The lower HWP 233 and the lower QWP 231 act as first and second lower retardation films, respectively. The lower polarizer 237 has a transmissive axis that is perpendicular to a transmissive axis of the upper polarizer 211. Moreover, a backlight device 235 is arranged adjacent to the lower polarizer 237.

[0089] FIG. 10 shows a positional relationship of the transfective LCD device of FIG. 9 according to the second embodiment. As shown in FIG. 10, the transmissive axis of the upper polarizer 211 is perpendicular to that of the lower polarizer 237. A slow axis of the upper HWP 213 is perpendicular to that of the lower HWP 233 while a slow axis of the upper QWP 215 is perpendicular to that of the lower QWP 231. Moreover, an orientation direction of the liquid crystal layer is parallel to the slow axis of the lower QWP 231. The optical axes of the lower part elements is perpendicular to those of their mutual upper part elements, resulting in that optical compensation effect of the light passing aforementioned transfective LCD device is achieved with high efficiency.

[0090] The reason of forming two retardation films (QWP and HWP) on each substrate is to expand an optical compensation effect through the broad-wavelength band of the light. In other words, the slow axis of the quarter wave plate should be disposed at an angle of 45° from the transmissive axis of the polarizer in order to convert the linearly polarized light to the circularly polarized light. By achieving the angle of 45° between the transmissive axis of the polarizer and the slow axis of the retardation film, the linearly polarized light that has passed through the polarizer is converted into the circularly polarized light by the phase difference of  $\lambda/4$ .

[0091] Moreover, the optical retardation of an object is depending on the wavelengths of the incident light, and a general retardation film is designed focusing on the wavelength of 550 nm that is the central portion of the visible light (380 nm to 780 nm). Thus, the optical retardation of the general retardation film is  $\lambda/4$ , (i.e., 140 nm). Therefore, the retardation film does not properly serve to produce the circularly polarized light in the other wavelengths, resulting in the elliptically polarized light. In order to solve this problem, two retardation films are used in both upper substrate and lower substrate. This structure shown in FIG. 10 enables to control all wavelengths of the visible light in accordance with the angle "0".

[0092] An operating principle of the above-mentioned transfective LCD device will be explained hereinafter.

[0093] As incident light passes through the polarizer, the light is converted into the linearly polarized light. When the linearly polarized light faces the retardation film having an optical retardation of 270 nm, a direction of the linearly polarized light is changed by the optical axis of the retardation film. However, the retardation film act as a half wave plate ( $\lambda/2$ ) for a designed wavelength such as  $\lambda=550$  nm, so that the retardation film produces the elliptically polarized light in the other wavelengths.

[0094] Thereafter, the light results in having an angle of 45° from the slow axis of the QWP such that the linearly polarized light is converted into the circularly polarized light. Before the light enters the QWP, the HWP compensates the light for its optical retardation, and thus all wavelengths of the linearly polarized light are nearly converted into the circularly polarized light.

[0095] However, the compensation effect of the retardation film as discussed above has some limitations as follows.

[0096] First of all, since a homogeneous liquid crystal is not completely arranged in the vertical direction when a voltage is applied, a phase difference caused in the liquid crystal layer is not completely compensated. In addition, since there is a phase difference in the different cell gaps, (i.e., reflective portion and transmissive portion), it is difficult to precisely compensate the phase differences caused in the reflective and transmissive portions at the same time.

[0097] Accordingly, in order to compensate the phase differences caused both in the reflective and transmissive portions, not only the thickness of the liquid crystal layer but also the thickness of the upper and lower QWPs are adjusted at the same time. Thus, the phase of the light is compensated accordingly. In other words, a phase value occurring in the different cell gaps of the liquid crystal layer is greater in the transmissive portion than in the reflective portion.

[0098] At this point, suppose that a phase difference of the reflective portion is  $\gamma$  and a phase difference of the transmissive portion is  $\omega$ . If the phase difference  $\delta$  between the transmissive and reflective portions is  $\omega-\gamma$  (i.e.,  $\delta=\omega-\gamma$ ), then the phase difference of the transmissive portion is  $\omega=\delta+\gamma$ . Therefore, the cell gaps of the transmissive and reflective portions is written as following equations:

$$d_{(\lambda/4)} + d_{(\gamma)} \quad (5)$$

[0099] cell gap of reflective portion

$$d_{(\lambda/2)} + d_{(\omega=\delta+\gamma)} \quad (6)$$

[0100] cell gap of transmissive portion

[0101] Here, an orientation direction of the liquid crystal layer has an angle of 90° from the slow axis of the upper QWP and an angle of 0° from the slow axis of the lower QWP. Thus, an offset occurs between the liquid crystal layer and the upper retardation film, while reinforcement occurs between the liquid crystal layer and the lower retardation film. Here, analysis of the state of polarization will be in terms of a form according to the Jones matrix method, in which two components, of the electric field, perpendicular to a direction of movement of light are expressed as a vector, and the transmission medium is expressed as a 2x2 matrix:

[0102]

$$\begin{pmatrix} e^{i\epsilon_x} & 0 \\ 0 & e^{i\epsilon_y} \end{pmatrix} \quad (6)$$

[0103] wherein  $\epsilon_x$  and  $\epsilon_y$  denote optical retardations of x-axis and of y-axis, respectively, in orthogonal coordinates system. Here, the proper optical retardation is represented by  $\Delta\epsilon=\Delta_y-\Delta_x$ . Therefore, if the slow axis of the upper QWP (140 nm) is perpendicular to the optical axis of the liquid crystal layer, the slow axis of the upper QWP is the x-axis and the orientation direction is the y-axis.  $\Delta\epsilon$  of the upper QWP becomes a negative value ( $\because \epsilon_y < \epsilon_x$ ), and  $\Delta\epsilon$  of the liquid crystal layer becomes a positive value ( $\because \epsilon_y > \epsilon_x$ ), and then the optical retardation  $\Delta\epsilon$  is offset by each other.

[0104] However, since the optical axis of the liquid crystal layer is parallel to the slow axis of the lower QWP, the optical axis of the liquid crystal layer and the slow axis of the lower QWP can altogether either be x-axis or y-axis in orthogonal coordinates system. Therefore, the optical retardation  $\Delta\epsilon$  of both the liquid crystal layer and the lower QWP has either positive or negative value, and then the optical retardation  $\Delta\epsilon$  is reinforced.

[0105] From the equations (5) and (6), the thickness of the upper and lower QWP is adjusted, resulting in that the optical retardation of the upper QWP is 140 nm+ $\gamma$  and the optical retardation of the lower QWP is 140 nm- $\delta$ . Thus, the optical retardation is offset by each other.

[0106] The thickness of the liquid crystal layer and of the retardation films can be described by the following TABLE 2.

TABLE 2

		Reflective	Transmissive
<u>V<sub>off</sub></u>			
Upper retardation films	HWP	270 nm	270 nm
	QWP	140 nm + $\gamma$	140 nm + $\gamma$
Liquid crystal layer		140 nm + $\gamma$	270 nm + $\gamma$ + $\delta$
Lower retardation films	QWP	Don't care	140 nm - $\delta$
	HWP		270 nm
<u>V<sub>on</sub></u>			
Upper retardation films	HWP	270 nm	270 nm
	QWP	140 nm + $\gamma$	140 nm + $\gamma$
Liquid crystal layer		$\gamma$	$\gamma$ + $\delta$
Lower retardation films	QWP	Don't care	140 nm - $\delta$
	HWP		270 nm

[0107] For more detailed explanation, as shown in TABLE 2 and FIGS. 9 and 10, the state of complete polarization of the light can be achieved by adjusting the thickness of both the liquid crystal layer 221 and the upper and lower QWPs 215 and 231. When a voltage is not applied, the part of optical retardation ( $\gamma$ ) caused by the liquid crystal layer 221 in the reflective portion is offset by the upper QWP 215. The part of optical retardation ( $\gamma$ + $\delta$ ) caused by the liquid crystal layer 221 in the transmissive portion is also offset by both the upper and lower QWPs 215 and 231. Thus, every components of the light passing through both the reflective and transmissive portions has the optical retardation of  $\lambda/2$  (at  $\lambda=550$  nm).

[0108] On the other hand, when the voltage is applied, the optical retardation ( $\gamma$ ) caused by the liquid crystal layer 221 in the reflective portion is offset by the upper QWP 215, and thus the light passing through the reflective portion has the optical retardation of zero. Moreover, the optical retardation ( $\gamma$ + $\delta$ ) caused by the liquid crystal layer 221 in the transmissive portion is also offset by both the upper and lower QWPs 215 and 231, and thus the light passing through the transmissive portion has the optical retardation of zero. Accordingly, the dark state of the transmissive LCD device can be achieved in both transmissive mode and reflective mode as described before.

[0109] After fabricating the LCD panel that has above-mentioned structure, the transmittance is measured by a simulator such as an LCD master. The results are shown in FIGS. 11A and 11B. At this time, the liquid crystal layer is ZGS-5063 ( $\Delta n=0.067$ ) that is conventionally used. A thickness of the liquid crystal layer is 2.3 micrometers. A phase difference of the reflective portion is  $\gamma=17$  nm. A phase difference of the transmissive portion is  $\omega=34.8$  nm. Thus, the phase difference in between the reflective and transmissive portions is  $\delta$  18 nm from the above-mentioned equation  $\omega=\gamma+\delta$ .

[0110] FIGS. 11A and 11B are graphs illustrating the reflectance and the transmittance, respectively, depending on the applied voltage.

[0111] Referring to FIG. 11A that shows the reflectance in the reflective mode, because of the compensation effect of both the upper QWP and the liquid crystal layer, the reflectance is about 0.27 when the voltage is not applied (i.e.,  $V_{off}=0V$ ). However, when the voltage is applied (i.e.,  $V_{on}=5V$ ), the reflectance is zero. Thus, the light is not reflected completely when the TFT is turned ON.

[0112] Referring to FIG. 11B that shows the transmittance in the transmissive mode, because of the compensation effect of the upper and lower QWPs and of the liquid crystal layer, the transmittance is about 0.32 when the voltage is not applied (i.e.,  $V_{off}=0V$ ). When the voltage is applied (i.e.,  $V_{on}=5V$ ), the transmittance is zero.

[0113] Therefore, the complete dark state of the LCD device can be achieved in both transmissive and reflective modes when the voltage is applied. From these results, the high contrast ratio can be achieved in the transmissive LCD device.

[0114] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A transmissive liquid crystal display, comprising:

upper and lower substrates facing into and spaced apart from each other, wherein the upper and lower substrates include a plurality of pixel regions that display images;

a liquid crystal layer interposed between the upper and lower substrates, wherein the liquid crystal layer has a first adjusted thickness to compensate an residual opti-



cal retardation of incident light caused by anchored liquid crystals near an alignment layer when a maximum operation voltage is applied;

an upper quarter wave plate (QWP) on the upper substrate, wherein the upper quarter wave plate has a second adjusted thickness to compensate the residual optical retardation caused by the liquid crystal layer when the maximum operation voltage is applied;

an upper polarizer on the upper quarter wave plate;

a transparent common electrode on a surface of the upper substrate facing into the lower substrate;

a pixel electrode over a first surface of the lower substrate, wherein the pixel electrode corresponds to each pixel region, and the pixel electrode is divided into transparent and reflective portions;

a lower quarter wave plate (QWP) on a second surface of the lower substrate;

a lower polarizer below the lower quarter wave plate; and

a backlight device arranged to be adjacent to the lower polarizer.

2. The transfective liquid crystal display according to claim 1, wherein the transparent portion of the pixel electrode includes a transparent electrode being disposed on a surface of the lower substrate facing into the upper substrate.

3. The transfective liquid crystal display according to claim 2, further comprising a passivation layer on the transparent electrode.

4. The transfective liquid crystal display according to claim 3, wherein the reflective portion of the pixel electrode includes a reflective electrode.

5. The transfective liquid crystal display according to claim 4, wherein the reflective electrode is disposed on the passivation layer and has a transmitting hole in a central portion.

6. The transfective liquid crystal display according to claim 1, wherein the first adjusted thickness is  $d+d_1$ , where  $d$  is a normal thickness of the liquid crystal layer and  $d_1$  is calculated using the following equation,

$$T = \sin^2 2\phi \sin^2 \left[ \frac{\pi \cdot \Delta n \cdot d_1}{\lambda} \right],$$

where  $T$  is a value of transmittance when a maximum operation voltage is applied,  $\phi$  is an angle between an optical axis of the liquid crystal layer and a transmissive axis of the polarizer,  $\Delta n$  is a birefringence of the liquid crystal layer.

7. The transfective liquid crystal display according to claim 6, wherein  $\phi$  is about 45 degrees.

8. The transfective liquid crystal display according to claim 1, wherein the second adjusted thickness of the upper QWP is  $d+d_2$ , where  $d$  is a normal thickness of the upper QWP is  $d$  and  $d_2$  is calculated from the following equation,

$$T = \sin^2 2\phi \sin^2 \left[ \frac{\pi \cdot \Delta n \cdot d_2}{\lambda} \right],$$

where  $T$  is a value of transmittance,  $\phi$  is an angle between a slow axis of the upper QWP and a transmissive axis of the polarizer,  $\Delta n$  is a birefringence of the upper QWP.

9. The transfective liquid crystal display according to claim 8, wherein  $\phi$  is about 45 degrees.

10. The transfective liquid crystal display according to claim 1, wherein a slow axis of the lower QWP is perpendicular to that of the upper QWP.

11. The transfective liquid crystal display according to claim 1, wherein the liquid crystal layer includes a homogeneous liquid crystal that is arranged in a vertical direction when a voltage is applied.

12. The transfective liquid crystal display according to claim 1, wherein the optical axis of the liquid crystal layer is parallel to the slow axis of the lower QWP.

13. The transfective liquid crystal display, comprising:

upper and lower substrates facing into and spaced apart from each other, wherein the upper and lower substrates include a plurality of pixel regions that display images;

a liquid crystal layer interposed between the upper and lower substrates, wherein the liquid crystal layer has a first adjusted thickness to compensate a residual optical retardation of incident light caused by anchored liquid crystals near an alignment layer when a maximum operation voltage is applied;

a first upper retardation film over the upper substrate;

a second upper retardation film between the first upper retardation film and the upper substrate, wherein the second upper retardation film has a second adjusted thickness of compensating an optical retardation caused by the liquid crystal layer;

an upper polarizer on the first upper retardation film;

a transparent common electrode on a surface of the upper substrate facing into the lower substrate;

a pixel electrode over the lower substrate, wherein the pixel electrode corresponds to each pixel region, and the pixel electrode is divided into transparent and reflective portions;

a second lower retardation film on the other surface of the lower substrate, wherein the second lower retardation film has a third adjusted thickness to compensate a residual optical retardation caused by the liquid crystal layer when a maximum operation voltage is applied;

a first lower retardation film under the second lower retardation film;

a lower polarizer under the first lower retardation film; and

a backlight device arranged adjacent to the lower polarizer.

14. The transfective liquid crystal display according to claim 13, wherein the transparent portion of the pixel electrode includes a transparent electrode being disposed on a surface of the lower substrate facing into the upper substrate.

15. The transfective liquid crystal display according to claim 14, further comprising a passivation layer on the transparent electrode, wherein the passivation layer has a transmitting hole in a central portion.

16. The transfective liquid crystal display according to claim 15, wherein the reflective portion of the pixel electrode includes a reflective electrode.

17. The transfective liquid crystal display according to claim 16, wherein the reflective electrode is disposed on the passivation layer and has the transmitting hole in a central portion.

18. The transfective liquid crystal display according to claim 13, wherein the first adjusted thickness is  $d+d_1$  in the reflective portion of the liquid crystal layer and  $2d+d_2$  in the transmissive portion of the liquid crystal layer, the first adjusted thickness is calculated from the following equation,

$$T = \sin^2 2\phi \sin^2 \left[ \frac{\pi \cdot \Delta n \cdot d^*}{\lambda} \right],$$

where  $d$  is a thickness of the liquid crystal layer in a reflective portion for an optical retardation of  $\lambda/4$ ,  $2d$  is a thickness of the liquid crystal layer in a transmissive portion in order for an optical retardation of  $\lambda/2$ ,  $T$  is a value of transmittance when a maximum operation voltage is applied,  $\phi$  is an angle between an optical axis of the liquid crystal layer and a transmissive axis of the polarizer,  $\Delta n$  is a birefringence of the liquid crystal layer, and  $d^*$  is a thickness of the liquid crystal layer,  $d^*$  is  $d_1$  or  $d_2$ , and  $d_1$  and  $d_2$  are calculated from the above equation,  $d_1$  is a first auxiliary thickness of the liquid crystal layer when the residual optical retardation of the light is  $\gamma$  in the reflective portion,  $d_2$  is a second auxiliary thickness of the liquid crystal layer when the residual optical retardation value of the light is  $\omega$  in the transmissive portion, and a phase difference between the transmissive and reflective portions is  $\delta = \omega - \gamma$ .

19. The transfective liquid crystal display according to claim 18, wherein  $\phi$  is about 45 degrees.

20. The transfective liquid crystal display according to claim 13, wherein the second upper retardation film has a thickness of  $d_4$  and a transmittance of  $T$ , wherein the second adjusted thickness of the second retardation film is calculated using the following equation,

$$T = \sin^2 2\phi \sin^2 \left[ \frac{\pi \cdot \Delta n \cdot d^*}{\lambda} \right],$$

where,  $T$  is equals to the value of the transmittance,  $\phi$  is an angle between a slow axis of the retardation film and a transmissive axis of the polarizer,  $\Delta n$  is a birefringence of the retardation film, and  $d^*$  is a thickness of the liquid crystal layer, wherein  $d^*$  is  $d_1$ ,  $d_2$  or  $d_3$ , wherein  $d_1$ ,  $d_2$  and  $d_3$  are calculated from the above equation and the following equation,  $d_{2(\omega)} = d_{1(\gamma)} + d_{3(\delta)}$ , where,  $d_1$  is a first auxiliary thickness of the liquid crystal layer when the residual optical retardation of the light is  $\gamma$  in the reflective portion,  $d_2$  is a second auxiliary thickness of the liquid crystal layer when the residual optical retardation of the light is  $\omega$  in the transmissive portion, and then the phase difference between the transmissive and reflective portions is  $\delta = \omega - \gamma$ , and wherein the second upper retardation film has the thickness of " $d_4 + d_{1(\gamma)}$ " for compensating the optical retardation.

21. The transfective liquid crystal display according to claim 20, wherein  $\phi$  is about 45 degrees.

22. The transfective liquid crystal display according to claim 13, wherein the second lower retardation film has the thickness of " $d_4 - d_{3(\delta)}$ " for compensating the optical retardation.

23. The transfective liquid crystal display according to claim 13, wherein the first upper and lower retardation films are half wave plates (HWPs).

24. The transfective liquid crystal display according to claim 13, wherein the second upper and lower retardation films are quarter wave plates (QWPs).

25. The transfective liquid crystal display according to claim 13, wherein the transmissive axis of the lower polarizer is perpendicular to that of the upper polarizer.

26. The transfective liquid crystal display according to claim 13, wherein the slow axis of the first upper retardation film is perpendicular to that of the first lower retardation film.

27. The transfective liquid crystal display according to claim 13, wherein the slow axis of the second upper retardation film is perpendicular to that of the second lower retardation film.

28. The transfective liquid crystal display according to claim 13, wherein the optical axis of the liquid crystal layer is parallel to the slow axis of the second lower retardation film.

29. A transfective liquid crystal display, comprising:

upper and lower substrates facing into and spaced apart from each other, wherein the upper and lower substrates include a plurality of pixel regions that display images;

an upper quarter wave plate (QWP) on the upper substrate;

an upper polarizer on the upper quarter wave plate;

a lower quarter wave plate (QWP) below the lower substrate;

a lower polarizer below the lower quarter wave plate;

a backlight device arranged to be adjacent to the lower polarizer;

a liquid crystal layer interposed between the upper and lower substrates;

a transparent common electrode on a surface of the upper substrate facing into the lower substrate;

an upper alignment layer between the transparent common electrode and the liquid crystal layer;

a pixel electrode over the lower substrate, wherein the pixel electrode corresponds to each pixel region, and the pixel electrode is divided into transparent and reflective portions; and

a lower alignment layer between the pixel electrode and the liquid crystal layer;

wherein a transmissive axis of the upper polarizer is perpendicular to a transmissive axis of the lower polarizer, a slow axis of the upper QWP is perpendicular to a slow axis of the lower QWP, the slow axis of the upper QWP forms an angle of  $45^\circ$  with the transmissive axis of the upper polarizer, an optical retardation of the upper QWP is  $\lambda/4 + \alpha$ ,  $\alpha$  ranges from zero to 100 nm,

and the slow axis of the lower QWP is parallel to an orientation direction of the liquid crystal display layer.

**30.** The transfective liquid crystal display according to claim 29, wherein an optical retardation of the liquid crystal layer is  $\lambda/4+\alpha$ .

**31.** The transfective liquid crystal display according to claim 29, wherein an optical retardation of the liquid crystal layer is different between transmissive and reflective portions, the optical retardation is  $\lambda/4+\alpha$  in the reflective portion, the optical retardation is  $\lambda/2+\beta$  in the transmissive portion, and  $\beta$  ranges from zero to 100 nm.

**32.** The transfective liquid crystal display according to claim 29, wherein an optimum value of  $\alpha$  for adjusting the optical retardation ranges from zero to 50 nm.

**33.** The transfective liquid crystal display according to claim 31, wherein an optimum value of  $\beta$  for adjusting the optical retardation ranges from zero 50 nm.

**34.** A transfective liquid crystal display, comprising:

upper and lower substrates facing and spaced apart from each other, wherein the upper and lower substrates include a plurality of pixel regions that display images;

an upper quarter wave plate (QWP) on the upper substrate;

an upper half wave plate (HWP) on the upper QWP;

an upper polarizer on the upper HWP;

a lower quarter wave plate (QWP) below the lower substrate;

a lower half wave plate (HWP) below the lower QWP;

a lower polarizer below the lower HWP;

a backlight device arranged to be adjacent to the lower polarizer;

a liquid crystal layer interposed between the upper and lower substrates;

a transparent common electrode on a surface of the upper substrate facing into the lower substrate;

an upper alignment layer between the transparent common electrode and the liquid crystal layer;

a pixel electrode over the lower substrate, wherein the pixel electrode corresponds to each pixel region, and the pixel electrode is divided into transparent and reflective portions; and

a lower alignment layer between the pixel electrode and the liquid crystal layer,

wherein a transmissive axis of the upper polarizer is perpendicular to a transmissive axis of the lower polarizer, a slow axis of the upper QWP is perpendicular to a slow axis of the lower QWP, a slow axis of the upper HWP is perpendicular to a slow axis of the lower HWP, an optical retardation of the upper QWP is  $\lambda/4+\alpha$ ,  $\alpha$  ranges from zero to 100 nm, the slow axis of the lower QWP is parallel with an orientation direction of the liquid crystal display layer, an optical retardation of the lower QWP is  $\lambda/4-\beta$ , and  $\beta$  ranges from zero to 100 nm.

**35.** The transfective liquid crystal display according to claim 34, wherein the optical retardation of the liquid crystal layer is different between transmissive and reflective portions, the optical retardation is  $\lambda/4+\alpha$  in the reflective portion, and the optical retardation is  $\lambda/2+\alpha+\beta$  in the transmissive portion.

**36.** The transfective liquid crystal display according to claim 34, wherein the slow axis of the upper HWP forms an angle of  $\theta$  with the transmissive axis of the upper polarizer.

**37.** The transfective liquid crystal display according to claim 34, wherein the slow axis of the upper QWP forms an angle of  $2\theta+45^\circ$  with the transmissive axis of the upper polarizer.

**38.** The transfective liquid crystal display according to claim 34, wherein an optimum value of  $\alpha$  ranges from zero to 50 nm for adjusting the optical retardation.

**39.** The transfective liquid crystal display according to claim 34, wherein an optimum value of  $\beta$  ranges from zero to 50 nm for adjusting the optical retardation.

\* \* \* \* \*

专利名称(译)	透反液晶显示器及其制造方法		
公开(公告)号	<a href="#">US20020041351A1</a>	公开(公告)日	2002-04-11
申请号	US09/850186	申请日	2001-05-08
[标]申请(专利权)人(译)	BAEK HEUM IL		
申请(专利权)人(译)	BAEK HEUM-IL		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	BAEK HEUM IL		
发明人	BAEK, HEUM-IL		
IPC分类号	G02F1/1333 G02F1/13363 G02F1/139 G02F1/1335		
CPC分类号	G02F1/133371 G02F1/13363 G02F1/1393 G02F2413/08 G02F2202/40 G02F2203/09 G02F2413/04 G02F2001/133638		
优先权	1020000024481 2000-05-08 KR		
其他公开文献	US6657689		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

# 摘要(译)

本发明涉及一种具有高对比度的半透半反液晶显示装置。透反液晶面板包括均匀液晶，使得透反液晶显示装置在施加电压时具有光学延迟。因此，为了补偿由该液晶引起的光学延迟，调节液晶层的厚度。此外，还调节延迟膜的厚度。因此，在液晶显示器中实现了完全的暗状态和高对比度。

FIG. 1  
(RELATED ART)

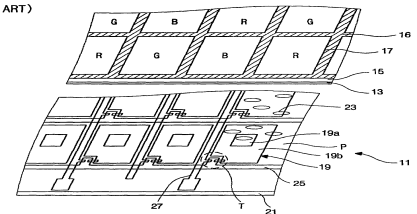


FIG. 2  
(RELATED ART)

