



US 20050030453A1

(19) **United States**

(12) **Patent Application Publication**  
**Maeda**

(10) **Pub. No.: US 2005/0030453 A1**

(43) **Pub. Date: Feb. 10, 2005**

(54) **LIQUID CRYSTAL DISPLAY DEVICE AND ELECTRONIC APPARATUS**

(52) **U.S. Cl. .... 349/114**

(75) **Inventor: Tsuyoshi Maeda, Ryuo-cho (JP)**

(57) **ABSTRACT**

Correspondence Address:  
**OLIFF & BERRIDGE, PLC**  
**P.O. BOX 19928**  
**ALEXANDRIA, VA 22320 (US)**

(73) **Assignee: SEIKO EPSON CORPORATION, Tokyo (JP)**

The invention provides a liquid crystal display device having a wide viewing angle for transmissive display and reflective display. The liquid crystal display device according to the invention can include a homeotropic liquid crystal layer interposed between a pair of substrates. The liquid crystal display device has a transmissive display area and a reflective display area in each dot area. A liquid crystal layer thickness-adjustment layer can be interposed between at least the substrate of the pair of substrates and the liquid crystal layer. The liquid crystal layer thickness-adjustment layer reduces the liquid crystal layer thickness of the reflective display area in comparison with the liquid crystal layer thickness of the transmissive display area. On the substrate opposing the substrate with the liquid crystal layer thickness-adjustment layer, protrusions protruding from the inner surface of the substrate to the liquid crystal layer are formed.

(21) **Appl. No.: 10/842,423**

(22) **Filed: May 11, 2004**

(30) **Foreign Application Priority Data**

Jun. 6, 2003 (JP) ..... 2003-162355  
Feb. 6, 2004 (JP) ..... 2004-031056

**Publication Classification**

(51) **Int. Cl.<sup>7</sup> ..... G02F 1/1335**

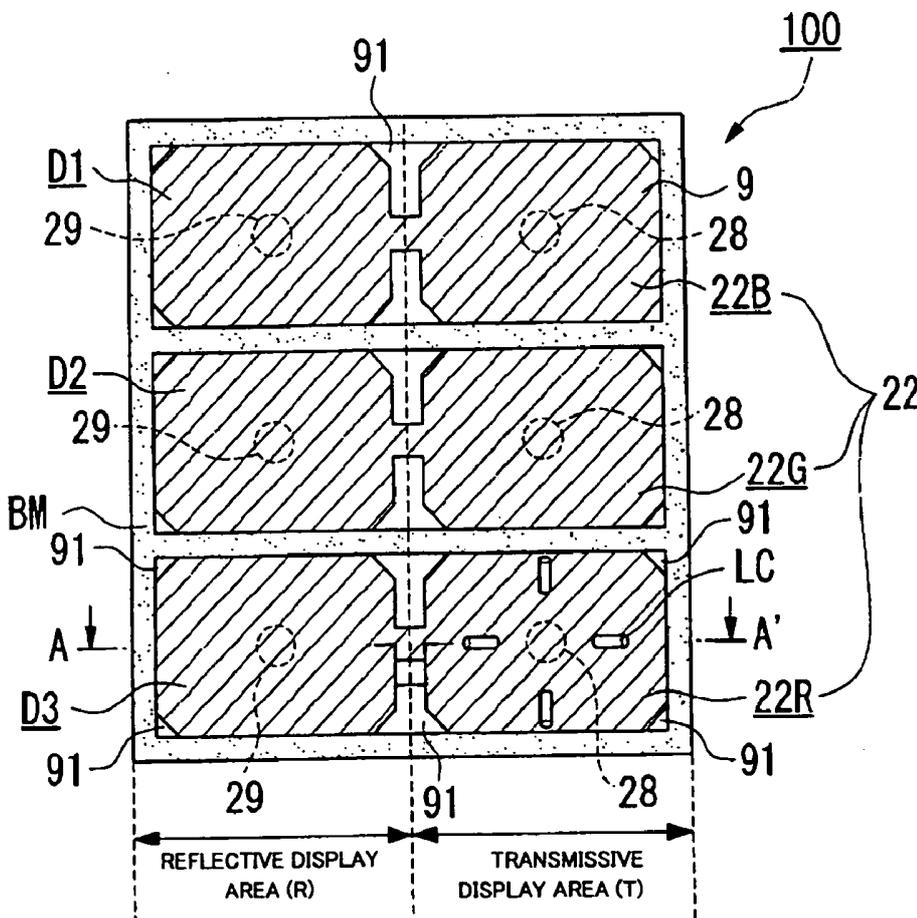


Fig. 1

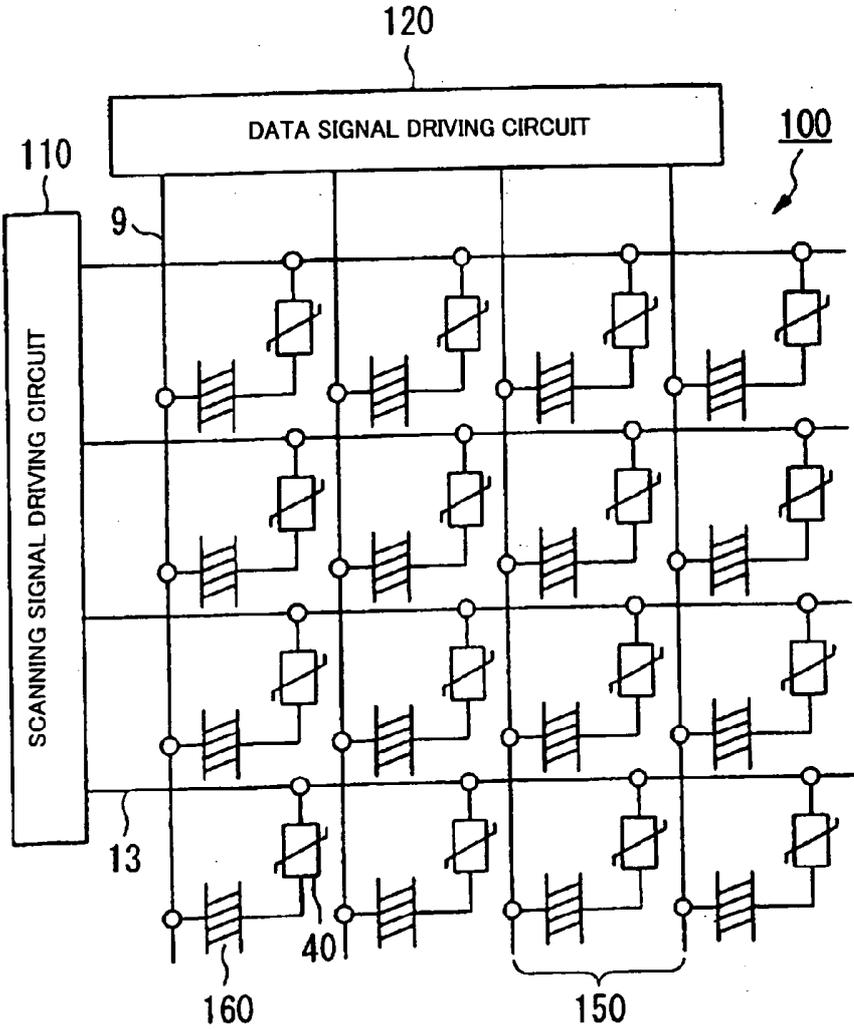


Fig. 2

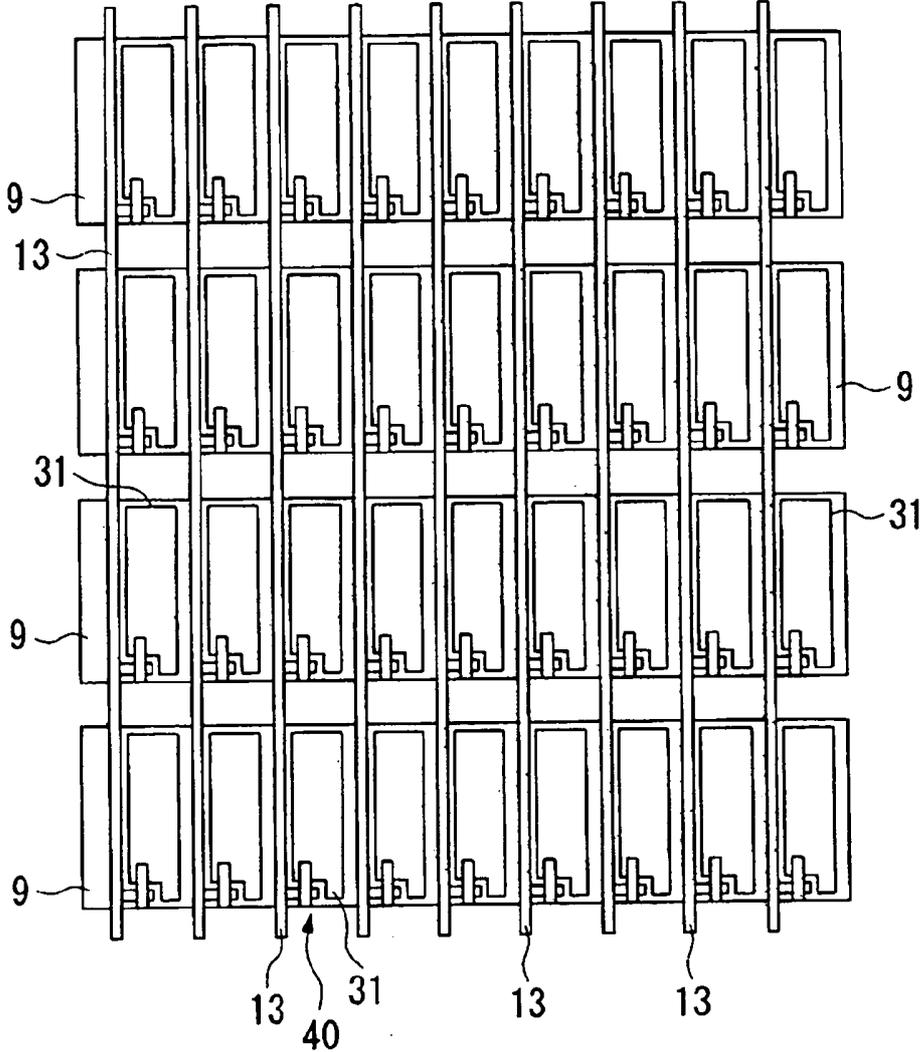




Fig. 4a

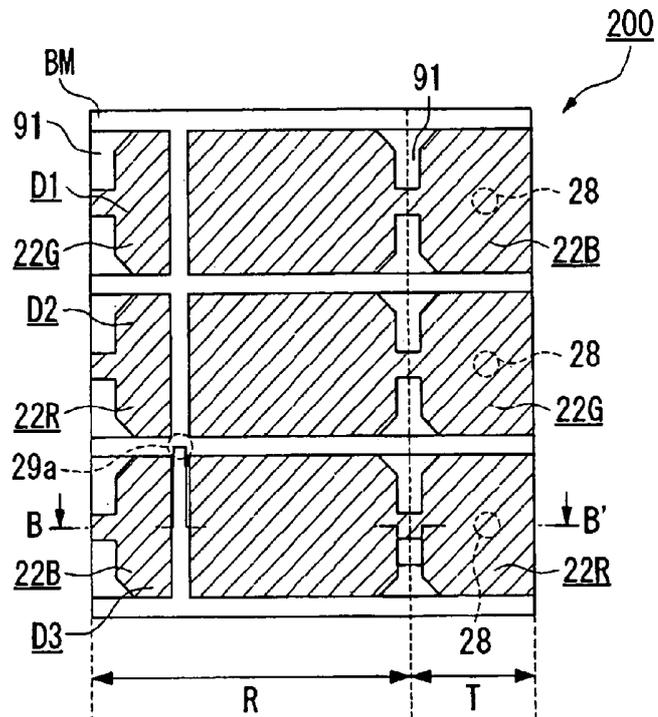


Fig. 4b

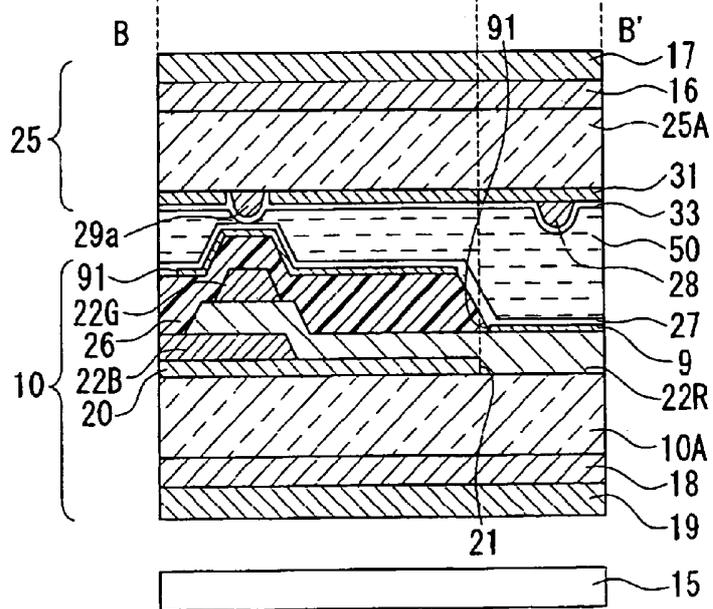




Fig. 6a

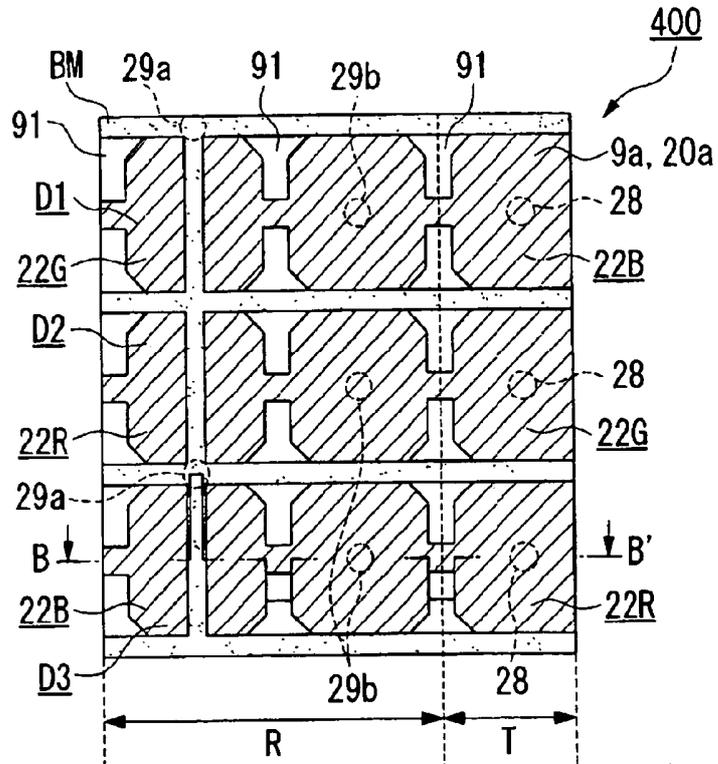


Fig. 6b

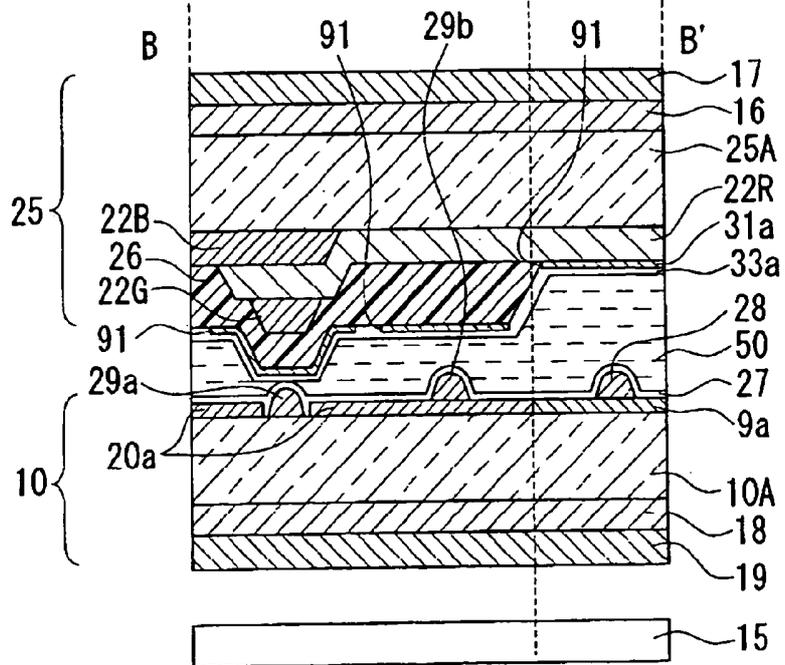


Fig. 7a

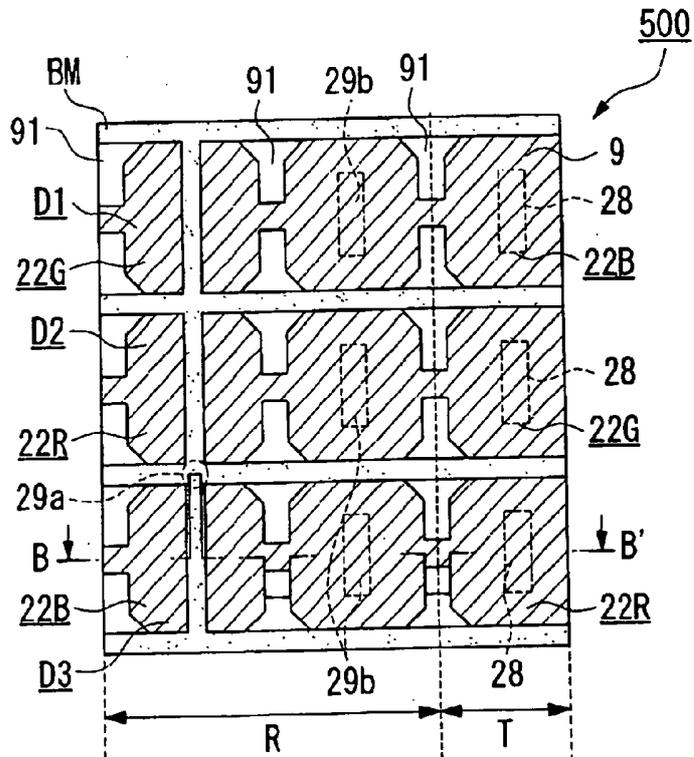


Fig. 7b


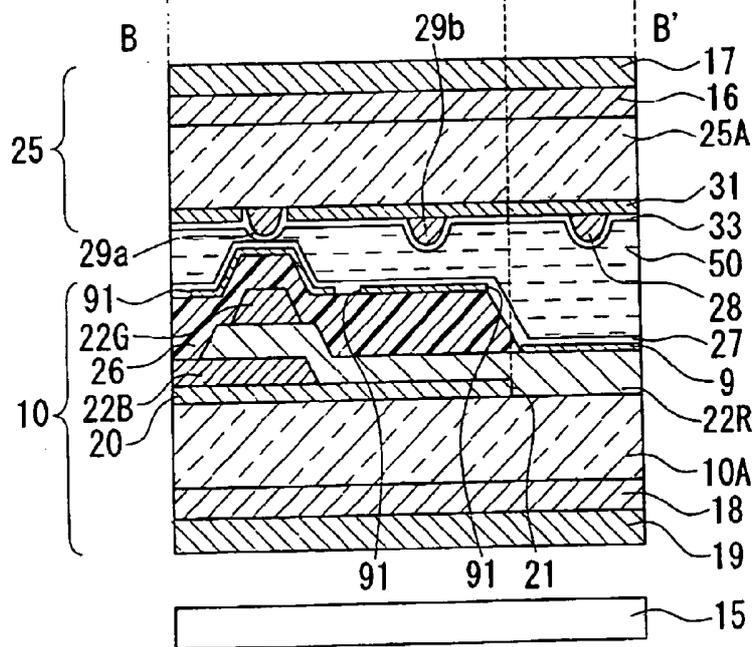


Fig. 8



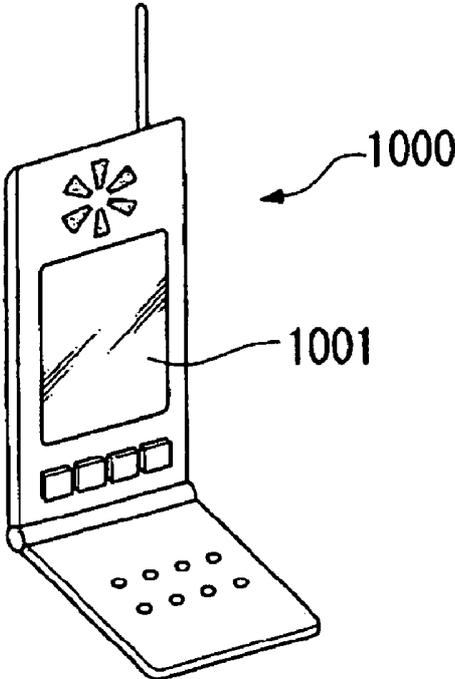

## LIQUID CRYSTAL DISPLAY DEVICE AND ELECTRONIC APPARATUS

### BACKGROUND OF THE INVENTION

#### [0001] 1. Field of Invention

[0002] The present invention relates to a liquid crystal device and an electronic apparatus. More specifically, the invention relates to a technology for obtaining a wider viewing angle for the liquid crystal display device using homeotropic liquid crystal.

#### [0003] 2. Description of Related Art

[0004] A liquid crystal device having a reflective mode and a transmissive mode is known as a transreflective liquid crystal device. Such a transreflective liquid crystal device has a liquid crystal layer interposed between an upper substrate and a lower substrate. A reflective film having a window for transmitting light through the film, composed of a metal plate, e.g., an aluminum plate, is disposed on the inner surface of the lower substrate. The reflective film functions as a transreflective plate. In such a case, in the reflective mode, the light entering from the upper substrate is transmitted through the liquid crystal layer and, then, is reflected at the reflective film on the inner surface of the lower substrate. The light passes through the liquid crystal layer again and is emitted out from the upper substrate to be used for displaying an image. In the transmissive mode, the light from the backlight enters from the lower substrate and passes through the window on the reflective film and then through the liquid crystal layer. Subsequently, the light is emitted to the outside from the upper substrate to be used for displaying an image.

[0005] Consequently, the area on the reflective film where the window is formed functions as a transmissive display area and the other areas functions as a reflective display area.

[0006] Known transreflective liquid crystal devices have a problem in which the viewing angle is small in transmissive display. This is because only one polarization plate disposed on the viewer's side can be used for reflective display because a transreflective plate is disposed on the inner surface of the liquid crystal cell to prevent parallax, causing the flexibility in the optical design of the device to become small. To solve this problem, Jisaki et al. proposed, in "Development of transreflective LCD for high contrast and wide viewing angle by using homeotropic alignment," M. Jisaki et al., *Asia Display/IDW'01*, p. 133-136 (2001), a new liquid crystal display device using homeotropic liquid crystal. This new liquid crystal display device has three characteristics:

[0007] 1) operating in a vertical alignment mode wherein liquid crystal molecules having negative dielectric anisotropy are aligned vertically relative to a substrate and, then, are tilted by applying a voltage;

[0008] 2) having a multi-gap structure wherein the thickness of the liquid crystal layer (cell gap) in the transmissive display area and in the reflective display area differ (for example, refer to Japanese Unexamined Patent Application Publication No. 11-242226);

[0009] 3) having a multi-domain structure wherein the transmissive display area is shaped as a regular octagon with a projection formed in the center of the

regular octagon on the opposing substrate so that the liquid crystal molecules tilt in eight different directions within the transmissive display area.

[0010] See also, generally, Japanese Unexamined Patent Application Publication No. 2002-350853.

### SUMMARY OF THE INVENTION

[0011] Incorporating a multi-gap structure described above in a transreflective liquid crystal display device is extremely effective for balancing the electro-optical characteristics (transmittance-voltage characteristic and reflectance-voltage characteristic) in the transmissive display area and in the reflective display area. This is because, in the transmissive display area, light passes through the liquid crystal layer only once but, in the reflective display area, light passes through the liquid crystal layer twice.

[0012] However, a great difference is created in the distance between the substrates of a liquid crystal display device having a multi-gap structure and having projections for controlling the direction of tilt of the liquid crystal molecules. This is a problem because it is difficult to form projections on the substrates where the distance between the substrates differ and it is difficult to control the height of these projections. Not being able to form the projections with a predetermined height may cause a problem in that the direction of tilt of liquid crystal molecules cannot be controlled.

[0013] The object of the invention is to provide a liquid crystal display device enabling display with a wide viewing angle by solving the above-mentioned problems by providing a transreflective liquid crystal display device using homeotropic liquid crystal in which the direction of tilt of the liquid crystal molecules can be controlled easily and accurately. Another object of the invention is to provide a simply-structured transreflective liquid crystal display device using homeotropic liquid crystal. In this way, the manufacturing efficiency of the liquid crystal display device is improved and the reliability is increased in that the number of possible defects is reduced. Another object of the invention is to provide a highly reliable electronic apparatus including the liquid crystal display device.

[0014] In order to achieve the above-mentioned object, a liquid crystal display device according to the invention can include a liquid crystal layer interposed between an upper and a lower substrate and a dot area including both a transmissive display area and a reflective display area. The liquid crystal layer is composed of liquid crystal that is vertically aligned at an initial alignment state and has negative dielectric anisotropy. Interposed between at least the lower substrate and the liquid crystal layer is a liquid crystal layer thickness-adjustment layer for reducing the thickness of the liquid crystal layer in the reflective display area in comparison with the thickness of the liquid crystal layer in the transmissive display area. On the upper substrate without the liquid crystal layer thickness-adjustment layer, protrusions protruding from the inner surface of the substrate to the liquid crystal layer are formed. In the invention, the inner surface of the substrate refers to the surface of the substrate adjacent to the liquid crystal layer. Moreover, the protrusions protruding from the surface of the substrate refers to protrusions protruding from the inner surface of the liquid crystal layer thickness-adjustment layer when there is

a liquid crystal layer thickness-adjustment layer formed on the inner surface of the substrate.

[0015] As described above, the liquid crystal display device according to the invention is a transreflective liquid crystal display using homeotropic liquid crystal. Furthermore, the liquid crystal display device has the liquid crystal layer thickness-adjustment layer for substantially equalizing the retardation in the reflective display area and the transmissive display area. In other words, the liquid crystal display device has a multi-gap structure. In this way, the alignment direction of the liquid crystal molecules is controlled effectively.

[0016] More specifically, a homeotropic liquid crystal display device tilts the liquid crystal molecules, which are vertically aligned at an initial alignment state, with respect to the substrate surface by applying an electrical field. Without inducing a pre-tilt, the turning direction of the liquid crystal molecules cannot be controlled. Thus, disarrangement (disclination) of the alignment of the liquid crystal molecules occurs, causing a failure in display such as leakage of light. As a result, the quality of the display can be reduced. Thus, in a homeotropic liquid crystal, it is important to control the alignment direction of the liquid crystal molecules when an electric field is applied.

[0017] In the liquid crystal display device according to the invention, the protrusions protruding from the inner surface of the substrate into the liquid crystal layer are formed to control the alignment direction of the liquid crystal molecules. Due to this structure, the liquid crystal molecules are vertically aligned at an initial alignment state and have a pre-tilt according to the shape of the protrusions. As a result, the direction of tilt of the liquid crystal molecules can be restricted or controlled. In this way, disarrangement (disclination) of the alignment of the liquid crystal molecules hardly occur and failures of display such as leakage of light can be prevented. Consequently, failures of display such as residual images and smear-like unevenness are suppressed, and a liquid crystal display device with a wide viewing angle is provided.

[0018] Since in the liquid crystal display device according to the invention has a multi-gap structure, the liquid crystal layer thickness of the transmissive display area is greater than that of the reflective display area. For this reason, the electro-optical characteristics (transmittance-voltage characteristic and reflectance-voltage characteristic) in the transmissive display area and the reflective display area are balanced.

[0019] Since the protrusions are formed on the substrate without the liquid crystal layer thickness-adjustment layer for the multi-gap structure, the formation of the protrusions and the setting of the height of the protrusions are easy. More specifically, since the liquid crystal layer thickness-adjustment layer on the substrate obviously causes a difference in the distance between the substrates (which forms the multi-gap structure), it is extremely difficult to form protrusions where there is a difference in the distance between the substrate. In other words, it is difficult to form the protrusions on the substrate where the distance between the substrates is small. Also the height of the protrusions may differ depending on whether they are formed on the substrate where the distance between the substrate is large or small. Contrarily, by adopting the structure of the invention, the

protrusions can be formed on a relatively flat surface. Accordingly, the above-mentioned problems do not occur and the protrusions can be formed extremely easily. Moreover, the setting of the height of the protrusions is also extremely easy.

[0020] The protrusions of the liquid crystal display device according to the invention function as a device for controlling the alignment of the liquid crystal molecules. The protrusions have inclined surfaces having a slope of a predetermined angle with respect to the inner surface of the substrate. The inclined surfaces of the protrusions enable control of the direction of the liquid crystal molecules in which they tilt along the inclined surface. The protrusions can be formed on dot areas, which are display areas. The protrusions are preferably formed on the transmissive display area instead of the reflective display area.

[0021] Electrodes for driving the liquid crystal are formed on the inner surface of the upper and lower substrates. The protrusions are formed on at least the electrodes on the inner surface of the upper substrate. In this case, an alignment film for vertically aligning the liquid crystal molecules is disposed on the inner surfaces of the protrusions and/or the electrodes. On each outer surface of the upper and lower substrates, circular polarization plates for emitting circularly polarized light into the liquid crystal layer may be disposed. As the circular polarization plates, a combination of a polarization layer and a retardation layer may be used.

[0022] The liquid crystal display device according to the invention includes the upper substrate and the lower substrate. On the outer surface of the lower substrate, a backlight for transmissive display is disposed. On the inner surface of the lower substrate, a reflective layer is disposed selectively in the reflective display area. In this case, the light from the backlight entering from the lower substrate is used for the transmissive display, and the outside light such as lighting or sunlight entering from the upper substrate is reflected at the reflective layer and used for the reflective display.

[0023] On the lower substrate with the liquid crystal layer thickness-adjustment layer, a color filter layer may be disposed. The color filter layer may be composed of a plurality of color layers in which the color layers are stacked on the areas between the dots. In this case, the stacked color layers are capable of displaying the color black. Thus, the stacked color layer can be used as a black matrix in the areas between the dots. Accordingly, it is unnecessary to form another black matrix, and the structure of the liquid crystal display device becomes simple and the production efficiency is improved.

[0024] On the inner surface of the color filter layer, the liquid crystal layer thickness-adjustment layer is disposed so that it covers the area with stacked color layers. The upper substrate without the color filter layer and the liquid crystal layer thickness-adjustment layer has second protrusions protruding from the inner surface of the substrate to the liquid crystal layer formed on at least the area opposing the area with the stacked color layers. In this case, the second protrusions function as substitutes of spaces or, in other words, as substitutes of the device for controlling the thickness of the liquid crystal layer (the distance between the substrates, i.e., the cell gap). The area with the stacked color layers protrudes into the liquid crystal layer more than the

other areas by the thickness of the stack of color layers. Therefore, when the second protrusions are formed at least on the area opposing the stacked color layers, the thickness of the liquid crystal layer is minimized in the area with the second protrusions. Consequently, the second protrusions can be used as the device for controlling the thickness of the liquid crystal layer.

[0025] The second protrusions are preferably formed in a same process as the above-mentioned protrusions (which are hereinafter referred to as the first protrusions) for controlling the direction of tilt of the liquid crystal molecules in order to improve the production efficiency. In this case, the first and the second protrusions formed in the transmissive display area and/or the reflective display area are composed of the same material. Moreover, the second protrusions have a substantially identical height as the first protrusions formed in the transmissive display area and/or the reflective display area. Since the first and the second protrusions in the transmissive display area and/or the reflective display area have a substantially identical height, the first protrusions are prevented from contacting the opposing substrate. Thus, the alignment of the liquid crystal molecules is sufficiently controlled.

[0026] An electronic apparatus according to the invention can include the above-mentioned liquid crystal display device. Such an electronic apparatus has both a transmissive mode and a reflective mode. The electronic apparatus has a display capable of displaying images with a wide viewing angle in both modes.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0027] The invention will be described with reference to the accompanying drawings, wherein like numerals refer to like elements, and wherein:

[0028] FIG. 1 is an equivalent circuit diagram of a liquid crystal display device according to a first embodiment of the present invention;

[0029] FIG. 2 is a plan view of electrodes of a liquid crystal display device illustrated in FIG. 1;

[0030] FIG. 3 is an enlarged plan view and cross-sectional view of main parts of the liquid crystal display device illustrated in FIG. 1;

[0031] FIG. 4 is an enlarged plan view and cross-sectional view of main parts of a variation of a liquid crystal display device according to a first embodiment;

[0032] FIG. 5 is an enlarged plan view and cross-sectional view of main parts of a liquid crystal display device according to a second embodiment;

[0033] FIG. 6 is an enlarged plan view and cross-sectional view of main parts of a liquid crystal display device according to a third embodiment;

[0034] FIG. 7 is an enlarged plan view and cross-sectional view of main parts of a liquid crystal display device according to a fourth embodiment;

[0035] FIG. 8 is a perspective view of an embodiment of an electronic apparatus according to the present invention; and

[0036] FIG. 9 is an enlarged plan view and cross-sectional view of main parts of a liquid crystal display device according to a fifth embodiment.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0037] Embodiments according to the invention are described below by referring to drawings. The sizes of the layers and parts depicted in the drawings do not represent the actual proportions since the sizes are altered so that the layers and parts are viewable in the drawings.

[0038] A liquid crystal display device according to this embodiment described below is an embodiment of an active matrix liquid crystal display device using a thin-film diode (TFD) as a switching element and, in particular, is a trans-reflective liquid crystal display device enabling reflective display and transmissive display.

[0039] FIG. 1 is an equivalent circuit diagram of a liquid crystal display device 100 according to this embodiment. The liquid crystal display device 100 includes a scanning signal driving circuit 110 and a data signal driving circuit 120. The liquid crystal display device 100 has signal lines, i.e., a plurality of scanning lines 13 and a plurality of data lines 9 that intersect with the scanning lines 13. The scanning lines 13 are driven by the scanning signal driving circuit 110 and the data lines 9 are driven by the data signal driving circuit 120. In each pixel area 150, a TFD element 40 and a liquid crystal display element 160 (liquid crystal layer) is serially connected between a scanning line 13 and a data line 9. In FIG. 1, the TFD element 40 is connected to the scanning line 13 and the liquid crystal display element 160 is connected to the data line 9. Contrarily, the TFD element 40 may be connected to the data line 9 and the liquid crystal display element 160 may be connected to the scanning line 13.

[0040] By referring to FIG. 2, the planar structure of electrodes included in the liquid crystal display device according to this embodiment is described. As shown in FIG. 2, the liquid crystal display device according to this embodiment has pixel electrodes 31, which are rectangular in the plan view, arranged in a matrix and connected to the scanning lines 13 via the TFD elements 40. Common electrodes 9 are arranged in a stripe pattern perpendicular to the pixel electrodes 31 and the vertical direction of the drawing. The common electrodes 9 are composed of the data lines arranged in a stripe pattern intersecting with the scanning lines 13. In this embodiment, each area with a pixel electrode 31 forms a dot area. Each of the dot areas arranged in a matrix are activated.

[0041] The TFD element 40 is a switching element connecting the scanning line 13 and the pixel electrode 31. The TFD element 40 has a MIM structure including a first conductive film essentially composed of Ta, an insulating film essentially composed of Ta<sub>2</sub>O<sub>3</sub> and disposed on the surface of the first conductive film, and a second conductive film essentially composed of Cr and disposed on the surface of the insulating film. The first conductive film of the TFD element 40 is connected to the scanning line 13, and the second conductive film is connected to the pixel electrode 31.

[0042] The pixel structure of the liquid crystal display device 100 according to this embodiment is described by

referring to FIG. 3. FIG. 3(a) illustrates the pixel structure of the liquid crystal display device 100. In particular, the drawing illustrates the planar structure of the pixel electrodes 31. FIG. 3(b) is a cross-sectional view taken along line A-A' of FIG. 3(a). The liquid crystal display device 100 according to this embodiment has dot areas including pixel electrodes 31 inside the area surrounded by the data lines 9 and the scanning lines 13, as shown in FIG. 2. As shown in FIG. 3(a), each dot area has a color layer that corresponds to one of the three primary colors. The three dot areas D1, D2, and D3 each form a pixel including a blue color layer 22B, a green color layer 22G, and a red color layer 22R.

[0043] As shown in FIG. 3(b), the liquid crystal display device 100 according to this embodiment can include a liquid crystal layer 50 interposed between an upper substrate (element substrate) 25 and a lower substrate (opposing substrate) 10. The liquid crystal layer 50 is composed of liquid crystal having molecules that are vertically aligned at an initial alignment state and have negative dielectric anisotropy.

[0044] A part of the lower substrate 10 includes an insulating film 24 interposed between a substrate body 10A composed of a transparent material, such as quartz or glass, and a reflective film 20 composed of a metal, such as silver with a high reflectance. The area with the reflective film 20 is a reflective display area R. The area without the reflective film 20, i.e., the area where an opening 21 is formed on the reflective film 20, is a transmissive display area T. The liquid crystal display device 100 according to this embodiment is a homeotropic liquid crystal display device having a homeotropic liquid crystal layer 50. Moreover, it is a transreflective liquid crystal display device capable of reflective display and transmissive display.

[0045] The insulating film 24 disposed on the substrate body 10A has a bumpy surface 24a. Accordingly, the surface of the reflective film 20 attached to the bumpy surface 24a is also bumpy. The reflected light is dispersed by the bumpy surface of the reflective film 20. In this way, light from outside is prevented from forming reflections in the reflective display and a wide viewing angle is obtained.

[0046] A color filter 22 (the red color layer 22R in FIG. 3(b)) is disposed across the reflective film 20 in the reflective display area R and on the substrate body 10A in the transmissive display area T. The periphery of the red color layer 22R is surrounded by a black matrix BM composed of chromium metal. The black matrix BM forms the borders of the dot areas D1, D2, and D3 (cf. FIG. 3(a)).

[0047] On the color filter 22, an insulating film 26 can be formed on the position corresponding to the reflective display area R. More specifically, the insulating film 26 is formed selectively above the reflective film 20 with the color filter 22 interposed therebetween. Because of the insulating film 26, the thickness of the liquid crystal layer 50 differs in the reflective display area R and the transmissive display area T. The insulating film 26 is composed of, for example, an organic acrylic resin film with a thickness of about 0.5 to 2.5 mm. The insulating film 26 has an inclined surface, in order that the film thickness gradually changes, on the border of the reflective display area R and the transmissive display area T. The thickness of the liquid crystal layer 50, without any insulating film 26 is about 1 to 5 mm. The thickness of the liquid crystal layer 50 in the reflective

display area R is about half the thickness of the liquid crystal layer 50 in the transmissive display area T.

[0048] The insulating film 26 functions as a liquid crystal layer thickness-adjustment layer (liquid crystal layer thickness-controlling layer) for varying the thickness of the liquid crystal layer 50 in the reflective display area R and the transmissive display area T. In this embodiment, the edge of the flat surface of the upper surface of the insulating film 26 and the edge of the reflective film 20 (reflective display area) substantially match. Thus, the inclined surface is partly or entirely included in the transmissive display area T.

[0049] On the surface of the lower substrate 10 including the surface of the insulating film 26, common electrodes 9 composed of indium tin oxide (ITO) are disposed. On the common electrodes 9, an alignment film 27 composed of polyimide is disposed. The alignment film 27 functions as a homeotropic alignment film for aligning the liquid crystal molecules vertically relative to the film surface. Alignment processing, such as rubbing is not performed on the alignment film 27. In FIG. 3, the common electrodes 9 are formed in a stripe pattern in which the stripes extend in the longitudinal direction of the drawing. Each of the common electrodes 9 are used for each of the dot areas arranged in a row in the longitudinal direction of the drawing. The common electrodes 9 have slits 91 formed by cutting off parts of the common electrodes 9. In this embodiment, the reflective film 20 and the common electrodes 9 are formed separately before they are stacked. In the reflective display area R, however, the reflective film composed of a metal film may be used as part of the common electrodes.

[0050] In the upper substrate 25, a matrix of the pixel electrodes 31 composed of an ITO transparent conductive film is disposed on the inner surface (adjacent to the liquid crystal layer) of the substrate body 25A composed of a transparent material such as glass or quartz. On the pixel electrodes 31, protrusions 28 and 29 composed of a dielectric material are formed. More specifically, the protrusions 28 and 29 are formed on the inner surface (adjacent to the liquid crystal layer) of the pixel electrodes 31 in the transmissive display area T and the reflective display area R, respectively. Moreover, on the pixel electrodes 31 including the protrusions 28 and 29, a homeotropic alignment film 33, similar to the one on the lower substrate 10 composed of polyimide, is disposed.

[0051] The outer surface (not adjacent to the liquid crystal layer 50) of the lower substrate 10 has a retardation plate 18 and a polarization plate 19. Also, the outer surface of the upper substrate 25 has a retardation plate 16 and a polarization plate 17. In this way, circularly-polarized light enters the inner surface (adjacent to the liquid crystal layer 50) of the substrate. The combinations of the retardation plate 18 and the polarization plate 19, and the retardation plate 16 and the polarization plate 17 each function as a circularly-polarization plate. The polarization plate 17 (19) transmits only linearly-polarized light polarized in a predetermined direction. The retardation plate 16 (18) can be a  $\lambda/4$  retardation plate. On the outer surface of the polarization plate 19 on the lower substrate 10, a backlight 15 is formed as a light source for transmissive display.

[0052] In the liquid crystal display device 100 according to this embodiment, the protrusions 28 and 29 composed of dielectric material can be formed on the inner surface

(adjacent to the liquid crystal layer) of the electrode. The protrusions **28** and **29** can control the alignment of the liquid crystal molecules of the liquid crystal layer **50** or, in other words, can control the direction of tilt of the liquid crystal molecules vertically aligned at an initial alignment state when a voltage is applied to the electrodes. In **FIG. 3**, on the inner surface (adjacent to the liquid crystal layer) of the pixel electrodes **31** disposed on the inner surface of the upper substrate **25**, the protrusions **28** and **29** are formed on the transmissive display area T and the reflective display area R, respectively.

[**0053**] Each protrusion **28** and **29** is a generally circular cone or a polygonal pyramid protruding from the inner surface of the upper substrate **25** (main surface of the electrodes) to the inner part of the liquid crystal layer **50**. The protrusions **28** and **29** have an inclined surface (including a mildly curved surface) having a slope of a predetermined angle with respect to the inner surface of the substrate (the main surface of the electrode) for controlling the direction of tilt of the liquid crystal molecules LC along the inclined surface.

[**0054**] The common electrodes **9** disposed on the inner surface of the lower substrate **10** have slits **91** formed by cutting off parts of the common electrodes **9**. These slits **91** generate a distorted electric field between the electrodes **9** and **31** in the area where the slits are formed. According to the distorted electric field, the direction of tilt of the liquid crystal molecules vertically aligned at an initial alignment state when a voltage is applied is controlled. As shown in **FIG. 3(a)**, the slits **91** of the common electrodes **9** surround the protrusions **28** and **29** formed on the pixel electrodes **31**. As a result, the direction of tilt of the liquid crystal molecules LC are controlled so that the liquid crystal molecules are arranged in a radial pattern around the protrusions **28** and **29**.

[**0055**] The liquid crystal display device **100** described above have the advantages described below.

[**0056**] In general, when a voltage is applied to liquid crystal molecules having negative dielectric anisotropy aligned on an unrubbed homeotropic alignment film, since the direction of the liquid crystal molecules is not controlled, the liquid crystal molecules tilt in random directions and, thus, the molecules fail to align. In this embodiment, however, the protrusions **28** and **29** are formed on the inner surface of the pixel electrodes **31** and, in addition, the slits **91** are formed to planarly surround the common electrodes **9**. In this way, the direction of tilt of the liquid crystal molecules vertically arranged at an initial alignment state are controlled by the inclined surface of the protrusions **28** and **29** and/or by the distorted electric field generated by the slits **91**. Consequently, disclination due to alignment failure of the liquid crystal molecules is prevented. In this way, a high quality image, which does not have any residual images caused by disclination and smear-like unevenness that appear when viewed from an oblique direction, can be obtained.

[**0057**] The liquid crystal display device **100** has a multi-gap structure since the reflective display area R is formed on the insulating film **26**. More specifically, the thickness of the liquid crystal layer **50** in the reflective display area R is substantially half the thickness of the liquid crystal layer **50** in the transmissive display area T. In this way, the retardation

of the reflective display is substantially equal to the retardation of the transmissive display. As a result, the contrast of the display can be improved.

[**0058**] Since the protrusions **28** and **29** are formed on the upper substrate **25** and not on the lower substrate **10** having the insulating film **26** making up the multi-gap structure, forming the protrusions **28** and **29** and setting their height is easy.

[**0059**] In other words, the surface of the lower substrate **10** adjacent to the liquid crystal layer **50** including the insulating film **26** has a difference in thickness, which forms the multi-gap structure. Forming the protrusions **28** and **29** on the portion where the thickness is small is extremely difficult. This difference in thickness may cause a difference in height of the protrusions **28** and **29**, which are each formed on a portion with different thicknesses. Contrarily, as in this embodiment, by forming the protrusions **28** and **29** on the substrate without the insulating film **26**, the protrusions **28** and **29** can be formed on a relatively flat surface. In this way, the above-mentioned problems concerning the formation of the protrusions **28** and **29** do not occur. Thus, the protrusions **28** and **29** can be formed extremely easily and their height can be set extremely easily.

[**0060**] The protrusion **28** on the transmissive display area T can be formed so that the height is relatively larger than the height of the protrusion **29**. Since the thickness of the liquid crystal layer of the transmissive display area T is relatively larger than that of the reflective display area R due to the multi-gap structure, in the transmissive display area T, the alignment of the liquid crystal molecules must be controlled with even greater force. Therefore, it is desirable to set the height of the protrusions as described above.

[**0061**] A liquid crystal display device **200** according to a second embodiment is described below by referring to a drawing. **FIG. 4** illustrates a liquid crystal display device **200** according to a second embodiment wherein **FIG. 4(a)** is a plane view and **FIG. 4(b)** is cross-sectional view. **FIG. 4** is equivalent to **FIG. 3** illustrating the first embodiment. The basic structure of the liquid crystal display device **200** according to the second embodiment is substantially the same as the liquid crystal display device **100** illustrated in **FIG. 3** except that the structure of the color filter differs. Therefore, for the parts in **FIG. 4** that are indicated by the same reference numerals that were used in **FIG. 3** are the same as those in **FIG. 3** unless otherwise specified and their descriptions are omitted.

[**0062**] The liquid crystal display device **200** according to the second embodiment is an active matrix transreflective liquid crystal display device including a TFD as a switching element. The liquid crystal display device **200** includes a liquid crystal layer **50** interposed between an upper substrate (element substrate) **25** and a lower substrate (opposing substrate) **10**. The liquid crystal layer **50** is composed of a liquid crystal having molecules that are vertically aligned at an initial alignment state and have negative dielectric anisotropy.

[**0063**] A part of the lower substrate **10** includes a substrate body **10A** composed of a transparent material, such as quartz or glass, and a reflective film **20** composed of a metal, such as aluminum and silver, with a high reflectance. The reflective film **20** is formed in a predetermined pattern or, in other

words, formed selectively on a reflective display area R. The lower substrate **10** also has a bumpy surface similar to the structure of the first embodiment formed of an insulating film **24** interposed between the substrate body and the reflective film.

[0064] On the reflective film **20** selectively formed on the reflective display area R and on the substrate body **10A** of the transmissive display area T, a color filter **22** (**22R**, **22G**, and **22B**) is disposed across the reflective display area R and the transmissive display area T. The color filter **22** includes color layers **22R**, **22G**, and **22B** that are red, green, and blue, respectively. The color layers **22R**, **22G**, and **22B** make up dot areas D1, D2, and D3, respectively (cf. FIG. 4(a)).

[0065] In this embodiment, a black matrix BM forming the borders of the dot areas D1, D2, and D3 is not composed of the generally-used chromium metal, but instead is composed of a stack of the color layers **22R**, **22G**, and **22B**. More specifically, the color layers **22R**, **22G**, and **22B** are stacked in the areas between dots adjacent to the reflective display area R. The stacked layers display a black color. As a result of stacking the color layers, the thickness of the color filter **22** in the areas between dots becomes larger.

[0066] Covering the stacked color layers **22R**, **22G**, and **22B** in the color filter **22** is an insulating film **26** functioning as a liquid crystal layer thickness-adjustment layer disposed across the reflective display area R. On the surface of the lower substrate **10** including the surface of the insulating film **26**, common electrodes **9** composed of ITO are disposed. On the common electrodes **9**, a homeotropic alignment film **27** composed of polyimide is disposed. As a result of stacking the color layers **22R**, **22G**, and **22B**, as described above, the color filter **22** protrudes into the liquid crystal layer **50** by the thickness of the stack of color layers. The insulating film **26** disposed on the color filter **22** also has protrusions having the same shape as the color filter **22**. The common electrode **9** has slits **91** formed by cutting off portions of the electrodes.

[0067] In the upper substrate **25**, on the inner surface of the substrate body **25A** composed of a transparent material, such as glass or quartz, a matrix pixel electrodes **31** composed of transparent conductive film such as ITO and an alignment film **33** composed of a material such as polyimide having a homeotropic alignment as same as the lower substrate **10** are disposed. Similar to the first embodiment, the pixel electrodes **31** in the transmissive display area T has protrusions **28** protruding from the inner surface of the electrode to the liquid crystal layer **50**. Also, in the area between dots, protrusions **29a** protrude from the inner surface of the substrate body **25A** to the liquid crystal layer **50** in the area corresponding to the area where the insulating film **26** protrudes. The protrusions **29a** are formed of the same material as the protrusion **28** in the transmissive display area T and have substantially the same height as the protrusions **28**.

[0068] In the liquid crystal display device **200** according to the invention, the protrusions **29a** protrude from the substrate body **25A** in the upper substrate **25** to the liquid crystal layer **50** and oppose the area defined by disposing the insulating film **26** on stacked color layers **22R**, **22G**, **22B** in the lower substrate **10**. The protrusions **29a** function to control the thickness of the liquid crystal layer **50** (in place of spacers). More specifically, the area with the stacked color

layers **22R**, **22G**, **22B** protrudes from the other areas to the liquid crystal layer **50** by the thickness of the stack of color layers. The insulating film **26** is disposed on the stacked color layers. The thickness of the liquid crystal layer in the area provided with the protrusions **29a** is almost zero. As a result, the protrusions **29a** can define the thickness of the liquid crystal layer. Thus, the thickness of the liquid crystal layer can be maintained uniformly on the surface without disposing spacers. The protrusions **29** are formed by the same process as the protrusions **28** formed on the transmissive display area T for improving the efficiency of production. The protrusions **29a** have the same height as the protrusions **28**.

[0069] In addition to the advantages of the liquid crystal display device **100** according to the first embodiment, the liquid crystal display device **200** described above has the advantages of improved production efficiency and reduced production costs since the black matrix BM is formed without using chromium metal. Moreover, the problem of environmental destruction caused by disposition of chromium metal can be prevented. Furthermore, since the thickness of the liquid crystal layer can be controlled without using spacers, the production efficiency can be improved and production costs can be reduced. In the lower substrate **10**, in addition to the insulating film **26**, color layers **22R**, **22G**, **22B** are stacked. Therefore, the difference in the thickness of the lower substrate **10** becomes greater. By forming protrusions **28** and **29a** on the upper substrate **25** such as described in this embodiment the production efficiency and the setting of the height of the protrusions becomes even easier.

[0070] The liquid crystal display device according to the second embodiment was described above. Structures such as the one illustrated in FIG. 5 may be added. More specifically, the embodiment described above only has the protrusions **28** in the transmissive display area T. In the liquid crystal display device **300** illustrated in FIG. 5, however, protrusions **29b** are formed in a reflective display area R to control the direction of tilt of the liquid crystal molecules. The protrusions **29b** formed in the reflective display area R are preferably formed so that they have substantially the same height as the protrusions **29a** formed in the area between dots. In this way, the problem of the protrusions **29b** touching the inner surface of the opposite substrate can be prevented. As a result, the alignment of the liquid crystal molecules can be controlled accurately.

[0071] A liquid crystal display device according to a third embodiment is described by referring to a drawing. FIG. 6 illustrates a liquid crystal display device **400** according to a third embodiment, wherein FIG. 6(a) is a plane view and FIG. 6(b) is cross-sectional view. FIG. 6 is equivalent to FIGS. 4 and 5 illustrating the second embodiment. The basic structure of the liquid crystal display device **400** according to the third embodiment is substantially the same as the liquid crystal display device **200** illustrated in FIG. 4 and the liquid crystal display device **300** illustrated in FIG. 5 except that, in comparison with the second embodiment, a color filter **22** including color layers **22R**, **22G**, and **22B** and an insulating film **26** are disposed on an upper substrate **25** and protrusions **28**, **29a**, and **29b** are formed on a lower substrate **10**. Therefore, for the parts in FIG. 6 that are indicated by the same reference numerals that were used in FIGS. 4 and 5 are the same as those in FIGS. 4 and 5 unless otherwise specified and their descriptions are omitted.

[0072] As shown in FIG. 6, the liquid crystal display device 400 according to the third embodiment is an active matrix transreflective liquid crystal display device including a thin-film transistor (TFT) as a switching element. The liquid crystal display device 400 includes a liquid crystal layer 50 interposed between a lower substrate (element substrate) 10 and an upper substrate (opposing substrate) 25. The liquid crystal layer 50 is composed of a liquid crystal having molecules that are vertically aligned at an initial alignment state and have negative dielectric anisotropy.

[0073] A part of the lower substrate 10 includes a substrate body 10A and a reflective film 20a composed of a metal, such as aluminum or silver, with a high reflectance on the substrate body 10A. The reflective film 20a is formed in a predetermined pattern or, in other words, formed selectively on a reflective display area R. In the area without the reflective film 20a, i.e., a transmissive display area T, transparent electrodes 9a are formed with a predetermined pattern. The reflective film 20a and the transparent electrodes 9a are combined to form a matrix of pixel electrodes.

[0074] On the reflective film 20a and the transparent electrodes 9a forming the pixel electrodes, protrusions 28, 29a, and 29b are formed in the transmissive display area T, the reflective display area R, and the area between dots, respectively. The protrusions 28, 29a, and 29b are structured as same as the above-mentioned second embodiment. On the reflective film 20a and the transparent electrodes 9a including the protrusions 28, 29a, and 29b, a homeotropic alignment film 27 is disposed.

[0075] On the upper substrate 25, the color filter 22 including an area formed by stacking color layers 22R, 22G, 22B onto the surface of a substrate body 25A is disposed. On the color filter 22, an insulating film 26 functioning as a liquid crystal layer thickness-adjustment layer and a common electrodes 31a covering the entire surface are disposed. Slits 91 are formed on the common electrodes 31a by cutting off portions of the electrodes to generate a distorted electric field. On the common electrodes 31a, a homeotropic alignment film 33a is disposed.

[0076] In this embodiment, the black matrix BM composed of the stacked color layers 22R, 22G, 22B is disposed in the area between dots of the color filter 22 between the pixel electrodes. More specifically, in the areas between the dots adjacent to the reflective display area R, the color layers 22R, 22G, and 22B are stacked. The stacked layers display a black color. As a result of stacking the color layers, the thickness of the color filter 22 in the areas between dots becomes larger. The protrusions 29a function to control the thickness of the liquid crystal layer, and the protrusions 28, and 29b function to control the direction of tilt of the liquid crystal molecules turn.

[0077] As described above, the liquid crystal display device 400 according to the third embodiment having the color filter 22 including the black matrix composed of the stacked color layers 22R, 22G, 22B in the upper substrate 25 can also have the advantages of the liquid crystal display device 100 according to the first embodiment and the liquid crystal display devices 200 and 300 according to the second embodiment.

[0078] A liquid crystal display device according to a fourth embodiment is described below by referring to a

drawing. FIG. 7 illustrates a liquid crystal display device 500 according to a fourth embodiment wherein FIG. 7(a) is a plane view and FIG. 7(b) is cross-sectional view. FIG. 7 is equivalent to FIGS. 4 and 5 illustrating the second embodiment. The basic structure of the liquid crystal display device 500 according to the fourth embodiment is substantially the same as the liquid crystal display devices 200 and 300 illustrated in FIGS. 4 and 5 except that the shape of the protrusions formed for controlling the alignment of the liquid crystal molecules differs. Therefore, for the parts in FIG. 7 that are indicated by the same reference numerals that were used in FIGS. 4 and 5 are the same as those in FIGS. 4 and 5 unless otherwise specified, and their descriptions are omitted.

[0079] As shown in FIG. 7, in the liquid crystal display device 500 according to this embodiment, protrusions 28, and 29b for controlling the alignment of the liquid crystal molecules are formed linearly on dot areas, which are display areas. More specifically, in the first to third embodiments, the protrusions for controlling the direction of tilt of the liquid crystal molecules were shaped as cones or polygonal pyramids. In this embodiment, however, projections extending linearly within each of the dots control the direction of tilt of the liquid crystal molecules. In this case, the alignment of the liquid crystal molecules can be controlled even more effectively.

[0080] A liquid crystal display device according to a fifth embodiment is described below by referring to a drawing. FIG. 9 illustrates a liquid crystal display device 600 according to a fifth embodiment wherein FIG. 9(a) is a plane view and FIG. 9(b) is cross-sectional view. FIG. 9 is equivalent to FIG. 3 illustrating the first embodiment. The basic structure of the liquid crystal display device 600 according to the fifth embodiment is substantially the same as the liquid crystal display device 100 illustrated in FIG. 3 except that the structures of a switching element and a pixel electrode differ. Therefore, for the parts in FIG. 9 that are indicated by the same reference numerals that were used in FIG. 3 are the same as those in FIG. 3 unless otherwise specified and their descriptions are omitted.

[0081] The liquid crystal display device 600 according to the fifth embodiment is an active matrix transreflective liquid crystal display device including a thin-film transistor (TFT) as a switching element. The liquid crystal display device 600 includes a liquid crystal layer 50 interposed between a lower substrate (element substrate) 610 and an upper substrate (opposing substrate) 625. The liquid crystal layer 50 is composed of a liquid crystal having molecules that are vertically aligned at an initial alignment state and have negative dielectric anisotropy.

[0082] A lower substrate 610 includes a substrate body 10A composed of a transparent material, such as quartz or glass. Also, similar to the first embodiment, an insulating film (liquid crystal layer thickness-adjustment layer) 26 is selectively disposed in the area corresponding to a reflective display area R. In this way, the thickness of the liquid crystal layer 50 differs in the reflective display area R and a transmissive display area T. The inner surface of the insulating film 26 has a bumpy surface 26a.

[0083] On the inner surface of the insulating film 26 having the bumpy surface 26a, a reflective film 620 is selectively disposed. The area of the reflective film 620 is the

reflective display area R, and the area without the reflective film 620, i.e., the opening on the reflective film 620, is the transmissive display area T. The reflective film 620 is attached to the bumpy surface 26a of the reflective film 20 and, accordingly, has a bumpy surface. Consequently, light from outside is prevented from forming reflections in the reflective display and a wide viewing angle is obtained.

[0084] On the inner surface of the substrate body 10A in the transmissive display area T, electrodes 609 composed of indium tin oxide are formed. The electrodes 609 are selectively formed in the transmissive display area T and are electrically connected to the reflective films 620 in the reflective display area R (cf. FIG. 9(a)). On the inner surface of the lower substrate 610 of this embodiment, the electrodes 609 composed of indium tin oxide are disposed in the transmissive display area T, and the reflective film 620 composed of a metal such as aluminum with a high reflectance is disposed in the reflective display area R. The electrodes 609 and the reflective film 620 form a matrix of pixel electrodes. The pixel electrodes composed of the electrodes 609 and the reflective film 620 have slits 91 on the electrodes 609 in the transmissive display area T and on the border of the electrodes 609 and the reflective film 620.

[0085] On the inner surface of the pixel electrodes 609 composed of the electrodes 609 and the reflective film 620, an alignment film 27 composed of polyimide is disposed. The alignment film 27 functions as a homeotropic alignment film for vertically aligning the liquid crystal molecules with respect to the film surface. Alignment processing such as rubbing is not performed on the alignment film 27.

[0086] The upper substrate 625 has a substrate body 25A composed of a transparent material such as quartz or glass. On the inner surface of the substrate body 25A, a color filter 22 is disposed. Then, on the entire inner surface of the color filter 22, common electrodes 631 are disposed. On the inner surface of the common electrodes 631, an alignment film 33 composed of a material such as polyimide is disposed. The alignment film 33 functions as a homeotropic alignment film for vertically aligning the liquid crystal molecules relative to the film surface. Alignment processing such as rubbing is not performed on the alignment film 33.

[0087] On the inner surface of the common electrode 631, protrusions 28 protruding from the inner surface of the electrodes to the liquid crystal layer 50 are formed in the transmissive display area T. More specifically, as shown in FIG. 9(a), the protrusions 28 are formed in the center of the area surrounded by substantially rectangular slits 91. On the inner surface of the substrate body 25A of the upper substrate 625, spacers (not shown in the drawing) formed together with the protrusions 28 are disposed outside the pixel areas. In this embodiment, the height of the protrusions 28 and the spacers are substantially the same. Therefore, both the protrusions 28 and the spacers can be formed from protrusions composed of dielectric material, such as resin in a single photo-process.

[0088] In this way, the protrusions 28 in the pixel areas function to control the direction of tilt of the liquid crystal molecules when an electrical voltage is applied so that the molecules align along the inclined surface of the protrusions. The spacers disposed outside the pixel areas function as means for controlling the liquid crystal layer thickness (liquid crystal cell thickness). In this way, the generation of

disclination and smear-like unevenness that appear when the liquid crystal display device is viewed from an oblique direction can be prevented or suppressed. In this embodiment, a plurality of protrusions is formed on the substrate opposing the substrate including the insulating film 26. The protrusions in the pixel area are the protrusions 28 for controlling the alignment of the liquid crystal molecules. On the other hand, the protrusions in areas except the pixel areas are spacers for controlling the thickness of the liquid crystal layer. In this way, the production efficiency can be improved. As described in the second embodiment, the protrusions 28 may be formed in the reflective display area R to control the alignment of the liquid crystal molecules.

[0089] Subsequently, an embodiment of an electronic apparatus having a liquid crystal display device of an above-mentioned embodiment according to the invention is described.

[0090] FIG. 8 is a perspective view of an embodiment of a cellular phone. In FIG. 8, the reference numerals 1000 and 1001 indicate a cellular phone body and a display including the liquid crystal display device, respectively. Such an electronic apparatus has a display including the liquid crystal display device according to an above-mentioned embodiment. Therefore, an electronic apparatus including a liquid crystal display with high brightness and contrast and with a wide viewing angle, regardless of the environment, may be produced.

[0091] Embodiments of the invention have been described above. The technical scope of the invention, however, is not limited to the above-mentioned embodiments and may be modified in various ways to an extent that does not deviate from the object of the present invention. For example, in the above-mentioned embodiments, the retardation plate was formed of a single plate. The retardation plate, however, may be formed by layering a 1/2 wavelength plate and a 1/4 wavelength plate. The layered plates function as a wide-range circular polarization plate for achromatizing the black display. The shapes of the protrusions and the electrode slits formed in the embodiments are not limited to the shapes of the above-mentioned embodiments. Any type of protrusion or slit may be acceptable providing that the direction of tilt of the vertically aligned liquid crystal molecules can be controlled.

[0092] As described above, while this invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications, and variations will be apparent to those skilled in the art. Accordingly, preferred embodiments of the invention as set forth herein are intended to be illustrative, not limiting. There are changes that may be made without departing from the spirit and scope of the invention.

What is claimed is:

1. A liquid crystal display device, comprising:

a liquid crystal layer interposed between a first substrate and a second substrate; and

a dot area including a transmissive display area and a reflective display area,

the liquid crystal layer being composed of liquid crystal vertically aligned at an initial alignment state and having negative dielectric anisotropy,

a liquid crystal layer thickness-adjustment layer being disposed between at least the first substrate and the liquid crystal layer that reduces a thickness of the liquid crystal layer in the reflective display area in comparison with a thickness of the liquid crystal layer in the transmissive display area, and

the second substrate without the liquid crystal layer thickness-adjustment layer having protrusions protruding from an inner surface of the second substrate to the liquid crystal layer.

2. The liquid crystal display device according to claim 1, the protrusions serving as an alignment controlling device that controls an alignment of the liquid crystal molecules, and the protrusions having inclined surfaces with a slope of a predetermined angle with respect to the inner surface of the second substrate.

3. The liquid crystal display device according to claim 1, electrodes that drive liquid crystal molecules being disposed on inner surface of the first and second substrates and the protrusions being disposed on a surface, adjacent to the liquid crystal layer, of at least the second electrodes.

4. The liquid crystal display device according to claim 3, an alignment film that vertically aligns the liquid crystal molecules being disposed adjacent to the liquid crystal layer over inner surfaces of the protrusions and electrodes.

5. The liquid crystal display device according to claim 1, circular polarization plates that emit circularly polarized light into a liquid crystal layer being disposed on outer surfaces of the first and second substrates.

6. The liquid crystal display device according to claim 1, the first and second substrates being a lower substrate and an upper substrate, a backlight for transmissive display being disposed on an outer surface of the lower substrate and a reflective layer being selectively formed on an inner surface of the lower substrate in the reflective display area.

7. The liquid crystal display device according to claim 1, a color filter layer being disposed on the first substrate surface with the liquid crystal layer thickness-adjustment layer, the color filter including a plurality of color layers stacked in areas between dots.

8. The liquid crystal display device according to claim 7, the liquid crystal layer thickness-adjustment layer being disposed on an inner surface of the color filter layer on the first substrate to cover an area formed by the stacked color layers, and second protrusions protruding from the second substrate to the liquid crystal layer, the second substrate being the substrate without the color filter and the liquid crystal layer thickness-adjustment layer in an area opposing the area formed by the stacked color layers.

9. The liquid crystal display device according to claim 8, the protrusions and second protrusions being composed of a same material.

10. The liquid crystal display device according to claim 9, the first protrusions and the second protrusions having a substantially identical height.

11. An electronic apparatus comprising the liquid crystal display device according to claim 1.

\* \* \* \* \*

专利名称(译)	液晶显示装置和电子设备		
公开(公告)号	<a href="#">US20050030453A1</a>	公开(公告)日	2005-02-10
申请号	US10/842423	申请日	2004-05-11
[标]申请(专利权)人(译)	精工爱普生株式会社		
申请(专利权)人(译)	SEIKO EPSON CORPORATION		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	MAEDA TSUYOSHI		
发明人	MAEDA, TSUYOSHI		
IPC分类号	G02F1/1333 G02F1/1335 G02F1/1337 G02F1/139		
CPC分类号	G02F1/133371 G02F1/1393 G02F1/133707 G02F1/133555		
优先权	2003162355 2003-06-06 JP 2004031056 2004-02-06 JP		
其他公开文献	US7277146		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

本发明提供一种具有宽视角的液晶显示装置，用于透射显示和反射显示。根据本发明的液晶显示装置可包括插入在一对基板之间的垂直液晶层。液晶显示装置在每个点区域中具有透射显示区域和反射显示区域。液晶层厚度调节层可以插入至少一对基板的基板和液晶层之间。与透射显示区域的液晶层厚度相比，液晶层厚度调节层减小了反射显示区域的液晶层厚度。在与具有液晶层厚度调节层的基板相对的基板上，形成从基板的内表面突出到液晶层的突起。

