



US 20050110739A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0110739 A1**
(43) **Pub. Date: May 26, 2005**
Kwon(54) **METHOD OF DRIVING GATES OF LIQUID CRYSTAL DISPLAY**(30) **Foreign Application Priority Data**

Sep. 8, 2000 (KR)..... 2000-53555

(76) **Inventor: Oh-Kyong Kwon, Seoul (KR)****Publication Classification**

Correspondence Address:

**SCHWEITZER CORNMAN GROSS &
BONDELL LLP****292 MADISON AVENUE - 19th FLOOR
NEW YORK, NY 10017 (US)**(51) **Int. Cl.⁷** **G09G 3/36**(52) **U.S. Cl.** **345/100**(57) **ABSTRACT**

Disclosed is a method of driving a gate line in an LCD which enables to extend a line time by making different a falling time of scan signals while concurrently driving plural gate lines. In the method, scan signals which rise concurrently are applied to at least two gate lines while rendering said scan signals to fall at different timings such that said gate lines are concurrently driven and video signals are sampled by pixels corresponding to said gate lines at different falling times. The present invention makes it possible to extend a line time without lowering of the resolution or degradation of picture quality.

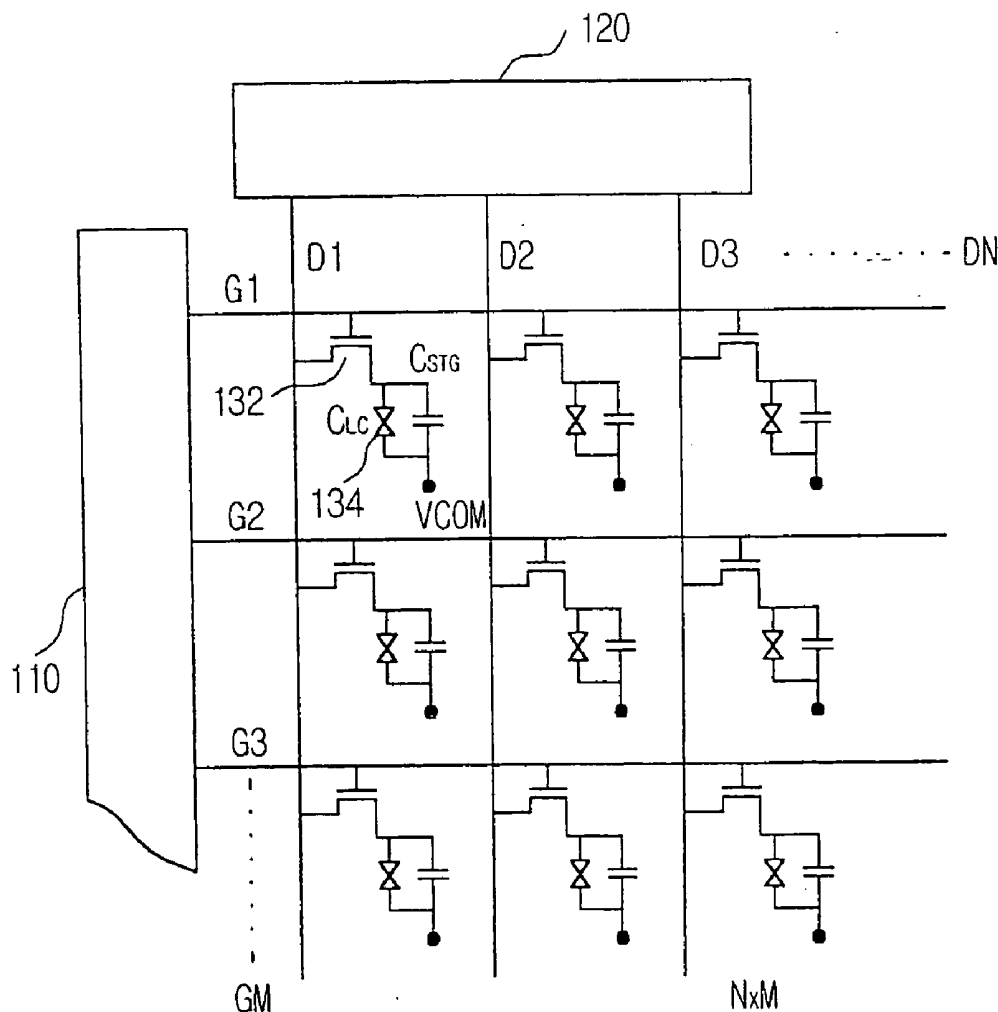
(21) **Appl. No.: 11/018,455**(22) **Filed: Dec. 21, 2004****Related U.S. Application Data**(62) **Division of application No. 09/946,684, filed on Sep. 6, 2001.**

Fig. 1

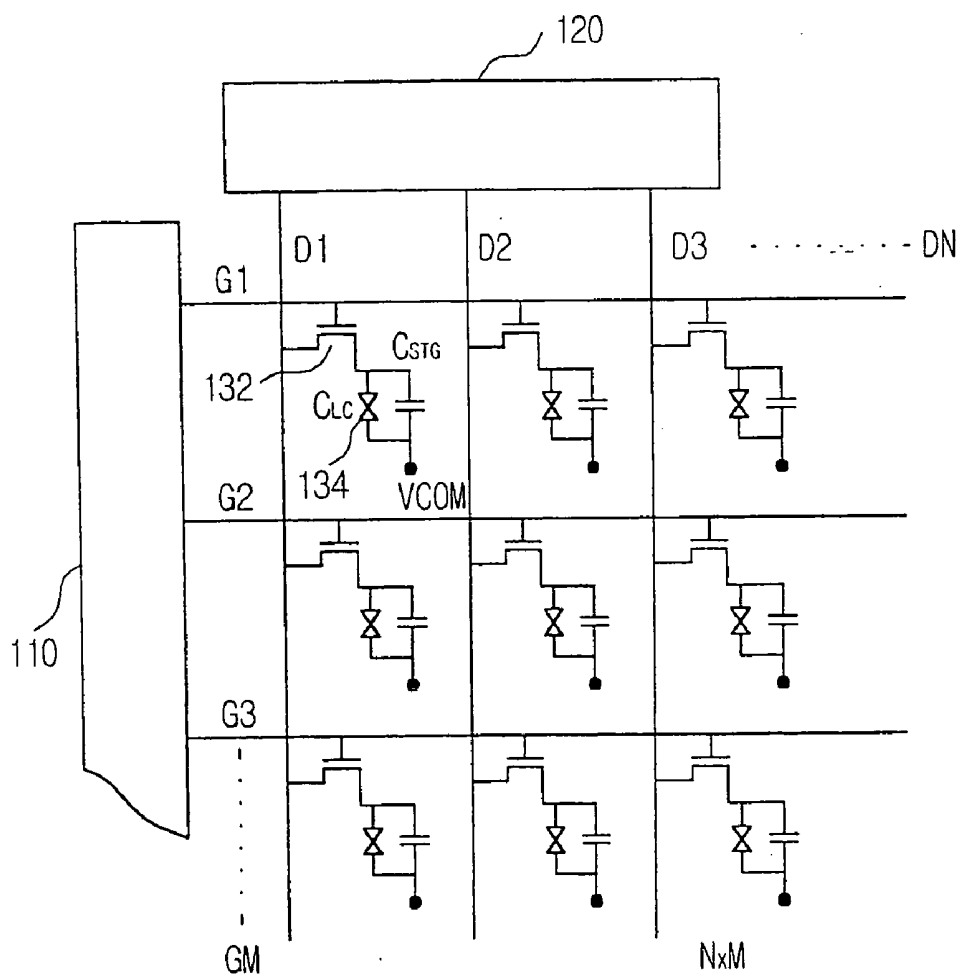


Fig. 2

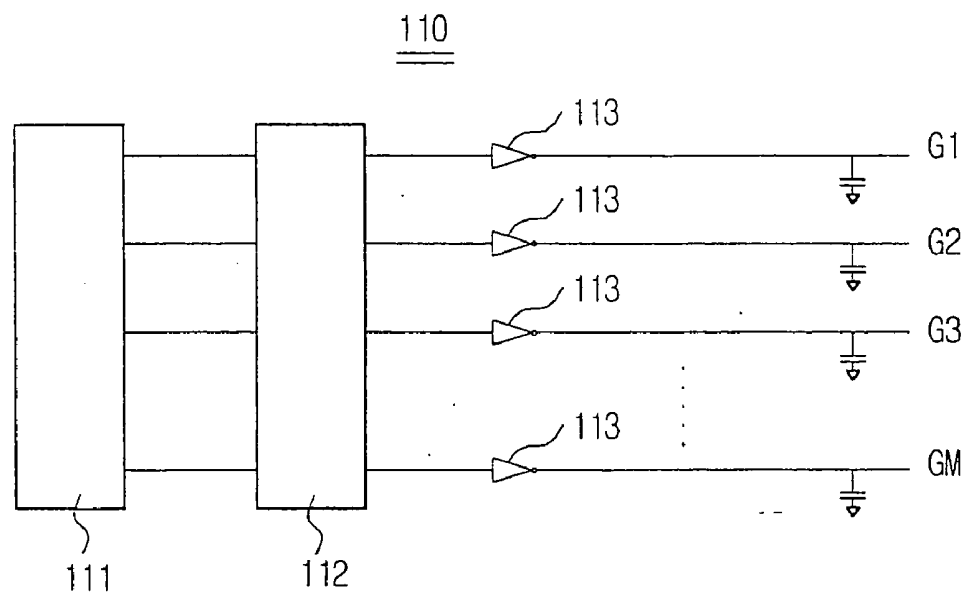


Fig. 3

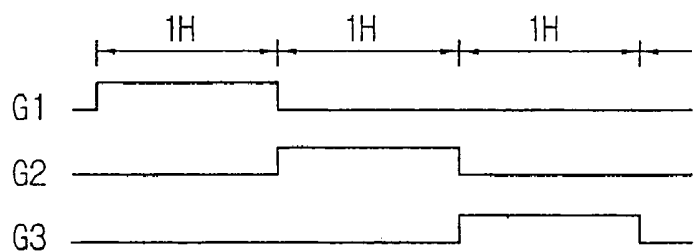


Fig. 4

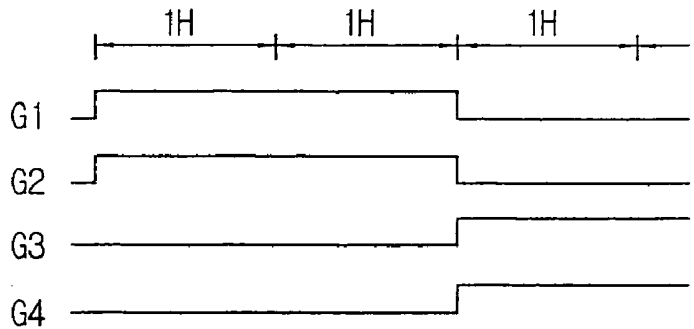


Fig. 5

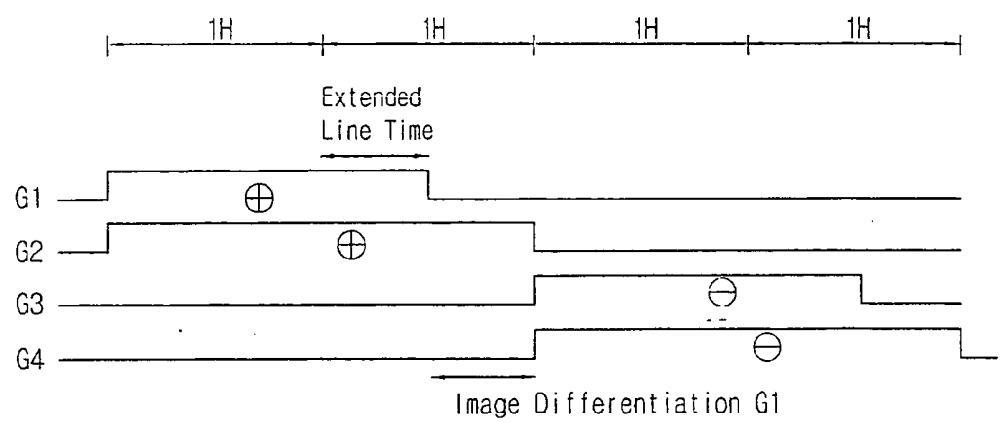


Fig. 6

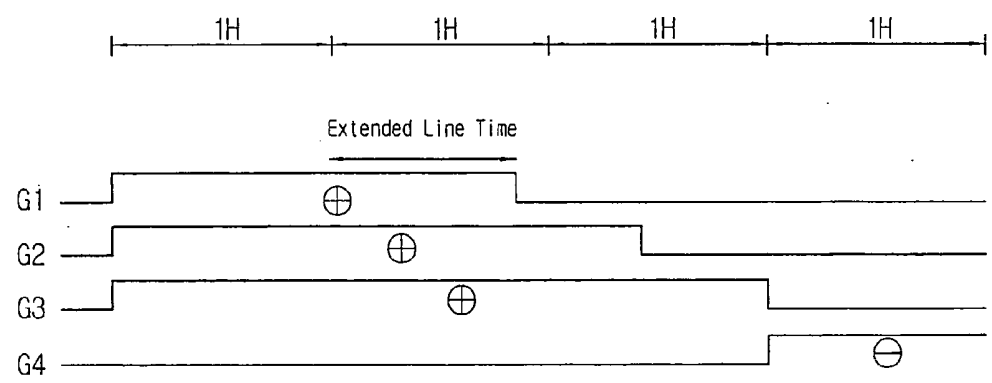


Fig. 7

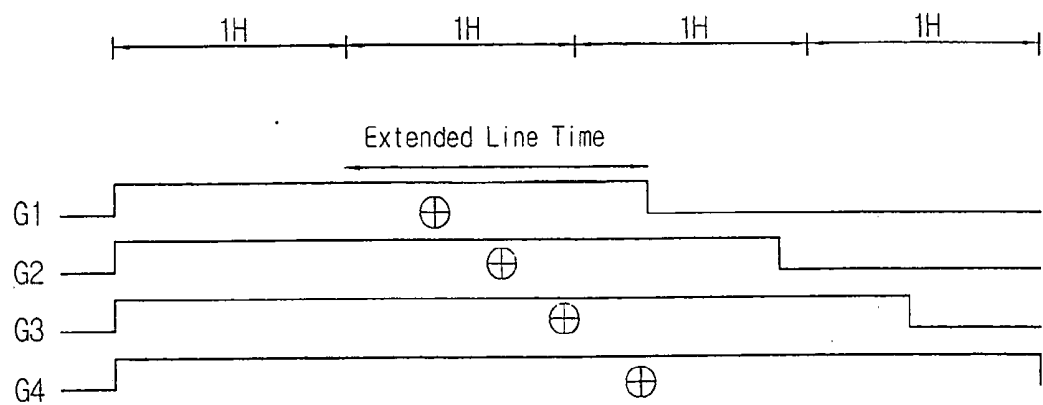


Fig. 8

(N)th Frame						(N+1)th Frame					
-	+	-	+	-	+	+	-	+	-	+	-
-	+	-	+	-	+	+	-	+	-	+	-
+	-	+	-	+	-	-	+	-	+	-	+
+	-	+	-	+	-	-	+	-	+	-	+

Fig. 9


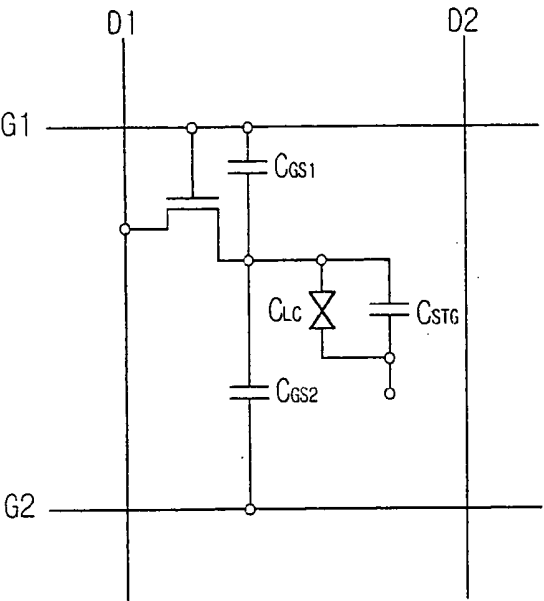


Fig. 10

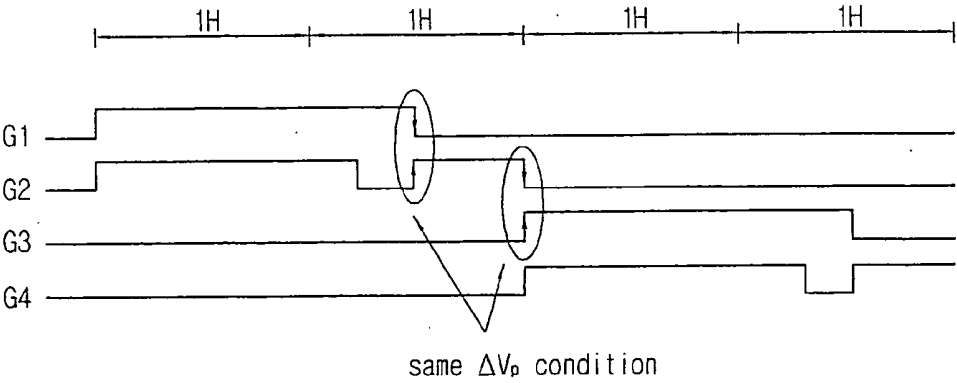

METHOD OF DRIVING GATES OF LIQUID CRYSTAL DISPLAY

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a driving technology of a liquid crystal display (LCD), and more particularly, to a method of driving a gate line in a large sized and high resolution LCD which enables to extend a line time by making different a falling time of scan signals while concurrently driving plural gate lines.

[0003] 2. Background of the Related Art

[0004] Generally, LCDs which are used for displaying characters, symbols, or graphics utilize the optical property of liquid crystal in which molecular arrangement of the liquid crystal is varied when an electric field is applied to the liquid crystal. The LCD is one kind of flat panel displays in which the liquid crystal technologies are combined with the semiconductor technologies.

[0005] Thin film transistor (TFT) LCDs have thin film transistors as the switching element for turning on and off pixels. As the TFTs are turned on or off, the pixels are turned on or off.

[0006] As shown in FIG. 1, a general TFT LCD includes a plurality of cells arranged in a matrix configuration. A unit cell includes a TFT 132 serving as the switching element, a liquid crystal cell 134 and a storage capacitor C_{STG} . Sources of the TFTs are connected to data lines (D1-DN) arranged in a column direction and one sided ends of the data lines are connected to a source driver 120. Gates of the TFTs are connected to gate lines (G1-GM) arranged in a row direction and one sided ends of the gate lines are connected to a gate driver 110, thereby realizing a display having an N×M resolution. For instance, SVGA level has a resolution of 800×600, XGA level has a resolution of 1024×768 and UXGA level has a resolution of 1,600×1200.

[0007] Here, the source driver 120 is also referred to as a data driver or column driver and the gate driver is referred to as a scan driver or row driver.

[0008] Referring to FIG. 1, the liquid crystal cell 134 is connected between drain of the TFT 132 and pixel electrode and is disposed between the pixel electrode and a common-electrode of an upper panel. The pixel electrode is made of transparent indium tin oxide (ITO) having the conductivity. When a turn on signal is applied to gate of the TFT 132, the pixel electrode transfers a signal voltage applied through the source driver 120 to the liquid crystal cell 134. The common electrode is also made of ITO and applies a common voltage V_{com} to the liquid crystal cell. The storage capacitor C_{STG} maintains a voltage applied to the pixel electrode during a constant time and controls light transmittance by varying an orientation state of liquid crystal molecules in the liquid crystal cell. One end of the storage C_{STG} can be connected to an independent electrode or gate electrode, which is called "storage on gate" mode.

[0009] In a driving of this pixel array, when a driving voltage is applied to the liquid crystal only in one direction, degradation of the liquid crystal is accelerated. To this end, there is used an inversion which periodically applies an

image data voltage applied to the liquid crystal in an opposite polarity. The period of such an inversion is normally one field.

[0010] There are four inversion driving methods, i.e., a field inversion driving method which changes the voltage polarity of all pixels every field at once, a line inversion driving method which changes the voltage polarity every a line connected to a single scan line, a column inversion driving method which changes the voltage polarity of a column every field and a dot inversion which changes the polarity by unit of a pixel. In any cases, the voltage, which is applied to the pixel electrode through the drain electrode of the TFT is alternatively changed such that it has a positive (+) or negative (-) direction with respect to the common voltage V_{com} .

[0011] FIG. 2 is a schematic view showing a general gate driver. Referring to FIG. 2, a gate driver 110 includes a shift register 111, a level shifter 112 and an output buffer 113. The shift register 111 receives a vertical synchronous signal and a vertical clock signal, to thereby generate scan pulses sequentially. The level shifter 112 shifts a voltage level of the scan pulses to approximately 30 V. The output buffer 113 provides respective gate lines of G1-GM with the level-shifted scan pulses.

[0012] Here, The most general driving method that is used to drive gates is the progressive scanning method as shown in FIG. 3. Since the progressive scanning method scans only a single gate line (or scan line) during one line time (1H), respective gate driving signals are sequentially applied to gate lines every 1H.

[0013] On the other hand, as LCDs are developed with a trend of a large screen size, resistance of data lines and load of capacitance increase and thus a time which the data driving circuit transmits a video signal to the pixel is more and more shortened. This causes an insufficient charge of the pixel and affects on a lowering in the picture quality. Therefore, this problem should be necessarily resolved.

[0014] FIG. 4 shows driving signals used in the conventional interlace scanning method in order to increase the line time. Referring to FIG. 4, the conventional interlace scanning method has a line time longer than the progressive scanning method two times.

[0015] However, this interlace scanning method has a drawback in that the vertical resolution decreases by half since the same video signal is transmitted into pixels connected to two gate lines. Accordingly, these conventional gate driving methods are not alternative methods upon considering a high picture resolution oriented current trend.

SUMMARY OF THE INVENTION

[0016] Accordingly, the present invention is directed to a method for driving gates of an LCD that substantially obviates one or more problems due to limitations and disadvantages of the related art.

[0017] An object of the present invention is to provide a method for driving gates of an LCD enabling to extend the line time without lowering the resolution by rendering a falling time of scan signals different while driving plural gate lines at the same time.

[0018] To accomplish the above object and advantages, there is provided a method for driving gates of an LCD in which scan signals which rise concurrently are applied to at least two gate lines while rendering said scan signals to fall at different timings such that said gate lines are concurrently driven and video signals are sampled by pixels corresponding to said gate lines at different falling times.

[0019] Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

[0021] **FIG. 1** is an equivalent circuit diagram of a general TFT-LCD;

[0022] **FIG. 2** is a schematic view of a general gate driving circuit;

[0023] **FIG. 3** is waveforms of gate driving signals of a general progressive scanning method;

[0024] **FIG. 4** is waveforms of gate driving signals of an interlace scanning method so as to increase the line time;

[0025] **FIG. 5** is waveforms of gate driving signals of a line time extending driving method to scan two gate lines concurrently in accordance with the present invention;

[0026] **FIG. 6** is waveforms of gate driving signals of a line time extending driving method to scan three gate lines concurrently in accordance with the present invention;

[0027] **FIG. 7** is waveforms of gate driving signals of a line time extending driving method to scan four gate lines concurrently in accordance with the present invention;

[0028] **FIG. 8** is a table showing a line polarity of N-th and (N+1)-th when inversion-driving two gate lines in accordance with the present invention;

[0029] **FIG. 9** is a general circuit diagram of a TFT-LCD pixel in accordance with the present invention; and

[0030] **FIG. 10** is waveforms of gate driving signals of a line time extending driving method to scan improved two gate lines concurrently in accordance with the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0031] Reference will now be made in detail to the preferred embodiment of the present invention, examples of which are illustrated in the accompanying drawings.

[0032] **FIG. 5** is waveforms of gate driving signals in a line time extending driving method to scan two gate lines concurrently in accordance with the present invention.

[0033] Referring to **FIG. 5**, a driving method of the present invention is characterized in that gate driving signals applied to two gate lines rise concurrently and fall at different timings. According to the conventional two gate line driving method, if gate driving signals are concurrently applied to gate lines G1 and G2, identical image signal is applied to pixels sharing the same data line. On the other hand, according to the gate line driving method of the present invention, since the first gate driving signal G1 falls first, an image signal corresponding to pixels connected to the first gate line is sampled. After that, the second gate driving signal G2 falls and thereby an image signal corresponding to pixels connected to the second gate line is sampled.

[0034] Thus, according to the gate driving method of the present invention, it becomes possible to extend the line time 30-70% longer than that in the normal progressive scanning method and at the same time it becomes possible to transmit image signals corresponding to pixels connected to each of the gate lines unlike the conventional interlace scanning method in which two gate lines are concurrently driven and they concurrently fall. Here, a specific extending percentage of the line time may be different depending on a panel characteristic.

[0035] For example, when driving gate lines of an LCD panel having a resolution of XGA level (1024×768) using a frame frequency of 75 Hz, the conventional progressive scanning method secures a line time of approximately 17 μ sec but a line time extending driving method of the present invention can secure a line time of approximately 22-30 μ sec.

[0036] The line time extending driving method of the present invention is executed by concurrently driving N number of gate lines. For instance, **FIG. 5** corresponds to a method of concurrently selecting two gate lines, **FIG. 6** corresponds to a method of concurrently selecting three gate lines and **FIG. 7** corresponds to a method of concurrently selecting four gate lines.

[0037] Thus, as the number of lines which can be concurrently selected and then driven increases, it is possible to secure more longer line time and to extend the number of selectable lines. And, as shown in **FIGS. 5, 6** and **7**, the line time extending driving method of the present invention performs an N-line inversion driving in which image signals having the same polarity are transferred to pixels connected gate lines which are concurrently selected. In other words, as shown in **FIG. 8** of describing one example of two lines inversion driving, such an inversion is performed every line in the column direction and is performed every two lines in the row direction. And, when driving N number of lines concurrently, such an inversion is performed every N lines.

[0038] In the meanwhile, according to the gate line driving method of the present invention in which the falling timings of two gate lines are different from each other while the two gate lines are concurrently driven, it is possible to anticipate an extension of the line time but there may be occur a voltage difference of ΔV_p between pixels in even gate line and odd gate line. This voltage difference is due to the following reason.

[0039] Pixels of a TFT-LCD can be modeled in a circuit diagram of FIG. 9. In FIG. 9, symbols D1 and D2 are data lines, G1 and G2 are gate lines, C_{LC} is liquid a crystal cell modeled in a capacitor and C_{STG} is a storage capacitance, respectively. And, symbols C_{GS1} and C_{GS2} indicate parasitic capacitances.

[0040] Referring to FIG. 9, as a gate driving signal of G1 falls, a voltage of the liquid crystal cell C_{LC} is coupled with the parasitic capacitance C_{GS1} and thereby the voltage is varied. A variation amount in this voltage corresponds to the ΔV_p and can be obtained from the following equation 1.

$$\Delta V_{p1} = \frac{C_{GS1}}{C_{LC} + C_{STG} + C_{GS1} + C_{GS2}} \times (-V_G) \quad \text{Eq. 1}$$

[0041] where, C_{LC} is a capacitance of the liquid crystal and V_G is a magnitude in the gate driving signal.

[0042] This voltage variation amount ΔV_p is also generated by the parasitic capacitance C_{GS2} . In other words, as a gate signal of G2 rises, a voltage of the liquid crystal is coupled with the parasitic capacitance C_{GS2} and thereby the voltage is varied.

[0043] As shown in FIG. 9, the pixels connected to an odd gate line generate only a voltage variation amount of ΔV_{p1} defined by the equation 1 while the pixels connected to an even gate line generate a voltage variation amount corresponding to a sum of ΔV_{p1} and ΔV_{p2} which is being defined by the below equation 2.

$$\Delta V_{p2} = \frac{C_{GS1}}{C_{LC} + C_{STG} + C_{GS1} + C_{GS2}} (-V_G) + \frac{C_{GS2}}{C_{LC} + C_{STG} + C_{GS1} + C_{GS2}} V_G \quad \text{Eq. 2}$$

[0044] Thus, the pixels connected to the odd gate lines have different voltage variation amount than the pixels connected to the even gate lines. This is because when the image signal is sampled to the pixels connected to the gate line of G1, only a gate driving signal applied to the gate line of G1 falls while when the image signal is sampled to the pixels connected to the gate line of G2, falling of a gate driving signal applied to the gate line of G2 and rising of a gate driving signal applied to the gate line of G3 are concurrently generated. As a result, the voltage difference ΔV_p between even gate lines and odd gate lines is generated and thereby the picture quality may be lowered.

[0045] In order to resolve the aforementioned drawbacks, as shown in FIG. 10, another embodiment of the present invention partially modifies the gate driving method of the present invention provided previously. In other words, as aforementioned, since the voltage difference ΔV_p between pixels connected to even gate lines and odd gate lines is due to a difference between the gate driving signals applied to the even gate lines and the odd gate lines, the present embodiment renders the odd gate lines and the even gate lines to be under the same driving condition.

[0046] For instance, when driving two gate lines as shown in FIG. 10, gate driving signals which are being applied to even gate lines of G2, G4 and so on to fall right before gate

driving signals which are being applied to odd gate lines of G1, G3 and so on fall and the gate driving signals which are being applied to even gate lines of G2, G4 and so on again rise when the gate driving signals which are being applied to odd gate lines of G1, G3 and so on fall. As a result, all of the pixels connected to the even and odd gate lines have identical condition for generation of the voltage difference ΔV_p and thus the voltage difference problem between the pixels connected to the even and odd gate lines can be resolved.

[0047] While the driving method of the present invention shows and describes embodiments in which the gate driving signals applied to the gate lines rise concurrently and fall at different timings, it is not limited to the above-described embodiments. In other words, the present invention makes it possible to extend a line time without lowering of the resolution by allowing the gate driving signals to fall concurrently and then to rise at different timings depending on characteristics of the used LCD panel, thus driving plural gate lines concurrently while transferring video signals to the gate lines at different rising timings.

[0048] As described above, according to a gate line driving method of the present invention, it becomes possible to increase a line time without lowering of the resolution and sufficiently charge/discharge the pixel electrode by making different a falling time of scan signals while concurrently driving plural gate lines.

[0049] Further, the gate driving signal applied to the odd gate line has the same falling condition as the gate signal applied to the even gate line, thereby preventing degradation in picture quality.

[0050] The forgoing embodiments are merely exemplary and are not to be construed as limiting the present invention. The present teachings can be readily applied to other types of apparatuses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations will be apparent to those skilled in the art.

1-5. (canceled)

6. A method of driving gate lines of a liquid crystal display having a plurality of pixels, the pixels respectively having a thin film transistor, a liquid crystal cell and a storage capacitor, wherein a gate line is coupled to a control electrode of the thin film transistor and a data line is coupled to a first current electrode of the thin film transistor, wherein scan signals which rise concurrently are applied to at least two gate lines while rendering said scan signals to fall at different timings such that said gates lines are concurrently driven and video signals are sampled by pixels corresponding to said gate lines at different falling times, and wherein video signals having a same polarity are applied to pixels coupled to the at least two gate lines which are concurrently selected.

7. The method of claim 1, wherein said at least two scan signals comprise a first scan signal which is applied to an even numbered gate line and a second scan signal which is applied to an odd numbered gate line, wherein the first scan signal falls sooner than the second scan signal and then independently rises when the second scan signal falls, to render a falling condition of the odd numbered gate line and the even numbered gate equal.

* * * * *

专利名称(译)	驱动液晶显示器的栅极的方法		
公开(公告)号	US20050110739A1	公开(公告)日	2005-05-26
申请号	US11/018455	申请日	2004-12-21
[标]申请(专利权)人(译)	KWON OH KYONG		
申请(专利权)人(译)	KWON OH-KYONG		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	KWON OH KYONG		
发明人	KWON, OH-KYONG		
IPC分类号	G02F1/133 G09G3/20 G09G3/36		
CPC分类号	G09G3/3614 G09G3/3648 G09G2320/0223 G09G2320/0219 G09G2310/0205		
优先权	1020000053555 2000-09-08 KR		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种驱动LCD中的栅极线的方法，其能够通过同时在驱动多条栅极线时使扫描信号的下降时间不同来延长线时间。在该方法中，同时上升的扫描信号被施加到至少两条栅极线，同时使所述扫描信号以不同的时序下降，使得所述栅极线被同时驱动，并且视频信号被与不同下降的所述栅极线对应的像素采样。倍。本发明使得可以在不降低分辨率或降低图像质量的情况下延长线时间。

