



(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2006/0097971 A1**

Lee et al.

(43) **Pub. Date:**

May 11, 2006

(54) **LIQUID CRYSTAL DISPLAY AND DRIVING DEVICE OF THE SAME**

Publication Classification

(51) **Int. Cl.**
G09G 3/36 (2006.01)

(52) **U.S. Cl.** **345/89**

(76) Inventors: **Jun-Pyo Lee**, Yeongtong-gu (KR);
Jang-Hyun Yeo, Seoul (KR);
Jae-Hyoung Park, Yongin-si (KR);
Woo-Chul Kim, Yongin-si (KR);
Jung-Hwan Cho, Seongnam-si (KR)

(57) **ABSTRACT**

A liquid crystal display includes first and second opposing spaced insulating substrates, pixel electrodes formed on the first substrate, a common electrode formed on at least one of the first and second substrates, and a liquid crystal layer interposed there between the first substrate and the second substrate. In this structure, each pixel electrode is divided into a main-pixel electrode and a sub-pixel electrode, to which different signal voltages are individually applied at the same gray scale. Further, a signal voltage to be applied to the sub-pixel electrodes is determined by a gamma value satisfying the following equation:

$$\text{Gamma } K = (\text{current gray scale} / \text{maximum gray scale})^f$$

$$F(\text{Gray Scale}) = a \times (\text{maximum gray scale} / \text{current gray scale}),$$

wherein a is a constant.

Correspondence Address:
CANTOR COLBURN, LLP
55 GRIFFIN ROAD SOUTH
BLOOMFIELD, CT 06002

(21) Appl. No.: **11/259,897**

(22) Filed: **Oct. 27, 2005**

(30) **Foreign Application Priority Data**

Nov. 5, 2004 (KR) 10-2004-0089646

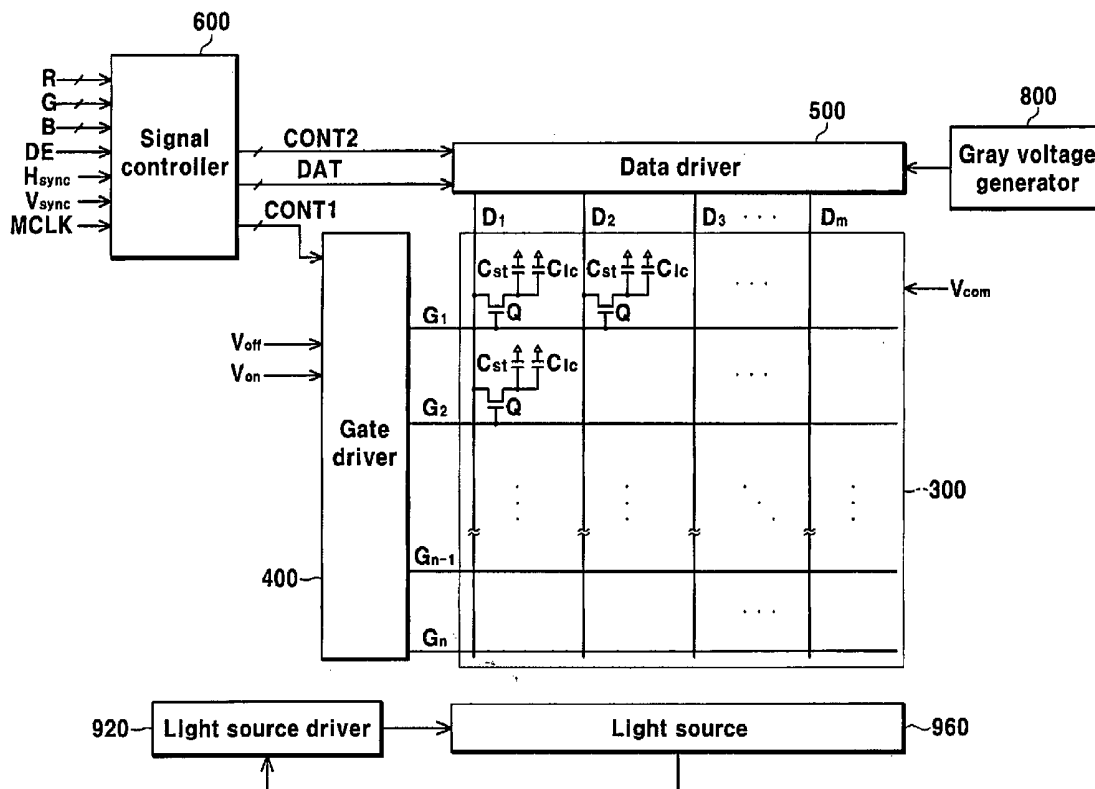


FIG.1

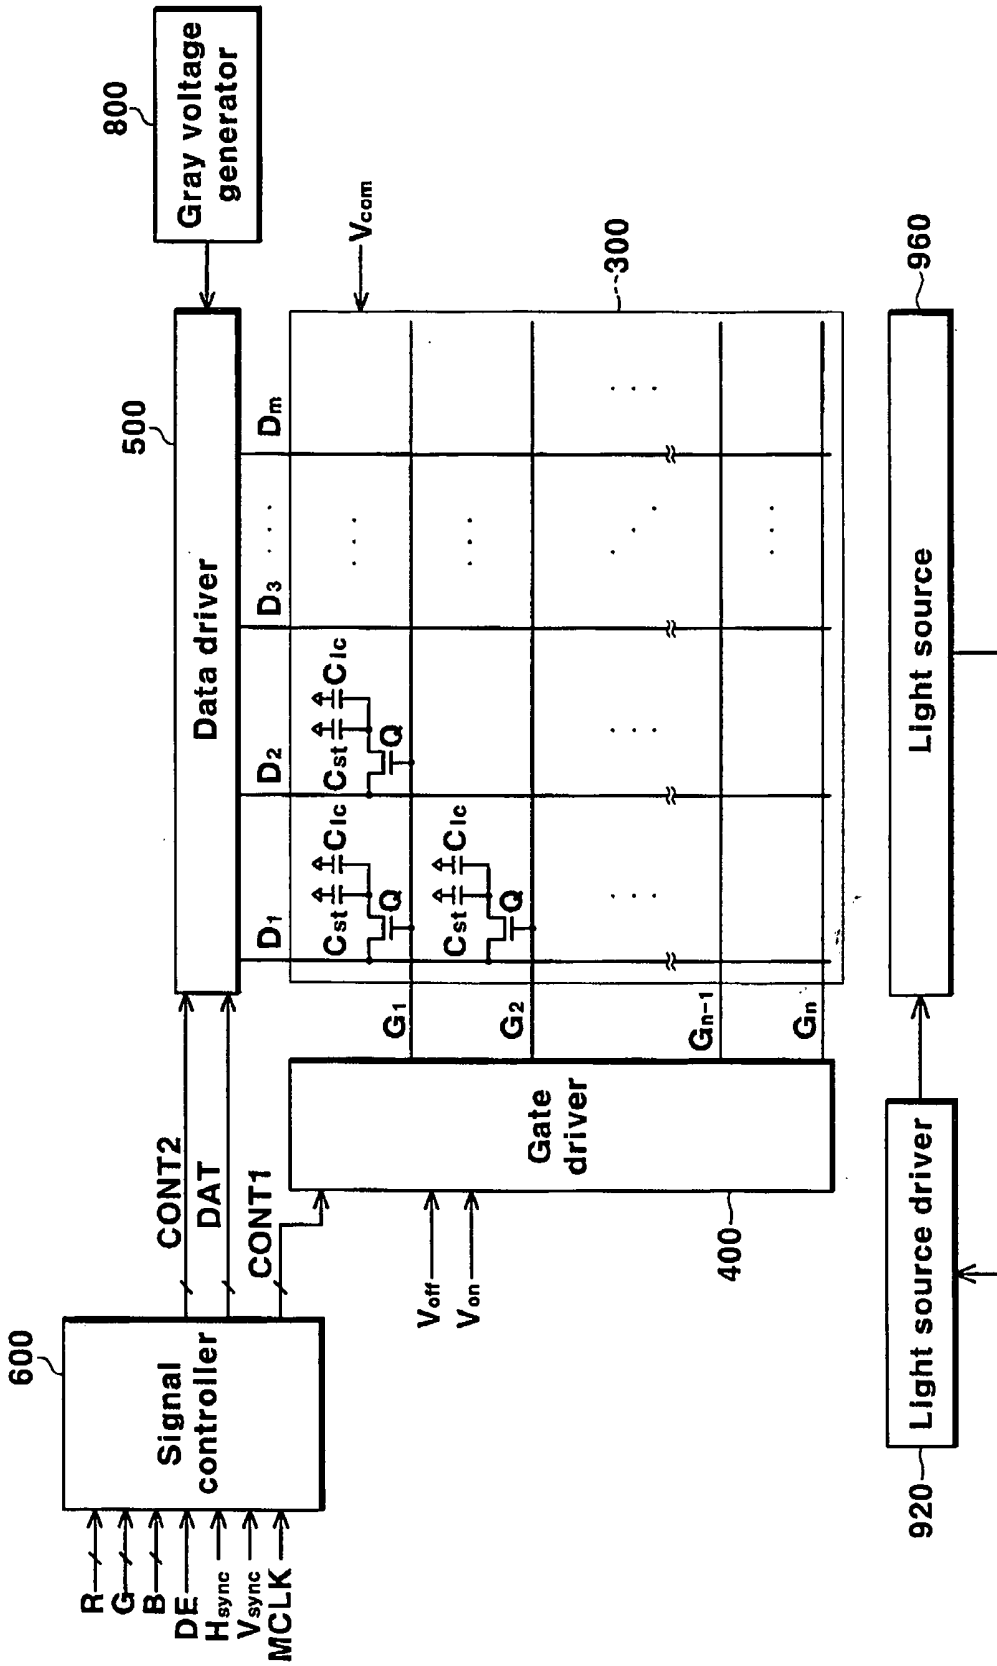


FIG. 2

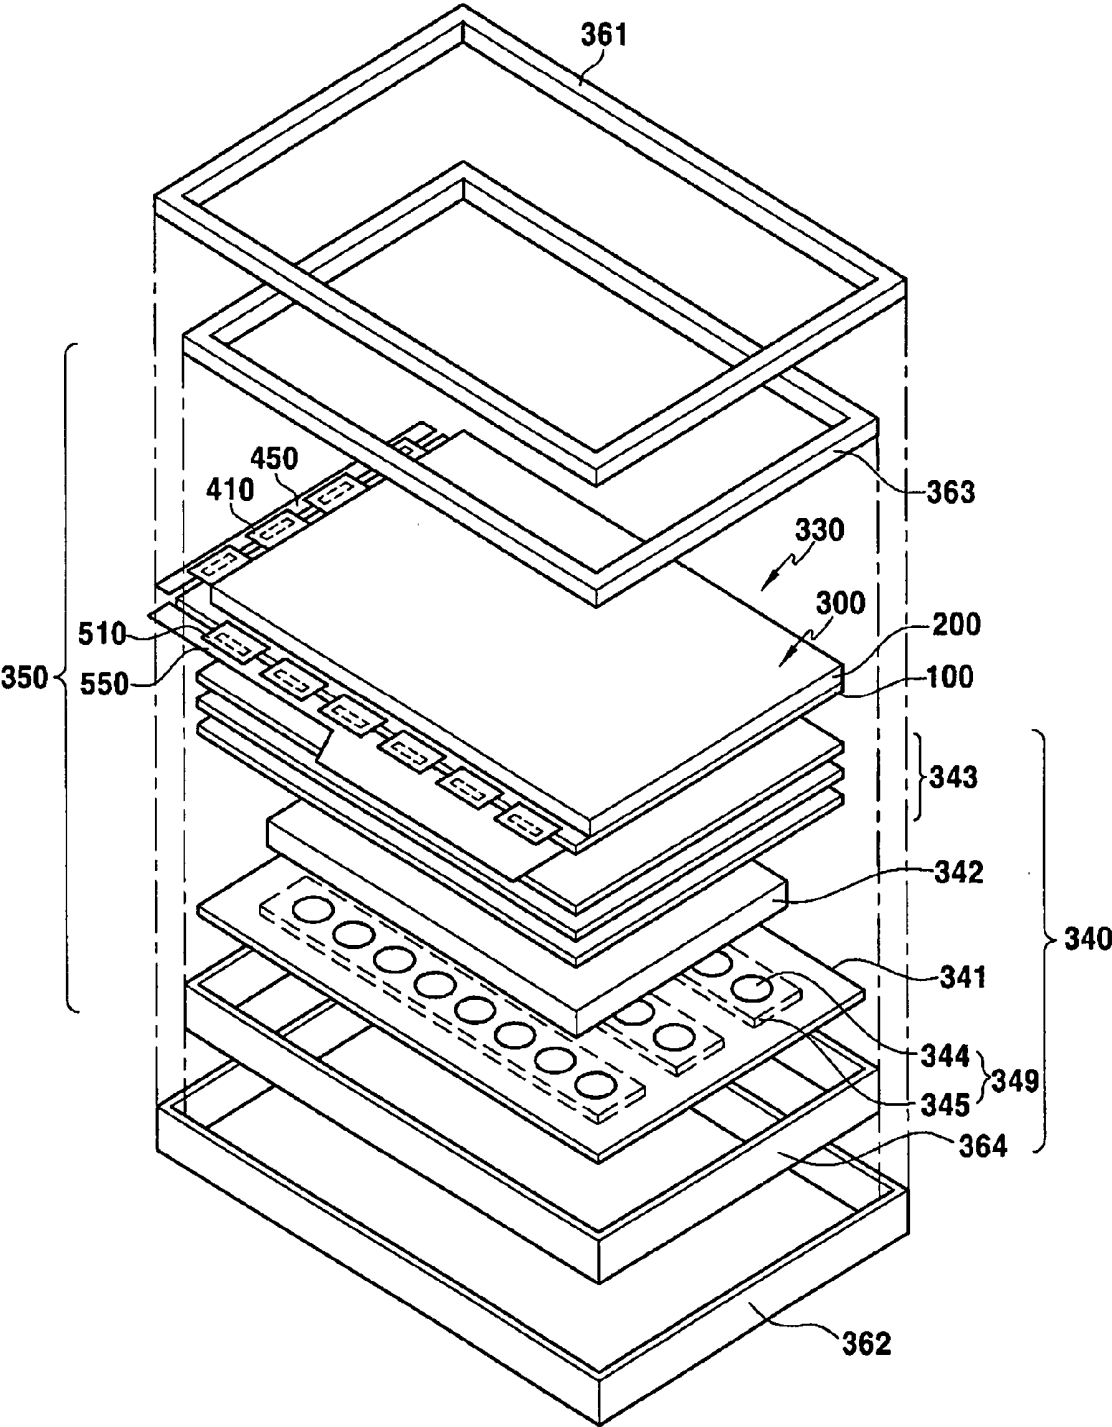


FIG. 3

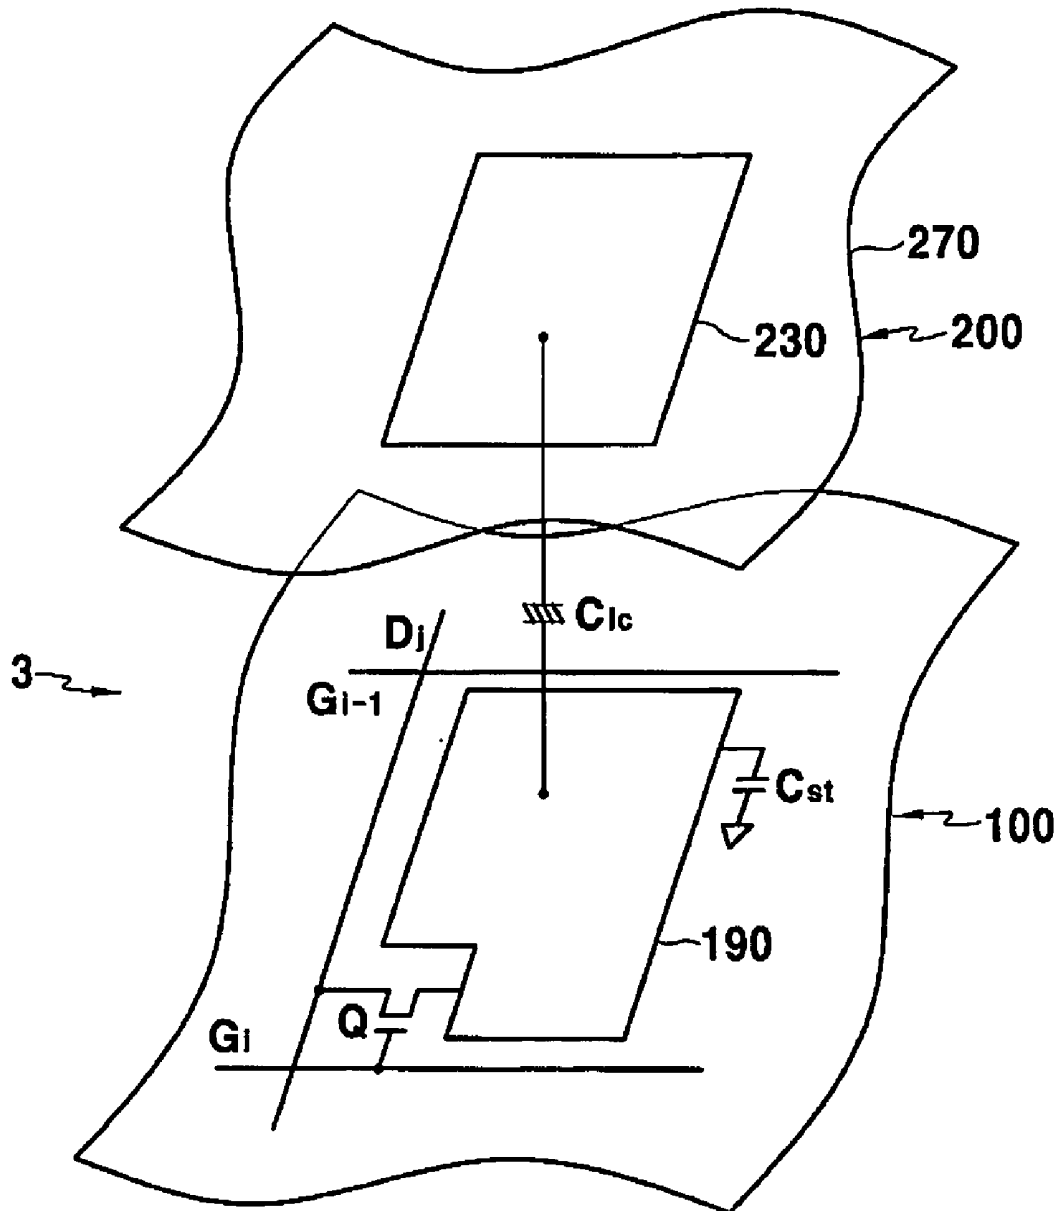


FIG. 4

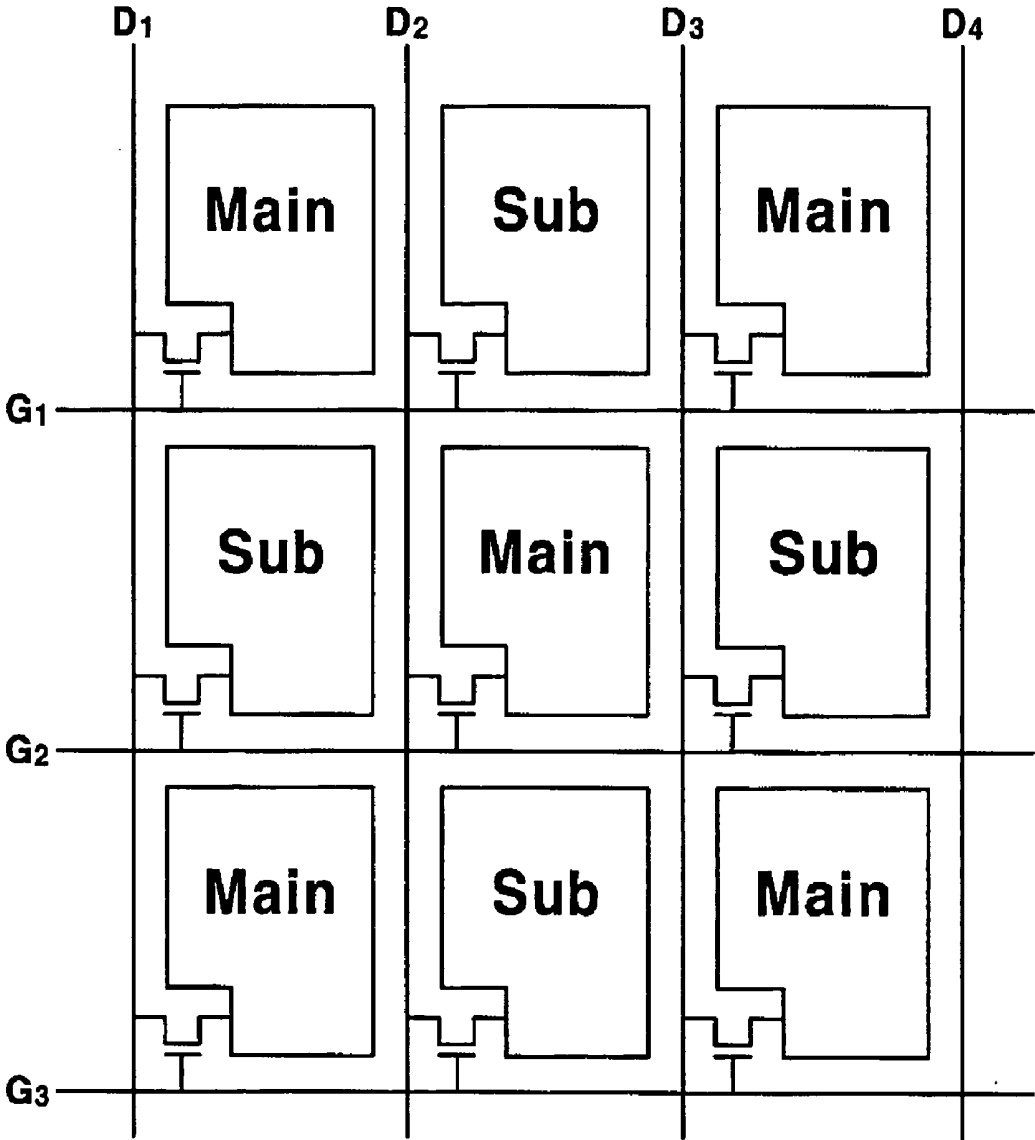


FIG.5

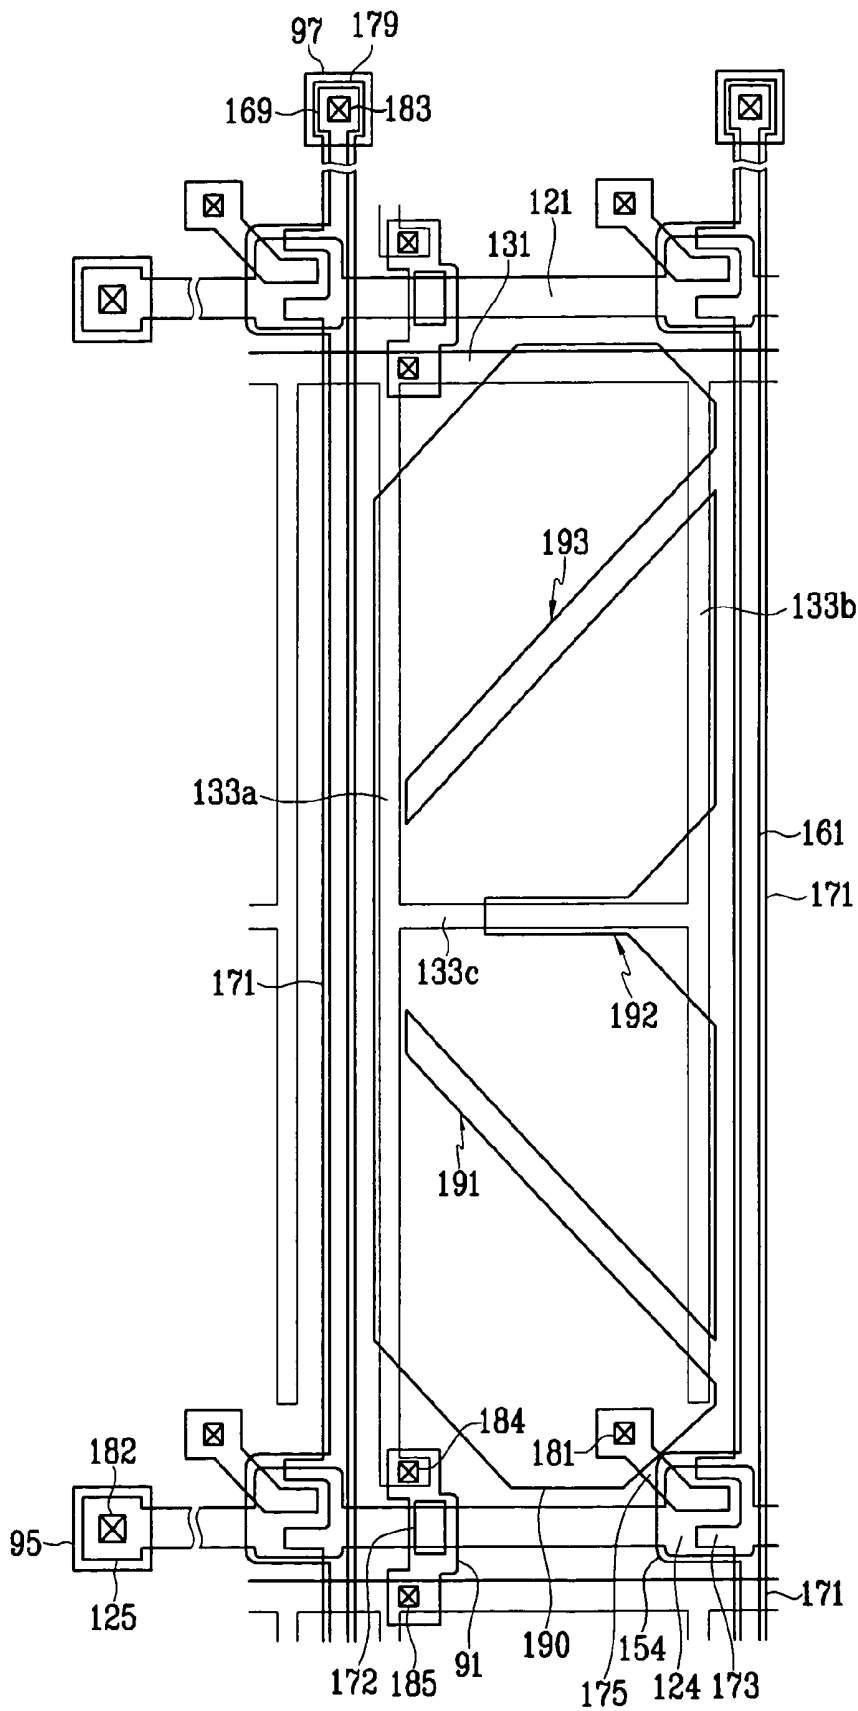


FIG. 6

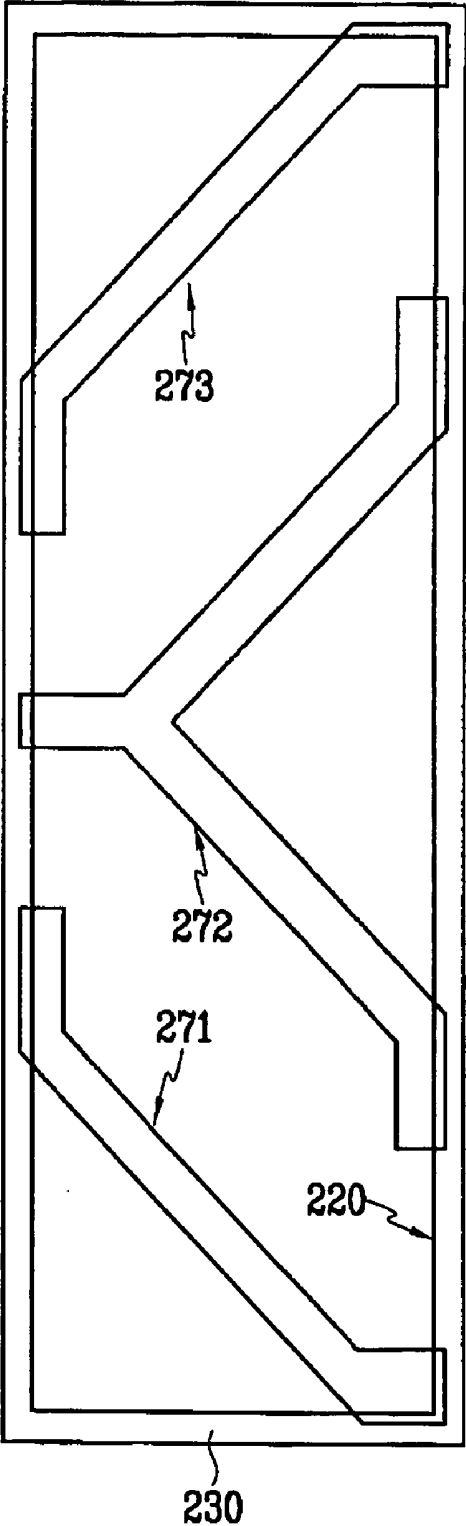


FIG. 7

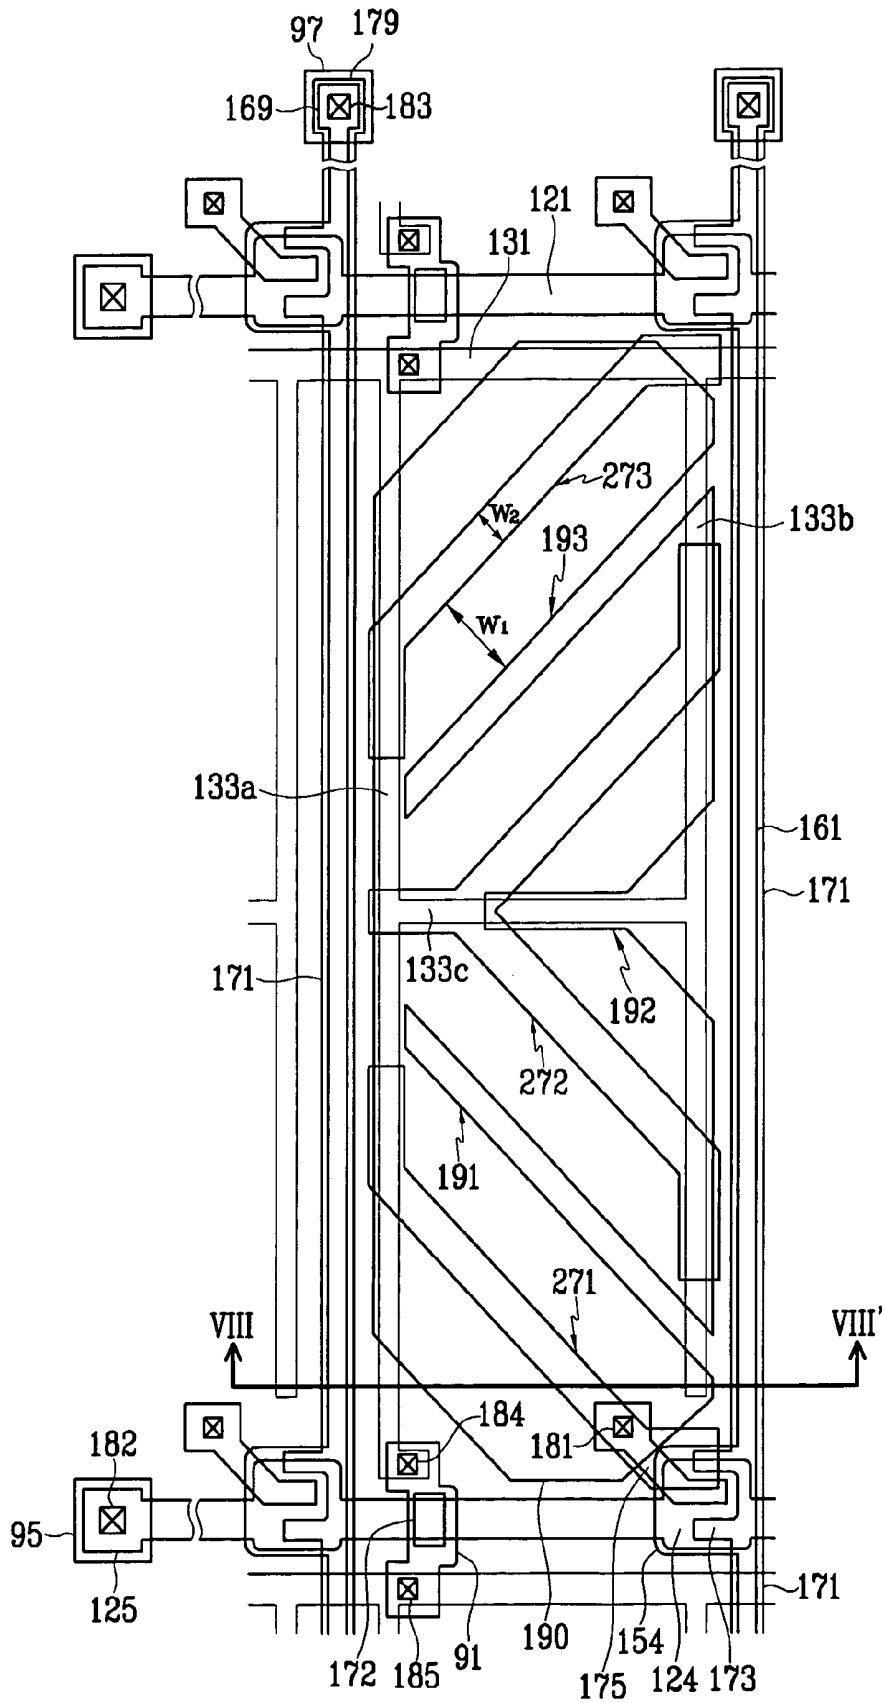


FIG. 8

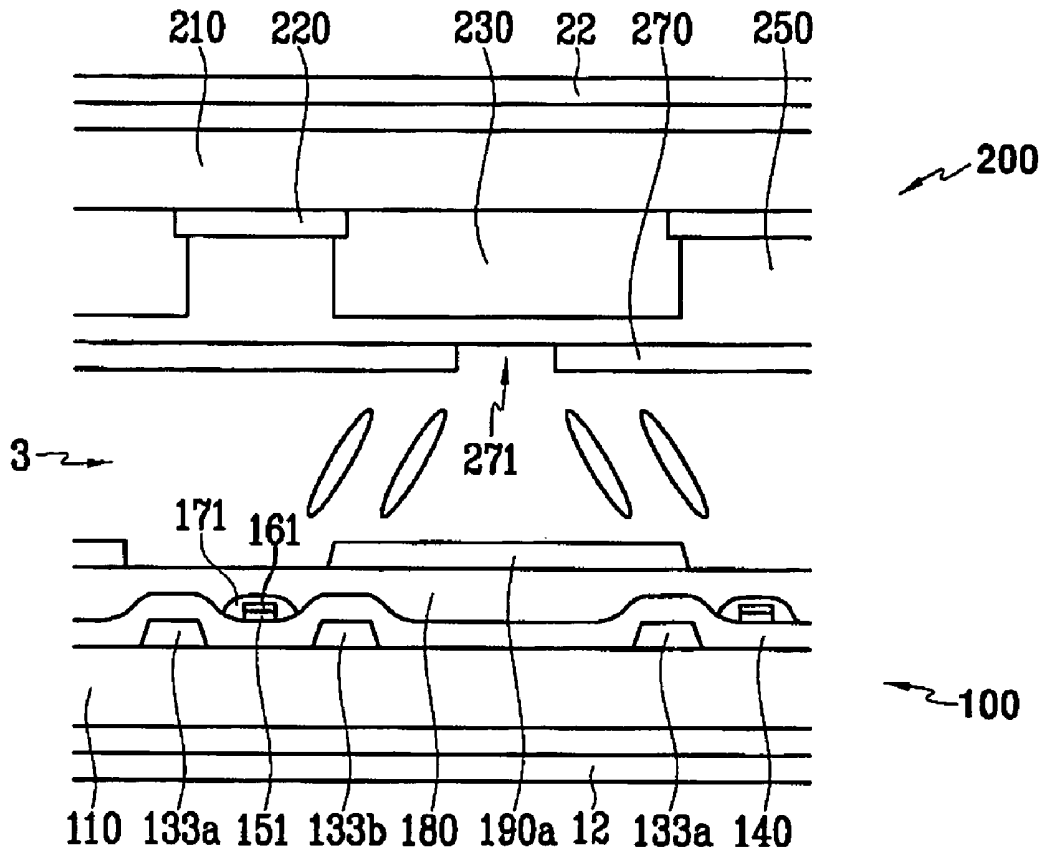


FIG.9


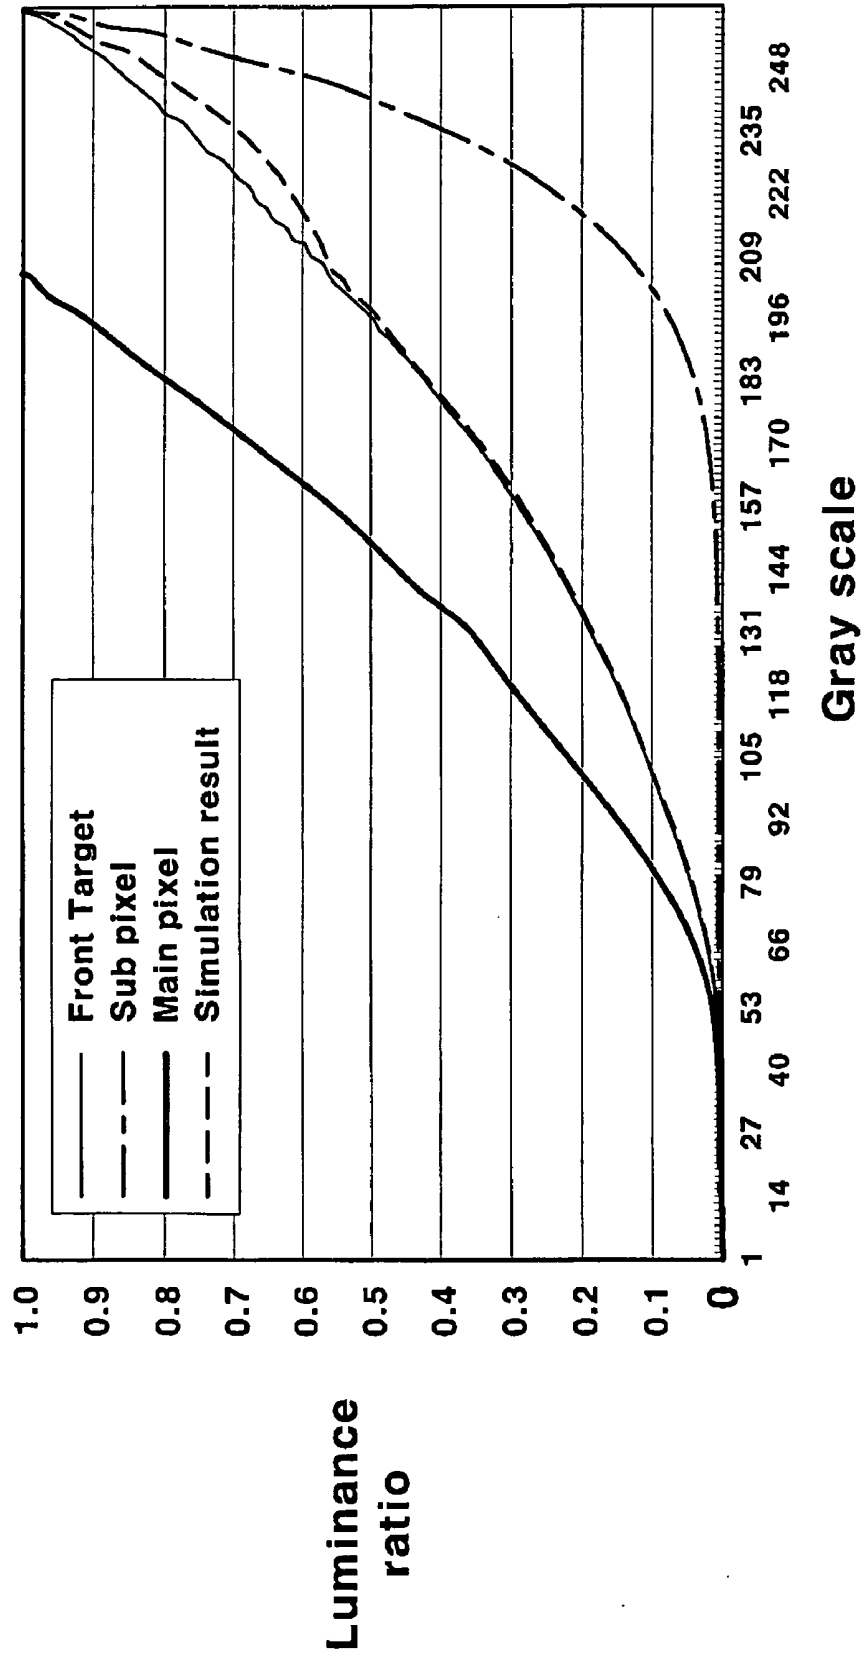


FIG.10

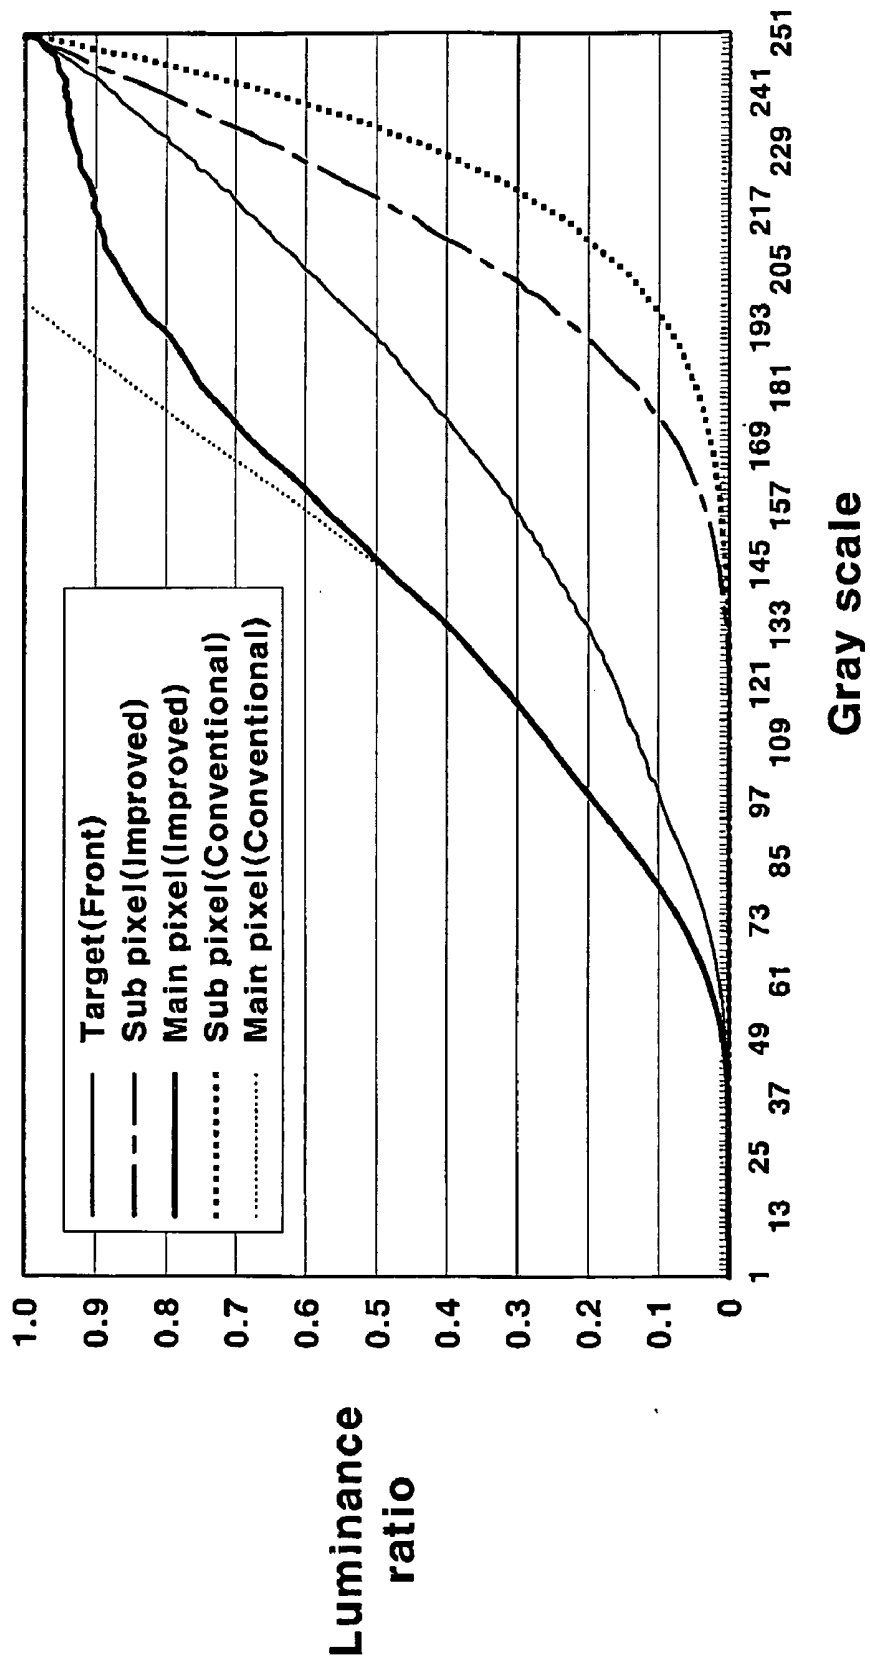

LIQUID CRYSTAL DISPLAY AND DRIVING DEVICE OF THE SAME

[0001] This application claims priority to Korean Patent Application No. 10-2004-0089646, filed on Nov. 5, 2004 and all the benefits accruing therefrom under 35 U.S.C. §119, and the contents of which in its entirety are herein incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] (a) Field of the Invention

[0003] The present invention relates generally to a liquid crystal display ("LCD") and a driving device of the same. More particularly, the present invention relates to an LCD having improved visibility and a driving device of the same.

[0004] (b) Description of the Related Art

[0005] Generally, an LCD includes a pair of panels individually having electrodes on their inner surfaces, and a dielectric anisotropy liquid crystal layer interposed between the panels. In the LCD, the variation of the voltage difference between the field generating electrodes, i.e., the variation in the strength of an electric field generated by the electrodes, changes the transmittance of the light passing through the LCD, and thus desired images are obtained by controlling the voltage difference between the electrodes.

[0006] However, the viewing angle of the LCD may not be as wide as desired. Accordingly, various methods to overcome such a drawback have been developed in the field of LCDs. The most conspicuous one among recently proposed methods to ensure a wide viewing angle is the method of aligning liquid crystal molecules perpendicularly to upper and lower panels, and forming an aperture pattern or projection pattern in the field generating electrodes.

[0007] In particular, the aperture pattern formation method utilizes a fringe field that occurs near the apertures formed in the pixel electrodes and the common electrode. That is, the fringe field controls tilt directions of the liquid crystal molecules to ensure the wide viewing angle.

[0008] The projection forming method utilizes projections formed on the pixel electrodes and the common electrode of the upper panel. These projections distort an electric field generated between the two electrodes, so that tilt directions of the liquid crystal molecules are controlled.

[0009] In another method, apertures are formed in the pixel electrodes of the lower panel and projections are formed on the common electrode of the upper panel. The fringe field caused by the apertures and projections controls tilt directions of the liquid crystal molecules, thereby forming a multi-domain structure to ensure the wide viewing angle.

[0010] In multi-domain LCDs, a 10:1 contrast ratio-based viewing angle, or a gray scale conversion-based viewing angle defined as a critical angle of luminance conversion between the gray scales, is more than 80 degrees in all directions. In spite of such a good characteristic, the LCDs exhibit poor visibility at left and right sides of the screen due to a disagreement between a gamma curve at the front and a gamma curve at the side. For example, in a patterned vertically alignment ("PVA") mode LCD, where an aperture pattern is formed in the common electrode in order to form

a multi-domain structure, the luminance of the screen becomes higher and the color becomes closer to white as a viewing point moves to a side of the screen from a front center. In more excessive cases, intervals between the gray-scales become too narrow, so that images may be dully expressed.

[0011] Recently, concern about the visibility of an LCD has increased due to the increasing use of LCDs in multi-media fields for enjoying moving pictures and still images.

BRIEF SUMMARY OF THE INVENTION

[0012] The present invention realizes an LCD with prominent visibility such as by providing a pixel electrode divided into two sub-pixel electrodes and applying different voltages individually thereto.

[0013] In an exemplary embodiment of the present invention, there is provided an LCD including a first insulating substrate, a second insulating substrate opposed to and spaced from the first insulating substrate, a plurality of pixel electrodes formed on the first substrate, a common electrode formed on at least one of the first substrate and the second substrate, and a liquid crystal layer interposed between the first substrate and the second substrate.

[0014] In this structure, each pixel electrode is divided into a main-pixel electrode and a sub-pixel electrode to form a plurality of main-pixel electrodes and sub-pixel electrodes, to which different signal voltages are individually applied at a same gray scale.

[0015] Further, a signal voltage to be applied to the sub-pixel electrodes is determined by a gamma value satisfying the following equation:

$$\text{Gamma } K = (\text{current gray scale} / \text{maximum gray scale})^f$$

[0016] $f(\text{Gray Scale}) = a \times (\text{maximum gray scale} / \text{current gray scale})$,

[0017] wherein a is a constant.

[0018] [Please confirm that the correction of the equation " $f(\text{Gray Scale}) = a \times (\text{current gray scale} / \text{maximum gray scale})$ " to " $f(\text{Gray Scale}) = a \times (\text{maximum gray scale} / \text{current gray scale})$ " is correct.]

[0019] Here, it is preferable that a gamma value of the main-pixel electrodes is obtained by deducting a gamma value of the sub-pixel electrodes from two times a target gamma value, and the main-pixel electrodes and the sub-pixel electrodes are alternately arranged, in all lines and all rows.

[0020] The LCD may be further comprised of a thin film transistor ("TFT") formed on the first substrate to switch on or off the signal voltage applied to the pixel electrodes.

[0021] The main-pixel electrodes and the sub-pixel electrodes may have different areas from each other, and the pixel electrode and the common electrode each may include a domain forming means.

[0022] The LCD may be further comprised of a plurality of gate lines formed on the first substrate and a plurality of data lines insulated from and intersected with the gate lines.

[0023] Preferably, the domain forming means includes two portions formed at 45 degrees with respect to the gate

lines, perpendicular to each other. The portions may include linearly-shaped apertures within the pixel electrodes and the common electrode.

[0024] A signal voltage applied to a main-pixel electrode may be higher than a signal voltage applied to a sub-pixel electrode at the same gray scale, and a set of a main-pixel electrode and a sub-pixel electrode function together as a pixel unit and represent one color.

[0025] In another exemplary embodiment of the present invention, there is provided a device for driving a display device that outputs gate control signals and data control signals after receiving input control signals from an external device, and outputs image signals for sub-pixels and image signals for main-pixels after receiving input image signals from an external device.

[0026] Here, the image signals for the main-pixels are determined by a gamma value satisfying the following equation:

$$\text{Gamma } K = (\text{current gray scale} / \text{maximum gray scale})^f$$

[0027] $F(\text{Gray Scale}) = a \times (\text{maximum gray scale} / \text{current gray scale})$,

[0028] wherein a is a constant.

[0029] This device includes a lookup table LUT for storing the image signals for the main-pixels and the image signals for the sub-pixels relative to all image signals used in the display device, and detects the image signals for the sub-pixels and the image signals for the main-pixels relative to input image signals from the lookup table LUT, and then outputs the detected image signals.

[0030] In this device, it is preferable that a gamma value determining the image signals for the main-pixels is obtained by deducting a gamma value determining the image signals for the sub-pixels from two times a target gamma value.

[0031] In still another exemplary embodiment of the present invention, there is provided an LCD including: a first insulating substrate; a gate line formed on the first substrate with a gate electrode; a gate insulating layer formed on the gate lines; an amorphous silicon layer formed on the gate insulating layer; an ohmic contact formed on the amorphous silicon layer; a data line formed on the gate insulating layer, of which at least a partial portion includes a source electrode formed on the ohmic contact; a drain electrode opposite the source electrode, of which at least a partial portion is placed on the ohmic contact; a passivation layer formed on the data line and the drain electrode; a pixel electrode formed on the passivation layer and connected to the drain electrode; a second insulating substrate opposite the first insulating substrate; a common electrode formed on the second substrate; a first domain forming means formed on at least one of the first substrate and the second substrate; and a second domain forming means formed on at least one of the first substrate and the second substrate to divide a pixel region into a plurality of sub-domains in cooperation with the first domain forming means.

[0032] In this structure, the pixel electrode is divided into a main-pixel electrode and a sub-pixel electrode, to which different signal voltages are individually applied at the same gray scale.

[0033] Further, the signal voltage for the main-pixel electrode is determined by a gamma value satisfying the following equation:

$$\text{Gamma } K = (\text{current gray scale} / \text{maximum gray scale})^f$$

[0034] $f(\text{Gray Scale}) = a \times (\text{maximum gray scale} / \text{current gray scale})$,

[0035] wherein a is a constant.

[0036] In still another exemplary embodiment of the present invention, there is provided an LCD including a plurality of pixel electrodes divided into main-pixel electrodes and sub-pixel electrodes, to which different signal voltages are individually applied at a same gray scale, and a signal voltage applied to the sub-pixel electrodes determined by a gamma value $\text{Gamma } K = (\text{current gray scale} / \text{maximum gray scale})^f$ wherein exponent f is not a constant.

[0037] The exponent f varies with respect to current gray scale and a minimum value of f occurs at the maximum gray scale. The exponent f is determined by an equation $f(\text{gray scale}) = a \times (\text{maximum gray scale} / \text{current gray scale})$, wherein a is a constant.

[0038] A gamma value of the main-pixel electrodes is obtained by deducting a gamma value of the sub-pixel electrodes from twice a target gamma value.

[0039] The sub-pixel electrodes have a different size than the main-pixel electrodes, and a signal voltage applied to a main-pixel electrode is higher than a signal voltage applied to a sub-pixel electrode at the same gray scale.

BRIEF DESCRIPTION OF THE DRAWINGS

[0040] The above objects and other advantages of the present invention will become more apparent by describing the preferred embodiments thereof in more detail with reference to the accompanying drawings, wherein:

[0041] **FIG. 1** is a block view of an exemplary embodiment of an LCD according to the present invention;

[0042] **FIG. 2** is an exploded perspective view schematically illustrating an exemplary embodiment of an LCD according to the present invention;

[0043] **FIG. 3** is an equivalent circuit view of an exemplary embodiment of a pixel unit of an LCD according to the present invention;

[0044] **FIG. 4** shows an exemplary embodiment of an arrangement of pixels of a TFT panel according to the present invention;

[0045] **FIG. 5** is a layout view of an exemplary embodiment of a TFT panel according to the present invention;

[0046] **FIG. 6** is a layout view of an exemplary embodiment of a color filter panel according to the present invention;

[0047] **FIG. 7** is a layout view of an exemplary embodiment of an LCD according to the present invention;

[0048] **FIG. 8** is a cross-sectional view cut along line VIII-VIII' of **FIG. 7**;

[0049] **FIG. 9** is a graph for showing exemplary gamma curves of a main-pixel and a sub-pixel, and an average

gamma curve of the two in an exemplary embodiment of an LCD according to the present invention; and,

[0050] FIG. 10 is a graph for showing exemplary gamma curves of a main-pixel and a sub-pixel, and an average gamma curve of the two in another exemplary embodiment of an LCD according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0051] Preferred embodiments of the present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. The present invention may, however, be embodied in different forms and should not be construed as being limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

[0052] In the drawings, the thickness of the layers, films, and regions are exaggerated for clarity. Like numerals refer to like elements throughout. It will be understood that when an element such as a layer, film, region, or substrate is referred to as being "on" another element, it can be directly on the other element or intervening elements may also be present.

[0053] Hereinafter, LCDs according to preferred embodiments of the present invention will be described in detail with reference to the accompanying drawings.

[0054] FIG. 1 is a block diagram of an exemplary embodiment of an LCD according to the present invention, FIG. 2 is an exploded perspective view schematically illustrating an exemplary embodiment of an LCD according to the present invention, and FIG. 3 is an equivalent circuit view of an embodiment of a pixel unit of an LCD according to the present invention.

[0055] Referring to FIG. 1, an LCD includes an LC panel assembly 300, a gate driver 400 and a data driver 500 that are connected to the LC panel assembly 300, a gray voltage generator 800 connected to the data driver 500, a light source section 960 for supplying light to the LC panel assembly 300, a light source driver 920 for controlling the light source section 960, and a signal controller 600 for controlling the above elements.

[0056] Referring to FIG. 2, the LCD includes an LC module 350 including a display unit 330 and a backlight unit 340, a front housing 361 and a rear housing 362, alternatively known as a front chassis and rear chassis, respectively, for receiving and supporting the LC module 350, and mold frames 363 and 364.

[0057] The display unit 330 includes the LC panel assembly 300, a gate tape carrier package ("TCP") 410 and a data TCP 510 that are attached to the LC panel assembly 300, and a gate printed circuit board ("PCB") 450 and a data PCB 550 that are individually attached to the corresponding TCPs 410 and 510, respectively. The gate and data TCPs 410 and 510 may alternatively be chip-on-film ("COF") type packages.

[0058] In the structure shown in FIGS. 2 and 3, the LC panel assembly 300 includes a lower panel 100 as a thin film transistor ("TFT") panel and an upper panel 200 as a color filter panel, where the panels 100 and 200 face each other,

and an LC layer 3 interposed therebetween. In the circuit shown in FIGS. 1 and 3, the LC panel assembly 300 further includes a plurality of display signal lines G_1 - G_n and D_1 - D_m and a plurality of pixels connected thereto and arranged substantially in a matrix in circuitual view.

[0059] The display signal lines G_1 - G_n and D_1 - D_m are provided on the lower panel 100 and include a plurality of gate lines G_1 - G_n for transmitting gate signals (also referred to as "scanning signals"), and a plurality of data lines D_1 - D_m for transmitting data signals. The gate lines G_1 - G_n extend substantially in a row direction and are substantially parallel to each other, while the data lines D_1 - D_m extend substantially in a column direction and are substantially parallel to each other.

[0060] Each pixel includes a switching element Q connected to the display signal lines G_1 - G_n and D_1 - D_m , and an LC capacitor C_{LC} and a storage capacitor C_{ST} connected to the switching element Q. In an alternative embodiment, the storage capacitor C_{ST} may be omitted.

[0061] The switching element Q, such as a TFT, is provided on the lower panel 100 and has three terminals including a control terminal connected to one of the gate lines G_1 - G_n , an input terminal connected to one of the data lines D_1 - D_m , and an output terminal connected to both the LC capacitor C_{LC} and the storage capacitor C_{ST} .

[0062] The LC capacitor C_{LC} includes a pixel electrode 190, provided on the lower panel 100, and a common electrode 270, provided on the upper panel 200, as two terminals. The LC layer 3, interposed between the two electrodes 190 and 270, functions as a dielectric of the LC capacitor C_{LC} . The pixel electrode 190 is connected to the switching element Q, and the common electrode 270 is supplied with a common voltage V_{com} , and covers an entire surface, or substantially the entire surface, of the upper panel 200. In an alternative embodiment, the common electrode 270 may be provided on the lower panel 100 and at least one of the pixel electrode 190 and the common electrode 270 may be shaped as a bar or a stripe.

[0063] The storage capacitor C_{ST} is an auxiliary capacitor for the LC capacitor C_{LC} . When the pixel electrode 190 and a separate signal line (not shown), which is provided on the lower panel 100, are overlapped with each other, with an insulator interposed therebetween, the overlapped portion becomes the storage capacitor C_{ST} . The separate signal line is supplied with a predetermined voltage such as the common voltage V_{com} . Alternatively, the storage capacitor C_{ST} may be formed by overlapping the pixel electrode 190 and an adjacent gate line known as a previous gate line that is placed directly before the pixel electrode 190, with an insulator interposed therebetween.

[0064] For color display, each pixel uniquely exhibits one of the three colors (i.e., spatial division), such as one of three primary colors or one of the red, blue, and green colors, or sequentially exhibits three colors in turn depending on time (i.e., temporal division), such as one of three primary colors or one of the red, blue, and green colors, so that the spatial or temporal sum of the colors is recognized as a desired color. While an example of a set of the colors includes red, green, and blue colors, it should be understood that alternate color sets may be employed. FIG. 3 shows an example of the spatial division where each pixel includes a color filter

230, for exhibiting one of the colors, in an area of the upper panel **200** corresponding to the pixel electrode **190**. In an alternative embodiment, the color filter **230** may be provided on or under the pixel electrode **190** of the lower panel **100**.

[0065] Referring again to **FIG. 2**, the backlight unit **340**, forming part of the light source section **960**, is mounted under the LC panel assembly **300**. The backlight unit **340** includes a light source unit **349** including a plurality of light emitting diodes (LEDs) **344** arrayed on a PCB **345** shown in phantom, a light guiding plate **342**, and a plurality of optical sheets **343** provided between the LC panel assembly **300** and the LEDs **344** for dispersing or otherwise adjusting the light emitted from the LEDs **344** to the LC panel assembly **300**. The backlight unit **340** further comprises a reflective plate **341**, which is placed over the PCB **345** and includes a plurality of holes where light emitting chips of the LEDs **344** are protruded there through, to reflect the light emitted from the LEDs **344** toward the LC panel assembly **300**. The holes may have a circular shape such that the corresponding LED **344** is projected through the hole. Alternative shapes of light emitting holes, such as a rectangular shape or a slit shape that are adapted to project a predetermined number of the LEDs **344** would also be within the scope of these embodiments. Radiant heat members made of a heat conduction material may be attached to the PCBs **345** to radiate heat. The backlight unit **340** further comprises a mold frame **364**, which is provided between the reflective plate **341** and the light guiding plate **342** for maintaining regular intervals between the light source unit **349** and the light guiding plate **342** and for supporting the light guiding plate **342** and the optical sheets **343** relative to the light source unit **349**. A power supply applies a supply voltage to the light source unit **349**.

[0066] The LEDs **344** as the light source may utilize only white LEDs emitting white light, or a mixing array of red, green, and blue LEDs. A mixing array of a white LED and a red LED may be also used. In this case, the red LED functions as an auxiliary of the white LED. The LEDs are arranged on the PCB **345** in a predetermined form, thereby forming the light source unit **349**. Each PCB **345** may be arranged horizontally along a longitudinal axis, and may mount in turn the red, green, and blue LEDs **344**. The number of the LEDs **344** may be changed, and alternate arrangement of the LEDs **344** are within the scope of these embodiments.

[0067] **FIG. 2** shows three light source units **349**, but the number of the light source units **349** can be changed depending on the required brightness and the size of the LCD.

[0068] Although LEDs **344** are illustrated within the light source unit **349**, the backlight unit **340** may alternatively utilize fluorescent lamps, such as cold cathode fluorescent lamps ("CCFLs"), external electrode fluorescents ("EEFLs"), etc., as the light source.

[0069] One or more polarizers may be provided on the outer surfaces of the two panels **100** and **200** for polarizing the light emitted from the light source units **349**. Exemplary polarizers **12** and **22** are illustrated in **FIG. 8**.

[0070] Referring to **FIG. 1** and **FIG. 2**, the gray voltage generator **800** generates a plurality of gray scale voltages relating to the brightness of the LCD. The gray voltage

generator **800** may be included in the data PCB **550**, generates two sets of a plurality of gray voltages related to the transmittance of the pixels, and provides the gray voltages to the data driving part **500**. The data driving part **500** applies the gray voltages, which are selected for each data line D_1 - D_m , by control of the signal controller **600**, to the data line respectively as a data signal. The gray voltages in one set have positive polarity with respect to the common voltage V_{com} , while those of the other set have negative polarity with respect to the common voltage V_{com} .

[0071] The gate drivers **400** are individually mounted on each gate TCP **410**, having the shape of an integrated circuit ("IC") chip, and are individually connected to the gate lines G_1 - G_n of the LC panel assembly **300** for transmitting the gate signals consisting of combinations of the gate-on voltage V_{on} and the gate-off voltage V_{off} input from an external device to the gate signal lines G_1 - G_n .

[0072] The data drivers **500** are individually mounted on each data TCP **510**, having the shape of IC chips, and are individually connected to the data lines D_1 - D_m of the LC panel assembly **300** for transmitting the data voltages, which are selected from the gray voltages supplied from the gray voltage generator **800**, to the data signal lines D_1 - D_m .

[0073] In another embodiment of the present invention, the gate driver **400** or the data driver **500** may be directly mounted on the lower panel **100** without TCPs, having the shape of an IC chip such as in a "chip on glass" ("COG") type of mounting, and in still another embodiment of the present invention, the gate driver **400** or the data driver **500** is integrated into the lower panel **100** along with the other elements, such as the switching elements Q, the gate lines G_1 - G_n , and the data lines D_1 - D_m . In the above cases, the gate PCB **450** or the gate TCP **410** can be omitted.

[0074] Just as the data PCB **550** may mount the gray voltage generator **800**, the signal controller **600** may be included in the data PCB **550** or the gate PCB **450** for controlling the operation of the gate driver **400** or the data driver **500**. The signal controller **600** may further send signals to the light source section **960**.

[0075] Hereinafter, the operation of the above-mentioned LCD will be described in detail.

[0076] The signal controller **600** receives red, green, and blue input image signals R, G, and B and input control signals for controlling the display thereof such as a vertical synchronizing signal V_{sync} , a horizontal synchronizing signal H_{sync} , a main clock signal MCLK, a data enable signal DE, etc., from an external graphic controller (not shown). In response to the input image signals R, G, and B and the input control signals, the signal controller **600** processes the image signals R, G, and B suitably for the operation of the LC panel assembly **300** and generates gate control signals CONT1 and data control signals CONT2, and then provides the gate control signals CONT1 and the data control signals CONT2 to the gate driver **400** and the data driver **500**, respectively. The signal controller **600** may further provide backlight control signals to the light source section **960**.

[0077] Also, the signal controller **600** has a lookup table LUT. The signal controller **600** detects image signals for sub-pixels and image signals for main-pixels relative to the input image signals R, G, and B from the lookup table LUT,

and then transmits the detected image signals to the data driver **500** with image signals DAT.

[0078] The sub-pixel image signals stored in the lookup table LUT exhibit lower luminance than the input image signals R, G, and B, while the main-pixel image signals exhibit higher luminance than the input image signals R, G, and B, as will be further described below.

[0079] The gate control signals CONT1 include a vertical synchronizing start signal STV, that is a scanning start signal, for informing the beginning of a frame and having instructions to start scanning, at least one gate clock signal CPV for controlling the output time of the gate-on voltage V_{on} , and an output enable signal OE for defining the duration of the gate-on voltage V_{on} .

[0080] The data control signals CONT2 include a horizontal synchronizing start signal STH for informing the data driver **500** of the beginning of data transmission for a group of pixels, a load signal LOAD having instructions to apply the data voltages to the data lines D_1 - D_m , a reverse signal RVS, otherwise known as an inversion signal, for reversing the polarity of the data voltages with respect to the common voltage V_{com} , and a data clock signal HCLK.

[0081] In response to the data control signals CONT2 from the signal controller **600**, the data driver **500** successively receives the image data DAT, the processed image signals, for a row of the pixels from the signal controller **600**, shifts them, converts the image data DAT into analog data voltages selected from the gray voltages supplied from the gray voltage generator **800**, and then applies the data voltages to data lines D_1 - D_m .

[0082] The gate driver **400** applies the gate-on voltage V_{on} to the gate lines G_1 - G_n in response to the gate control signals CONT1 from the signal controller **600**, thereby turning on the switching elements Q connected thereto. The data voltages applied to the data lines D_1 - D_n are applied to the corresponding pixels through the activated switching elements Q.

[0083] The difference between the data voltage applied to the pixel and the common voltage V_{com} is represented as a charged voltage across the LC capacitor C_{LC} , namely, a pixel voltage. The LC molecules in the LC capacitor C_{LC} have orientations depending on the magnitude of the pixel voltage.

[0084] The light source driver **920** controls current applied to the light source section **960** for switching the LEDs **344** of the light source section **960**, and also controls the brightness of the light from the LEDs **344**.

[0085] When the light emitted from the LEDs **344** passes through the LC layer **3**, the polarization of the light is varied according to the orientations of the LC molecules. The polarizer, such as polarizers **12** and **22**, converts the difference of the light polarization into a difference of the light transmittance.

[0086] By repeating this procedure by a unit of the horizontal period (which is denoted by "1H" and equal to one period of the horizontal synchronizing signal H_{sync} , the data enable signal DE, and the gate clock signal CPV), all gate lines G_1 - G_n are sequentially supplied with the gate-on voltage V_{on} during a frame, thereby applying the data voltages to all pixels. When the next frame starts after finishing one

frame, the reverse control signal RVS, part of the data control signals CONT2, applied to the data driver **500** is controlled such that the polarity of the data voltages is reversed with respect to that of the previous frame (which is referred to as "frame inversion"). The reverse control signal RVS may also be controlled such that the polarity of the data voltages flowing along a data line in one frame is reversed (for example, line inversion and dot inversion), or the polarity of the data voltages in one packet is reversed (for example, column inversion and dot inversion).

[0087] FIG. 4 shows an exemplary embodiment of an arrangement of pixels of a TFT panel according to the present invention.

[0088] Referring to FIG. 4, the lower panel **100** as the TFT panel of this embodiment is provided with a plurality of pixels arranged substantially in a matrix. These pixels are defined by intersecting a plurality of gate lines G_1, G_2, G_3, \dots with a plurality of data lines D_1, D_2, D_3, \dots . Each pixel is provided with a TFT as a switching element Q, and a pixel electrode, such as pixel electrodes **190**, connected to the TFT.

[0089] In this structure, the pixels are classified into main-pixels and sub-pixels according to the difference between the gray voltages applied to the corresponding pixel electrodes **190**. When two kinds of pixels exhibit the same gray scale, the voltage applied to the pixel electrode **190** of the main-pixel is higher than the voltage applied to the pixel electrode **190** of the sub-pixel.

[0090] In this case, a set of a main-pixel and a sub-pixel function together as a pixel unit representing one color, thereby improving visibility at the sides of a screen. That is, in order to compensate for any distortion of a gamma curve (representing the relation between gray scales and luminance) caused when a viewing point is placed at the side of the LCD, a pixel unit is divided into two portions, in which one portion represents lower luminance than the target luminance, and the other portion represents higher luminance than the target luminance, so that the average luminance of the two is practically recognized. In other words, adjacent pixels have different transmittance from each other according to the portion, thereby visibility becomes enhanced.

[0091] In FIG. 4, the main-pixels and sub-pixels are alternately arranged in all rows and in all columns, but the arrangement of the pixels may be modified in various manners.

[0092] The main-pixel and the sub-pixel are structurally similar since they are divided depending on only the gray voltage applied thereto, but their dimension may be controlled at any case. That is, the dimensions of the sub-pixels may differ from the dimensions of the main-pixels.

[0093] Hereinafter, the basic structure of the pixel will be described in more detail.

[0094] FIG. 5 is a layout view of an exemplary embodiment of a TFT panel according to the present invention, FIG. 6 is a layout view of an exemplary embodiment of a color filter panel according to the present invention, FIG. 7 is a layout view of an exemplary embodiment of an LCD according to the present invention, and FIG. 8 is a cross-sectional view cut along line VIII-VIII' of FIG. 7.

[0095] The lower panel **100** as a TFT panel of an LCD panel assembly is configured as will be further described below.

[0096] A pixel electrode **190** made of a transparent conductive material, such as indium tin oxide ("ITO") or indium zinc oxide ("IZO"), is formed on an insulating substrate **110** made of a transparent insulating material such as, but not limited to, glass. The pixel electrode **190** is connected to a TFT. In this structure, the TFT is connected to a gate line **121**, for transmitting a scanning signal, and a data line **171**, for transmitting an image signal, and turns on or off the image signal applied to the pixel electrode **190** in response to the scanning signal applied through the gate line **121**. The pixel electrode **190** includes an aperture pattern including three apertures **191**, **192**, and **193**. The aperture pattern divides the liquid crystal layer **3** into a plurality of domains with a common electrode aperture pattern, as will be further described below. The pixel electrode aperture pattern may include an incision intersecting the pixel electrode **190** in a generally angular direction with respect to a direction of the gate lines **121** and the data lines **171**, as shown by apertures **191** and **193**. The pixel electrode aperture pattern may further include an incision intersecting the pixel electrode **190** in a generally perpendicular direction to the data line **171**, as shown by aperture **192**. Aperture **192** may further include a V-shaped portion opening up in the direction of an adjacent data line **171**. While a particular aperture pattern has been illustrated, alternate pixel electrode aperture patterns would also be within the scope of these embodiments.

[0097] A lower polarizer **12** is provided on a bottom surface of the insulating substrate **110**, and an upper polarizer **22** is provided on an upper surface of the insulating substrate **210**. In reflective type LCDs, the pixel electrode **190** may be made of different materials instead of the transparent material, and the lower polarizer **12** would be unnecessary.

[0098] Next, the upper panel **200** as a color filter panel is configured as will be further described below.

[0099] As shown in FIG. 6, a black matrix **220** for preventing light leakage, R, G, and B color filters **230**, and a common electrode **270** made of a transparent conductive material such as ITO or IZO, are formed on an insulating substrate **210** made of a transparent insulating material such as, but not limited to, glass. The common electrode **270** includes an aperture pattern including three apertures **271**, **272**, and **273**. The aperture pattern may include an incision intersecting the common electrode **270** in a generally angular direction with respect to a direction of the gate lines **121** and the data lines **171**. For example, the common electrode aperture pattern may include an incision shown as aperture **272** having a V-shape larger than the V-shape of the pixel electrode aperture **192**. The common electrode aperture pattern may further include an incision shown as aperture **271** parallel to one side of the V-shape pattern, and another incision shown as aperture **273** parallel to another side of the V-shape pattern. While the pixel electrode and the common electrode are spaced apart in a thickness direction by the liquid crystal layer **3**, the pixel electrode aperture pattern and the common electrode aperture pattern are also spaced apart in a horizontal direction as shown by example in FIG. 7. While a particular pattern has been illustrated, alternate common electrode aperture patterns would also be within

the scope of these embodiments. The black matrix **220** may be formed on an overlap portion of the apertures **271**, **272**, and **273** and the color filters **230**, as well as around the pixel region for preventing the light from leaking through the apertures **271**, **272**, and **273**.

[0100] Hereinafter, the TFT panel **100** will be further described.

[0101] A plurality of gate lines **121** and a plurality of storage electrode lines **131**, extending substantially in a horizontal direction, are formed on the insulating substrate **110** of the TFT panel **100**.

[0102] Each gate line **121** includes a plurality of gate electrodes **124** protruding downwardly from the gate line **121** and each gate line **121** includes an end portion **125** having a relatively large dimension to be connected to an external device.

[0103] Each storage electrode line **131** includes plural sets of storage electrodes **133a**, **133b**, and **133c**. Among a set of the storage electrodes, two storage electrodes **133a** and **133b** extend in a vertical direction generally parallel to the data lines **171** and are connected to the remaining storage electrode **133c** that extends in a horizontal direction generally parallel to the gate lines **121** and the storage electrode lines **131**. The storage electrode **133c** may be located generally half-way between adjacent gate lines **121**, however alternate locations for the storage electrode **133c** are also within the scope of these embodiments. Each storage electrode line **131** may include more than two horizontal lines.

[0104] The gate lines **121** and the storage electrode lines **131** may be made of an aluminum (Al) containing metal, such as Al and/or an Al alloy, a silver (Ag) containing metal, such as Ag and/or a Ag alloy, chrome (Cr), titanium (Ti), tantalum (Ta), molybdenum (Mo), or the like. In this embodiment, the gate lines **121** and the storage electrode lines **131** have a single-layered structure. However, the gate lines **121** and/or the storage electrode lines **131** may have a double-layered structure including two metal layers having different physical properties. In this case, one of the two layers may be made of a low resistivity metal, for example, an Al containing metal or a Ag containing metal, and the other layer may be made of a metallic material having prominent physical and chemical properties such as Cr, Mo, Ti, Ta, etc.

[0105] Preferably, all lateral sides of the gate lines **121** and the storage electrode lines **131** slope by 30° to 80° relative to the surface of the insulating substrate **110**.

[0106] A gate insulating layer **140** made of, by example only, nitride silicon (SiNx), etc., is formed on the gate lines **121** and the insulating substrate **110**, and may also be formed on the storage electrode lines **131** and the storage electrodes **133a**, **133b**, **133c**.

[0107] A plurality of data lines **171**, a plurality of drain electrodes **175**, and a plurality of under-bridge metal pieces **172** are formed on the gate insulating layer **140**. Thus, while the data lines **171** and the gate lines **121** perpendicularly cross over each other, they are insulated from each other by the gate insulating layer **140**. Each data line **171** extends substantially in a vertical direction perpendicularly to the gate lines **121** and includes a plurality of branch-shaped source electrodes **173**, each extending corresponding to

respective gate electrodes **124**. Each under-bridge metal piece **172** is placed on respective gate lines **121**.

[0108] Similar to the gate lines **121**, the data lines **171**, drain electrodes **175**, and under-bridge metal pieces **172** are made of Cr, Al, etc., and may have a single-layered structure or multi-layered structure.

[0109] A plurality of linear semiconductors **151** made of hydrogenated amorphous silicon or the like, are formed under the data lines **171**, as shown in **FIG. 8**, and under the drain electrodes **175**. Each linear semiconductor **151** extends substantially in a vertical direction and includes a plurality of branches, each extending corresponding to respective gate electrodes **124**, source electrodes **173**, and drain electrodes **175**. Each branch forms a TFT channel **154**, as shown in **FIG. 5**.

[0110] A plurality of ohmic contacts **161**, made of silicide or N+hydrogenated amorphous silicon that is highly doped with N-type impurities, are formed between the semiconductors **151** and the data lines **171** and between the drain electrodes **175** and the semiconductors **151**, in order to reduce contact resistance therebetween.

[0111] A passivation layer **180**, made of an inorganic insulating material such as SiN₂, etc., or an organic insulating material such as resin, etc., is formed on the data lines **171**, the drain electrodes **175**, and the under-bridge metal pieces **172**, as well as on the gate insulating layer **140**.

[0112] The passivation layer **180** has a plurality of contact holes **181** and **183**, through which at least partial portions of the drain electrodes **175** and the end portions **179** of the data lines **171** are exposed, respectively. A plurality of contact holes **182**, **184**, and **185** are formed to penetrate the passivation layer **180** and the gate insulating layer **140**, where end portions **125** of the gate lines **121** and partial portions of the storage electrodes **133a** and storage electrode lines **131** are individually exposed.

[0113] A plurality of pixel electrodes **190**, a plurality of contact assistants **95** and **97**, and a plurality of storage bridges **91** are formed on the passivation layer **180**. The pixel electrodes **190**, the contact assistants **95** and **97**, and the storage bridges **91** are made of transparent conductive materials such as ITO, IZO, etc., or opaque conductive materials having good reflectivity, such as Al.

[0114] The pixel electrodes **190** are connected to the drain electrodes **175** through the contact holes **181**. As previously described, three apertures **191**, **192**, and **193** are included in each pixel electrode **190**. The apertures **191** and **193** among the three are formed at 45 degrees to the gate lines **121**, while being perpendicular to each other. The remaining aperture **192** is formed by digging, i.e. incising, from a right vertical side of the pixel electrode **190** toward a left vertical side thereof, in a horizontal direction. An opening of this aperture **192**, formed at the right vertical side of the pixel electrode **190**, is shaped as a funnel.

[0115] Each pixel electrode **190** is substantially symmetrized with respect to a line, parallel to the gate line **121**, that bisects a pixel that is defined by the gate lines **121** and the data lines **171** intersecting each other.

[0116] Each storage bridge **91** is formed on the passivation layer **180**, spanning the gate line **121** to interconnect two storage electrode lines **131** of the adjacent pixel regions. The

storage bridges **91** are connected to the storage electrodes **133a** and the storage electrode lines **131** through the contact holes **184** and **185** penetrating the passivation layer **180** and the gate insulating layer **140**. Also, the storage bridges **91** are overlapped with the under-bridge metal pieces **172**. Accordingly, the storage bridges **91** can electrically interconnect the entire storage electrode lines **131** of the lower insulating substrate **110**. Thus, when any defect is detected in the gate lines **121** or data lines **171**, the storage electrode lines **131** may be used for repairing the defective gate line **121** or data line **171**. Further, when a laser beam is irradiated to repair such a defective line, the under-bridge metal pieces **172** supplement the electrical connection between the gate lines **121** and the storage bridges **91**.

[0117] The contact assistants **95** and **97** are individually connected to the end portions **125** of the gate lines **121** and the end portions **179** of the data lines **171** through the contact holes **182** and **183**.

[0118] As previously described with respect to **FIG. 6**, a black matrix **220** is provided on the upper insulating substrate **210** to prevent light leakage, and RGB color filters **230** are formed on the black matrix **220**. A common electrode **270**, made of a transparent conductive material such as ITO, IZO, etc., is formed on the color filters **230**, with plural sets of apertures **271**, **272**, and **273**.

[0119] As further shown in **FIGS. 6 and 7**, a set of apertures **271**, **272**, and **273** includes oblique portions, parallel to the apertures **191** and **193** of the pixel electrodes **190** formed at 45 degrees with respect to the gate lines **121**, and end portions that are overlapped with sides of the pixel electrodes **190**. The end portions include two vertical end portions and two horizontal end portions. The apertures **191** and **193** of the pixel electrodes **190**, formed at 45 degrees with respect to the gate lines **121**, are provided between the apertures **271** and **272** of the common electrode **270**, and between the apertures **272** and **273** of the common electrode **270**. Other aperture patterns for the pixel electrodes **190** and the common electrode **270** would be within the scope of these embodiments.

[0120] When the above-mentioned TFT panel **100** and color filter panel **200** are assembled, with vertically aligned liquid crystal molecules interposed there between within a liquid crystal layer **3**, an LCD panel assembly is completed.

[0121] In such an LCD panel assembly, a set of apertures **271**, **272**, and **273** of the common electrode **270** and a set of apertures **191**, **192**, and **193** of the pixel electrode **190** divide the pixel electrode **190** into a plurality of sub-areas, particularly eight sub-areas in this embodiment. As shown in **FIG. 7**, each sub-area is substantially long, and thus a length and a width thereof are different.

[0122] The partial liquid crystal layer interposed between a sub-area of the pixel electrode **190** and a corresponding sub-area of the common electrode **270** may be referred to as a "sub-region". Such a sub-region may further be classified into four domains according to the average orientation of the long axes of the liquid crystal molecules when an electric field is generated.

[0123] In this way, the pixel region is divided into a plurality of domains, and the orientation of the liquid crystal molecules within each domain is controlled, enabling the LCD to have wide-viewing angles.

[0124] Meanwhile, the side visibility can be improved by applying different gray voltages to the main-pixels and the sub-pixels. Two important factors influencing the side visibility are the area ratio between the main-pixel and the sub-pixel, and a gamma curve of the sub-pixel.

[0125] The area ratio between the main-pixel and the sub-pixel is a structurally controllable factor. In other words, the area ratio can basically be controlled based on a desirable luminance of the LCD and actual side visibility.

[0126] Therefore, the gamma curve of the sub-pixel is the most important factor for improving the side visibility.

[0127] In general, typical vertical, nematic mode LCDs have poor side visibility. This is because the luminance at the side is higher than that at the front. The luminance increases more rapidly at a medium gray scale where viewer's eyes react most sensibly, degrading the visibility. It should be understood that a gray scale includes the levels of gray ranging from true white to true black. The level of gray, or white or black, is derived from the luminance portion of the signal. Thus, a medium gray scale would be located approximately midway between true white and true black.

[0128] Accordingly, to improve the side visibility efficiently, the gamma curve of the sub-pixel should be set up so that the luminance of the sub-pixel is maintained in considerably low levels, up to the medium gray scale, for example, about 120 in 256 grayscales. That is, in this example, the luminance of a sub-pixel would be nearly zero at the low end of the grayscale, until the gray scale is approximately 120.

[0129] The gamma value of the main-pixel is calculated as follows. First, a target gamma value at the front is set up to be equal to the average gamma value between the main-pixel and the sub-pixel. Thus, a gamma curve representing the front target would be located between gamma curves of the main-pixel and the sub-pixel. Accordingly, the gamma value of the main-pixel is obtained by deducting the gamma value of the sub-pixel from two times the target gamma value. In an alternative embodiment, the gamma value of the sub-pixel may be obtained by deducting the gamma value of the main-pixel from two times the target gamma value.

[0130] Generally, the gamma value K is set up to satisfy the following equation 1:

$$\text{Gamma } K = (\text{current gray scale}/\text{maximum gray scale})^K \quad (\text{Equation 1})$$

[0131] In this embodiment, the gamma curve of the sub-pixel is obtained by controlling the value of K in Equation 1.

[0132] For example, to improve the visibility, when the target gamma curve at the front is a curve where $K=2.4$, the gamma curve of the sub-pixel is set as $K=9$ so that the luminance for the gray scales below 120 is maintained in considerably low values nearly close to 0. In this case, however, a problem arises when the luminance of the main-pixel exceeds a maximum possible luminance of the LCD in the range of higher gray scales of above 200. Accordingly, as shown in FIG. 9, the gamma curve of the main-pixel stops at, and maintains, the maximum gamma level of 1 in the range of gray scales of above 200. In addition, a simulation result curve includes discontinuous points near the gray scale of about 200, and becomes lower than the front target gamma curve beyond the above-men-

tioned discontinuous range of gray scales above 200. These discontinuous points existing in the gamma curve may cause unnatural gray expression. It should be understood that, where the target gamma curve at the front includes a different value for K , then the gamma curve of the main-pixel may reach the maximum gamma level of 1 at a different gray scale. Also, it should be further understood that, while the example includes a gray scale extending to 256, alternate maximum gray scales may be employed.

[0133] If the gamma curve of the sub-pixel is set as a curve of $K \leq 5.5$, the above-mentioned problem can be solved, but the visibility degrades.

[0134] For these reasons, in another embodiment of the present invention, the gamma curve is determined by the following equation 2.

$$\text{Gamma } K = (\text{current gray scale}/\text{maximum gray scale})^f \quad (\text{Equation 2})$$

[0135] $f(\text{Gray Scale}) = a \times (\text{maximum gray scale}/\text{current gray scale})$,

[0136] wherein a is a constant.

[0137] According to the equation 2, the exponent f has a minimum value a at the maximum gray scale, when the current gray scale equals the maximum gray scale such that $a \times 1 = a$. Also, the exponent f increases as the gray scale level becomes smaller. Thus, the exponent f is not constant. Accordingly, the luminance for the gray scales below 120 is maintained in low levels nearly close to 0, but the luminance for the gray scales exceeding 120 forms a more slowly increasing curve than the gamma curve resulting from the equation 1.

[0138] FIG. 10 shows gamma curves when $a=4.3$ in equation 2. For comparison, the gamma curves of the main-pixel and the sub-pixel of FIG. 9 are individually represented as dotted lines in this figure. While $a=4.3$ in this embodiment, it should be understood that alternate constants may be selected for equation 2.

[0139] As illustrated in FIG. 10, in the gamma curve of the sub-pixel (indicated by the alternating short and long dashed line), the luminance is maintained in low levels nearly close to 0 for the gray scales below 120, but rises for the gray scales exceeding 120. At this gamma curve for the sub-pixel, the rising slant is duller than that of FIG. 9. For example, the exponent values f within the equation 2 for the gray scales of 120 and 200 when $a=4.3$, are calculated as follow.

$$f(120) = 4.3 \times (256/120) = 9.17$$

$$f(200) = 4.3 \times (256/200) = 5.5$$

[0140] The obtained values correspond to $K=9.17$ and $K=5.5$ in equation 1. Thus, the exponent value varies with respect to the current gray scale. The minimum value of the exponent is equal to a constant used in the equation 2 for deriving the exponent value, and the constant is employed as the exponent value when the current gray scale is equal to the maximum gray scale. The exponent increases as the current gray scale decreases. Accordingly, the gamma curve of the main-pixel for all the gray scales may exist within the maximum gamma level. As mentioned in the above, the gamma curve of the sub-pixel, based on equation 2, does not create any visually perceptible discontinuities and improves the side visibility. As a result, the viewing angle of the LCD becomes wider.

[0141] The present invention should not be considered limited to the particular examples described above, but rather should be understood to cover all aspects of the invention as fairly set out in the attached claims. Various modifications, equivalent processes, as well as numerous structures to which the present invention may be applicable will be readily apparent to those of skill in the art to which the present invention is directed upon review of the instant specification. By example only, the aperture patterns formed in the common electrodes and the pixel electrodes may be varied. Other modifications will also be readily apparent to those of skill in the art. Moreover, the use of the terms first, second, etc. do not denote any order or importance, but rather the terms first, second, etc. are used to distinguish one element from another. Furthermore, the use of the terms a, an, etc. do not denote a limitation of quantity, but rather denote the presence of at least one of the referenced item.

What is claimed is:

1. A liquid crystal display comprising:

- a first insulating substrate;
- a second insulating substrate opposed to and spaced from the first insulating substrate;
- a plurality of pixel electrodes formed on the first substrate;
- a common electrode formed on at least one of the first substrate and the second substrate; and
- a liquid crystal layer interposed between the first substrate and the second substrate,

wherein each of the pixel electrodes is divided into a main-pixel electrode and a sub-pixel electrode to form a plurality of main-pixel electrodes and sub-pixel electrodes, to which different signal voltages are individually applied at a same gray scale, and

wherein a signal voltage to be applied to the sub-pixel electrodes is determined by a gamma value satisfying the following equation

$$\text{Gamma } K = (\text{current gray scale} / \text{maximum gray scale})^f$$

where $f(\text{Gray Scale}) = a \times (\text{maximum gray scale} / \text{current gray scale})$,

and a is a constant.

2. The liquid crystal display of claim 1, wherein a gamma value of the main-pixel electrodes is obtained by deducting a gamma value of the sub-pixel electrodes from two times a target gamma value.

3. The liquid crystal display of claim 1, wherein the main-pixel electrodes and the sub-pixel electrodes are alternately arranged, in all lines and all rows.

4. The liquid crystal display of claim 1 further comprising a thin film transistor formed on the first substrate to switch on or off the signal voltage applied to the pixel electrodes.

5. The liquid crystal display of claim 1, wherein the main-pixel electrodes and the sub-pixel electrodes have different areas from each other.

6. The liquid crystal display of claim 1, wherein the pixel electrodes and the common electrode each include a domain forming means.

7. The liquid crystal display of claim 6, further comprising:

a plurality of gate lines formed on the first substrate; and
a plurality of data lines insulated from and intersected with the gate lines,

and wherein the domain forming means includes two portions formed at 45 degrees with respect to the gate lines, perpendicular to each other.

8. The liquid crystal display of claim 7, further comprising linearly-shaped apertures within the pixel electrodes and the common electrode as the portions.

9. The liquid crystal display of claim 1, wherein a signal voltage applied to a main-pixel electrode is higher than a signal voltage applied to a sub-pixel electrode at the same gray scale.

10. The liquid crystal display of claim 1, wherein a set of a main-pixel electrode and a sub-pixel electrode function together as a pixel unit and represent one color.

11. A device for driving a display device, the device outputting gate control signals and data control signals after receiving input control signals from an external device, the device outputting image signals for sub-pixels and image signals for main-pixels after receiving input image signals from an external device,

wherein the image signals for the main-pixels are determined by a gamma value satisfying the following equation:

$$\text{Gamma } K = (\text{current gray scale} / \text{maximum gray scale})^f$$

where $f(\text{Gray Scale}) = a \times (\text{maximum gray scale} / \text{current gray scale})$,

and a is a constant.

12. The device of claim 11, further including a lookup table for storing the image signals for the main-pixels and the image signals for the sub-pixels relative to all image signals used in the display device, the device detecting the image signals for the sub-pixels and the image signals for the main-pixels relative to input image signals from the lookup table, and outputting the detected image signals.

13. The device of claim 11, wherein a gamma value determining the image signals for the main-pixels is obtained by deducting the gamma value determining the image signals for the sub-pixels from two times a target gamma value.

14. A liquid crystal display comprising:

- a first insulating substrate;
- a gate line formed on the first substrate with a gate electrode;
- a gate insulating layer formed on the gate line;
- an amorphous silicon layer formed on the gate insulating layer;
- an ohmic contact formed on the amorphous silicon layer;
- a data line formed on the gate insulating layer, of which at least a partial portion includes a source electrode formed on the ohmic contact;
- a drain electrode opposite the source electrode, of which at least a partial portion is placed on the ohmic contact;

a passivation layer formed on the data line and the drain electrode;

a pixel electrode formed on the passivation layer and connected to the drain electrode;

a second insulating substrate opposite the first insulating substrate;

a common electrode formed on the second substrate;

a first domain forming means formed on at least one of the first substrate and the second substrate; and

a second domain forming means formed on at least one of the first substrate and the second substrate to divide a pixel region into a plurality of sub-domains in cooperation with the first domain forming means,

wherein the pixel electrode is divided into a main-pixel electrode and a sub-pixel electrode, to which different signal voltages are individually applied at the same gray scale, and

wherein the signal voltage for the main-pixel electrode is determined by a gamma value satisfying the following equation

$$\text{Gamma } K = (\text{current gray scale} / \text{maximum gray scale})^f$$

where $f(\text{Gray Scale}) = a \times (\text{maximum gray scale} / \text{current gray scale})$,

and a is a constant.

- 15.** A liquid crystal display comprising:
- a plurality of pixel electrodes divided into main-pixel electrodes and sub-pixel electrodes, to which different signal voltages are individually applied at a same gray scale, and
 - a signal voltage applied to the sub-pixel electrodes determined by a gamma value $\text{Gamma } K = (\text{current gray scale} / \text{maximum gray scale})^f$ wherein exponent f is not a constant.
- 16.** The liquid crystal display of claim 15, wherein f varies with respect to current gray scale.
- 17.** The liquid crystal display of claim 16, wherein a minimum value of f occurs at the maximum gray scale.
- 18.** The liquid crystal display of claim 15, wherein f is determined by an equation $f(\text{gray scale}) = a \times (\text{maximum gray scale} / \text{current gray scale})$, wherein a is a constant.
- 19.** The liquid crystal display of claim 15, wherein a gamma value of the main-pixel electrodes is obtained by deducting a gamma value of the sub-pixel electrodes from twice a target gamma value.
- 20.** The liquid crystal display of claim 15, wherein the sub-pixel electrodes have a different size than the main-pixel electrodes.
- 21.** The liquid crystal display of claim 15, wherein a signal voltage applied to a main-pixel electrode is higher than a signal voltage applied to a sub-pixel electrode at the same gray scale.

* * * * *

专利名称(译)	液晶显示器及其驱动装置		
公开(公告)号	US20060097971A1	公开(公告)日	2006-05-11
申请号	US11/259897	申请日	2005-10-27
[标]申请(专利权)人(译)	李具俊表 YEO JANG HYUN 朴宰亨 金宇CHUL CHO安贞焕		
申请(专利权)人(译)	李准杓 YEO JANG-HYUN 朴宰亨 金雨哲 CHO JUNG-HWAN		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	LEE JUN PYO YEO JANG HYUN PARK JAE HYOUNG KIM WOO CHUL CHO JUNG HWAN		
发明人	LEE, JUN-PYO YEO, JANG-HYUN PARK, JAE-HYOUNG KIM, WOO-CHUL CHO, JUNG-HWAN		
IPC分类号	G09G3/36		
CPC分类号	G02F1/1393 G02F2001/134345 G09G3/2074 G09G3/2077 G09G3/3648 G09G2320/0276		
优先权	1020040089646 2004-11-05 KR		
其他公开文献	US7573453		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示器包括第一和第二相对隔开的绝缘基板，形成在第一基板上的像素电极，形成在第一和第二基板中的至少一个上的公共电极，以及插入第一基板和第二基板之间的液晶层基质。在该结构中，每个像素电极被分成主像素电极和子像素电极，不同的信号电压以相同的灰度分别施加到主像素电极和子像素电极。此外，要施加到子像素电极的信号电压由满足以下等式的伽马值确定： $\text{Gamma } K = (\text{当前灰度}/\text{最大灰度})^f F(\text{灰度}) = a \times (\text{最大灰度}/\text{当前灰度})$ ，其中a是常数。

