



US 20060082712A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2006/0082712 A1**
Moon et al. (43) **Pub. Date: Apr. 20, 2006**(54) **DISPLAY PANEL AND LIQUID CRYSTAL
DISPLAY INCLUDING SIGNAL LINES**(30) **Foreign Application Priority Data**

Dec. 30, 2002 (KR)..... 2002-87435

(76) Inventors: **Sung Jae Moon**, Seoul (KR);
Dong-Gyu Kim, Yongin-city (KR);
Sang-Soo Kim, Seoul (KR)**Publication Classification**Correspondence Address:
CANTOR COLBURN, LLP
55 GRIFFIN ROAD SOUTH
BLOOMFIELD, CT 06002(51) **Int. Cl.**
G02F 1/1343 (2006.01)(52) **U.S. Cl.** 349/139(57) **ABSTRACT**(21) Appl. No.: **11/297,781**(22) Filed: **Dec. 7, 2005****Related U.S. Application Data**(63) Continuation of application No. 10/714,727, filed on
Nov. 17, 2003.

A liquid crystal display includes a plurality of signal lines. The signal lines are parallel to each other in a display area, the distances between the signal lines vary such that the signal lines are arranged like a fan in a fan-out area, and the signal lines are connected to a driving circuit in a connection area. Each signal line includes a single-layered portion and a double-layered portion located in the fan-out area, and the length of the single-layered portion of relatively longer signal line is relatively shorter.

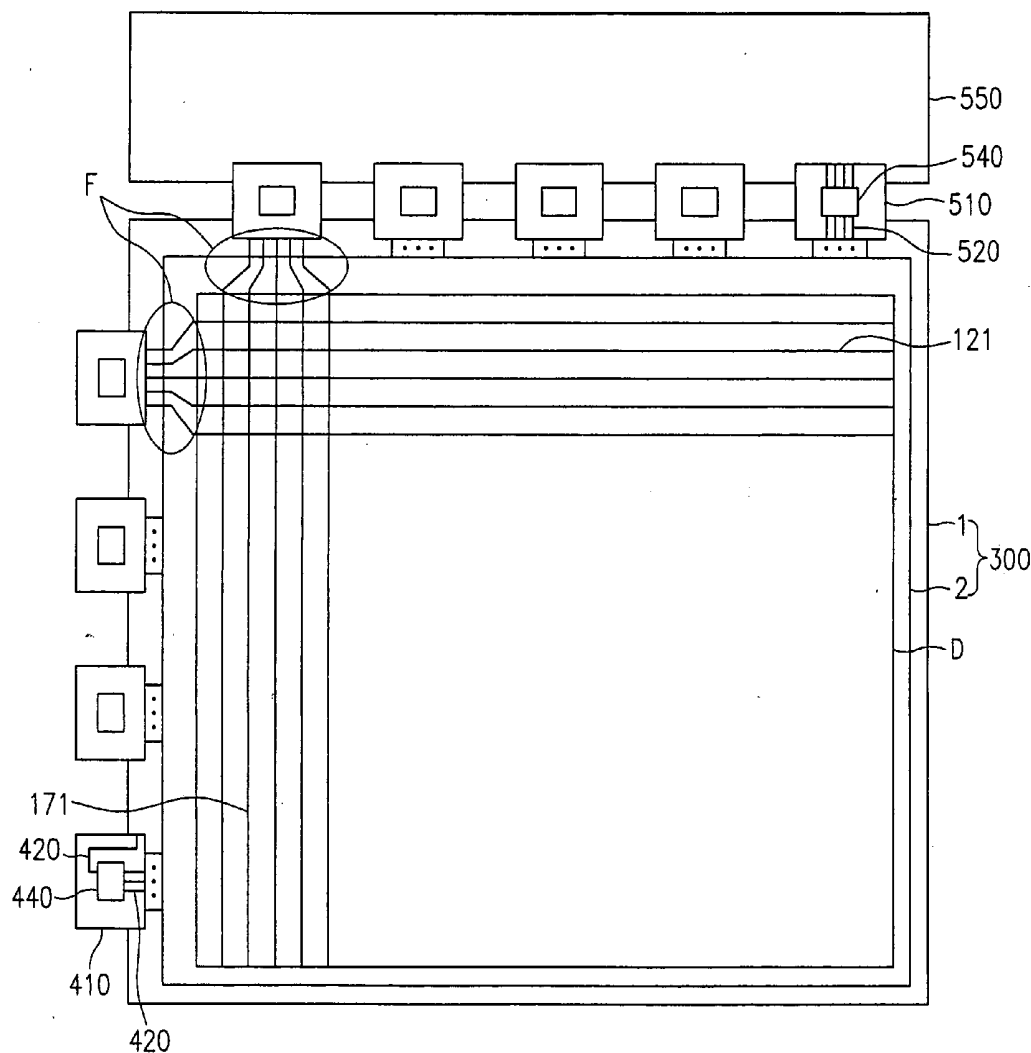


FIG. 2

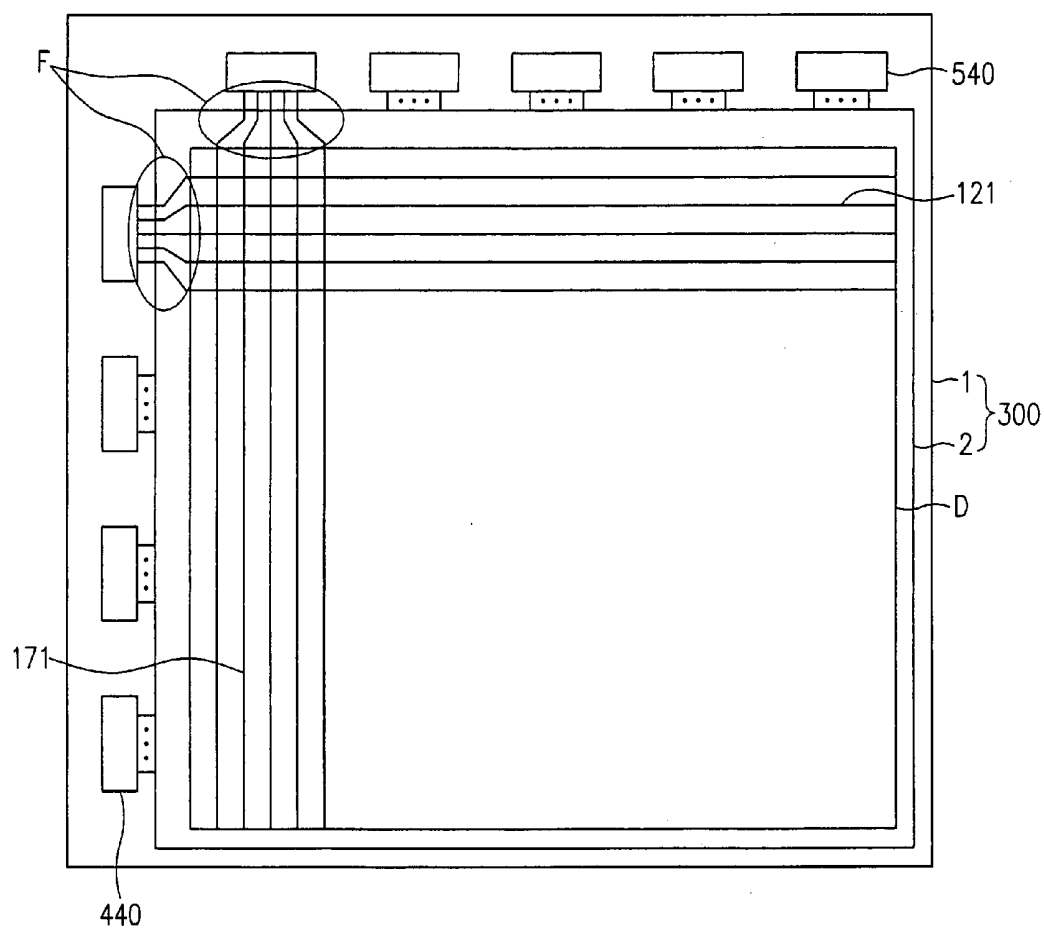


FIG. 3

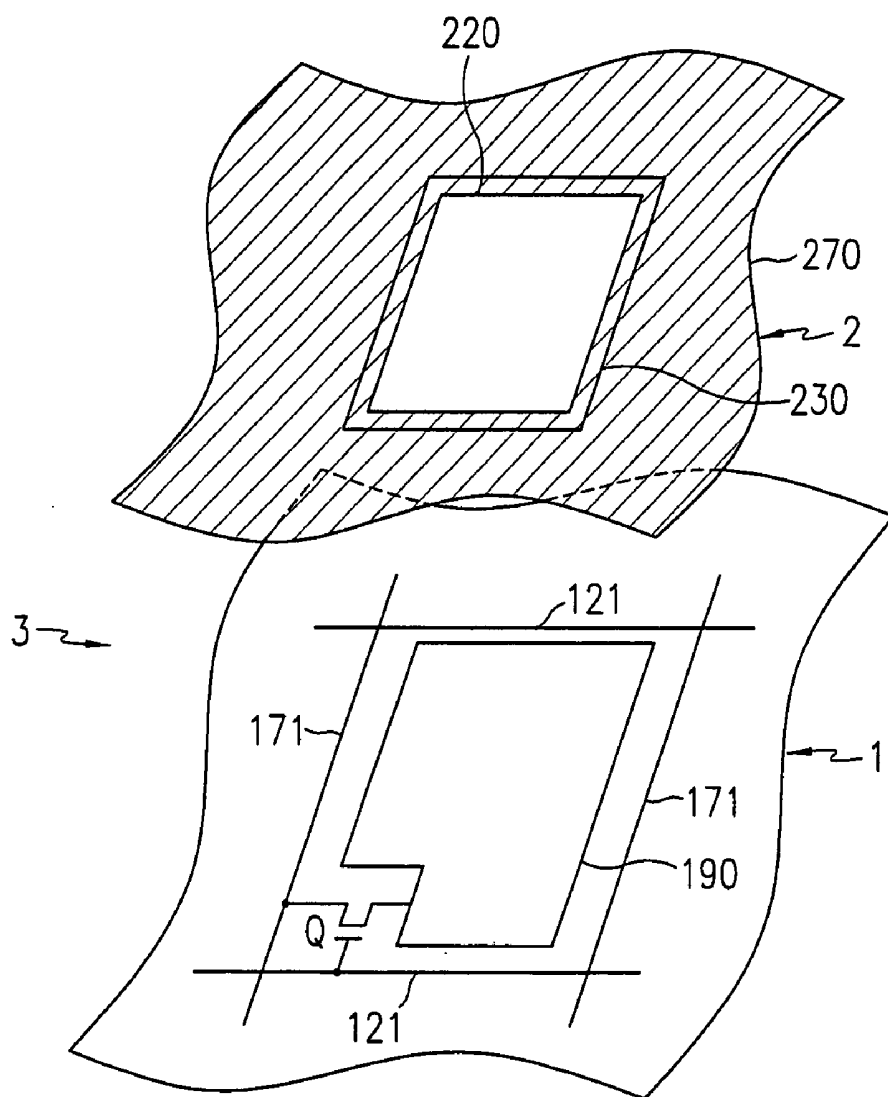


FIG. 4

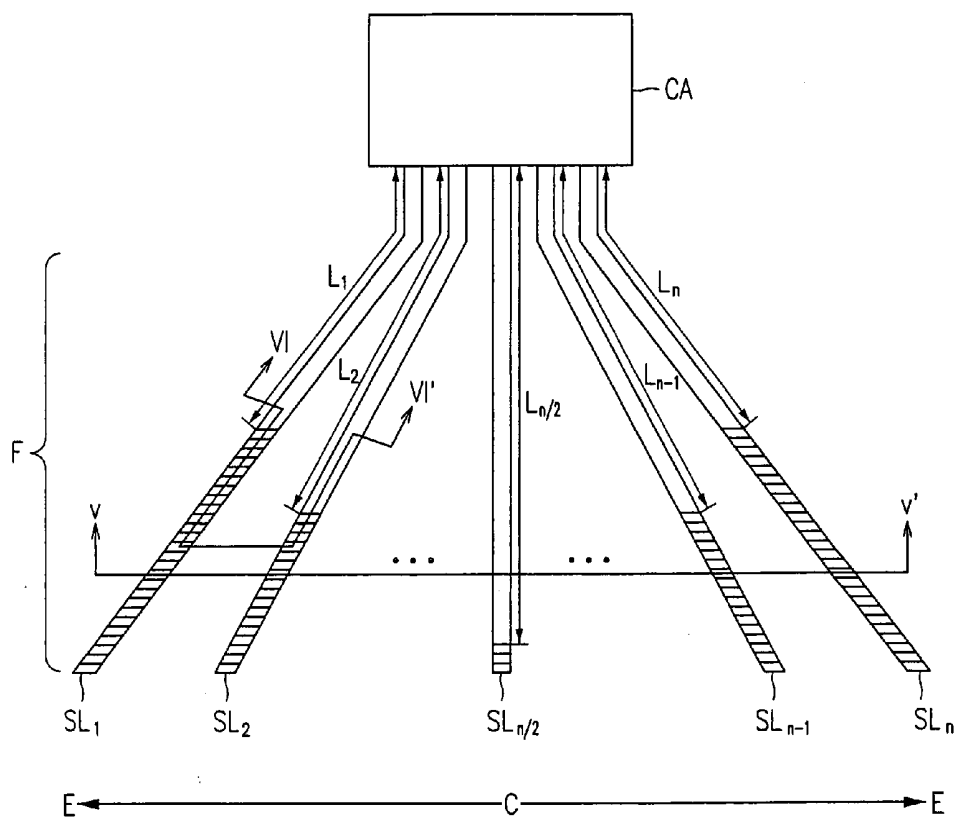


FIG. 5

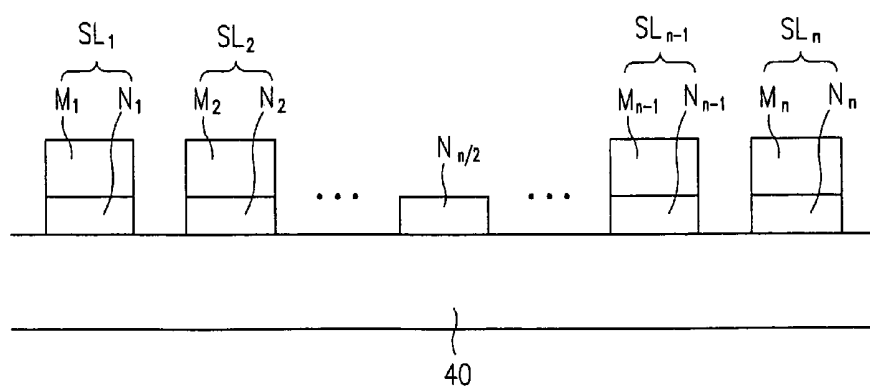


FIG. 6


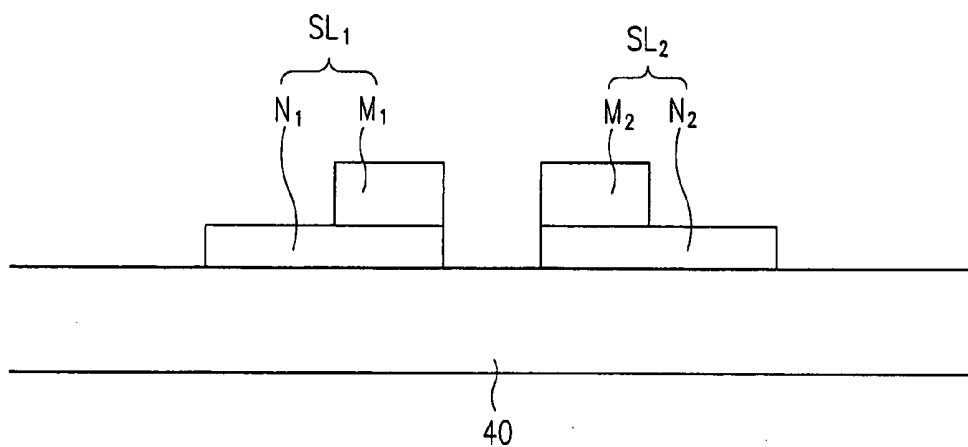


FIG. 7

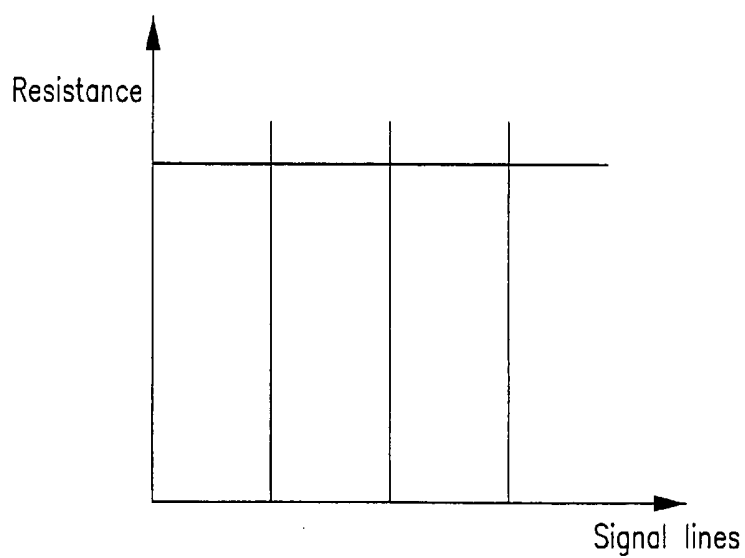

DISPLAY PANEL AND LIQUID CRYSTAL DISPLAY INCLUDING SIGNAL LINES

BACKGROUND OF THE INVENTION

[0001] (a) Field of the Invention

[0002] The present invention relates to a display panel including a plurality of signal line, and particularly to a liquid crystal display including a plurality of lines having different length.

[0003] (b) Description of Related Art

[0004] A display device such as a liquid crystal display (LCD) or an organic electroluminescence (EL) display includes a plurality of pixels as basic elements for displaying an image. Each pixel includes a switching element for independent operation.

[0005] The switching elements include a tri-terminal element including a control terminal, an input terminal, and an output terminal, which is turned on or off in response to a signal applied to the control terminal and selectively transmits a signal entering into the input terminal via the output terminal. For this purpose, a plurality of signal lines for applying the signals to the control terminals and the input terminals of the switching elements and a plurality of driving circuits for supplying the signals to the signal lines are provided at a display device.

[0006] The TFT array panel includes a plurality of scanning signal lines or gate lines for transmitting scanning signals, a plurality of image signal lines or data lines for transmitting image signals, a plurality of TFTs connected to the gate lines and the data lines, a plurality of pixel electrodes connected to the TFTs, a gate insulating layer covering the gate lines for insulation, and a passivation layer covering the TFTs and the data lines for insulation.

[0007] The TFT includes a gate electrode, which is a part of the gate line, a semiconductor layer for a channel, source and drain electrode, which are parts of the data line, a gate insulating layer, and a passivation layer. The TFT is a switching element for transmitting or blocking the image signal from the data line to the pixel electrode in response to the scanning signal from the gate line.

[0008] The driving circuits are located near edges of the display device and connected to end portions of the signal lines, which are clustered in a small area (referred to as "connection area" hereinafter) for the connection. On the contrary, the distances between the signal lines in an area (referred to as "display area") including the pixels have a value determined by the size of the pixels to have larger values than the distances between their end portions connected to the driving circuits. Accordingly, a plurality of fan-out areas in which the distances between the signal lines gradually increase or decrease like a fan are provided between the connection area and the display area.

[0009] Although the signal lines near the center of the fan-out area extends straight without curving, the signal lines closer to edges of the fan-out area have larger curving angles. This configuration of the fan-out area results in the difference in the length between the signal lines such that the line length near the center of the fan-out area is shorter than the line length near the edges of the fan-out area. The length

difference differentiates the resistances of the signal lines, which results in the deteriorated image quality.

[0010] In particular, since a liquid crystal display uses a voltage control scheme which controls voltages applied to the pixels, the voltage difference due to the resistance difference causes a severe problem in image quality.

SUMMARY OF THE INVENTION

[0011] A motivation of the present invention is to reduce resistance difference due to length difference of signal lines.

[0012] A display panel including a plurality of signal lines is provided. Each signal line includes a first portion and a second portion, and the display panel includes a first area including the first portions of the signal lines and a second area including the second portions of the signal lines. The first portions of the signal lines have substantially the same length and the second portions of the signal lines have different lengths. The second portion of each signal line includes a third portion and a fourth portion and the third and the fourth portion include at least one layer. The number of layers in the third portion is smaller than the number of layers in the fourth portion.

[0013] The length of the third portion of each signal line preferably depends on the entire length of the signal line. Preferably, the length of the third portion of relatively longer signal line is relatively shorter, and in particular, the length of the third portion of each signal line is inversely proportional to the entire length of the signal line.

[0014] It is preferable that each signal line further includes a fifth portion for connection with outside, and the display panel further includes a third area including the fifth portions of the signal lines and located opposite the first area with respect to the second area.

[0015] The signal lines may be arranged like a fan in the second area, and the length of the signal line closer to edges of the second area is longer.

[0016] The display panel may further include a driving circuit connected to the signal lines in the third area and supplying signals to the signal lines. The driving circuit is chip-mounted on the display panel or mounted on a separately provided printed circuit. The printed circuit includes a plurality of conductive lines for electrical connection between the driving circuit and an external device, and the conductive lines are connected to the signal lines in the third area.

[0017] Preferably, the third portion of each signal line has a single-layered structure while the fourth portion of each signal line has a double-layered structure.

[0018] A display panel including a plurality of signal lines is provided, the display panel includes: a first area where distances between the signal lines are substantially the same, and a second area where distances between the signal lines vary. Each signal line includes a first portion and a second portion, the first and the second portion of each signals line are located in the second area and include at least one layer, and the number of layers in the first portion is smaller than the number of layers in the second portion.

[0019] It is preferable that the lengths of the signal lines in the second area are different, the length of the first portion

of relatively longer signal line is relatively shorter, and the signal lines are arranged like a fan in the second area.

[0020] Preferably, the display panel further includes a third area located opposite the first area with respect to the second area, and the distances between the signal lines in the third area are shorter than the distances between the signal lines in the first area.

[0021] The display panel may further include a driving circuit connected to the signal lines in the third area and supplying signals to the signal lines.

[0022] A liquid crystal display according to an embodiment of the present invention includes a display area, first and second fan-out areas, and first and second connection areas. The liquid crystal display includes: an insulating substrate; a plurality of gate lines formed on the substrate, each gate line including a connecting portion; a plurality of data lines insulated from the gate lines and intersecting the gate lines in the display area, each data line including a connecting portion; a gate driving circuit connected to the connecting portions of the gate lines in the first connection areas; and a data driving circuit connected to the connecting portions of the data lines in the second connection areas. Each gate line or data line include a lower portion including at least one layer and located in the first or the second fan-out area, and the number of layers in the lower portion is smaller than the number of layers in other portions.

[0023] It is preferable that the length of the lower portion of relatively longer gate line or data line is relatively shorter, and the length of the lower portion closer to a center of the driving circuits is longer.

[0024] Preferably, the liquid crystal display further includes a plurality of thin film transistors connected to the gate lines and the data lines and a plurality of pixel electrodes connected to the thin film transistors.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] The above and other advantages of the present invention will become more apparent by describing preferred embodiments thereof in detail with reference to the accompanying drawings in which:

[0026] **FIG. 1** is a schematic layout view of an LCD according to an embodiment of the present invention;

[0027] **FIG. 2** is a schematic layout view of an LCD according to another embodiment of the present invention;

[0028] **FIG. 3** is a schematic perspective view of an LCD according to another embodiment of the present invention;

[0029] **FIG. 4** is an enlarged layout view of a fan-out area shown in **FIGS. 1 and 2**;

[0030] **FIG. 5** is a sectional view of the fan-out area shown in **FIG. 4** taken along the line V-V';

[0031] **FIG. 6** is a sectional view of the fan-out area shown in **FIG. 4** taken along the line VI-VI'; and

[0032] **FIG. 7** is a graph showing resistances of signal lines in a fan-out area of a panel according to an embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0033] The present invention now will be described more fully hereinafter with reference to the accompanying draw-

ings, in which preferred embodiments of the present invention are shown. The present invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

[0034] In the drawings, the thickness of layers and regions are exaggerated for clarity. Like numerals refer to like elements throughout. It will be understood that when an element such as a layer, region, panel or substrate is referred to as being "on" another element, it can be directly on the other element or intervening elements may also be present. In contrast, when an element is referred to as being "directly on" another element, there are no intervening elements present.

[0035] Now, display panels and liquid crystal displays (LCDs) according to embodiments of the present invention will be described in detail with reference to the drawings.

[0036] **FIG. 1** is a schematic layout view of an LCD according to an embodiment of the present invention, **FIG. 2** is a schematic layout view of an LCD according to another embodiment of the present invention, and **FIG. 3** is a schematic perspective view of an LCD according to another embodiment of the present invention.

[0037] Referring to **FIG. 1**, an LCD according to an embodiment of the present invention includes a liquid crystal panel assembly **300**, a plurality of gate flexible printed circuit (FPC) films **410** and a plurality of data FPC films **510** attached to the panel assembly **300**, and a printed circuit board (PCB) **550** attached to the data FPC film **510**.

[0038] Referring to **FIG. 3**, the panel assembly **300** includes a lower panel **1** and an upper panel **2** facing each other and a liquid crystal layer **3** interposed between the two panels **1** and **2**.

[0039] The upper panel **2** includes a black matrix **220** having a plurality of apertures arranged in a matrix, a plurality of primary color filters **230** such as red, green, and blue color filters disposed in respective apertures in the black matrix **220**, and a common electrode **270** formed on an entire surface of the upper panel. These elements such as the black matrix **220**, the color filters **230**, and the common electrode **270** may be provided on the lower panel **1**.

[0040] The lower panel **1** includes a plurality of pixel electrodes **190** arranged in a matrix, a plurality of switching elements **Q** connected to the pixel electrodes **190**, a plurality of gate lines **121** connected to the switching elements **Q** and transmitting gate signals (also referred to as "scanning signals"), and a plurality of data lines **171** connected to the switching elements **Q** and transmitting data signals.

[0041] The pixel electrodes **190** face the apertures of the black matrix **220** and are preferably made of a transparent conductive material such as indium tin oxide (ITO) and indium zinc oxide (IZO) or of a reflective metal.

[0042] The switching elements **Q** includes three-terminal thin film transistors (TFTs), each switching element **Q** having control and input terminals respectively connected to the gate line **121** and the data line **171** and an output terminal connected to the pixel electrode **190** such that the switching element **Q** selectively transmits the data signals from the data lines **171** responsive to the gate signals from the gate lines **121**.

[0043] Referring back to **FIG. 1**, a plurality of gate driver integrated circuits (ICs) **410** and a plurality of data driver ICs are chip-mounted on the gate FPC films **410** and the data FPC films **510**, respectively. A plurality of leads **420** and **520** for electrical connection to an external device are formed on the FPC films **410** and **510**, respectively.

[0044] Various circuit elements for driving and controlling the panel assembly **300** are provided on the PCB **550**. The circuit elements are connected to the data driver ICs **540** via signal lines (not shown) provided on the PCB **550** and the leads **520** on the data FPC films **510**. The electrical connection between the gate driver ICs **440** and the PCB **550** is made by signal lines (not shown) separately provided on the data PCB **550** and the lower panel **1** and the leads **420** on the gate FPC films **410**.

[0045] Another embodiment shown in **FIG. 2** mounts the driver ICs **440** and **550** directly on the lower panel **1** of the panel assembly **300**, and the gate FPC film is not required. The PCB **550** and the data FPC film **510** are not shown in **FIG. 2** for descriptive convenience.

[0046] According to another embodiment, an additional PCB (not shown) is attached to the gate FPC films **410**, and some circuit elements of the PCB **550** are provided on the additional PCB.

[0047] According to an embodiment of the present invention, the driver ICs **440** and/or **540** are integrated into the lower panel **1**, instead of being chip-mounted.

[0048] Referring to **FIGS. 1 and 2**, the lower panel **1** is divided into a display area D including the array of the pixel electrodes **190**, and a peripheral area located outside the display area D and including the connections between the display signal lines **121** and **171** and the FPC films **410** and **510** (as shown in **FIG. 1**) or the driving ICs **440** and **540** (as shown in **FIG. 2**).

[0049] The display signal lines **121** or **171** are connected to the pixel electrodes **190** through the switching elements Q in the display area and extend substantially parallel to each other. The signal lines **121** and **171** have one ends connected to the FPC films **410** and **510** or the driver ICs **440** and **540**. As shown in **FIG. 1**, the distance between the leads **420** of the FPC films **410** and **510** for the connection between the driver ICs **440** and **540** and the display signal lines **121** and **171** is smaller than the distance between the signal lines **121** or **171** in the display area D. Similarly, the distance between output terminals of the driver ICs **440** and **540** to be connected to the display signal lines **121** and **171** is smaller, as shown in **FIG. 2**, than the distance between the signal lines **121** or **171** in the display area D. Accordingly, there are a plurality of fan-out areas where the distance between the signal lines **121** or **171** varies such that the signal lines **121** or **171** are arranged like a fan.

[0050] Now, a fan-out area of a panel according to an embodiment of the present invention is described in detail with reference to **FIGS. 4-6**.

[0051] **FIG. 4** is an enlarged layout view of a fan-out area shown in **FIGS. 1 and 2**, **FIG. 5** is a sectional view of the fan-out area shown in **FIG. 4** taken along the line V-V', and **FIG. 6** is a sectional view of the fan-out area shown in **FIG. 4** taken along the line VI-VI'.

[0052] As shown in **FIG. 4**, signal lines SL_1 - SL_n such as gate lines **121** or data lines **171** are arranged like a fan in a fan-out area located between a display area D and a connection area CA. The connection area CA is an area where end portions of the signal lines SL_1 - SL_n are connected to FPC films **410** and **510** or driver ICs **440** and **540**. The signal line such as $SL_{n/2}$ near a center C goes straight without curving. The signal lines, as they are closer to edges E of the fan-out area F, show larger curving angles, and the signal lines SL_1 and SL_n closest to the edges E have the largest curving angles. Therefore, the length of portions of the signal lines SL_1 - SL_n in the fan-out area F and the length of the signal lines SL_1 - SL_n becomes longer as it goes to the edges F from the center C.

[0053] Each of the display signal lines SL_1 - SL_n includes at least one of a lower layer N_1 - N_n and an upper layer M_1 - M_n , which are sequentially deposited on a substrate **40** and made of conductive material such as metal. The two layers N_1 - N_n and M_1 - M_n may have different resistivity. It is preferable that one of the two layers N_1 - N_n and M_1 - M_n are made of low resistivity metal such as Al, Al alloy, Ag and Ag alloy, and the other of the two layers N_1 - N_n and M_1 - M_n are made of Cr, Ti, Ta, Mo or their alloys such as MoW alloy having good physical, chemical and electrical contact characteristics with other materials such as indium tin oxide (ITO) and indium zinc oxide (IZO).

[0054] Referring to **FIGS. 5 and 6**, each signal line SL_1 - SL_n include a single-layered portion L_1 - L_n which extends to the connection area CA. The length of the single-layered portions L_1 - L_n of the signal lines SL_1 - SL_n becomes shorter as the length of the corresponding signal lines SL_1 - SL_n becomes longer. For example, the length of the single-layered portion L_1 - L_n is inverse proportional to the length of the corresponding signal line SL_1 - SL_n .

[0055] As a result, the resistance of the signal lines SL_1 - SL_n in the fan-out area F is uniform. That is, the resistance difference of the length of portions in the fan-out area F or of the entire length of the signal lines SL_1 - SL_n is compensated by making the single-layered portions L_1 - L_n of longer signal lines SL_1 - SL_n shorter, while making those of shorter signal lines SL_1 - SL_n longer since the single-layered portion L_1 - L_n has larger resistance than other portions including two layers N_1 - N_n and M_1 - M_n electrically connected in parallel.

[0056] For example, it is assumed that the length of a portion of a signal line SL_i in a fan-out area F and the length of the single-layered portion L_i of the signal line SL_i are indicated by t_i and s_i , respectively, the resistivities of the lower layer N_i and the upper layer M_i are indicated by ρ_N and ρ_M , respectively, and the areas of the sections of the lower layer N_i and the upper layer M_i are equal and indicated by A.

[0057] The resistance $R_i(\text{single})$ of the single-layered portion L_i of the signal layer SL_i is given by,

$$R_i(\text{single}) = \rho_N \frac{s_i}{A} \quad (1)$$

[0058] The resistance $R_i(\text{double})$ of the remaining double-layered portion of the signal layer SL_i , which equals to the combined resistance of the resistance $R_i(\text{lower})$ of the lower

layer N_i and the resistance $R_i(\text{upper})$ of the upper layer M_i connected in parallel, is given by,

$$R_i(\text{double}) = \frac{1}{1/R_i(\text{lower}) + 1/R_i(\text{upper})} = \frac{\rho_N \rho_M}{\rho_N + \rho_M} \frac{t_i - s_i}{A}. \quad (2)$$

[0059] Accordingly, the total resistance R_i of the portion of the signal line SL_i in the fan-out area F is obtained such that:

$$R_i = R_i(\text{single}) + R_i(\text{double}) = \rho_N \frac{s_i}{A} + \frac{\rho_N \rho_M}{\rho_N + \rho_M} \frac{t_i - s_i}{A}. \quad (3)$$

[0060] Since the resistances of the portions of the signal lines SL_1 - SL_n in the fan-out area F are preferably equal to each other, the lengths s_1 - s_n of the single-layered portion L_1 - L_n of the signal lines SL_1 - SL_n are adjusted such that the resistances R_1 - R_n of all the signal lines given by Equation 3 are the same.

[0061] FIG. 7 is a graph showing resistances of signal lines in a fan-out area of a display panel having a signal line configuration. The line shown in FIG. 2 illustrates that the resistances of all the signal lines are the same. The term "substantially the same" means "the same" if the resistance deviation due to device error of a manufacturing device for manufacturing the signal lines SL_1 - SL_n and/or operation error of the manufacturing device is ignored.

[0062] As described above, the embodiments of the present invention provide dual-layered signal lines for reducing the resistance difference due to the length difference in a fan-out area, thereby effectively removing image deterioration due to the resistance difference.

[0063] Although the embodiments focus on LCDs, the present invention is also applicable to any display devices having fan-out areas.

[0064] While the present invention has been described in detail with reference to the preferred embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

What is claimed is:

1. A display panel including a plurality of signal lines, each signal line including a first portion and a second portion, the display panel comprising:

a first area including the first portions of the signal lines; and

a second area including the second portions of the signal lines,

where the first portions of the signal lines have substantially the same length, the second portions of the signal lines have different lengths, the second portion of each signal line includes a third portion and a fourth portion including at least one layer, and the number of layers in the third portion is smaller than the number of layers in the fourth portion.

2. The display panel of claim 1, wherein the length of the third portion of each signal line depends on the entire length of the signal line.

3. The display panel of claim 2, wherein the length of the third portion of relatively longer signal line is relatively shorter.

4. The display panel of claim 3, wherein the length of the third portion of each signal line is inversely proportional to the entire length of the signal line.

5. The display panel of claim 4, wherein each signal line further comprises a fifth portion for connection with outside, and the display panel further comprises a third area including the fifth portions of the signal lines and located opposite the first area with respect to the second area.

6. The display panel of claim 5, wherein the signal lines are arranged like a fan in the second area.

7. The display panel of claim 6, wherein the length of the signal line closer to edges of the second area is longer.

8. The display panel of claim 5, further comprising a driving circuit connected to the signal lines in the third area and supplying signals to the signal lines.

9. The display panel of claim 8, wherein the driving circuit is chip-mounted on the display panel.

10. The display panel of claim 8, further comprising a printed circuit mounting the driving circuit and including a plurality of conductive lines for electrical connection between the driving circuit and an external device, the conductive lines connected to the signal lines in the third area.

11. The display panel of claim 2, wherein the third portion of each signal line has a single-layered structure and the fourth portion of each signal line has a double-layered structure.

12. A display panel including a plurality of signal lines, the display panel comprising:

a first area where distances between the signal lines are substantially the same, and

a second area where distances between the signal lines vary,

where each signal line includes a first portion and a second portion, the first and the second portion of each signal line are located in the second area and include at least one layer, and the number of layers in the first portion is smaller than the number of layers in the second portion.

13. The display panel of claim 12, wherein the lengths of the signal lines in the second area are different, and the length of the first portion of relatively longer signal line is relatively shorter.

14. The display panel of claim 13, further comprising a third area located opposite the first area with respect to the second area, the distances between the signal lines in the third area being shorter than the distances between the signal lines in the first area.

15. The display panel of claim 14, wherein the signal lines are arranged like a fan in the second area.

16. The display panel of claim 15, further comprising a driving circuit connected to the signal lines in the third area and supplying signals to the signal lines.

17. A liquid crystal display including a display area, first and second fan-out areas, and first and second connection areas, the liquid crystal display comprising:

an insulating substrate;

a plurality of gate lines formed on the substrate, each gate line including a connecting portion;

a plurality of data lines insulated from the gate lines and intersecting the gate lines in the display area, each data line including a connecting portion;

a gate driving circuit connected to the connecting portions of the gate lines in the first connection areas; and

a data driving circuit connected to the connecting portions of the data lines in the second connection areas,

wherein each gate line or data line include a lower portion including at least one layer and located in the first or the second fan-out area, and the number of layers in the

lower portion is smaller than the number of layers in other portions.

18. The liquid crystal display of claim 17, wherein the length of the lower portion of relatively longer gate line or data line is relatively shorter.

19. The liquid crystal display of claim 18, wherein the length of the lower portion closer to a center of the driving circuits is longer.

20. The liquid crystal display of claim 17, further comprising:

a plurality of thin film transistors connected to the gate lines and the data lines; and

a plurality of pixel electrodes connected to the thin film transistors.

* * * * *

专利名称(译)	显示面板和液晶显示器，包括信号线		
公开(公告)号	US20060082712A1	公开(公告)日	2006-04-20
申请号	US11/297781	申请日	2005-12-07
[标]申请(专利权)人(译)	MOON SUNGJ 金东GYU 金相SOO		
申请(专利权)人(译)	MOON SUNGJ 金东GYU 金相洙		
当前申请(专利权)人(译)	MOON SUNGJ 金东GYU 金相洙		
[标]发明人	MOON SUNG JAE KIM DONG GYU KIM SANG SOO		
发明人	MOON, SUNG JAE KIM, DONG-GYU KIM, SANG-SOO		
IPC分类号	G02F1/1343 G02F1/13 G02F1/133 G02F1/1345 G09F9/30		
CPC分类号	G02F1/13452 G02F1/1345		
优先权	1020020087435 2002-12-30 KR		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示器包括多条信号线。信号线在显示区域中彼此平行，信号线之间的距离变化使得信号线在扇出区域中像风扇一样布置，并且信号线在连接中连接到驱动电路区域。每条信号线包括单层部分和位于扇出区域中的双层部分，并且相对较长信号线的单层部分的长度相对较短。

