



(19) **United States**

(12) **Patent Application Publication**
Okumura

(10) **Pub. No.: US 2002/0036728 A1**

(43) **Pub. Date: Mar. 28, 2002**

(54) **LIQUID CRYSTAL DISPLAY DEVICE AND ELECTRONIC APPARATUS INCORPORATING THE LIQUID CRYSTAL DISPLAY**

Publication Classification

(51) **Int. Cl.⁷ G02F 1/1335**
(52) **U.S. Cl. 349/61**

(75) **Inventor: Osamu Okumura, Chino-shi (JP)**

(57) **ABSTRACT**

Correspondence Address:
OLIFF & BERRIDGE, PLC
P.O. BOX 19928
ALEXANDRIA, VA 22320 (US)

The invention provides a transfective liquid crystal display with bright transmissive display. The liquid crystal display includes a liquid crystal cell having a liquid crystal held between a pair of substrates, a translector disposed inside the liquid crystal cell, a backlight disposed outside the liquid crystal cell, and a retardation film disposed between the liquid crystal cell and the backlight. The backlight includes a light guide plate and a light source, a diffusing polarizer disposed on one surface of the light guide plate and a reflector disposed on the other surface. A retardation film, separate from the above retardation film, is provided between the light guide plate and the reflector of the above backlight.

(73) **Assignee: SEIKO EPSON CORPORATION, Tokyo (JP)**

(21) **Appl. No.: 09/949,706**

(22) **Filed: Sep. 12, 2001**

(30) **Foreign Application Priority Data**

Sep. 26, 2000 (JP) 2000-292519

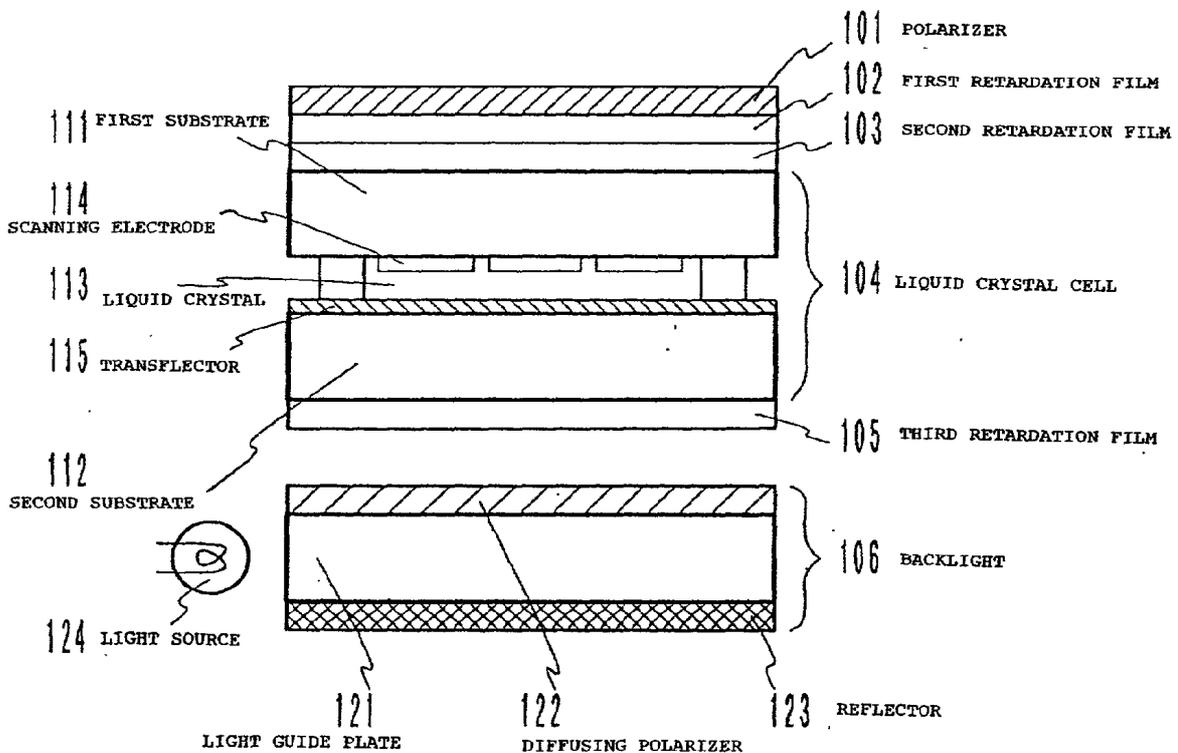


FIG. 1

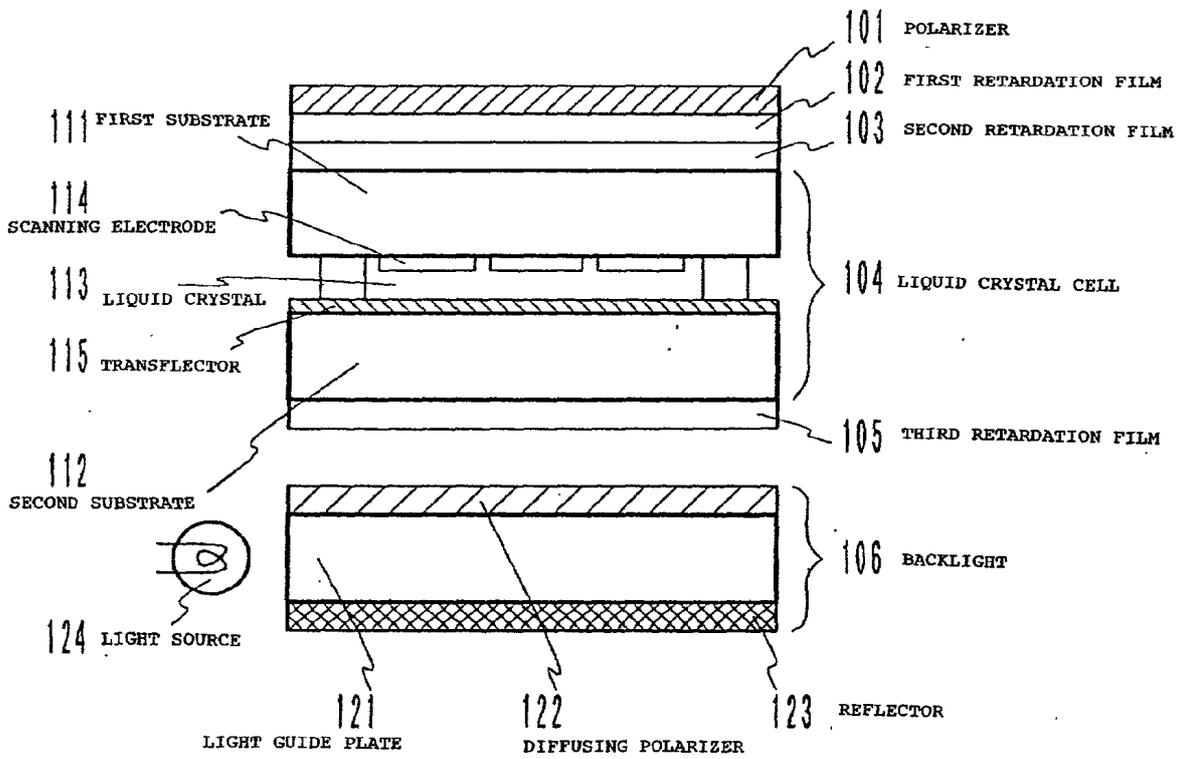


FIG. 2

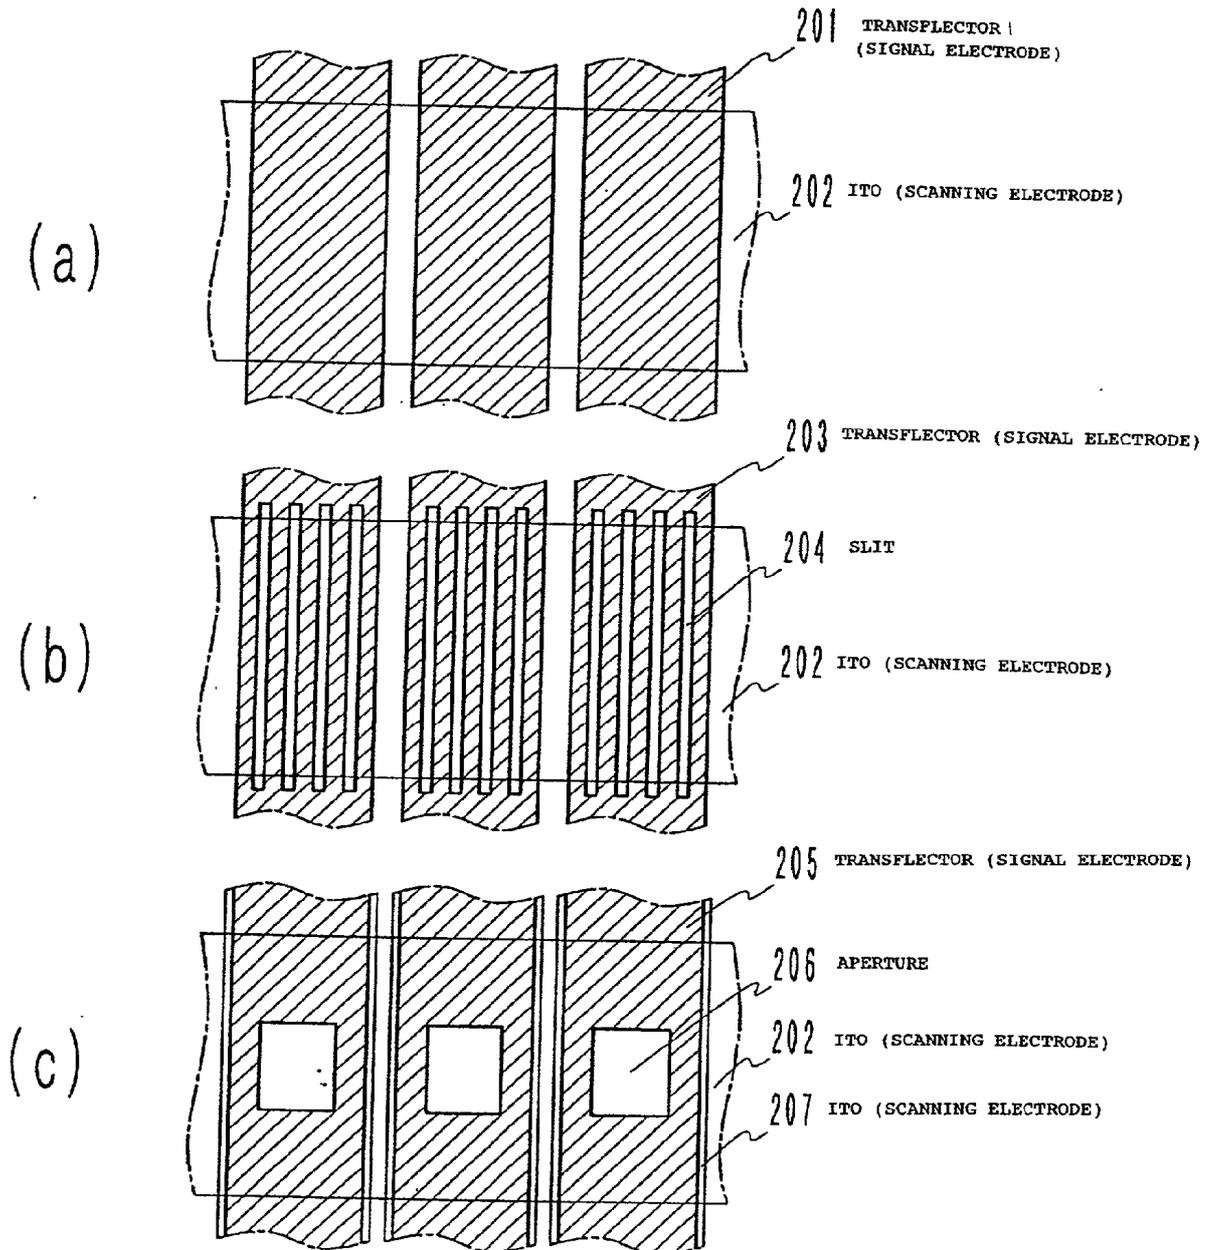


FIG. 3

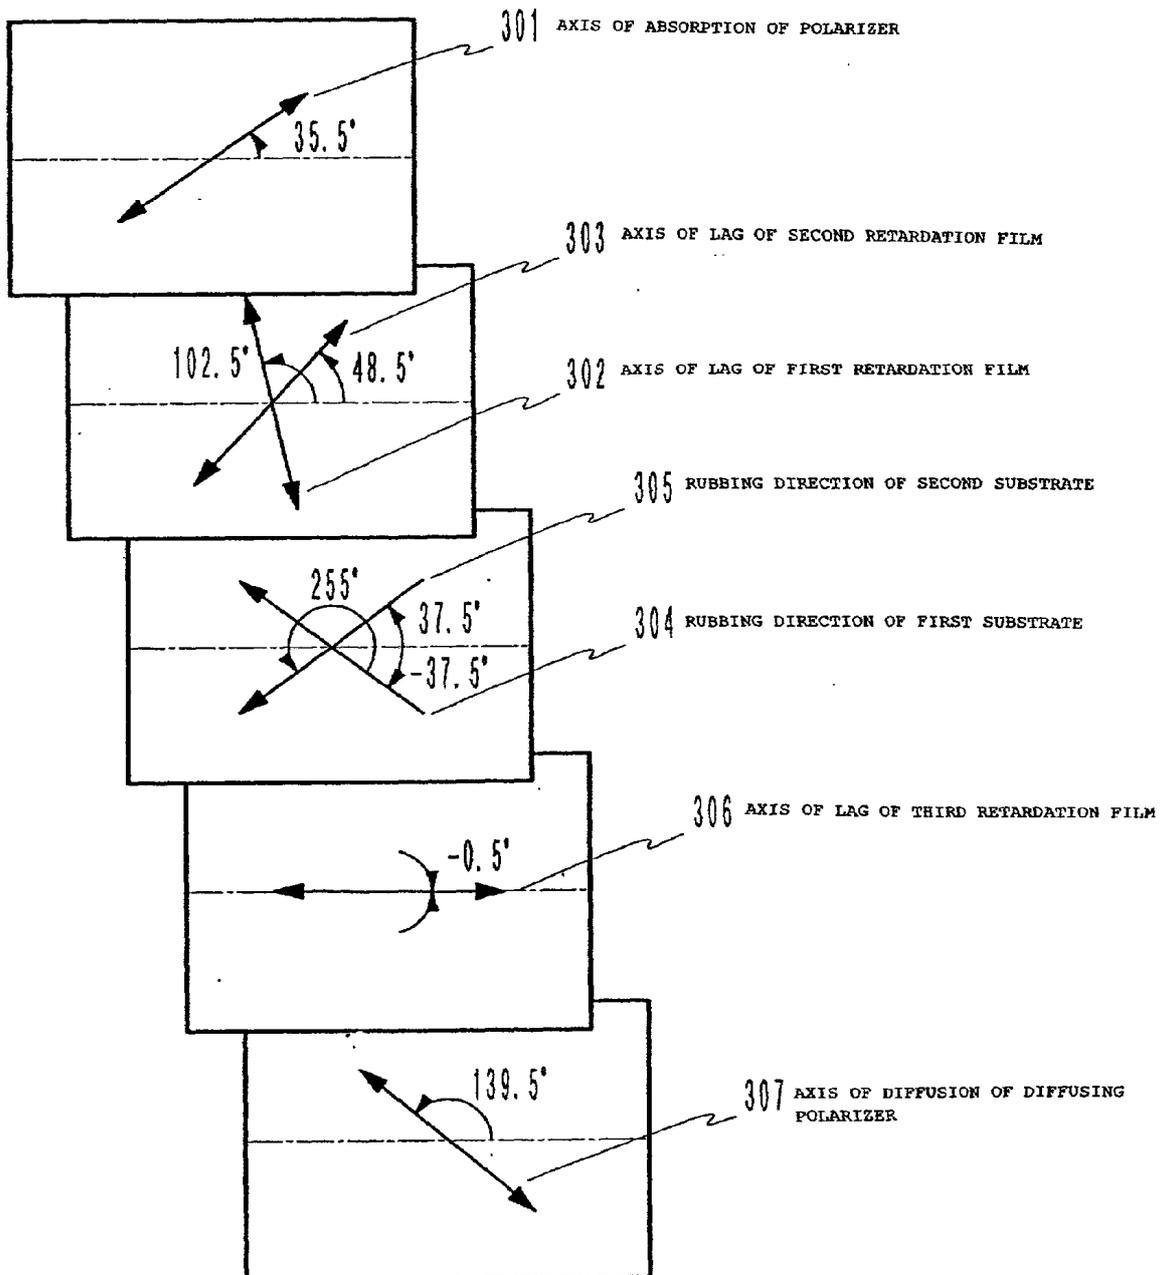


FIG. 4

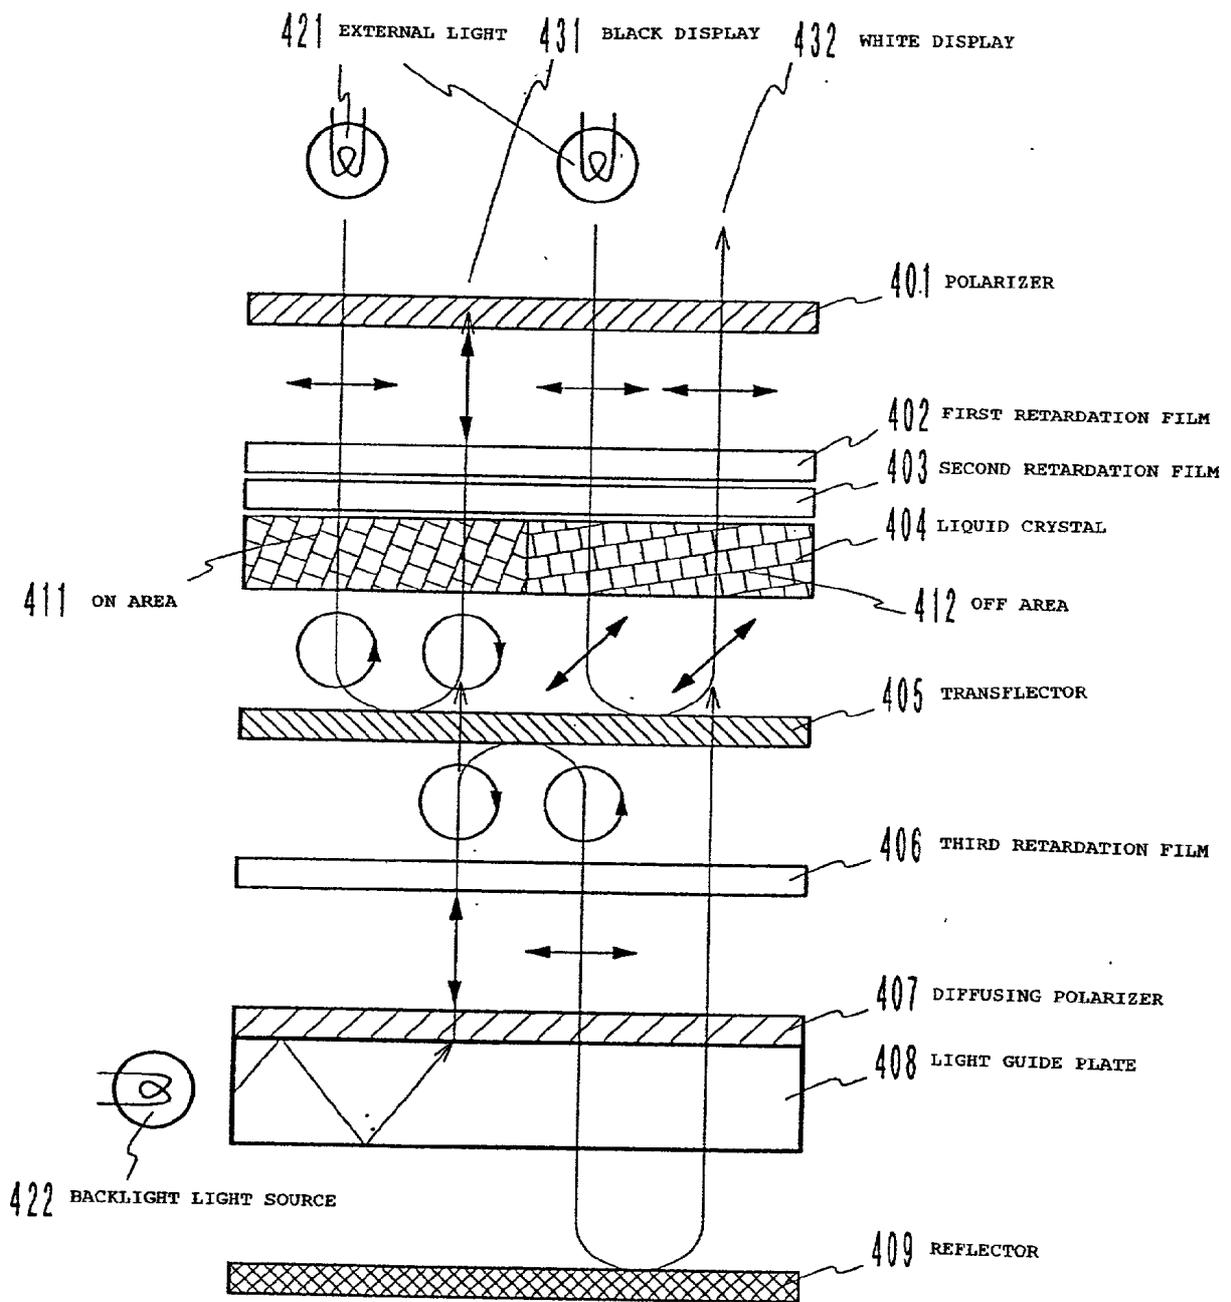


FIG. 5

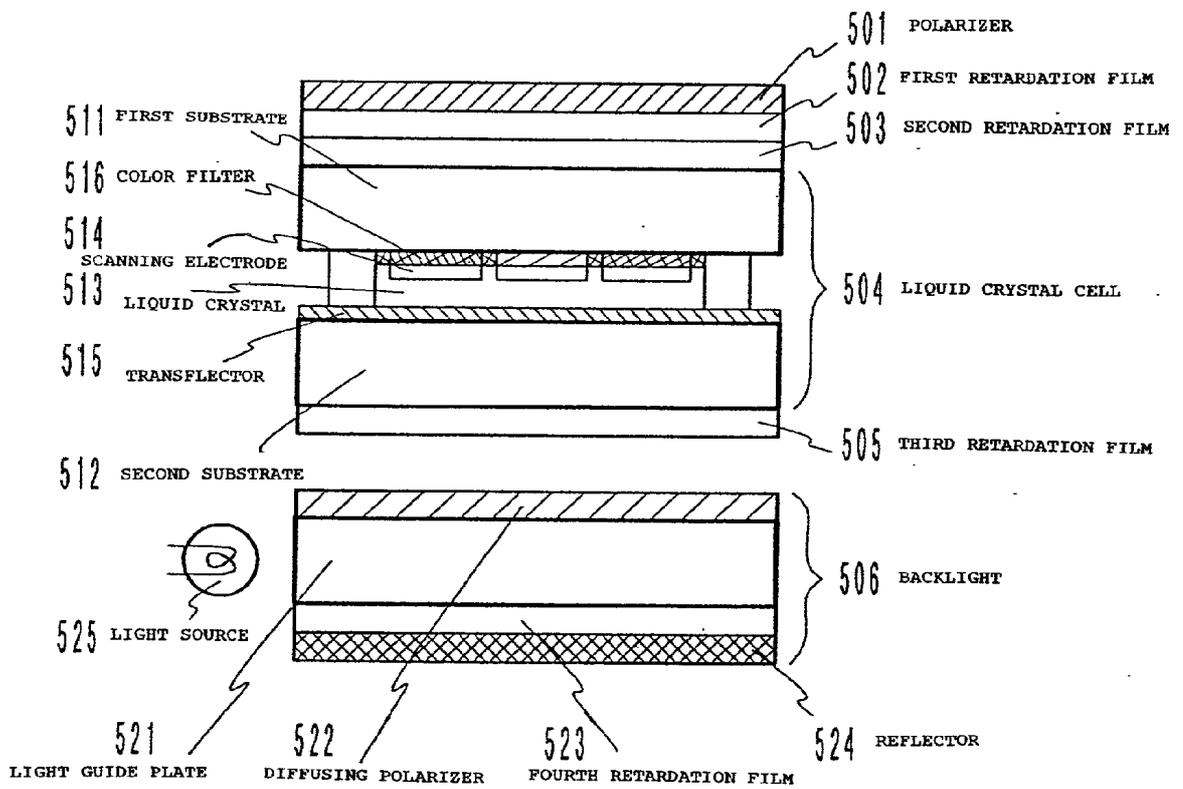


FIG. 6

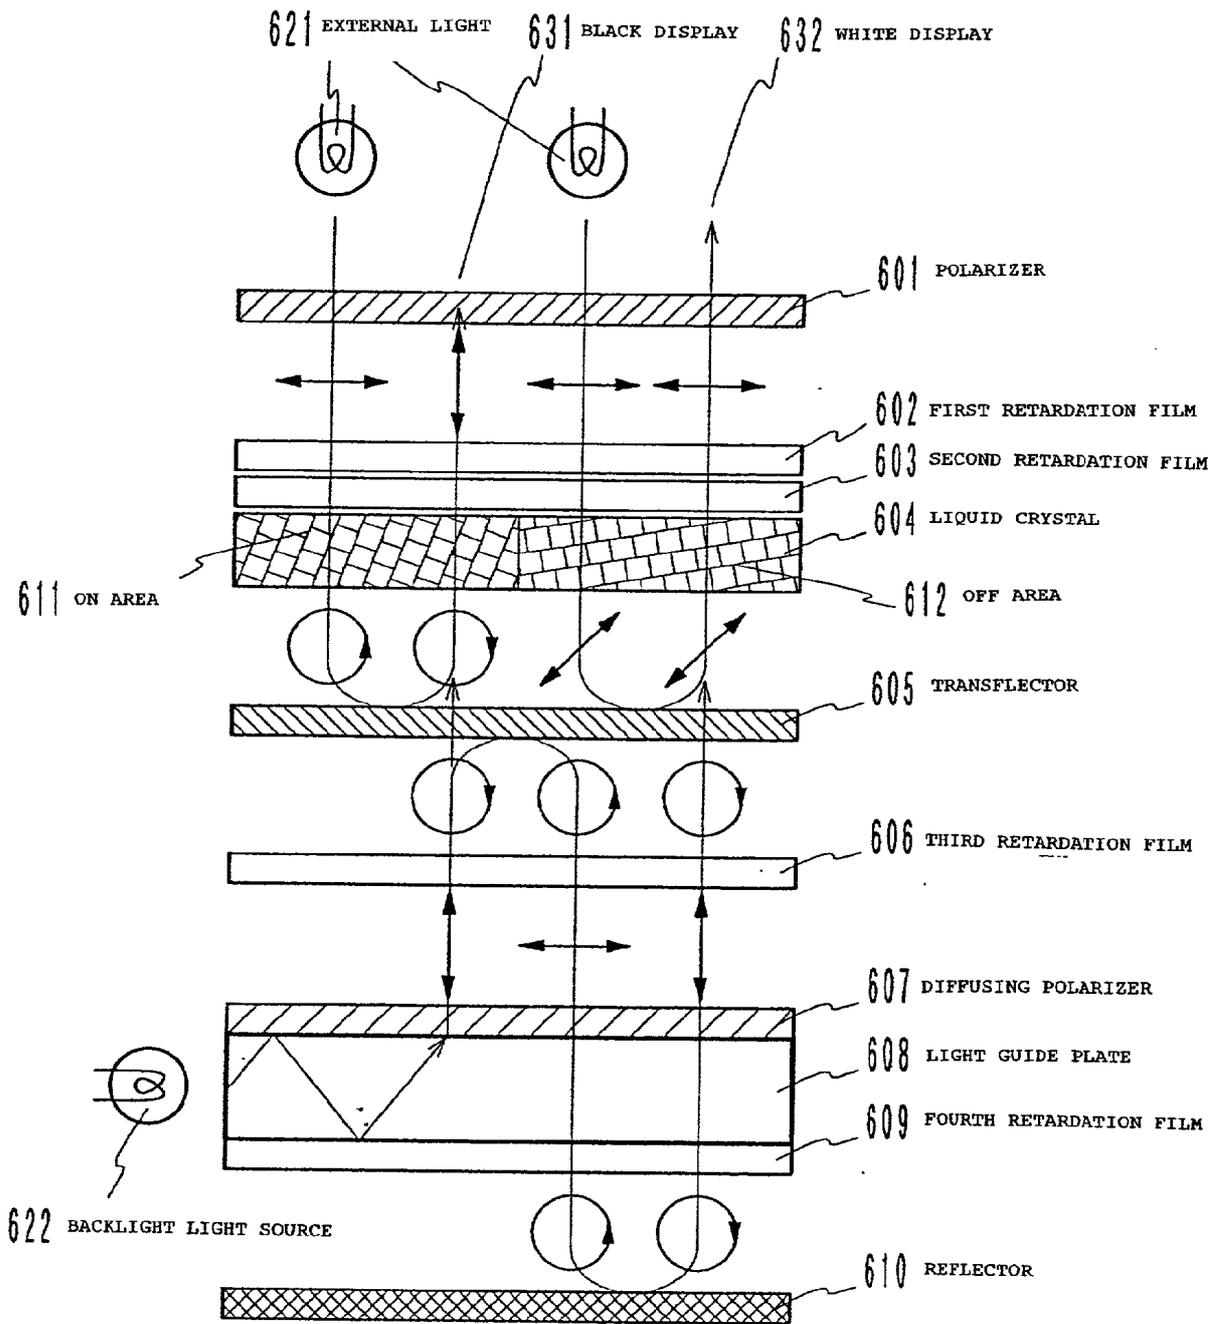


FIG. 7

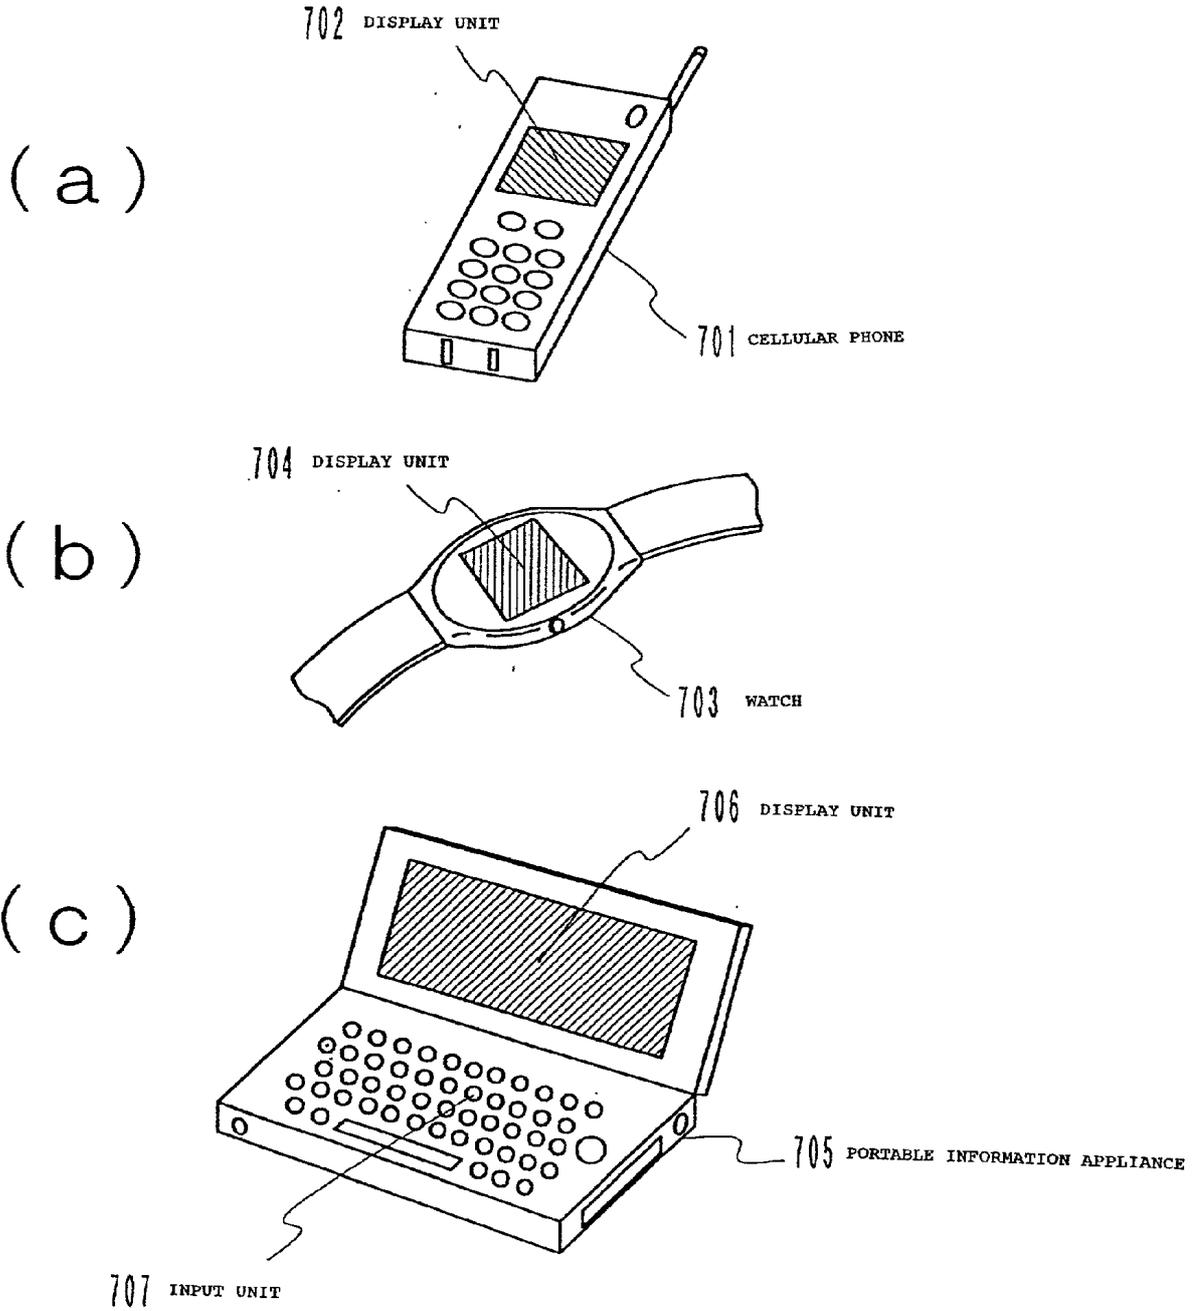


FIG. 8


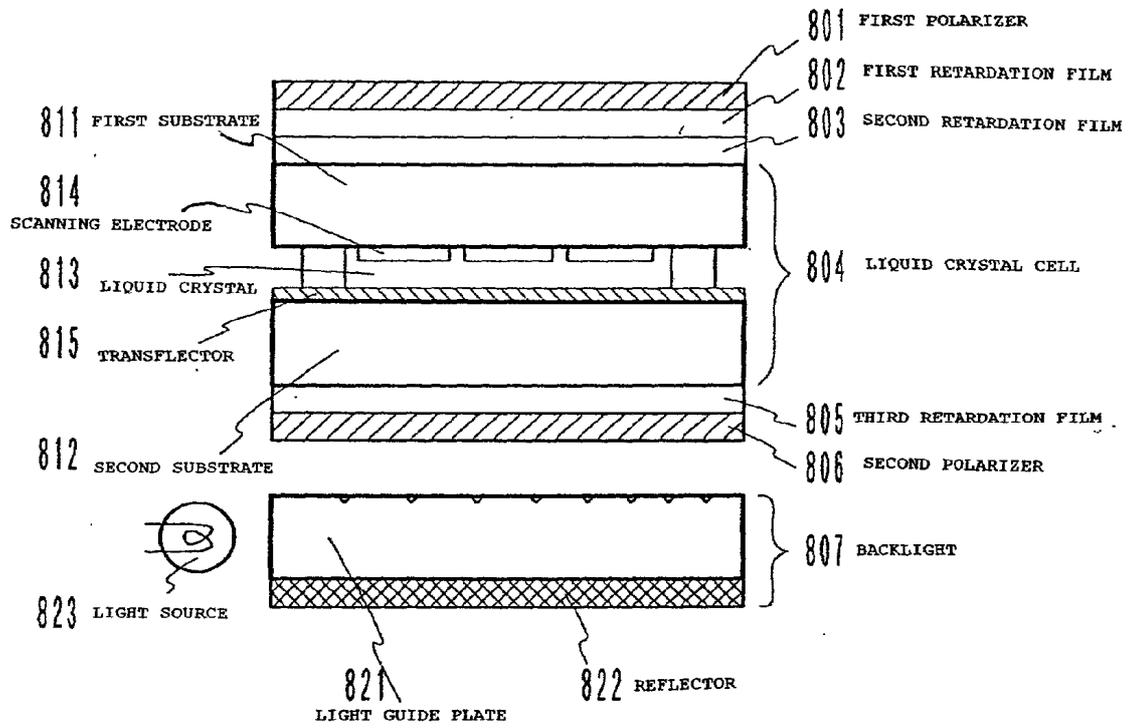


FIG. 9

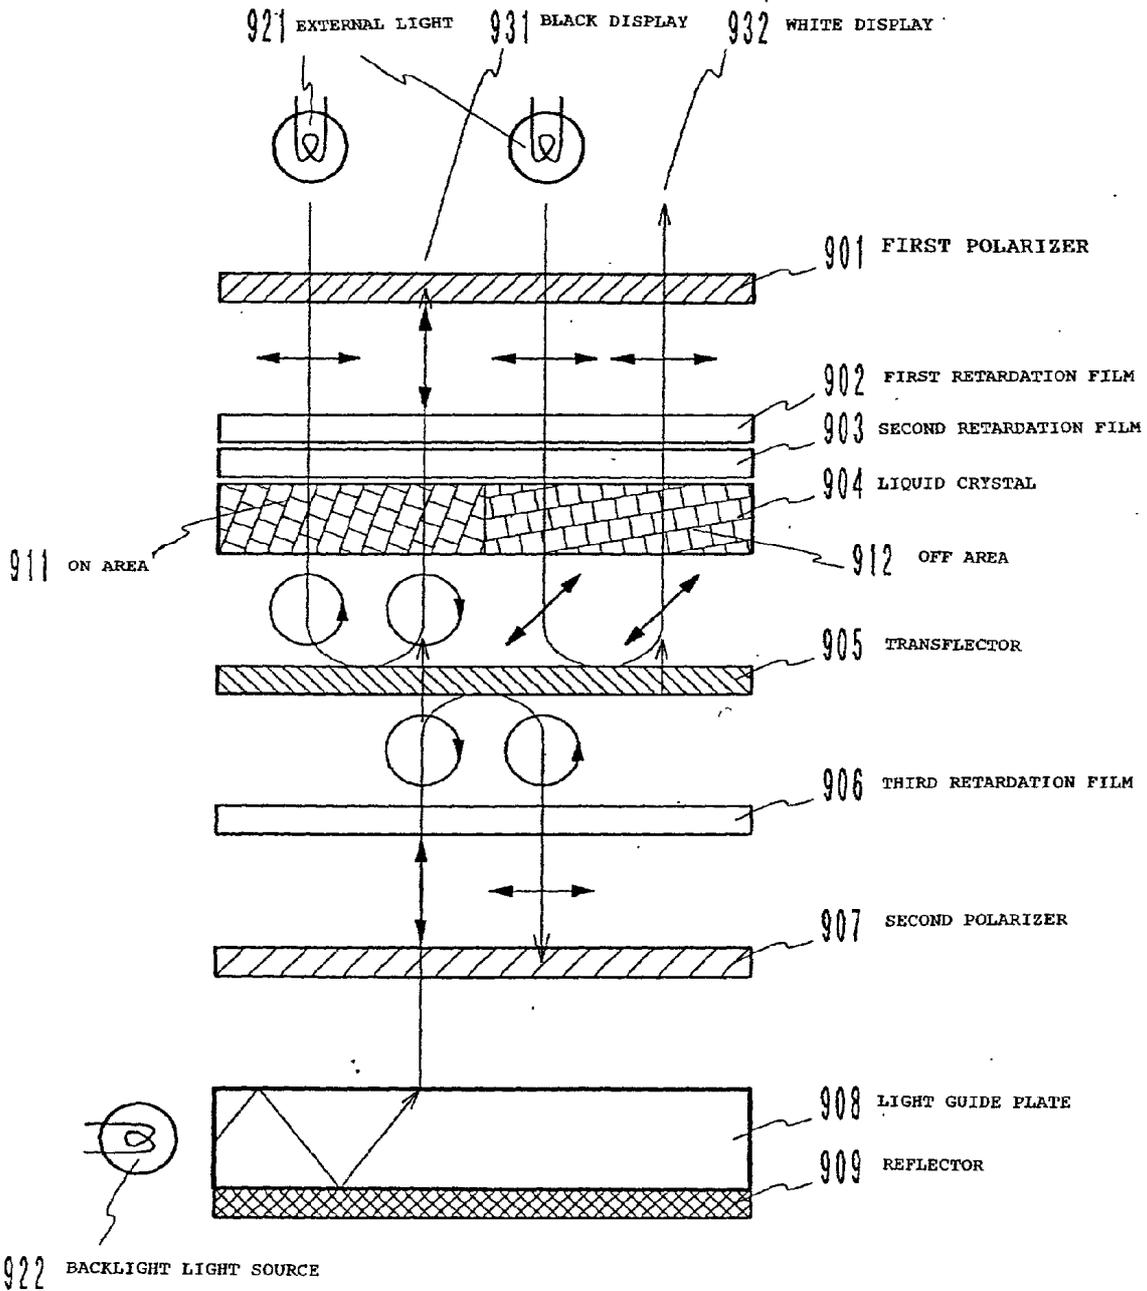

LIQUID CRYSTAL DISPLAY DEVICE AND ELECTRONIC APPARATUS INCORPORATING THE LIQUID CRYSTAL DISPLAY

BACKGROUND OF THE INVENTION

[0001] 1. Field of Invention

[0002] The present invention relates to a liquid crystal display, and more specifically, it relates to a transmissive liquid crystal display which can achieve reflective mode display and the transmissive mode display in a switching manner, and an electronic apparatus incorporating the liquid crystal display.

[0003] 2. Description of Related Art

[0004] Reflective liquid crystal displays that achieve display by making use of the external light cannot be viewed in a dark location. Thus, such a reflective liquid crystal display has been typically used as a transmissive display having an auxiliary light source. Most reflective color liquid crystal displays which have quickly become popular in recent years are also used as transmissive color liquid crystal displays as disclosed, for example, in the following published international application (International Application Number: WO99/40480).

[0005] A configuration of a conventional transmissive liquid crystal display is described below with reference to FIG. 8. FIG. 8 shows a first polarizer 801, a first retardation film 802, a second retardation film 803, a liquid crystal cell 804, a third retardation film 805, a second polarizer 806, and a backlight 807. The liquid crystal cell 804 includes a first substrate 811 and a second substrate 812, a liquid crystal 813, a scanning electrode 814 disposed on an inner surface of the first substrate 811, and a translector 815 which is also used as a signal electrode disposed on an inner surface of the second substrate 812. The backlight 807 includes a light guide plate 821 and a reflector 822, and a light source 823.

[0006] Next, the operating principle of a conventional transmissive liquid crystal display is described below with reference to FIG. 9. FIG. 9 shows a first polarizer 901, a first retardation film 902, a second retardation film 903, a liquid crystal 904, a translector 905, a third retardation film 906, a second polarizer 907, a light guide plate 908, and a reflector 909. FIG. 9 also shows an ON area 911 of the liquid crystal 904, and an OFF area 912 of the liquid crystal 904. In the ON area 911, the selective voltage is applied to the liquid crystal 904, and the tilt angle, i.e., the angle formed between the liquid crystal molecule and the substrate surface, is increased. On the other hand, in the OFF area 912, the non-selective voltage is applied to the liquid crystal 904, and the tilt angle is decreased.

[0007] Firstly, the reflective mode display is described below. An external light 921 is converted into a linearly polarized wave by the first polarizer 901, transmitted through the first retardation film 902, the second retardation film 903 and the liquid crystal 904, and then converted into the circularly polarized wave in the ON area 911, or the linearly polarized wave in the OFF area 912. Thereafter, the light is reflected by the translector 905, transmitted through the liquid crystal 904, the second retardation film 903, and the first retardation film 902, and converted into the linearly polarized wave orthogonal to the incident polarized wave in the ON area 911, absorbed by the polarizer 901 to form a

black display 931, or converted into the linearly polarized wave parallel to the incident polarized wave in the OFF area 912, and transmitted through the polarizer 901 to form a white display 932.

[0008] Next, the transmissive mode display is described below. The light emitted from a backlight light source 922 is diffused by frosting or the like (not shown in the figure) cut in the light guide plate 908 while repeating the total reflection in the light guide plate 908, and emitted to the liquid crystal cell side. This light is converted into the linearly polarized wave by the second polarizer 907, and further converted into the circularly polarized wave by the third retardation film 906. Black can be displayed in the ON area 911, and slightly dark white can be displayed in the OFF area 912 by setting this circularly polarized wave so that it is circularly polarized in the same rotational direction as the circularly polarized wave when the external light incident in the ON area 911 of the liquid crystal in the reflective mode display is reflected by the translector 905, for example, a clockwise circularly polarized wave. On the other hand, the circularly polarized wave reflected downward by the translector 905 becomes counterclockwise circularly polarized, returned to the linearly polarized wave by the third retardation film 906, and then, absorbed by the second polarizer 907.

[0009] However, such a conventional transmissive color liquid crystal display has a problem in that the transmissivity is low. As described above, this is attributable to the fact that the light of the backlight reflected by the translector 905 is absorbed by the second polarizer 907 due to the conversion of the polarized wave by the third retardation film 906. The transmissivity of the translector 905 is only about 5 to 15%, and thus, 85 to 95% of the light is actually wasted.

SUMMARY OF THE INVENTION

[0010] Accordingly, it is an object of the present invention to provide a transmissive liquid crystal display of high transmissivity by recycling the light reflected by the translector to enhance the efficiency of utilization of the light by making use of a backlight having a diffusing polarizer.

[0011] A structure in accordance with the present invention to address the above problem is described below.

[0012] The liquid crystal display in accordance with the present invention includes a liquid crystal cell having a liquid crystal held between a pair of substrates, a translector disposed inside the liquid crystal cell, a backlight disposed outside of the liquid crystal cell, and a retardation film disposed between the liquid crystal cell and the backlight. The backlight includes a light guide plate and a light source. A diffusing polarizer is disposed on one side of the light guide plate, and a reflector is disposed on the other side of the light guide plate. The diffusing polarizer is a polarizer having the function of diffusing a predetermined component of the linearly polarized wave, and allowing the other component of the polarized wave to be transmitted. The retardation film has the function of converting the linearly polarized wave incident therein into the substantially circularly polarized wave, and preferably includes at least one $\frac{1}{4}$ wavelength plate. The diffusing polarizer is preferably adhered to the light guide plate. In the above configuration, the linearly polarized wave is removed from the light guide plate by the diffusing polarizer, and converted into the

circularly polarized wave by the retardation film and incident in the transflector. The light reflected by the transflector is also reflected by the reflector of the backlight, and recycled. Since no member that absorbs the light is present therebetween, most of the light of the backlight is transmitted through the transflector, which achieves a transmissive display that is brighter than a conventional transmissive display.

[0013] The liquid crystal display in accordance with the present invention further includes a retardation film that is disposed between the light guide plate of the backlight and the reflector. This retardation film also has the function of converting the linearly polarized wave incident therein into a substantially circularly polarized wave, and preferably includes at least one $\frac{1}{4}$ wavelength plate. In particular, in the above liquid crystal display, the reflector of the backlight preferably has a reflecting surface that is close to a mirror surface, and disturbs no polarized wave. In the above configuration, the light reflected by the transflector is returned to the same polarized state, and recycled, and thus a bright transmissive display with high contrast can be obtained.

[0014] An electronic apparatus in accordance with the present invention includes the liquid crystal display according to any one of the above aspects of the present invention discussed above. This configuration provides an advantage of achieving a portable electronic apparatus having a long battery life and having a display that is easy to view.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] FIG. 1 is a schematic that shows a structure of a liquid crystal display according to the first embodiment of the present invention;

[0016] FIG. 2(a)-2(c) are schematics that show a structure of a transflector of the liquid crystal display according to the first embodiment of the present invention;

[0017] FIG. 3 is a schematic that shows a cell condition of the liquid crystal display according to the first embodiment of the present invention;

[0018] FIG. 4 is a schematic explaining the operating principle of the liquid crystal display according to the first embodiment of the present invention;

[0019] FIG. 5 is a schematic that shows a structure of a liquid crystal display according to the second embodiment of the present invention;

[0020] FIG. 6 is a schematic explaining the operating principle of the liquid crystal display according to the second embodiment of the present invention;

[0021] FIGS. 7(a)-7(c) are perspective views of examples of electronic apparatus according to the third embodiment of the present invention, wherein

[0022] FIG. 7(a) shows a cellular phone,

[0023] FIG. 7(b) shows a watch,

[0024] FIG. 7(c) shows a portable information apparatus;

[0025] FIG. 8 is a schematic that shows a structure of the liquid crystal display of a conventional technology;

[0026] FIG. 9 is a schematic explaining the operating principle of a conventional liquid crystal display.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0027] The present invention will be further described in detail with reference to the drawings.

[0028] (First Embodiment)

[0029] FIG. 1 is a schematic that shows the structure of the liquid crystal display in accordance with the present invention. In a first embodiment, a passive matrix liquid crystal display is described as an example; however, a similar configuration can also be applied to an active matrix liquid crystal display.

[0030] The configuration will be described with reference to FIG. 1. FIG. 1 shows a polarizer 101, a first retardation film 102, a second retardation film 103, a liquid crystal cell 104, a third retardation film 105, and a backlight 106. The liquid crystal cell 104 includes a first substrate 111 and a second substrate 112, a liquid crystal 113, a scanning electrode 114 disposed on an inner surface of the first substrate 111, a transflector 115 which is also used for a signal electrode disposed on an inner surface of the second substrate 112, or a transflector 115 which is separate from the signal electrode and close thereto. The backlight 106 includes a light guide plate 121, a diffusing polarizer 122 disposed on a surface on the liquid crystal cell 104 side of the light guide plate 121, a reflector 123 disposed on a surface opposite to the surface on which the diffusing polarizer 122 of the light guide plate 121 is disposed, and a light source 124.

[0031] In addition to the components shown in FIG. 1, elements including a liquid crystal alignment layer, upper and lower short-circuit preventive films, an overcoat layer, a spacer ball, a sealant, a black mask, an anti-glare film, a liquid crystal driver IC and a drive circuit may be used; however, these components make FIG. 1 complicated to understand. Since these elements are unnecessary in describing the features of the present invention, the description and illustration thereof are omitted. It should be understood that regular elements can be employed therein.

[0032] Next, each component is described below. The polarizer 101 has the function of absorbing the predetermined linearly polarized wave component and allowing the other polarized wave components to be transmitted therethrough, and can be obtained by adsorbing a two-color substance, such as iodine complex by a polyvinyl alcohol film, and drawing the film. The diffusing polarizer 122 has the function of diffusing the predetermined linearly polarized wave component and allowing the other polarized wave components to be transmitted therethrough. The diffusing polarizer 122 having a structure such that birefringent polymer particles are dispersant in an isotropic polymer, as disclosed in Japanese Unexamined Patent Application Publication No. 11-174231, Japanese Unexamined Patent Application Publication No. 11-509014, Japanese Patent Publication No. 2000-506989 (by PCT Application) and Japanese Patent Publication No. 2000-506990 (by PCT Application), may be used.

[0033] The first retardation film 102 and the second retardation film 103, and the third retardation film 105 can be

formed of an oriented film of a polycarbonate resin or a norbornen resin having a polar group in a molecule, or a polymer liquid crystal film. The third retardation film **105** is an essential element for the present invention; however, the first retardation film **102** and the second retardation film **103** are used to compensate the coloring due to the birefringence of the liquid crystal, and only one of them may be used, or they may be omitted. The third retardation film **105** has the function of converting the linearly polarized wave into the substantially circularly polarized wave, and a $\frac{1}{4}$ wavelength plate having the retardation of about 120-180 nm or a laminate of a $\frac{1}{4}$ wavelength plate and a $\frac{1}{2}$ wavelength plate are suitable therefor.

[0034] The first substrate **111** and the second substrate **112** are formed of a glass substrate or a plastic substrate. However, the liquid crystal display in accordance with the present invention achieves not only reflective mode display, but also transmissive mode display, and both substrates thereof must be transparent in the wavelength range of at least a part of the visible light.

[0035] The liquid crystal **113** is formed of a nematic liquid crystal component twisted by 0° to 300° . The twisted angle thereof is determined by the alignment direction in the first and second substrates, and the quantity of a chiral material added to the liquid crystal.

[0036] The scanning electrode **114** includes a stripe-like transparent electrode, for example, ITO. In an active matrix liquid crystal display, the scanning electrode is disposed on the second substrate side while a common electrode to the ITO is disposed over the entire surface on the first substrate side, or no electrode is disposed.

[0037] The translector **115** is generally formed of a film with a pearl pigment diffused in the resin; however, it is difficult to build the translector **115** in the liquid crystal cell. Thus, three methods have been devised, as shown in FIGS. 2(a), (b) and (c), to form the translector **115**. Of course, the method for obtaining the translector is not limited thereto, and another structure derived therefrom may be employed.

[0038] FIG. 2(a) shows a translector **201** which is also used for a signal electrode disposed on the second substrate, and a scanning electrode **202** including the ITO disposed on the first substrate, and an area in which these two electrodes are intersected with each other is referred to as a pixel area (dot). A hatching area of the translector **201** is an Al sputter film of a thickness of 200 Å, and functions as the translector to allow about 8% of the light to be transmitted therethrough, and reflect the remaining light.

[0039] FIG. 2(b) shows a translector **203** which is also used for a signal electrode disposed on the second substrate, and a scanning electrode **202** including the ITO disposed on the first substrate. A hatching area of the translector **203** is an Al sputter film of a thickness of 2000 Å, and allows little light to be transmitted therethrough; however, a plurality of slits **204** of a width of 2 μm are provided, and the light incident in the slit areas is transmitted therethrough. The liquid crystal of the slit areas **204** is operated substantially in the same manner as the area on the Al film by the oblique electric field generated between the scanning electrodes facing each other, and the transmissive mode display is thereby achieved. However, the threshold voltage for the transmissive mode display is changed by about 0.04 V every

time the slit width is changed by 1 μm, and thus, particularly in the passive matrix drive, the slit width must be controlled precisely.

[0040] FIG. 2(c) shows an example in which the signal electrode is separate from the translector, and FIG. 2(c) shows a translector **205** disposed on the second substrate, a signal electrode **207** including the ITO disposed to cover the entire surface of the translector **205**, and a scanning electrode **202** including the ITO disposed on the first substrate. A hatching area of the translector **205** is also an Al sputter film of a thickness of 2000 Å, and only a small amount of light is transmitted therethrough; however, an aperture **206** is provided therein, and the light from the area is transmitted. A scanning electrode **207** including the ITO is covered on the translector **205** via an SiO₂ insulating film, and the liquid crystal of the aperture **206** is normally operated, enabling the transmissive mode display.

[0041] Each component is described below referring again to FIG. 1.

[0042] The backlight **106** has a structure of the light guide plate **121** combined with the light source **124**, and the diffusing polarizer **122** is optically adhered to an upper surface of the light guide plate. In addition, a diffusing plate and/or a collective prism may be laminated thereon. A reflector including a metal thin film or a dielectric multi-layer film is disposed on a reverse side of the light guide plate. The light source includes a cold cathode ray tube or an LED.

[0043] Although not shown in FIG. 1, in order to obtain the color display, a color filter must be disposed corresponding to each dot. When the translector achieves the mirror reflection, a forward diffusing plate must be disposed between the polarizer **101** and the translector **115**. The forward diffusing plate can be formed of a film including two small areas of different refractive indexes. When the translector achieves the scattering reflection, the forward diffusing plate may be omitted.

[0044] Next, the cell condition of the liquid crystal display according to the present embodiment will be described with reference to FIG. 3. In FIG. 3, five laminated rectangles show each layer of the first polarizer, the first and second retardation films, the liquid crystal cell, the third retardation film and the diffusing polarizer in this order from the top, and each axial direction is indicated by an arrow depicted on each rectangle.

[0045] The direction **301** of the axis of absorption of the first polarizer is at an angle of 35.5° to the left with respect to the longitudinal direction of the panel. The direction **302** of the axis of lag of the first retardation film is at an angle of 102.5° to the left with respect to the longitudinal direction of the panel, and the retardation thereof is 455 nm. The direction **303** of the axis of lag of the second polarizer is at an angle of 48.5° to the left with respect to the longitudinal direction of the panel, and the retardation thereof is 544 nm. The rubbing direction **304** of the first substrate of the liquid crystal cell is at an angle of 37.5° to the right with respect to the longitudinal direction of the panel. The rubbing direction **305** of the second substrate of the liquid crystal cell is at an angle of 37.5° to the left with respect to the longitudinal direction of the panel. The liquid crystal is twisted counterclockwise toward the second substrate from

the first substrate by 255° . The product of the birefringence An by the cell gap d is $0.90 \mu\text{m}$. The direction **306** of the axis of lag of the third retardation film is 0.5° to the right with respect to the longitudinal direction of the panel, and the retardation thereof is 140 nm . The direction **307** of the axis of scatter of the diffusing polarizer is 139.5° to the left with respect to the longitudinal direction of the panel.

[0046] Next, the operating principle of the liquid crystal display according to the present embodiment is described with reference to **FIG. 4**. **FIG. 4** shows a polarizer **401**, a first retardation film **402**, a second retardation film **403**, a liquid crystal **404**, a translector **405**, a third retardation film **406**, a diffusing polarizer **407**, a light guide plate **408**, and a reflector **409**. In addition, an ON area **411** of the liquid crystal **404** and an OFF area **412** of the liquid crystal **404** are shown.

[0047] The operation of the reflective mode display is similar to that of a conventional technology. The external light **421** is converted into the linearly polarized wave by the polarizer **401**, transmitted through the first retardation film **402**, the second retardation film **403** and the liquid crystal **404**, and converted into a circularly polarized wave in the ON area **411** and into a linearly polarized wave in the OFF area **412**. Thereafter, the polarized wave is reflected by the translector **405**, and transmitted through the liquid crystal **404**, the second retardation film **403** and the first retardation film **402** to realize the black display **431** in the ON area **411**, and the white display **432** in the OFF area **412**.

[0048] Next, the transmissive mode display is described below. The light emitted from the backlight light source **422** is emitted to the liquid crystal cell side with only the polarized wave component parallel to the axis of scatter of the diffusing polarizer **407** diffused, while repeating the total reflection in the light guide plate **408**. The polarized wave component orthogonal to the axis of scatter of the diffusing polarizer **407** is finally diffused by the diffusing polarizer **407** and emitted while changing the polarized state by the retardation of the diffusing polarizer **407** and the light guide plate **408**. Thus, the linearly polarized wave emitted to the liquid crystal cell side is converted into the circularly polarized wave by the third retardation film **406**. Black display can be achieved in the ON area **411** and the slightly dark white display can be achieved in the OFF area **412** by setting this circularly polarized wave in the same rotational direction as that of the circularly polarized wave, when the external light incident in the ON area of the liquid crystal in the reflective mode display is reflected by the translector **405**. On the other hand, the circularly polarized wave reflected downward by the translector **405** is reflected by the reflector **409**, and returned again to the translector **405**. By repeating this operation, most of the light from the backlight can be transmitted through the translector **405**.

[0049] In the above configuration according to the present embodiment, a transfective liquid crystal display having the transmissivity close to four times that of the conventional value can be provided. On the other hand, a transfective liquid crystal display of brighter reflective mode display than that of the conventional value can be provided by reducing the transmissivity of the translector, accordingly.

[0050] (Second Embodiment)

[0051] Next, the liquid crystal display according to the second embodiment of the present invention will be

described. In the above-described liquid crystal display according to the first embodiment, the contrast is not sufficient even though the transmissive mode display becomes brighter. Thus, in the liquid crystal display according to the present embodiment, a reflective mode display with high contrast is obtained by further disposing a retardation film between a light guide plate and a reflector.

[0052] **FIG. 5** shows the structure of the liquid crystal display according to the second embodiment of the present invention. Here, in particular, a passive matrix liquid crystal display will be described as an example. **FIG. 5** shows a polarizer **501**, a first retardation film **502**, a second retardation film **503**, a liquid crystal cell **504**, a third retardation film **505** and a backlight **506**. The liquid crystal cell **504** includes a first substrate **511** and a second substrate **512**, liquid crystal **513**, a scanning electrode **514** disposed on an inner surface of the first substrate **511**, a translector **515** which is also used for a signal electrode disposed on an inner surface of the second substrate **512**, and a micro color filter **516**. The backlight **506** includes a light guide plate **521**, a diffusing polarizer **522** disposed on a surface on the liquid crystal cell **504** side of the light guide plate **521**, a fourth retardation film **523** disposed on a surface opposite to the surface on which the diffusing polarizer **522** of the light guide plate **521** is disposed, a reflector **524** and a light source **525**.

[0053] Next, each component is described below. The fourth retardation film **523**, similar to the third retardation film **505**, has a function of converting the linearly polarized wave into a substantially circularly polarized wave, and may include a $\frac{1}{4}$ wavelength plate formed of a polycarbonate resin oriented film or the like. The reflector **524** of the backlight **506** includes a metal film or a dielectric multi-layer film, and preferably has the mirror reflection that does not disturb the polarized wave. The color filter **516** of higher transmissivity and lighter color than the type used in a transmissive color liquid crystal display is used in order to obtain a brighter display even in the reflective mode display. A black mask may be disposed as necessary. This color filter **516** can be disposed on the translector **515** on the second substrate side. Other components are similar to those according to the first embodiment.

[0054] Next, the operating principle of the liquid crystal display according to the present embodiment will be described with reference to **FIG. 6**. **FIG. 6** shows a polarizer **601**, a first retardation film **602**, a second retardation film **603**, a liquid crystal **604**, a translector **605**, a third retardation film **606**, a diffusing polarizer **607**, a light guide plate **608**, a fourth retardation film **609**, and a reflector **610**. An ON area **611** of the liquid crystal **604**, and an OFF area **612** of the liquid crystal **604** are also shown.

[0055] The operation of the reflective mode display is similar to that of a conventional technology. The external light **621** is converted into the linearly polarized wave by the polarizer **601**, transmitted through the first retardation film **602**, the second retardation film **603** and the liquid crystal **604**, and converted into a circularly polarized wave in the ON area **611** and into the linearly polarized wave in the OFF area **612**. Thereafter, the polarized wave is reflected by the translector **605**, and transmitted through the liquid crystal **604**, the second retardation film **603** and the first retardation film **602** to realize the black display **631** in the ON area **611**, and the white display **632** in the OFF area **612**.

[0056] Next, the transmissive mode display is described below. The light emitted from the backlight light source 622 is emitted to the liquid crystal cell side with only the polarized wave component parallel to the axis of scatter of the diffusing polarizer 607 diffused, while repeating the total reflection in the light guide plate 608. The polarized wave component orthogonal to the axis of scatter of the diffusing polarizer 607 is finally diffused by the diffusing polarizer 607 and emitted while changing the polarized state by the retardation of the diffusing polarizer 607 and the light guide plate 608. The linearly polarized wave emitted to the liquid crystal cell side is converted into a circularly polarized wave in the same rotational direction as that in the ON area 611 of the reflective mode display, for example, clockwise, by the third retardation film 606. Thus, the light transmitted through the translector 605 achieves the black display in the ON area 611 and the slightly dark white display in the OFF area 612. On the other hand, the light reflected downward by the translector 605 becomes a circularly polarized wave counterclockwise, and converted into the linearly polarized wave orthogonal to the linearly polarized wave emitted from the backlight first by the third retardation film 606, optically rotated by 90° by the fourth retardation film 609 and the reflector 610, and converted again into the clockwise circularly polarized wave by the third retardation film 606 and reaches the translector 605. By repeating this operation, most of the light from the backlight can be transmitted through the translector 605 as the clockwise circularly polarized wave.

[0057] In the above configuration according to the present embodiment, a transfective color liquid crystal display having transmissivity that is close to four times that of the conventional value and with high contrast can be provided.

[0058] (Third Embodiment)

[0059] Next, three examples of electronic apparatus according to the third embodiment of the present invention will be described. The liquid crystal displays in accordance with the present invention are used under diversified environments, and suitable for portable apparatus requiring low power consumption.

[0060] FIG. 7(a) shows a cellular phone 701, and a display unit 702 is disposed on an upper frontal portion of a body. Cellular phones are used in any environment, such as indoors and outdoors. In particular, they are often used in cars, and it is very dark inside of a car at night. Thus, the liquid crystal display used for the cellular phones is preferably a transfective liquid crystal display which can usually achieve the reflective mode display with small power consumption, and the transmissive mode display making use of the auxiliary light as necessary. The liquid crystal display in accordance with the present invention is particularly brighter and higher in contrast in the transmissive mode display than that of the conventional liquid crystal display, and is much more easily recognizable.

[0061] FIG. 7(b) shows a watch 703, and a display unit 704 is disposed in the center of a body. An important point

in applications to watches is low power consumption. If the liquid crystal display in accordance with the present invention is used, the transmissive mode display that is as bright as that of the conventional display can be ensured even when a dark backlight light source of small power consumption is used, and a watch of long battery life can be realized.

[0062] FIG. 7(c) shows a portable information apparatus 705, and a display unit 706 and an input unit 707 are disposed on an upper side and a lower side of a body, respectively. Reflective monochrome liquid crystal displays have been extensively used in conventional portable information apparatus. This is because the transmissive color liquid crystal displays constantly use the backlight, and the power consumption thereof is large, and the continuous running time thereof is short. Even in such cases, if the transfective color liquid crystal display according to the second embodiment of the present invention is used, the color display can be realized with small power consumption, and portable information apparatus that are considerably more convenient can be obtained.

[0063] As described above, by making use of the backlight having the diffusing polarizer in accordance with the present invention, the light reflected by the translector is recycled to enhance efficiency of utilization of the light, and a transfective liquid crystal display of high transmissivity can be provided. In addition, the transfective liquid crystal display of higher reflectance can be provided by reducing the transmissivity of the translector by the enhancement in transmissivity through recycling.

What is claimed is:

1. A liquid crystal display, comprising:

a pair of substrates;

a liquid crystal cell having a liquid crystal disposed between the pair of substrates;

a translector disposed inside of said liquid crystal cell;

a backlight disposed outside of said liquid crystal cell, said backlight including a light guide plate having one side and another side, a light source, a diffusing polarizer disposed on the one side of said light guide plate, and a reflector disposed on the other side of said light guide plate; and

a retardation film disposed between said liquid crystal cell and said backlight.

2. The liquid crystal display according to claim 1, further comprising a retardation film disposed between said light guide plate of said backlight and said reflector.

3. An electronic apparatus, comprising:

the liquid crystal display according to claim 1.

4. An electronic apparatus, comprising:

the liquid crystal display according to claim 2.

* * * * *

专利名称(译)	液晶显示装置和包含液晶显示器的电子设备		
公开(公告)号	US20020036728A1	公开(公告)日	2002-03-28
申请号	US09/949706	申请日	2001-09-12
[标]申请(专利权)人(译)	精工爱普生株式会社		
申请(专利权)人(译)	SEIKO EPSON CORPORATION		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	OKUMURA OSAMU		
发明人	OKUMURA, OSAMU		
IPC分类号	G02F1/1335 G02F1/13357 G02F1/13363 G09F9/00		
CPC分类号	G02F1/133555 G02F1/13363 G02F2001/133638 G02F2202/40 G02F2413/03 G02F2413/08		
优先权	2000292519 2000-09-26 JP		
其他公开文献	US6747714		
外部链接	Espacenet USPTO		

摘要(译)

本发明提供一种透射式液晶显示器，具有明亮的透射显示。液晶显示器包括：液晶单元，其具有保持在一对基板之间的液晶；透射反射器，设置在液晶单元内；背光，设置在液晶单元的外部；以及延迟膜，设置在液晶单元和液晶单元之间。背光源。背光源包括导光板和光源，设置在导光板的一个表面上的漫射偏振器和设置在另一个表面上的反射器。在上述背光源的导光板和反射器之间设置与上述延迟膜分开的延迟膜。

