



(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2003/0122975 A1**

Kim et al.

(43) **Pub. Date:**

Jul. 3, 2003

(54) **LIQUID CRYSTAL DISPLAY DEVICE FORMED ON GLASS SUBSTRATE HAVING IMPROVED EFFICIENCY**

(30) **Foreign Application Priority Data**

Dec. 29, 2001 (KR)..... 2001-0088551

Publication Classification

(51) **Int. Cl.⁷** **G02F 1/1333**

(52) **U.S. Cl.** **349/40**

(57) **ABSTRACT**

An LCD device includes a displaying unit having a plurality of pixel areas defined by a plurality of gate lines and data lines disposed in longitudinal and transverse directions, a thin film transistor (TFT) formed in each of the pixel areas to be connected to a pixel electrode formed in the pixel area, and a gate pad and a data pad formed on ends of the corresponding gate line and data line; and a dummy region formed on an outer portion of the displaying unit, and including a gate shorting bar and a data shorting bar which are connected to the gate pads and the data pads to apply test signal(s) to the TFTs, wherein at least one of the gate shorting bar and the data shorting bar is a single shorting bar.

(76) Inventors: **Jeong-Rok Kim**, Gyeongsangbuk-Do (KR); **Seung-Kyu Choi**, Daegu (KR); **Jun-Ho Chung**, Gyeongsangbuk-Do (KR); **Myung-Woo Nam**, Gyeongsangbuk-Do (KR); **Jae-Deuk Shin**, Pusan (KR)

Correspondence Address:

BIRCH STEWART KOLASCH & BIRCH
PO BOX 747
FALLS CHURCH, VA 22040-0747 (US)

(21) Appl. No.: **10/317,176**

(22) Filed: **Dec. 12, 2002**

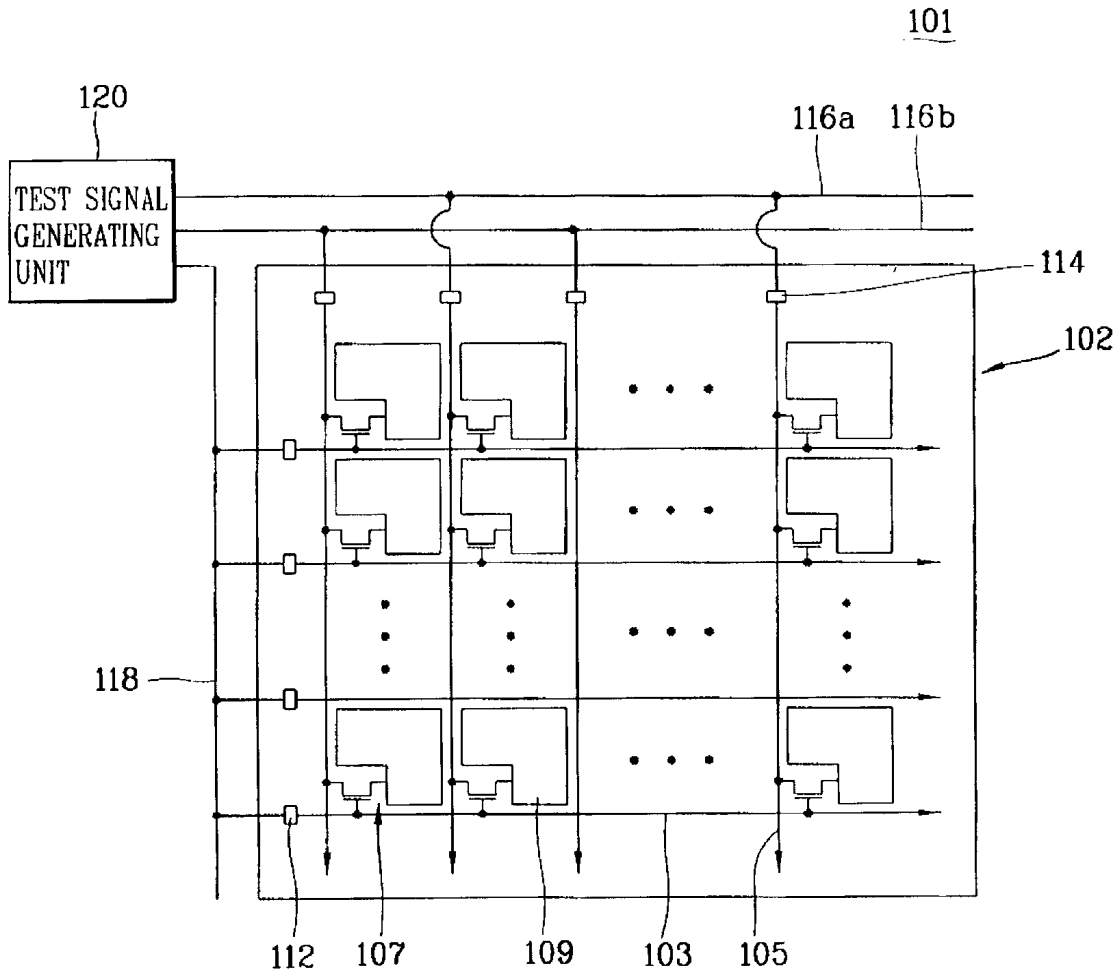


FIG. 1
BACKGROUND ART

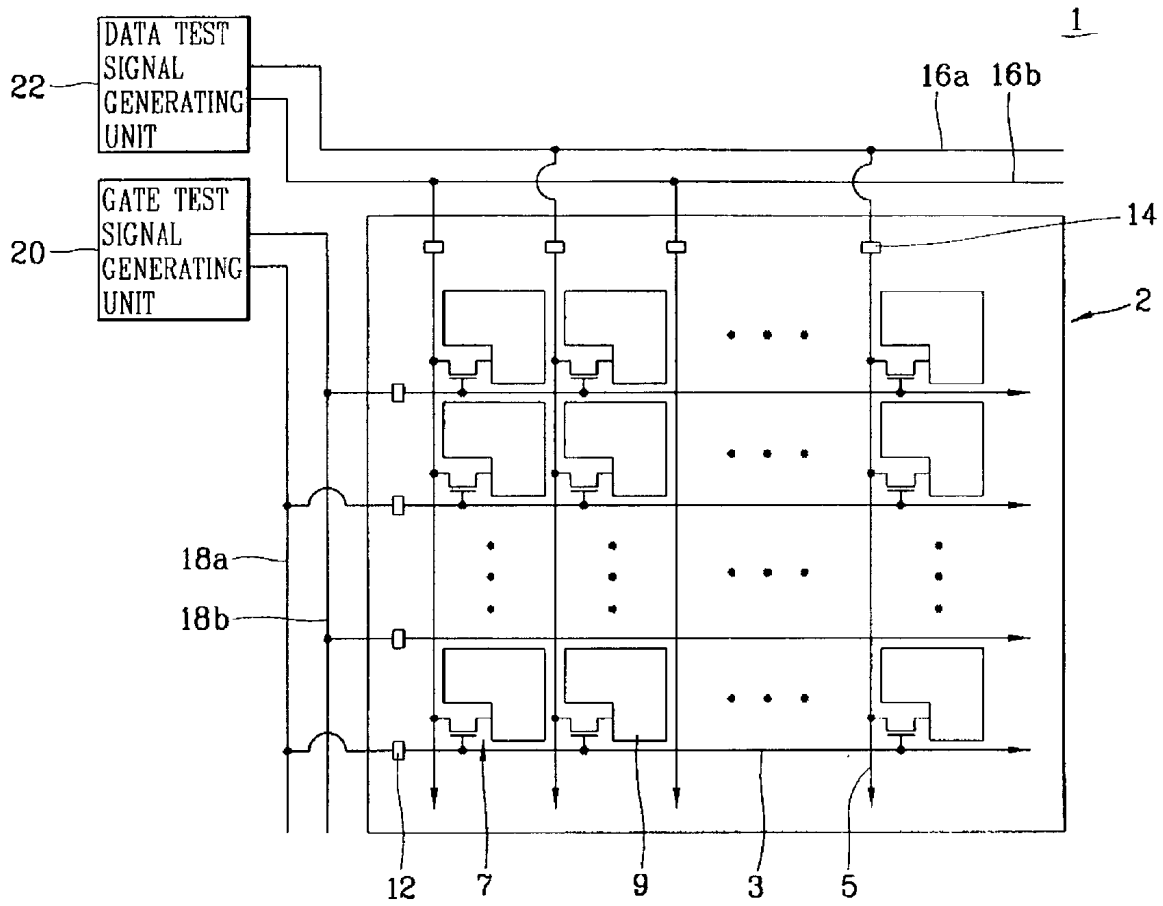


FIG. 2
BACKGROUND ART

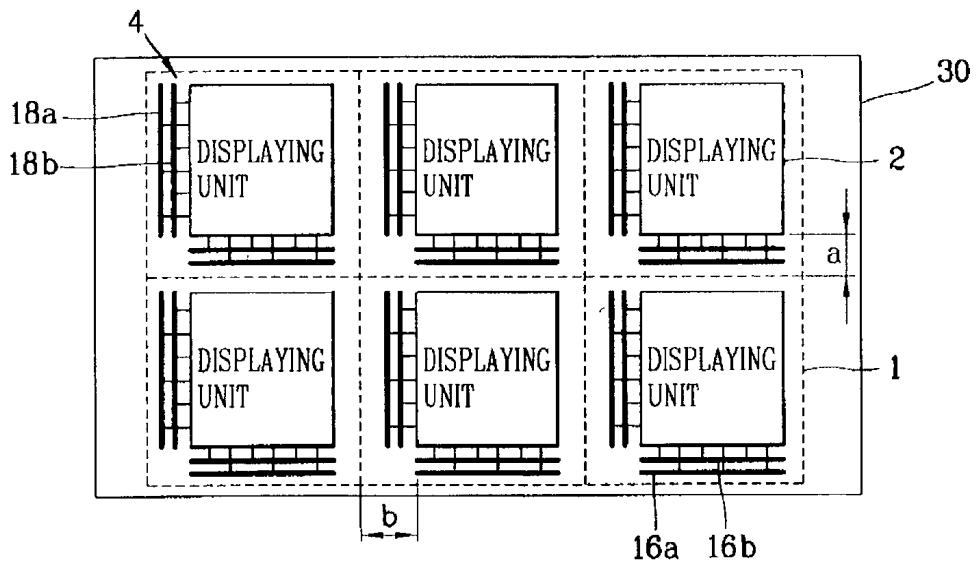


FIG. 3A


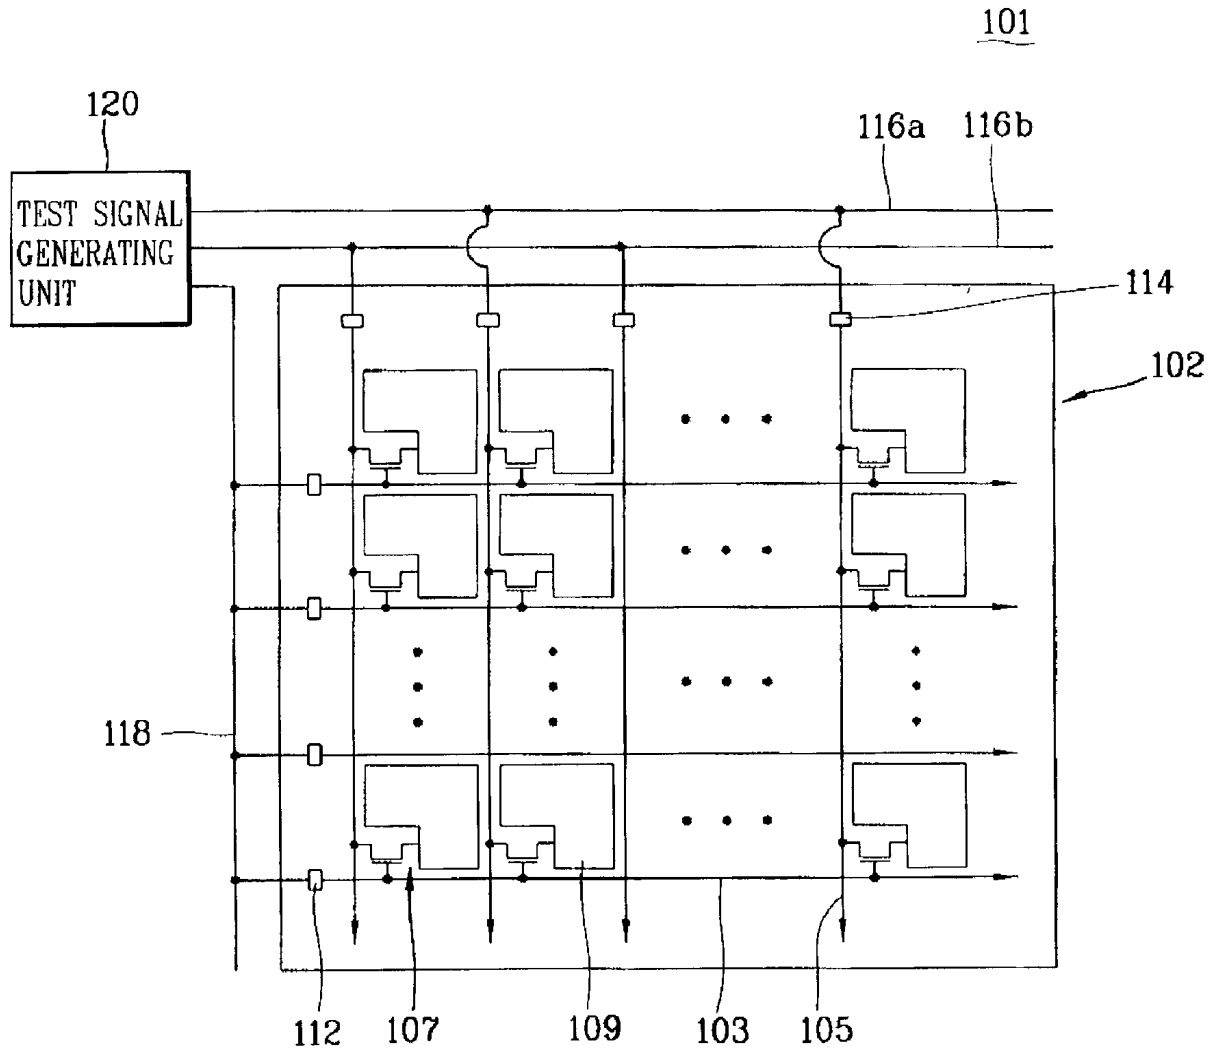


FIG. 3B

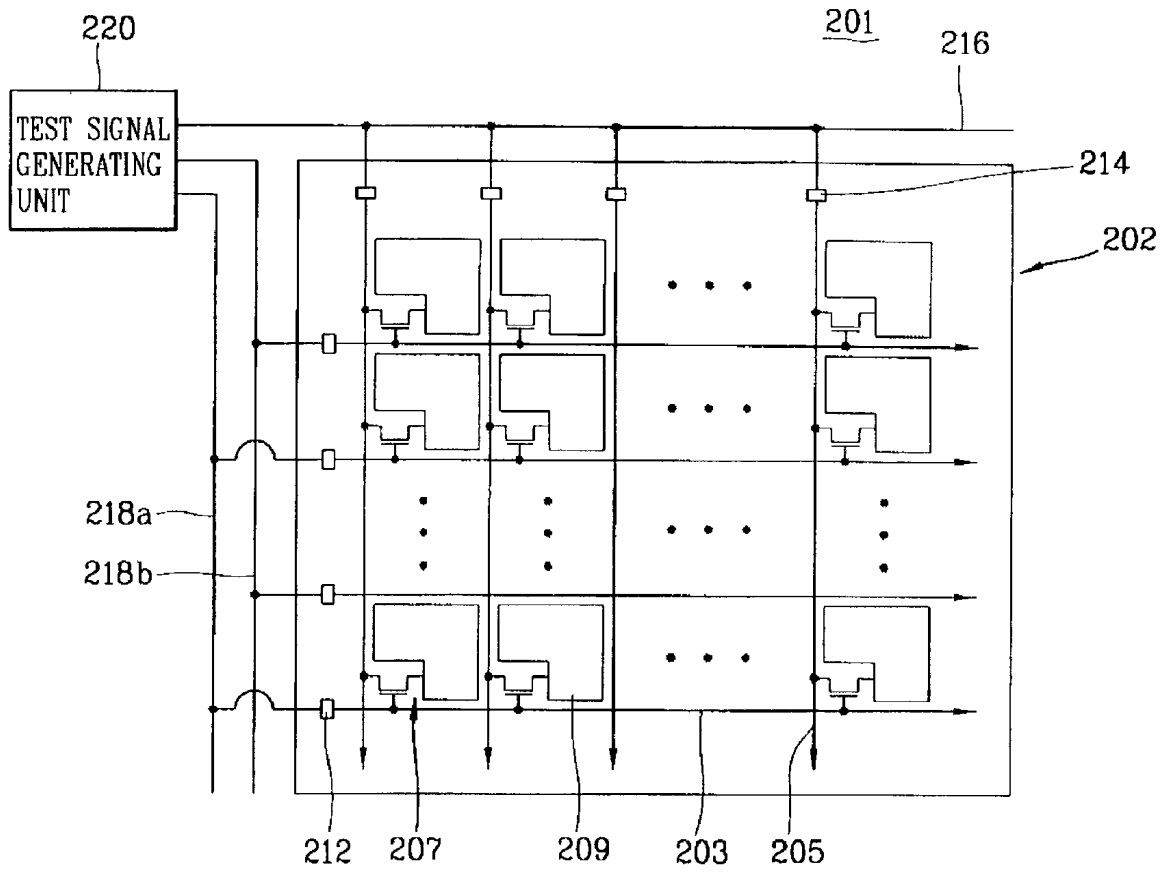

LIQUID CRYSTAL DISPLAY DEVICE FORMED ON GLASS SUBSTRATE HAVING IMPROVED EFFICIENCY

[0001] The present application claims the benefit of Korean Patent Application No. 2001-0088551 filed on Dec. 29, 2001, which is herein fully incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display device, and particularly, to a liquid crystal display device which improves the efficiency of a glass substrate by integrating shorting bars and thereby minimizing a margin of the liquid crystal panel formed on the glass substrate.

[0004] 2. Description of the Background Art

[0005] A liquid crystal display (LCD) device is a transmittive flat panel display device, and is used in various electric devices such as mobile phones, PDAs and notebook computers. The LCD can be formed as a small, lightweight and power-efficient device, and can realize a high image quality. Therefore, the LCD has been researched and developed more than any other display devices. Moreover, as needs for digital TVs, high image quality TVs and wall mounted TVs increase, the LCD with a larger display area, which can be used in these TVs, is being researched actively.

[0006] Generally, LCDs can be divided into a few kinds according to the methods of operating liquid crystal molecules. However, an active matrix thin film transistor LCD is mainly used presently due to its rapid reaction speed and a minimal production of residual images.

[0007] FIG. 1 shows a structure of a general liquid crystal panel 1 in the above discussed TFT LCD. As shown therein, the liquid crystal panel 1 of the TFT LCD comprises a displaying unit 2 on which an image is realized. A plurality of gate lines 3 and data lines 5 defining a plurality of pixel areas are disposed in longitudinal and transverse directions on the displaying unit 2. A thin film transistor (TFT) 7, which is a switching device, is disposed in each of the pixel areas. Each TFT 7 is switched when a scan signal is input through the corresponding gate line 3 to pass a signal from the corresponding data line to the corresponding pixel electrode 9. Also, gate pads 12 and data pads 14 are formed on the ends of the gate lines 3 and data lines 5. Although it is not shown in FIG. 1, a gate driving IC and a data driving IC are mounted on the outer portions of the liquid crystal panel 1 to supply signals to the gate lines 3 and to the data lines 5 through the corresponding gate pads 12 and data pads 14.

[0008] Although it is not shown in FIG. 1 in detail, each thin film transistor 7 includes a gate electrode to which a scan signal is applied from the gate driving IC, and being connected to the corresponding gate line 3; a gate insulating layer formed on the gate electrode; a semiconductor layer formed on the gate insulating layer for forming a channel layer as the scan signal is applied to the gate electrode; and source/drain electrodes formed on the semiconductor layer for applying a signal to the pixel electrode 9. This signal is input through the corresponding data line 5 from the data driving IC as the channel layer is formed.

[0009] Generally, the liquid crystal panel includes an upper substrate and a lower substrate. The components described above, such as the gate lines, the data lines, the thin film transistors and pixel electrodes, are all formed on the lower substrate. A color filter for realizing colors is formed on the upper substrate. The upper substrate and the lower substrate are attached and a liquid crystal is injected therebetween to complete the liquid crystal display device.

[0010] In the structure of the LCD device constructed as above, the thin film transistor is a basic component for driving the LCD device. Therefore, after the thin film transistors are formed on the lower substrate, an inspection for identifying whether or not the thin film transistors are operated normally should be performed.

[0011] In order to inspect the operation of each thin film transistor, a test signal is applied to the corresponding gate electrode and to the corresponding source/drain electrodes, and then the voltage on the corresponding pixel electrode is measured. If there is a voltage change in the pixel electrode, it means that the test signal input through the source/drain electrodes was successfully applied to the pixel electrode and the thin film transistor is operating normally. If there is no voltage change in the pixel electrode, it indicates that an error or defect exists in the thin film transistor.

[0012] Generally, the test signal is input through the gate pad 12 and the data pad 14 formed on the ends of the gate line 3 and the data line 5. An additional wiring is needed to input the test signal.

[0013] Reference numerals 16 (16a, 16b) and 18 (18a, 18b) shown in FIG. 1 represent bars provided for inspecting the thin film transistors. These bars are also called as 'shorting bars'. These shorting bars 16 and 18 are formed on an outer portion of the displaying unit 2 in the liquid crystal panel 1, where this outer portion of the displaying unit 2 is generally called as a 'dummy region'.

[0014] As shown in FIG. 1, the shoring bars 16 and 18 formed in the dummy region can be divided into gate shorting bars 18a and 18b and data shorting bars 16a and 16b. The respective shoring bars are formed in pairs to be connected to respective odd gate pads 12 and odd data pads 14 and to be connected to respective even gate pads 12 and even data pads 14.

[0015] Also, the shorting bars 18a and 18b for the gates are connected to a gate test signal generating unit 20 to supply the gate test signals output from the gate test signal generating unit 20 to the gate lines 3. The shorting bars 16a and 16b for the data lines are connected to a data test signal generating unit 22 to supply the data test signals output from the data test signal generating unit 22 to the data lines 5.

[0016] Generally, a plurality of liquid crystal panels are fabricated altogether. That is, a plurality of liquid crystal panels are first fabricated on a single glass substrate of a large area. Then, this glass substrate is processed and cut into multiple sections to produce multiple liquid crystal panels. Therefore, the yield of an LCD device is dependent on how many liquid crystal panels can be fabricated on a single glass substrate (that is, how efficiently the glass substrate is used).

[0017] FIG. 2 shows an example of a glass substrate 30 on which a plurality of liquid crystal panels (for example, 6

panels) are formed. As shown therein, six liquid crystal panels **1** are provided. Each liquid crystal panel **1** comprises a displaying unit **2** on which an image is realized and a dummy region **4** in which the shorting bars **16** and **18** are formed. In this environment, it is difficult to reduce the size of the displaying unit **2** having a fixed number of pixels since it requires fine pitch technology.

[0018] Therefore, in order to improve the efficiency of the glass substrate, it is desirable that the size of the dummy regions **4** of the liquid crystal panels **1** is reduced. However, in the general LCD device, since the gate shorting bars **18a** and **18b** and the data shorting bars **16a** and **16b** are formed in pairs, it is very difficult to reduce the size of the dummy regions (that is, the margin of the liquid crystal panel).

SUMMARY OF THE INVENTION

[0019] Therefore, an object of the present invention is to provide a liquid crystal display device in which the margin of a liquid crystal panel is minimized by forming at least one of a gate shorting bar and a data shorting bar using a single line or bar, to maximize the efficiency of a glass substrate on which the liquid crystal panel is formed.

[0020] Another object of the present invention is to provide a liquid crystal display device and technique that overcomes problems and disadvantages of the background art LCD devices.

[0021] To achieve the objects of the present invention, as embodied and broadly described herein, there is provided a display device comprising: a plurality of pixel areas defined by a plurality of gate lines and a plurality of data lines, and including a thin film transistor formed in each of the pixel areas; a plurality of gate pads coupled to the gate lines in an outer portion of the display device; a plurality of data pads coupled to the data lines in the outer portion of the display device; and a dummy region disposed in the outer portion of the displaying device, and including a gate shorting bar and a data shorting bar which are connected to the gate pads and the data pads, respectively, to apply at least one test signal to the thin film transistors, wherein at least one of the gate shorting bar and the data shorting bar is a single shorting bar.

[0022] A test signal generating unit is connected respectively to the gate shorting bar and the data shorting bar to apply the test signal to the shorting bars. Each of the gate shorting bar and the data shorting bar may be formed using a single line or bar. In another example, the gate shorting bar may be formed using a single line and the data shorting bar may be formed using two lines. In another example, the data shorting bar may be formed using a single line and the gate shorting bar may be formed using two lines.

[0023] The foregoing and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0025] In the drawings:

[0026] FIG. 1 is a plane view showing a structure of a general liquid crystal display (LCD) device;

[0027] FIG. 2 is a view showing a general glass substrate on which a plurality of liquid crystal panels are formed;

[0028] FIG. 3A is a view showing a structure of an LCD device according to one embodiment of the present invention;

[0029] FIG. 3B is a view showing a structure of an LCD device according to another embodiment of the present invention;

[0030] FIG. 3C is a view showing a structure of an LCD device according to still another embodiment of the present invention; and

[0031] FIG. 4 is a view showing an example of liquid crystal panels fabricated on a glass substrate according to an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0032] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings.

[0033] In the present invention, the efficiency of a glass substrate, on which liquid crystal panels are formed, is increased to improve the fabrication yield of the liquid crystal display (LCD) devices. For this purpose, the margin of each of the liquid crystal panels on the glass substrate is minimized to produce a maximum number of liquid crystal panels on a single glass substrate. The margin of the liquid crystal panel can be minimized by reducing a dummy region on which shorting bars are formed, since it is generally difficult and undesirable to reduce the size of the displaying unit on which pixels are formed.

[0034] Conventionally, a gate shorting bar is formed in pairs and a data shorting bar is formed in pairs. These shorting bars apply test signals alternately to the respective gate line and the respective data line. However, in the present invention, the gate shorting bar and/or the data shorting bar is formed to be of a single bar. This reduces the area size of the dummy region on which the shorting bars are formed, and thereby minimizes the margin of the liquid crystal panel. Therefore, the size of the area occupied by a single liquid crystal panel on the glass substrate is reduced and, consequently, the entire glass substrate can be used more efficiently to produce a maximum number of liquid crystal panels. In one example, Mo/AlNd having low resistance is used as the shorting bars.

[0035] Hereinafter, the LCD device according to the embodiments of the present invention will be described in detail with reference to FIGS. 3A-4.

[0036] FIG. 3A is a view showing an LCD device according to one embodiment of the present invention. As shown therein, a displaying unit **102** of a liquid crystal panel **101** includes a plurality of pixel areas defined by a plurality of gate lines **103** and data lines **105**. Thin film transistors (TFTs) **107** connected to the gate lines **103** and the data lines **105** are formed in respective pixel areas. A gate pad **112** and a data pad **114** are formed on ends of each gate line **103** and

each data line **105**. Accordingly, a channel layer is formed in the respective thin film transistor as a scan signal is applied through the corresponding gate pad **112** from a gate driving IC (not shown). A data signal is also applied from a data driving IC (not shown) to the corresponding pixel electrode **109** formed in the pixel area, through the data pad **114** and source/drain electrodes of the TFT.

[0037] A single gate shorting bar **118** for all the gate lines **103** and a pair of data shorting bars **116a** and **116b** for all the data lines **105** are connected to the gate pads **112** and the data pads **114**, respectively. Here, the gate shorting bar **118** is connected to all the gate pads **112**, whereas a first data shorting bar **116a** is connected to odd data pads **114** and a second data shorting bar **116b** is connected to even data pads **114**.

[0038] The gate shorting bar **118** and the data shorting bars **116a** and **116b** are all connected to a test signal generating unit **120**. When the test signal generating unit **120** generate and outputs at least one gate test signal to the gate shorting bar **118**, this gate test signal is applied to the gate electrodes of the thin film transistors **107** through the respective gate pads **112**. On the other hand, when the test signal generating unit **120** generates and outputs at least one data test signal to each of the data shorting bars **116a** and **116b**, the data test signals are passed through the respective data pads **114** and the source/drain electrodes of the thin film transistors **107** and applied to the pixel electrodes **109** appropriately.

[0039] A voltage difference generated in a pixel electrode due to the applied gate/data test signal is detected using a sensor for detecting such a voltage such as a potential sensor. As a result, an error or defect in each thin film transistor can be inspected effectively.

[0040] In one embodiment, the data shorting bars **116a** and **116b** are made of, e.g., metal Cr, which may be the same material used to form source/drain electrodes. The gate shorting bar **118** is mainly made of, e.g., Mo/AlNd; however, other metals may be used. The Mo/AlNd has a lower resistance than Cr, and therefore, the generation of a signal delay caused by a resistance difference on the entire liquid crystal panel is prevented.

[0041] As described above, the area occupied by the gate shorting bar **118** can be reduced significantly by forming only one gate shorting bar **18** as compared to the multiple gate shorting bars. Consequently, the size of the liquid crystal panel **101** can be reduced. In strictly speaking, the reduced area of the liquid crystal **101** is caused not by reducing the area of the displaying unit **102** of the panel **101**, but by reducing the size of the dummy region in which the shorting bars are formed. Since the margin of the liquid crystal panel can be reduced by reducing the dummy region size, a greater number of liquid crystal panels or larger liquid crystal panels can be formed on a single glass substrate to improve the yield of the LCD devices.

[0042] FIG. 3B is a view of an LCD device including a liquid crystal panel **201** with a displaying unit **202** according to another embodiment of the present invention. In this embodiment, the LCD device includes a single data shorting bar **216** and a pair of gate shorting bars **218a** and **218b**. As shown in FIG. 3B, the gate shorting bars **218a** and **218b** apply the gate test signal(s) to the gate lines **203** in odd numbers and even numbers alternately. In this case, the two

gate shorting bars **218a** and **218b** and the data shorting bar **216** are all connected to the test signal generating unit **220**. The test signal generating unit **220** generates and outputs corresponding test signals to the shorting bars **216**, **218a** and **218b** coupled to gate pads **212**, data pads **214** and pixel electrodes **209**.

[0043] In this embodiment, the gate shorting bars **218a** and **218b** are mainly made of, e.g., Cr, and the data shorting bar **216** is made of, e.g., Mo/AlNd. However, other metals may be used.

[0044] FIG. 3C is a view of an LCD device including a liquid crystal panel **301** with a displaying unit **302** and pixel electrodes **309** according to another embodiment of the present invention. In this embodiment, a single gate shorting bar **318** and a single data shorting bar **316** are provided in the liquid crystal panel **301**. As shown in FIG. 3C, the gate shorting bar **318** is connected to each of gate pads **312**, and the data shorting bar **316** is connected to each of data pads **314**. Therefore, the size of the dummy region of the liquid crystal panel **301**, on which the gate shorting bar **318** and the data shorting bar **316** are formed, can be reduced further, so that the margin of the liquid crystal panel can be reduced. In this embodiment, the gate shorting bar **318** and the data shorting bar **316** are made of, e.g., Mo/AlNd; however, other metals may be used.

[0045] FIG. 4 shows an example of a glass substrate on which a plurality of liquid crystal panels constructed as above are formed according to an embodiment of the present invention. The formation of multiple liquid crystal panels on a single glass substrate will be described as taking an example of the liquid crystal panel shown in FIG. 3C. As shown in FIG. 4, a plurality of liquid crystal panels **301** are formed on a glass substrate **330**. Each of the liquid crystal panels **301** comprises a displaying unit **302** on which pixels are formed and a dummy region **304** in which the shorting bars **316** and **318** are formed. In this example, the gate shorting bar **318** and the data shorting bar **316** are formed in the dummy region as single bars, respectively. Therefore, the size of the dummy region can be reduced significantly as compared to the general dummy region shown in FIG. 2. That is, the liquid crystal panel shown in FIG. 2 has a dummy region with the lengths of 'a' and 'b'. However, each liquid crystal panel shown in FIG. 4 has a dummy region with the lengths of 'c' and 'd', which are shorter than 'a' and 'b', respectively. Therefore, the margin of each liquid crystal display device is reduced as much as the difference a-c and b-d, respectively.

[0046] In this manner, an extra space is created on the glass substrate **330** as much as the reduced margin. Thus, a greater number of liquid crystal panels or larger liquid crystal panels can be formed on the glass substrate **330**. This maximizes the usage efficiency of the glass substrate.

[0047] As described above, according to the present invention, the gate shorting bar and/or the data shorting bar formed in the dummy region of the liquid crystal panel and used to inspect the thin film transistors is made as a single bar respectively using Mo/AlNd having low resistance. Thus, the margin of the liquid crystal panel can be minimized. Further, a greater number of liquid crystal panels or larger liquid crystal panels can be formed on a single glass substrate and thus, the usage efficiency of the glass substrate can be improved greatly.

[0048] As the present invention may be embodied in several forms without departing from the spirit or essential characteristics thereof, it should also be understood that the above-described embodiments are not limited by any of the details of the foregoing description, unless otherwise specified, but rather should be construed broadly within its spirit and scope as defined in the appended claims, and therefore all changes and modifications that fall within the metes and bounds of the claims, or equivalence of such metes and bounds are therefore intended to be embraced by the appended claims.

What is claimed is:

1. A liquid crystal display (LCD) device comprising:
 - a displaying unit including,
 - a plurality of pixel areas defined by a plurality of gate lines and a plurality of data lines,
 - a thin film transistor formed in each of the pixel areas and to be connected to a pixel electrode formed in that pixel area, and
 - at least one gate pad and at least one data pad formed on ends of the corresponding gate line and data line; and
 - a dummy region disposed in an outer portion of the displaying unit, and including a gate shorting bar and a data shorting bar which are connected to the gate pads and the data pads, respectively, to apply at least one test signal to the thin film transistors,
- wherein at least one of the gate shorting bar and the data shorting bar is a single shorting bar.
2. The device of claim 1, further comprising:
 - a test signal generating unit connected to the gate shorting bar and the data shorting bar to apply the test signal.
3. The device of claim 1, wherein each of the thin film transistors includes:
 - a gate electrode connected to the corresponding gate line and for receiving a gate test signal input through the gate shorting bar;
 - a gate insulating layer formed on the gate electrode;
 - a semiconductor layer formed on the gate insulating layer and activated as the gate test signal is input to the gate electrode; and
 - source/drain electrodes formed on the semiconductor layer for transmitting the gate test signal to the corresponding pixel electrode as the semiconductor layer is activated.
4. The device of claim 1, wherein the data shorting bar is a single bar connected to the data pads, and the gate shorting bar includes a first gate shorting bar connected to odd gate pads and a second gate shorting bar connected to even gate pads.
5. The device of claim 4, wherein the first and second gate shorting bars are made of Cr, and the data shorting bar is made of Mo/AlNd.
6. The device of claim 1, wherein the gate shorting bar is a single bar connected to the gate pads, and the data shorting bar includes a first data shorting bar connected to odd data pads and a second data shorting bar connected to even data pads.

7. The device of claim 6, wherein the first and second data shorting bars are made of Cr, and the gate shorting bar is made of Mo/AlNd.

8. The device of claim 1, wherein each of the gate shorting bar and the data shorting is a single bar.

9. The device of claim 8, wherein the gate shorting bar and the data shorting bar are made of Mo/AlNd.

10. A display device comprising:

- a plurality of pixel areas defined by a plurality of gate lines and a plurality of data lines, and including a thin film transistor formed in each of the pixel areas;

- a plurality of gate pads coupled to the gate lines in an outer portion of the display device;

- a plurality of data pads coupled to the data lines in the outer portion of the display device; and

- a dummy region disposed in the outer portion of the displaying device, and including a gate shorting bar and a data shorting bar which are connected to the gate pads and the data pads, respectively, to apply at least one test signal to the thin film transistors,

wherein at least one of the gate shorting bar and the data shorting bar is a single shorting bar.

11. The device of claim 10, further comprising:

- a test signal generating unit connected to the gate shorting bar and the data shorting bar to apply the test signal.

12. The device of claim 10, wherein each of the thin film transistors includes:

- a gate electrode connected to the corresponding gate line and for receiving a gate test signal input through the gate shorting bar;

- a gate insulating layer formed on the gate electrode;

- a semiconductor layer formed on the gate insulating layer and activated as the gate test signal is input to the gate electrode; and

- source/drain electrodes formed on the semiconductor layer for transmitting the gate test signal to a corresponding pixel electrode as the semiconductor layer is activated.

13. The device of claim 10, wherein the data shorting bar is a single bar connected to the data pads, and the gate shorting bar includes a first gate shorting bar connected to odd gate pads and a second gate shorting bar connected to even gate pads.

14. The device of claim 13, wherein the first and second gate shorting bars are made of Cr, and the data shorting bar is made of Mo/AlNd.

15. The device of claim 10, wherein the gate shorting bar is a single bar connected to the gate pads, and the data shorting bar includes a first data shorting bar connected to odd data pads and a second data shorting bar connected to even data pads.

16. The device of claim 15, wherein the first and second data shorting bars are made of Cr, and the gate shorting bar is made of Mo/AlNd.

17. The device of claim 10, wherein each of the gate shorting bar and the data shorting is a single bar.

18. The device of claim 17, wherein the gate shorting bar and the data shorting bar are made of Mo/AlNd.

专利名称(译)	在玻璃基板上形成的液晶显示装置具有提高效率		
公开(公告)号	US20030122975A1	公开(公告)日	2003-07-03
申请号	US10/317176	申请日	2002-12-12
[标]申请(专利权)人(译)	金桢韩国 崔胜KYU CHUNG HO JUN NAM MYUNG WOO SHIN JAE DEUK		
申请(专利权)人(译)	金正韩 崔胜KYU 钟俊浩 NAM李明博WOO SHIN JAE-DEUK		
当前申请(专利权)人(译)	金正韩 崔胜KYU 钟俊浩 NAM李明博WOO SHIN JAE-DEUK		
[标]发明人	KIM JEONG ROK CHOI SEUNG KYU CHUNG JUN HO NAM MYUNG WOO SHIN JAE DEUK		
发明人	KIM, JEONG-ROK CHOI, SEUNG-KYU CHUNG, JUN-HO NAM, MYUNG-WOO SHIN, JAE-DEUK		
IPC分类号	G02F1/1343 G02F1/13 G02F1/1362 G02F1/1333		
CPC分类号	G02F2001/136254 G02F1/1309		
优先权	1020010088551 2001-12-29 KR		
其他公开文献	US6839121		
外部链接	Espacenet USPTO		

摘要(译)

一种LCD装置，包括：显示单元，具有由沿着纵向和横向设置的多条栅极线和数据线限定的多个像素区域；薄膜晶体管（TFT），形成在每个像素区域中以连接到像素形成在像素区域中的电极，以及形成在相应栅极线和数据线的端部上的栅极焊盘和数据焊盘；形成在显示单元外部的虚设区域，包括栅极短路棒和数据短路棒，栅极短路棒和数据短路棒连接到栅极焊盘和数据焊盘，以将测试信号施加到TFT上，其中至少其中一个闸门短路棒和数据短路棒是一个短路棒。

