



US 20040233360A1

(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2004/0233360 A1

Yoshida et al.

(43) Pub. Date: Nov. 25, 2004

(54) LIQUID CRYSTAL DISPLAY DEVICE AND
METHOD OF MANUFACTURING THE SAME

Mar. 31, 2003 (JP) 2003-095769

Publication Classification

(75) Inventors: **Hidefumi Yoshida**, Kawasaki (JP);
Yasutoshi Tasaka, Kawasaki (JP);
Kazuya Ueda, Kawasaki (JP); **Tsuyoshi Kamada**, Kawasaki (JP); **Masakazu Shibasaki**, Kawasaki (JP); **Kunihiro Tashiro**, Kawasaki (JP); **Tetsuya Kobayashi**, Kawasaki (JP)

(51) Int. Cl. 7 G02F 1/1335
(52) U.S. Cl. 349/114

(57) ABSTRACT

The invention relates to a liquid crystal display device used as a display part of an information equipment and a method of manufacturing the same, and has an object to provide the liquid crystal display device which can obtain excellent display characteristics without raising the manufacture cost and the method of manufacturing the same. The liquid crystal display device includes a pair of substrates disposed to be opposite to each other, a liquid crystal sealed between the pair of substrates and aligned almost vertically to the substrate when a voltage is not applied, a pair of quarter-wave plates respectively disposed at outer sides of the pair of substrates, a pair of polarizing plates respectively disposed at outer sides of the pair of quarter-wave plates, and a pixel area including a reflection area provided with a reflecting plate having an almost flat reflecting surface and for reflecting light incident from one of the substrates, and a transmission area for causing light incident from the other of the substrates to be transmitted toward the one of the pair of substrates.

(73) Assignee: **FUJITSU DISPLAY TECHNOLOGIES CORPORATION**.

(21) Appl. No.: **10/812,828**

(22) Filed: **Mar. 30, 2004**

(30) Foreign Application Priority Data

Mar. 31, 2003 (JP) 2003-095392

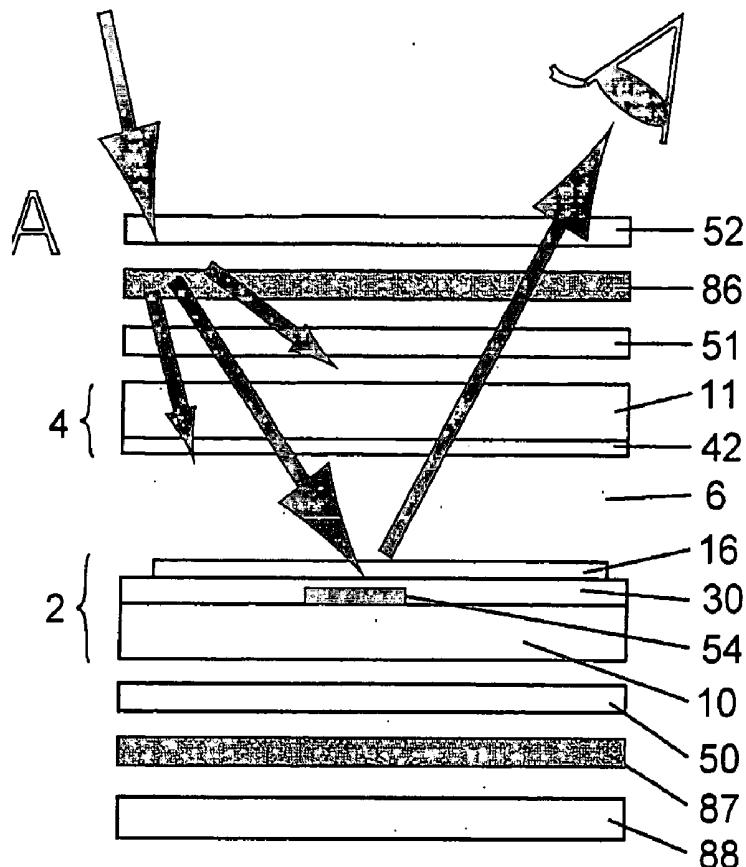


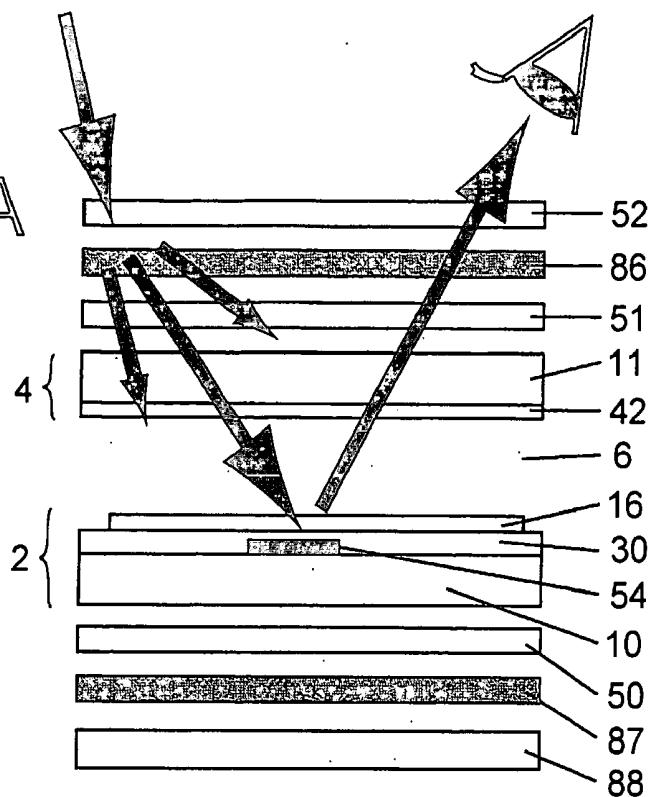
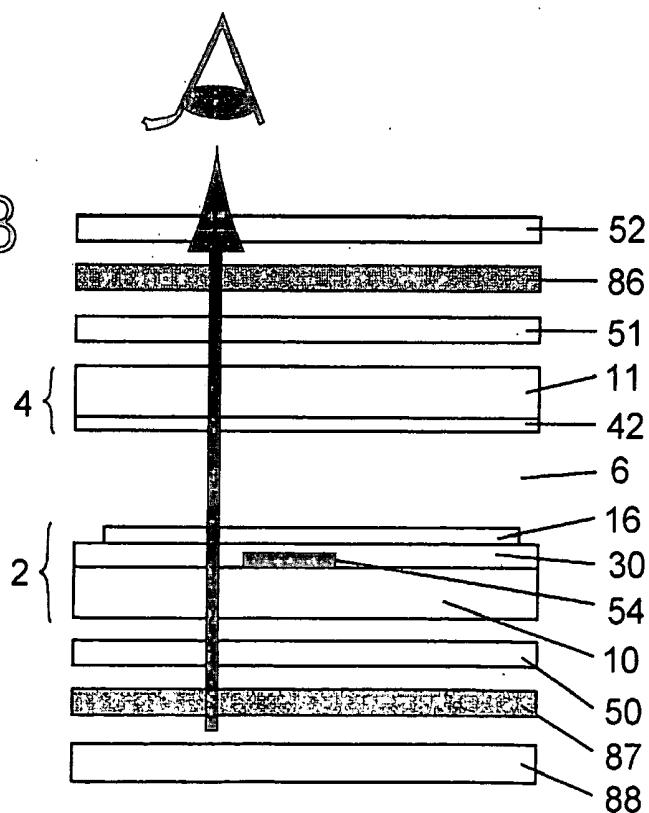
FIG. 1A**FIG. 1B**

FIG.2

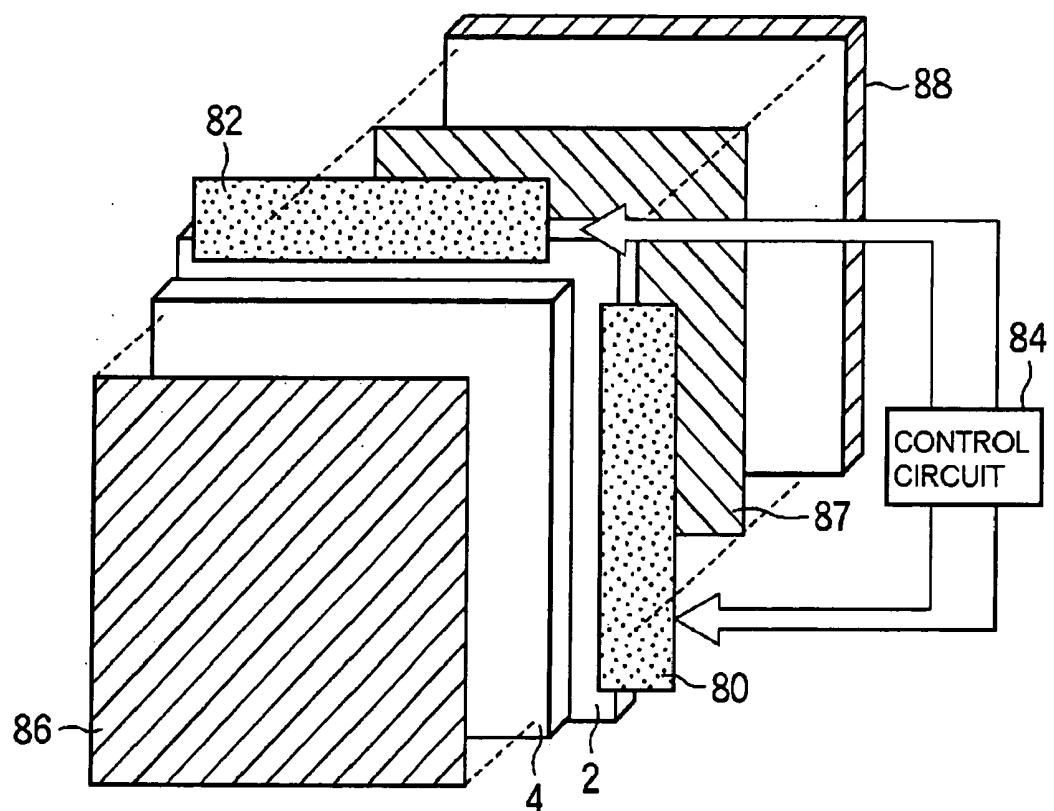


FIG.3

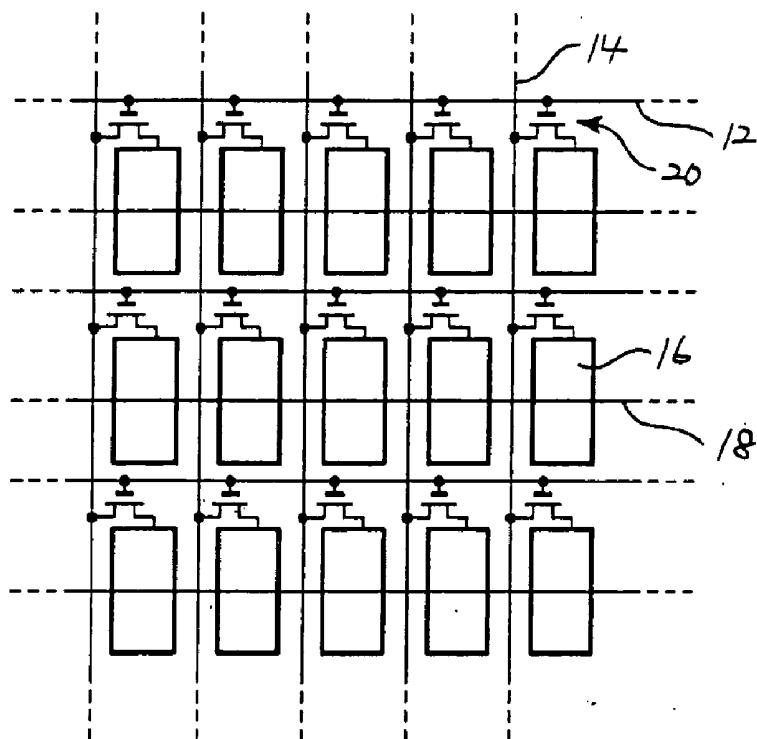


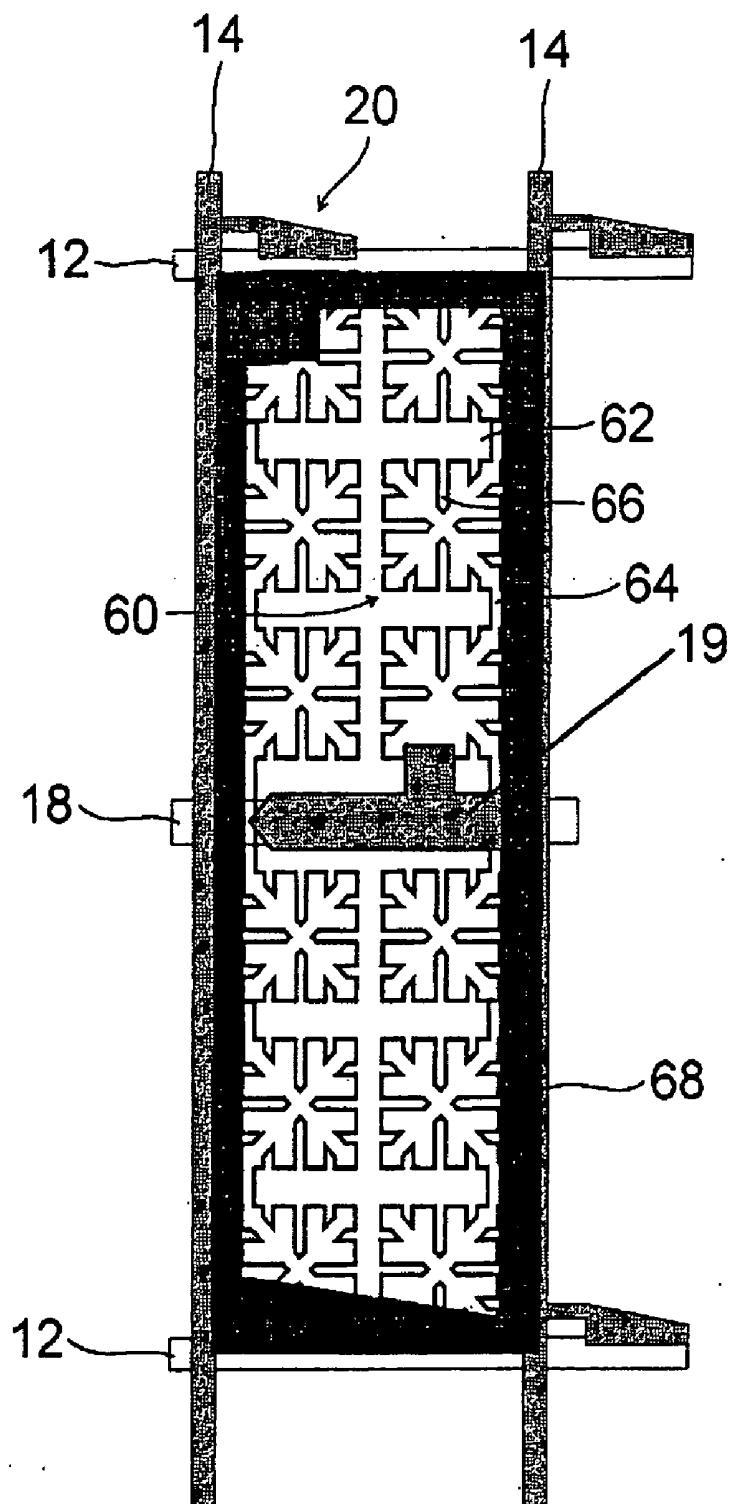
FIG.4

FIG.5

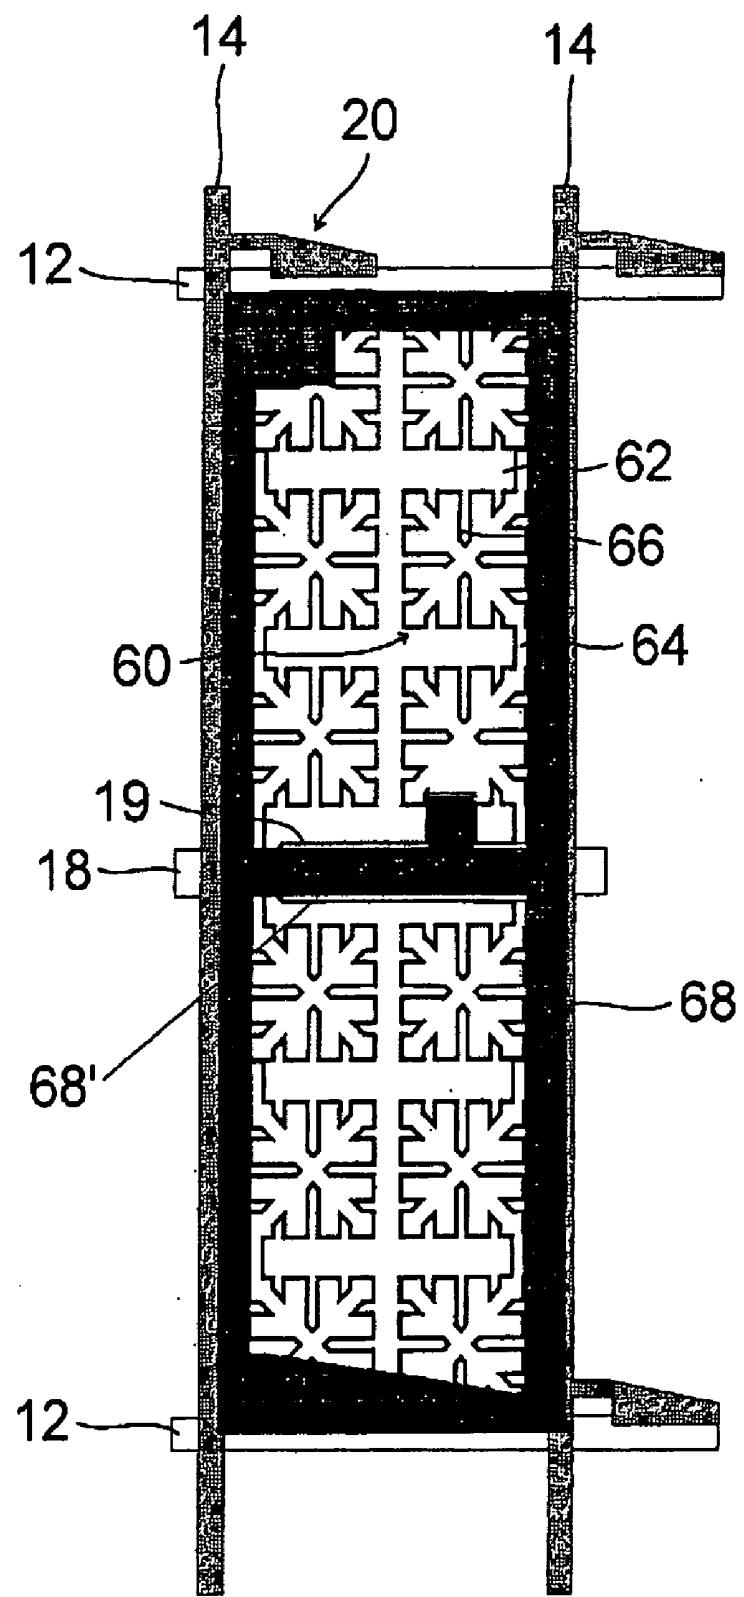


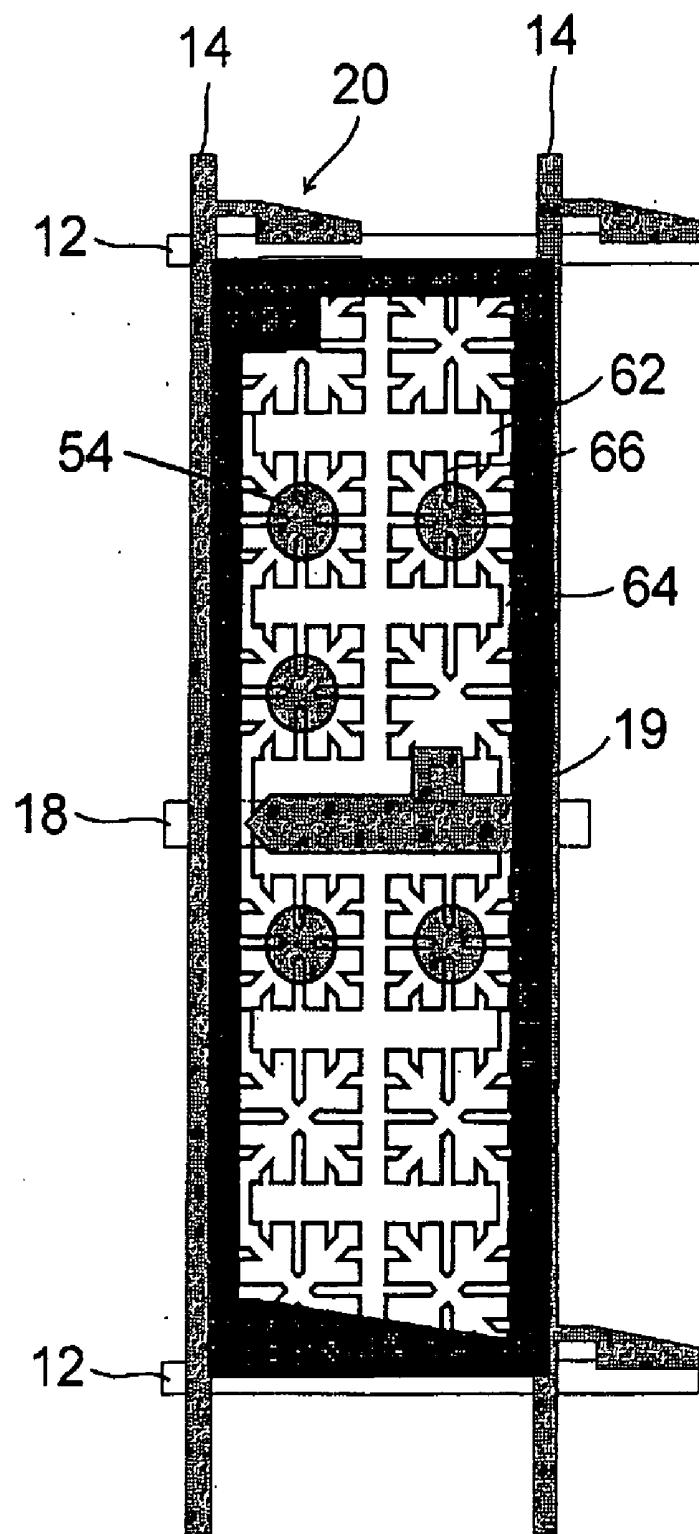
FIG.6

FIG.7

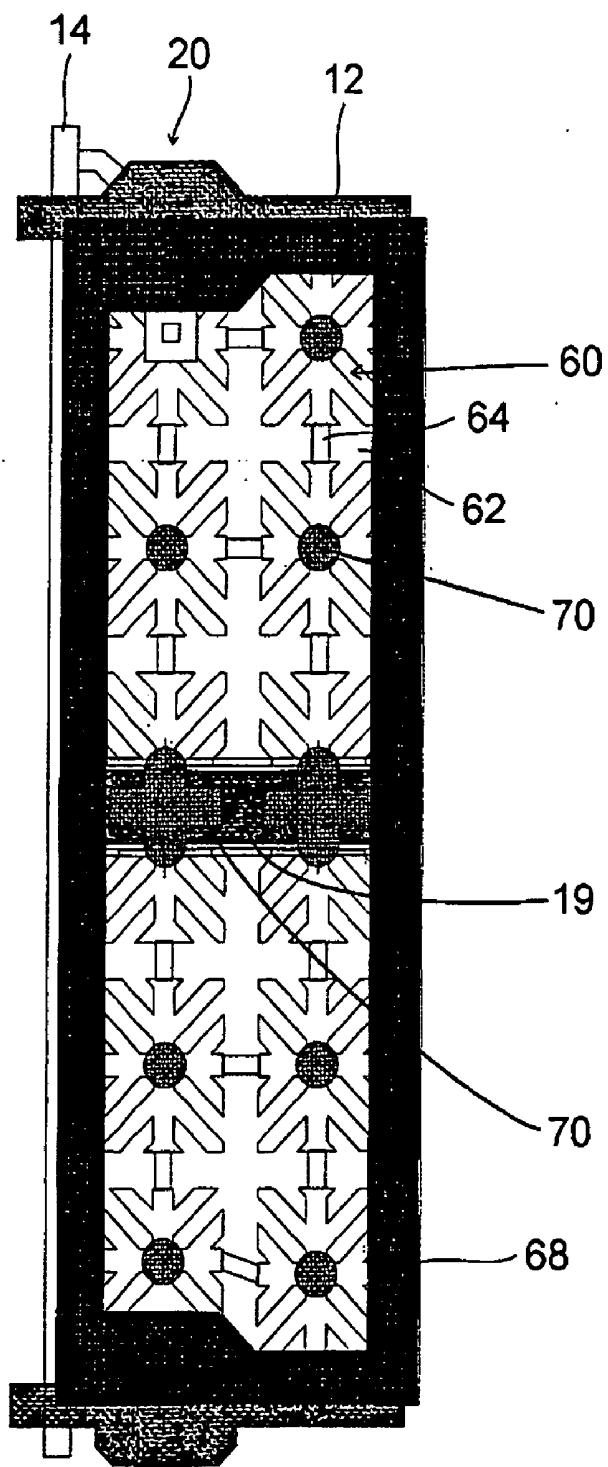


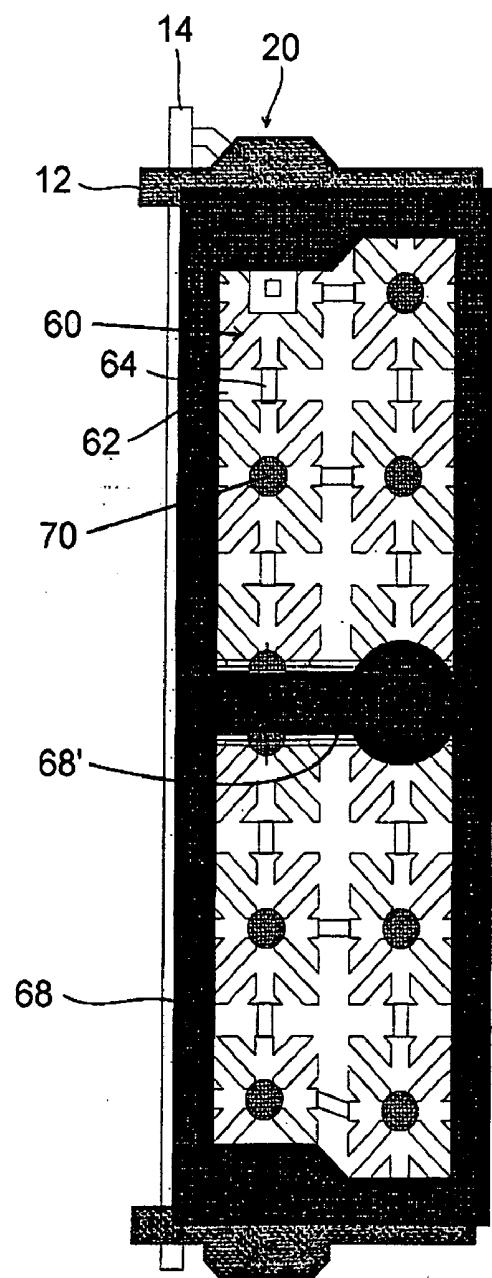
FIG.8

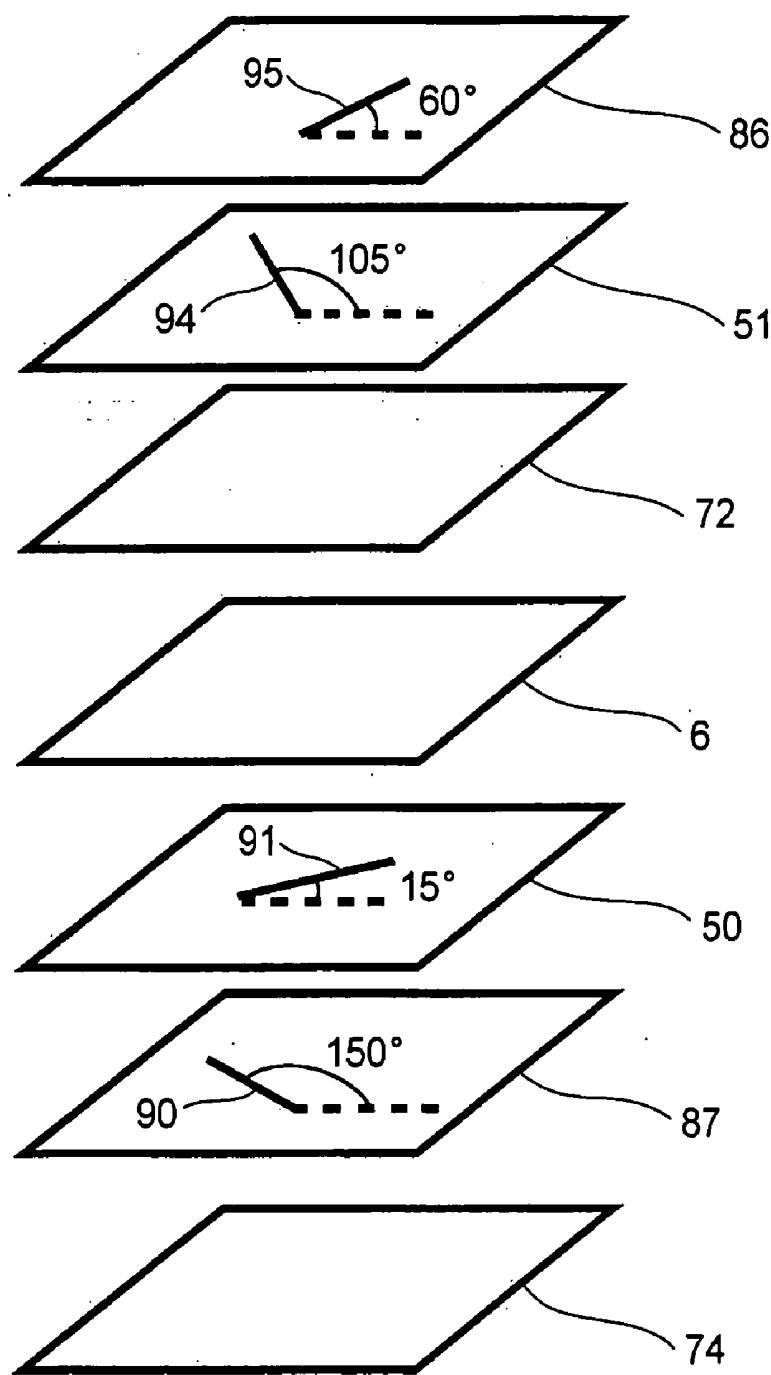
FIG.9

FIG.10

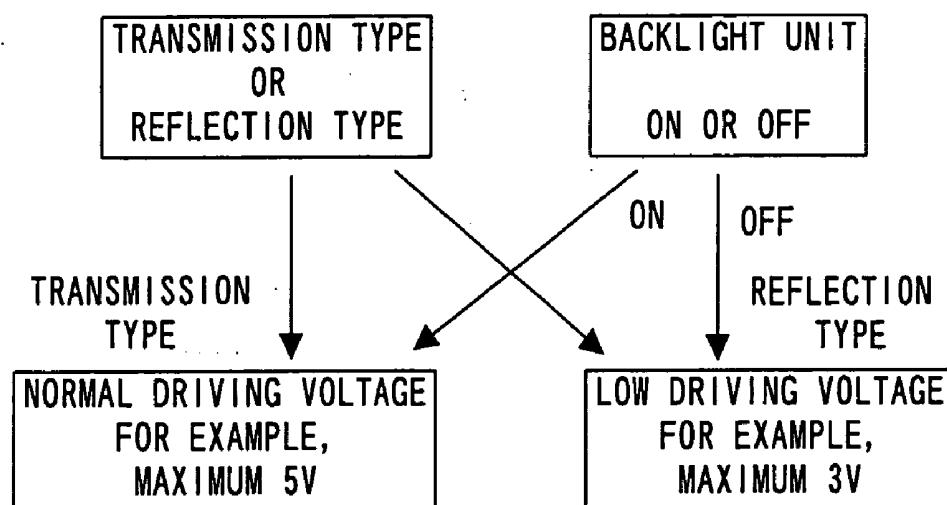


FIG.11

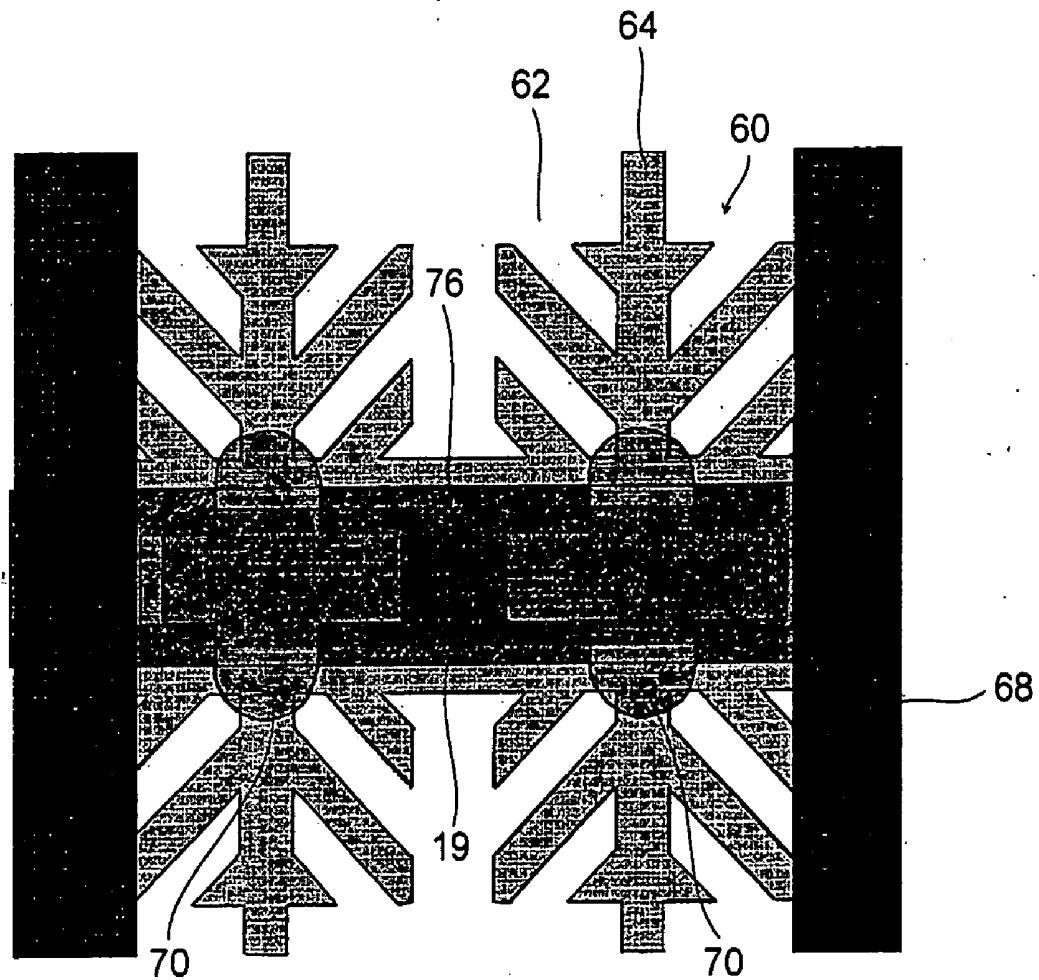


FIG.12

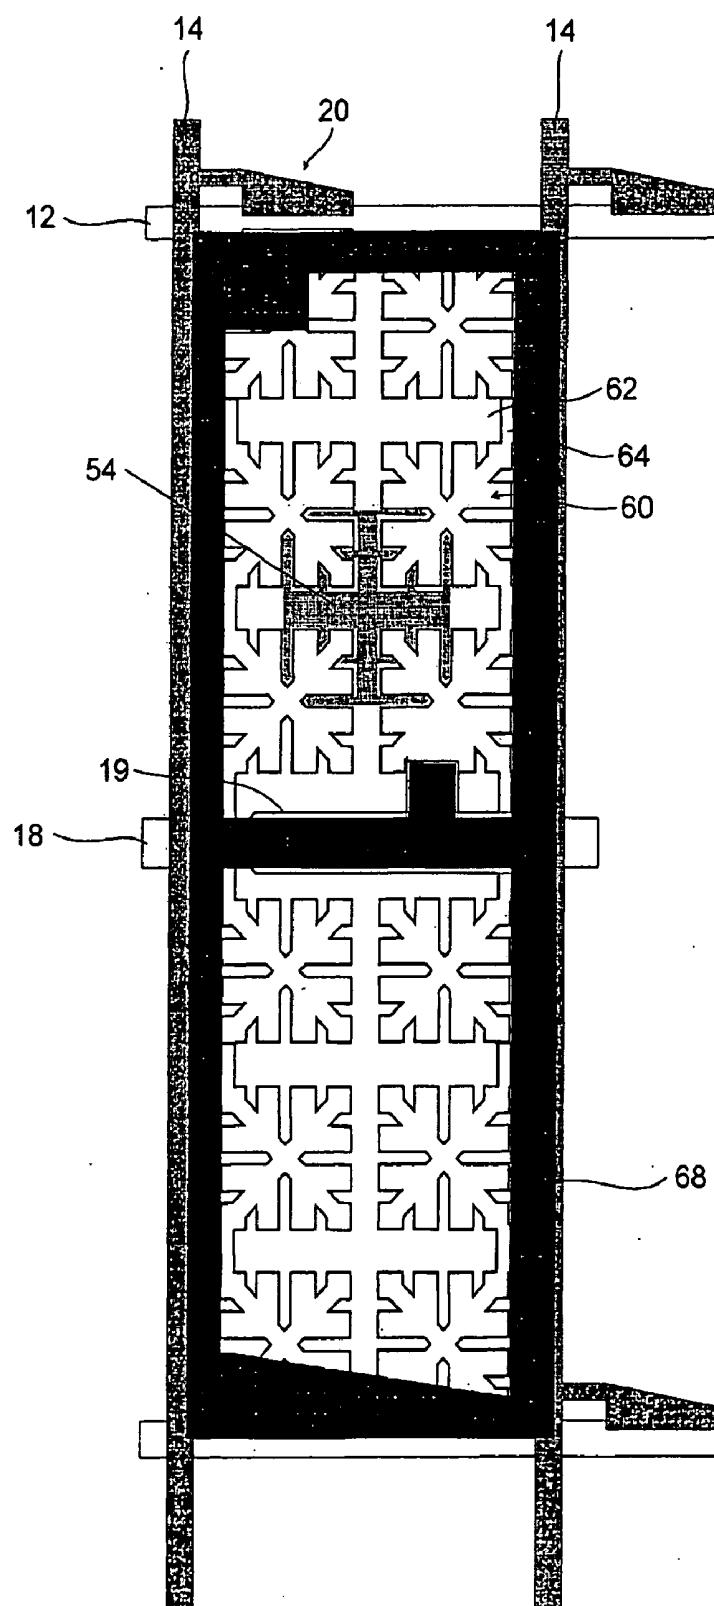


FIG.13

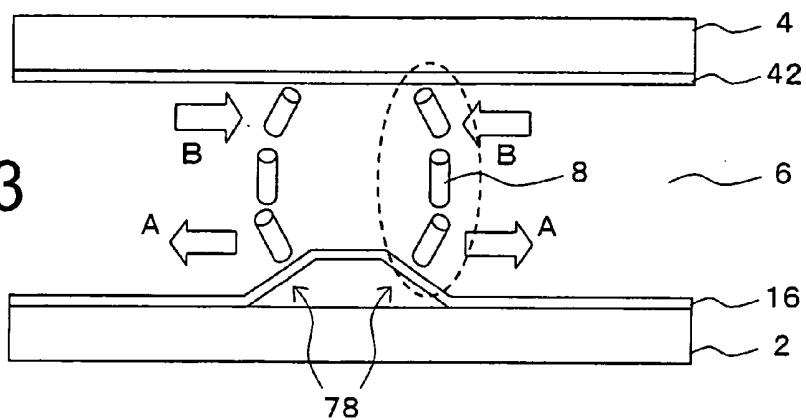


FIG.14

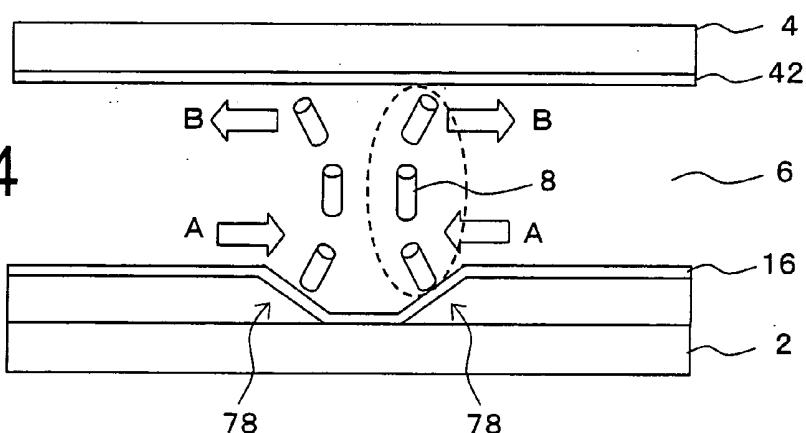


FIG.15

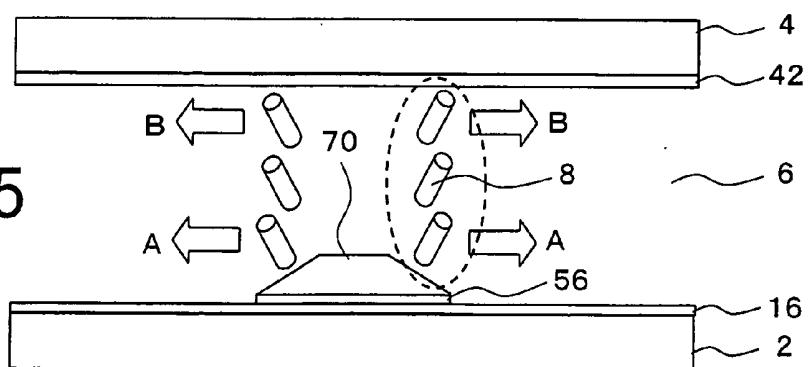


FIG.16

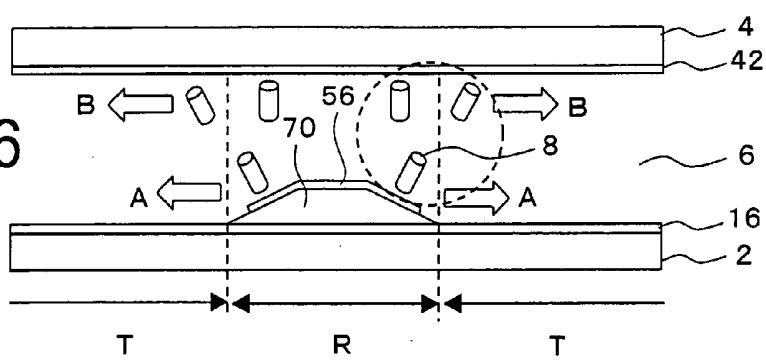


FIG.17

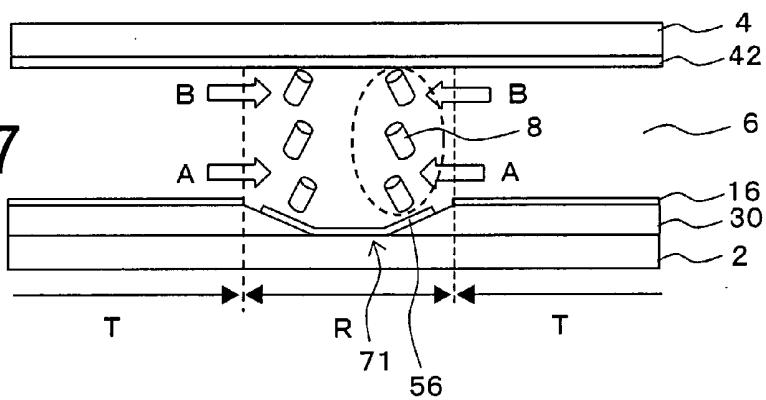


FIG.18

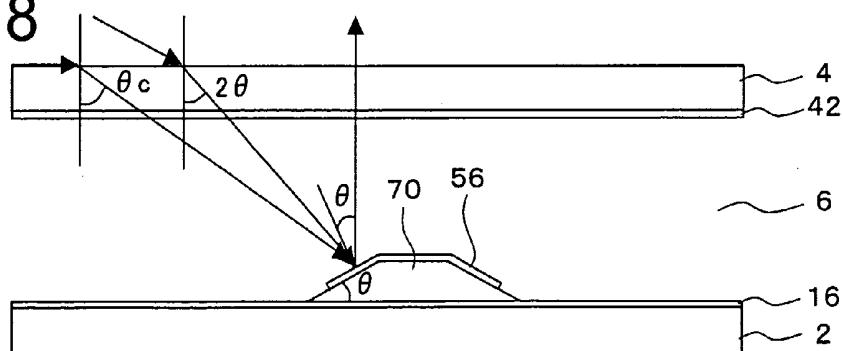


FIG.19

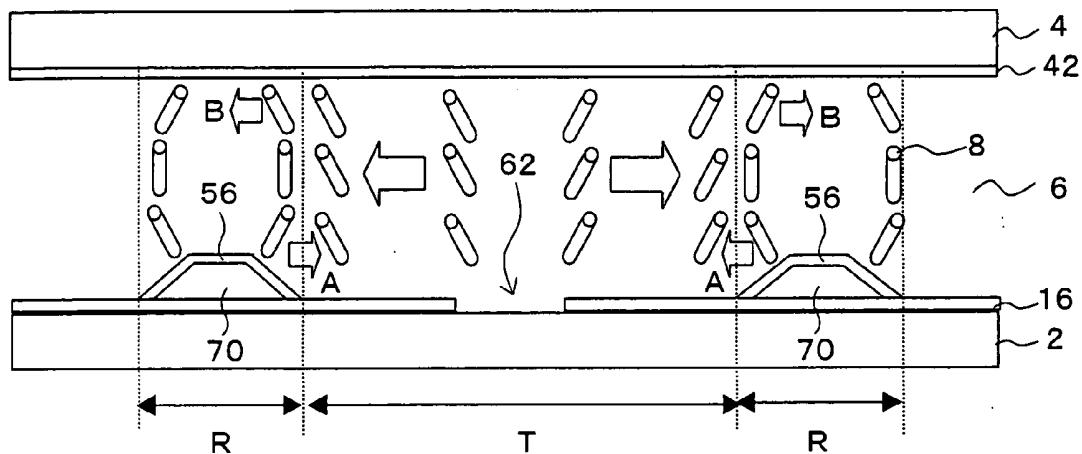


FIG.20

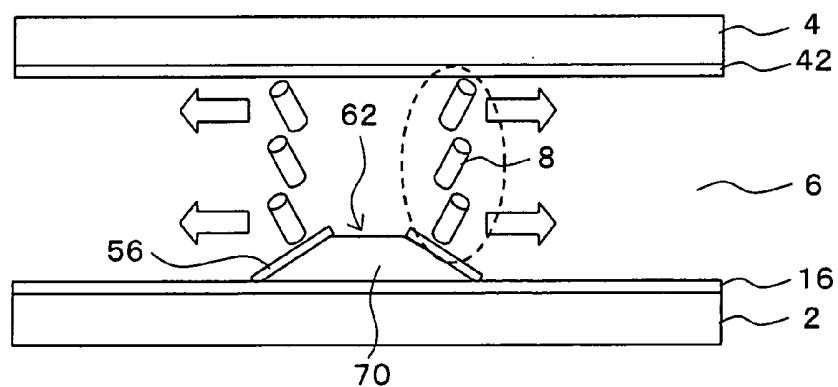


FIG.21

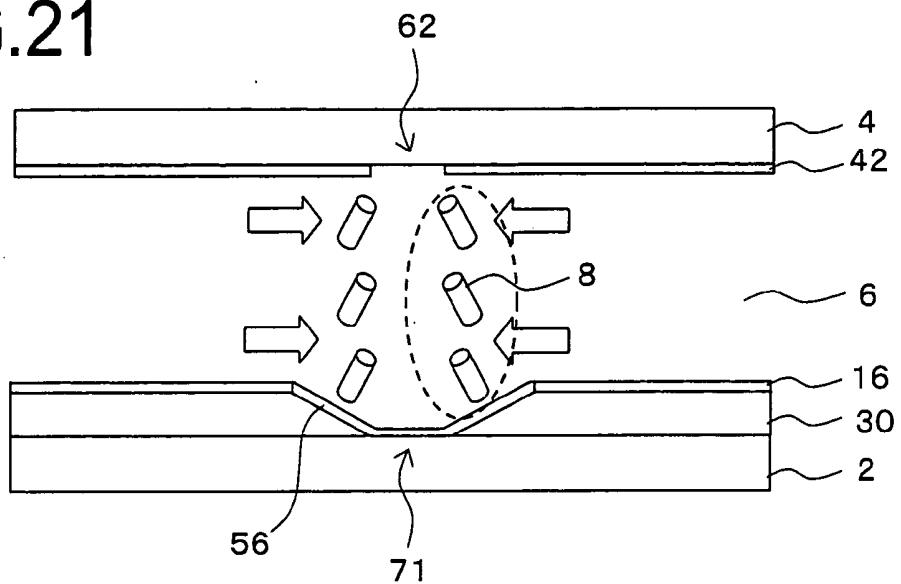


FIG.22

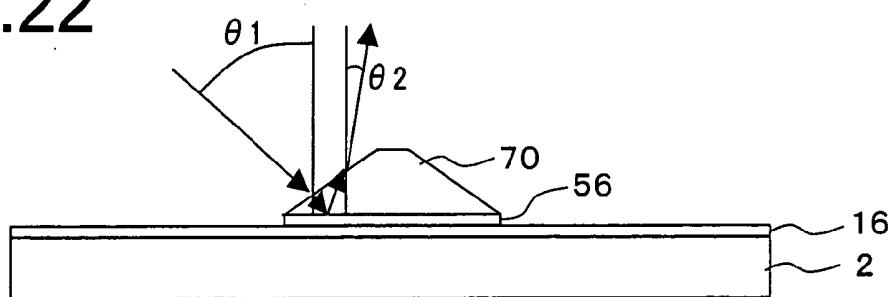


FIG.23

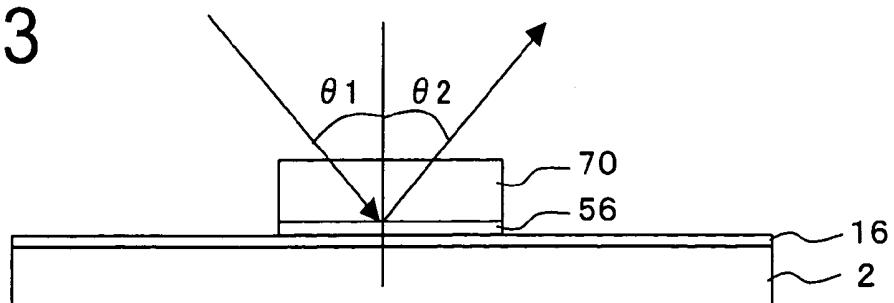


FIG.24

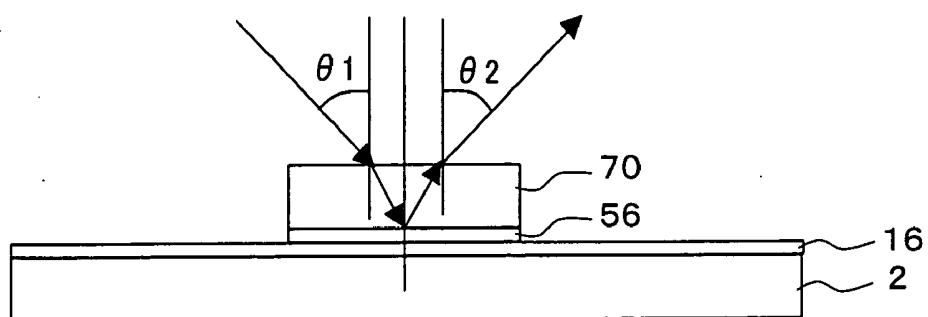


FIG.25

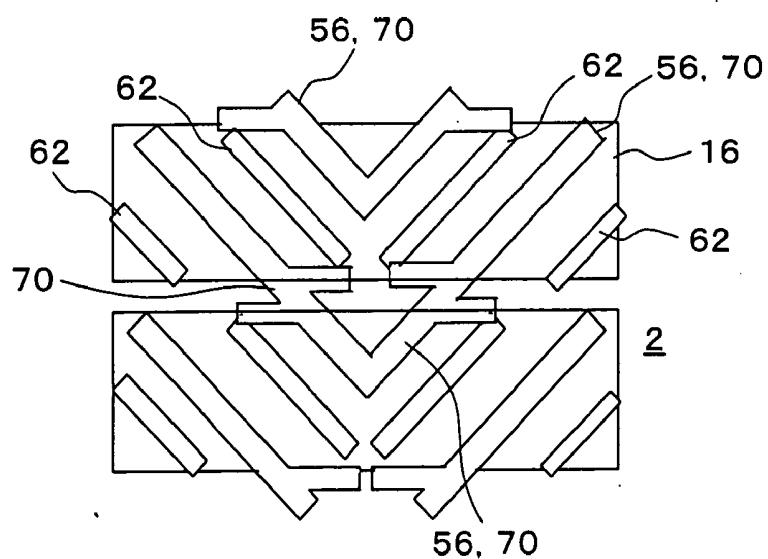


FIG.26

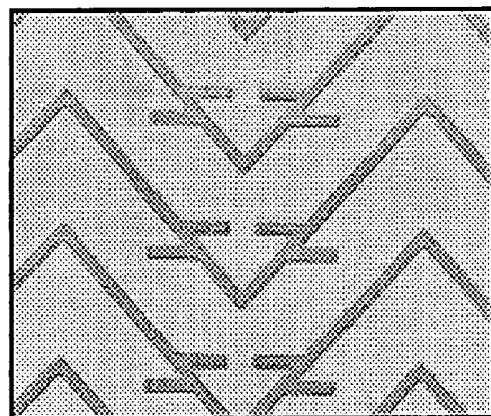


FIG.27



FIG.28

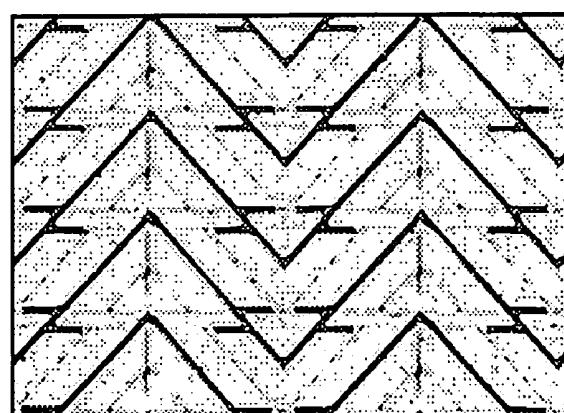


FIG.29

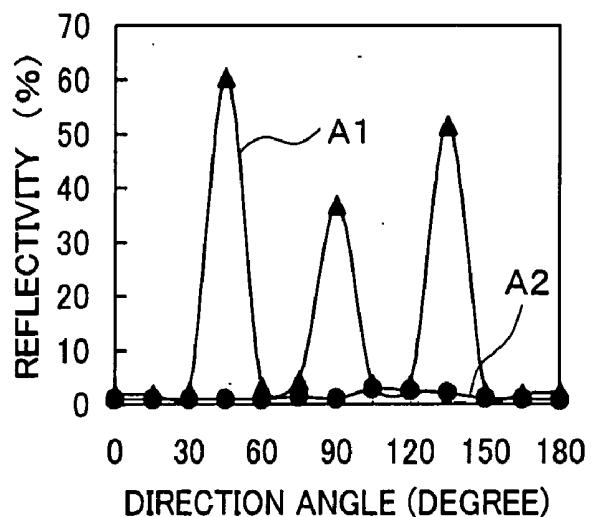


FIG.30

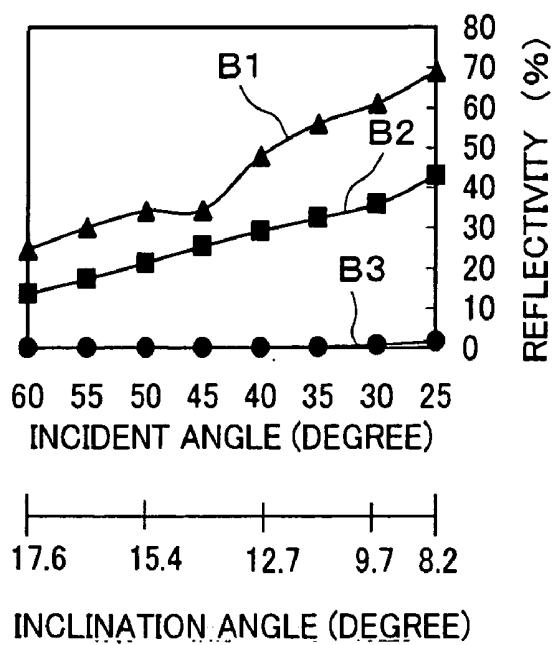
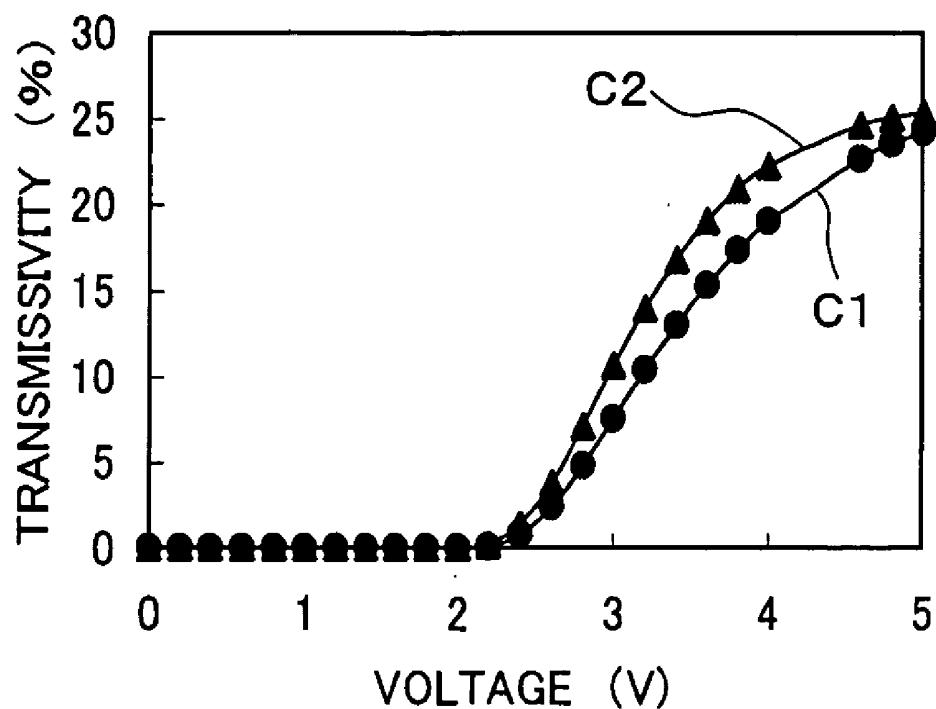


FIG.31



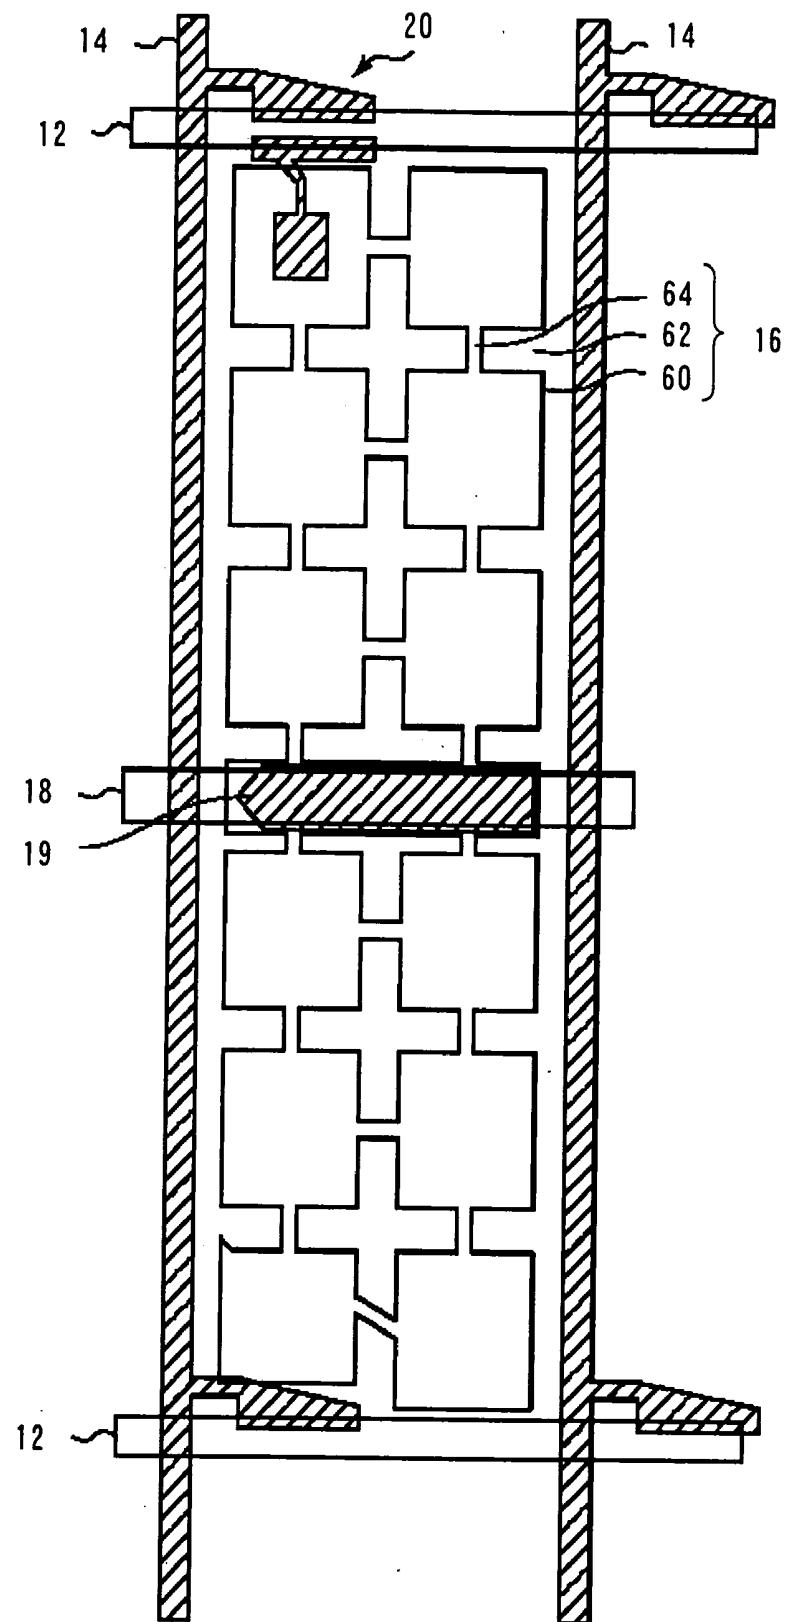


FIG.32

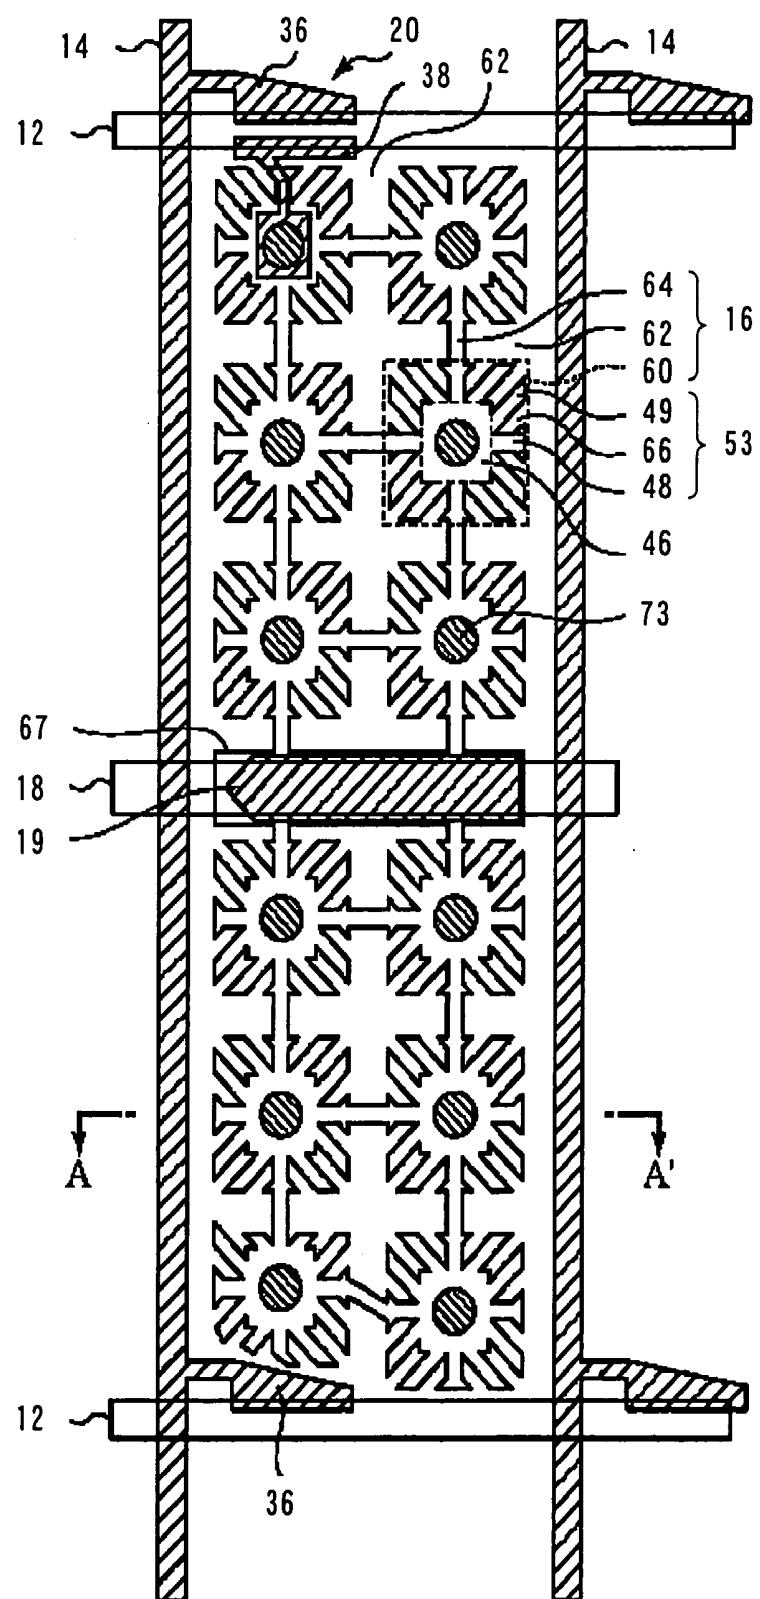


FIG.33

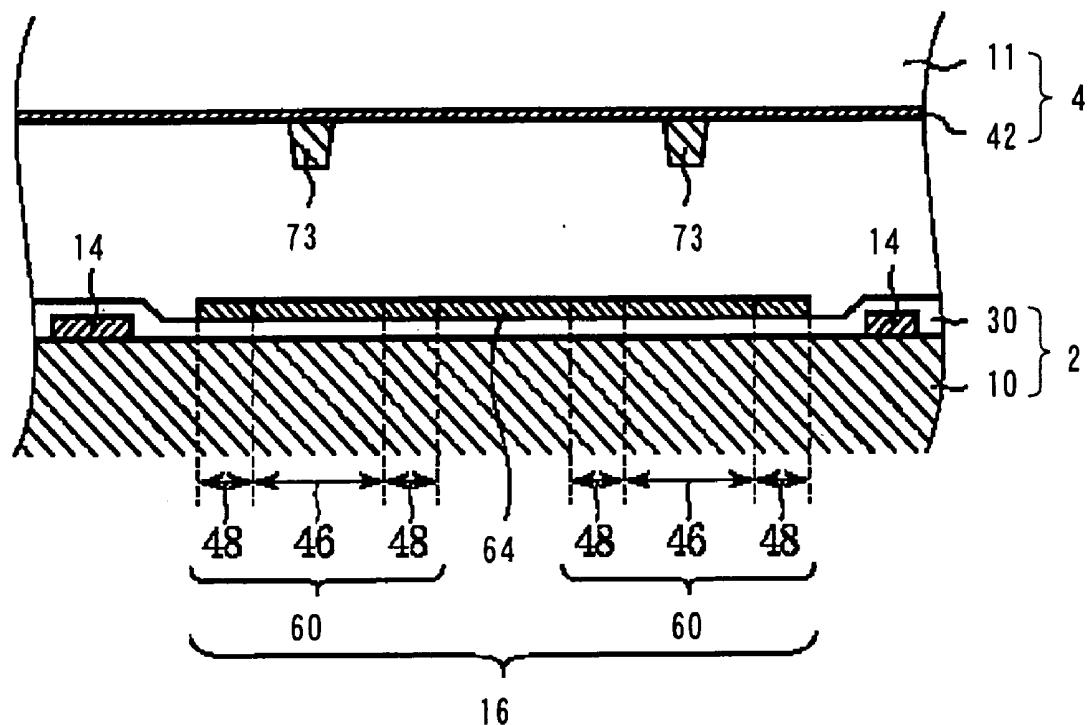


FIG.34

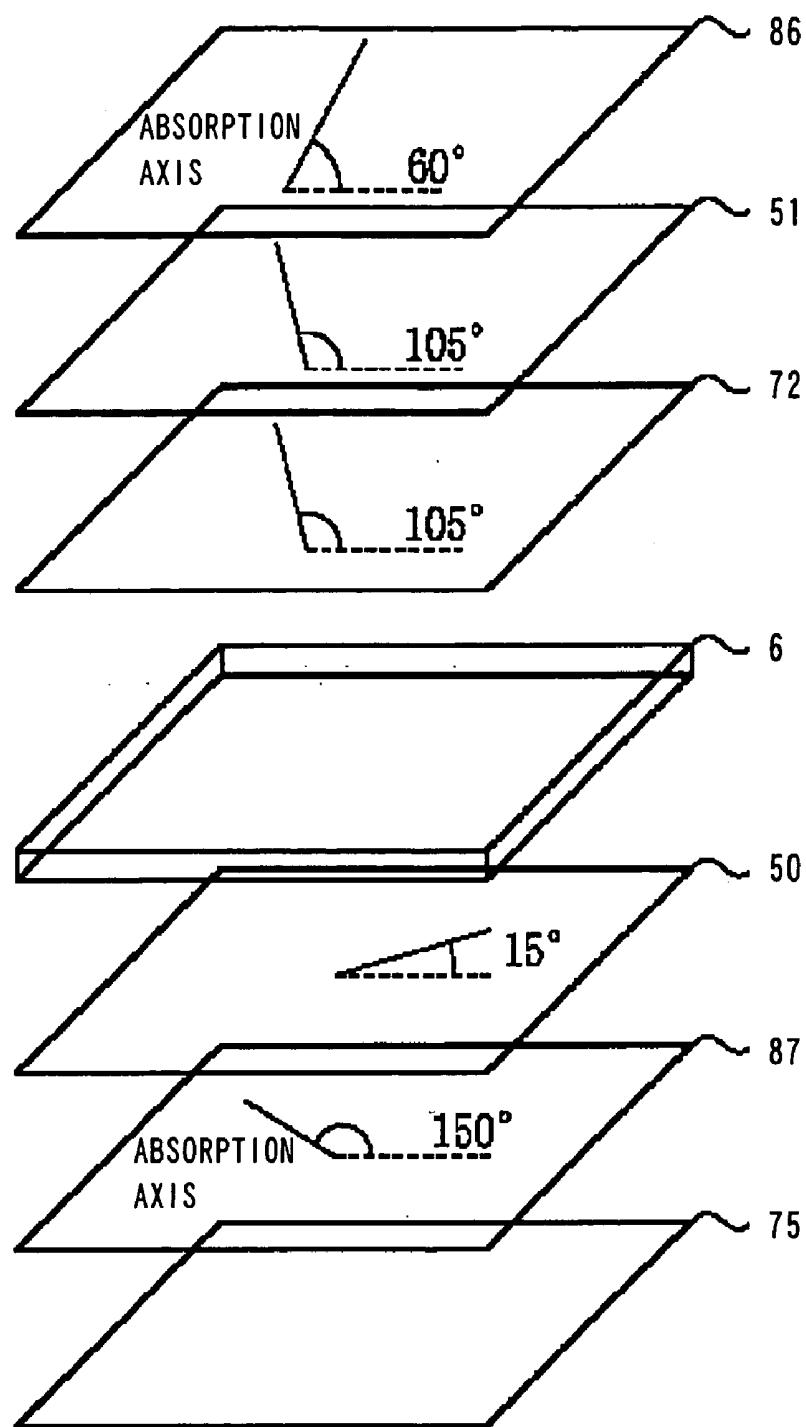


FIG.35

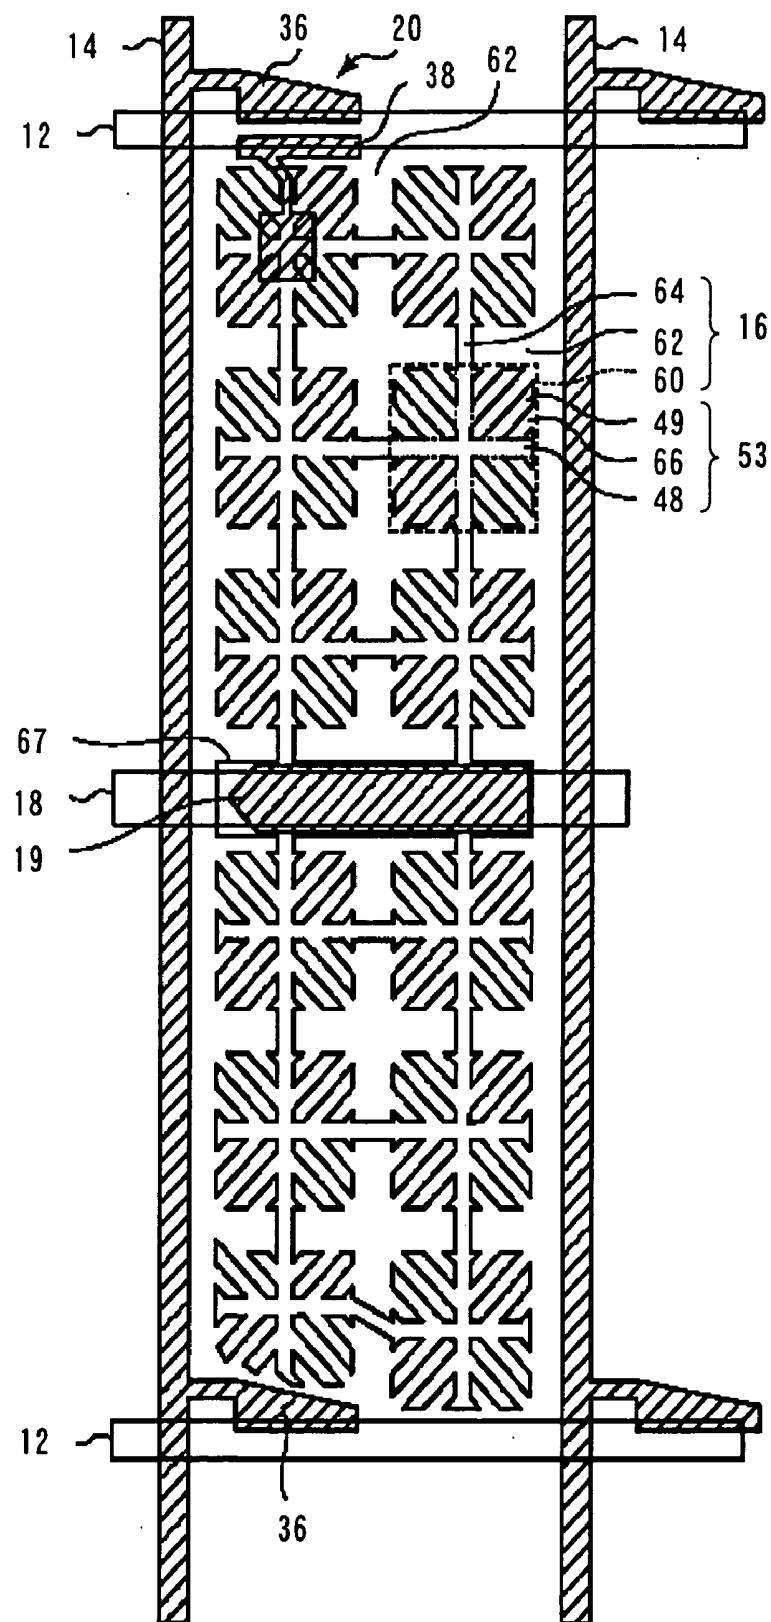


FIG.36

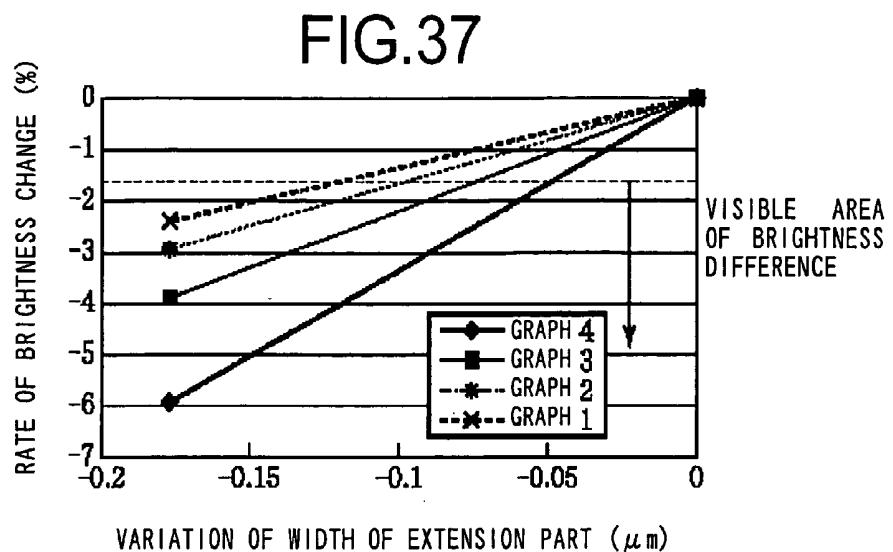


FIG.38A



FIG.38B



FIG.38C



FIG.38D



FIG.39A

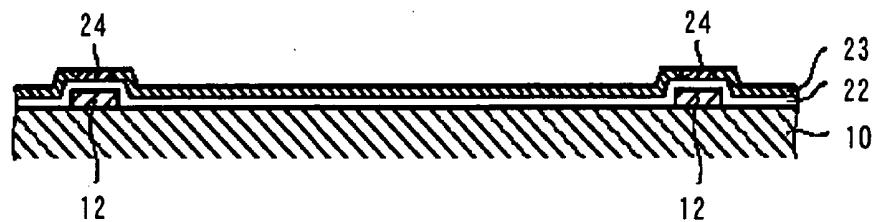


FIG.39B

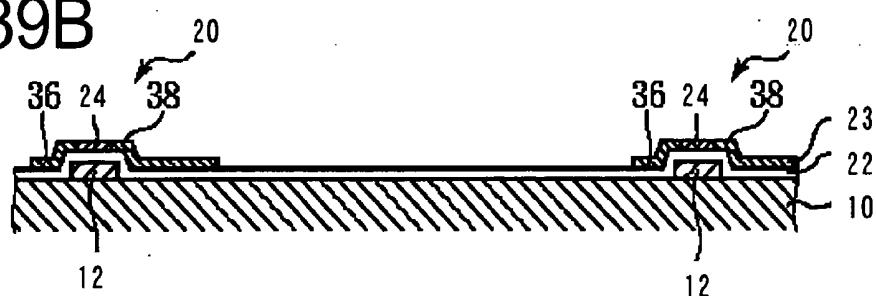


FIG.39C

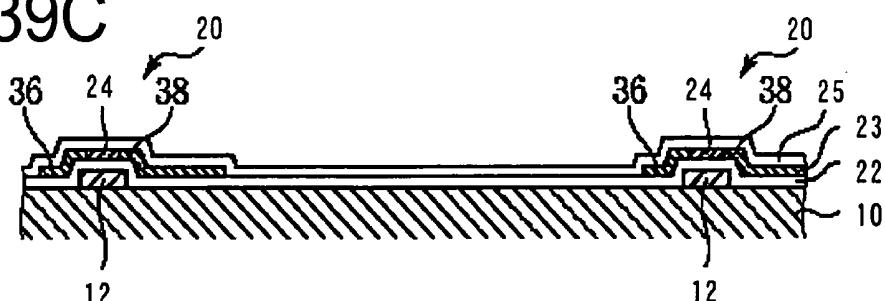


FIG.40A

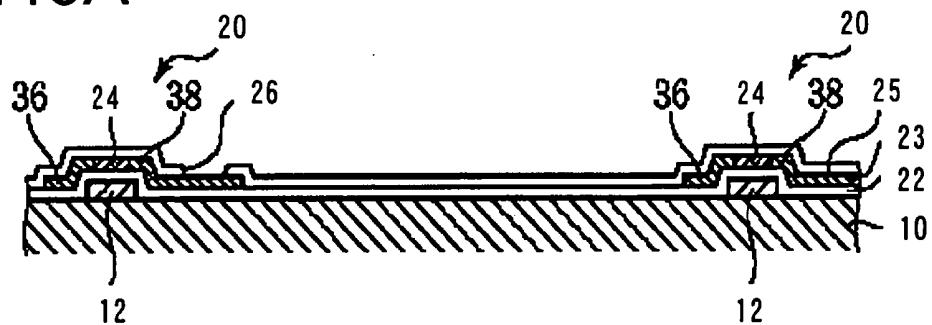


FIG.40B

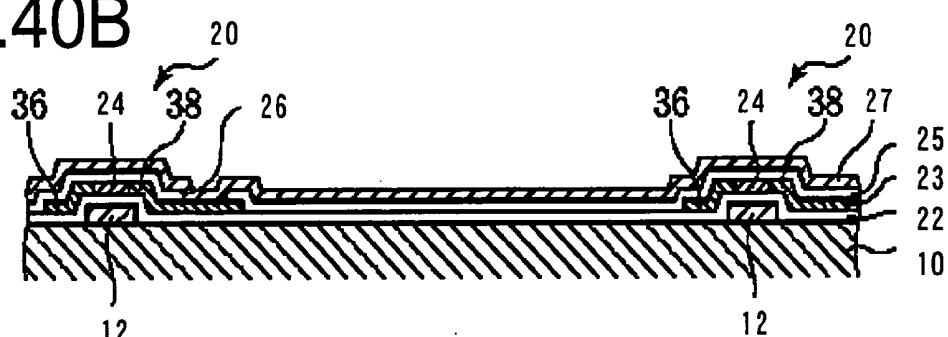


FIG.40C

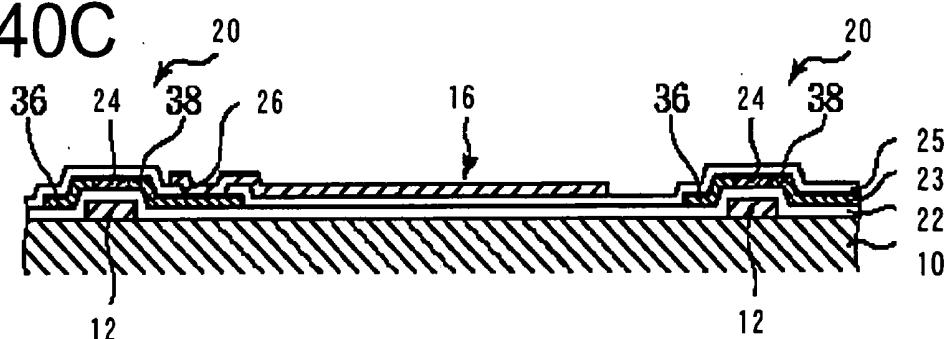


FIG.41A




FIG.41B




FIG.41C




FIG.41D




FIG.41E





FIG.41F

FIG.41G






FIG.41I

FIG.41J






FIG.41L

FIG.41M

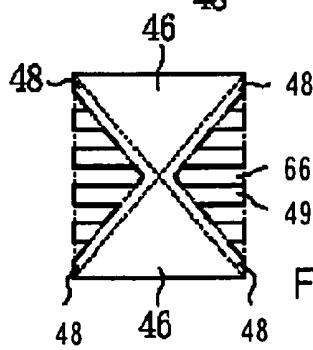
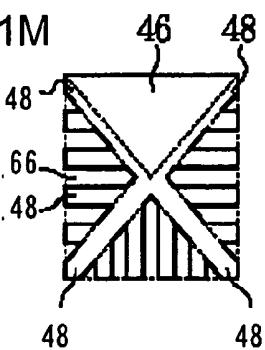


FIG.41N

FIG.42

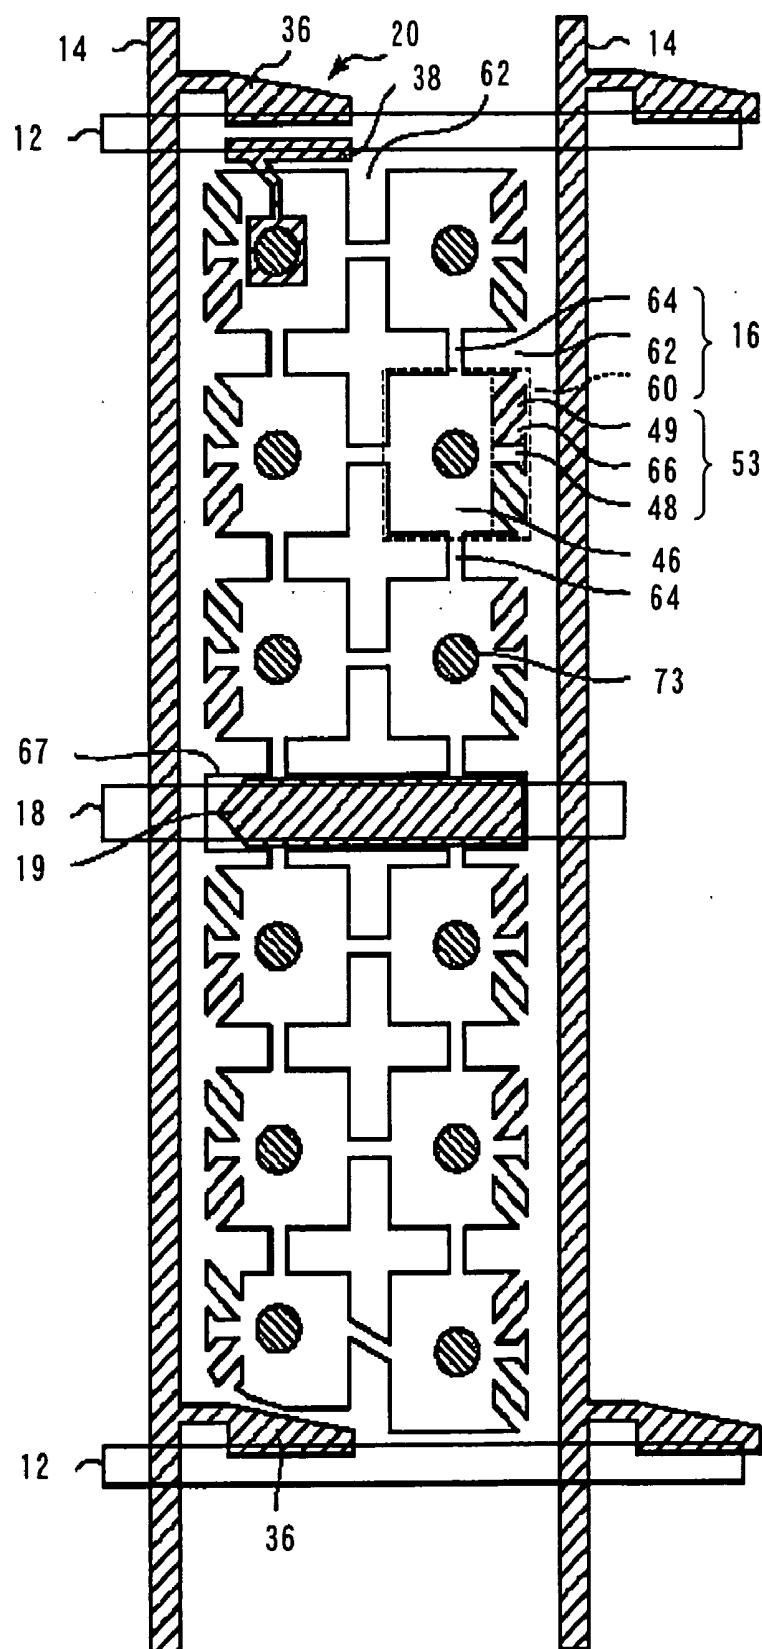


FIG.43

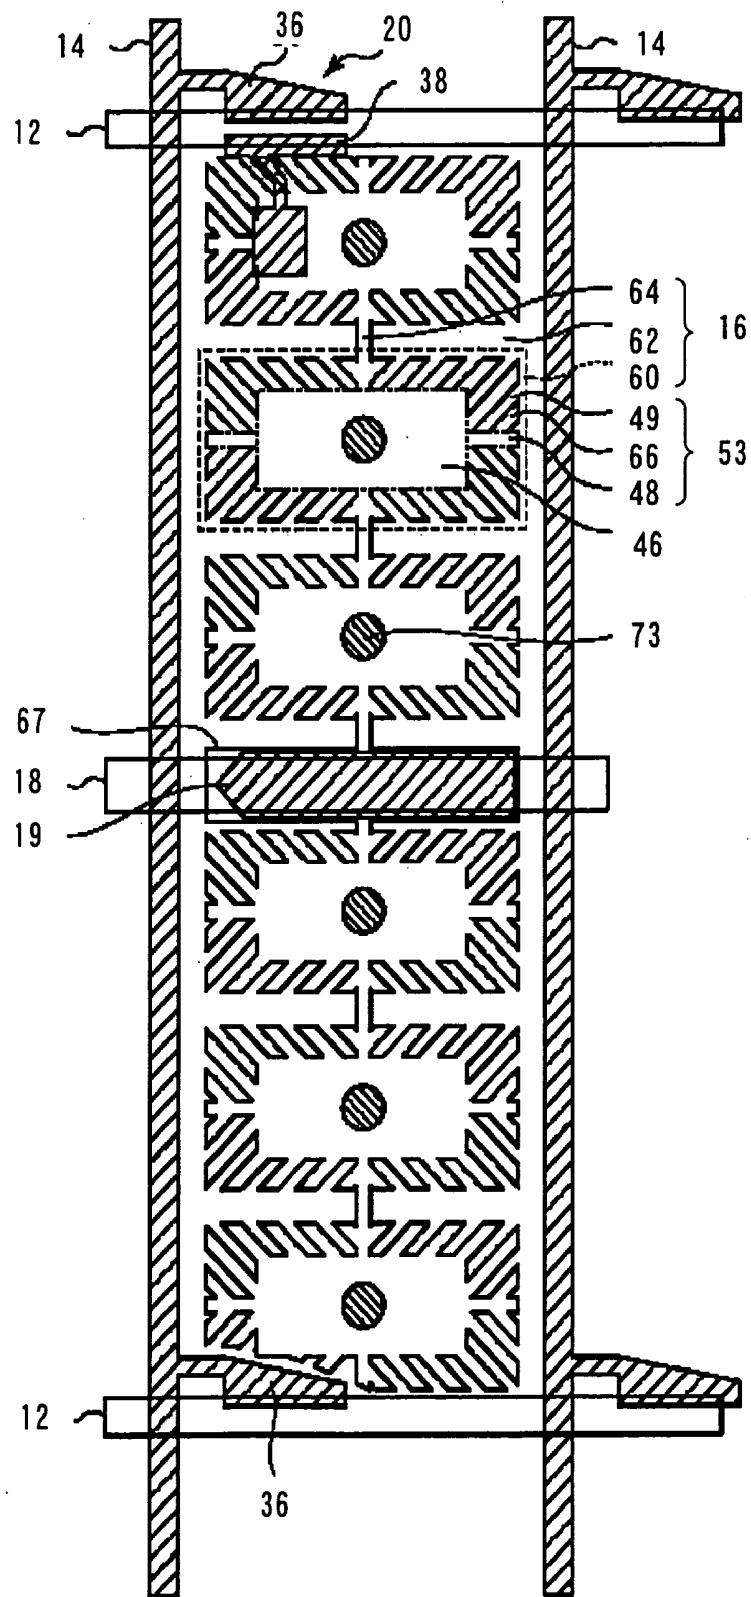


FIG.44A

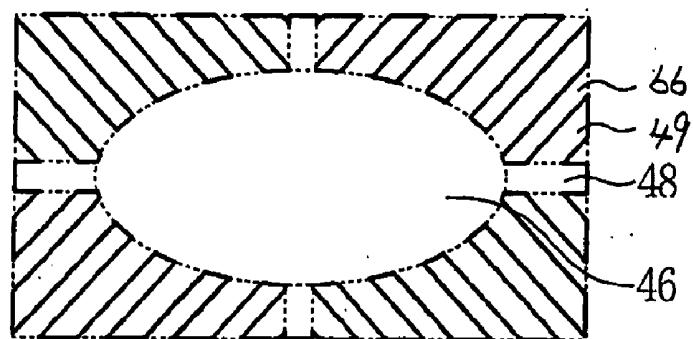


FIG.44B

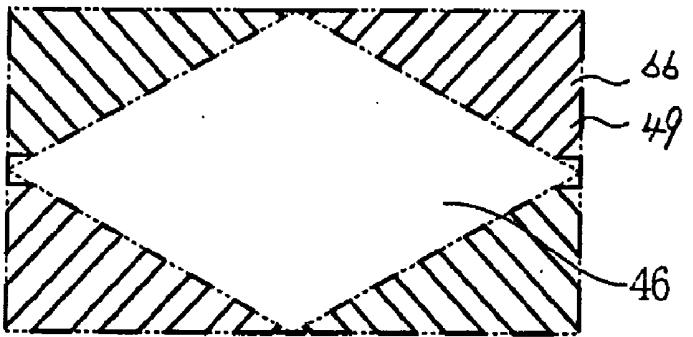


FIG.44C

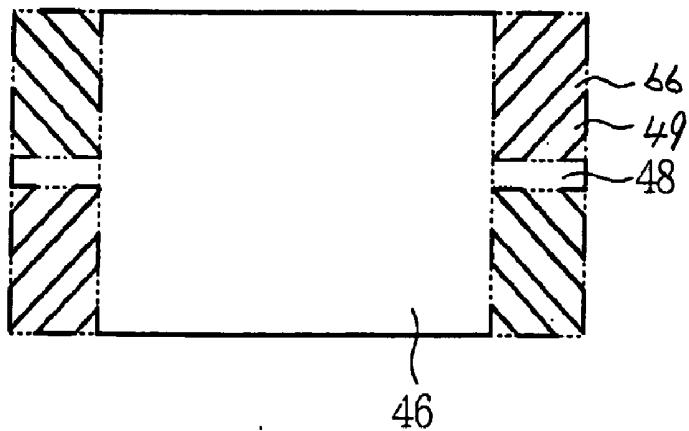


FIG.45

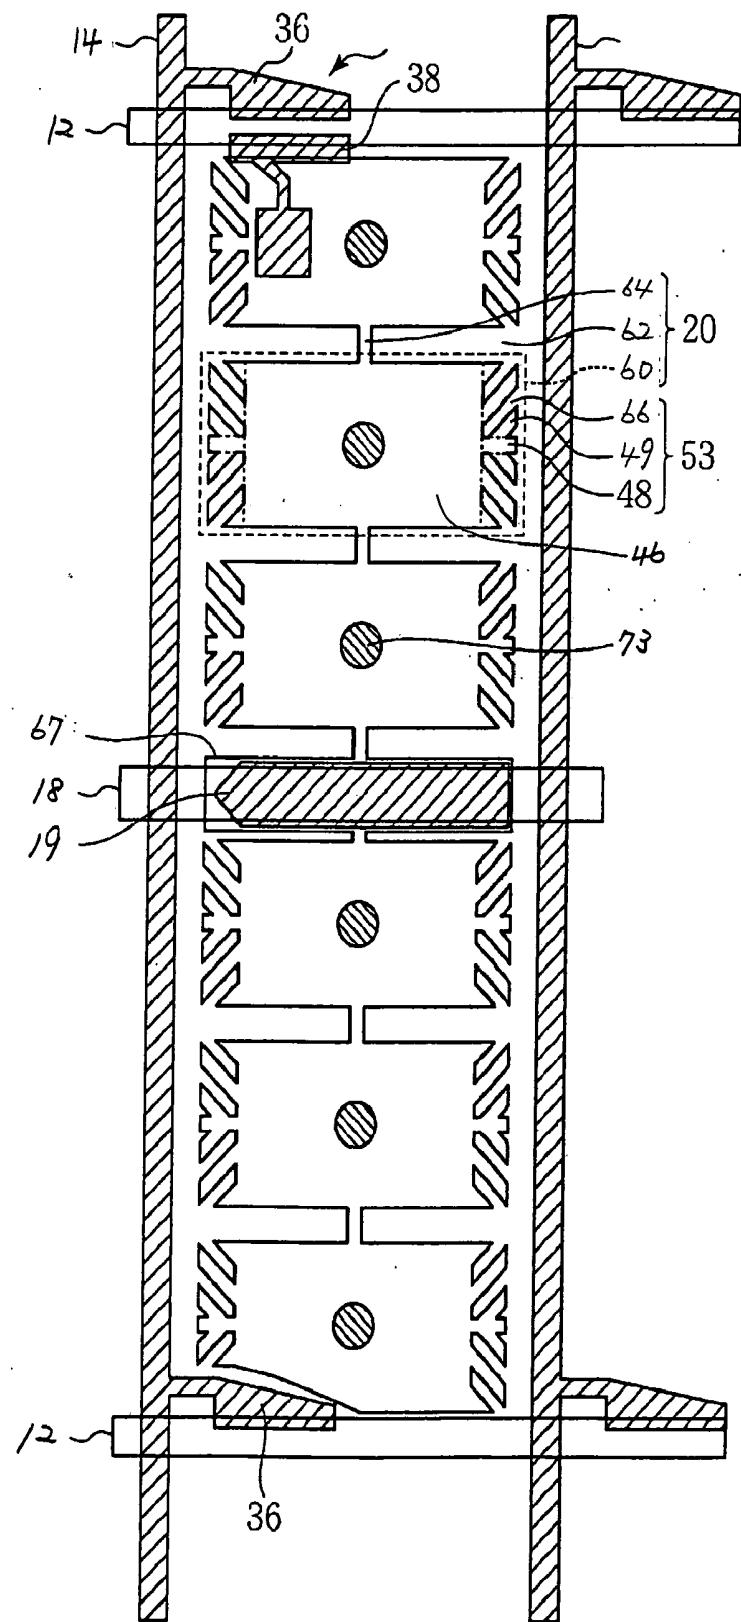


FIG.46

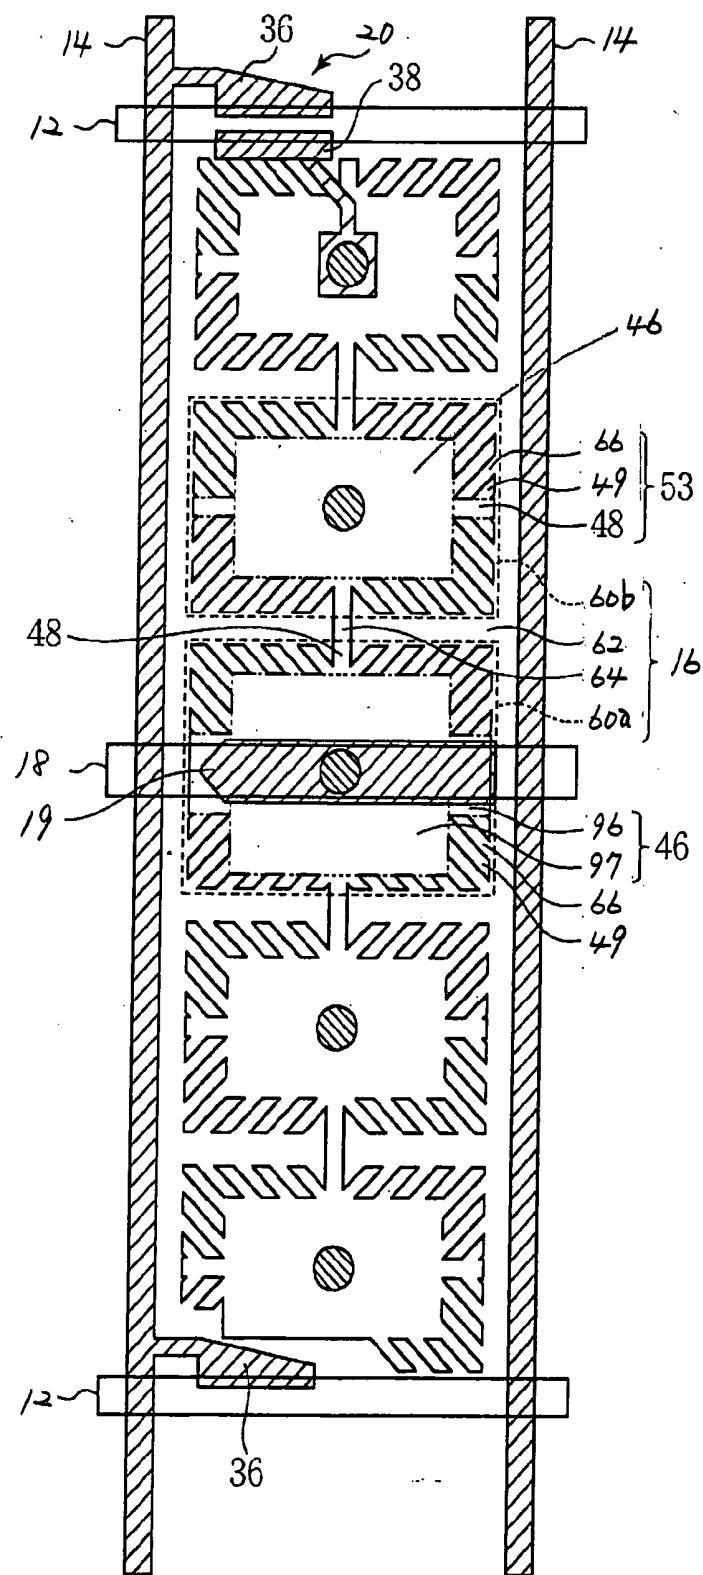


FIG.47

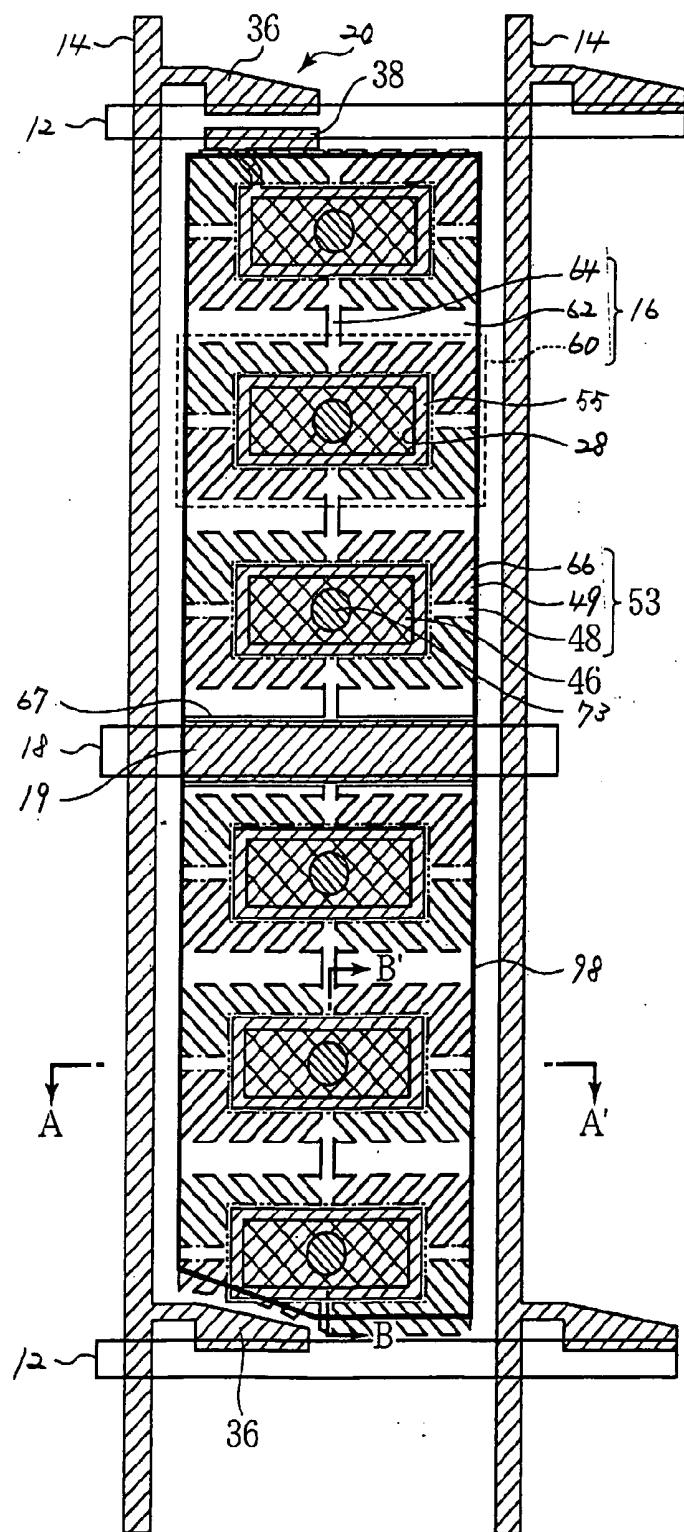


FIG. 48A

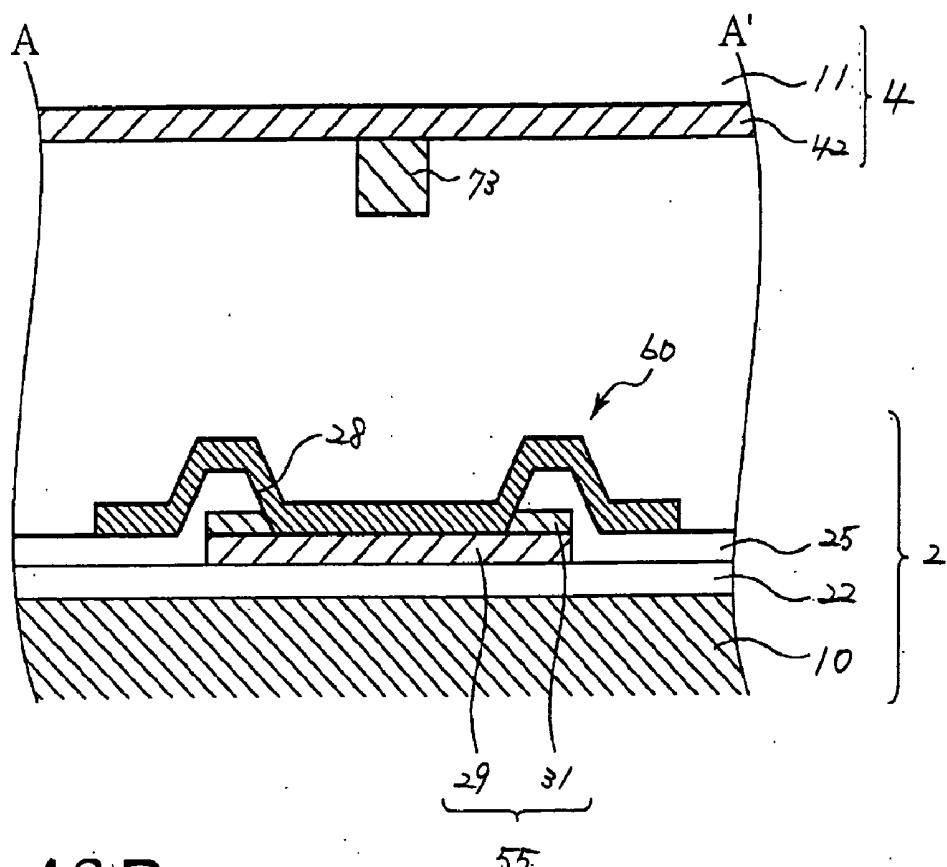


FIG. 48B

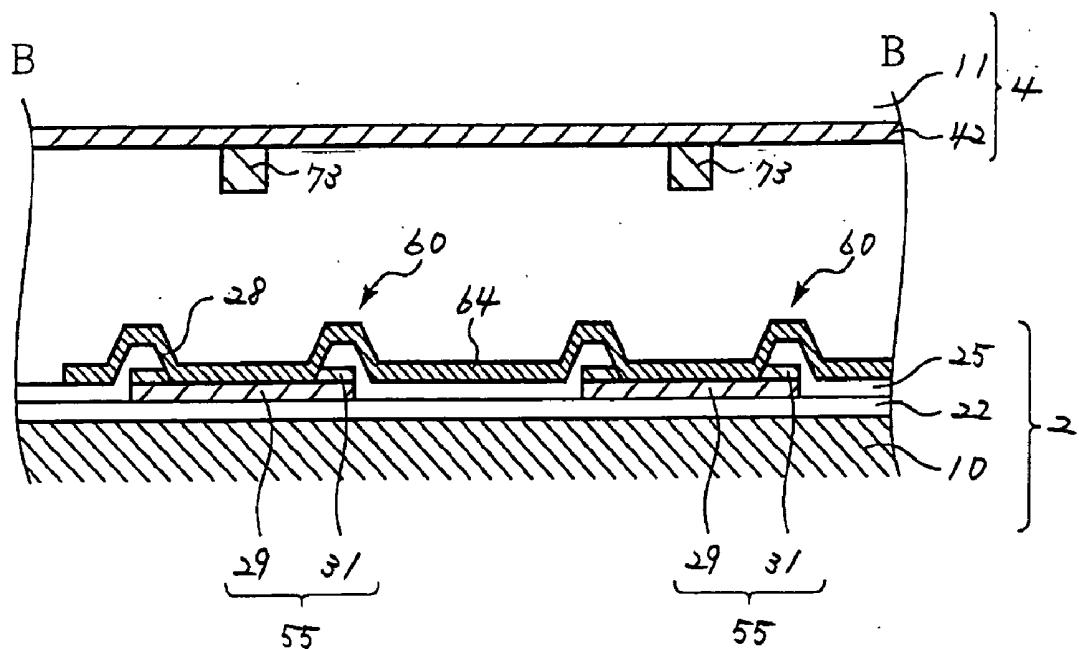


FIG. 49

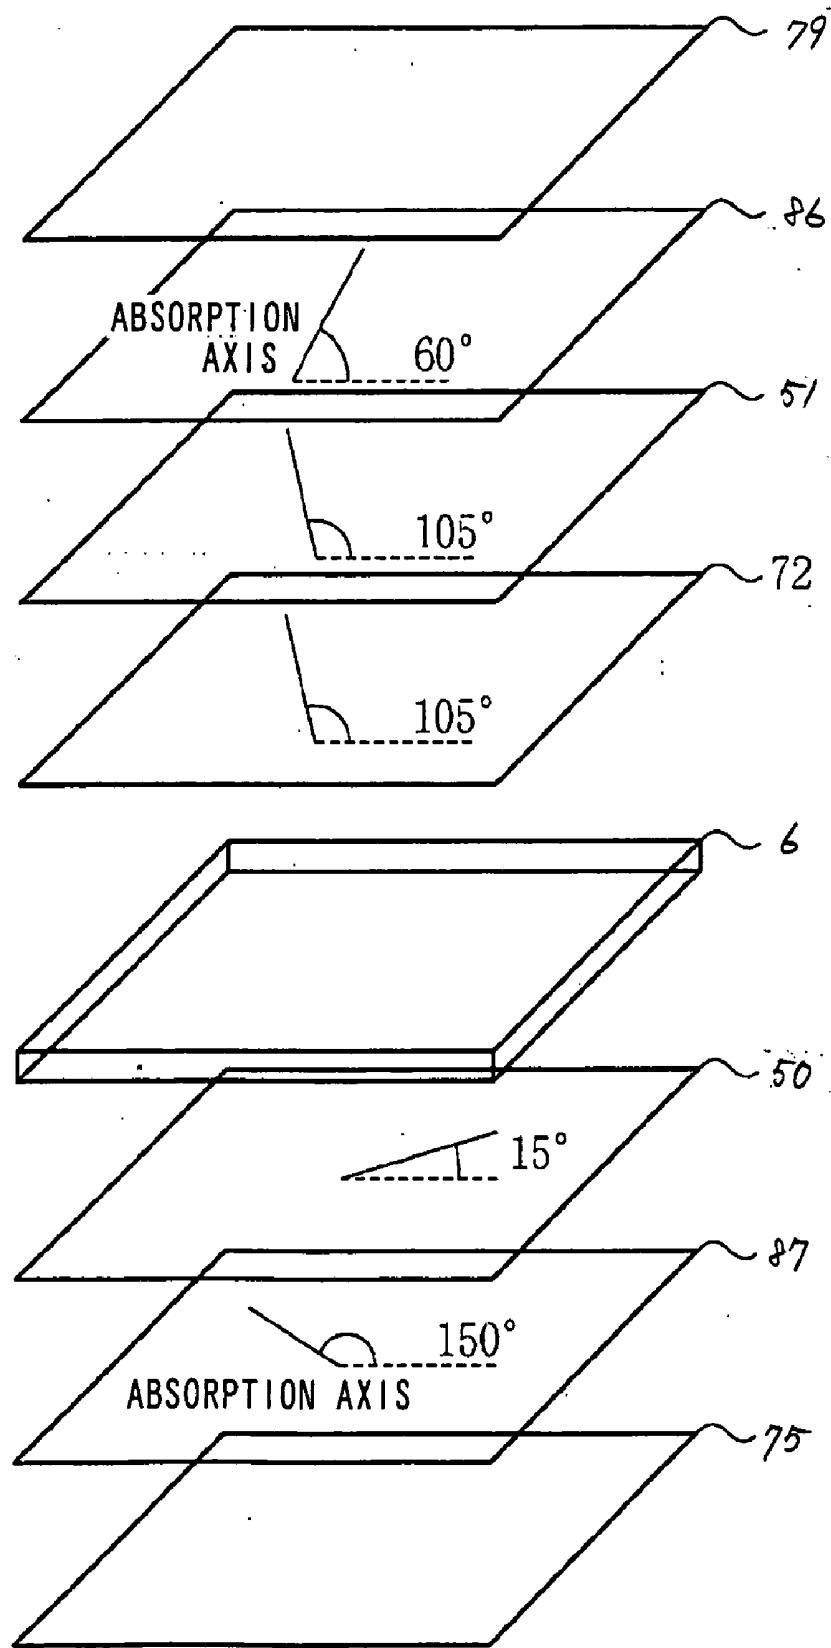


FIG.50

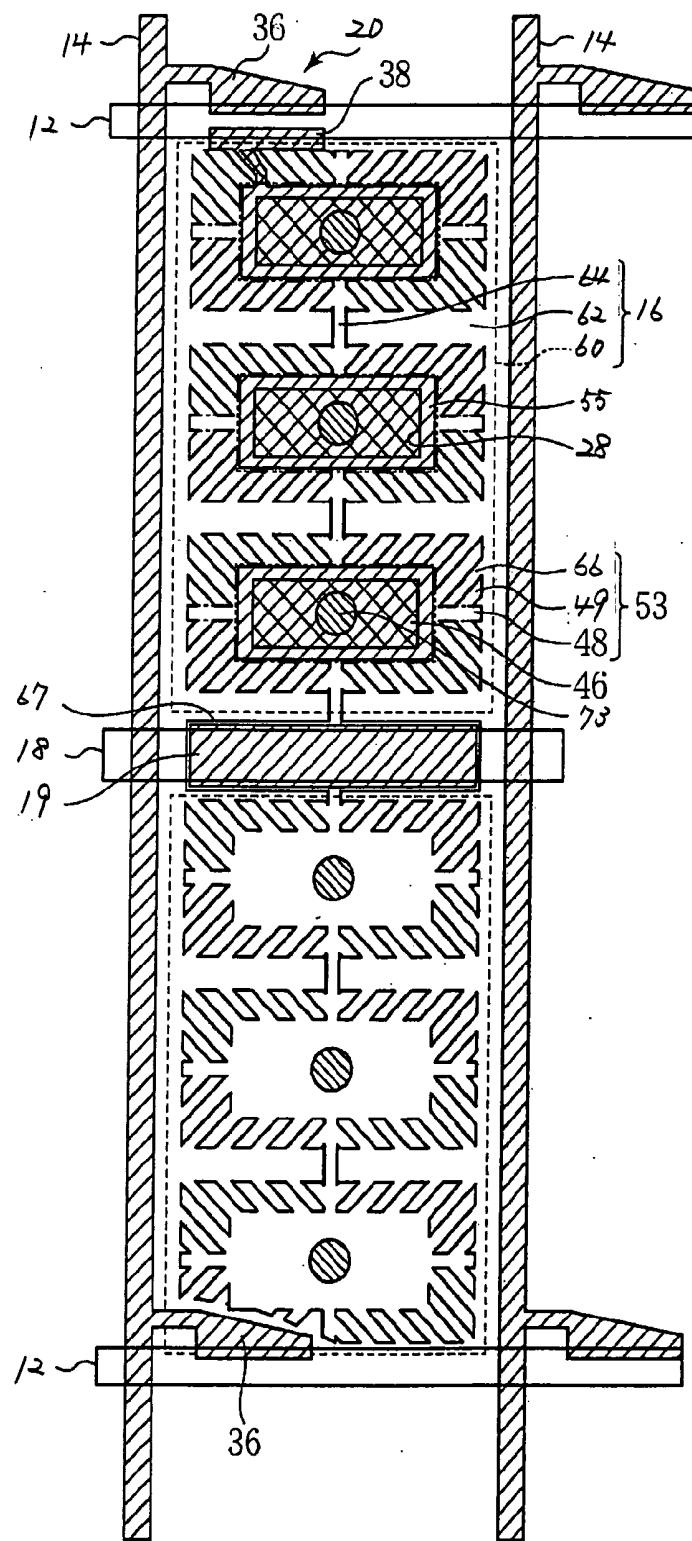


FIG. 51

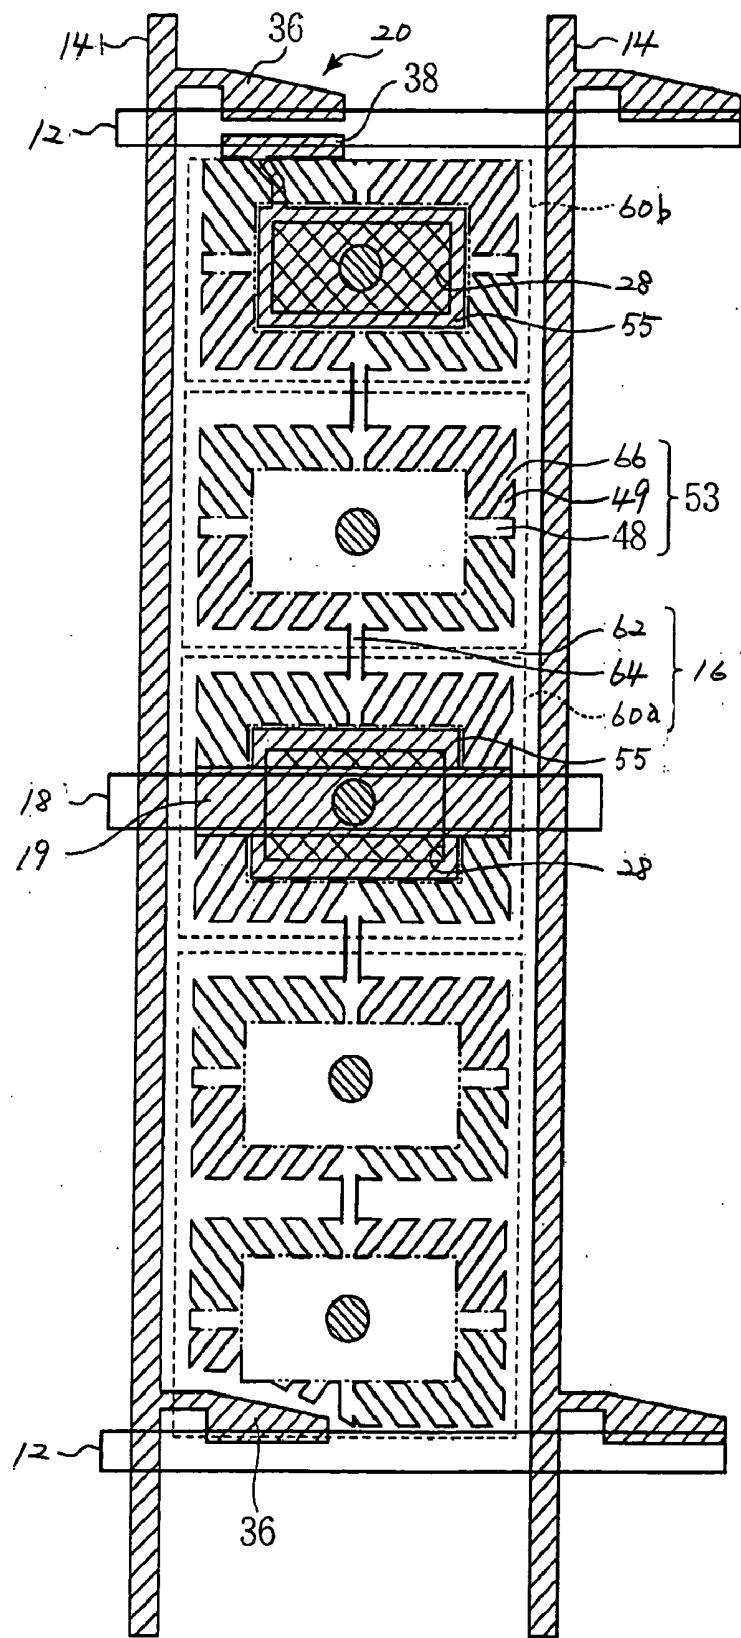


FIG.52A

AREAL RATIO OF REFLECTION AREA WHERE
REFLECTIVITY OF 5% OR MORE IS OBTAINED

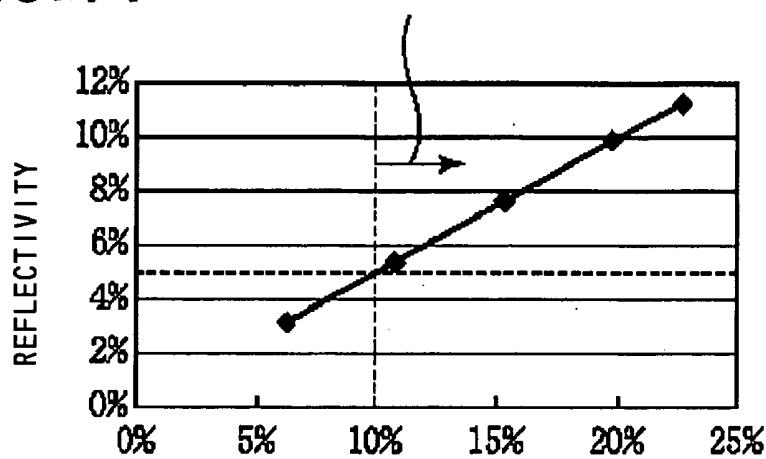
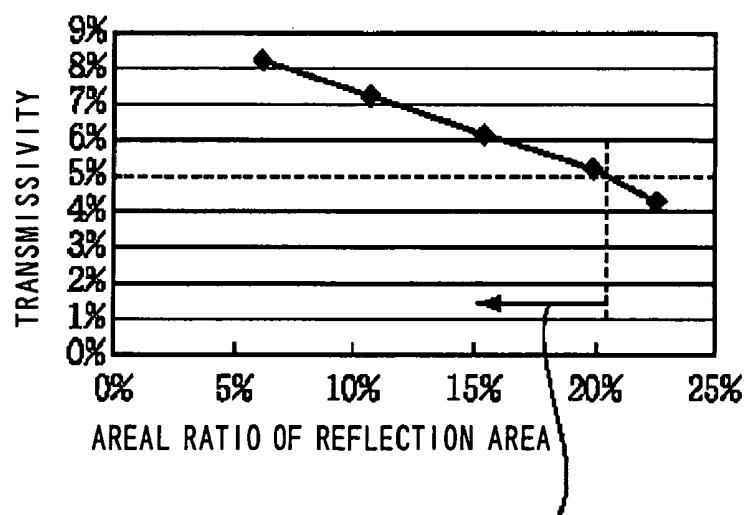


FIG.52B

AREAL RATIO OF REFLECTION AREA



AREAL RATIO OF REFLECTION AREA WHERE
TRANSMISSIVITY OF 5% OR MORE IS OBTAINED

FIG.53A

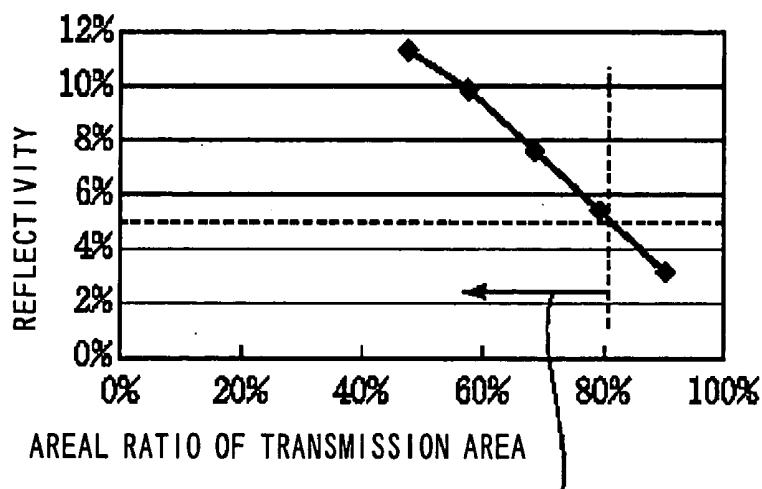


FIG.53B

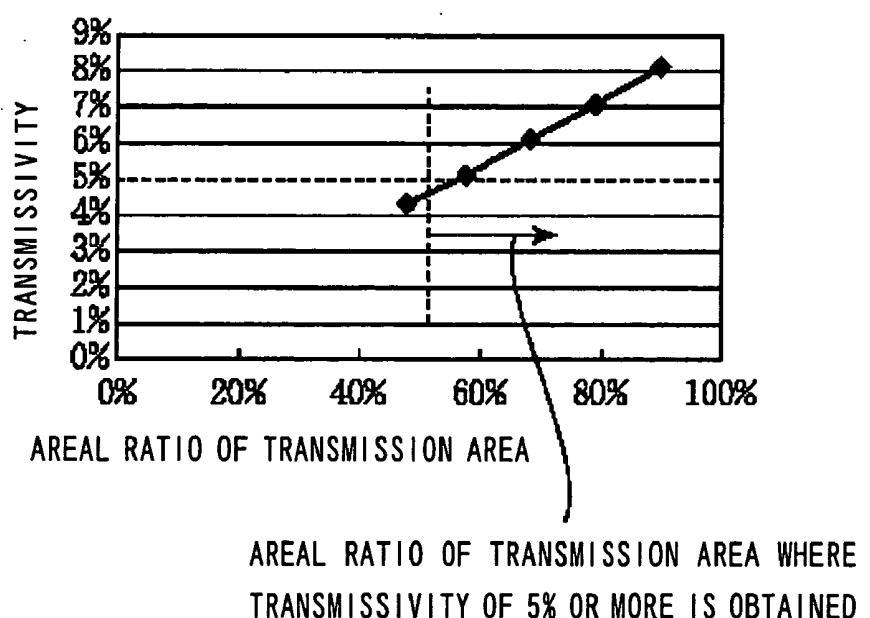


FIG.54A



FIG.54B




FIG.54C

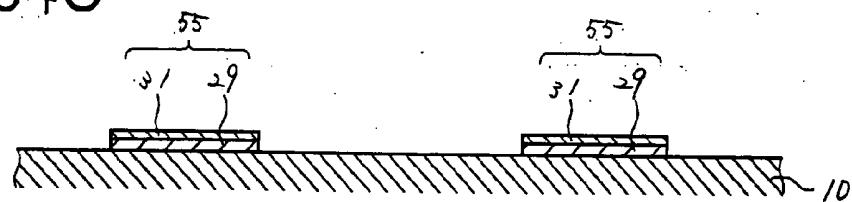


FIG.54D

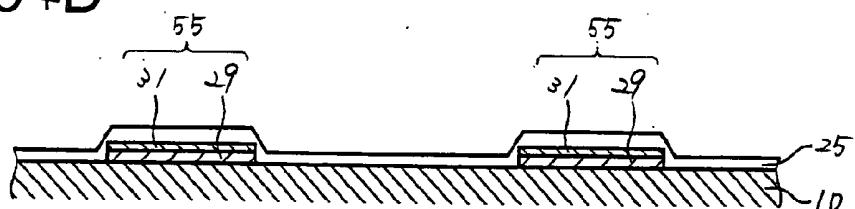


FIG.55A

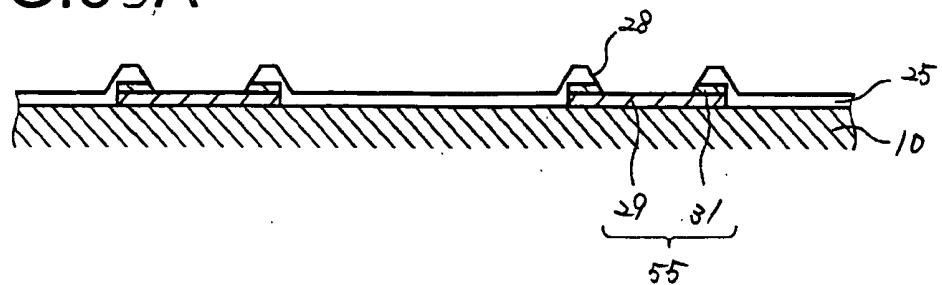


FIG.55B

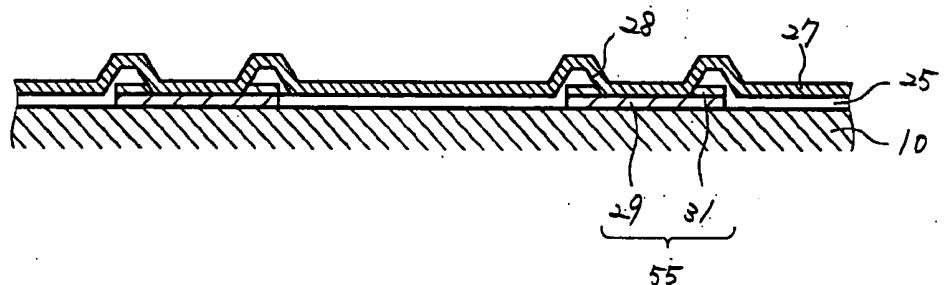


FIG.55C

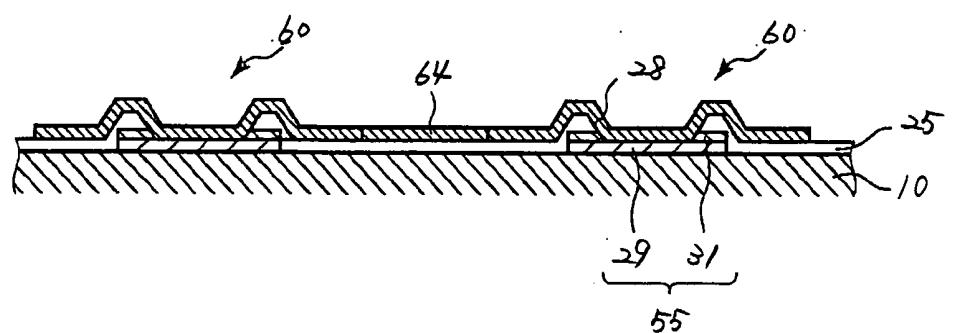


FIG.56

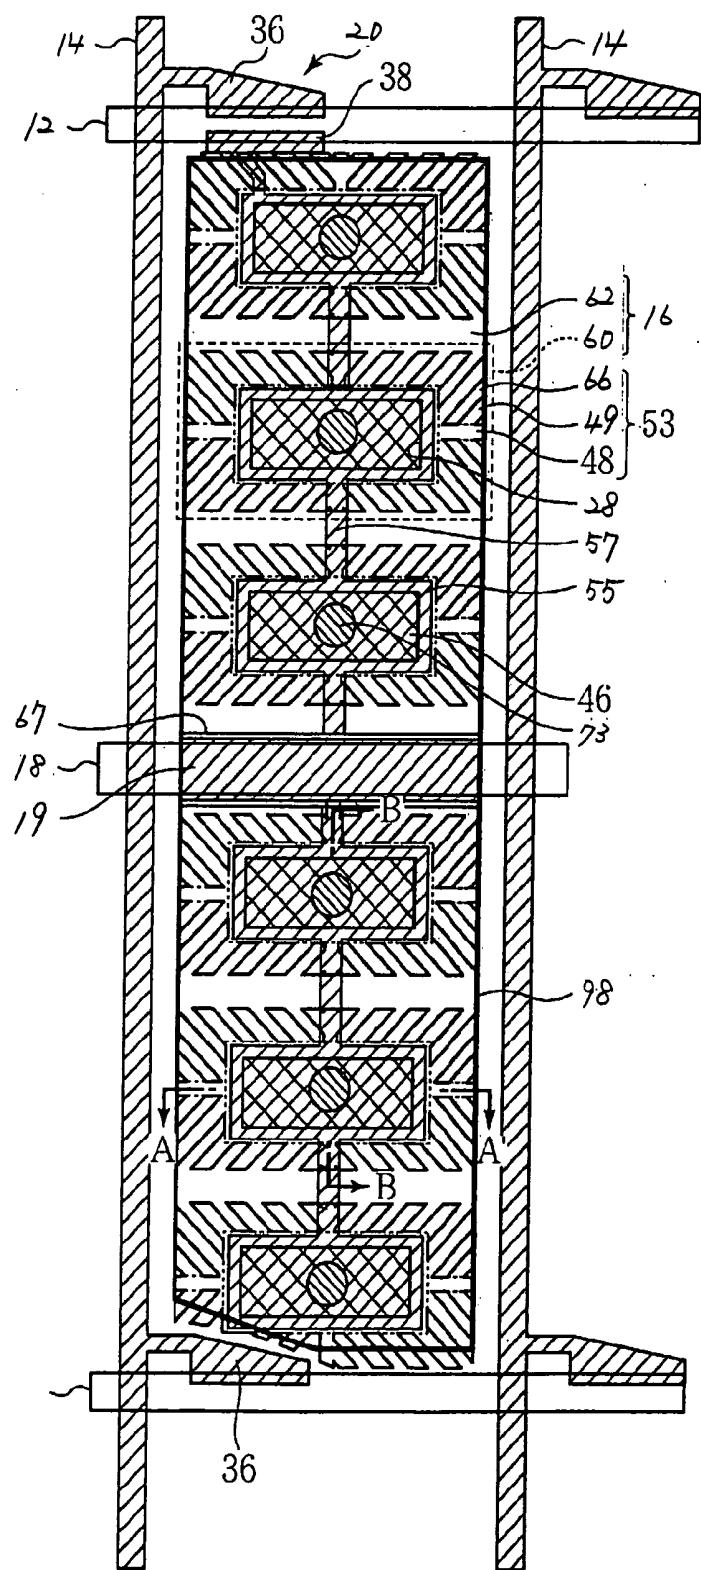


FIG.57A

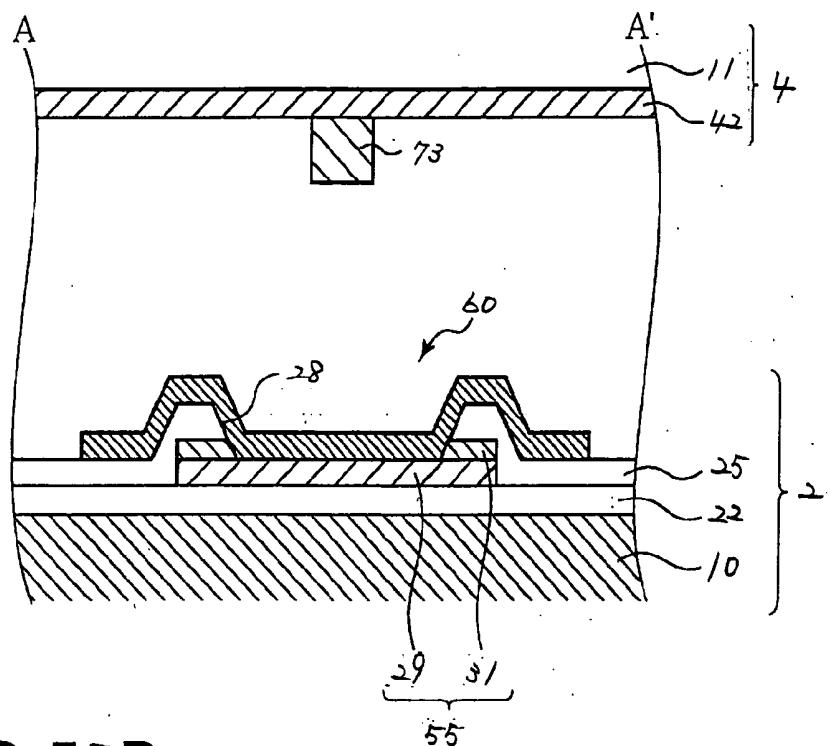


FIG.57B

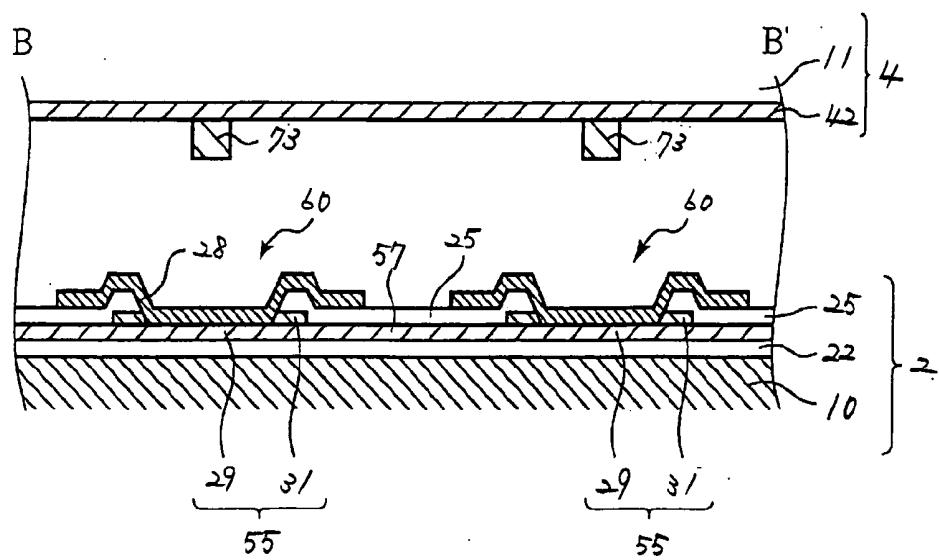


FIG. 58

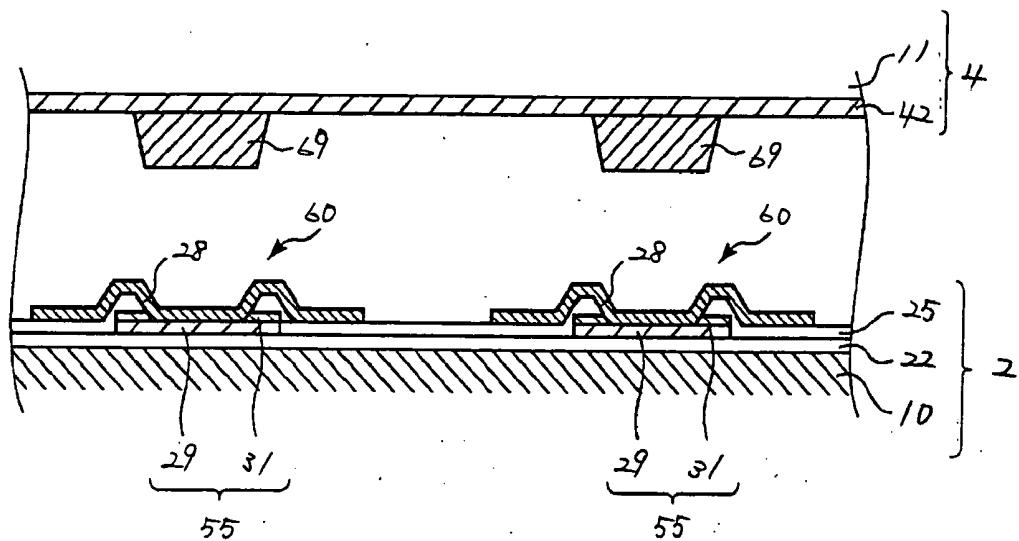


FIG. 59

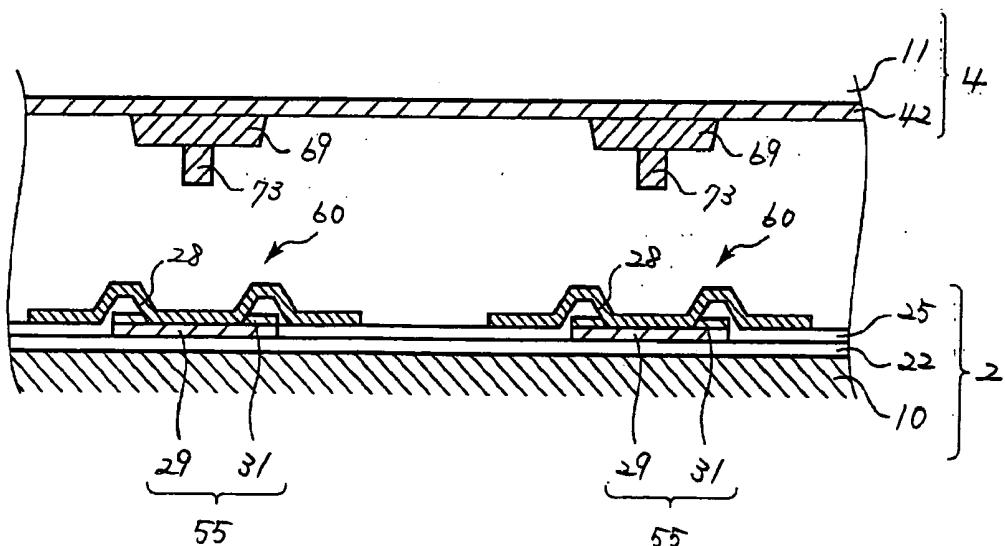


FIG.60

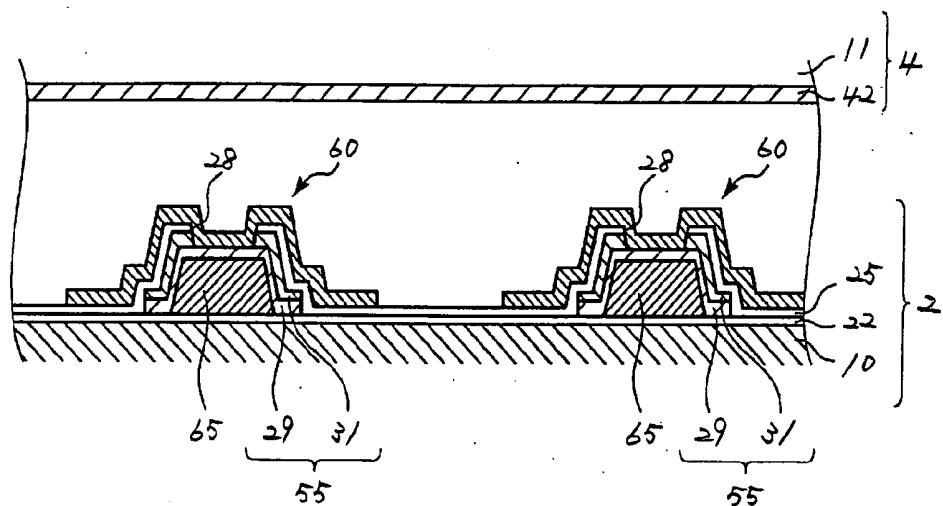


FIG.61A




FIG.61B

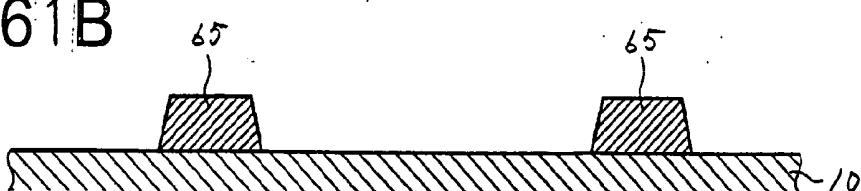


FIG.61C

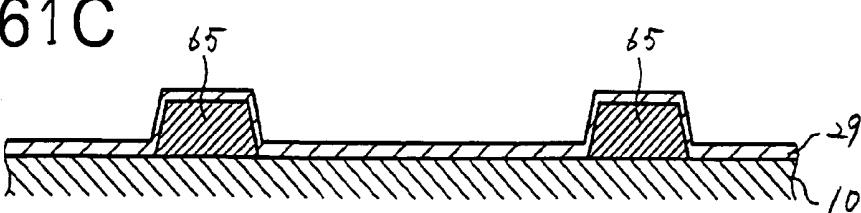


FIG.62A

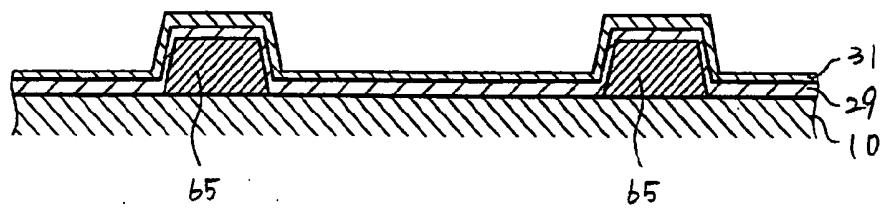


FIG.62B

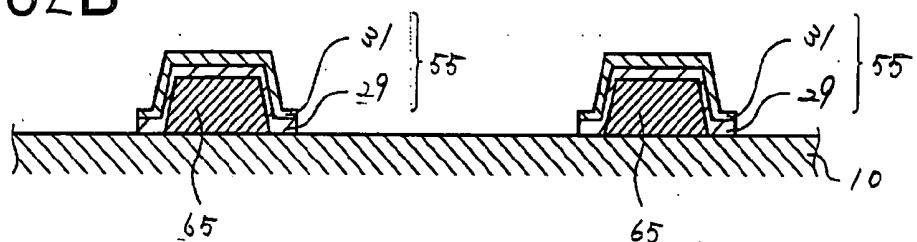


FIG.62C

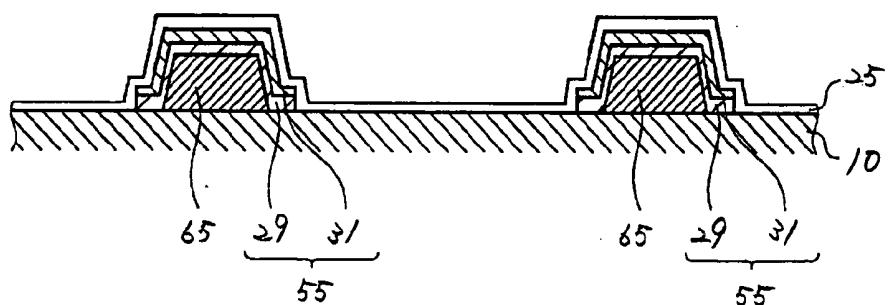


FIG.63A

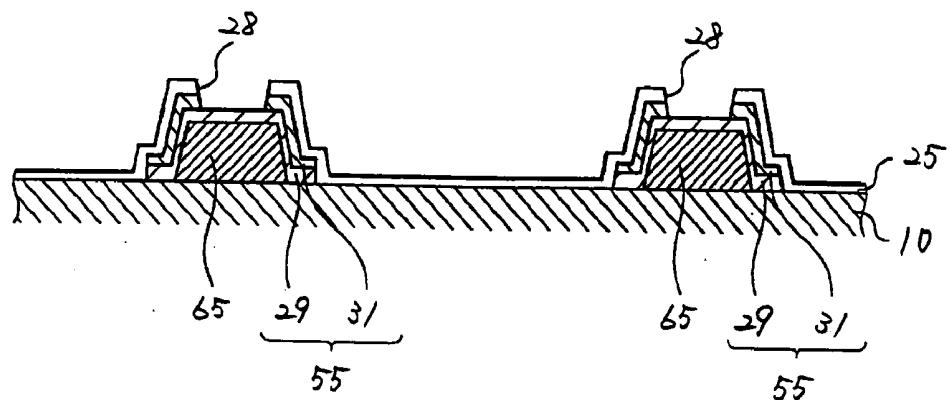


FIG.63B

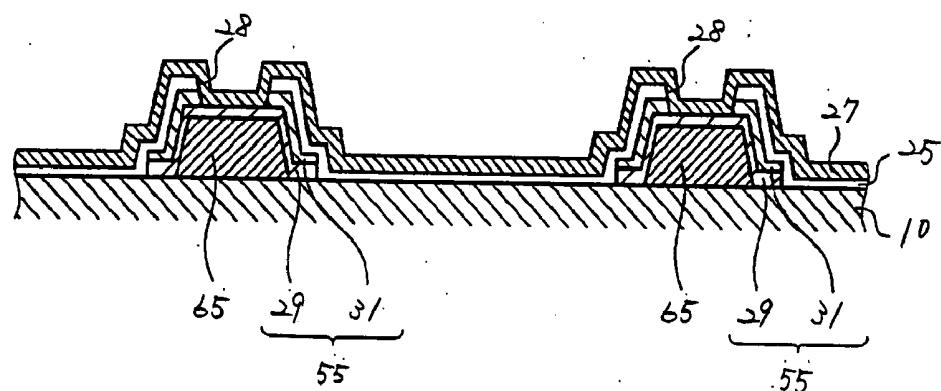


FIG.63C

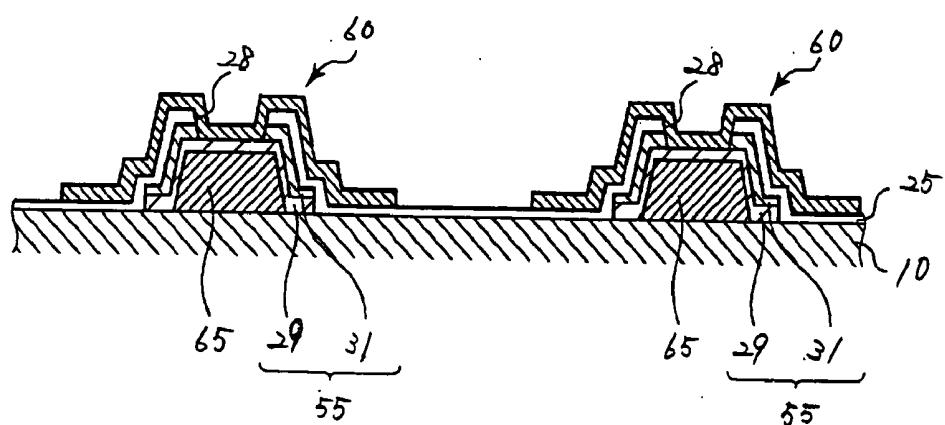


FIG.64.

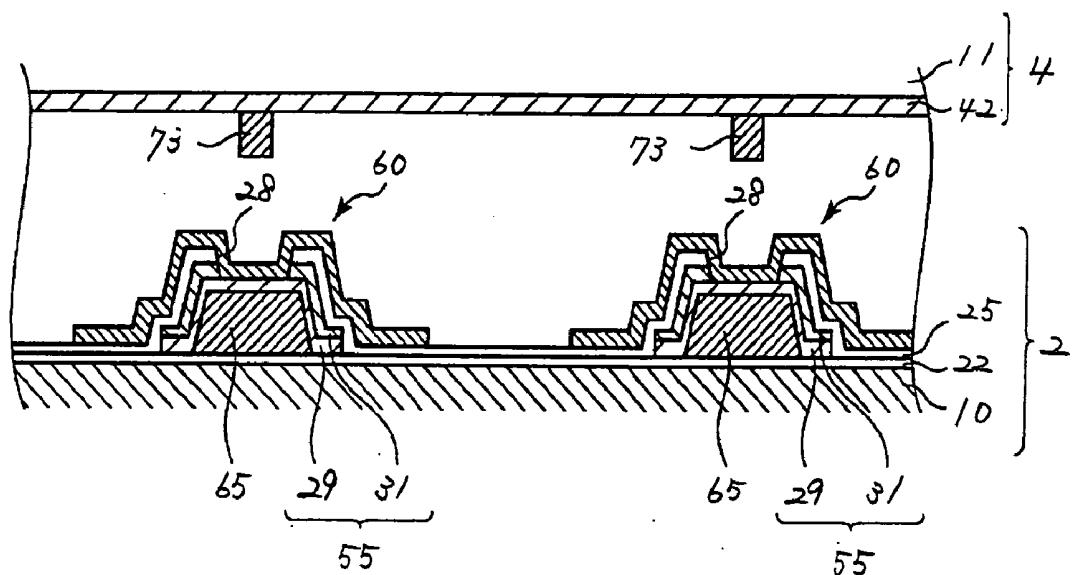


FIG.65

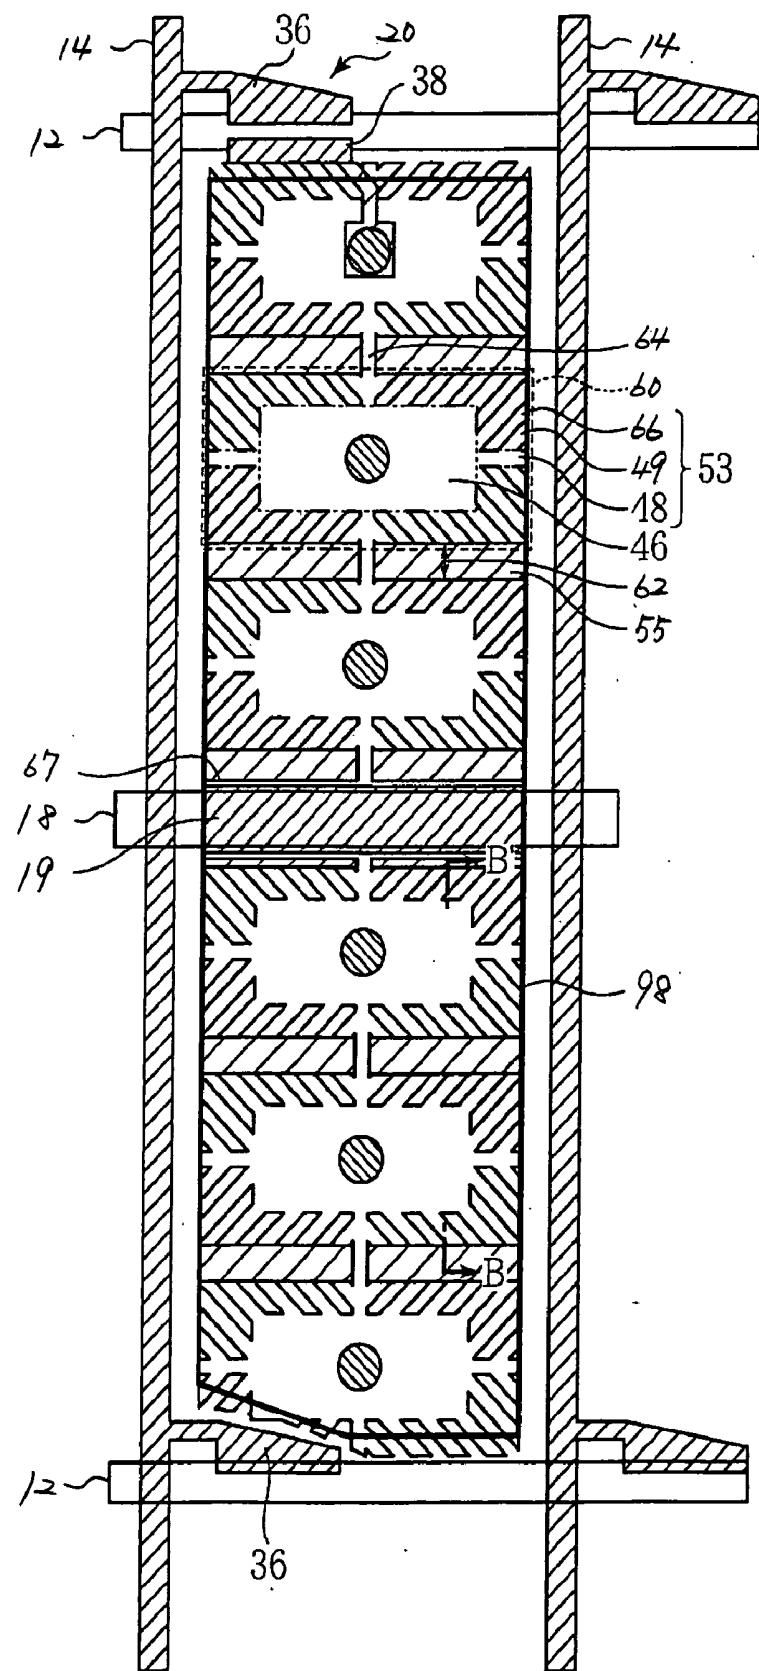


FIG.66

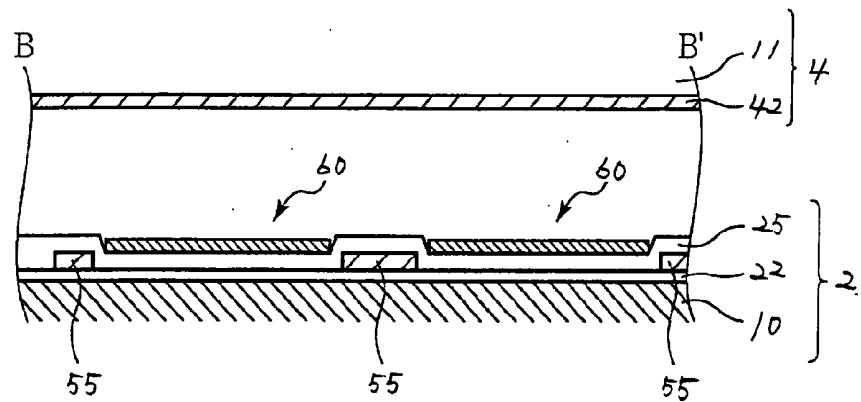


FIG.67A



FIG.67B




FIG.67C

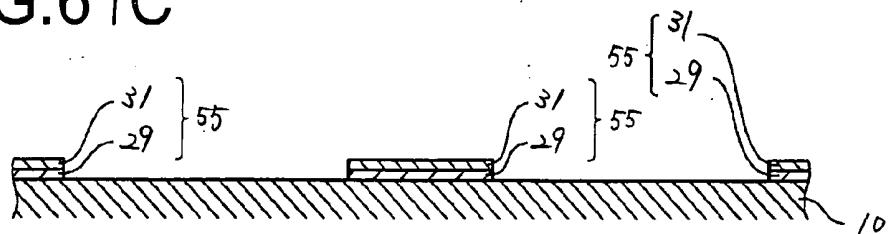


FIG.67D

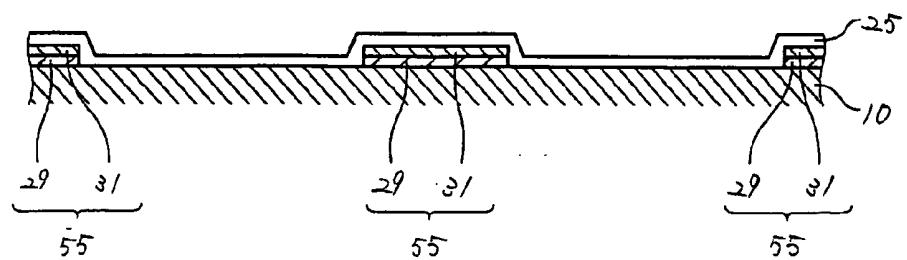


FIG. 68A

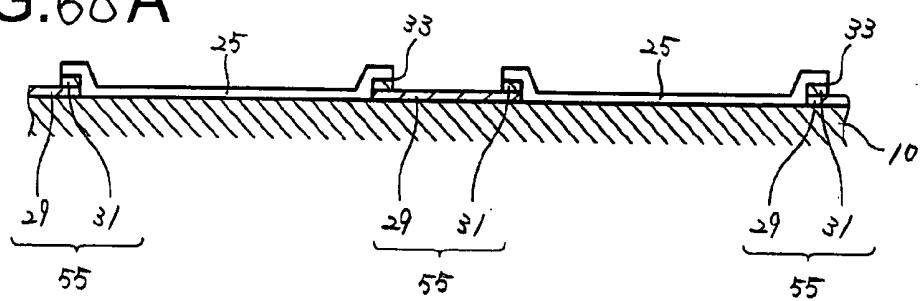


FIG. 68B

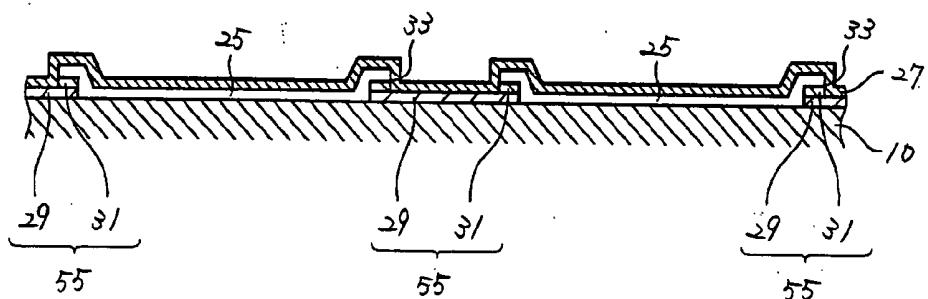


FIG. 68C

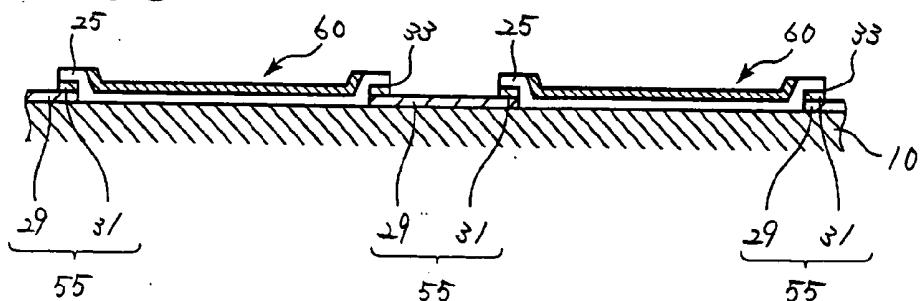


FIG. 69

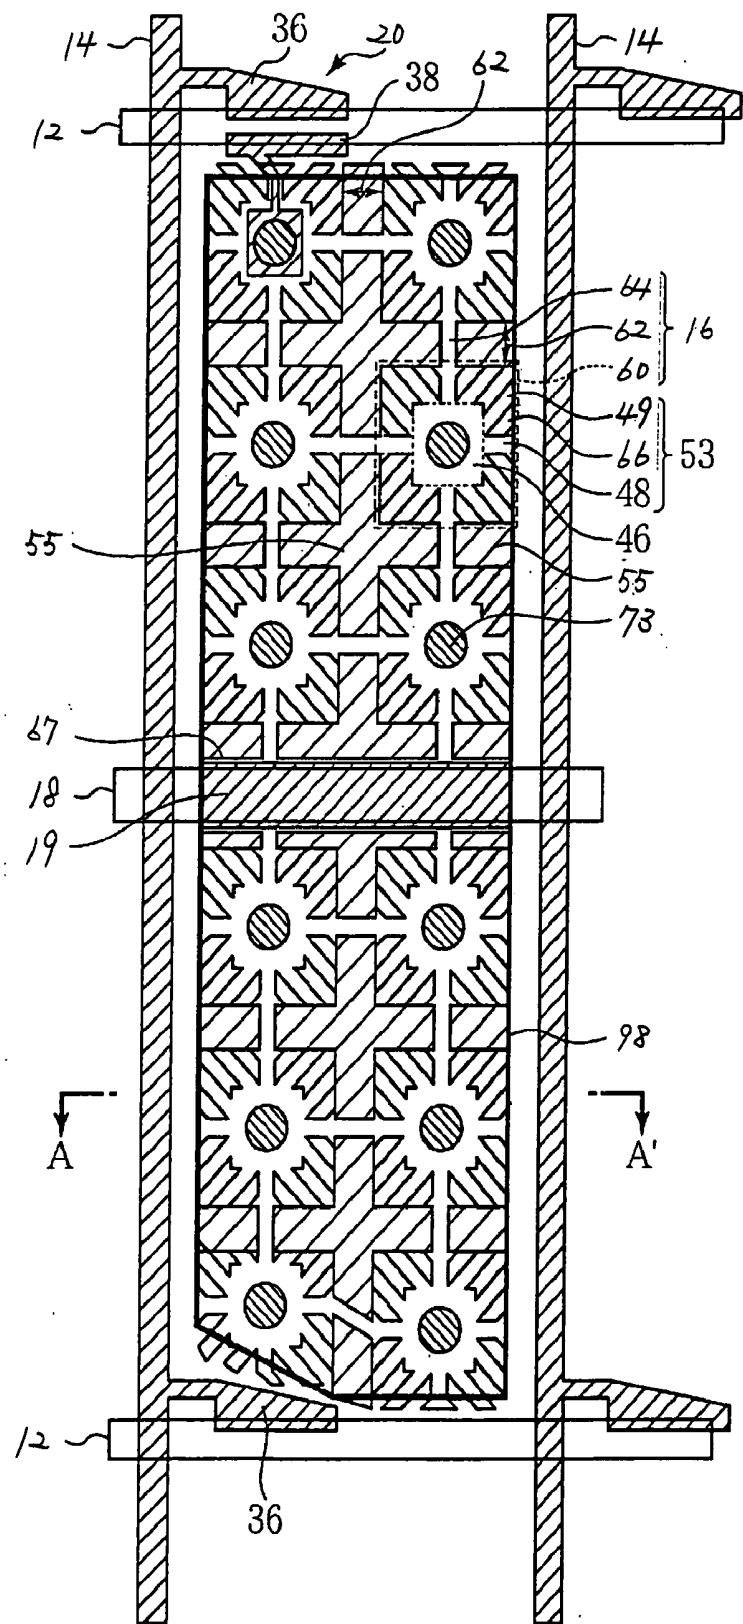


FIG.70

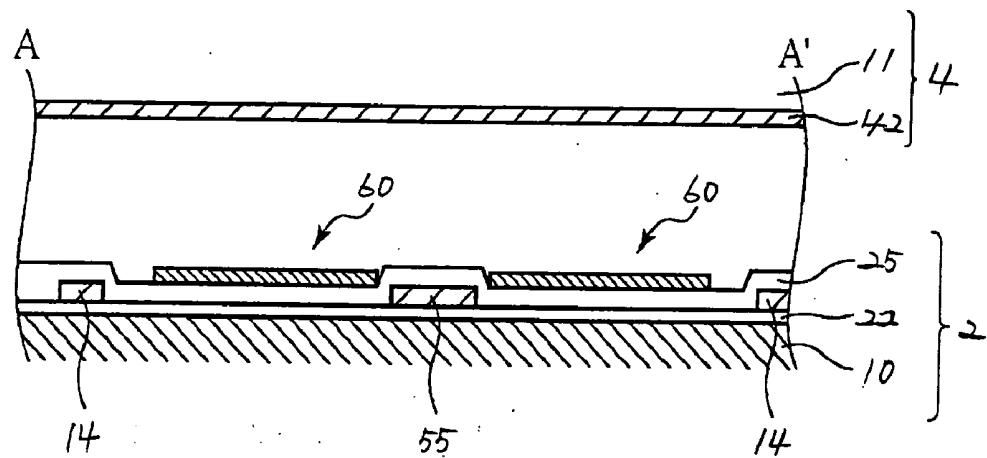


FIG.71

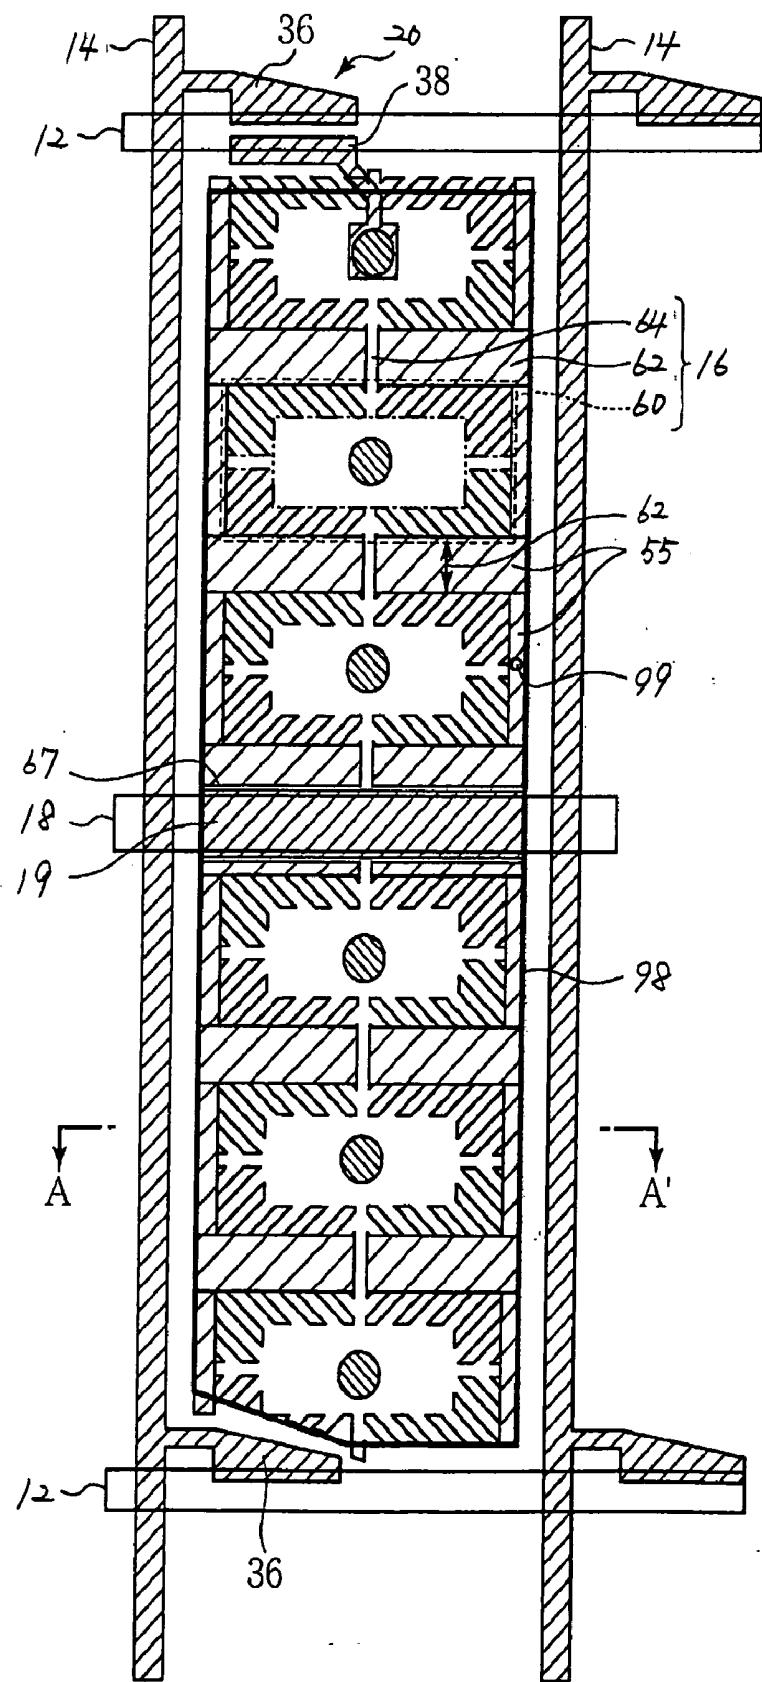


FIG.72

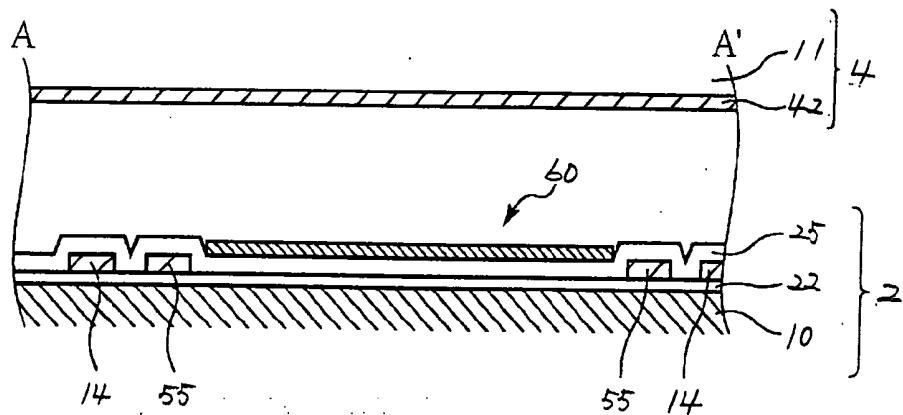


FIG.73A




FIG.73B




FIG.74

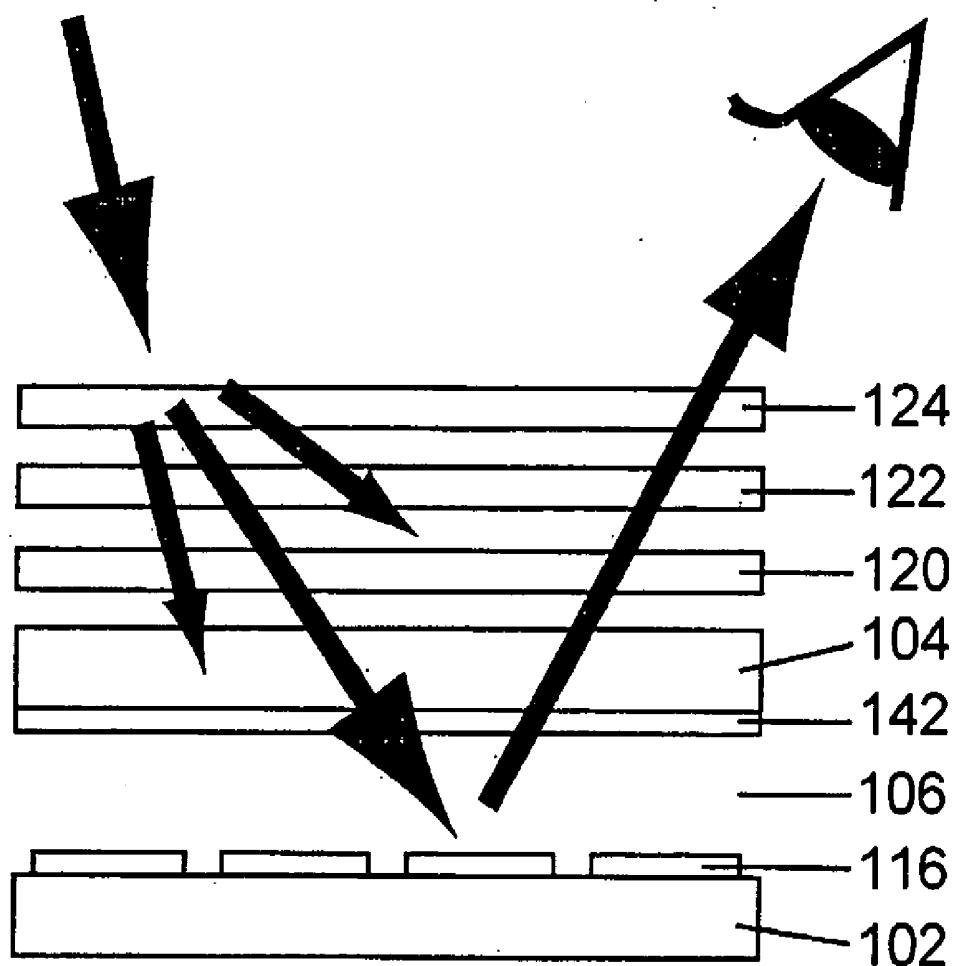


FIG.75A

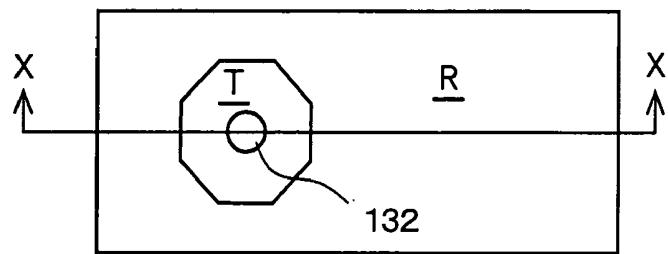


FIG.75B

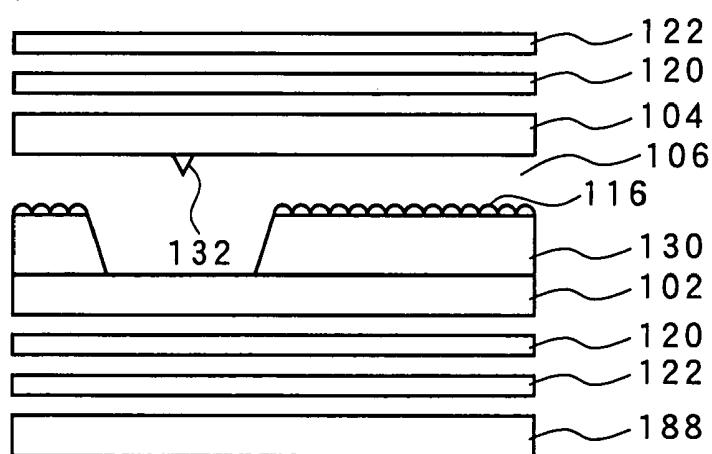


FIG.76A

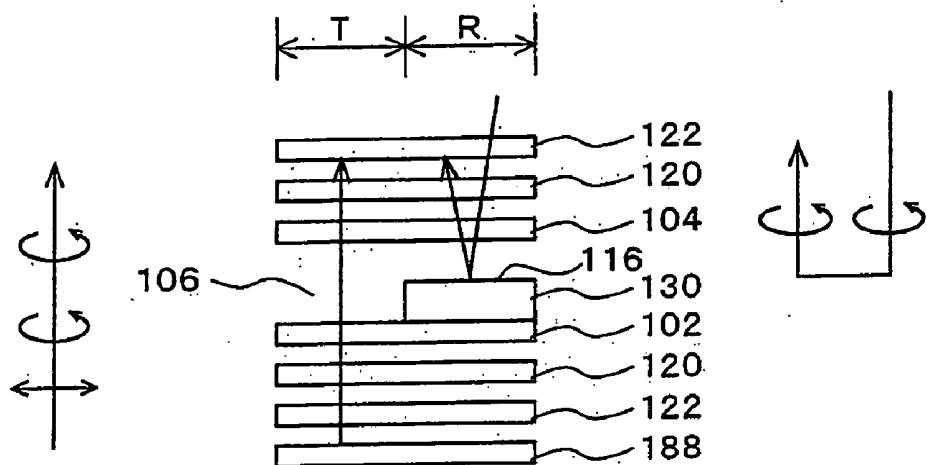
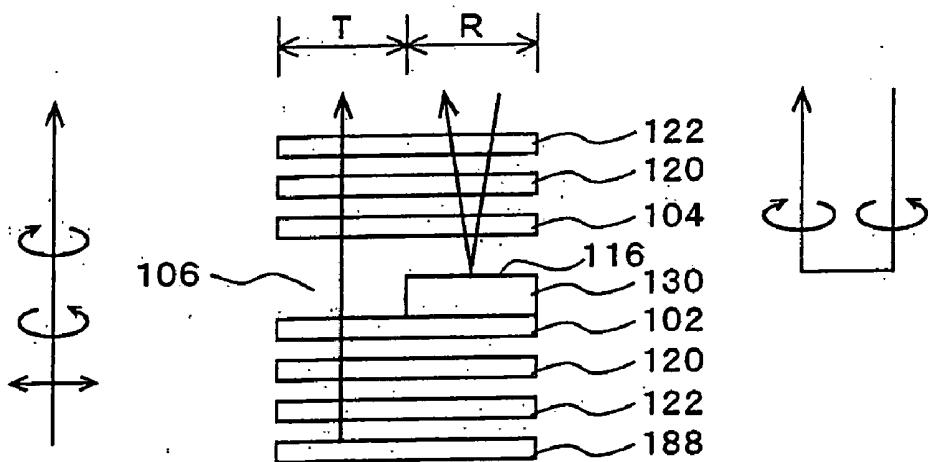


FIG.76B



LIQUID CRYSTAL DISPLAY DEVICE AND METHOD OF MANUFACTURING THE SAME

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a liquid crystal display device used as a display part of an information equipment or the like and a method of manufacturing the same, and particularly to a transreflective type liquid crystal display device used for a low power consumption equipment such as a portable information terminal and a method of manufacturing the same.

[0003] 2. Description of the Related Art

[0004] In recent years, an active matrix type liquid crystal display device including a thin film transistor (TFT) in each pixel has been widely used as a display device for any use. The liquid crystal display device is classified into a transmission type, a reflection type and a transreflective type by its lighting system. In the transmission type, transmitted light from a backlight unit is used for display. In the reflection type, reflected light of outside light is used for display. In the transreflective type, transmitted light of a backlight unit is used for display in a dark place and reflected light of outside light is used for display in a bright place. In recent years, as a display device for a mobile terminal or a notebook PC, a transreflective type (reflective and transmissive) liquid crystal display device in which display in both reflective and transmissive modes is enabled has been used.

[0005] Here, a conventional liquid crystal display device will be described. FIG. 74 shows a sectional structure of a reflection type liquid crystal display device disclosed in non-patent document 1 (set forth below). As shown in FIG. 74, a liquid crystal 106 is sealed between a pair of substrates 102 and 104 disposed to be opposite to each other. The alignment state of the liquid crystal 106 is a bend alignment called ROCB (Reflective Optically Compensated Birefringence). A reflecting electrode 116 having a mirror-like flat reflecting surface is formed on the surface of the one substrate 102 at the side of the liquid crystal 106. A common electrode 142 made of a transparent electrode film is formed on the surface of the other substrate 104 at the side of the liquid crystal 106. A phase difference film (quarter-wave plate) 120, a polarizing plate 122 and an optical path control film 124 are disposed in this order at the panel outer side (observer side) of the other substrate 104.

[0006] The optical path of incident outside light is bent by the optical path control film 124, reaches the reflecting electrode 116, is reflected, and is emitted toward the observer side. Since the optical path control film 124 for diffusing and transmitting light is provided, the optical path of the light reflected at the surface of the optical path control film 124 is different from the optical path of the light having been transmitted through the optical path control film 124 and reflected at the surface of the reflecting electrode 116. Then, when the observer sees the display screen, the display and the outside light do not overlap with each other, and a clear display image can be observed.

[0007] FIGS. 75A and 75B show a structure of a transreflective type liquid crystal display device disclosed in non-patent document 2 (set forth below). FIG. 75A shows

a structure of approximately one pixel of the transreflective type liquid crystal display device, and FIG. 75B shows a sectional structure of the transreflective type liquid crystal display device cut along line X-X of FIG. 75A. As shown in FIGS. 75A and 75B, a pixel area is divided into a transmission area T and a reflection area R. An insulating material (resin layer) 130 is formed in the reflection area R of a TFT substrate 102 so that the cell thickness of the reflection area R becomes half of that of the transmission area T. A reflecting electrode 116 having an uneven surface is formed on the insulator 130. A protrusion 132 for alignment controlling a vertically aligned liquid crystal 106 is formed at the center part of the transmission area T of an opposite substrate 104. A pair of quarter-wave plates 120 are respectively disposed at the panel outer side of the TFT substrate 102 and at the panel outer side of the opposite substrate 104. A pair of polarizing plates 122 are respectively disposed at the further outer sides of the respective quarter-wave plates 120.

[0008] Although this liquid crystal display device is the same as the liquid crystal display device shown in FIG. 74 in that the reflecting electrode 116 is formed on the surface of the substrate 102 at the side of the liquid crystal 106, the reflecting surface of the reflecting electrode 116 is uneven. The incident outside light from the observer side is scattered and reflected at the reflecting electrode 116, and is emitted toward the observer side.

[0009] FIG. 76A shows a state in which a voltage is not applied to the liquid crystal 106, and FIG. 76B shows a state where a predetermined voltage is applied to the liquid crystal 106. As shown in FIG. 76A, in the state of voltage non-application, since a liquid crystal molecule is aligned vertically to the substrate surface, the liquid crystal 106 does not exert an optical effect on light. When a reflective display is performed, the light having been transmitted through the polarizing plate 122 is transmitted through the quarter-wave plate 120 and is incident on the liquid crystal 106, and after the light is reflected at the reflecting electrode 116, it is again transmitted through the quarter-wave plate 120. That is, the light is transmitted through the quarter-wave plate 120 twice, so that its polarization state is rotated by 90°. Accordingly, this light is absorbed by the polarizing plate 122. Thus, black is displayed in the reflection mode.

[0010] Besides, when a transmissive display is performed, light having been transmitted through the polarizing plate 122 at the side of a backlight unit 188 is transmitted through the quarter-wave plate 120, is incident on the liquid crystal 106, and is transmitted through the quarter-wave plate 120 at the observer side. That is, the light is transmitted through the quarter-wave plate 120 twice, so that its polarization state is rotated by 90°. Accordingly, this light is absorbed by the polarizing plate 122 at the observer side. Thus, black is displayed in the transmission mode.

[0011] On the other hand, in the state where the predetermined voltage is applied, since the liquid crystal molecule is inclined with respect to the substrate surface, the liquid crystal 106 exerts a predetermined optical effect on light. As shown in FIG. 76B, light having been transmitted through the polarizing plate 122 changes its polarization state by the liquid crystal 106. Thus, white is displayed in both the reflection and transmission modes.

[0012] [Patent Document 1] JP-A-2000-56326

[0013] [Patent Document 2] JP-A-2000-171789

[0014] [Patent Document 3] JP-A-2002-202511

[0015] [Patent Document 4] JP-A-6-175126

[0016] [Patent Document 5] JP-A-7-311383

[0017] [Patent Document 6] JP-A-11-281972

[0018] [Patent Document 7] JP-A-2000-47251

[0019] [Non-patent Document 1] Uchida et al. "A Bright Reflective LCD Using Optically Compensated Birefringence Cell with Gray-Scale Capability and Fast Response", SID 96 DIGEST, p.618-621

[0020] [Non-patent Document 2] Jisaki et al. "Development of Transflective LCD for High Contrast and Wide Viewing angle by Using Homeotropic Alignment", Asia Display/IDW '01, p.133

[0021] In the structure of the reflection type liquid crystal display device as shown in **FIG. 74**, a use in combination with the transmission type has not been realized. This is because in the reflection type, on the premise that the light is transmitted through the liquid crystal **106** twice, the alignment state of the liquid crystal **106** is a hybrid alignment. In the hybrid alignment, there is a problem that birefringence is small when it is used in the transmission type, and a sufficient white display can not be performed. Besides, when it is used in the transmission type, there is a problem that viewing angle characteristics are low.

[0022] On the other hand, in the transreflective type liquid crystal display device shown in **FIGS. 75A** to **76B**, it is proposed that the surface of the reflecting electrode **116** is formed to be uneven. However, in order to manufacture the transreflective type liquid crystal display device having the uneven reflecting electrode **116**, in addition to a manufacture process of a normal transmission type liquid crystal display device, a process, such as formation and patterning of a resin layer and formation of the reflecting electrode **116**, is further required. Thus, there arises a problem that the manufacture cost of the liquid crystal display device is raised.

SUMMARY OF THE INVENTION

[0023] An object of the present invention is to provide a liquid crystal display device which can obtain excellent display characteristics without raising the manufacture cost and a method of manufacturing the same.

[0024] The above object is achieved by a liquid crystal display device including a pair of substrates disposed to be opposite to each other, a liquid crystal sealed between the pair of substrates and aligned almost vertically to the substrate when a voltage is not applied, a pair of quarter-wave plates respectively disposed at outer sides of the pair of substrates, a pair of polarizing plates respectively disposed at outer sides of the pair of quarter-wave plates, and a pixel area including a reflection area provided with a reflecting plate having an almost flat reflecting surface and for reflecting light incident from one of the pair of substrates, and a transmission area for causing light incident from the other of the pair of substrates to be transmitted toward the one of the pair of substrates.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] **FIGS. 1A and 1B** are views showing a basic structure of a liquid crystal display device according to a first embodiment of the invention;

[0026] **FIG. 2** is a view showing a schematic structure of a liquid crystal display device according to example 1-1 of the first embodiment of the invention;

[0027] **FIG. 3** is a view schematically showing an equivalent circuit of the liquid crystal display device according to the example 1-1 of the first embodiment of the invention;

[0028] **FIG. 4** is a view showing the structure of the liquid crystal display device according to the example 1-1 of the first embodiment of the invention;

[0029] **FIG. 5** is a view showing a structure of a conventional liquid crystal display device;

[0030] **FIG. 6** is a view showing a modified example of the structure of the liquid crystal display device according to the example 1-1 of the first embodiment of the invention;

[0031] **FIG. 7** is a view showing a structure of a liquid crystal display device according to example 1-2 of the first embodiment of the invention;

[0032] **FIG. 8** is a view showing a structure of a conventional liquid crystal display device;

[0033] **FIG. 9** is a view showing an arrangement of a polarizing plate and the like of the liquid crystal display device according to the example 1-2 of the first embodiment of the invention;

[0034] **FIG. 10** is a block diagram showing a driving method of a liquid crystal display device according to example 1-3 of the first embodiment of the invention;

[0035] **FIG. 11** is a view showing a structure of a liquid crystal display device according to example 1-4 of the first embodiment of the invention;

[0036] **FIG. 12** is a view showing a modified example of the structure of the liquid crystal display device according to the example 1-4 of the first embodiment of the invention;

[0037] **FIG. 13** is a sectional view showing a structure of a liquid crystal display device as the premise of a second embodiment of the invention;

[0038] **FIG. 14** is a sectional view showing a structure of the liquid crystal display device as the premise of the second embodiment of the invention;

[0039] **FIG. 15** is a sectional view showing a structure of a liquid crystal display device according to the second embodiment of the invention;

[0040] **FIG. 16** is a sectional view showing a structure of the liquid crystal display device according to the second embodiment of the invention;

[0041] **FIG. 17** is a sectional view showing a structure of the liquid crystal display device according to the second embodiment of the invention;

[0042] **FIG. 18** is a sectional view showing a structure of the liquid crystal display device according to the second embodiment of the invention;

[0043] **FIG. 19** is a sectional view showing a structure of the liquid crystal display device according to the second embodiment of the invention;

[0044] **FIG. 20** is a sectional view showing a structure of the liquid crystal display device according to the second embodiment of the invention;

[0045] **FIG. 21** is a sectional view showing a structure of the liquid crystal display device according to the second embodiment of the invention;

[0046] **FIG. 22** is a sectional view showing a structure of the liquid crystal display device according to the second embodiment of the invention;

[0047] **FIG. 23** is a view for explaining the liquid crystal display device according to the second embodiment of the invention;

[0048] **FIG. 24** is a view for explaining the liquid crystal display device according to the second embodiment of the invention;

[0049] **FIG. 25** is a view showing an arrangement of a reflecting protrusion of a liquid crystal display device according to example 2-1 of the second embodiment of the invention;

[0050] **FIG. 26** is a photograph showing a structure of the liquid crystal display device according to the example 2-1 of the second embodiment of the invention;

[0051] **FIG. 27** is an alignment photograph when white is displayed in a reflection mode;

[0052] **FIG. 28** is an alignment photograph when white is displayed in a transmission mode;

[0053] **FIG. 29** is a graph showing a result of measurement of reflection characteristics of the liquid crystal display device according to the example 2-1 of the second embodiment of the invention;

[0054] **FIG. 30** is a graph showing a result of measurement of reflection characteristics of the liquid crystal display device according to the example 2-1 of the second embodiment of the invention;

[0055] **FIG. 31** is a graph showing a result of measurement of transmission characteristics of the liquid crystal display device according to the example 2-1 of the second embodiment of the invention;

[0056] **FIG. 32** is a plan view showing a structure of one pixel of a conventional liquid crystal display device;

[0057] **FIG. 33** is a plan view showing a structure of one pixel of a liquid crystal display device according to a third embodiment of the invention;

[0058] **FIG. 34** is a sectional view showing a structure of the liquid crystal display device according to the third embodiment of the invention;

[0059] **FIG. 35** is a view showing an arrangement of a polarizing plate and the like of the liquid crystal display device according to the third embodiment of the invention;

[0060] **FIG. 36** is a plan view showing a structure of one pixel in a case where an electrode unit is made of only comb electrodes;

[0061] **FIG. 37** is a graph of measurement of a rate of change in brightness with respect to a variation in width of an extension part of a comb electrode;

[0062] **FIGS. 38A to 38D** are process sectional views (No. 1) showing a method of manufacturing the liquid crystal display device according to the third embodiment of the invention;

[0063] **FIGS. 39A to 39C** are process sectional views (No. 2) showing the method of manufacturing the liquid crystal display device according to the third embodiment of the invention;

[0064] **FIGS. 40A to 40C** are process sectional views (No. 3) showing the method of manufacturing the liquid crystal display device according to the third embodiment of the invention;

[0065] **FIGS. 41A to 41N** are plan views showing shapes of electrode units of a liquid crystal display device according to a modified example of the third embodiment of the invention;

[0066] **FIG. 42** is a plan view showing a structure of one pixel of a liquid crystal display device according to a fourth embodiment of the invention;

[0067] **FIG. 43** is a plan view showing a structure of one pixel of a liquid crystal display device according to a fifth embodiment of the invention;

[0068] **FIGS. 44A to 44C** are plan views showing shapes of electrode units of a liquid crystal display device according to a modified example of the fifth embodiment of the invention;

[0069] **FIG. 45** is a plan view showing a structure of one pixel of a liquid crystal display device according to a sixth embodiment of the invention;

[0070] **FIG. 46** is a plan view showing a structure of one pixel of a liquid crystal display device according to a seventh embodiment of the invention;

[0071] **FIG. 47** is a plan view showing a structure of one pixel of a liquid crystal display device according to an eighth embodiment of the invention;

[0072] **FIGS. 48A and 48B** are sectional views showing a structure of the liquid crystal display device according to the eighth embodiment of the invention;

[0073] **FIG. 49** is a view showing an arrangement of a polarizing plate and the like of the liquid crystal display device according to the eighth embodiment of the invention;

[0074] **FIG. 50** is a plan view showing a structure of one pixel in a case where the number of reflecting electrode layers is changed in the liquid crystal display device according to the eighth embodiment of the invention;

[0075] **FIG. 51** is a plan view showing a structure of one pixel in a case where a reflecting electrode is formed in an area where a storage capacitor electrode is formed in the liquid crystal display device according to the eighth embodiment of the invention;

[0076] **FIGS. 52A and 52B** are graphs showing a relation between the areal ratio of a reflection area and the reflectivity in the liquid crystal display device according to the eighth embodiment of the invention, and a relation between the areal ratio of the reflection area and the transmissivity;

[0077] **FIGS. 53A and 53B** are graphs showing a relation between the areal ratio of a transmission area and the

reflectivity in the liquid crystal display device according to the eighth embodiment of the invention, and a relation between the areal ratio of the transmission area and the transmissivity;

[0078] FIGS. 54A to 54D are process sectional views (No. 1) showing a method of manufacturing the liquid crystal display device according to the eighth embodiment of the invention;

[0079] FIGS. 55A to 55C are process sectional views (No. 2) showing the method of manufacturing the liquid crystal display device according to the eighth embodiment of the invention;

[0080] FIG. 56 is a plan view showing a structure of one pixel of a liquid crystal display device according to a ninth embodiment of the invention;

[0081] FIGS. 57A and 57B are plan views showing a structure of the liquid crystal display device according to the ninth embodiment of the invention;

[0082] FIG. 58 is a sectional view taken in a direction along a gate bus line of a liquid crystal display device according to a tenth embodiment of the invention;

[0083] FIG. 59 is a sectional view taken in a direction along a gate bus line of a liquid crystal display device according to a modified example of the tenth embodiment of the invention;

[0084] FIG. 60 is a sectional view taken in a direction along a gate bus line of a liquid crystal display device according to an eleventh embodiment of the invention;

[0085] FIGS. 61A to 61C are process sectional views (No. 1) showing a method of manufacturing the liquid crystal display device according to the eleventh embodiment of the invention;

[0086] FIGS. 62A to 62C are process sectional views (No. 2) showing the method of manufacturing the liquid crystal display device according to the eleventh embodiment of the invention;

[0087] FIGS. 63A to 63C are process sectional views (No. 3) showing the method of manufacturing the liquid crystal display device according to the eleventh embodiment of the invention;

[0088] FIG. 64 is a sectional view taken in a direction along a gate bus line of a liquid crystal display device according to a modified example of the eleventh embodiment of the invention;

[0089] FIG. 65 is a plan view showing a structure of one pixel of a liquid crystal display device according to a twelfth embodiment of the invention;

[0090] FIG. 66 is a sectional view showing a structure of the liquid crystal display device according to the twelfth embodiment of the invention;

[0091] FIGS. 67A to 67D are process sectional views (No. 1) showing a method of manufacturing the liquid crystal display device according to the twelfth embodiment of the invention;

[0092] FIGS. 68A to 68C are process sectional views (No. 2) showing the method of manufacturing the liquid crystal display device according to the twelfth embodiment of the invention;

[0093] FIG. 69 is a plan view showing a structure of one pixel of a liquid crystal display device according to a thirteenth embodiment of the invention;

[0094] FIG. 70 is a sectional view showing a structure of the liquid crystal display device according to the thirteenth embodiment of the invention;

[0095] FIG. 71 is a plan view showing a structure of one pixel of a liquid crystal display device according to a fourteenth embodiment of the invention;

[0096] FIG. 72 is a plan view showing a structure of the liquid crystal display device according to the fourteenth embodiment of the invention;

[0097] FIGS. 73A and 73B are plan views showing other shapes of a branch part of an electrode unit in the liquid crystal display device of the invention;

[0098] FIG. 74 is a sectional view showing a structure of a conventional liquid crystal display device;

[0099] FIGS. 75A and 75B are views showing a structure of a conventional liquid crystal display device; and

[0100] FIGS. 76A and 76B are sectional view showing a structure of the conventional liquid crystal display device.

DETAILED DESCRIPTION OF THE INVENTION

First Embodiment

[0101] A liquid crystal display device according to a first embodiment of the invention and a method of manufacturing the same will be described with reference to FIGS. 1A to 12. In this embodiment, excellent points of the two liquid crystal display devices already described as the related art are extracted and combined, and a method is devised to eliminate the necessity of changing a manufacture process of a normal transmission type liquid crystal display device.

[0102] FIGS. 1A and 1B are sectional views schematically showing a basic structure of a liquid crystal display device according to this embodiment. FIG. 1A shows an optical path at the time of reflective display, and FIG. 1B shows an optical path at the time of transmissive display. As shown in FIGS. 1A and 1B, a liquid crystal 6 is sealed between a TFT substrate 2 and an opposite substrate (CF substrate) 4, which are disposed to be opposite to each other. An alignment state of the liquid crystal 6 is a vertical alignment. The TFT substrate 2 is formed on a glass substrate 10, and includes a metal reflecting plate 54 having an almost flat reflecting surface. As the reflecting plate 54, an electrode such as, for example, a storage capacitor electrode is used. An insulating film 30 is formed on the reflecting plate 54. An almost flat and transparent pixel electrode 16 is formed on the insulating film 30. The opposite substrate 4 includes a transparent common electrode 42 formed on a glass substrate 11.

[0103] A quarter-wave plate 51, a polarizing plate 86 and an optical path control film (light scattering layer) 52 are disposed in this order at the panel outer side (observer side) of the opposite electrode 4. A quarter-wave plate 50 and a polarizing plate 87 are disposed in this order at the panel outer side of the TFT substrate 2. Polarizing axes of both the

polarizing plates **86** and **87** are orthogonal to each other. A backlight unit **88** is disposed at the further outer side of the polarizing plate **87**.

[0104] Since a liquid crystal molecule is aligned almost vertically to a substrate surface in a voltage non-application state, the liquid crystal **6** does not exert an optical effect on light. When a reflective display is performed, incident outside light is reflected by the reflecting plate **54**. Here, the light having been transmitted through the polarizing plate **86** is transmitted through the quarter-wave plate **51**, and is incident on the liquid crystal **6**, and after the light is reflected at the reflecting electrode **16**, it is again transmitted through the quarter-wave plate **51**. That is, the light is transmitted through the quarter-wave plate **51** twice, so that its polarization state is rotated by 90°. Accordingly, this light is absorbed by the polarizing plate **86**. Thus, black is displayed in the reflection mode.

[0105] Besides, when a transmissive display is performed, light having been transmitted through the polarizing plate **87** at the side of the backlight unit **88** is transmitted through the quarter-wave plate **50**, is incident on the liquid crystal **6**, and is transmitted through the quarter-wave plate **51**. That is, the light is transmitted through the quarter-wave plates **50** and **51** twice, so that its polarization state is rotated by 90°. Accordingly, this light is absorbed by the polarizing plate **86** at the observer side. Thus, black is displayed in the transmission mode.

[0106] On the other hand, in a state where a predetermined voltage is applied, the liquid crystal molecule is inclined with respect to the substrate surface. Thus, birefringence as an optical effect occurs in the liquid crystal **6**, and a polarization state of transmitted light is changed. When the reflective display is performed, the incident outside light is transmitted through the liquid crystal **6**, so that its polarization state is changed, and the light is transmitted through the polarizing plate **86**. Thus, white or gray is displayed in the reflection mode. When the transmissive display is performed, the incident light from the backlight unit **88** is also transmitted through the liquid crystal **6**, so that its polarization state is changed, and the light is transmitted through the polarizing plate **86**. Thus, white or gray is displayed in the transmission mode.

[0107] In this embodiment, since an electrode such as a storage capacitor electrode formed on the general TFT substrate **2** is used as the reflecting plate **54**, there is no addition in the manufacture process. Here, in the transmission mode, the reflection of the outside light at the reflecting plate **54** at the time when the backlight unit **88** is turned on is not very annoying. This is because both the state where black is displayed in the transmission mode and the state where black is displayed in the reflection mode are the voltage non-application states, and when black is displayed in the transmission mode, there is no reflection of the outside light.

[0108] A film for scattering only incident light at an incident angle in a predetermined range is used as the optical path control film **52**. For example, the incident light from the sun is scattered by the optical path control film **52** and is reflected by the reflecting plate **54**. The reflected light is used for the display and is emitted toward the observer side. By this, for example, even in the case of the light source such as the sun, the display can be performed using the reflected

light at the reflecting plate **54** while the surface reflection is avoided. Incidentally, it is desirable that when the reflected light is again transmitted through the optical path control film **52**, scattering does not occur.

[0109] Hereinafter, a description will be given of specific examples.

EXAMPLE 1-1

[0110] A liquid crystal display device according to example 1-1 of this embodiment will be described with reference to FIGS. 2 to 6. FIG. 2 shows a schematic structure of the liquid crystal display device according to this example. As shown in FIG. 2, the liquid crystal display device includes a TFT substrate **2** provided with gate bus lines and drain bus lines formed to intersect with each other through an insulating film, and a TFT and a pixel electrode formed in each pixel. Besides, the liquid crystal display device includes an opposite electrode **4** in which a common electrode and a CF are formed, and a liquid crystal (not shown) sealed between both the substrates **2** and **4**.

[0111] FIG. 3 schematically shows an equivalent circuit of an element formed on the TFT substrate **2**. A plurality of gate bus lines **12** extending in the horizontal direction of the drawing are formed in parallel with each other on the TFT substrate **2**. A plurality of drain bus lines **14** intersecting with the gate bus lines **12** through an insulating film and extending in the vertical direction of the drawing are formed in parallel with each other. Respective areas surrounded by the plurality of gate bus lines **12** and the drain bus lines **14** become pixel areas. A TFT **20** and a pixel electrode **16** are formed in each of the pixel areas disposed in a matrix form. A drain electrode of each TFT **20** is connected to the adjacent drain bus line **14**, a gate electrode is connected to the adjacent gate bus line **12**, and a source electrode is connected to the pixel electrode **16**. Storage capacitor bus lines **18** are formed in parallel with the gate bus lines at almost the centers of the respective pixel areas.

[0112] Again, in FIG. 2, the TFT substrate **2** is provided with a gate bus line driving circuit **80** in which a driver IC for driving the plurality of gate bus lines is mounted and a drain bus line driving circuit **82** in which a driver IC for driving the plurality of drain bus lines is mounted. These driving circuits **80** and **82** output scanning signals and data signals to predetermined gate bus lines or drain bus lines on the basis of predetermined signals outputted from a control circuit **84**. A polarizing plate **87** is disposed on a substrate surface of the TFT substrate **2** at the opposite side to an element formation surface, and a backlight unit **88** is attached to a surface of the polarizing plate **87** at the opposite side to the TFT substrate **2**. On the other hand, a polarizing plate **86** disposed in crossed Nicols with respect to the polarizing plate **87** is bonded to a surface of the opposite electrode **4** at the opposite side to a common electrode formation surface.

[0113] FIG. 4 shows a structure of approximately one pixel of the liquid crystal display device according to this example. As shown in FIG. 4, the plurality of gate bus lines **12** (two in FIG. 4) extending in the horizontal direction of the drawing are formed almost in parallel with each other on the TFT substrate **2** of the liquid crystal display device. The plurality of drain bus lines **14** (two in FIG. 4) extending in the vertical direction of the drawing are formed almost in

parallel with each other to intersect with the gate bus lines **12** through a not-shown insulating film. The TFT **20** is formed in the vicinity of each of intersecting positions of the gate bus lines **12** and the drain bus lines **14**. An area surrounded by the gate bus line **12** and the drain bus line **14** is a pixel area. The storage capacitor bus line **18** extending almost in parallel with the gate bus line **12** is formed to cross almost the center of the pixel area. A storage capacitor electrode **19** is formed on the storage capacitor bus line **18** in each pixel area.

[0114] The pixel electrode **16** made of a transparent conductive film of, for example, ITO (Indium Tin Oxide) film is formed in the pixel area. The pixel electrode **16** includes a plurality of electrode units **60** each having a rectangular outer periphery and smaller than the pixel area, an electrode blank part (slit) **62** formed between the adjacent electrode units **60**, and a connection electrode **64** for electrically connecting electrode units **60**, which are separated by the slit **62**, to each other. In the structure shown in FIG. 4, twelve electrode units **60** each having an almost square outer periphery are formed in one pixel. A plurality of spaces **66** cut from the respective end sides almost in parallel with the gate bus line **12** or the drain bus line **14** are formed at the outer periphery of the electrode unit **60**. On the other hand, a BM **68** for shading areas other than the pixel area is formed on the opposite electrode.

[0115] FIG. 5 shows a structure of a conventional liquid crystal display device for comparison with this example. Differently from the conventional liquid crystal display device shown in FIG. 5, the liquid crystal display device of this example is characterized in that a BM **68'** on a storage capacitor electrode **19** made of the same formation material as a source/drain electrode of a TFT **20** (or a storage capacitor bus line **18** made of the same formation material as a gate electrode of the TFT **20**) is not formed. In the conventional structure, although the BM **68'** is provided to prevent the outside light from being reflected by the storage capacitor electrode **19** (or the storage capacitor bus line **18**), in this example, the storage capacitor electrode **19** (or the storage capacitor bus line **18**) is used as the reflecting plate.

[0116] FIG. 6 shows a modified example of the structure of the liquid crystal display device according to this example. As shown in FIG. 6, in this modified example, the storage capacitor electrode **19** (or the storage capacitor bus line **18**) is used as the reflecting plate, and further, circular reflecting plates **54** are separately provided in the pixel area. Each of the reflecting plates **54** is formed of the same formation material as the gate electrode or the source/drain electrode of the TFT **20**, and is disposed to overlap with almost the center of the electrode unit **60** when viewed in the direction vertical to the substrate surface. Besides, the reflecting plate **54** is electrically in a float state. Although not shown, LUMISTY (trademark) of Sumitomo Chemical Co., Ltd. is used as the optical path control film **52**.

EXAMPLE 1-2

[0117] Next, a liquid crystal display device according to example 1-2 of this embodiment will be described with reference to FIGS. 7 to 9. FIG. 7 shows a structure of approximately one pixel of the liquid crystal display device according to this example. FIG. 8 shows a structure of a conventional liquid crystal display device for comparison

with this example. Differently from the conventional liquid crystal display device, in this example, a BM **68'** on a storage capacitor electrode **19** made of the same formation material as a source/drain electrode of a TFT **20** is not formed. Besides, in this example, a protrusion **70** for alignment control is provided at the opposite electrode side. The protrusion **70** is disposed almost at the center of an electrode unit **60**. Besides, the protrusion **70** on the storage capacitor electrode **19** is formed to be cross-shaped. By this, alignment division of liquid crystal is performed on the storage capacitor electrode **19** used as the reflecting plate, and the reflective display excellent in viewing angle characteristics can be realized.

[0118] FIG. 9 shows an arrangement of a polarizing plate and the like of the liquid crystal display device according to this example. As shown in FIG. 9, a polarizing plate (for example, SEG 1425, AG 150) **86** and a polarizing plate (for example, SEG 1425) **87**, which are disposed in crossed Nicols, are disposed at both sides of a liquid crystal layer **6**. A quarter-wave plate **51** is disposed between the liquid crystal layer **6** and the polarizing plate **86**. Besides, a quarter-wave plate **50** is disposed between the liquid crystal layer **6** and the polarizing plate **87**. For example, an ARTON film having an in-plane phase difference of 140 nm is used for each of the quarter-wave plates **50** and **51**. A TAC film **72** having a negative phase difference is disposed between the liquid crystal layer **6** and the quarter-wave plate **51** in order to improve viewing angle characteristics. Besides, an optical film **74** of PCF 350 or the like is disposed at the outer side of the polarizing plate **87**. Incidentally, an upper part in the drawing is the observer side, and a lower part in the drawing is the optical source side.

[0119] An angle between an optical axis (phase-lag axis) **91** of the quarter-wave plate **50** and an absorption axis **90** of the polarizing plate **87** is approximately 45°. That is, when light emitted from a light source is transmitted through the polarizing plate **87** and the quarter-wave plate **50** in this order, it becomes a circularly polarized light. Besides, an angle between an optical axis **94** of the quarter-wave plate **51** and an absorption axis **95** of the polarizing plate **86** is approximately 45°. The optical axes **91** and **94** of both the quarter-wave plates **50** and **51** are almost orthogonal to each other. In order to realize the symmetry of viewing angles and to optimize viewing angle characteristics in the vertical and horizontal directions with respect to the display screen, the polarizing plates **86** and **87** and the quarter-wave plates **50** and **51** are disposed as described below.

[0120] The absorption axis **90** of the polarizing plate **87** is disposed in the counter clock wise direction of 150° with reference to the right part of the display screen. The optical axis **91** of the quarter-wave plate **50** is disposed in the counterclockwise direction of 15° with reference to the right part of the display screen. The optical axis **94** of the quarter-wave plate **51** is disposed in the counterclockwise direction of 105° with reference to the right part of the display screen. The absorption axis **95** of the polarizing plate **86** is disposed in the counterclockwise direction of 60° with reference to the right part of the display screen.

EXAMPLE 1-3

[0121] Next, a liquid crystal display device according to example 1-3 of this embodiment will be described with

reference to **FIG. 10**. In the above examples, the same voltage is applied in both the reflection type and the transmission type. However, while light is transmitted only once in the transmission area, light is transmitted twice in the reflection area to go and return. Thus, the optical effect in the reflection area is twice that in the transmission area, and for example, when white is displayed in the transmission area, the reflection area takes on a tinge of yellow. In the transmission area, since the reflection area is concealed by the storage capacitor electrode **19** and is not seen, there is no problem. However, in the reflective display, the phenomenon of taking on a tinge of yellow becomes a problem. Thus, in this example, when the reflective display is performed, the driving voltage is lowered.

[0122] **FIG. 10** is a block diagram showing a driving method of the liquid crystal display device according to this example. With respect to a changeover between the transmission type and the reflection type, there is a case where it is performed by the user and a case where it is performed in synchronization with ON/OFF of the backlight unit, and **FIG. 10** shows both the cases. In the case where the liquid crystal display device is used as the transmission type, a maximum driving voltage is made, for example, 5 V equal to a normal driving voltage, and in the case where it is used as the reflection type, the maximum driving voltage is made, for example, 3 V lower than the normal driving voltage. These driving voltages are selected so that when the same gradation is displayed, Δn in the reflection type becomes almost half of Δn in the transmission type. Besides, when only the voltage adjustment is performed, gradation characteristics become different between the transmissive display and the reflective display. Thus, the relation between the gradation and the applied voltage is suitably adjusted, so that the gradation characteristics become the same between the transmissive display and the reflective display.

EXAMPLE 1-4

[0123] Next, a liquid crystal display device according to example 1-4 of this embodiment and a method of manufacturing the same will be described with reference to **FIG. 11** and **FIG. 12**. **FIG. 11** shows a structure of a part of a pixel of the liquid crystal display device according to this example. As shown in **FIG. 11**, an opening part (contact hole) **76** in which a protective film (not shown) is opened is formed in most of the portion on a storage capacitor electrode **19** made of a lamination film in which films of aluminum (Al) and titanium (Ti) are grown in this order. In the opening part **76**, the Ti layer of the upper layer of the storage capacitor electrode **19** is also removed by etching, and the surface of the Al layer of the lower layer is exposed as the reflecting surface. Besides, an electrode unit **60** (pixel electrode **16** or a connection electrode **64** in **FIG. 11**) formed on the protective film is electrically connected to the storage capacitor electrode **19** through the opening part **76**.

[0124] The storage capacitor electrode **19** and the opening part **76** are formed as described below. An Al layer and a Ti layer are grown in this order on an insulating film formed on the whole surface on gate bus lines and storage capacitor bus lines, and a lamination film is formed. Next, the lamination film is patterned into a specified shape, and the storage capacitor electrode **19** is formed. Next, a protective film as an insulating layer is formed on the storage capacitor electrode **19** and on the whole substrate surface. Next, the

protective film on the storage capacitor electrode **19** is removed to form the opening part **76**, and subsequently, the Ti layer exposed through the opening part **76** is removed by etching. By this, the Al layer of the storage capacitor electrode **19** is exposed. Thereafter, a film of ITO is grown and is patterned, so that the pixel electrode **16** or the connection electrode **64** in **FIG. 11** is formed so as to cover, for example, the exposed Al layer.

[0125] According to this example, the surface of the Al layer is exposed in most of the storage capacitor electrode **19** functioning as the reflecting plate. The reflectivity of Al is remarkably high as compared with Ti. Thus, the high reflectivity of Al can be used, and high display characteristics can be obtained at the time of the reflective display.

[0126] Next, a modified example of the structure of the liquid crystal display device according to this example will be described. In the structure as shown in **FIG. 11**, the ITO layer and the Al layer are in direct contact with each other. Thus, there arises a problem that there is a fear that corrosion due to a cell effect occurs. **FIG. 12** shows the structure of the liquid crystal display device according to this modified example in which this problem does not arise. As shown in **FIG. 12**, in this modified example, when viewed in the direction vertical to the substrate surface, a reflecting plate **54** is formed which does not overlap with an electrode unit **60** made of ITO and a connection electrode **64**. The reflecting plate **54** is formed of the same formation material as the gate electrode of the TFT **20** or the same formation material as the source/drain electrode. Besides, the reflecting plate **54** is electrically in a float state. The reflecting plate **54** is formed in such a manner that for example, after the lamination film of the Al layer and the Ti layer is patterned, the Ti layer of the upper layer is removed in a process for forming the contact hole on the source electrode of the TFT **20** or on the storage capacitor electrode **19**. Accordingly, the reflecting surface of the reflecting plate **54** is formed of the Al layer. In this modified example, it is possible to prevent the ITO layer and the Al layer from reacting with each other. The liquid crystal on the reflecting plate **54** is driven by an oblique electric field from the electrode unit **60**.

[0127] As described above, according to this embodiment, the transreflective type liquid crystal display device which can perform the display in both the transmission and reflection modes can be manufactured by using almost the same manufacture process as the transmission type liquid crystal display device. By this, the inexpensive transreflective type liquid crystal display device can be realized without raising the manufacture cost.

Second Embodiment

[0128] Next, a liquid crystal display device according to a second embodiment of the invention will be described with reference to FIGS. 13 to 31. A transreflective type (reflective and transmissive type) liquid crystal display device performs a reflective display using outside light in a bright place, and performs a transmissive display using a backlight unit in a dark place. In the reflection type liquid crystal display device, the display is hard to see in the dark place, and in the transmission type liquid crystal display device, the display is hard to see in the bright place. In the transreflective type liquid crystal display device, since an easily viewable display can be selected in places different in brightness, it is widely used for a portable information terminal and the like.

[0129] In the reflection type liquid crystal display device, when a reflecting film (reflecting electrode) is made to have a flat mirror surface, a display becomes bright in a regular reflection area, and a display becomes dark in other areas. Thus, the dependency on viewing angles is high and the display comes to have a metallic luster. Then, there is known a technique in which unevenness having dot-like plane shape is formed on the surface of the reflecting film, so that reflected light is diffused, and a display having no metallic luster is realized (for example, see patent document 4). In the above reflection type liquid crystal display device, since the reflecting surfaces are directed in random directions, in the case where light is incident from all directions, it is reflected to the observer side at high efficiency, and a bright display can be obtained. However, in the case where light is incident from a specified direction as in an indoor place, there arises a problem that the use efficiency of light is low, and the display becomes dark.

[0130] In the transmission type liquid crystal display device, there is known a technique in which an alignment controlling inclination part is formed on at least one of transparent electrodes by partially upraising or caving a contact surface with a liquid crystal layer, and the alignment of the liquid crystal is controlled by the alignment controlling inclination part (for example, see patent document 5). In the above transmission type liquid crystal display device, as shown in FIGS. 13 and 14, since the alignment direction (indicated by an arrow A) of a liquid crystal molecule 8 by an alignment controlling inclination part 78 and the alignment direction (indicated by an arrow B) of a liquid crystal molecule 8 by an electric field distortion become opposite to each other, there arises a problem that the alignment of the liquid crystal 6 does not become stable, poor alignment occurs, and the transmissivity is lowered.

[0131] In the transreflective type liquid crystal display device, there is known a technique in which a reflection part and a transmission part are divided and are constructed in one pixel, and the electrode surface of the reflection part is formed into a continuous corrugate shape (for example, see patent document 6). In the above transreflective type liquid crystal display device, in addition to the problem arising in the foregoing reflection type liquid crystal display device, there arises a problem that since the alignment direction of the liquid crystal can not be divided in a pixel, viewing angle characteristics especially in the transmission part are lowered.

[0132] An object of this embodiment is to provide a liquid crystal display device which can obtain excellent display characteristics in both the transmission and reflection modes.

[0133] This embodiment is characterized in that in a transreflective type liquid crystal display device, a linear protrusion (protrusion column whose plane shape is constituted by straight lines) as an alignment controlling structure is provided on a transparent electrode of one substrate, and a reflecting film is selectively formed on a surface including an inclined surface of the linear protrusion. Here, as long as the plane shape is formed of the straight lines, the alignment controlling structure may be a frame-like protrusion, not the linear protrusion (the same applies to a hollow described below). When the vertical alignment is selected as the alignment state of liquid crystal, there does not occur such

a state that a liquid crystal anchored on a substrate interface at the time of black display is not switched and remains. Thus, a contrast ratio becomes high, and an easily viewable display can be realized. Besides, a linear protrusion is provided on a transparent electrode of a substrate at a backlight unit side and a reflecting film is selectively formed on the linear protrusion surface, so that light incident from a front direction and an oblique direction can be efficiently reflected toward the observer side by using the inclined surface of the linear protrusion. Further, loss of transmissivity can be suppressed to the minimum by causing an area above the linear protrusion to become a reflection area. Besides, since the thickness of the liquid crystal layer is different between the reflection area and the transmission area, it becomes possible to match gradation characteristics of the reflective display and the transmissive display.

[0134] Besides, this embodiment is characterized in that a hollow linearly extending on one substrate is provided, and a reflecting film is selectively formed on a surface including an inclined surface of the hollow. That is, the alignment direction of the liquid crystal is controlled by the hollow instead of the linear protrusion. Although the sectional shape and the thickness of the liquid crystal layer in the reflection area become opposite to those in the case of the linear protrusion, a similar effect to the linear protrusion can be expected.

[0135] Further, this embodiment is characterized in that a linear protrusion is provided on a transparent electrode of one substrate, and a reflecting film is selectively formed as an under layer of the linear protrusion. FIG. 15 is a sectional view of a liquid crystal display device having the above structure. As shown in FIG. 15, a reflecting film 56 is formed as an under layer of a linear protrusion 70. Since the linear protrusion 70 acts as a dielectric, an alignment direction (indicated by an arrow A) of a liquid crystal molecule 8 by an inclined surface of the linear protrusion 70 is coincident with an alignment direction of a liquid crystal molecule 8 by an electric field distortion, and the alignment of the liquid crystal 6 becomes more stable.

[0136] Further, this embodiment is characterized in that an alignment controlling structure such as a linear protrusion or a hollow is formed to extend in a direction inclined by 45° with respect to an end side of a pixel electrode, a direction substantially parallel thereto or a direction substantially orthogonal thereto. By this, light incident from these directions can be efficiently reflected toward the observer side.

[0137] Besides, this embodiment is characterized in that a reflecting film and a transparent electrode are electrically separated from each other. For example, when a voltage is enabled to be applied to only the reflecting film at the time of reflective display, and a voltage is enabled to be applied to only the transparent electrode at the time of transmissive display, an oblique electric field can be generated at a boundary part between a transmission area T and a reflection area R, and the alignment direction of the liquid crystal can be uniformly made the direction orthogonal to the boundary part. Besides, the reflecting film and the transparent electrode different in ionization tendency can be insulated from each other, and deterioration due to electrical corrosion can also be prevented.

[0138] FIGS. 16 and 17 are sectional views of liquid crystal display devices having the above structure. FIG. 16

shows a state where a voltage is applied to a pixel electrode 16, and a voltage is not applied to a reflecting film 56 on a linear protrusion 70. FIG. 17 shows a state where a voltage is applied to a reflecting film 56 on a hollow 71 and a voltage is not applied to a pixel electrode 16. As shown in FIGS. 16 and 17, the alignment direction (indicated by an arrow A) of a liquid crystal molecule 8 by the inclined surface of the linear protrusion 70 or the hollow 71 is coincident with the alignment direction (indicated by an arrow B) of a liquid crystal molecule 8 by electric field distortion, and the alignment of the liquid crystal 6 becomes more stable.

[0139] Further, this embodiment is characterized in that a range of an average inclination angle of an inclined surface of the alignment controlling structure with respect to the substrate surface is made not less than approximately 0° and less than 20°. FIG. 18 shows a relation between light outgoing in the front direction and an average inclination angle θ of an inclined surface of the reflecting film 56. Although the light reflected in the front direction by the inclined surface of the reflecting film 56 is incident in an oblique direction, the incident angle depends on the inclination angle of the inclined surface. The refractive index of a member constituting the transreflective type liquid crystal display device is approximately 1.5, and the maximum incident angle θ_c of the light incident on the reflecting film 56 becomes approximately 40° by Snell's law. Since the incident light is mirror reflected at the reflecting film 56, in order to reflect the light incident at an incident angle of from 0° to 40° toward the front direction, it is necessary that the inclination angle of the inclined surface is not less than 0° and less than 20°. However, since the inclination angle of the inclined surface is continuously changed, when the average inclination angle indicating the average value of the inclination angle distribution is in this range, obliquely incident light can be efficiently reflected in the front direction.

[0140] Further, this embodiment is characterized in that another alignment controlling structure (third alignment controlling structure) is formed in a gap part of alignment controlling structures extending in parallel with each other on one substrate. FIG. 19 is a sectional view of a liquid crystal display device having the above structure. As shown in FIG. 19, when a reflecting film 56 is electrically connected to a pixel electrode 16, the reflecting film 56 and the linear protrusion 70 function as a conductive protrusion. In this case, as described above, since the alignment direction of the liquid crystal molecule 8 by the inclined surface and the alignment direction of the liquid crystal molecule 8 by the electric field distortion become opposite to each other, the alignment of the liquid crystal 6 does not become stable, and poor alignment occurs. Then, a slit 62 is formed in the gap part between the adjacent linear protrusions 70. By this, an alignment controlling force is made to exert in the substrate plane direction, and the liquid crystal alignment on the reflecting film 56 and the linear protrusion 70 is aligned in the direction due to the electric field distortion. Incidentally, the alignment controlling structure in which the reflecting film 56 is not formed on the upper layer functions as a dielectric. Thus, the alignment direction of the liquid crystal molecule 8 by the inclined surface is coincident with the alignment direction of the liquid crystal molecule 8 by the electric field distortion, and the alignment of the liquid crystal 6 becomes stable.

[0141] Besides, this embodiment is characterized in that a slit obtained by removing a part of a reflecting film on an alignment controlling structure is formed. FIG. 20 is a sectional view of a liquid crystal display device having the above structure. As shown in FIG. 20, a reflecting film 56 on an almost flat surface of a linear protrusion 70 is removed, and a slit 62 is formed. Further, this embodiment is characterized in that another alignment controlling structure (second alignment controlling structure) is formed on the other substrate in an area opposite to an alignment controlling structure through a liquid crystal. FIG. 21 is a section view of a liquid crystal display device having the above structure. As shown in FIG. 21, a slit 62 is formed on an opposite substrate 4 in an area opposite to a hollow 71. An alignment controlling force is made to exert in a substrate vertical direction by the slit 62, and liquid crystal alignment on the reflecting film 56 and the linear protrusion 70, or on the reflecting film 56 and the hollow 71 is made uniform in the direction due to the electric field distortion. By this, the alignment of the liquid crystal 6 becomes stable.

[0142] Further, this embodiment is characterized in that a linear protrusion has a convex sectional shape, and is formed of a transparent material having a refractive index larger than liquid crystal. FIG. 22 is a partial sectional view of a liquid crystal display device having the above structure. As shown in FIG. 22, a reflecting film 56 is formed as an under layer of a linear protrusion 70. The linear protrusion 70 has a convex (trapezoidal) sectional shape and is formed of a transparent resin having a refractive index larger than the liquid crystal 6.

[0143] FIG. 23 is a sectional view of a liquid crystal display device in which a linear protrusion 70 has a rectangular sectional shape, and is formed of transparent resin having almost the same refractive index as the liquid crystal 6. FIG. 24 is a sectional view of a liquid crystal display device in which a linear protrusion 70 has a rectangular sectional shape and is formed of transparent resin having a refractive index larger than the liquid crystal 6. As shown in FIGS. 23 and 24, in the case where the sectional shape of the linear protrusion 70 is rectangular, irrespective of the refractive index of the formation material, an incident angle θ_1 and an outgoing angle θ_2 become almost equal to each other, and mirror reflection is obtained. On the other hand, as shown in FIG. 22, in the case where the linear protrusion 70 has the convex sectional shape and is formed of transparent resin having the refractive index larger than the liquid crystal 6, an outgoing angle θ_2 with respect to the reflecting film 56 becomes smaller than an incident angle θ_1 with respect to the reflecting film 56. Accordingly, light incident from an oblique direction is reflected in the front direction.

[0144] Hereinafter, a description will be given of specific examples.

EXAMPLE 2-1

[0145] A liquid crystal display device according to example 2-1 of this embodiment will be described with reference to FIGS. 25 to 31. FIG. 25 shows an arrangement of a reflecting protrusion of the liquid crystal display device according to this example. FIG. 26 is a photograph showing a structure of the liquid crystal display device according to this example. As shown in FIGS. 25 and 26, a linear protrusion 70 and a reflecting film 56 as its upper layer are

formed as the reflecting protrusion on a TFT substrate **2**. The linear protrusion **70** is formed on a pixel electrode **16** by using a resist (made by Shipley Far East Ltd.). The sectional shape of the linear protrusion **70** is convex, an average inclination angle is 8°, and a peak height is 1.5 μm . The linear protrusion **70** is formed almost in parallel with or inclined at an angle of 45° with respect to an end side of the pixel electrode **16**. The reflecting film **56** is selectively formed on the linear protrusion **70**. The reflecting film **56** is electrically independently formed in each pixel and is electrically connected to each pixel electrode **16**. Besides, a slit **62** is formed in a gap part between the adjacent linear protrusions **70**. Both the linear protrusion **70** and the slit **62** are formed on the TFT substrate **2**.

[0146] After the TFT substrate **2** and an opposite substrate **4** are formed, a vertical alignment film (made of JSR Corporation) is applied to both the substrates **2** and **4**. Thereafter, a spacer (made by Sekisui Fine Chemical Co., Ltd.) with a bead diameter of 4.5 μm is scattered, and both the substrates **2** and **4** are bonded to each other to form a hollow panel. A liquid crystal (made by MERCK JAPAN LTD) having a negative dielectric anisotropy is injected into the hollow panel, and a liquid crystal display component is prepared. A right-handed circular polarizing plate (a polarizing plate and a quarter-wave plate) and a left-handed polarizing plate are bonded to both surfaces of the liquid crystal display component so that lag axes of quarter-wave plates are orthogonal to each other, and a transreflective type liquid crystal display device is fabricated. Alignment observation is made in both reflection and transmission display modes. FIG. 27 is an alignment photograph when white is display in the reflection mode, and FIG. 28 is an alignment photograph when white is displayed in the transmission mode. In the respective display modes, the occurrence of poor alignment is not seen. This is because the slit **62** is formed in the gap portion of the linear protrusions **70**, the alignment controlling force exerts in the direction parallel to the substrate, and the alignment direction is stabilized.

[0147] FIGS. 29 and 30 are graphs showing results of measurement of reflection characteristics of the liquid crystal display device according to this example. FIG. 29 shows a change of reflectivity with respect to a change of a direction angle. The horizontal axis indicates the direction angle, and the vertical axis indicates the reflectivity. A line A1 indicates reflection characteristics of the liquid crystal display device according to this example, and a line A2 indicates reflection characteristics of a conventional liquid crystal display device in which an Al (aluminum) mirror reflecting film is formed. Light is incident from a direction of a polar angle of 30°, and is received in a direction of a polar angle of 0°. FIG. 30 shows a change of reflectivity with respect to a change of an incident angle (polar angle). The horizontal axis indicates the incident angle and the inclination angle of a corresponding inclined surface, and the vertical axis indicates the reflectivity. A line B1 indicates reflection characteristics when light is incident from a direction of a direction angle of 45° to the liquid crystal display device according to this example, and a line B2 indicates reflection characteristics when light is incident from a direction of a direction angle of 90° to the liquid crystal display device according to this example. A line B3 indicates reflection characteristics of the conventional liquid crystal display device in which the Al mirror reflecting film is formed.

[0148] As shown in FIG. 29, direction angle dependency occurs such that when light is incident from a direction of 45°, direction of 90° and direction of 135°, the reflectivity becomes high. Besides, it has been found that as shown in FIG. 30, incident angle dependency occurs such that as the incident angle of light becomes small, the reflectivity becomes high, and even at a considerably large incident angle, light of 15 to 30% is reflected in the front direction. In this example, although the reflecting film **56** and the linear protrusion **70** are formed almost in parallel with or at an angle of 45° with respect to the end side of the pixel electrode **16**, when the reflecting film **56** and the linear protrusion **70** are formed to be almost orthogonal to the end side of the pixel electrode **16**, even if light is incident from a direction of 0° and a direction of 180°, the reflectivity can be made high.

[0149] FIG. 31 is a graph showing a result of measurement of transmission characteristics of the liquid crystal display device according to this example. The horizontal axis indicates the voltage, and the vertical axis indicates the transmissivity. A line C1 indicates transmission characteristics of the transreflective type liquid crystal display device according to this example, and a line C2 indicates transmission characteristics of a conventional transmission type liquid crystal display device in which the reflecting film **56** is not formed. Light is incident at a polar angle of 180°, and is received at a polar angle of 0°. As shown in FIG. 31, in the liquid crystal display device according to this example, since the reflecting film **56** is formed on the linear protrusion **70**, as compared with the conventional transmission type liquid crystal display device, the transmissivity is lowered by the amount of light transmitted through the linear protrusion **70**. However, the rate of lowering of the transmissivity is slight in the vicinity of a saturation voltage, and the transmission characteristics comparable to the transmission type liquid crystal display device are obtained. Accordingly, according to this example, it is possible to realize the transreflective type (minute reflection type) liquid crystal display device which can perform a reflective display while the lowering of transmission characteristics is suppressed.

EXAMPLE 2-2

[0150] Next, a liquid crystal display device according to example 2-2 of this embodiment will be described. In this example, instead of a part of the protrusion **70**, a hollow **71** is formed, and a reflecting film **56** and a pixel electrode **16** are electrically separated from each other. Besides, a slit **62** is formed on an opposite electrode **4** of an area opposite to a gap portion between the adjacent protrusions **70** or hollows **71** through a liquid crystal **6**. The liquid crystal display device similar to the example 2-1 except for the above is fabricated. The hollow **71** is formed using a resist so that a sectional shape is concave, an average inclination angle is 8°, and a peak height difference becomes 1.5 μm . Besides, a reflecting film **56** is formed on the protrusion **70** and the hollow **71** in such a manner that the film is electrically separated from the pixel electrode **16**. Alignment observation is performed in both the reflection and transmission display modes. As a result, in the transmissive display in the vicinity of the protrusion **70**, and in reflective display in the vicinity of the hollow **71**, similarly to the alignment photographs shown in FIGS. 27 and 28, an alignment state without poor alignment is obtained. It has been confirmed that by electrically separating the reflecting film **56** on the

protrusion 70 and the hollow 71 from the pixel electrode 16 and separately driving them, the alignment direction by the inclined surface of the protrusion 70 and the hollow 71 is coincident with the alignment direction by electric field distortion, and the alignment of the liquid crystal 6 becomes stable.

EXAMPLE 2-3

[0151] Next, a liquid crystal display device according to example 2-3 of this embodiment will be described. In this example, a slit 62 is formed in a reflecting film 56 on a protrusion 70. Besides, a slit 62 is formed on an opposite substrate 4 of an area opposite to a gap between the adjacent protrusions 70 through a liquid crystal 6, and a slit 62 is not formed on a TFT substrate 2 of a gap portion of the protrusions 70. The liquid crystal display device similar to the example 2-1 except for the above is fabricated. Alignment observation is performed in both the reflection and transmission display modes. As a result, in the respective display modes, similarly to the alignment photographs shown in FIGS. 27 and 28, an alignment state without poor alignment is obtained. It has been confirmed that since the slit 62 is formed in the reflecting film 56 on the protrusion 70, the alignment direction by the inclined surface of the protrusion 70 is coincident with the alignment direction by the electric field distortion, and the alignment of the liquid crystal 6 becomes stable.

EXAMPLE 2-4

[0152] Next, a liquid crystal display device according to example 2-4 of this embodiment will be described. In this embodiment, except that a reflecting film 56 on a hollow 71 is electrically connected to a pixel electrode 16, the liquid crystal display device is fabricated similarly to the example 2-2. Alignment observation is made in both the reflection and transmission display modes. As a result, in the respective display modes, similarly to the alignment photographs shown in FIGS. 27 and 28, the alignment state without poor alignment is obtained. It has been confirmed that since the slit 62 is formed on the opposite electrode 4 of the area opposite to the hollow 71 through the liquid crystal 6, the alignment direction by the inclined surface of the hollow 71 is coincident with the alignment direction by the electric field distortion, and the alignment of the liquid crystal 6 becomes stable.

EXAMPLE 2-5

[0153] Next, a liquid crystal display device according to example 2-5 of this embodiment will be described. In this example, a protrusion 70 having a convex sectional shape is formed using a transparent resin (made by JSR Corporation) with a refractive index of 1.7 larger than the refractive index of liquid crystal, and a reflecting film 56 is selectively formed as an under layer of the protrusion 70. Besides, a slit 62 is formed on an opposite substrate 4 in an area opposite to a gap portion between the adjacent protrusions 70 through a liquid crystal 6, and a slit 62 is not formed on a TFT substrate 2 in the gap portion between the protrusions 70. The liquid crystal display device similar to the example 2-1 except for the above is fabricated. Alignment observation is made in both the reflection and transmission display modes. As a result, in the respective display modes, similarly to the alignment photographs shown in FIGS. 27 and 28, the

alignment state without poor alignment is obtained. The reflecting film 56 is selectively formed as the under layer of the protrusion 70, so that the protrusion 70 and the reflecting film 56 function as an insulating protrusion. Thus, it has been confirmed that the alignment direction by the inclined surface of the protrusion 70 is coincident with the alignment direction by the electric field distortion, and the alignment of the liquid crystal 6 becomes stable.

[0154] As described above, in the liquid crystal display device according to this embodiment, the bright reflective display can be realized with little loss of transmissivity, and the transmissive display with a wide viewing angle range can be realized. By this, it is possible to realize the liquid crystal display device having an easily viewable display in any places.

Third Embodiment

[0155] Next, a liquid crystal display device according to a third embodiment of the invention will be described.

[0156] In a vertical alignment type liquid crystal display device, a liquid crystal having a negative dielectric anisotropy is aligned in the vertical direction by using a vertical alignment film when no voltage is applied, and is aligned to be inclined when a voltage is applied. In the vertical alignment type liquid crystal display device, since the liquid crystal is aligned in the vertical direction when no voltage is applied, there are merits that black display quality is excellent, a display with high contrast is possible, a viewing angle is wide, and a response is quick.

[0157] In the vertical alignment type liquid crystal display device, as a method of performing the alignment control of liquid crystal, a method is proposed in which a plurality of electrode units each smaller than one pixel are provided in one pixel, and these are made pixel electrodes to constitute the one pixel.

[0158] For example, patent document 7 discloses a method of forming a solid electrode unit smaller than one pixel in the one pixel.

[0159] FIG. 32 is a plan view showing a structure of one pixel of a liquid crystal display device disclosed in patent document 7. As shown in the drawing, gate bus lines 12 extending in the horizontal direction in the drawing are formed on a TFT substrate almost in parallel with each other at predetermined intervals. Further, drain bus lines 14 almost vertically intersecting with the gate bus lines 12 through an insulating film and extending in the vertical direction in the drawing are formed almost in parallel with each other at predetermined intervals. Areas surrounded by the plurality of gate bus lines 12 and the drain bus lines 14 are pixel areas. A storage capacitor bus line 18 extending almost in parallel with the gate bus line 12 is formed to intersect with almost the center of each of the pixel areas. A storage capacitor electrode 19 is formed on the storage capacitor bus line 18 through an insulating film in each of the pixels.

[0160] A TFT 20 is formed in the vicinity of each of intersection positions of the gate bus lines 12 and the drain bus lines 14.

[0161] A pixel electrode 16 made of a transparent conductive film is formed in the pixel area.

[0162] The pixel electrode 16 includes a plurality of square electrode units 60 each smaller than the pixel area, electrode blank parts (slits) 62 formed between the adjacent electrode units 60, and connection electrodes 64 for electrically connecting the electrode units 60, separated by the slits 62, to each other. In FIG. 32, the six electrode units 60 (twelve units in total) of three lines in the direction parallel to the gate bus line 12 and two lines in the direction parallel to the drain bus line 14 are disposed at each of both sides of the storage capacitor bus line 18 in the vertical direction in the drawing.

[0163] In the liquid crystal display device shown in FIG. 32 and disclosed in patent document 7, a portion where the electrode is not formed is provided in the vicinity of a side or a corner of the electrode unit 60, and at the time of voltage application, the liquid crystal molecules in the vertical alignment to the substrate are inclined in other directions and are aligned by the oblique electric field generated in this portion.

[0164] In the liquid crystal display device disclosed in patent document 7, the pattern of the electrode unit 60 is solid all over the surface, and only the electric field at the outer peripheral part of the electrode unit 60 causes the liquid crystal molecules to be inclined and aligned toward the center part of the electrode unit 60. Thus, the size of the electrode unit 60 which can incline and align the liquid crystal molecules toward the center part by the oblique electric field of the outer peripheral part of the electrode unit 60 is limited. Specifically, in the case where the size of the electrode unit 60 is 50 μm or more, the control of a singular point of an alignment vector of the liquid crystal molecule becomes difficult. Especially, at the outside of the electrode unit 60, since there is no means for fixing the singular point, a fluctuation occurs in the occurrence position of the singular point. Thus, it becomes difficult to uniformly align the liquid crystal molecules toward the center part of the electrode unit 60 from outside, and roughness occurs on the display. Besides, when an external force is applied, for example, when the liquid crystal panel is pressed by a finger, it becomes difficult to return the once broken singular point to the original state.

[0165] On the other hand, when an attempt is made to realize a liquid crystal display device having two functions of a reflection type and a transmission type, liquid crystal display devices disclosed in non-patent document 1 and non-patent document 2 have difficulties as described below.

[0166] First, with respect to the reflection type liquid crystal display device disclosed in non-patent document 1, a use in combination with the transmission type has not been realized. This is because the liquid crystal layer is hybrid aligned on the assumption that light is transmitted through the liquid crystal layer twice. When the liquid crystal layer of the hybrid alignment is used for the transmission type, its birefringence is small, and a sufficient white display can not be realized. Besides, there is a difficulty that viewing angle characteristics are inferior in the transmission type.

[0167] Besides, the transreflective type liquid crystal display device disclosed in non-patent document 2 includes the reflecting electrode having uneven reflecting surface. In order to form the reflecting electrode having the uneven reflecting surface, in addition to the manufacture process of a normal transmission type liquid crystal display device, a

process, such as formation of a resin layer, patterning of the resin layer and formation of the reflecting electrode, is further required. Thus, there is a disadvantage that the manufacture cost is raised.

[0168] Besides, in general, in the case where one liquid crystal display device is used for both the transmission type and the reflection type, the optical paths in the transmission area and the reflection area become different from each other. In the transmission area, light from a backlight unit provided at a lower part of a liquid crystal panel is transmitted from the lower part of the liquid crystal panel to the upper part, so that the display is realized. That is, in the transmission area, the light is transmitted through the liquid crystal layer only once. On the other hand, in the reflection area, the light incident from the upper part of the liquid crystal panel is reflected at the lower part of the liquid crystal panel, and is again transmitted to the upper part of the liquid crystal panel, so that the display is realized. That is, in the reflection area, the light is transmitted through the liquid crystal layer twice. Thus, in the reflection area, as compared with the transmission area, the optical effect by the liquid crystal layer becomes twice, and there is a problem that the reflection area takes on a tint of yellow.

[0169] An object of this embodiment is to provide a liquid crystal display device which can suppress the occurrence of uneven display and can obtain excellent display quality, and a method of manufacturing the same.

[0170] Besides, another object of this embodiment is to provide a liquid crystal display device which has functions of both the transmission type and the reflection type, can be manufactured at low cost without increasing a manufacture process of the transmission type, and can obtain excellent display quality, and a method of manufacturing the same.

[0171] The above object is achieved by a liquid crystal display device including a first substrate which includes a plurality of gate bus lines disposed almost in parallel with each other, a plurality of drain bus lines disposed almost in parallel with each other to intersect with the gate bus lines, a plurality of thin film transistors respectively provided at intersection parts between the gate bus lines and the drain bus lines, and a plurality of pixel electrodes respectively formed in pixel areas surrounded by the gate bus lines and the drain bus lines and respectively connected to the plurality of thin film transistors, a second substrate disposed to be opposite to the first substrate and having an opposite electrode opposite to the plurality of pixel electrodes, and a liquid crystal layer sealed between the first substrate and the second substrate and having a negative dielectric anisotropy, and characterized in that each of the pixel electrodes includes a plurality of electrode units disposed through slits and electrically connected to each other, and each of the electrode units includes a solid part, and a plurality of extension parts extending from the solid part toward an outer peripheral direction of the electrode unit.

[0172] Besides, the above object is achieved by a liquid crystal display device including a first substrate which includes a plurality of gate bus lines disposed almost in parallel with each other, a plurality of drain bus lines disposed almost in parallel with each other to intersect with the gate bus lines, a plurality of thin film transistors respectively provided at intersection parts between the gate bus lines and the drain bus lines and a plurality of pixel elec-

trodes respectively formed in pixel areas surrounded by the gate bus lines and the drain bus lines and respectively connected to the plurality of thin film transistors, a second substrate disposed to be opposite to the first substrate and having an opposite electrode opposite to the plurality of pixel electrodes, and a liquid crystal layer sealed between the first substrate and the second substrate and having a negative dielectric anisotropy, and characterized in that each of the pixel electrodes includes a plurality of electrode units disposed through slits, having solid parts and electrically connected to each other, and the first substrate further includes reflecting electrodes formed under areas in which the solid parts of all of or a part of the plurality of electrode units are formed.

[0173] Besides, the above object is achieved by a liquid crystal display device including a first substrate which includes a plurality of gate bus lines disposed almost in parallel with each other, a plurality of drain bus lines disposed almost in parallel with each other to intersect with the gate bus lines, a plurality of thin film transistors respectively provided at intersection parts between the gate bus lines and the drain bus lines, a plurality of pixel electrodes respectively formed in pixel areas surrounded by the gate bus lines and the drain bus lines and respectively connected to the plurality of thin film transistors, and reflecting electrodes partially formed under areas where the plurality of pixel electrodes are formed, a second substrate disposed to be opposite to the first substrate and having an opposite electrode opposite to the plurality of pixel electrodes, and a liquid crystal layer sealed between the first substrate and the second substrate and having negative dielectric anisotropy, and characterized in that a thickness of the liquid crystal in reflection areas where the reflecting electrodes are formed is thinner than that in other areas.

[0174] Besides, the above object is achieved by a liquid crystal display device including a first substrate which includes a plurality of gate bus lines disposed almost in parallel with each other, a plurality of drain bus lines disposed almost in parallel with each other to intersect with the gate bus lines, a plurality of thin film transistors respectively provided at intersection parts between the gate bus lines and the drain bus lines, and a plurality of pixel electrodes respectively formed in pixel areas surrounded by the gate bus lines and the drain bus lines and respectively connected to the plurality of thin film transistors, a second substrate disposed to be opposite to the first substrate and having an opposite electrode opposite to the plurality of pixel electrodes, and a liquid crystal layer sealed between the first substrate and the second substrate and having a negative dielectric anisotropy, and characterized in that each of the pixel electrodes includes a plurality of electrode units disposed through slits, having solid parts and electrically connected to each other, and the first substrate further includes a reflecting electrode formed under an area in which the electrode unit is not formed in each of the pixel areas.

[0175] The liquid crystal display device according to this embodiment and a method of manufacturing the same will be described with reference to FIGS. 33 to 40C.

[0176] First, the liquid crystal display device according to this embodiment will be described with reference to FIGS. 33 to 37. FIG. 33 is a plan view showing a structure of one pixel of the liquid crystal display device according to this embodiment, FIG. 34 is a sectional view taken along line A-A' of FIG. 33, FIG. 35 is a view showing an arrangement of a polarizing plate and the like of the liquid crystal display device according to this embodiment, FIG. 36 is a plan view showing a structure of one pixel in a case where an electrode unit is made of only a comb electrode, and FIG. 37 is a graph of measurement of a rate of change in brightness with respect to a variation in width of an extension part of the comb electrode.

[0177] FIG. 33 shows the structure of one pixel of the liquid crystal display device according to this embodiment. As shown in the drawing, a plurality of gate bus lines 12 extending in the horizontal direction in the drawing are formed on a TFT substrate 2 in parallel with each other at intervals of, for example, 300 μm (FIG. 33 shows two gate bus lines). A plurality of drain bus lines 14 almost vertically intersecting with the gate bus lines 12 through an insulating film such as, for example, a silicon oxide film and extending in the vertical direction in the drawing are formed in parallel with each other at intervals of, for example, 100 μm (FIG. 33 shows two drain bus lines). The widths of both the gate bus line 12 and the drain bus line 14 are, for example, 7 μm . Areas surrounded by the plurality of gate bus lines 12 and the drain bus lines 14 are pixel areas. A storage capacitor bus line 18 crossing almost the center of each of the pixel areas and extending almost in parallel with the gate bus line 12 is formed. A storage capacitor electrode 19 is formed in each pixel on the storage capacitor bus line 18 through an insulating film.

[0178] A TFT 20 is formed in the vicinity of each of intersection positions between the gate bus lines 12 and the drain bus lines 14. A drain electrode 36 of the TFT 20 is extended from the drain bus line 14, and is formed to be positioned at the side of one end side of an active layer formed on the gate bus line 12 and a channel protective film formed thereon. On the other hand, a source electrode 38 of the TFT 20 is opposite to the drain electrode 36 through a predetermined gap, and is formed to be positioned at the side of the other end side of the active layer and the channel protective film. The drain electrode 36, the active layer and the source electrode 38 are formed of, for example, the same semiconductor layer, and areas where impurities are injected at high concentration are the drain electrode 36 and the source electrode 38. An area just under the channel protective film of the gate bus line 12 functions as a gate electrode of the TFT 20.

[0179] A pixel electrode made of a transparent conductive film of, for example, ITO (Indium Tin Oxide) is formed in the pixel area.

[0180] The pixel electrode 16 includes a plurality of electrode units 60 each having a square outer periphery and smaller than the pixel area, electrode blank parts (slits) 62 formed between the adjacent electrode units 60, and connection electrodes 64 for electrically connecting the electrode units 60, separated by the slits 62, to each other. In FIG. 33, the six electrode units 60 (twelve units in total) of three lines in the direction parallel to the gate bus line 12 and two lines in the direction parallel to the drain bus line 14 are disposed at each of both sides of the storage capacitor bus line 18 in the vertical direction in the drawing. The plurality of electrode units 60 constituting the pixel electrode 16 are formed of the same conductive film.

[0181] Each of the electrode units **60** includes an almost square solid part **46** having sides almost parallel to or vertical to the gate bus line **12** and the drain bus line **14**. The length of one side of the square solid part **46** is, for example 25 μm .

[0182] Besides, the electrode unit **60** includes a stem part **48** branching from the center of each of the sides of the solid part **46** and extending almost in parallel with or vertically to the gate bus line **12** and the drain bus line **14**. The size of the stem part **48** is, for example, 5 μm in length and 5 μm in width.

[0183] Further, the electrode unit **60** includes a plurality of branch parts **49** branching from the solid part **46** and the stem part **48** and extending obliquely with respect to the stem part **48** to form a comb shape, and electrode blank parts (spaces) **66** between the adjacent branch parts **49**. In an area partitioned by the adjacent stem parts **48**, the respective branch parts **49** branching from the solid part **46** and the stem part **48** extend almost in the same direction. In FIG. 33, the two small branch parts **49** branch from the one stem part **48**, and the two large branch parts **49** are branch from one side of the solid part **46**. That is, in the area partitioned by the adjacent stem parts **48**, the four branch parts **49** extend in the same direction. Incidentally, in this specification, a comb portion of the electrode unit **60** in which the stem parts **48** as the extension parts and the branch parts **49** as the extension parts are formed through the blank parts **66** is called a comb electrode **53**.

[0184] An angle between the stem part **48** and the branch part **49**, in other words, an angle between the side of the outer periphery of the electrode unit **60** and the branch part **49** is, for example, 45°. The width of the branch part **49** is, for example, 3 μm , and the width of the blank part **66** is, for example, 3 μm .

[0185] The end of each of the branch parts **49** is formed to be almost parallel to or vertically to the gate bus line **12** and the drain bus line **14**, and by this, the outer periphery of the electrode unit **60** is almost square. The length of one side of the square electrode unit **60** is, for example, 35 μm .

[0186] As stated above, the square solid part **46** with one side having a length of, for example, 25 μm is formed at the center part of the electrode unit **60** having the square outer periphery with one side of, for example, 35 μm , and the comb electrode **53** is formed in an area having a width of 5 μm from the outer periphery of the electrode unit **60** toward the inside. Incidentally, although the width of the area where the comb electrode **53** is formed is not limited to this, it is preferable that the area where the comb electrode **53** is formed has a width of 5 μm or more from the outer periphery of the electrode unit **60** toward the inside. This is because when the width is smaller than this, it becomes difficult to accurately pattern the comb electrode **53**.

[0187] The adjacent electrode units **60** are electrically connected to each other by the connection electrode **64** formed to be connected to the stem parts **48** positioned at the centers of the respective facing sides. As stated above, by providing the connection electrode **64** to connect the centers of the respective facing sides of the adjacent electrode units **60**, the singular point can be certainly fixed.

[0188] Besides, at the lower part of the pixel area in the drawing, the drain electrode **36** of the TFT **20** of the pixel

area adjacent to the lower part is formed to protrude. When the pixel electrode **16** is formed to overlap with the drain electrode **36** when viewed in the direction vertical to the substrate surface, a disturbance occurs in the alignment of liquid crystal molecules in this area, and there is a possibility that cross talk occurs. Thus, it is necessary that the pixel electrode **16** and the drain electrode **36** are formed not to overlap with each other. Thus, the shape of the outer periphery of the electrode unit **60** (lower left in FIG. 33) corresponding to this area is formed into such a shape that a part of the square is cut away in accordance with the shape of the drain electrode **36**. Specifically, while the shape of the outer periphery of the other electrode unit **60** has, for example, a square shape of 35 $\mu\text{m} \times 35 \mu\text{m}$, the shape of the electrode unit **60** in this area has such a shape that a part of the square is cut away so that it is spaced from the drain electrode **36** by, for example, 7 μm .

[0189] The pixel electrode **16** is electrically connected to the source electrode **38** through a contact hole formed in an insulating film under the solid part **46** of the electrode unit **60** (upper left in FIG. 33) close to the TFT **20**. The shape of the contact hole is, for example, a square having one side of 5 μm . Here, it is preferable that the upperpart of the conductive film of the source electrode **38** in the area where the electrode unit **60** close to the TFT **20** is formed, is covered with the conductive film of the pixel electrode **16**. This is because when the conductive film of the source electrode **38** is positioned in the area of the slit **62** of the electrode unit **60**, the oblique electric field by the slit **62** is not sufficiently generated, and there is a fear that the alignment control of liquid crystal in this area becomes insufficient.

[0190] Besides, a rectangular contact area **67** is formed in the pixel electrode **16** on the storage capacitor electrode **19** through an insulating film. The contact area **67** is electrically connected to the stem part **48** of the adjacent electrode unit **60** through the connection electrode **64**. The pixel electrode **16** is electrically connected to the storage capacitor electrode **19** through the contact hole formed in the insulating film under the contact area **67**.

[0191] A BM (Black Matrix) as a light shielding layer for shading the end part of the pixel area is formed at the side of a CF substrate **4** disposed to be opposite to the TFT substrate **2**. The BM is formed into a lattice having a width of, for example, 23 μm . A lattice interval in the extending direction of the gate bus line **12** is 100 μm , and a lattice interval in the extending direction of the drain bus line **14** is 300 μm . A CF resin layer of one of red (G), green (G) and blue (B) is formed in the opening part of the BM. The opposite electrode (common electrode) made of, for example, ITO is formed on the whole surface of the CF resin layer.

[0192] FIG. 34 is a sectional view taken along line A-A' of FIG. 33. As shown in the drawing, the drain bus lines **14** are formed on a glass substrate **10** constituting the TFT substrate **2**. An insulating film **30** is formed on the glass substrate **10** on which the drain bus lines **14** are formed. The pixel electrode **16** is formed on the insulating film **30** between the drain bus lines **14**.

[0193] On the other hand, the CF substrate **4** disposed to be opposite to the TFT substrate **2** includes a glass substrate **11** and an opposite electrode **42** formed on the surface of the

glass substrate **11** opposite to the TFT substrate **2**. Incidentally, the CF resin layer (not shown) is formed between the glass substrate **11** and the opposite electrode **42**.

[0194] Further, as shown in FIGS. 33 and 34, a cylindrical protruding structure **73** is provided on the surface opposite to the TFT substrate **2** so that it is positioned almost at the center of each of the electrode units **60** of the TFT substrate **2**. The protruding structure **73** is made of, for example, acryl resin, and its size is 10 μm in diameter and 2 μm in height.

[0195] Besides, alignment films (not shown) are formed on the facing surfaces of both the substrates **2** and **4**. The alignment film has a vertical alignment, and causes liquid crystal molecules to be aligned in the direction vertical to the substrate surface (alignment film surface) in a steady state. The liquid crystal display device is manufactured by injecting and sealing the liquid crystal having a negative dielectric anisotropy into the liquid crystal cell in which both the substrates **2** and **4** are bonded to each other.

[0196] FIG. 35 shows an arrangement of a polarizing plate and the like of the liquid crystal display device according to this embodiment. As shown in the drawing, polarizing plates **86** and **87** disposed crossed Nicols are disposed at both sides of a liquid crystal layer **6** made of the liquid crystal cell in which the liquid crystal is sealed. A quarter-wave plate **50** is disposed between the liquid crystal layer **6** and the polarizing plate **87**. Besides, a quarter-wave plate **51** is disposed between the liquid crystal layer **6** and the polarizing plate **86**. As the quarter-wave plates **50** and **51**, for example, ARTON plates (in-plane phase difference is 140 nm) made by JSR Corporation can be used. A layer having a negative phase difference, such as a TAC (triacyetylcellulose) film **72**, may be disposed between the liquid crystal layer **6** and the quarter-wave plate **51** in order to improve the viewing angle characteristics. Incidentally, an upper part in the drawing is an observer side and a lower part in the drawing is an optical source side where a backlight unit is disposed. A reflection polarizing plate **75** is disposed between the polarizing plate **87** and the light source side. As the reflection polarizing plate **75**, for example, PCF 350D made by Nitto Denko Co., Ltd. can be used.

[0197] An angle between the optical axis (lag axis) of the quarter-wave plate **50** and the absorption axis of the polarizing plate **87** is approximately 45°. That is, when light emitted from a light source is transmitted through the polarizing plate **87** and the quarter-wave plate **50** in this order, it becomes a circularly polarized light. Besides, an angle between the optical axis of the quarter-wave plate **51** and the absorption axis of the polarizing plate **86** is approximately 45°. The optical axes of both the quarter-wave plates **50** and **51** are almost orthogonal to each other. In order to realize the symmetry of viewing angles and optimize the viewing angle characteristics in the vertical and horizontal directions with respect to the display screen, the polarizing plates **86** and **87**, and the quarter-wave plates **50** and **51** are disposed as described below.

[0198] The absorption axis of the polarizing plate **87** is disposed in the counterclockwise direction of 150° with reference to the right part (direction of three o'clock) of the display screen. The optical axis of the quarter-wave plate **50** is disposed in the counterclockwise direction of 150° with reference to the right part of the display screen. The optical axis of the TAC film **72** and the optical axis of the quarter-

wave plate **51** disposed at the observer side of the liquid crystal layer **6** are disposed in the counterclockwise direction of 105° with reference to the right part of the display screen. The absorption axis of the polarizing plate **86** is disposed in the counterclockwise direction of 60° with reference to the right part of the display screen.

[0199] In this way, the liquid crystal display device according to this embodiment is constructed.

[0200] In the liquid crystal display device according to this embodiment constructed as described above, when a voltage is applied between the opposite electrode **42** and the pixel electrode **16**, the liquid crystal is put in an alignment state described below.

[0201] In the area of the electrode unit **60** where the comb electrode **53** is formed, the liquid crystal molecule is aligned in the extension direction of the blank part **66** between the branch parts **49** by the comb electrode **53**. On the other hand, in the area of the center part of the electrode unit **60** where the solid part **46** is formed, the liquid crystal molecule is aligned in the direction toward the center part of the electrode unit **60** by the oblique electric field of the outer peripheral part of the solid part **46** and by the liquid crystal alignment from the outside due to the comb electrode **53**. That is, the alignment division in four directions is roughly realized.

[0202] One of the main features of the liquid crystal display device according to this embodiment is that each of the plurality of electrode units **60** constituting the pixel electrode **16** of one pixel includes the square solid part **46**, the stem part **48** branching from the center of each of the sides of the solid part **46** and extending almost in parallel with or vertically to the gate bus line **12** and the drain bus line **14**, and the plurality of branch parts **49** branching from the solid part **46** and the stem part **48** and extending obliquely with respect to the stem part **48** to form the comb shape.

[0203] In the vertical alignment type liquid crystal display device, it is conceivable that as a method of performing alignment control of the liquid crystal, as shown in FIG. 36, slits are provided on almost the whole surface of an electrode unit **60**, a solid part **46** is not provided, and the electrode unit **60** is formed of only a comb electrode **53** of stem parts **48** and branch parts **49**. In this case, as shown in FIG. 36, the electrode unit **60** includes the two stem parts **48** extending almost in parallel with or vertically to the gate bus line **12** and the drain bus line **14** and intersecting with each other crosswise. Further, the electrode unit **60** includes the plurality of branch parts **49** branching from the stem parts **48** and extending obliquely with respect to the stem parts **48** to form the comb shape, and electrode blank parts **66** between the adjacent branch parts **49**. In the area partitioned by the adjacent stem parts **48**, the respective branch parts **49** branching from the stem parts **48** extend in almost the same direction.

[0204] However, as shown in FIG. 36, when the electrode unit **60** is patterned, it is difficult to make the widths of the slits constant in all areas in terms of process. Besides, at the time of patterning, all display area is divided into a plurality of areas, and when the patterning of the pixel electrode is performed for each of the divided areas, a variation in slit width becomes large at the boundary portion between the

divided areas. In the case where the variation in the slit width occurs, that is, in the case where the variation occurs in the width of the stem part **48** and the branch part **49**, a difference in brightness occurs when a display is actually performed, and as a result, uneven display occurs.

[0205] On the other hand, in the liquid crystal display device according to this embodiment, the square solid part **46** is provided at the center of the electrode unit **60**, and the stem parts **48** and the branch parts **49** branch from the solid part **46**. Thus, as compared with the case shown in FIG. 36, the ratio of the stem parts **48** and the branch parts **49** to the electrode unit **60**, that is, the ratio of the comb electrode **53** is small. Accordingly, it becomes possible to suppress the occurrence of the difference in brightness due to the variation in the widths of the stem parts **48** and the branch parts **49**, to reduce the uneven display, and to obtain excellent display quality.

[0206] Incidentally, in order to sufficiently suppress the occurrence of the difference in brightness due to the variation in the widths of the stem parts **48** and the branch parts **49**, it is preferable that the ratio of the square measure of the solid part **46** to the square measure of the area within the outer periphery of the electrode unit **60** is 50% or more.

[0207] FIG. 37 is a graph of measurement of a rate of change in brightness with respect to a variation in width of the stem part **48** and the branch part **49** (extension part) of the comb electrode **53**. In FIG. 37, a graph 1 is a graph in the case where the ratio of the square measure of the solid part **46** to the square measure of the area within the outer periphery of the electrode unit **60** is 58%. A graph 2 is a graph in the case where the ratio of the square measure of the solid part **46** to the square measure of the area within the outer periphery of the electrode unit **60** is 50%. A graph 3 is a graph in the case where the ratio of the square measure of the solid part **46** to the square measure of the area within the outer periphery of the electrode unit **60** is 33%. A graph 4 is a graph in the case shown in FIG. 36 in which the electrode unit **60** is formed of only the comb electrode **53** and the solid part **46** is not provided.

[0208] From the graphs shown in FIG. 37, it is understood that as compared with the case shown in FIG. 36 in which the electrode unit **60** is formed of only the comb electrode **53**, the change in the brightness can be suppressed by providing the solid part **46**. Further, as described above, it is understood that when the ratio of the square measure of the solid part **46** to the square measure of the area within the outer periphery of the electrode unit **60** is made 50% or more, the change in the brightness can be sufficiently suppressed.

[0209] Besides, in the liquid crystal display device according to this embodiment, since the solid part **46** is provided at the center part of the electrode unit **60**, as compared with the case shown in FIG. 36 in which the electrode unit **60** is formed of only the comb electrode **53**, the lengths of the stem part **48** and the branch part **49** of the comb electrode **53** are short. Thus, as compared with the case shown in FIG. 36, the liquid crystal display device according to this embodiment can improve the response speed of the liquid crystal molecule. The reason is as follows. That is, in the case where the length of the comb electrode **53** is long as shown in FIG. 36, a liquid crystal portion which is hardly influenced by a surrounding oblique electric field is gener-

ated at a midway position of the comb electrode **53**. At this position, it becomes difficult to determine whether a direction in which the liquid crystal is aligned is a direction toward the center with respect to the comb electrode **53**, or a direction toward the outer peripheral part. On the other hand, as in the liquid crystal display device according to this embodiment, when the length of the comb electrode **53** is short because the solid part **46** is formed, the liquid crystal is apt to be influenced by the surrounding oblique electric field, and the alignment angle at which the liquid crystal molecule is aligned becomes easy to determine. As a result, the response speed of the liquid crystal molecule becomes fast.

[0210] Besides, in the liquid crystal display device according to this embodiment, the quarter-wave plates **50** and **51** and the polarizing plates **87** and **86** are disposed at the outside of both the substrates **2** and **4** in this order. By doing so, as compared with the case where only the polarizing plates **87** and **86** disposed in crossed Nicols are used, the quarter-wave plates **50** and **51** whose optical axes are orthogonal to each other are disposed, so that the transmissivity of light at the time of white display can be improved, and it is possible to realize the liquid crystal display device in which the brightness is high and the clear display can be obtained. In the case where the quarter-wave plates **50** and **51** are not disposed, a dark line is generated at a position of a boundary where the domain direction is not divided into four. Besides, in an area where the comb electrode **53** does not exist, differently from the area where the comb electrode **53** exists, it is difficult to give a direction angle in a specific direction. Thus, as compared with the case where the comb electrode **53** exists in the whole area, the brightness is lowered. Since all the dark lines generated in these portions can be made transparent by disposing the quarter-wave plates **50** and **51**, the transmissivity can be improved.

[0211] Next, a method of manufacturing the liquid crystal display device according to this embodiment will be described with reference to FIGS. 38A to 40C. FIGS. 38A to 40C are process sectional views showing the method of manufacturing the liquid crystal display device according to this embodiment, and correspond to the section in the direction along the drain bus line **14** of FIG. 33. Incidentally, in the following, a description will be given to the method up to the formation of the pixel electrode **16** on the glass substrate **10** of the TFT substrate **2**.

[0212] First, a gate layer **21** made of an aluminum film is formed on the glass substrate **10** by, for example, a sputtering method (see FIG. 38A).

[0213] Next, the gate layer **21** is patterned, so that a gate bus line **12** and a storage capacitor bus line **18** are formed (see FIG. 38B). Incidentally, in FIGS. 38A to 40C, the storage capacitor bus line **18** is omitted.

[0214] Next, an insulating film **22** made of a silicon oxide film is formed on the whole surface by, for example, a CVD (Chemical Vapor Deposition) method (see FIG. 38C).

[0215] Next, a semiconductor layer **23** made of a poly-silicon film is formed on the insulating film **22** by, for example, the CVD method (see FIG. 38D).

[0216] Next, an impurity is ion implanted into the semiconductor layer **23** other than an area on the gate bus line **12**, which becomes an active layer **24** (see FIG. 39A).

[0217] Next, the semiconductor layer 23 in which the impurity is ion implanted is patterned, so that a drain bus line 14, a drain electrode 36, a source electrode 38 and a storage capacitor electrode 19 are formed (see FIG. 39B). In this way, a TFT 20 is formed in the vicinity of an intersection position of the gate bus line 12 and the drain bus line 14.

[0218] Next, an insulating film 25 made of a silicon oxide film is formed on the whole surface by, for example, the CVD method (see FIG. 39C).

[0219] Next, the insulating film 25 is selectively etched, so that a contact hole 26 reaching the source electrode 38 of the TFT 20 is formed (see FIG. 40A).

[0220] Next, a transparent conductive film 27 made of ITO is formed on the whole surface by, for example, the sputtering method (see FIG. 40B).

[0221] Next, the transparent conductive film 27 is patterned, so that an electrode unit 60, a connection electrode 64 and a contact area 67 are formed (see FIG. 40C). In this way, the pixel electrode 16 electrically connected to the source electrode 38 through the contact hole 26 is formed on the glass substrate 10 of the TFT substrate 2.

[0222] Although not shown, subsequently to this, a process similar to a manufacture process of a normal liquid crystal display device is performed, so that the liquid crystal display device according to this embodiment can be completed.

[0223] As stated above, according to this embodiment, the square solid part 46 is provided at the center of the electrode unit 60, and the ratio of the comb electrode 53 to the electrode unit 60 is small, so that the occurrence of difference in brightness due to the variation in width of the comb electrode 53 is suppressed, and the uneven display can be reduced. By this, the liquid crystal display device excellent in display quality can be provided.

MODIFIED EXAMPLE

[0224] A liquid crystal display device according to a modified example of this embodiment will be described with reference to FIGS. 41A to 41N. FIGS. 41A to 41N are plan views showing shapes of electrode units in the liquid crystal display device according to this modified example.

[0225] In the above, as shown in FIG. 33, although the square solid part 46 is provided at the center part of the electrode unit 60, the shape of the electrode unit 60 can be made to have various shapes other than this.

[0226] For example, as shown in FIG. 41A, the shape of the solid part 46 may be made a rhombic shape obtained by connecting center points of the respective sides of the outer periphery of the electrode unit 60. Incidentally, the rhombic solid part 46 may be smaller than that shown in FIG. 41A, and its shape may be distorted.

[0227] Besides, as shown in FIG. 41B, the shape of the solid part 46 may be made a circular shape. Besides, the shape of the solid part 46 may be made an elliptic shape.

[0228] Besides, as shown in FIG. 41C, the shape of the solid part 46 may be made a convex polygon. Here, the convex polygon is the polygon in which all angles are less than 180°.

[0229] Besides, as shown in FIG. 41D, the shape of the solid part 46 may be made a cruciform shape wider than the stem part 48.

[0230] Besides, as shown in FIG. 41E, the shape of the solid part 46 may be made a concave polygon. Here, the concave polygon is the polygon in which at least one angle is larger than 180°.

[0231] Besides, in the above, although the solid part 46 is provided almost the center part of the electrode unit 60, the position where the solid part 46 is provided is not limited to the center part.

[0232] For example, as shown in FIGS. 41F and 41G, the solid part 46 is continuously formed between two opposite sides of the outer periphery of the electrode unit 60, and the comb electrode 53 may be formed at the other two sides, that is, at both sides of the solid part 46 continuously formed between the two opposite sides. The direction in which the solid part 46 is continuously formed may be almost parallel to the drain bus line 14 or may be parallel to the gate bus line 12.

[0233] Besides, as shown in FIG. 41H, the comb electrode 53 is formed in an area close to one side of the outer periphery of the electrode unit 60, and the other area may be made the solid part 46. Incidentally, the liquid crystal display device including the electrode unit 60 having the shape shown in FIG. 41H will be described in a fourth embodiment.

[0234] Besides, as shown in FIG. 41I, similarly to FIG. 41D, the shape of the solid part 46 may be made a cruciform shape, and the solid part 46 may be continuously formed between two opposite sides of the outer periphery of the electrode unit 60 in one direction of the cross.

[0235] Besides, as shown in FIG. 41J, the comb electrode 53 is formed in a half area of the electrode unit 60, and the other half area may be made the solid part 46.

[0236] Besides, as shown in FIG. 41K, among four areas divided by the stem parts 48 extending crosswise from the center of the electrode unit 60 toward the center points of the outer periphery of the electrode unit 60, one pair of areas positioned diagonally are made the solid part 46, and the comb electrode 53 may be formed in each of the other pair of areas positioned diagonally. As stated above, the four areas are defined in the electrode unit 60 by the cross-shaped boundary lines, the comb electrode 53 is formed in at least one of the four areas, and the solid part 46 may be formed in the other areas.

[0237] Besides, in the above, although the description has been given to the case where the electrode unit 60 is divided into the four square areas by the stem parts 48 crosswise extending from the center of the electrode unit 60 toward the center points of the outer periphery of the electrode unit 60, the division shape of the electrode unit 60 may be another shape.

[0238] For example, as shown in FIG. 41L, the electrode unit is divided into four triangular areas by the stem parts 48 crosswise extending from the center of the electrode unit 60 toward vertexes of the outer periphery of the electrode unit 60, and the square solid part 46 may be provided at the center part of the electrode unit 60. In this case, the branch parts 49 branch from the solid part 46 and the stem parts 48,

and extend obliquely with respect to the stem parts 48 to form the comb shape. In the triangular area divided by the adjacent stem parts 48, the branch parts 49 branching from the solid part 46 and the stem parts 48 extend in almost the same direction. An angle between the stem part 48 and the branch part 49 is, for example, approximately 45°, in other words, an angle between the side of the outer periphery of the electrode unit 60 and the branch part 49 is, for example, approximately 90°.

[0239] Besides, as shown in FIG. 41M, the electrode unit is divided into four triangular areas by the stem parts 48 provided on the diagonal lines of the electrode unit 60 having the square outer periphery, and the solid part 46 may be provided in one area of them. In this case, in the other triangular areas, the branch parts 49 branch from the stem parts 48, and extend obliquely with respect to the stem parts 48 to form the comb shape. In the triangular areas partitioned by the adjacent stem parts 48, the branch parts 49 branching from the solid part 46 and the stem parts 48 extend in almost the same direction. An angle between the stem part 48 and the branch part 49 is, for example, approximately 45°.

[0240] Besides, as shown in FIG. 41N, the electrode unit is divided into four triangular areas by the stem parts 48 provided on diagonal lines of the electrode unit 60 having the square outer periphery, and the solid part 46 may be provided in one pair of areas symmetric with respect to the center point of the electrode unit 60. In this case, in the other pair of areas symmetric with respect to the point, the branch parts 49 branches from the stem parts 48, and extend obliquely with respect to the stem parts 48 to form the comb shape. In the triangular area partitioned by the adjacent stem parts 48, the branch parts 49 branching from the solid part 46 and the stem parts 48 extend in almost the same direction. An angle between the stem part 48 and the branch part 49 is, for example, approximately 45°.

[0241] As shown in FIGS. 41M and 41N, the four areas are defined in the electrode unit 60 by the diagonal lines of the outer periphery of the electrode unit 60, the comb electrode 53 is formed in at least one of the four areas, and the solid part 46 may be formed in the other area. Incidentally, as shown in FIG. 41N, among the four areas, the comb electrodes 53 are formed in one pair of areas positioned diagonally and the solid parts 46 are formed in the other pair of areas, and the one pair of areas in which the comb electrodes 53 are formed may become areas including the sides almost parallel to the drain bus line 14 of the outer periphery of the electrode unit 60.

[0242] Besides, as shown in FIGS. 41A to 41N, the shape of the electrode unit 60 is not limited to those in which the branch parts 49 extend almost in parallel with each other in the area partitioned by the adjacent stem parts 48. For example, in the electrode unit 60, a plurality of extension parts (stem parts 48, branch parts 49) branching from the solid part 46 may be formed so as to extend in the radial direction from the center part of the electrode unit 60 toward the outer periphery of the electrode unit 60.

Fourth Embodiment

[0243] A liquid crystal display device according to a fourth embodiment of this invention will be described with reference to FIG. 42. FIG. 42 is a plan view showing a structure of one pixel of the liquid crystal display device

according to this embodiment. Incidentally, structural elements similar to those of the liquid crystal display device of the third embodiment are denoted by the same reference numerals, and their description will be omitted or simplified.

[0244] The basic structure of the liquid crystal display device according to this embodiment is almost the same as the liquid crystal display device according to the third embodiment except for the shape of an electrode unit 60 constituting a pixel electrode 16. A main feature of the liquid crystal display device according to this embodiment is that in the electrode unit 60, a comb electrode 53 is formed in an area close to one side of a square outer periphery at a drain bus line 14 side, and the other area is a solid part 46.

[0245] In the liquid crystal display device according to this embodiment, as shown in FIG. 42, in the electrode unit 60 having the square outer periphery, the comb electrode 53 made of a stem part 48 and branch parts 49 is formed in the area close to one side, adjacent to the drain bus line 14, of the sides of the outer periphery parallel to the drain bus line 14. The other area of the electrode unit 60 is the solid part 46. The solid part 46 is formed to have a width of, for example 28 μm from the side, farther from the drain bus line 14, of the sides of the outer periphery parallel to the drain bus line 14. In this case, the area of 80% of the electrode unit 60 having the square outer periphery of 35 μm×35 μm is the solid part 46.

[0246] An adjacent electrode unit 60 is electrically connected by a connection electrode 64 formed to be connected to the solid part 46.

[0247] In the electrode unit 60 of the liquid crystal display device according to this embodiment, the reason why the comb electrode 53 is formed in the area close to the one side of the square outer periphery at the drain bus line 14 side is as follows.

[0248] Similarly to the case of the third embodiment, the adjacent electrode unit 60 is disposed to be separated by a slit 62, and the connection electrode 64 is formed to connect center parts of the sides of the outer peripheries of the adjacent electrode units 60.

[0249] In the electrode unit 60, at the side where the connection electrode 64 is connected. That is, among the four sides of the outer periphery of the electrode unit 60, the control of singular points of the three sides to which the connection electrodes 64 are connected is suitably performed.

[0250] The domain of liquid crystal in the vicinity of the drain bus line 14 is pulled by the flow of this singular point, and an inclination alignment occurs in an unexpected vertical direction. As a result, the balance of alignment division of the liquid crystal is lost, roughness of the display occurs, and a mark remains in the case where the liquid crystal panel is pressed by a finger.

[0251] In the liquid crystal display device according to this embodiment, since the area of the comb electrode 53 is provided along the drain bus line 14, the alignment of the liquid crystal at the end part of the drain bus line 14 is clearly divided into two areas of an upper direction (in FIG. 42, upper right direction/upper left direction) and a lower direction (in FIG. 42, lower right direction/lower left direction) by this comb electrode 53. Since the two alignment areas are

provided, the domain of the liquid crystal divided into upper and lower parts passes through the portion of the stem part **48** without fail. By this, it is possible to obtain such effects that the disturbance of the domain of the liquid crystal along the drain bus line **14** can be prevented, the roughness of the display is suppressed, and a mark does not remain in the case where an outer force is applied, for example, the liquid crystal panel is pressed by a finger.

[0252] Besides, as compared with the liquid crystal display device according to the third embodiment, in the liquid crystal display device according to this embodiment, since the square measure of the solid part **46** in the electrode unit **60** is large, the occurrence of brightness difference or uneven display due to the dimension variation of the comb electrode **53** can be further effectively suppressed.

Fifth Embodiment

[0253] A liquid crystal display device according to a fifth embodiment of the invention will be described with reference to FIG. 43. FIG. 43 is a plan view showing a structure of one pixel of the liquid crystal display device according to this embodiment. Incidentally, structural elements similar to those of the liquid crystal display device according to the third embodiment are denoted by the same reference number, and their description will be omitted or simplified.

[0254] The basic structure of the liquid crystal display device according to this embodiment is almost the same as the liquid crystal display device according to the third embodiment except for the shape of an electrode unit **60** constituting a pixel electrode **16**. The liquid crystal display device according to this embodiment is different from the liquid crystal display device according to the third embodiment in that the electrode unit **60** has a rectangular outer periphery.

[0255] As shown in FIG. 43, the pixel electrode **16** in the liquid crystal display device according to this embodiment has the rectangular outer periphery, and includes a plurality of electrode units **60** smaller than the pixel area, a slit **62** formed between the adjacent electrode units **60**, and a connection electrode **64** for electrically connecting the electrode units **60**, separated by the slit **62**, to each other. In FIG. 43, the three electrode units **60** (six units in total) of three lines in the direction parallel to a gate bus line **12** and one line in the direction parallel to a drain bus line **14** are disposed at each of both sides of a storage capacitor bus line **18** in the vertical direction in the drawing.

[0256] The electrode unit **60** includes an almost rectangular solid part **46** having sides almost parallel to or vertical to the gate bus line **12** and the drain bus line **14**. The width of the rectangular solid part **46** in the direction parallel to the gate bus line **12** is, for example, 60 μm . Besides, the width of the rectangular solid part **46** parallel to the drain bus line **14** is, for example, 25 μm .

[0257] Besides, the electrode unit **60** includes a stem part **48** branching from the center of each of sides of the solid part **46** and extending almost in parallel with or vertically to the gate bus line **12** and the drain bus line **14**. The size of the stem part **48** extending almost in parallel with the gate bus line **12** is, for example, 9 μm in length and 5 μm in width. The size of the stem part **48** extending almost in parallel with the drain bus line **14** is, for example, 5 μm in length and 5 μm in width.

[0258] Further, the electrode unit **60** includes a plurality of branch parts **49** branching from the solid part **46** and the stem part **48** and extending obliquely with respect to the stem part **48** to form a comb shape, and electrode blank parts **66** between the adjacent branch parts **49**. In an area partitioned by the adjacent stem parts **48**, the branch parts **49** branching from the solid part **46** and the stem parts **48** extend in almost the same direction. In FIG. 43, the six branch parts **49** extend in the same direction in the area partitioned by the adjacent stem parts **48**.

[0259] An angle between the stem part **48** and the branch part **49** is, for example, 45°. The width of the branch part **49** is, for example, 3 μm , and the width of the blank part **66** is, for example, 3 μm .

[0260] Similarly to the liquid crystal display device according to the third embodiment, the end part of each of the branch parts **49** is formed almost in parallel with or vertically to the gate bus line **12** and the drain bus line **14**, and by this, the outer periphery of the electrode unit **60** becomes almost rectangular. The width of the outer periphery of the electrode unit **60** in the direction parallel to the gate bus line **12** is, for example, 78 μm . Besides, the width in the direction parallel to the drain bus line **14** is, for example, 35 μm .

[0261] The adjacent electrode units **60** are electrically connected to each other by the connection electrode **64** formed to be connected to the stem parts **48** positioned at the centers of the respective sides of the outer peripheries of the electrode units **60**. Since the electrode units **60** in only one line is provided in the direction parallel to the drain bus line **14**, the connection electrode **64** is formed only in the direction parallel to the drain bus line **14**.

[0262] Besides, in the lower part of the pixel area in the drawing, a drain electrode **36** of a TFT **20** of a lower adjacent pixel area is formed to protrude. From the same reason as the case of the third embodiment, the shape of the electrode unit **60** (at the lower part in FIG. 43) positioned in this area is formed into such a shape that a part of the rectangle corresponding to the shape of the drain electrode **36** is cut away. Specifically, while the shape of the outer periphery of the other electrode unit **60** is a rectangular shape of 35 $\mu\text{m} \times 78 \mu\text{m}$, the shape of the outer periphery of the electrode unit **60** in this area is such a shape that a part of the rectangle is cut away so that it is spaced from the drain electrode by 7 μm .

[0263] A main feature of the liquid crystal display device according to this embodiment is that the electrode unit **60** includes the rectangular solid part **46** having the same long axis direction as the rectangular outer periphery.

[0264] In the case where the outer peripheral shape of the electrode unit **60** is rectangular, when the square solid part **46** is merely formed as in the case according to the third embodiment, the areal ratio of the solid part **46** to the electrode unit **60** becomes small. Thus, it is conceivable that even if the solid part **46** is formed, the effect to suppress the change of brightness due to the variation of width of the comb electrode **53** can not be sufficiently obtained. On the other hand, in the case where almost all area of the electrode unit **60** is made the solid part **46**, since the outer peripheral shape of the electrode unit **60** is rectangular, it is conceivable that the control of a singular point becomes difficult.

[0265] In the liquid crystal display device according to this embodiment, in the electrode unit **60** having the rectangular outer periphery, the rectangular solid part **46** having the same long axis direction as the outer periphery is formed in conformity with the shape of the outer periphery of the rectangular shape. Thus, the change of brightness due to the variation of width of the comb electrode **53** can be sufficiently suppressed, and the control of the singular point does not become difficult.

[0266] Incidentally, also in the liquid crystal display device according to this embodiment, similarly to the case of the liquid crystal display device according to the third embodiment in which the outer periphery of the electrode unit **60** is square, in order to sufficiently suppress the occurrence of the difference in brightness due to the variation in width of the branch part **49**, it is preferable that the ratio of the square measure of the solid part **46** to the square measure of the area within the outer periphery of the electrode unit **60** is a predetermined value or more, for example, 50% or more.

MODIFIED EXAMPLE

[0267] A liquid crystal display device according to a modified example of the fifth embodiment of the invention will be described with reference to FIGS. 44A to 44C. FIGS. 44A to 44C are plan views showing shapes of electrode units in the liquid crystal display device according to this modified example.

[0268] In the above, as shown in FIG. 43, although the rectangular solid part **46** is provided at the center part of the electrode unit **60** having the rectangular outer periphery, similarly to the case according to the modified example of the third embodiment shown in FIGS. 41A to 41N, the shape of the electrode unit **60** can be made various shapes in addition to this.

[0269] For example, the shape of the solid part **46** may be made an elliptical shape as shown in FIG. 44A.

[0270] Besides, as shown in FIG. 44B, the shape of the solid part **46** may be made a rhombic shape formed by connecting the center points of the respective sides of the outer periphery of the electrode unit **60**. Incidentally, the rhombic solid part **46** may be smaller than that shown in FIG. 44B, and the shape may be distorted.

[0271] Besides, for example, as shown in FIG. 44C, the shape of the solid part **46** maybe made a band shape reaching two opposite sides of the outer periphery of the electrode unit **60**, and the comb electrodes **53** may be formed at the other two sides, that is, at both sides of the band-shaped solid part **46**. Incidentally, the liquid crystal display device including the electrode unit **60** having the shape shown in FIG. 44C will be described in detail in a sixth embodiment.

Sixth Embodiment

[0272] A liquid crystal display device according to a sixth embodiment of the invention will be described with reference to FIG. 45. FIG. 45 is a plan view showing a structure of one pixel of the liquid crystal display device according to this embodiment. Incidentally, structural elements similar to those of the liquid crystal display device according to the fifth embodiment are denoted by the same reference numerals, and their description will be omitted or simplified.

[0273] The basic structure of the liquid crystal display device according to this embodiment is almost the same as the liquid crystal display device according to the fifth embodiment except for the shape of an electrode unit **60** constituting a pixel electrode **16**. A main feature of the liquid crystal display device according to this embodiment is that in the electrode unit **60**, comb electrodes **53** are formed in areas close to the two sides of the rectangular outer periphery at the drain bus line **14** side, and the other area is a solid part **46**.

[0274] As shown in FIG. 45, in the electrode unit **60** having the rectangular outer periphery, the comb electrodes **53** each made of a stem part **48** and branch parts **49** are formed in the areas close to the two sides of the outer periphery parallel to the drain bus line **14**. In the case where the width of the outer periphery of the electrode unit **60** is made, for example, 35 $\mu\text{m} \times 78 \mu\text{m}$ similarly to the liquid crystal display device according to the fifth embodiment, the widths of the areas where the comb electrodes **53** are formed are respectively, for example, 7 μm from the two sides of the outer periphery of the electrode unit **60** parallel to the drain bus line **14**. In this case, the width of the solid part **46** in the direction parallel to the gate bus line **12** is 64 μm .

[0275] In the liquid crystal display device according to this embodiment, similarly to the liquid crystal display device according to the fourth embodiment, since the comb electrode **53** is formed in the area along the drain bus line **14**, by this comb electrode **53**, the alignment of liquid crystal at the end part of the drain bus line **14** is clearly divided into two areas of the upper direction (in FIG. 45, upper right direction/upper left direction) and the lower direction (in FIG. 45, lower right direction/lower left direction). Since the two alignment areas are provided as stated above, the domain of the liquid crystal divided vertically passes through the portion of the stem part **48** without fail. By this, it is possible to obtain such effects that the disturbance of the domain of the liquid crystal along the drain bus line **14** can be prevented, roughness of the display is suppressed, and in the case where outer force is applied, for example, the liquid crystal panel is pressed by a finger, a mark does not remain.

[0276] Besides, in the liquid crystal display device according to this embodiment, as compared with the liquid crystal display device according to the fifth embodiment including the electrode unit **60** having the rectangular outer periphery, since the square measure of the solid part **46** is large in the electrode unit **60**, it is possible to further effectively suppress the occurrence of brightness difference and uneven display due to the size variation of the comb electrode **53**.

Seventh Embodiment

[0277] A liquid crystal display device according to a seventh embodiment of the invention will be described with reference to FIG. 46. FIG. 46 is a plan view showing a structure of one pixel of the liquid crystal display device according to this embodiment. Incidentally, structural elements similar to those of the liquid crystal display device according to the fifth embodiment are denoted by the same reference numerals and their description will be omitted or simplified.

[0278] The basic structure of the liquid crystal display device according to this embodiment is almost the same as the liquid crystal display device according to the fifth

embodiment except for the shape of an electrode unit **60** constituting a pixel electrode **16**. A main feature of the liquid crystal display device according to this embodiment is that an electrode unit **60a** is formed on a storage capacitor electrode **19**.

[0279] As shown in FIG. 46, the pixel electrode **16** of the liquid crystal display device according to this embodiment includes the electrode unit **60a** which is formed at the center of the pixel area in which the storage capacitor electrode **19** is formed, has the rectangular outer periphery, and is smaller than the pixel area, and a plurality of electrode units **60b** which are formed between the electrode unit **60a** and upper and lower gate bus lines **12**, and each of which has a rectangular outer periphery and is smaller than the pixel area. The electrode units **60a** and **60b** are separated by a slit **62**. Further, the pixel electrode **16** includes a connection electrode **64** for electrically connecting the electrode units **60a** and **60b**, separated by the slit **62**, to each other. In FIG. 46, in the direction parallel to the drain bus line **14**, there are disposed the one electrode unit **60a**, and the two (four in total) electrode units **60b** disposed between the electrode unit **60a** and the upper and lower gate bus line **12**.

[0280] The electrode unit **60a** is electrically connected to the storage capacitor electrode **19** through a contact hole formed in an insulating film under the electrode unit **60a**.

[0281] The electrode unit **60a** includes a rectangular portion **96** having sides almost parallel to or vertical to the gate bus line **12** and the drain bus line **14**, and a solid part **46** having convex portions **97** protruding from the sides of the rectangular portion **96** parallel to a drain bus line **14** and covering the upper sides of both ends of the storage capacitor electrode **19**.

[0282] Besides, the electrode unit **60a** includes a stem part **48** branching from the center of the side of the rectangular portion **96** of the solid part **46** parallel to the gate bus line **12** and extending almost parallel to the drain bus line **14**, and the size of the stem part **48** is, for example, 5 μm in length and 5 μm in width.

[0283] Further, the electrode unit **60a** includes a plurality of branch parts **49** branching from the rectangular portion **96** of the solid part **46** and the convex portion **97** and extending obliquely with respect to the stem part **48** to form a comb shape, and electrode blank parts **66** between the adjacent branch parts **49**. In an area partitioned by the adjacent stem parts **48** and the rectangular portion **96**, the respective branch parts **49** branching from the solid part **46** extend in almost the same direction.

[0284] On the other hand, the electrode unit **60b** includes a rectangular solid part **46** having sides almost parallel to or vertical to the gate bus line **12** and the drain bus line **14**. The width of the rectangular solid part **46** of the electrode unit **60b** in the direction parallel to the gate bus line **12** is, for example, 60 μm . Besides, the width in the direction parallel to the drain bus line **14** is, for example, 39 μm .

[0285] Besides, the electrode unit **60b** includes a stem part **48** branching from the center of each of the sides of the solid part **46** and extending almost in parallel with or vertically to the gate bus line **12** and the drain bus line **14**. The size of the stem part **48** extending almost in parallel with the gate bus line **12** is, for example, 9 μm in length and 5 μm in width.

The size of the stem part **48** extending almost in parallel with the drain bus line **14** is, for example, 5 μm in length and 5 μm in width.

[0286] Further, the electrode unit **60b** includes a plurality of branch parts **49** branching from the solid part **46** and extending obliquely with respect to the stem part **48** to form a comb shape, and electrode blank parts **66** between the adjacent branch parts **49**. In an area partitioned by the adjacent stem parts **48**, the branch parts branching from the solid part **46** and the stem parts **48** extend in almost the same direction.

[0287] An angle between the stem part **48** and the branch part **49** in the electrode units **60a** and **60b** is, for example, 45 $^\circ$. The width of the branch part **49** is, for example, 3 μm and the width of the branch part **66** is, for example, 3 μm .

[0288] The ends of the respective branch parts **49** of the electrode units **60a** and **60b** are formed almost in parallel with or vertically to the gate bus line **12** and the drain bus line **14**, and by this, the outer peripheries of the electrode units **60a** and **60b** are almost rectangular. The width of the outer periphery of the electrode unit **60a** in the direction parallel to the gate bus line **12** is, for example, 78 μm , and the width in the direction parallel to the drain bus line **14** is, for example, 64 μm . The width of the outer periphery of the electrode unit **60b** in the direction parallel to the gate bus line **12** is, for example, 78 μm , and the width in the direction parallel to the drain bus line **14** is, for example, 49 μm .

[0289] The adjacent electrode units **60a** and **60b** are electrically connected to each other by the connection electrode **64** formed to be connected to the stem parts **48** positioned at the centers of the sides of the rectangular electrode units **60a** and **60b** parallel to the gate bus line **12**.

[0290] Besides, in the lower part of the pixel area in the drawing, a drain electrode **36** of a TFT **20** of a lower adjacent pixel area is formed to protrude. From the same reason as the case of the third embodiment, the shape of the electrode unit **60b** (lowermost one in FIG. 46) corresponding to this area is formed into such a shape that a part of the rectangle is cut away in conformity with the shape of the drain electrode **36**. Specifically, while the shape of the outer periphery of the other electrode unit **60b** is a rectangle of 49 $\mu\text{m} \times 78 \mu\text{m}$, the shape of the outer periphery of the electrode unit **60** in this area is such a shape that a part of the rectangle is cut away so that it is spaced from the drain electrode **36** by 7 μm .

[0291] As stated above, the electrode unit **60a** constituting the pixel electrode **16** may be formed on the storage capacitor electrode **19** formed in the vicinity of the center of the pixel area.

[0292] Although the shape of the electrode unit **60a** formed on the storage capacitor electrode **19** is not limited to that shown in FIG. 46, it is preferable that the shape satisfies following conditions.

[0293] First, it is necessary that the electrode unit **60a** includes the solid part to cover all the area on the storage capacitor electrode **19**.

[0294] Besides, in the area where the storage capacitor electrode **19** is formed, the same conductive layer as the gate bus line **12** and the drain bus line **14** is formed in a laminate state through an insulating film. Thus, light can hardly pass through the area where the storage capacitor electrode **19** is

formed. Accordingly, it is necessary that the electrode unit **60a** includes a solid part also in an area other than the area on the storage capacitor electrode **19**.

Eighth Embodiment

[0295] A liquid crystal display device according to an eighth embodiment of the invention and a method of manufacturing the same will be described with reference to FIGS. 47 to 55C. Incidentally, structural elements similar to those of the liquid crystal display device according to the fifth embodiment are denoted by the same reference numerals and their description will be omitted or simplified.

[0296] First, the liquid crystal display device according to this embodiment will be described with reference to FIGS. 47 to 53B. **FIG. 47** is a plan view showing a structure of one pixel of the liquid crystal display device according to this embodiment, **FIG. 48A** is a sectional view taken along line A-A' of **FIG. 47**, **FIG. 48B** is a sectional view taken along line B-B', **FIG. 49** is a view showing an arrangement of a polarizing plate and the like of the liquid crystal display device according to this embodiment, **FIG. 50** is a plan view showing a structure of one pixel in a case where the number of reflecting electrode layers is changed in the liquid crystal display device according to this embodiment, **FIG. 51** is a plan view showing a structure of one pixel in a case where a reflecting electrode is formed in an area where a storage capacitor electrode is formed in the liquid crystal display device according to this embodiment, **FIGS. 52A and 52B** are graphs showing a relation between the opening rate of BM and the reflectivity in the liquid crystal display device according to this embodiment and a relation between the opening rate of BM and the transmissivity, and **FIGS. 53A and 53B** are graphs showing a relation between the areal ratio of a reflection area and the reflectivity in the liquid crystal display device according to this embodiment and a relation between the areal ratio of the reflection area and the transmissivity.

[0297] The liquid crystal display device according to this embodiment is the liquid crystal display device having functions of both the transmission type and the reflection type in which a reflecting electrode is further provided at the TFT substrate **2** side in the liquid crystal display device according to the fifth embodiment.

[0298] As shown in **FIG. 47**, a pixel electrode **16** similar to the liquid crystal display device according to the fifth embodiment is formed in a pixel area surrounded by a gate bus line **12** and a drain bus line **14**.

[0299] A TFT **20** is formed in the vicinity of an intersection position between the gate bus line **12** and the drain bus line **14** similarly to the liquid crystal display device of the fifth embodiment. Here, a drain electrode **36** and a source electrode **38** are made of a conductive film, for example, a lamination film of an aluminum film and a titanium film, and these are formed of the same conductive film. An area just under a channel protective film of the gate bus line **12** functions as a gate electrode of the TFT **20**.

[0300] Further, a reflecting electrode **55** having almost the same shape as a solid part **46** is formed under an electrode unit **60** to overlap with the solid part **46** through an insulating film. The width of the reflecting film **55** in the direction parallel to the gate bus line **12** is, for example, 60

μm . The width in the direction parallel to the drain bus line **14** is, for example, 25 μm . Incidentally, the reflecting electrode **55** has only to have the shape almost equal to or smaller than the solid part **46** of the electrode unit **60** formed thereon.

[0301] The electrode unit **60** and the reflecting electrode **55** are electrically connected to each other through a contact hole **28**. The contact hole **28** is formed in a rectangular area of 15 $\mu\text{m} \times 50 \mu\text{m}$ spaced inward from the outer periphery of the reflecting electrode **55** by, for example, 5 μm .

[0302] The reflecting electrode **55** is formed of, for example, the same conductive film as the source electrode **38**. Then, the reflecting electrode **55** (upper one in **FIG. 47**) in the vicinity of the TFT **20** is formed integrally with the source electrode **38**. By this, the pixel electrode **16** is electrically connected to the source electrode **38**.

[0303] **FIGS. 48A and 48B** show the sectional structure of the area where the electrode unit **60** and the reflecting electrode **55** are formed. As shown in the drawings, the reflecting electrode **55** made of a lamination film of, for example, an aluminum film **29** and a titanium film **31** is formed on an insulating film **22** formed on a glass substrate **10** on which the gate bus line **12** and the like are formed. An insulating film **25** is formed on the insulating film **22** and the reflecting electrode **55**. The contact hole **28** reaching the aluminum film **29** is formed in the insulating film **25** and the titanium film **31**. The electrode unit **60** is formed on the insulating film **25** in which the contact hole **28** is formed. The electrode unit **60** is formed so that the positions of the reflecting electrode **55** thereunder and the solid part **46** are aligned, and the center portion of the solid part **46** is electrically connected to the aluminum film **29** of the reflecting electrode **55** through the contact hole **28**. The electrode units **60** formed on the reflecting electrodes **55** in this way are electrically connected to each other by the connection electrode **64** as shown in **FIGS. 47 and 48B**.

[0304] **FIG. 49** shows the arrangement of the polarizing plate and the like of the liquid crystal display device according to this embodiment. As shown in the drawing, in the liquid crystal display device according to this embodiment, in addition to the arrangement of the polarizing plate of the liquid crystal display device according to the third embodiment shown in **FIG. 35**, an optical path control film **79** as an optical scattering layer is disposed on a polarizing plate **86** at the observation side. The optical path control film **79** is the film for scattering light in a specified direction.

[0305] In this way, the liquid crystal display device according to this embodiment is constructed.

[0306] Next, the operation of the liquid crystal display device according to this embodiment will be described.

[0307] In the state where a voltage is not applied between the pixel electrode **16** and the opposite electrode **42**, liquid crystal molecules are aligned almost vertically to the substrate surface.

[0308] First, in the case where outside light is incident on the pixel area in the state where a voltage is not applied between the pixel electrode **16** and the opposite electrode **42**, the light is reflected by the reflecting electrode **55** formed in the reflection area. With respect to the reflected light, since the liquid crystal molecules are vertically aligned, its polar-

ization state is not changed, and the light is absorbed by the polarizing plate **86** at the observer side. In this way, a black display is realized.

[0309] Next, in the case where a backlight is turned on in the state where a voltage is not applied between the pixel electrode **16** and the opposite electrode **42**, light from the backlight unit having been transmitted through the polarizing plate **87** formed on the back surface of the liquid crystal panel is transmitted through a transparent area where the reflecting electrode **55** is not formed. Here, with respect to the light from the backlight unit, since the liquid crystal molecules are vertically aligned, its polarization state is not changed, and the light is absorbed by the polarizing plate **86** at the observer side. In this way, a black display is realized.

[0310] On the other hand, when a voltage is applied between the pixel electrode **16** and the opposite electrode **42**, the liquid crystal molecules are obliquely aligned, cause birefringence as an optical effect, and change the polarization state of the light.

[0311] In the case where the outside light is incident on the pixel area in the state where the voltage is applied between the pixel electrode **16** and the opposite electrode **42**, with respect to the light reflected by the reflecting electrode, since its polarization state is changed, the light is transmitted through the polarizing plate **86** at the observer side. In this way, a display from gray to white is realized.

[0312] Here, in the liquid crystal display device according to this embodiment, the film for scattering the light incident at a predetermined angle is used for the optical path control film **79** as the optical scattering layer. By this optical path control film **79**, for example, incident light from the sun is scattered similarly to the liquid crystal display device disclosed in non-patent document 1, and the light reflected by the reflecting electrode **55** and reaching the observer can be used for the display. By this, even in the case of the light source such as the sun, the surface reflection is avoided, and the reflected light from the reflecting electrode **55** can be observed as the display.

[0313] Besides, in the case where the backlight is turned on in the state where the voltage is applied between the pixel electrode **16** and the opposite electrode **42**, also with respect to the incident light from the backlight unit, its polarization state is changed and the light is transmitted through the polarizing plate **86** at the observer side. In this way, a display of gray to white is realized.

[0314] Incidentally, in the case where the backlight is turned on in the transmission type, there is little influence on the display quality by the reflection of the outside light. This is because both the black display in the transmission type and the black display in the reflection type are realized at the time of voltage non-application, and at the time of the black display in the transmission type, there is no reflection from the outside light.

[0315] The liquid crystal display device according to this embodiment is characterized in that the reflecting electrode **55** is formed of the same conductive film as the source electrode **38** formed on the TFT substrate **2**. By this, since the reflecting electrode **55** can also be simultaneously formed in the step of forming the source electrode **38**, the liquid crystal display device having the functions of both the reflection type and the transmission type can be manufac-

tured without increasing the number of steps of the manufacture process of the transmission type liquid crystal display device.

[0316] Incidentally, in the case shown in FIG. 47, although the reflecting electrode **55** is provided under all the electrode units **60** in one pixel, the reflecting electrode **55** may not be provided under all the electrode units **60**. By changing the number of areas where the reflecting electrode **55** is provided and the areas, the reflectivity and transmissivity of the liquid crystal panel can be changed.

[0317] For example, as shown in FIG. 50, the reflecting electrode **55** is provided under the upper electrode unit **60** in the drawing with respect to the storage capacitor busline **18**, and the reflecting electrode **55** may not be provided under the lower electrode unit **60** in the drawing. In this case, as compared with the case where the reflecting electrode **55** is provided under all the electrode units **60** of one pixel as shown in FIG. 47, since the number of the reflecting electrodes **55** is halved, the transmissivity of the liquid crystal panel is increased, and the reflectivity is decreased.

[0318] In order to effectively use an area in one pixel and to reduce the waste of a reflection area and a transmission area, for example, it is effective to form the reflecting electrode **55** under conditions as set forth below.

[0319] First, it is necessary to electrically connect the source electrode **38** and the pixel electrode **16** without fail. Then, the reflecting electrode **55** is formed under the electrode unit **60** directly electrically connected to the source electrode **38**.

[0320] Besides, in the case where the storage capacitor electrode **19** is formed, the area where the storage capacitor electrode **19** is formed can not become the area through which light is transmitted. Thus, the reflecting electrode **55** is formed in the area where the storage capacitor electrode **19** is formed.

[0321] By forming the reflecting electrode **55** to satisfy such conditions, the area in one pixel can be effectively used.

[0322] FIG. 51 is a plan view showing the structure of one pixel in the case where the reflecting electrode **55** is formed in an area where the storage capacitor electrode **19** is formed. In this case, for example, the pixel electrode **16** is made the same as that of the liquid crystal display device according to the seventh embodiment in which the electrode unit **60a** is formed on the storage capacitor electrode **19**. The reflecting electrode **55** having almost the same shape as the solid part **46** is formed under this electrode unit **60a** to overlap with the solid part **46** through the insulating film. The electrode unit **60a** and the reflecting electrode **55** formed thereunder are electrically connected to each other through the contact hole **28**.

[0323] Besides, under the electrode unit **60b** in the vicinity of the upper TFT **20** in FIG. 51, the reflecting electrode **55** having almost the same shape as the solid part **46** is formed to overlap with the solid part **46** through the insulating film. The reflecting electrode **55** formed under the electrode unit **60b** in the vicinity of the TFT **20** is formed integrally with the source electrode **38**. The electrode unit **60b** in the vicinity of the TFT **20** and the reflecting electrode **55** formed thereunder are electrically connected to each other through the contact hole **28**, and by this, the electrode unit **60b** in the

vicinity of the TFT 20 and the source electrode 38 are electrically connected to each other.

[0324] The reflecting electrode 55 is not formed under the electrode unit 60b between the electrode unit 60b electrically connected to the source electrode 38 through the contact hole 28 and the electrode unit 60a on the storage capacitor electrode 19. Besides, in the drawing, the reflecting electrode 55 is not formed under two electrode units 60a below the storage capacitor electrode bus line 18.

[0325] As described above, by changing the number of areas where the reflecting electrode 55 is formed and the areas, the reflectivity and transmissivity of the liquid crystal panel can be changed. That is, desired reflectivity and transmissivity can be set by suitably setting, in the pixel area, the areal ratio of the reflection area where the reflecting electrode 55 is formed in the pixel area and the areal ratio of the transmission area where the reflecting electrode 55 is not formed.

[0326] For example, in the area of the opening part 98 of the BM for shading the end part of the pixel area, the relations of the areal ratio of the reflection area with respect to the transmissivity and the reflectivity become as indicated by graphs shown in FIGS. 52A and 52B. FIG. 52A is the graph showing the relation of the areal ratio of the reflection area with respect to the reflectivity, and FIG. 52B is the graph showing the relation of the areal ratio of the reflection area with respect to the transmissivity.

[0327] From the graphs shown in FIGS. 52A and 52B, it is understood that for example, in order to obtain the reflectivity of 5% or more and the transmissivity of 5% or more, the areal ratio of the reflection area in the area of the opening part 98 of the BM for shading the end part of the pixel area has only to be set in a range of 10 to 25%.

[0328] Besides, the relations of the areal ratio of the transmission area in the area of the opening part 98 of the BM for shading the end part of the pixel area with respect to the reflectivity and the transmissivity become as indicated by graphs shown in FIGS. 53A and 53B. FIG. 53A is the graph showing the relation of the areal ratio of the transmission area with respect to the reflectivity, and FIG. 53B is the graph showing the relation of the areal ratio of the transmission area with respect to the transmissivity.

[0329] From the graphs shown in FIGS. 53A and 53B, it is understood that for example, in order to obtain the reflectivity of 5% or more and the transmissivity of 5% or more, the areal ratio of the transmission area in the area of the opening part 98 of the BM for shading the end of the pixel area has only to be set in a range of 50 to 90%.

[0330] Next, a method of manufacturing the liquid crystal display device according to this embodiment will be described with reference to FIGS. 54A to 55C. FIGS. 54A to 55C are process sectional views showing the method of manufacturing the liquid crystal display device according to this embodiment, and correspond to the section in the direction along the drain bus line 14 of FIG. 47. Incidentally, in the following, a description will be given to the method up to the formation of the pixel electrode 16 on the glass substrate 10 of the TFT substrate 2.

[0331] First, similarly to the case of the third embodiment, a gate bus line 12 and a storage capacitor bus line 18 are formed on the glass substrate 10.

[0332] Next, an aluminum film 29 is formed by, for example, a sputter method through a not-shown insulating film on the glass substrate 10 on which the gate bus line 12 and the like are formed (see FIG. 54A).

[0333] Next, a titanium film 31 is formed on the aluminum film 29 by, for example, the sputtering method (see FIG. 54B).

[0334] Next, the titanium film 31 and the aluminum film 29 are patterned, so that a reflecting electrode 55 is formed (see FIG. 54C). At this time, a drain bus line 14, a drain electrode 36, a source electrode 38 and a storage capacitor electrode 19 are formed at the same time. In this way, the reflecting electrode 55 is formed of the same conductive film as the drain bus line 14, the drain electrode 36, the source electrode 38 and the storage capacitor electrode 19.

[0335] Next, an insulating film 25 made of a silicon oxide film is formed on the whole surface by, for example, a CVD method (see FIG. 54D).

[0336] Next, the insulating film 25 and the titanium film 31 are selectively etched, so that a contact hole 28 reaching the aluminum film 29 of the reflecting electrode 55 is formed (see FIG. 55A).

[0337] Next, a transparent conductive film 27 made of ITO is formed on the whole surface by, for example, the sputtering method (see FIG. 55B).

[0338] Next, the transparent conductive film 27 is patterned, so that an electrode unit 60, a connection electrode 64 and a contact area 67 are formed (see FIG. 55C). In this way, the pixel electrode 16 is formed on the glass substrate 10 of the TFT substrate 2.

[0339] Then, although not shown, a process similar to a manufacture process of a normal liquid crystal display device is performed subsequently to this, so that the liquid crystal display device according to this embodiment can be completed.

[0340] As stated above, according to this embodiment, since the reflecting electrode 55 can be formed at the same time in the process of forming the source electrode 38 and the like, the liquid crystal display device having the functions of both the reflection type and the transmission type can be manufactured without increasing the number of steps of the manufacture process of the transmission type liquid crystal display device.

Ninth Embodiment

[0341] A liquid crystal display device according to a ninth embodiment of the invention will be described with reference to FIGS. 56 to 57B. FIG. 56 is a plan view showing a structure of one pixel of the liquid crystal display device according to this embodiment, FIG. 57A is a sectional view taken along line A-A' of FIG. 56, and FIG. 57B is a sectional view taken along line B-B'. Incidentally, structural elements similar to those of the liquid crystal display device according to the eighth embodiment are denoted by the same reference numerals, and their description will be omitted or simplified.

[0342] In the liquid crystal display device according to the eighth embodiment, the electrode units 60 constituting the pixel electrode 16 are electrically connected to each other by the connection electrode 64 formed in the same layer as an electrode unit 60.

[0343] A main feature of the liquid crystal display device according to this embodiment is that a connection electrode 64 is not formed in the same layer as an electrode unit 60, and a connection electrode 57 is formed in the same layer as a reflecting electrode 55, and the reflecting electrodes 55 are electrically connected to each other. By this, the electrode units 60 electrically connected to the reflecting electrodes 55 through contact holes 28 are electrically connected to each other.

[0344] That is, as shown in FIG. 56, although the electrode unit 60 similar to that of the liquid crystal display device according to the eighth embodiment shown in FIG. 47 is formed in the pixel area, the connection electrode 64 for electrically connecting these is not formed.

[0345] On the other hand, as shown in FIGS. 57A and 57B, the reflecting electrode 55 made of a lamination film of an aluminum film 29 and a titanium film 31 is formed through an insulating film 25 under the electrode unit 60. The insulating film is made of, for example, acryl resin, and its thickness is 2 μm . The electrode unit 60 is electrically connected to the aluminum film 29 of the reflecting electrode 55 through the contact hole 28.

[0346] Further, as shown in FIG. 57B, the reflecting electrodes 55 are electrically connected to each other by the connection electrode 57 made of the same layer as the aluminum film 29 of the reflecting electrode 55. The insulating film 25 is formed on the connection electrode 57. In this way, the reflecting electrodes 55 are electrically connected to each other through the connection electrode 57, so that the electrode units 60 electrically connected to the reflecting electrodes 55 through the contact holes 28 are electrically connected to each other.

[0347] In the liquid crystal display device according to this embodiment, the connection electrode 57 for electrically connecting the electrode units 60 to each other is covered with the insulating film 25 made of a thick resin or the like, and is not exposed at the liquid crystal side. Thus, the movement of a singular point due to the existence of the connection electrode 57 is suppressed. Accordingly, even if the protruding structure 73 is not provided at the CF substrate 4 side like the liquid crystal display device according to the eighth embodiment, it becomes possible to stabilize the occurrence of the singular point. By this, a process of forming the protruding structure 73 on the CF substrate 4 side can be omitted, and the liquid crystal display device can be manufactured using the simpler manufacture process and at low cost.

Tenth Embodiment

[0348] A liquid crystal display device according to a tenth embodiment of the invention will be described with reference to FIG. 58. FIG. 58 is a sectional view of the liquid crystal display device according to this embodiment taken in a direction along a gate bus line. Incidentally, structural elements similar to those of the liquid crystal display device according to the eighth embodiment are denoted by the same reference numerals and their description will be omitted or simplified.

[0349] The basic structure of the liquid crystal display device according to this embodiment is almost the same as the liquid crystal display device according to the eighth

embodiment. A main feature of the liquid crystal display device according to this embodiment is that a bank-shaped structure having almost the same size as a reflecting electrode 55 is formed at a CF substrate 4 side and at almost the same position as the reflecting electrode 55 formed on a TFT substrate 2.

[0350] That is, as shown in FIG. 58, a bank-shaped structure 69 having almost the same size as the reflecting electrode 55 is formed on an opposite electrode 42 formed on a surface of the CF substrate 4 opposite to the TFT substrate 2 at almost the same position as the reflecting electrode 55. The width of the bank-shaped structure 69 in the direction parallel to the gate bus line 12 is, for example, 60 μm . Besides, the width in the direction parallel to the drain bus line 14 is, for example, 25 μm . The thickness of the bank-shaped structure 69 is almost half of a cell gap between the CF substrate 4 and the TFT substrate 2.

[0351] As stated above, in the liquid crystal display device according to this embodiment, the bank-shaped structure 69 having almost the same size as the reflecting electrode 55 is formed on the CF substrate 4 side at almost the same position as the reflecting electrode 55 formed on the TFT substrate 2. By this bank-shaped structure 69, similarly to the liquid crystal display device according to the eighth embodiment in which the protruding structure 73 is formed.

[0352] Further, in the liquid crystal display device according to this embodiment, by the bank-shaped structure 69, the thickness of the liquid crystal layer in the reflection area is almost half of that in the other area. Thus, when light incident on the reflection area where the reflecting electrode 55 is formed is incident from the observer side, is reflected by the reflecting electrode 55, and is emitted toward the observer side, the light is transmitted through the liquid crystal having almost the same thickness as the liquid crystal through which light from a backlight unit is transmitted in a transmission area where the reflecting electrode 55 is not formed. By this, coloring in the reflection area can be reduced.

MODIFIED EXAMPLE

[0353] A liquid crystal display device according to a modified example of the tenth embodiment of the invention will be described with reference to FIG. 59. FIG. 59 is a sectional view of the liquid crystal display device according to this modified example taken in a direction along a gate bus line.

[0354] In the liquid crystal display device according to this modified example, a protruding structure 73 is further provided on a bank-shaped structure 69. The protruding structure 73 in the liquid crystal display device according to this modified example is similar to the protruding structure 73 in the liquid crystal display device according to the fifth embodiment, and is formed on the bank-shaped structure 69 so that it is positioned almost at the center of the electrode unit 60.

[0355] As stated above, also by providing the bank-shaped structure 69 and the protruding structure 73 on the CF substrate 4 side, and coloring in the reflection area can be reduced.

Eleventh Embodiment

[0356] A liquid crystal display device according to an eleventh embodiment of the invention and a method of

manufacturing the same will be described with reference to FIGS. 60 to 63C. Incidentally, structural elements similar to those of the liquid crystal display device according to the eighth embodiment are denoted by the same reference numerals and their description will be omitted or simplified.

[0357] First, the liquid crystal display device according to this embodiment will be described with reference to FIG. 60. FIG. 60 is a sectional view of the liquid crystal display device according to this embodiment taken in a direction along a gate bus line.

[0358] The basic structure of the liquid crystal display device according to this embodiment is almost the same as the liquid crystal display device according to the eighth embodiment. In the liquid crystal display device according to this embodiment, a bank-shaped structure 65 having almost the same size as a reflecting electrode 55 and having a plane shape is formed under the reflecting electrode 55. That is, a main feature is that the reflecting electrode 55 and an electrode unit 60 are formed on an upper surface and a side surface of the bank-shaped structure 65 formed at a TFT substrate 2 side.

[0359] As shown in FIG. 60, the bank-shaped structure 65 is formed on an insulating film 22 formed on a glass substrate 10 on which a gate bus line 12 and the like are formed. The reflecting electrode 55 made of a lamination film of an aluminum film 29 and a titanium film 31 is formed in an area including the upper surface and the side surface of the bank-shaped structure 65. The electrode unit 60 is formed on the reflecting electrode 55 through an insulating film 25. The electrode unit 60 is electrically connected to the aluminum film 29 of the reflecting electrode 55 through a contact hole 28 at the upper surface of the bank-shaped structure 65.

[0360] As stated above, in the liquid crystal display device according to this embodiment, the bank-shaped structure 65 having almost the same size as the reflecting electrode 55 is formed under the reflecting electrode 55. By this bank-shaped structure 65, similarly to the liquid crystal display device according to the tenth embodiment in which the bank-shaped structure 69 is formed at the CF substrate 4 side.

[0361] Further, in the liquid crystal display device according to this embodiment, similarly to the liquid crystal display device according to the tenth embodiment, since the thickness of the liquid crystal layer in the reflection area where the reflecting electrode 55 is formed, is almost half of that in the other area by the bank-shaped structure 65, coloring in the reflection area can be reduced.

[0362] Next, a method of manufacturing the liquid crystal display device according to this embodiment will be described with reference to FIGS. 61A to 63C. FIGS. 61A to 63C are process sectional views showing the method of manufacturing the liquid crystal display device according to this embodiment. Incidentally, in the following, a description will be given to the method up to the formation of the pixel electrode 16 on the glass substrate 10 of the TFT substrate 2.

[0363] First, similarly to the case of the third embodiment, a gate bus line 12 and a storage capacitor bus line 18 are formed on the glass substrate 10.

[0364] Next, a resin layer 32 made of acryl resin, novolac resin or the like is formed on the glass substrate 10 on which the gate bus line 12 and the like are formed through a not-shown insulating film (see FIG. 61A).

[0365] Next, the resin layer 32 is patterned, so that a bank-shaped structure 65 is formed (see FIG. 61B).

[0366] Next, an aluminum film 29 is formed on the whole surface by, for example, a sputtering method (see FIG. 61C).

[0367] Next, a titanium film 31 is formed on the aluminum film 29 by, for example, the sputtering method (see FIG. 62A).

[0368] Next, the titanium film 31 and the aluminum film 29 are patterned, so that a reflecting electrode 55 is formed on an upper surface and a side surface of the bank-shaped structure 65 (see FIG. 62B). At this time, a drain bus line 14, a drain electrode 36, a source electrode 38 and a storage capacitor electrode 19 are formed at the same time. In this way, the reflecting electrode 55 is formed of the same conductive film as the drain bus line 14, the drain electrode 36, the source electrode 38 and the storage capacitor electrode 19.

[0369] Next, an insulating film 25 made of a silicon oxide film is formed on the whole surface by, for example, a CVD method (see FIG. 62C).

[0370] Next, the insulating film 25 and the titanium film 31 are selectively etched, so that a contact hole 28 reaching the aluminum film 29 of the reflecting electrode 55 is formed (see FIG. 63A).

[0371] Next, a transparent conductive film 27 made of ITO is formed on the whole surface by, for example, the sputtering method (see FIG. 63B).

[0372] Next, the transparent conductive film 27 is patterned, so that an electrode unit 60, a connection electrode 64 and a contact area 67 are formed (see FIG. 63C). In this way, the pixel electrode 16 is formed on the glass substrate 10 of the TFT substrate 2.

[0373] Then, although not shown, subsequently to this, a similar process to a manufacture process of a normal liquid crystal display device is performed, so that the liquid crystal display device according to this embodiment can be completed.

MODIFIED EXAMPLE

[0374] A liquid crystal display device according to a modified example of the eleventh embodiment of the invention will be described with reference to FIG. 64. FIG. 64 is a sectional view of the liquid crystal display device according to this modified example taken in a direction along a gate bus line.

[0375] In the liquid crystal display device according to this modified example, as shown in FIG. 64, similarly to the liquid crystal display device according to the fifth embodiment, a protruding structure 73 is provided on an opposite electrode 42 formed on a surface of a CF substrate 4 opposite to a TFT substrate 2.

Twelfth Embodiment

[0376] A liquid crystal display device according to a twelfth embodiment of the invention and a method of

manufacturing the same will be described with reference to FIGS. 65 to 68C. Incidentally, structural elements similar to those of the liquid crystal display device according to the eighth embodiment are denoted by the same reference numerals and their description will be omitted or simplified.

[0377] First, the liquid crystal display device according to this embodiment will be described with reference to FIGS. 65 and 66. FIG. 65 is a plan view showing a structure of one pixel of the liquid crystal display device according to this embodiment, and FIG. 66 is a sectional view taken along line B-B' of FIG. 65.

[0378] The basic structure of the liquid crystal display device according to this embodiment is almost the same as the liquid crystal display device according to the eighth embodiment except for an area where reflecting electrodes 55 are formed.

[0379] In the liquid crystal display device according to this embodiment, as shown in FIG. 65, the reflecting electrodes 55 are formed in an area where a slit 62 between electrode units 60 is formed. Similarly to the liquid crystal display device according to the eighth embodiment, the reflecting electrodes 55 are made of the same conductive film as a source electrode 38.

[0380] The width of the reflecting electrode 55 is slightly smaller than the width of the slit 62 so that the electrode unit 60 does not overlap with the reflecting electrode 55 preferably. For example, the width of the slit 62 is 8 μm , and the width of the reflecting electrode 55 is 6 μm .

[0381] On the other hand, the reflecting electrode 55 is not formed under a connection electrode 64 formed in the same layer as the electrode unit 60 and for electrically connecting the electrode units 60.

[0382] As shown in FIG. 66, the reflecting electrodes 55 are formed on an insulating film 22 formed on a glass substrate 10 on which a gate bus line 12 and the like are formed. An insulating film 25 is formed on the reflecting electrodes 55 and the insulating film 22, and the electrode unit 60 is formed on the insulating film 25.

[0383] The reflecting electrodes 55 in the area where the slit 62 is formed are electrically separated from each other, and are in an electrically floating state.

[0384] A main feature of the liquid crystal display device according to this embodiment is that the reflecting electrodes 55 are formed in the area where the slit 62 between the electrode units 60 is formed, and the reflecting electrodes 55 are not electrically connected to each other, but are in the floating state where they are electrically separated.

[0385] By forming the reflecting electrodes 55 as stated above, differently from an applied voltage in a transmission area where the electrode unit 60 is formed, an effective voltage applied to liquid crystal molecules on the reflecting electrodes 55 is caused from only electric field around the electrode unit 60. Thus, the voltage applied to the liquid crystal molecules on the reflecting electrodes 55 becomes low. Accordingly, the optical effect due to the liquid crystal is suppressed in the reflection area, and even in the case where the thickness of the liquid crystal layer in the reflection area is made the same as the thickness in the transmission area, coloring in the reflection area can be reduced.

[0386] Next, a method of manufacturing the liquid crystal display device according to this embodiment will be described with reference to FIGS. 67A to 68C. FIGS. 67A to 68C are process sectional views showing the method of manufacturing the liquid crystal display device according to this embodiment, and correspond to the section in the direction along the drain bus line 14 of FIG. 65. Incidentally, in the following, a description will be given to the method up to the formation of the pixel electrode 16 on the glass substrate 10 of the TFT substrate 2.

[0387] First, similarly to the case of the third embodiment, a gate bus line 12 and a storage capacitor bus line 18 are formed on the glass substrate 10.

[0388] Next, an aluminum film 29 is formed on the glass substrate 10 on which the gate bus line 12 and the like are formed through a not-shown insulating film by, for example, a sputtering method (see FIG. 67A).

[0389] Next, a titanium film 31 is formed on the aluminum film 29 by, for example, the sputtering method (see FIG. 67B).

[0390] Next, the titanium film 31 and the aluminum film 29 are patterned, so that a reflecting electrode 55 is formed (see FIG. 67C). At this time, a drain bus line 14, a drain electrode 36, a source electrode 38 and a storage capacitor electrode 19 are formed at the same time. In this way, the reflecting electrode 55 is formed of the same conductive film as the drain bus line 14, the drain electrode 36, the source electrode 38 and the storage capacitor electrode 19.

[0391] Next, an insulating film 25 made of a silicon oxide film is formed on the whole surface by, for example, a CVD method (see FIG. 67D).

[0392] Next, the insulating film 25 and the titanium film 31 are patterned so that an opening part 33 reaching the aluminum film 29 of the reflecting electrode 55 is formed (see FIG. 68A).

[0393] Next, a transparent conductive film 27 made of ITO is formed on the whole surface by, for example, the sputtering method (see FIG. 68B).

[0394] Next, the transparent conductive film 27 is patterned, so that an electrode unit 60, a connection electrode 64 and a contact area 67 are formed (see FIG. 68C). In this way, the pixel electrode 16 is formed on the glass substrate 10 of the TFT substrate 2.

[0395] Although not shown, subsequently to this, a process similar to a manufacture process of a normal liquid crystal display device is performed so that the liquid crystal display device according to this embodiment can be completed.

Thirteenth Embodiment

[0396] A liquid crystal display device according to a thirteenth embodiment of the invention will be described with reference to FIGS. 69 and 70. FIG. 69 is a plan view showing a structure of one pixel of the liquid crystal display device according to this embodiment, and FIG. 70 is a sectional view taken along line A-A' of FIG. 69. Incidentally, structural elements similar to those of the liquid crystal display device according to the third and the eighth embodi-

ments are denoted by the same reference numerals, and their description will be omitted or simplified.

[0397] The liquid crystal display device according to this embodiment includes a pixel electrode 16 similar to the liquid crystal display device according to the third embodiment, and a reflecting electrode 55 is formed in an area where a slit 62 is formed between electrode units 60 constituting the pixel electrode 16 similarly to the liquid crystal display device according to the twelfth embodiment.

[0398] That is, as shown in FIGS. 69 and 70, the reflecting electrode 55 is formed in the area where the slit 62 between the plurality of electrode units 60 disposed in the direction parallel to a gate bus line 12 and the direction parallel to a drain bus line 14 is formed.

[0399] In the liquid crystal display device according to this embodiment, as compared with the liquid crystal display device according to the twelfth embodiment, since the area of the slit 62 formed between the electrode units 60 is large, the square measure of the reflecting electrode 55 is also large.

Fourteenth Embodiment

[0400] A liquid crystal display device according to a fourteenth embodiment of the invention will be described with reference to FIGS. 71 and 72. FIG. 71 is a plan view showing a structure of one pixel of the liquid crystal display device according to this embodiment, and FIG. 72 is a sectional view taken along line A-A' of FIG. 71. Incidentally, structural elements similar to those of the liquid crystal display device according to the twelfth embodiment are denoted by the same reference numerals and their description will be omitted or simplified.

[0401] The basic structure of the liquid crystal display device according to this embodiment is almost the same as the liquid crystal display device according to the twelfth embodiment. In the liquid crystal display device according to this embodiment, as shown in FIG. 71, as compared with the liquid crystal display device according to the twelfth embodiment, an electrode unit 60 is formed to be small. For example, the width of the outer periphery of the electrode unit 60 in the direction parallel to the gate bus line 12 is, for example, 66 μm . Besides, the width in the direction parallel to the drain bus line 14 is, for example, 33 μm .

[0402] Since the electrode unit 60 is formed to be small as stated above, the electrode unit 60 is not formed in an area 99 having a predetermined width from a side, parallel to a drain bus line 14, of an opening part 98 of a BM for shading an end part of a pixel area. For example, the electrode unit 60 is not formed in the area 99 having a width of 6 μm from the side, parallel to the drain bus line 14, of the opening part 98 of the BM.

[0403] As shown in FIGS. 71 and 72, in the liquid crystal display device according to this embodiment, the reflecting electrode 55 is formed in not only the area where the slit 62 between the electrode units 60 is formed, but also the area 99 having the predetermined width from the side, parallel to the drain bus line 14, of the opening part 98 of the BM, where the electrode unit 60 is not formed.

[0404] As stated above, also by forming the reflecting electrode 55 in the area around the electrode unit 60,

similarly to the liquid crystal display device according to the twelfth embodiment, the effective voltage applied to the liquid crystal molecules on the reflecting electrode 55 is caused by only the electric field around the electrode unit 60. Thus, the voltage applied to the liquid crystal molecules on the reflecting electrode 55 becomes small. By this, the optical effect due to the liquid crystal is suppressed in the reflection area, and coloring in the reflection area can be reduced.

[0405] As described above, according to the third to the fourteenth embodiments, the pixel electrode 16 includes the plurality of electrode units 60 disposed through the slit and electrically connected to each other, and each of the electrode units 60 includes the solid part 46 and the plurality of extension parts extending in the outer peripheral direction of the electrode unit 60 from the solid part 46, so that the occurrence of brightness difference due to the variation of width of the extension parts is suppressed, the uneven display can be reduced, and the excellent display quality can be obtained.

[0406] Besides, according to the eighth to the fourteenth embodiments, since the reflecting electrode 55 is formed by patterning the same conductive film as the bus lines 12, 14 and 18 formed on the substrate or the electrode of the TFT 20, the liquid crystal display device having the functions of both the reflection type and the transmission type can be manufactured at low cost without increasing the number of steps of the manufacture process of the transmission type liquid crystal display device.

[0407] Besides, according to the tenth and the eleventh embodiments, in the reflection area where the reflecting electrode 55 is formed, since the thickness of the liquid crystal layer is thinner than that in the other area, coloring in the reflection area can be reduced.

MODIFIED EMBODIMENT

[0408] The invention is not limited to the above embodiments, but can be variously modified.

[0409] For example, in the above embodiments, although the description has been given to the case where the end parts of the respective branch parts 49 of the electrode unit 60 are formed almost in parallel with or vertically to the gate bus line 12 and the drain bus line 14, and the outer periphery of the electrode unit 60 is almost square or rectangular, the shape of the end parts of the respective branch parts 49 are not limited to these. For example, as shown in FIG. 73A, the end part of the branch part 49 may be formed to be vertical to the extension direction. Besides, as shown in FIG. 73B, the branch part 49 may be made to have such a shape that the width becomes gradually thin from the root part connected to the solid part 46 or the stem part 48 to the tip part.

[0410] Besides, in the above embodiments, although the description has been given to the case where the branch part 49 extends obliquely so that the angle between the stem part 48 and the branch part 49, in other words, the angle between the side of the outer periphery of the electrode unit 60 and the branch part 49 becomes 45°, the extension direction of the branch part 49 is not limited to the case as stated above. The extension direction of the branch part 49 has only to have an angle of 0 to 90° with respect to one side of the outer periphery of the electrode unit 60. Similarly, although the

description has been given to the case where the side of the outer periphery of the electrode unit **60** and the stempart **48** is 90°, the extension direction of the stem part **48** has only to have an angle of 0 to 90° with respect to one side of the outer periphery of the electrode unit **60**. That is, the extension direction of the comb electrode **53** has only to have an angle of 0 to 90° with respect to one side of the outer periphery of the electrode unit **60**.

[0411] Besides, in the above embodiments, although the description has been given to the case where the electrode units **60** having almost the same shape are disposed in the pixel area, a plurality of electrode units **60** different from each other in shape may be combined and disposed.

[0412] Besides, in the above embodiments, although the description has been given to the case of the electrode unit **60** having the square or rectangular outer periphery, the shape of the outer periphery of the electrode unit **60** is not limited to these. For example, the shape of the outer periphery of the electrode unit **60** may be a convex polygon, and at this time, the solid part **46** may have the side almost parallel to the side of the outer periphery of the electrode unit **60**.

[0413] Besides, in the above embodiments, although the description has been given to the case where the number of the electrode units **60** in one pixel is 12, 6 or 5, the number of the electrode units **60** in one pixel is not limited to these. A predetermined number of electrode units **60** can be suitably formed in accordance with the size of the pixel area.

[0414] Besides, in the above embodiment, although the description has been given to the case where the pixel electrode **16** is made the transparent electrode made of ITO, the material of the pixel electrode **16** is not limited to ITO. Besides, in the third to the seventh embodiments, the pixel electrode **16** may be formed of a conductive film having optical reflectivity such as aluminum, and the reflection type liquid crystal display device may be constructed.

[0415] Besides, in the above embodiments, although the description has been given to the case where the TFT **20** is formed as an active element for driving the liquid crystal layer **6**, the active element is not limited to the TFT **20**. For example, an MIM (Metal Insulator Metal) transistor or the like may be used as the active element. Here, in the case where the reflecting electrode **55** is formed as in the case of the eighth to the fourteenth embodiments, the reflecting electrode **55** may be formed by the same conductive film as the electrode of the active element.

[0416] Besides, in the above embodiments, although the description has been given to the liquid crystal display device where the CF is formed on the CF substrate **4** disposed to be opposite to the TFT substrate **2**, the invention is not limited to this, but can be applied to a so-called CF-on-TFT structure liquid crystal display device in which the CF is formed on the TFT substrate **2**.

[0417] Besides, in the eighth to the fourteenth embodiments, although the description has been given to the case where the reflecting electrode **55** is formed of the same conductive film as the source electrode **38** or the like, the conductive film forming the reflecting electrode **55** is not limited to this. The reflecting electrode **55** may be formed of the same conductive film as any one of the gate bus line **12**, the drain bus line **14**, the drain electrode **36** of the TFT **20**

and the source electrode **38** thereof. Besides, the reflecting electrode **55** may be formed of a conductive film different from these.

[0418] Besides, in the eighth to the fourteenth embodiments, although the description has been given to the case where the shape of the electrode unit **60** is similar to that of any one of the liquid crystal display devices according to the third to the seventh embodiments, the shape of the electrode unit **60** is not limited to these.

[0419] Besides, in the tenth and the eleventh embodiments, by providing the bank-shaped structures **69** and **65**, in the reflection area where the reflecting electrode **55** is formed, the thickness of the liquid crystal layer is made thinner than that in the other area, however, the shape of the structure for thinning the liquid crystal layer is not limited to the bank shape.

[0420] As described above, according to the present invention, it is possible to realize the liquid crystal display device which can obtain excellent display characteristics without raising manufacture cost.

What is claimed is:

1. A liquid crystal display device, comprising:
a pair of substrates disposed to be opposite to each other;
a liquid crystal sealed between the pair of substrates and aligned almost vertically to the substrate when a voltage is not applied;
a pair of quarter-wave plates respectively disposed at outer sides of the pair of substrates;
a pair of polarizing plates respectively disposed at outer sides of the pair of quarter-wave plates; and
a pixel area including a reflection area provided with a reflecting plate having a reflecting surface and for reflecting light incident from one of the pair of substrates, and a transmission area for causing light incident from the other of the pair of substrates to be transmitted toward the one of the pair of substrates.
2. A liquid crystal display device according to claim 1, further comprising an optical scattering layer disposed at an outer side of the one of the pair of substrates.
3. A liquid crystal display device according to claim 2, wherein the optical scattering layer scatters only light incident at an incident angle in a specified range.
4. A liquid crystal display device according to claim 1, wherein the reflecting plate is formed of a same formation material as an electrode of a thin film transistor formed in the pixel area.
5. A liquid crystal display device according to claim 1, wherein the reflecting plate is one electrode of a storage capacitor or source/drain formed in the pixel area.
6. A liquid crystal display device according to claim 1, wherein the reflecting plate is disposed to overlap with a pixel electrode formed in the pixel area when viewed in a direction vertical to a substrate surface.
7. A liquid crystal display device according to claim 6, wherein the reflecting plate is electrically connected to the pixel electrode.
8. A liquid crystal display device according to claim 6, wherein the reflecting plate is electrically separated from the pixel electrode.

9. A liquid crystal display device according to claim 1, wherein the reflecting plate is disposed not to overlap with a pixel electrode formed in the pixel area when viewed in a direction vertical to a substrate surface.

10. A liquid crystal display device according to claim 1, wherein at least a part of the reflecting surface is formed of aluminum.

11. A liquid crystal display device according to claim 10, wherein the reflecting plate includes a conductive layer made of a material other than aluminum, and an aluminum layer which is formed as an under layer of the conductive layer and whose surface is exposed in an area where the conductive and/or the insulating layer is removed.

12. A liquid crystal display device according to claim 11, wherein a transparent electrode is formed to cover the aluminum layer.

13. A liquid crystal display device according to claim 11, wherein the conductive layer is a titanium layer.

14. A method of manufacturing a liquid crystal display device, comprising the steps of:

forming an aluminum layer and a conductive layer made of a material other than aluminum in this order;

patternning the conductive layer and the aluminum layer;

forming an insulating layer on the patterned conductive layer; and

removing the insulating layer on the conductive layer to form an opening part, removing the conductive layer exposed through the opening part to expose the aluminum layer, and forming a reflecting surface of a reflecting plate.

15. A method of manufacturing a liquid crystal display device according to claim 14, further comprising a step of forming a transparent electrode covering the aluminum layer.

16. A liquid crystal display device comprising:

a pair of substrates disposed to be opposite to each other;

a liquid crystal sealed between the pair of substrates and having a negative dielectric anisotropy;

a pixel electrode formed in each of pixel areas of one of the pair of substrates;

an alignment controlling structure which is disposed on at least one of the pair of substrates and whose plane shape includes a straight line; and

a reflecting film selectively formed on the alignment controlling structure including an inclined surface of the alignment controlling structure.

17. A liquid crystal display device according to claim 16, wherein the alignment controlling structure is a protrusion.

18. A liquid crystal display device according to claim 17, wherein the alignment controlling structure is a hollow.

19. A liquid crystal display device according to claim 18, further comprising a second alignment controlling structure disposed to be opposite to the hollow through the liquid crystal.

20. A liquid crystal display device according to claim 16, an average inclined angle of the inclined surface is approximately not less than 0° and less than 20°.

21. A liquid crystal display device according to claim 16, further comprising a third alignment controlling structure formed in a gap portion of the adjacent alignment controlling structures.

22. A liquid crystal display device according to claim 16, further comprising a slit in which a part of the reflecting film is removed.

23. A liquid crystal display device comprising:

a pair of substrates disposed to be opposite to each other; a liquid crystal sealed between the pair of substrates and having a negative dielectric anisotropy;

a pixel electrode formed in each of pixel areas of one of the pair of substrates;

an alignment controlling structure which is disposed on at least one of the pair of substrates and whose plane shape includes a straight line; and

a reflecting film selectively formed as an under layer of the alignment controlling structure.

24. A liquid crystal display device according to claim 23, wherein the alignment controlling structure is a protrusion.

25. A liquid crystal display device according to claim 24, wherein the protrusion has a convex sectional shape and is formed of a transparent material having a refractive index larger than the liquid crystal.

26. A liquid crystal display device according to any one of claims 16 to 25, wherein the alignment controlling structure extends almost in parallel with, almost vertically to or at an angle of approximately 45° with respect to an end side of the pixel electrode.

27. A liquid crystal display device according to claim 16, wherein the reflecting film is electrically separated from the pixel electrode.

28. A liquid crystal display device according to claim 16, wherein the reflecting film is electrically connected to the pixel electrode.

29. A liquid crystal display device comprising:

a first substrate including a plurality of gate bus lines disposed almost in parallel with each other, a plurality of drain bus lines disposed almost in parallel with each other to intersect with the gate bus lines, a plurality of switching elements respectively provided at intersection parts of the gate bus lines and the drain bus lines, and a plurality of pixel electrodes formed and connected to the plurality of switching elements, respectively;

a second substrate provided to be opposite to the first substrate and having an opposite electrode opposite to the plurality of pixel electrodes; and

a liquid crystal layer sealed between the first substrate and the second substrate and having a negative dielectric anisotropy,

wherein each of the pixel electrodes includes a plurality of electrode units disposed through a slit and electrically connected to each other, and

each of the electrode units includes a solid part and a plurality of extension parts extending from the solid part toward an outer peripheral direction of the electrode unit.

30. A liquid crystal display device according to claim 29, wherein the plurality of electrode unit are formed of a same conductive film.

31. A liquid crystal display device according to claim 29, wherein a ratio of a square measure of the solid part to a square measure of an area within an outer periphery of the electrode unit is 50% or more.

32. A liquid crystal display device according to claim 29, wherein at least part of the plurality of extension parts are almost parallel to each other.

33. A liquid crystal display device according to claim 29, wherein the plurality of extension parts extend radially from a starting point of a center part of the electrode unit to an outer periphery of the electrode unit.

34. A liquid crystal display device according to claim 29, wherein an extension direction of the extension part has an angle of 0 to 90° with respect to one side of an outer periphery of the electrode unit.

35. A liquid crystal display device according to claim 29, wherein the solid part is positioned almost at a center of the electrode unit.

36. A liquid crystal display device according to claim 35, wherein a shape of the solid part is a convex polygon.

37. A liquid crystal display device according to claim 36, wherein

the electrode unit includes a convex polygonal outer periphery, and

the solid part includes a side almost parallel to a side of the outer periphery of the electrode unit.

38. A liquid crystal display device according to claim 29, wherein

the solid part is continuously formed between two opposite sides of an outer periphery of the electrode unit, and

the plurality of extension parts are formed in an area at a side of an outer periphery of the electrode unit where the solid part is not formed.

39. A liquid crystal display device according to claim 38, wherein in a facing direction of the two opposite sides is almost parallel to the gate bus lines or the drain bus lines.

40. A liquid crystal display device according to claim 29, wherein

the plurality of extension parts are formed in area at one side of an outer periphery of the electrode unit, and

the solid part is formed in an area where the plurality of extension parts of the electrode unit are not formed.

41. A liquid crystal display device according to claim 40, wherein the plurality of extension parts are formed in an area at a side of an outer periphery of the electrode unit opposite to the gate bus lines or the drain bus lines.

42. A liquid crystal display device according to claim 29, wherein four areas are defined in the electrode unit, the plurality of extension parts are formed in at least one of the four areas, and the solid part is formed in the other areas.

43. A liquid crystal display device according to claim 42, wherein the plurality of extension parts are formed in one pair of areas positioned diagonally among the four areas, and the solid part is formed in the other pair of areas positioned diagonally.

44. A liquid crystal display device according to claim 29, wherein in the electrode unit, four areas are defined by

diagonal lines of an outer periphery of the electrode unit, the plurality of extension parts are disposed in at least one of the four areas, and the solid part is formed in the other areas.

45. A liquid crystal display device according to claim 44, wherein the plurality of extension parts are formed in one pair of areas positioned diagonally among the four areas, the solid part is formed in the other pair of areas positioned diagonally, and the one pair of areas are areas including a side of the outer periphery of the electrode unit at a side of the drain bus line.

46. A liquid crystal display device according to claim 29, wherein the extension parts are formed in an area extending inward from an outer periphery of the electrode unit by 5 μm or more.

47. A liquid crystal display device comprising:

a first substrate including a plurality of gate bus lines disposed almost in parallel with each other, a plurality of drain bus lines disposed almost in parallel with each other to intersect with the gate bus lines, a plurality of switching elements respectively provided at intersection parts of the gate bus lines and the drain bus lines, and a plurality of pixel electrodes respectively formed and connected to the plurality of switching elements, respectively;

a second substrate provided to be opposite to the first substrate and having an opposite electrode opposite to the plurality of pixel electrodes; and

a liquid crystal layer sealed between the first substrate and the second substrate and having a negative dielectric anisotropy,

wherein each of the pixel electrodes includes a plurality of electrode units disposed through a slit, including solid parts, and electrically connected to each other, and

the first substrate further includes reflecting layer formed under areas where the solid parts of all of or part of the plurality of electrode units are formed.

48. A liquid crystal display device according to claim 47, wherein each of the electrode units includes a plurality of extension parts extending from the solid part toward an outer peripheral direction of the electrode unit.

49. A liquid crystal display device according to claim 47, wherein the reflecting layer has a shape almost equal to or smaller than the solid part of the electrode unit formed thereon.

50. A liquid crystal display device according to claim 47, wherein

a ratio of a transmission area where the reflecting layer is not formed in the pixel area is in a range of 50 to 90% with respect to an opening part of a light shielding layer covering an end part of the pixel area, and

a ratio of a reflection area where the reflecting electrode is formed in the pixel area is in a range of 10 to 25% with respect to the opening part of the light shielding layer.

51. A liquid crystal display device according to claim 47, wherein one electrode unit of the plurality of electrode units is electrically connected to a source electrode of the thin film transistor through the reflecting layer formed under the solid part.

52. A liquid crystal display device according to claim 51, wherein the reflecting layer formed under the solid part of

the one electrode unit and the source electrode of the thin film transistor are integrally formed.

53. A liquid crystal display device according to claim 47, further comprising a storage capacitor bus line disposed almost in parallel with the gate bus line and a storage capacitor electrode formed on the storage capacitor bus line through an insulating film,

wherein the reflecting electrode is formed under the solid part of the electrode unit formed on the storage capacitor electrode.

54. A liquid crystal display device comprising:

a first substrate including a plurality of gate bus lines disposed almost in parallel with each other, a plurality of drain bus lines disposed almost in parallel with each other to intersect with the gate bus lines, a plurality of switching elements respectively provided at intersection parts of the gate bus lines and the drain bus lines, a plurality of pixel electrodes formed and connected to the plurality of switching elements, respectively, and reflecting electrodes partially formed under areas where the plurality of pixel electrodes are formed;

a second substrate provided to be opposite to the first substrate and having an opposite electrode opposite to the plurality of pixel electrodes; and

a liquid crystal layer sealed between the first substrate and the second substrate and having a negative dielectric anisotropy,

wherein in reflection areas where the reflecting layers are formed, a thickness of the liquid crystal layer is thinner than that in other areas.

55. A liquid crystal display device according to claim 54, wherein

each of the pixel electrodes includes a plurality of electrode units disposed through a slit, including solid parts, and electrically connected to each other, and

the reflecting layers are formed through an insulating film under areas where the solid parts of all of or part of the plurality of electrode units are formed.

56. A liquid crystal display device according to claim 54, further comprising structures formed on a surface of the second substrate opposite to the first substrate and in areas above the reflecting layers,

wherein in reflection areas where the reflecting layers are formed, a thickness of the liquid crystal layer is thinner than that in other areas by the structures.

57. A liquid crystal display device according to claim 56, wherein the structures are formed on the opposite electrode.

58. A liquid crystal display device according to claim 56, further comprising protrusions formed on the structures.

59. A liquid crystal display device according to claim 54, further comprising a structure which is formed on the first substrate and on an upper surface and a side surface of which the reflecting electrode is formed,

wherein in a reflection area where the reflecting layer is formed, a thickness of the liquid crystal layer is thinner than that in another area by the structure.

60. A liquid crystal display device comprising:

a first substrate including a plurality of gate bus lines disposed almost in parallel with each other, a plurality

of drain bus lines disposed almost in parallel with each other to intersect with the gate bus lines, a plurality of switching elements respectively provided at intersection parts of the gate bus lines and the drain bus lines, and a plurality of pixel electrodes formed and connected to the plurality of switching elements, respectively;

a second substrate provided to be opposite to the first substrate and having an opposite electrode opposite to the plurality of pixel electrodes; and

a liquid crystal layer sealed between the first substrate and the second substrate and having a negative dielectric anisotropy,

wherein each of the pixel electrodes includes a plurality of electrode units disposed through a slit, including solid parts, and electrically connected to each other, and

the first substrate further includes a reflecting layer formed under an area where the electrode unit of each of the pixel areas is not formed.

61. A liquid crystal display device according to claim 60, wherein each of the electrode units includes a plurality of extension parts extending from the solid part toward an outer peripheral direction of the electrode unit.

62. A liquid crystal display device according to claim 60, wherein the reflecting layer is formed under an area where the slit is formed.

63. A liquid crystal display device according to claim 62, wherein the reflecting layer formed in an area where the slit is formed are electrically separated from each other.

64. A liquid crystal display device according to claim 60, wherein

each of the pixel electrodes is formed to have a width narrower than an opening part of a light shielding layer for shading an end part of each of the pixel areas, and

the reflecting layer is formed under an area around the electrode unit.

65. A method of manufacturing a liquid crystal display device in which a liquid crystal layer having a negative dielectric anisotropy is sealed between a pair of substrates, comprising the steps of:

forming a conductive film on a substrate; and

forming a pixel electrode including a plurality of electrode units each including a solid part and a plurality of extension parts extending from the solid part toward an outer peripheral direction by patterning the conductive film.

66. A liquid crystal display device comprising:

a first substrate including a plurality of gate bus lines disposed almost in parallel with each other;

a plurality of drain bus lines disposed almost in parallel with each other to intersect with the gate bus lines;

a plurality of switching elements respectively provided at intersection parts of the gate bus lines and the drain bus lines and a plurality of pixel electrodes respectively formed in pixel areas respectively connected to the plurality of switching elements;

a second substrate provided to be opposite to the first substrate and having an opposite electrode opposite to the plurality of pixel electrodes; and

a liquid crystal layer sealed between the first substrate and the second substrate,

wherein layer for reflecting the incident light is fabricated using the same layer as that for gate layer or drain layer,

a part of gate layer or drain layer is covered by an insulating layer,

a part of the layers for reflecting the incident light is not covered by the insulating layer.

67. A liquid crystal display device according to claim 66,

wherein the part of the layers for reflecting the incident light without insulating layer on it have the surface with aluminum or have the surface where aluminum layer is exposed.

68. A liquid crystal display device according to claim 66,

wherein a part of the layers for reflecting the incident light is covered by a transparent electrode layer.

69. A liquid crystal display device according to claim 66,

wherein layer for reflecting the incident light is fabricated using the same layer as that for drain layer and a layer fabricated by using the same layer as that for gate layer is put or fabricated beneath the layer for reflecting the incident light.

70. A liquid crystal display device according to claim 66, wherein the pixel electrodes has a solid part and the layer for reflecting the incident light is fabricated in the solid part.

71. A liquid crystal display device according to claim 68,

wherein the layers for reflecting the incident light have aluminum layer and titanium or molybdenum layer on the surface and are covered by transparent electrode, and the transparent electrode is connected to the layer for reflecting the incident light through titanium or molybdenum layer.

72. A liquid crystal display device according to claim 71,

wherein the layers for reflecting the incident light have the aluminum layer on which titanium or molybdenum layer is fabricated, the holes are fabricated to the insulating layer and titanium or molybdenum layer to let the aluminum layer be exposed, and the transparent electrode is connected electrically to the titanium or molybdenum layer at the edge of the hole.

73. A liquid crystal display device according to claim 66,

wherein at least a part of the layers for reflecting the incident light is fabricated in the area for realizing subsidiary capacitance.

* * * * *

专利名称(译)	液晶显示装置及其制造方法		
公开(公告)号	US20040233360A1	公开(公告)日	2004-11-25
申请号	US10/812828	申请日	2004-03-30
[标]申请(专利权)人(译)	富士通显示技术股份有限公司		
申请(专利权)人(译)	富士通显示器科技股份有限公司.		
当前申请(专利权)人(译)	富士通显示器科技股份有限公司.		
[标]发明人	YOSHIDA HIDEFUMI TASAKA YASUTOSHI UEDA KAZUYA KAMADA TSUYOSHI SHIBASAKI MASAKAZU TASHIRO KUNIHIRO KOBAYASHI TETSUYA		
发明人	YOSHIDA, HIDEFUMI TASAKA, YASUTOSHI UEDA, KAZUYA KAMADA, TSUYOSHI SHIBASAKI, MASAKAZU TASHIRO, KUNIHIRO KOBAYASHI, TETSUYA		
IPC分类号	G02F1/1343 G02F1/1333 G02F1/1335 G02F1/139		
CPC分类号	G02F1/133371 G02F1/133504 G02F1/133555 G02F2001/133638 G02F1/134336 G02F1/1393 G02F1/133707 F24C7/043 F24C15/24 F24C15/36		
优先权	2003095392 2003-03-31 JP 2003095769 2003-03-31 JP		
其他公开文献	US7433005		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示装置及其制造方法技术领域本发明涉及一种用作信息设备的显示部分的液晶显示装置及其制造方法，其目的在于提供一种液晶显示装置，该液晶显示装置能够在不增加制造成本的情况下获得优异的显示特性。制造方法。液晶显示装置包括一对彼此相对设置的基板，液晶密封在一对基板之间并且当没有施加电压时几乎垂直于基板排列，一对四分之一波片分别设置在所述一对基板的外侧，分别设置在所述一对四分之一波片的外侧的一对偏振片，以及包括反射区域的像素区域，所述反射区域设置有具有几乎平坦的反射表面的反射板并用于反射从一个基板入射的光和用于使从另一个基板入射的光向一对基板中的一个基板传输的透射区域。

